

TEST SCRIPT GENERATOR – EXTENSION

I have added the test script generator in the existing code base for browser extension. I have designed this in a way that test script are dependent on the page classes. It's mandatory for a test script to generate the page class.

Step 1: When a test script is selected, page class should be selected automatically.

Step 2: A pop up appears with the action methods in the page class

Step 3 : User has to. Select the sequence.

Example: First username has to be called in the test script and then the password method and post that the continue button. This order has to be defined by the user

Step 4: On selecting the sequence, test script has to be generated in the chat panel.

[MANDATORY] As a QA Architect, Introduce another checkbox in code generator called "Test script".


[STRICT] When user checks the test script checkbox the "Page Object/ Page class" Checkbox as to be selected automatically and it has to be disabled.

[MUST] this condition applies only if user selects the Test script checkbox without checking the other checkboxes.

Example 1: If user selects the BDD check and test script , automatically Page Object/ Page class checkbox should be selected.

Example 2: When user selects Page Object/ Page class checkbox then only that has to be selected. Test script is not mandatory.

Make sure Test script should always have the Page Object/ Page class checkbox checked in all the possible use cases

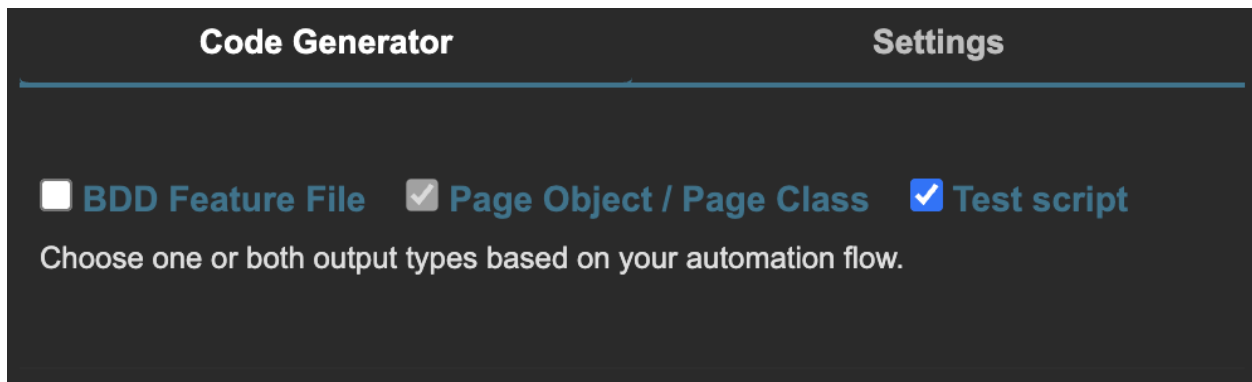


The screenshot shows a dark-themed interface with two tabs: "Code Generator" and "Settings". The "Settings" tab is active. Below the tabs, there are three checkboxes with labels: "BDD Feature File" (unchecked), "Page Object / Page Class" (checked), and "Test script" (checked). Below these checkboxes, there is a text instruction: "Choose one or both output types based on your automation flow."

[STRICT] On clicking the Generate button, first the page class should be generated.

[STRICT] Once the page classes are created, show a dialog box for generating the test script. These test scripts depends on the number of methods created in the page class.

Example: If there a 4 elements located then the dialog box should contain 4 steps with a dropdown having the list of action methods implemented in the page class.

User must be able to select 1 action method in the first step and then in the second step the next action method will be selected.

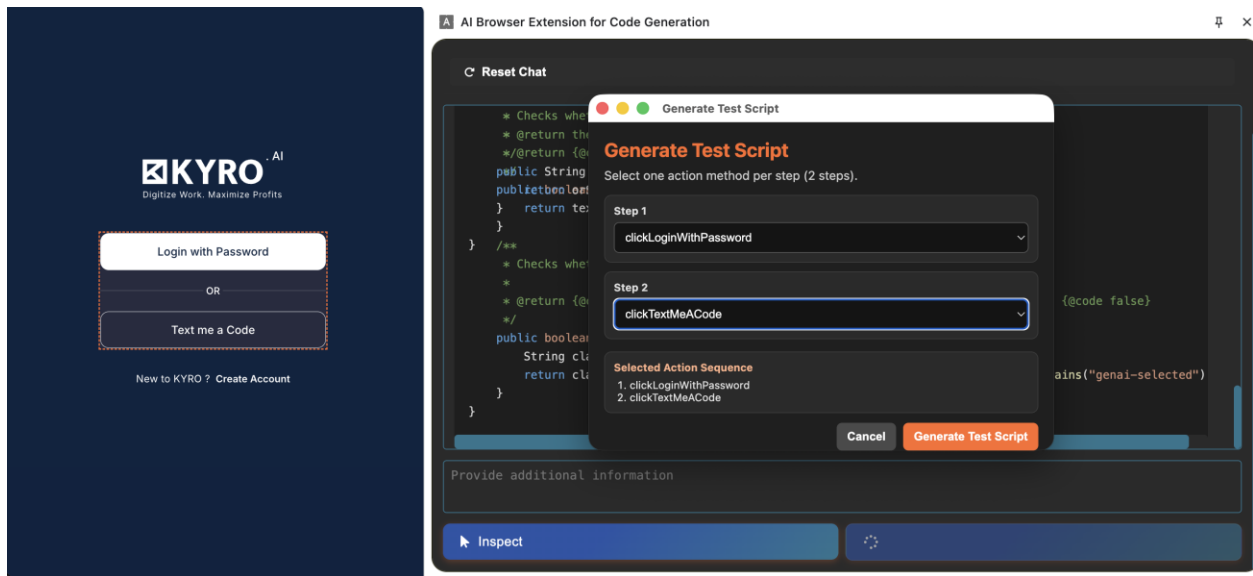

Perfect!

[STRICT] After selecting the sequence, the Test script has to be generated. It should be generated as a separate code below the page class code.

Example if the BDD, Page class and text script all 3 checkbox is selected then BDD file generation should be shown on top, next the page class generation and then below that test script should be shown.

[MUST] Action sequence order should be maintained in the text script execution.

Code Generator**Settings**

☐ BDD Feature File ☒ Page Object / Page Class ☒ Test script

Choose one or both output types based on your automation flow.

 **Reset Chat**

Page Class

```
package com.testleaf.pages;

import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.support.FindBy;
import org.openqa.selenium.support.PageFactory;

/**
 * Page Object representing the authentication options component.
 * Provides actions for the "Login with Password" and "Text me a Code" buttons,
 * as well as access to the "OR" separator text.
 */
public class AuthOptionsComponent {
```

Code Generator**Settings**

☐ BDD Feature File ☒ Page Object / Page Class ☒ Test script

Choose one or both output types based on your automation flow.

 **Reset Chat**

```
public class AuthOptionsComponent {

    private final WebDriver driver;

    /** Button to login using password. */
    @FindBy(xpath = "//*[@button[normalize-space()='Login with Password']")
    private WebElement loginWithPasswordButton;

    /** Button to request a code via text message. */
    @FindBy(xpath = "//*[@button[normalize-space()='Text me a Code']")
    private WebElement textMeACodeButton;

    /** The "OR" separator text between the two buttons. */
    @FindBy(xpath = "//*[@p[normalize-space()='OR']")
    private WebElement orSeparator;

    /**
     * Constructor initializes web elements.
     */
}
```

```
@AfterEach
void tearDown() {
    if (driver != null) {
        driver.quit();
    }
}

@Test
void testLoginWithPasswordThenTextMeACode() {
    AuthOptionsComponent auth = new AuthOptionsComponent(driver);

    // Step 1: clickLoginWithPassword
    assertTrue(auth.isLoginWithPasswordButtonVisible(), "Login with Password button should be visible");
    auth.clickLoginWithPassword();

    // Step 2: clickTextMeACode
    assertTrue(auth.isTextMeACodeButtonVisible(), "Text me a Code button should be visible");
}
```