

Flagship Practical-1(Terraform Mastery Part -2):


Production-Grade AWS VPC Networking with Terraform:



Multi-AZ Architecture, Public and Private Subnet



Segmentation, Internet Gateway Routing, Secure SSH-


Enabled EC2 Provisioning, and Infrastructure-as-Code

Lifecycle Management

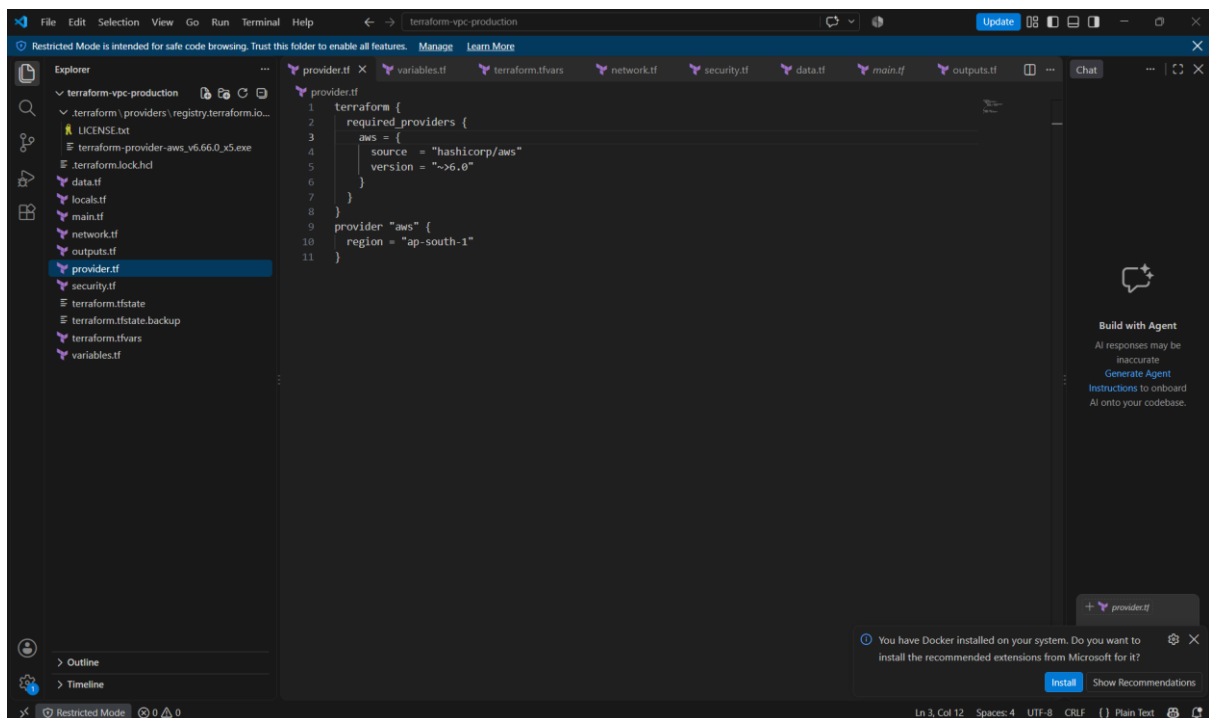


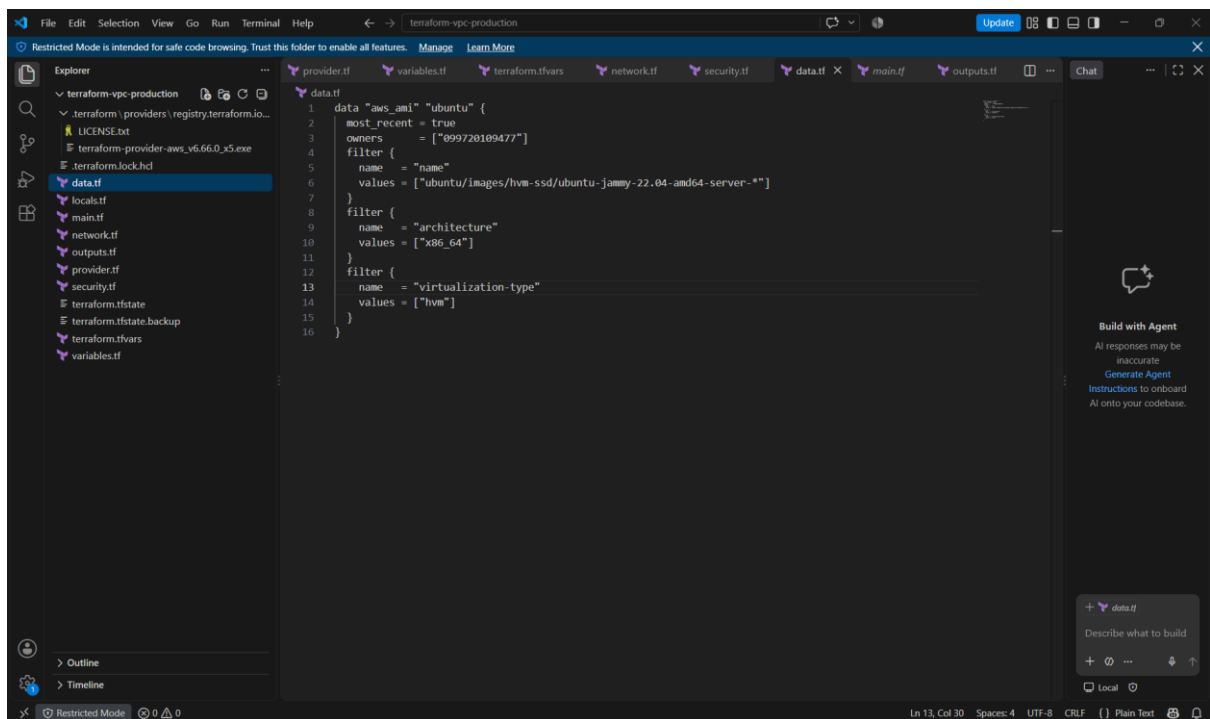
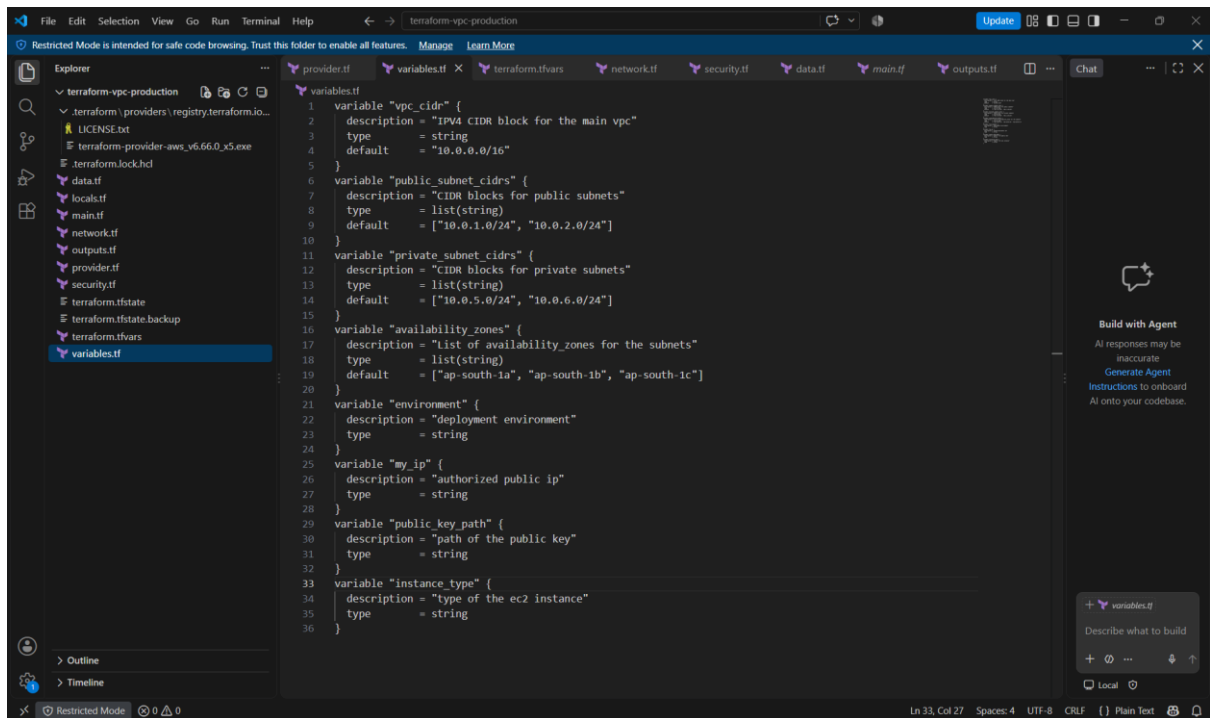


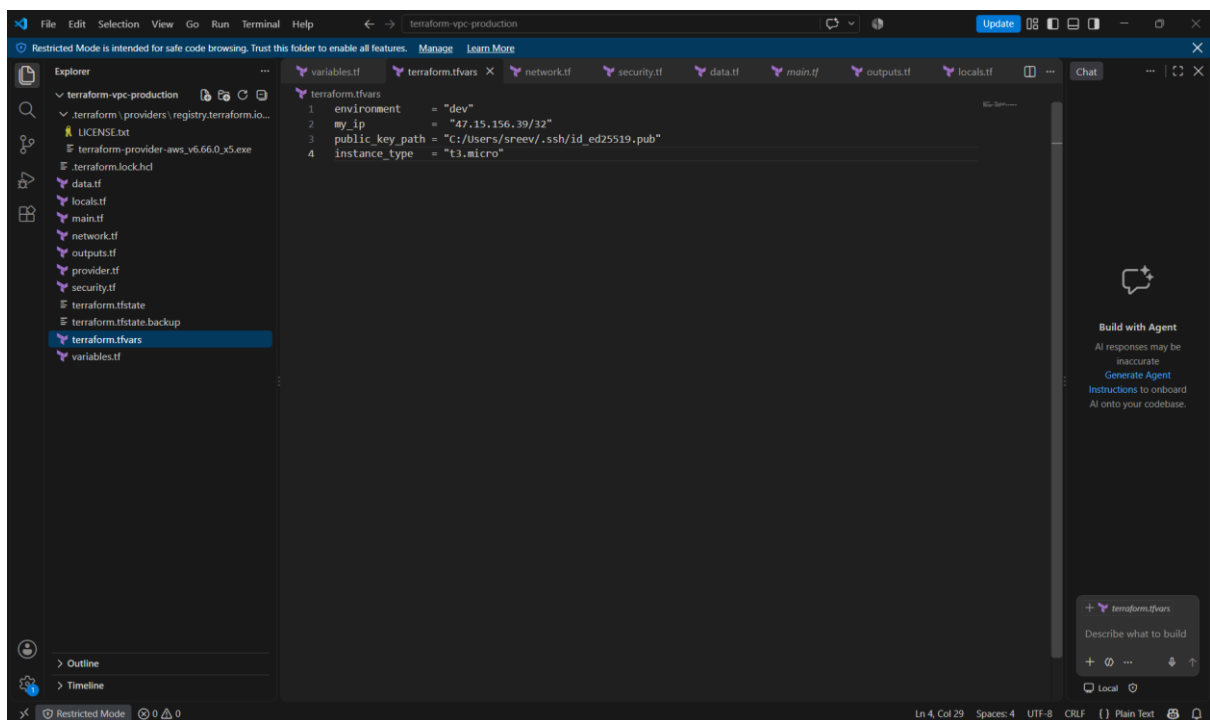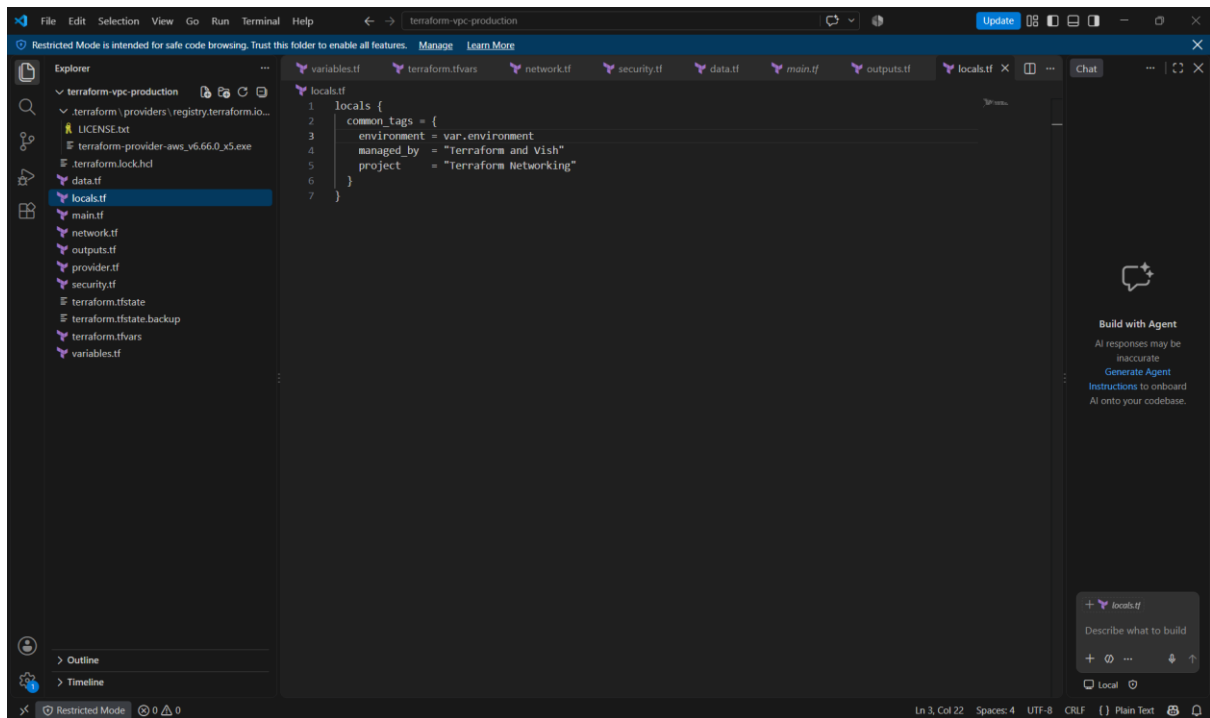


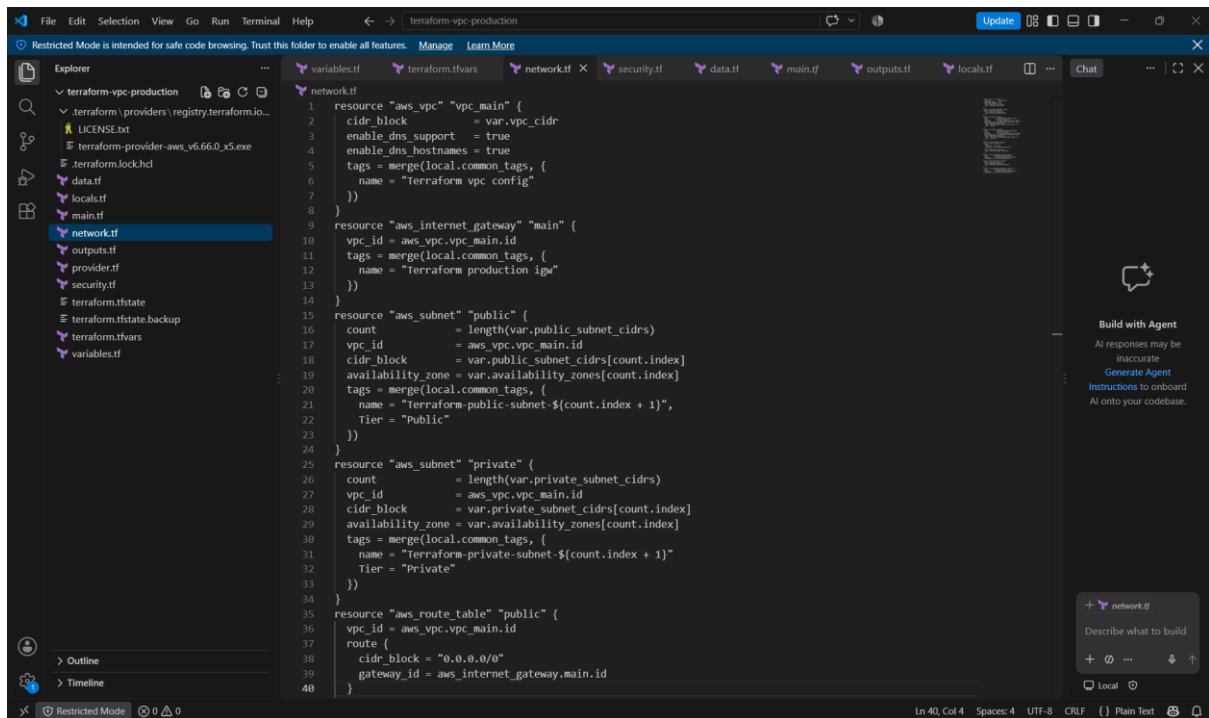

****Main****

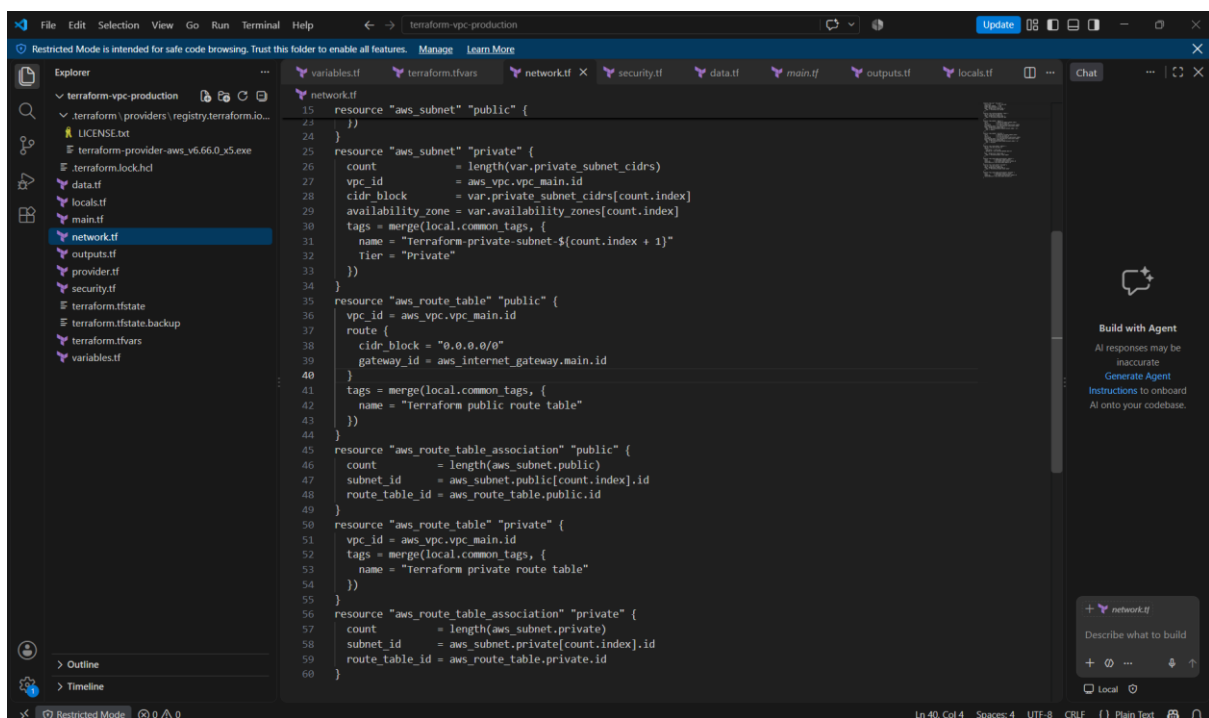

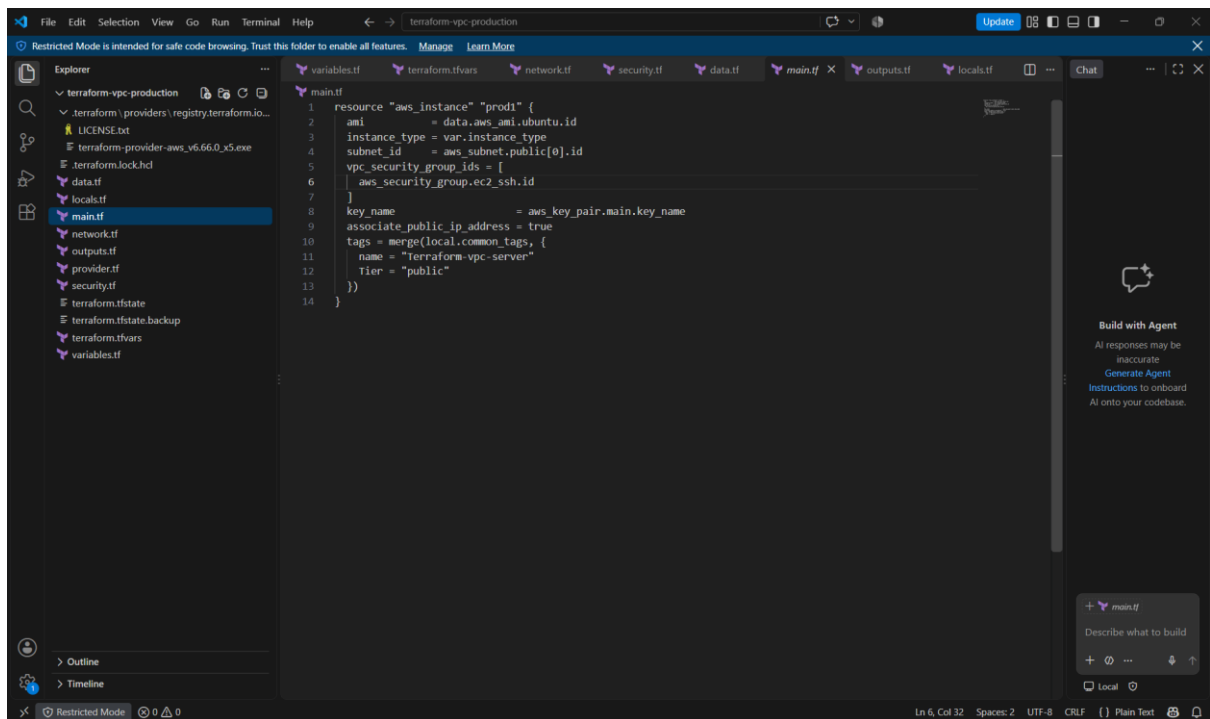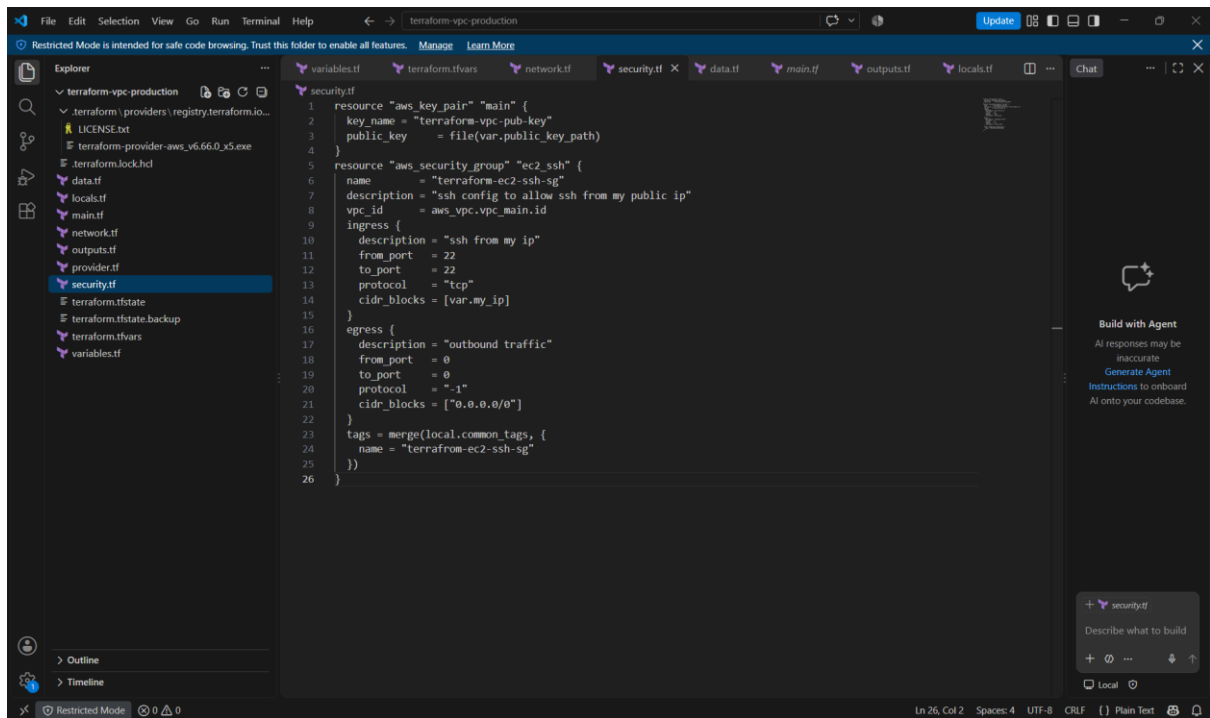

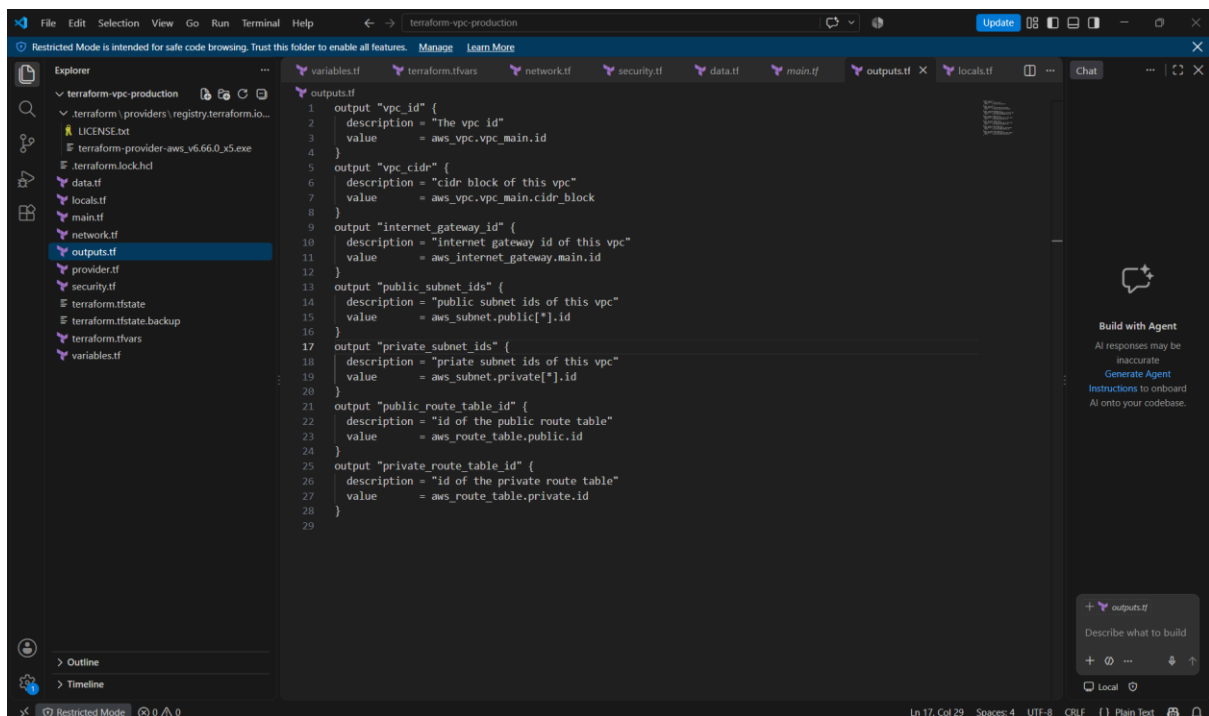

```
PS D:\terraform-vpc-production> terraform init
Initializing the backend...

Initializing provider plugins...
- Finding hashicorp/aws versions matching "~> 6.0"...
- Installing hashicorp/aws v6.66.0...
- Installed hashicorp/aws v6.66.0 (signed by HashiCorp)

Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
```

```
Windows PowerShell
PS D:\terraform-vpc-production> aws login
Attempting to open your default browser. If the browser does not open, open the following URL.
If you are unable to open the URL on this device, run this command again with the '--remote' option.

https://ap-south-1.signin.aws.amazon.com/v1/authorize?response_type=code&client_id=arn%3Aaws%3Asignin%3A%3A%3Adevtools%2Fsame-device&state=a4684c70-7dd6-4686-8483-960b1af91c0a&code_challenge_method=SHA-256&scope=openid&redirect_uri=http%3A%2F%2F127.0.0.1%3A54674%2Foauth%2Fcallback&code_challenge=kJ_2ljrcT60F2nm2co0VpP3aGUGHbsa0lN23YTYxPI

Updated profile default to use arn:aws:iam::368999587946:user/tf-admin credentials.
PS D:\terraform-vpc-production> terraform plan
data.aws_ami.ubuntu: Reading...

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform planned the following actions, but then encountered a problem:

# aws_internet_gateway.main will be created
+ resource "aws_internet_gateway" "main" {
+   arn      = (known after apply)
+   id       = (known after apply)
+   owner_id = (known after apply)
+   region   = "ap-south-1"
+   tags     = {
+     "environment" = "dev"
+     "managed_by"  = "Terraform and Vish"
+     "name"        = "Terraform production igw"
+     "project"     = "Terraform Networking"
+   }
+ vpc_id = (known after apply)
}
```

```
Windows PowerShell
# aws_internet_gateway.main will be created
+ resource "aws_internet_gateway" "main" {
+   arn      = (known after apply)
+   id       = (known after apply)
+   owner_id = (known after apply)
+   region   = "ap-south-1"
+   tags     = {
+     "environment" = "dev"
+     "managed_by"  = "Terraform and Vish"
+     "name"        = "Terraform production igw"
+     "project"     = "Terraform Networking"
+   }
+ tags_all = {
+   "environment" = "dev"
+   "managed_by"  = "Terraform and Vish"
+   "name"        = "Terraform production igw"
+   "project"     = "Terraform Networking"
+ }
+ vpc_id = (known after apply)
}

# aws_key_pair.main will be created
+ resource "aws_key_pair" "main" {
+   arn            = (known after apply)
+   fingerprint    = (known after apply)
+   id             = (known after apply)
+   key_name       = "terraform-vpc-pub-key"
+   key_name_prefix = (known after apply)
+   key_pair_id    = (known after apply)
+   key_type       = (known after apply)
}
```

```

}

# aws_route_table.private will be created
+ resource "aws_route_table" "private" {
  + arn                = (known after apply)
  + id                 = (known after apply)
  + owner_id           = (known after apply)
  + propagating_vgws   = (known after apply)
  + region             = "ap-south-1"
  + route              = (known after apply)
  + tags               = {
    + "environment" = "dev"
    + "managed_by"  = "Terraform and Vish"
    + "name"         = "Terraform private route table"
    + "project"      = "Terraform Networking"
  }
  + tags_all           = {
    + "environment" = "dev"
    + "managed_by"  = "Terraform and Vish"
    + "name"         = "Terraform private route table"
    + "project"      = "Terraform Networking"
  }
  + vpc_id             = (known after apply)
}

# aws_route_table.public will be created
+ resource "aws_route_table" "public" {
  + arn                = (known after apply)
  + id                 = (known after apply)
  + owner_id           = (known after apply)

```

```

# aws_security_group.ec2_ssh will be created
+ resource "aws_security_group" "ec2_ssh" {
  + arn                = (known after apply)
  + description         = "ssh config to allow ssh from my public ip"
  + egress              = [
    + {
      + cidr_blocks      = [
        + "0.0.0.0/0",
      ]
      + description      = "outbound traffic"
      + from_port         = 22
      + ipv6_cidr_blocks = []
      + prefix_list_ids   = []
      + protocol          = "-1"
      + security_groups   = []
      + self              = false
      + to_port           = 22
    },
  ]
  + id                 = (known after apply)
  + ingress            = [
    + {
      + cidr_blocks      = [
        + "152.59.119.79/32",
      ]
      + description      = "ssh from my ip"
      + from_port         = 22
      + ipv6_cidr_blocks = []
      + prefix_list_ids   = []
    },
  ]

```

```
Windows PowerShell

# aws_subnet.private[0] will be created
+ resource "aws_subnet" "private" {
  + arn                                = (known after apply)
  + assign_ipv6_address_on_creation    = false
  + availability_zone                  = "ap-south-1a"
  + availability_zone_id                = (known after apply)
  + cidr_block                         = "10.0.5.0/24"
  + enable_dns64                       = false
  + enable_resource_name_dns_a_record_on_launch = false
  + enable_resource_name_dns_aaaa_record_on_launch = false
  + id                                 = (known after apply)
  + ipv6_cidr_block                    = (known after apply)
  + ipv6_cidr_block_association_id     = (known after apply)
  + ipv6_native                        = false
  + map_public_ip_on_launch            = false
  + owner_id                           = (known after apply)
  + private_dns_hostname_type_on_launch = (known after apply)
  + region                             = "ap-south-1"
  + tags                               = {
    + "Tier" = "Private"
    + "environment" = "dev"
    + "managed_by" = "Terraform and Vish"
    + "name" = "Terraform-private-subnet-1"
    + "project" = "Terraform Networking"
  }
  + tags_all = {
    + "Tier" = "Private"
    + "environment" = "dev"
    + "managed_by" = "Terraform and Vish"
  }
}
```

```
Windows PowerShell

# aws_subnet.public[1] will be created
+ resource "aws_subnet" "public" {
  + arn                                = (known after apply)
  + assign_ipv6_address_on_creation    = false
  + availability_zone                  = "ap-south-1b"
  + availability_zone_id                = (known after apply)
  + cidr_block                         = "10.0.2.0/24"
  + enable_dns64                       = false
  + enable_resource_name_dns_a_record_on_launch = false
  + enable_resource_name_dns_aaaa_record_on_launch = false
  + id                                 = (known after apply)
  + ipv6_cidr_block                    = (known after apply)
  + ipv6_cidr_block_association_id     = (known after apply)
  + ipv6_native                        = false
  + map_public_ip_on_launch            = false
  + owner_id                           = (known after apply)
  + private_dns_hostname_type_on_launch = (known after apply)
  + region                             = "ap-south-1"
  + tags                               = {
    + "Tier" = "Public"
    + "environment" = "dev"
    + "managed_by" = "Terraform and Vish"
    + "name" = "Terraform-public-subnet-2"
    + "project" = "Terraform Networking"
  }
  + tags_all = {
    + "Tier" = "Public"
    + "environment" = "dev"
    + "managed_by" = "Terraform and Vish"
  }
}
```

```
Windows PowerShell
}
}

Plan: 15 to add, 0 to change, 0 to destroy.

Changes to Outputs:
+ internet_gateway_id = (known after apply)
+ private_route_table_id = (known after apply)
+ private_subnet_ids = [
+   (known after apply),
+   (known after apply),
+ ]
+ public_route_table_id = (known after apply)
+ public_subnet_ids = [
+   (known after apply),
+   (known after apply),
+ ]
+ vpc_cidr = "10.0.0.0/16"
+ vpc_id = (known after apply)

Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if you run "terraform apply" now.
PS D:\terraform-vpc-production> terraform apply
data.aws_ami.ubuntu: Reading...
data.aws_ami.ubuntu: Read complete after 0s [id=ami-07dfe2c11d33a069a]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
```

```
Windows PowerShell
PS D:\terraform-vpc-production> terraform apply
data.aws_ami.ubuntu: Reading...
aws_vpc.vpc_main: Refreshing state... [id=vpc-0874a339a59623e9c]
aws_key_pair.main: Refreshing state... [id=terraform-vpc-pub-key]
data.aws_ami.ubuntu: Read complete after 0s [id=ami-07dfe2c11d33a069a]
aws_internet_gateway.main: Refreshing state... [id=igw-05de73d02eda3f802]
aws_route_table.private: Refreshing state... [id=rtb-0bdabbdc73d4d29d0]
aws_subnet.private[0]: Refreshing state... [id=subnet-066f2e4ec55e5ca79]
aws_subnet.public[1]: Refreshing state... [id=subnet-0b485d9b2912d62ec]
aws_subnet.private[1]: Refreshing state... [id=subnet-00b828606cce5dbae]
aws_subnet.public[0]: Refreshing state... [id=subnet-029fe5c6f129577d9]
aws_security_group.ec2_ssh: Refreshing state... [id=sg-0f5d6a95468cdef46]
aws_route_table.public: Refreshing state... [id=rtb-097af744cff0afd15]
aws_route_table_association.private[0]: Refreshing state... [id=rtbassoc-05feb3584b241bc37]
aws_route_table_association.private[1]: Refreshing state... [id=rtbassoc-0c09eda8905a24803]
aws_route_table_association.public[0]: Refreshing state... [id=rtbassoc-0322b677c50a22051]
aws_route_table_association.public[1]: Refreshing state... [id=rtbassoc-0592ec6bb046cf49c]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create
-/+ destroy and then create replacement

Terraform will perform the following actions:

# aws_instance.prod1 will be created
+ resource "aws_instance" "prod1" {
+   ami = "ami-07dfe2c11d33a069a"
+   arn = (known after apply)
+   associate_public_ip_address = true
```

```
Windows PowerShell
PS D:\terraform-vpc-production> terraform apply
data.aws_ami.ubuntu: Reading...
aws_vpc.main: Refreshing state... [id=vpc-0874a339a59623e9c]
aws_key_pair.main: Refreshing state... [id=terraform-vpc-pub-key]
data.aws_ami.ubuntu: Read complete after 0s [id=ami-07dfe2c11d33a069a]
aws_internet_gateway.main: Refreshing state... [id=igw-05de73d02eda3f802]
aws_route_table.private: Refreshing state... [id=rtb-0bdabbdc73d4d29d0]
aws_subnet.private[0]: Refreshing state... [id=subnet-066f2e4ec55e5ca79]
aws_subnet.public[1]: Refreshing state... [id=subnet-0b485d9b2912d62ec]
aws_subnet.private[1]: Refreshing state... [id=subnet-00b828606cce5dbae]
aws_subnet.public[0]: Refreshing state... [id=subnet-029fe5c6f129577d9]
aws_security_group.ec2_ssh: Refreshing state... [id=sg-0f5d6a95468cdef46]
aws_route_table.public: Refreshing state... [id=rtb-097af744cff0afd15]
aws_route_table_association.private[0]: Refreshing state... [id=rtbassoc-05feb3584b241bc37]
aws_route_table_association.private[1]: Refreshing state... [id=rtbassoc-0c09eda8905a24803]
aws_route_table_association.public[0]: Refreshing state... [id=rtbassoc-0322b677c50a22051]
aws_route_table_association.public[1]: Refreshing state... [id=rtbassoc-0592ec6bb046cf49c]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the
following symbols:
+ create
-/+ destroy and then create replacement

Terraform will perform the following actions:

# aws_instance.prod1 will be created
+ resource "aws_instance" "prod1" {
+   ami                      = "ami-07dfe2c11d33a069a"
+   arn                     = (known after apply)
+   associate_public_ip_address = true
```

```
Windows PowerShell
+   associate_public_ip_address = true
+   availability_zone          = (known after apply)
+   disable_api_stop          = (known after apply)
+   disable_api_termination   = (known after apply)
+   ebs_optimized              = (known after apply)
+   enable_primary_ipv6        = (known after apply)
+   force_destroy              = false
+   get_password_data          = false
+   host_id                    = (known after apply)
+   host_resource_group_arn    = (known after apply)
+   iam_instance_profile       = (known after apply)
+   id                         = (known after apply)
+   instance_initiated_shutdown_behavior = (known after apply)
+   instance_lifecycle         = (known after apply)
+   instance_state             = (known after apply)
+   instance_type              = "t3.micro"
+   ipv6_address_count         = (known after apply)
+   ipv6_addresses             = (known after apply)
+   key_name                   = "terraform-vpc-pub-key"
+   monitoring                  = (known after apply)
+   outpost_arn                = (known after apply)
+   password_data              = (known after apply)
+   placement_group            = (known after apply)
+   placement_group_id         = (known after apply)
+   placement_partition_number = (known after apply)
+   primary_network_interface_id = (known after apply)
+   private_dns                 = (known after apply)
+   private_ip                 = (known after apply)
+   public_dns                 = (known after apply)
+   public_ip                  = (known after apply)
```

```

Windows PowerShell
# aws_security_group.ec2_ssh is tainted, so must be replaced
-/+ resource "aws_security_group" "ec2_ssh" {
  ~ arn                = "arn:aws:ec2:ap-south-1:368999587946:security-group/sg-0f5d6a95468cdef46" -> (known after apply)
  ~ egress              = [
    + {
      + cidr_blocks      = [
        + "0.0.0.0/0",
      ]
      + description      = "outbound traffic"
      + from_port        = 0
      + ipv6_cidr_blocks = []
      + prefix_list_ids  = []
      + protocol         = "-1"
      + security_groups  = []
      + self             = false
      + to_port          = 0
    },
  ]
  ~ id                  = "sg-0f5d6a95468cdef46" -> (known after apply)
  ~ name                = "terraform-ec2-ssh-sg"
  + name_prefix         = (known after apply)
  ~ owner_id            = "368999587946" -> (known after apply)
  ~ tags                = {
    "environment" = "dev"
    "managed_by"  = "Terraform and Vish"
    "name"        = "terraform-ec2-ssh-sg"
    "project"     = "Terraform Networking"
  }
}
# (6 unchanged attributes hidden)

```

```

Windows PowerShell

Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.

Enter a value: yes

aws_security_group.ec2_ssh: Destroying... [id=sg-0f5d6a95468cdef46]
aws_security_group.ec2_ssh: Destruction complete after 1s
aws_security_group.ec2_ssh: Creating...
aws_security_group.ec2_ssh: Creation complete after 3s [id=sg-077dc75440d1b7cd8]
aws_instance.prod1: Creating...
aws_instance.prod1: Still creating... [00m10s elapsed]
aws_instance.prod1: Creation complete after 13s [id=i-04beda036d7b79504]

Apply complete! Resources: 2 added, 0 changed, 1 destroyed.

Outputs:


internet_gateway_id = "igw-05de73d02eda3f802"
private_route_table_id = "rtb-0bdabbdc73d4d29d0"
private_subnet_ids = [
  "subnet-066f2e4ec55e5ca79",
  "subnet-00b828606cce5dbae",
]
public_route_table_id = "rtb-097af744cff0afd15"
public_subnet_ids = [
  "subnet-029fe5c6f129577d9",
  "subnet-0b485d9b2912d62ec",
]
vpc_cidr = "10.0.0.0/16"
vpc_id = "vpc-0874a339a59623e9c"

```


```
Windows PowerShell

Outputs:


internet_gateway_id = "igw-05de73d02eda3f802"
private_route_table_id = "rtb-0bdabbdc73d4d29d0"
private_subnet_ids = [
  "subnet-066f2e4ec55e5ca79",
  "subnet-00b828606cce5dbae",
]
public_route_table_id = "rtb-097af744cff0afd15"
public_subnet_ids = [
  "subnet-029fe5c6f129577d9",
  "subnet-0b485d9b2912d62ec",
]
vpc_cidr = "10.0.0.0/16"
vpc_id = "vpc-0874a339a59623e9c"
PS D:\terraform-vpc-production> terraform output
internet_gateway_id = "igw-05de73d02eda3f802"
private_route_table_id = "rtb-0bdabbdc73d4d29d0"
private_subnet_ids = [
  "subnet-066f2e4ec55e5ca79",
  "subnet-00b828606cce5dbae",
]
public_route_table_id = "rtb-097af744cff0afd15"
public_subnet_ids = [
  "subnet-029fe5c6f129577d9",
  "subnet-0b485d9b2912d62ec",
]
vpc_cidr = "10.0.0.0/16"
vpc_id = "vpc-0874a339a59623e9c"
PS D:\terraform-vpc-production> |
```

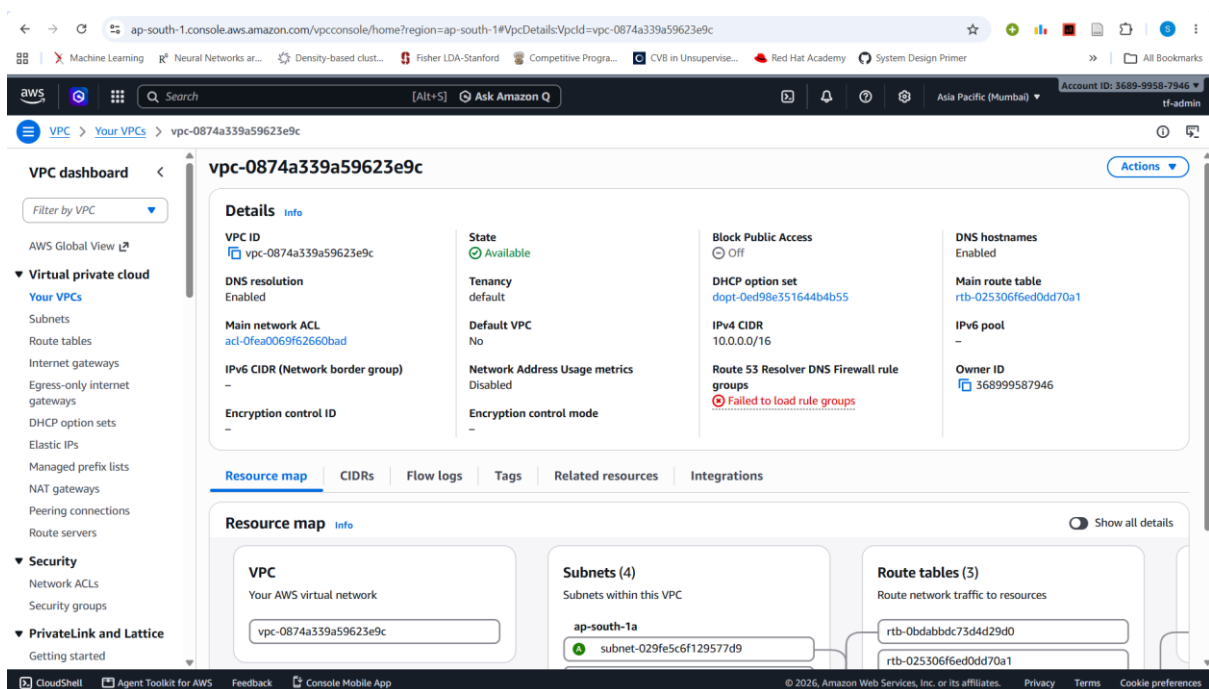

Successfully provisioned my custom AWS VPC (10.0.0.0/16) with DNS resolution and DNS hostnames enabled, fully provisioned and managed through Terraform

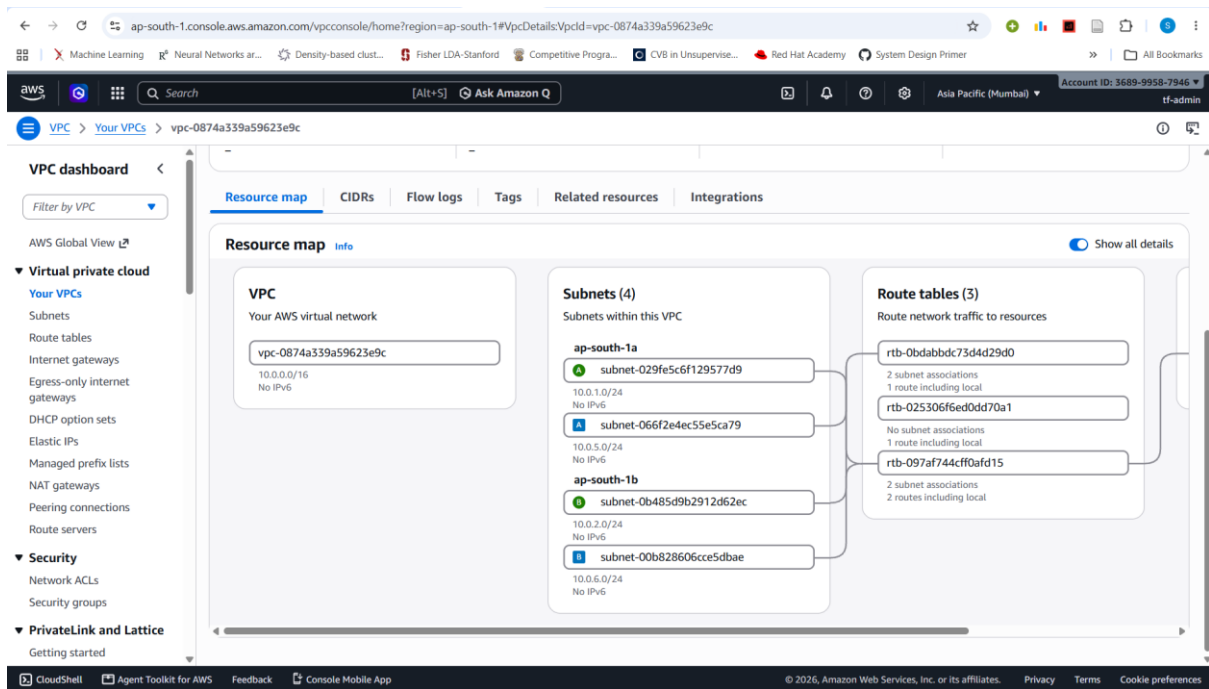

And there we go!! all four subnets (2 private,2 public) successfully provisioned across two Availability Zones, establishing a complete multi-AZ custom VPC network with isolated public and private subnets. A production-style network architecture, built from scratch and managed entirely through Terraform.

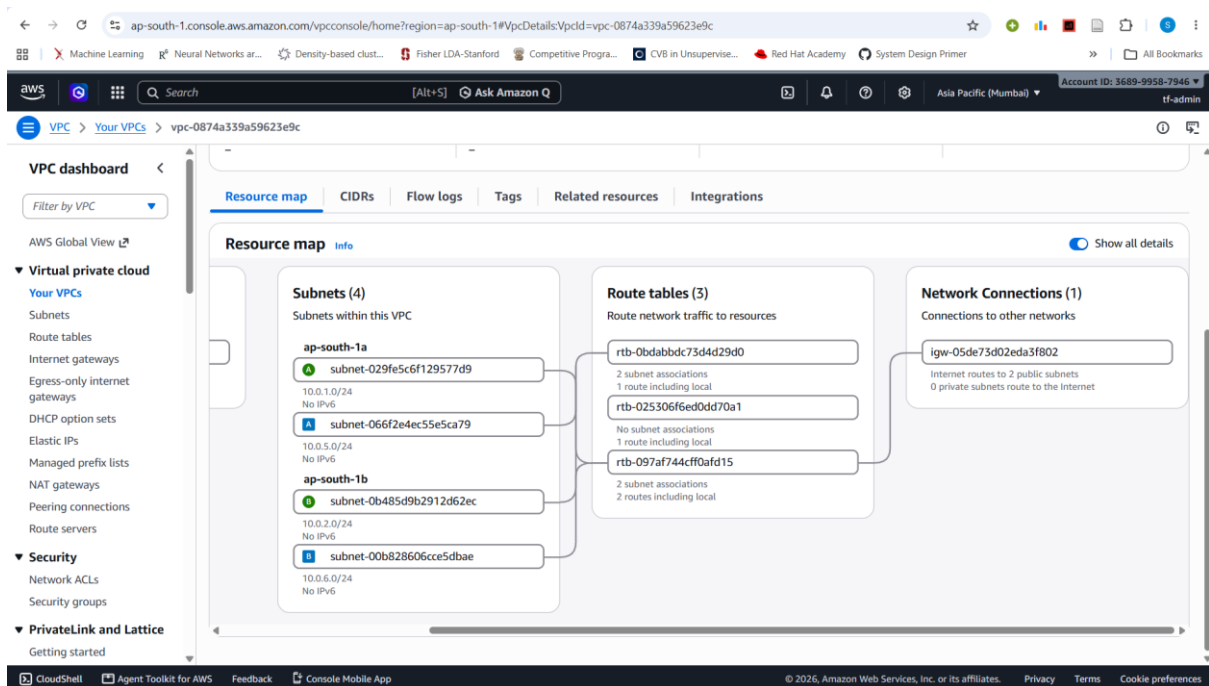

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#InstanceDetails:instanceId=i-04beda036d7b79504

Machine Learning Neural Networks ar... Density-based clust... Fisher LDA-Stanford Competitive Progra... CVB in Unsupervise... Red Hat Academy System Design Primer

Search [Alt+S]

Asia Pacific (Mumbai) Account ID: 3689-9958-7946 tf-admin

EC2 > Instances > i-04beda036d7b79504

EC2

- Dashboard
- AWS Global View
- Events
- ▼ Instances
 - Instances
 - Instance Types
 - Launch Templates
 - Spot Requests
 - Savings Plans
 - Reserved Instances
 - Dedicated Hosts
 - Capacity Reservations
 - UltraServers **New**
 - Capacity Manager **New**
- ▼ Images
 - AMIs
 - AMI Catalog
- ▼ Elastic Block Store
 - Volumes
 - Snapshots
 - Lifecycle Manager

Instance summary for i-04beda036d7b79504

Updated less than a minute ago

[Connect](#) [Instance state](#) [Actions](#)

Instance ID i-04beda036d7b79504	Public IPv4 address 35.154.129.57 open address	Private IPv4 addresses 10.0.1.241
IPv6 address -	Instance state Running	Public DNS ec2-35-154-129-57.ap-south-1.compute.amazonaws.com open address
Hostname type IP name: ip-10-0-1-241.ap-south-1.compute.internal	Private IP DNS name (IPv4 only) ip-10-0-1-241.ap-south-1.compute.internal	Elastic IP addresses -
Answer private resource DNS name -	Instance type t3.micro	AWS Compute Optimizer finding User: arnaws:iam::368999587946:user/tf-admin is not authorized to perform: compute-optimizer:GetEnrollmentStatus on resource: * because no identity-based policy allows the compute-optimizer:GetEnrollmentStatus action Retry
Auto-assigned IP address 35.154.129.57 [Public IP]	VPC ID vpc-0874a339a59623e9c	Auto Scaling Group name -
IAM role -	Subnet ID subnet-029fe5c6f129577d9	Managed false
IMDSv2 Optional ⚠ EC2 recommends setting IMDSv2 to required	Instance ARN arnaws:ec2:ap-south-1:368999587946:instance/i-04beda036d7b79504	

CloudShell Agent Toolkit for AWS Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#InstanceDetails:instanceId=i-04beda036d7b79504

Machine Learning Neural Networks ar... Density-based clust... Fisher LDA-Stanford Competitive Progra... CVB in Unsupervise... Red Hat Academy System Design Primer

Search [Alt+S]

Asia Pacific (Mumbai) Account ID: 3689-9958-7946 tf-admin

EC2 > Instances > i-04beda036d7b79504

EC2

- Dashboard
- AWS Global View
- Events
- ▼ Instances
 - Instances
 - Instance Types
 - Launch Templates
 - Spot Requests
 - Savings Plans
 - Reserved Instances
 - Dedicated Hosts
 - Capacity Reservations
 - UltraServers **New**
 - Capacity Manager **New**
- ▼ Images
 - AMIs
 - AMI Catalog
- ▼ Elastic Block Store
 - Volumes
 - Snapshots
 - Lifecycle Manager

Instance details

AMI ID: [ami-07dfe2c11d33a069a](#)

AMI name: [ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20260904](#)

Stop protection: Disabled

Instance reboot migration: Default (On)

Stop-hibernate behavior: Disabled

State transition reason: -

State transition message: -

Owner: [368999587946](#)

Current instance boot mode: [uefi](#)

Monitoring: disabled

Allowed image: -

Launch time: [Fri Sep 25 2026 17:56:38 GMT+0530 \(India Standard Time\)](#) (about 1 hour)

Instance auto-recovery: Default

AMI Launch index: 0

Credit specification: unlimited

Usage operation: [RunInstances](#)

Enclaves Support: Disabled

Allow tags in instance metadata: Disabled

Platform details: [Linux/UNIX](#)

Termination protection: Disabled

AMI location: [amazon/ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-20260904](#)

Lifecycle: normal

Key pair assigned at launch: [terraform-vpc-pub-key](#)

Kernel ID: -

RAM disk ID: -

Boot mode: [uefi-preferred](#)

Use RBN as guest OS hostname: [Disabled](#)

CloudShell Agent Toolkit for AWS Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

The screenshot shows the AWS Management Console interface. At the top, the browser address bar displays the URL: `ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#SecurityGroupSecurityGroupDetails=sg-077dc75440d1b7cd8`. The console header includes navigation links for Machine Learning, Neural Networks, Density-based clustering, Fisher LDA, Stanford, Competitive Programming, CVB in Unsupervised Learning, Red Hat Academy, and System Design Primer. The user's account ID is 3689-9958-7946, and they are logged in as tf-admin.

The main content area displays the details for the security group **sg-077dc75440d1b7cd8 - terraform-ec2-ssh-sg**. The left sidebar shows the navigation menu with options like Dashboard, AWS Global View, Events, Instances, Instance Types, Launch Templates, Spot Requests, Savings Plans, Reserved Instances, Dedicated Hosts, Capacity Reservations, UltraServers, Capacity Manager, Images, AMIs, AMI Catalog, Elastic Block Store, Volumes, Snapshots, and Lifecycle Manager.

The security group details are organized into sections:

- Details:**
 - Security group name:** terraform-ec2-ssh-sg
 - Security group ID:** sg-077dc75440d1b7cd8
 - Description:** ssh config to allow ssh from my public ip
 - VPC ID:** vpc-0874a339a59623e9c
 - Owner:** 368999587946
 - Inbound rules count:** 1 Permission entry
 - Outbound rules count:** 1 Permission entry
- Inbound rules (1):**
 - Search bar: Q Search
 - Table with columns: Name, Security group rule ID, IP version, Type, Protocol, Port range.
 - Row 1: -, sgr-0f769c0059ed13bf1, IPv4, SSH, TCP, 22

At the bottom of the console, there are links for CloudShell, Agent Toolkit for AWS, Feedback, and Console Mobile App. The footer includes the copyright notice: © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences.

← → ↺ ↻ ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#SecurityGroup:securityGroupId=sg-077dc75440d1b7cd8

Machine Learning

Neural Networks ar...

Density-based clust...

Fisher LDA-Stanford

Competitive Progra...

CVB in Unsupervise...

Red Hat Academy

System Design Primer

»

All Bookmarks

AWS

Search

[Alt+S]

🔍

🔔

🔒

⚙️

Asia Pacific (Mumbai)

Account ID: 3689-9958-7946

tf-admin

EC2

<

sg-077dc75440d1b7cd8

Actions

Dashboard

AWS Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

UltraServers

Capacity Manager

▼ Images

AMIs

AMI Catalog

▼ Elastic Block Store

Volumes

Snapshots

Lifecycle Manager

Details

Security group name

terraform-ec2-ssh-sg

Security group ID

sg-077dc75440d1b7cd8

Description

ssh config to allow ssh from my public i

VPC ID

vpc-0874a339a59623e9c

Owner

368999587946

Inbound rules count

1 Permission entry

Outbound rules count

1 Permission entry

Inbound rules

Outbound rules

Sharing

VPC associations

Related resources - new

Tags

Outbound rules (1)

Manage tags

Edit outbound rules

Search

< 1 >

⚙️

☐	Name	Security group rule ID	IP version	Type	Protocol	Port range
☐	-	sgr-0252df17ba1fd13b	IPv4	All traffic	All	All

CloudShell

Agent Toolkit for AWS

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

← → ↺ ↻ ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#SecurityGroup:securityGroupId=sg-077dc75440d1b7cd8

Machine Learning

Neural Networks ar...

Density-based clust...

Fisher LDA-Stanford

Competitive Progra...

CVB in Unsupervise...

Red Hat Academy

System Design Primer

»

All Bookmarks

AWS

Search

[Alt+S]

🔍

🔔

🔒

⚙️

Asia Pacific (Mumbai)

Account ID: 3689-9958-7946

tf-admin

EC2

<

sg-077dc75440d1b7cd8

Actions

Dashboard

AWS Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

UltraServers

Capacity Manager

▼ Images

AMIs

AMI Catalog

▼ Elastic Block Store

Volumes

Snapshots

Lifecycle Manager

Details

Security group name

terraform-ec2-ssh-sg

Security group ID

sg-077dc75440d1b7cd8

Description

ssh config to allow ssh from my public i

VPC ID

vpc-0874a339a59623e9c

Owner

368999587946

Inbound rules count

1 Permission entry

Outbound rules count

1 Permission entry

Inbound rules

Outbound rules

Sharing

VPC associations

Related resources - new

Tags

Outbound rules (1)

Manage tags

Edit outbound rules

Search

< 1 >

⚙️

☐	IP version	Type	Protocol	Port range	Destination	Description
☐	IPv4	All traffic	All	All	0.0.0.0/0	outbound traffic

CloudShell

Agent Toolkit for AWS

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

```
ubuntu@ip-10-0-1-241: ~  
  
Expanded Security Maintenance for Applications is not enabled.  
0 updates can be applied immediately.  
  
Enable ESM Apps to receive additional future security updates.  
See https://ubuntu.com/esm or run: sudo pro status  
  
The list of available updates is more than a week old.  
To check for new updates run: sudo apt update  
  
The programs included with the Ubuntu system are free software;  
the exact distribution terms for each program are described in the  
individual files in /usr/share/doc/*/copyright.  
  
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by  
applicable law.  
  
To run a command as administrator (user "root"), use "sudo <command>".  
See "man sudo_root" for details.  
ubuntu@ip-10-0-1-241:~$ |
```

A Perfect end to a beautiful practical!!