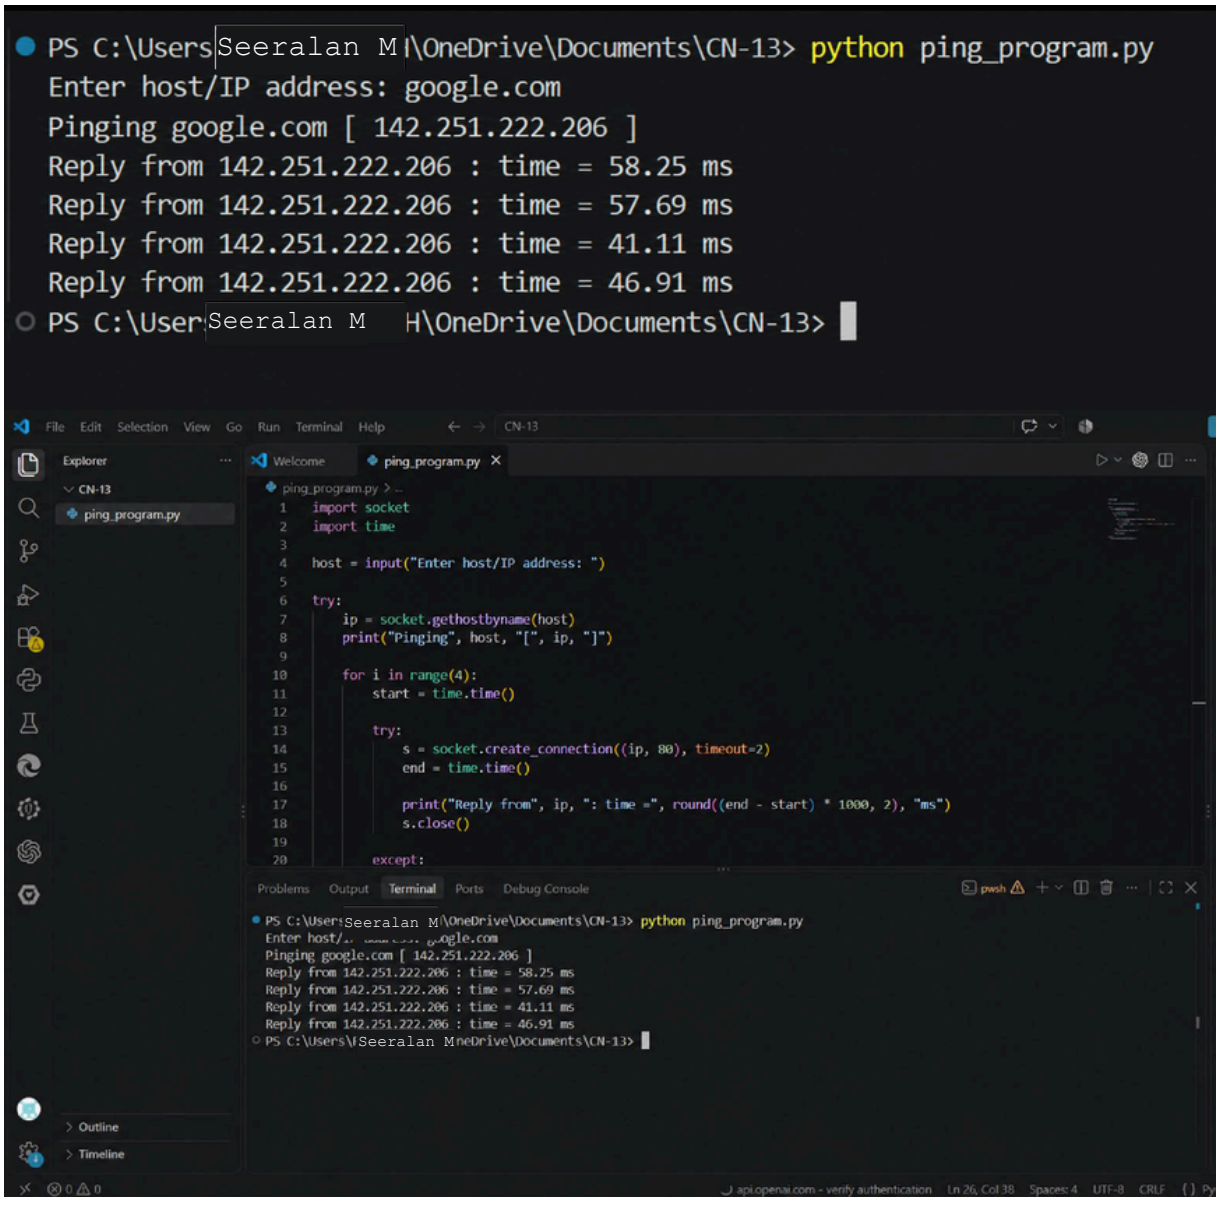
EXPERIMENT-13

13. Implement your own ping program.

ping_program.py

```
import socket import
time
host = input("Enter host/IP address: ")
try:
   ip = socket.gethostbyname(host)
print("Pinging", host, "[", ip, "]")
   for i in range(4):
      start = time.time()
     try:
        s = socket.create_connection((ip, 80), timeout=2)
end = time.time()
        print("Reply from", ip, ": time =", round((end - start) * 1000, 2), "ms")
s.close()
      except:
        print("Request timed out.")
      time.sleep(1)
except:    print("Invalidhost/IP
address.")
```


PS C:\Users Seeralan M \OneDrive\Documents\CN-13> python ping_program.py
Enter host/IP address: google.com
Pinging google.com [142.251.222.206]
Reply from 142.251.222.206 : time = 58.25 ms
Reply from 142.251.222.206 : time = 57.69 ms
Reply from 142.251.222.206 : time = 41.11 ms
Reply from 142.251.222.206 : time = 46.91 ms
PS C:\User Seeralan M H\OneDrive\Documents\CN-13>
File Edit Selection View Go Run Terminal Help
CN-13
Explorer
CN-13
ping_program.py
Welcome
ping_program.py
import socket
import time
host = input("Enter host/IP address: ")
try:
ip = socket.gethostbyname(host)
print("Pinging", host, "[", ip, "]")
for i in range(4):
start = time.time()
try:
s = socket.create_connection((ip, 80), timeout=2)
end = time.time()
print("Reply from", ip, ": time =", round((end - start) * 1000, 2), "ms")
s.close()
except:
Problems Output Terminal Ports Debug Console
pwsh
PS C:\Users Seeralan M \OneDrive\Documents\CN-13> python ping_program.py
Enter host/
ogle.com
Pinging google.com [142.251.222.206]
Reply from 142.251.222.206 : time = 58.25 ms
Reply from 142.251.222.206 : time = 57.69 ms
Reply from 142.251.222.206 : time = 41.11 ms
Reply from 142.251.222.206 : time = 46.91 ms
PS C:\Users\ Seeralan M neDrive\Documents\CN-13>
Outline
Timeline
api.openai.com - verify authentication
Ln 26, Col 38
Spaces: 4
UTF-8
CRLF