



Set-Up Instructions | PUBLIC

SAP S/4HANA

2024-09-03

Setting Up *Opportunity to Order with SAP Sales Cloud* *Version 2 (6KO)*

Content

1	Purpose.	4
2	Preparation.	5
2.1	Required Information.	5
2.2	Prerequisites.	5
3	Configuration.	7
3.1	Configuration in SAP Sales Cloud and SAP Service Cloud Version 2.	7
3.2	Create Document Type for Quote Simulation.	8
3.3	Configuration in SAP Cloud Integration.	9
	Configuration of Employee iFlows (SAP S/4HANA Only).	9
	Configuration of Sales Order iFlows (SAP S/4HANA Only).	10
	Configuration of Quote Simulation iFlows (SAP S/4HANA Only).	11
	Configuration of Value Mapping for Master Data.	11
3.4	Configuration in SAP S/4HANA.	12
	Prerequisites for Configuration in SAP S/4HANA.	12
	Maintaining Trust between SAP Cloud Integration SAP Cloud Integration (SCI) and SAP S/4HANA	12
	SAP S/4HANA Web Service Configuration (SOA Management).	13
	Create Service User for Inbound Replication.	16
	SAP S/4HANA Gateway Services Publishing for Code List Replication.	17
	Configuration for Equipment and Functional Location.	18
	Configuration for Employee Replication.	20
	Configuration of Sales Documents.	22
	Configuration for Account Hierarchy.	25
3.5	SAP Event Mesh Service Configuration.	27
3.6	SAP S/4HANA Data Replication Framework (DRF) Configuration.	27
	Define Technical Settings for Business Systems.	27
	Define Replication Model.	29
	Filter Reflexive Partner Functions.	31
3.7	Configuration in SAP Cloud Connector (SCC).	32
4	Master Data Initial Replication.	35
4.1	Define Filter Criteria and Replicate by Replication Model.	35
	Region Code.	36
	Company Code.	36
	Sales Organization.	37
	Material Group.	37


	Sales Division.	38
	Sales Area.	39
	Sales Office.	39
	Sales Group.	40
	Customer Hierarchy.	40
	Business Partner.	41
	Product.	41
5	Appendix.	42
5.1	Check Endpoint Name in SAP Cloud Integration (SCI).	42
5.2	Pricing Procedure Determination.	42
5.3	Ticket Component.	43

1 Purpose

This document describes the procedure to manually configure the integration between SAP S/4HANA and SAP Sales Cloud and SAP Service Cloud Version 2 using SAP Cloud Integration (SCI).

As these configuration steps are customer-specific, they can't be delivered by SAP and must be performed by the customer. This document describes the general configuration steps to manually set up the configuration within the existing system landscape.

If you have any queries or feedback about this document, create a ticket using the component CA-GTF-INT-CFC.

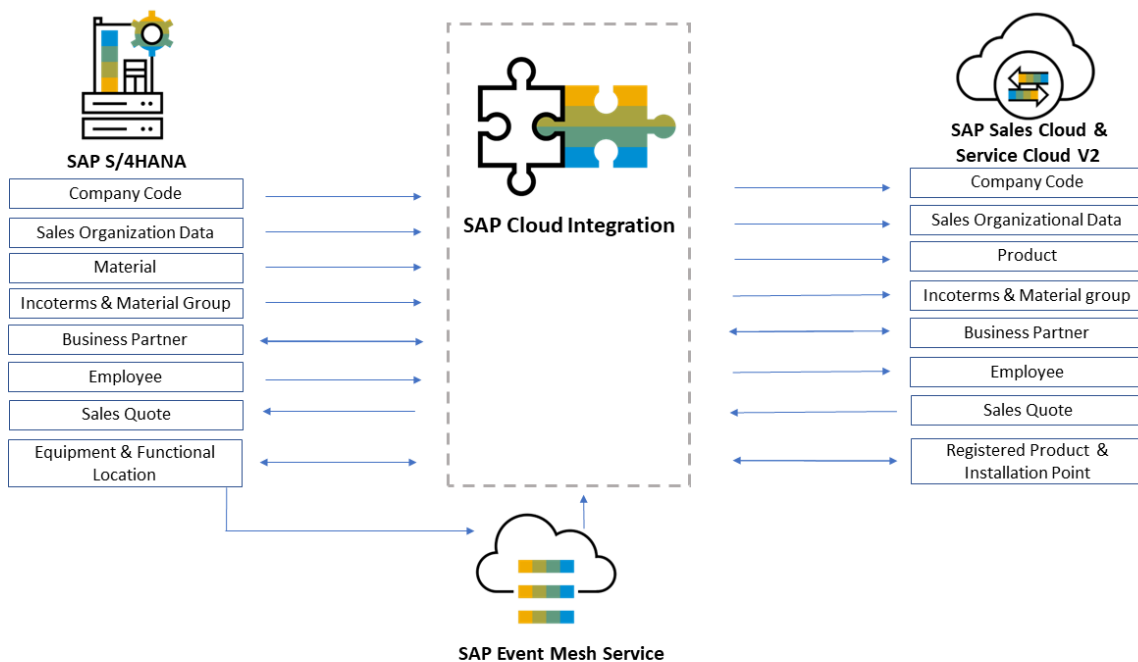

2 Preparation

The following sections describe the required information and prerequisites.

2.1 Required Information

While performing the activities described in this guide, you need to enter or provide system-specific information. Before you start the integration process, it's recommended that you have the information listed in the following table so that it is easily available. This information ensures a smooth and efficient integration of SAP S/4HANA with SAP Sales Cloud and SAP Service Cloud Version 2.

Information Required:

SAP S/4HANA system

SAP Cloud Connector

SAP Cloud Integration

SAP Sales Cloud and SAP Service Cloud Version 2

SAP Business Technology Platform (SAP BTP) with SAP Event Mesh service subscription (In case you plan for technical objects replication in the scope)

2.2 Prerequisites

You have access to the SAP Sales Cloud and SAP Service Cloud Version 2 system. This includes:

- Initial user and access information for your SAP Sales Cloud and SAP Service Cloud Version 2 tenant provided via e-mail by Cloud Management Service.

You have access to the SAP Cloud Integration system. This includes:

- Initial user and access information for your SAP Cloud Integration tenant.
- SAP Cloud Integration Client Certificate

You have a subaccount on SAP Business Technology Platform (SAP BTP) with a subscription to SAP Event Mesh service. This includes:

- Configuration of entitlements and adding a service plan (plan type: Default) for SAP Event Mesh service.
- Creation of an instance of SAP Event Mesh service.

- Subscription to SAP Event Mesh service by administrator of the global account.
- User access to the SAP Event Mesh UI by assignment of role collection in the subaccount.

For details on setting up SAP Event Mesh Service, visit the SAP Help Portal document for [What Is SAP Event Mesh](#). While creating an instance for SAP Event Mesh service, ensure that you use the [JSON scope](#) that includes topic rules for publish and subscribe. By registering your SAP S/4HANA system in SAP Business Technology Platform (SAP BTP), maintaining SAP BTP extensions in SAP S/4HANA and adding service plans for extensibility in SAP S/4HANA and SAP Event Mesh

3 Configuration

The following sections describe all settings required for this scope item. This can be divided into the following main groups:

- Configuration in SAP Sales Cloud and SAP Service Cloud Version 2
- Configuration in SAP Cloud Integration
- Configuration in SAP S/4HANA
- Configuration in SAP Cloud Connector
- Configuration in SAP Event Mesh service
- SAP S/4HANA Data Replication Framework (DRF) Configuration

The set up of the following systems is explained comprehensively in the 6KO Cloud version, under the same titles:

- Configuration in SAP Sales Cloud and SAP Service Cloud Version 2
- Configuration in SAP Cloud Integration
- Configuration in SAP Event Mesh service

3.1 Configuration in SAP Sales Cloud and SAP Service Cloud Version 2

Besides following configuration provided under section *Configuration in SAP Service Cloud Version 2* described in the [set up instructions for 6KO](#) (integration for SAP S/4HANA Public Cloud version), you need to pay attention to the following settings that are specific only to SAP S/4HANA.

📌 Note

- The SAP S/4HANA communication system name in SAP Sales Cloud and SAP Service Cloud Version 2 is the same as the business system name in the System Landscape Directory of SAP S/4HANA. To check the business system name, use transaction **SLDCHECK**.
- The business system name of SAP S/4HANA follows the pattern **<SIDCLNTXXX>**, where SID is the system ID and XXX is the Client number of the SAP backend System.
- In order to check the Local System ID when System Landscape Directory (SLDCHECK) is not available in the system, user has to implement the BADI "Determination of Local System Name" (MDG_IDM_GET_LCL_SYSTEM), the BADI can be found in SPRO transaction.
Path: **▶▶ SAP Customizing Implementation Guide ▶ Cross-Application Components ▶ Processes and Tools for Enterprise Applications ▶ Master Data Governance ▶ Central Governance->General Settings ▶ Key Mapping ▶ Define Technical Settings ▶ BAdI: Determination of Local System Name**.
- Enable the following services which are specific to OP only :
 1. Under Inbound Configuration: Replicate Employee from SAP S/4HANA.
 2. Under Inbound Configuration: Replicate Sales Order from SAP S/4HANA.

3. Under HTTP data : Request Sales Quote Simulation from SAP S/4HANA.
- Go to [Settings](#) and create the following [Value Mappings](#):
 1. [Sales Order Document Type](#): Internal Value: OR, External Value: TA, Default Inbound: Active true
 2. [Sales Order Item Type](#): Internal Value: ORN, External Value: TAN, default Inbound: Active true
 - Activate sales facet for sales organization:

► [Settings](#) ► [Company](#) ► [Organizational Structure](#) ► [Search and open ID ABC \(for example SO_1010\)](#) ► [Fuctions facet \(Sales should be activated\)](#) ►.

3.2 Create Document Type for Quote Simulation

Purpose

To request external price quote simulation in SAP Sales Cloud and SAP Service Cloud Version 2 appropriate quotation document type must be created.

Procedure

1. Log on to SAP Sales Cloud and SAP Service Cloud Version 2.
2. Navigate to the user menu and select [Settings](#).
3. Select ► [All Settings](#) ► [Sales Quote](#) ► [Document Types](#) ►.
4. Maintain following fields:
 1. Active: true
 2. Document Type: ZAG (This is just an example and will be added to the value mapping later. If you use a different type, you will need to adjust it accordingly.)

Note

Create a value mapping for the code list Sales Quote Document Type with the internal code **ZAG** and the external code **AG**. Use **Standard Quote External Pricing** as the description for the code mapping.

3. Description: Standard Quote External Pricing
4. Default: false
5. Item Increment: 100
6. Internal Pricing: On (with External Pricing Simulation)
5. In the [Action](#) column, use button with the tick symbol to save your entries.

3.3 Configuration in SAP Cloud Integration

Besides the configuration provided under the *Configuration in SAP Cloud Integration* described in the [set up instruction for 6KO](#) in the *Integration Guide* for SAP S/4HANA Cloud, you will need to pay attention to the following configuration that is specific to SAP S/4HANA only:

- When configuring iFlows, use *Proxy Type* as On-Premise.
- For SAP S/4HANA as the receiver, enter the receiver address in the following format:
https://<Cloud connector Virtual Host>:<Cloud Connector Virtual Port>/<Calculated Access URL of the respective service from SOA manager>
For example: **https://xyz:443/sap/bc/srt/scs/sap/businesspartnersuitebulkreplic?sap-client=701**

Note

In some cases, the iFlow configuration only requires *Protocol-Host-Port*, which requires the format **https://<Cloud connector Virtual Host>:<Cloud Connector Virtual Port>**. For example : **https://xyz:443**

3.3.1 Configuration of Employee iFlows (SAP S/4HANA Only)

Configuration of iFlows for replication of Equipment and Functional Location from SAP S/4HANA to SAP Service Cloud Version 2 involves IDoc. Employee and organization data of the Employee is replicated via the same iFlow and this is configured using the two different receivers in the iFlow.

Table 1:

Name of the iFlow (Description)	Direction of the Message Flow	Sender Communication Scenario: Service	Receiver Communication Scenario: Service
Replicate Employee from SAP S4HANA	S4 (Sender) to SCV2 (Receiver)	–See below	Replicate Employee from SAP S/4HANA
Value Mapping for Master Data Integration with SAP S4HANA	S4 (Sender) to SCV2 (Receiver)		

Table 2:

Configuration Parameters	Value
Adapter Type (Sender Tab- S4)	IDOC
Address (Sender Tab- S4)	/S4/CNS/HRMD_A_CFS_HRMD_A09
CNS-Host (Receiver Tab- CNS_Org/CNS_Emp)	<myxxxxxx.xxxx..cxm-salescloud.com >
Authentication (Receiver Tab)	<Basic/Certificate>

3.3.2 Configuration of Sales Order iFlows (SAP S/4HANA Only)

Configuration of iFlows for replication of Sales Orders from SAP S/4HANA to SAP Service Cloud Version 2 involves IDoc.

Table 3:

Name of the iFlow (Description)	Direction of the Message Flow	Sender Communication Scenario: Service	Receiver Communication Scenario: Service
Replicate Sales Orders from SAP S4HANA	S4 (Sender) to SCV2 (Receiver)	See below	Replicate Sales Order from SAP S/4HANA
Value Mapping for Master Data Integration with SAP S4HANA	S4 (Sender) to SCV2 (Receiver)	N/A	N/A
 Note From package: SAP Sales Cloud and SAP Service Cloud Version 2 Integration for Master Data with SAP S/4HANA or SAP S/4HANA Cloud.			
Value Mapping for Sales Process Integration with SAP S4HANA	S4 (Sender) to SCV2 (Receiver)	N/A	N/A
 Note From package: SAP Sales Cloud Version 2 Integration for Sales Processes with SAP S/4HANA or SAP S/4HANA Cloud. Deploy each iFlow only once. Check if it is already deployed by another package.			

Table 4:

Configuration Parameters	Value
Adapter Type (Sender Tab- S4)	IDOC
Address (Sender Tab- S4)	/S4/CNS/COD_REPLICATE_SALES_ORDERS
CNS-Host (Receiver Tab- CNS_Org/CNS_Emp)	<myxxxxxx.xxxx. .cxm-salescloud.com >
Authentication (Receiver Tab)	<Basic/Certificate>

3.3.3 Configuration of Quote Simulation iFlows (SAP S/4HANA Only)

Name of the iFlow Package:

SAP Sales Cloud Version 2 Integration of Sales Processes with SAP S/4HANA or SAP S/4HANA Cloud

Table 5:

Name of the iFlow (Description)	Direction of the Message Flow	Sender Communication Scenario: Service	Receiver Communication Scenario: Service
Request Sales Quote Simulation from SAP S/4HANA	SCV2 (Sender) to S4 (Receiver)	Under HTTP data: Request Sales Quote Simulation from SAP S/4HANA	COD_SALESORDER_SIMULATED

Table 6:

Configuration Parameters	Values
Address (Sender Tab- CNS)	/c4c/s4/salesQuoteSimulationRequest
Host-Port (Receiver Tab- S4)	https://<myxxxxxx.xxxx>.ondemand.com:443>

3.3.4 Configuration of Value Mapping for Master Data

Name of the iFlow Package:

SAP Sales Cloud and SAP Service Cloud Version 2 Integration for Master Data with SAP S/4HANA or SAP S/4HANA Cloud

Table 7:

Name of the iFlow (Description)	Direction of the Message Flow	Sender Communication Scenario: Service	Receiver Communication Scenario: Service
Value Mapping for Master Data Integration with SAP S/4HANA	Bi-Directional Mapping	S4 <-> CNS	logicalSystem <-> communicationSystem

Table 8:

S4,logicalSystem	ValueCNS, CommunicationSystem
The logical system created for employee replication as part of Configuration for Employee Replication [page 20] . For example, <CRMSALES>.	The default communication system ID of the SAP Sales Cloud Version 2 system. For example, <sap_cloud_crm_sales2>.
The default logical system representing the SAP S/4HANA and its client. For example, <QVPCNT701>.	The communication system ID created in the SAP Sales Cloud Version 2 for integration with SAP S/4HANA. For example, <QVP701>.

3.4 Configuration in SAP S/4HANA

3.4.1 Prerequisites for Configuration in SAP S/4HANA

For the configuration in SAP S/4HANA, you need the administrator business user.

3.4.2 Maintaining Trust between SAP Cloud Integration SAP Cloud Integration (SCI) and SAP S/4HANA

3.4.2.1 Download SAP Cloud Integration Certificate to SAP S/4HANA

Purpose

Trusted relationships enable you to establish secure connections between known servers whose identity can be confirmed by a signed certificate. You need to download the certificate of SAP Cloud Integration tenant via a web browser and import it to SAP S/4HANA. This procedure is described for Google Chrome.

Procedure

1. Access SAP Cloud Integration using the following URL:
Link: <https://<tenant management node>/itspaces>
2. In the browser bar, choose the [View Site Information](#) button, select [Connection is Secure](#) and then [Certificate \(Valid\)](#).
3. In the [Certificate](#) dialog box, go to the [Details](#) tab.
4. Choose [Export](#).
5. Choose name, directory, and save the certificate in the [Base64-encoded ASCII, single certificate\(*.pem;*.crt\)](#).

3.4.2.2 Upload SAP Cloud Integration Certificate to SAP S/4HANA

Procedure

1. Log on to the SAP S/4HANA system as an Administrator.
2. Use the transaction **STRUST** to access Trust Manager.
3. Upload the certificate you saved in the previous steps to the *SSL client (Standard)* node.

3.4.3 SAP S/4HANA Web Service Configuration (SOA Management)

This feature is intended for technical system administrators who configure inter-system connections and manages security settings in the system landscape.

To be able to use Web Services with Web Services Reliable Messaging, you need to have the Web Service Runtime configured.

The configuration of the Web Service Runtime is client-specific and must be performed in each productive client.

ⓘ Note

RCOD_CREATE_CONNECTIVITY_V2 or RCOD_CREATE_CONNECTIVITY_SIMPL to automatically configure the services on SAP S/4HANA for the following business objects: Business Partners, Employee, Products, Sales Order, Opportunity, Sales Quote, Equipment and Functional Location, and Organizational Structures. Note that in this guide we describe the manual setup for most of the business objects.

User Action	Entry Value
Transaction Code	SOAManager

3.4.3.1 Outbound Web Service configuration

Open the *Service Administration* tab and navigate to *Web Service Configuration*.

1. For each object in the following table, search for the *Object Name* and complete the steps that follow.

Object Name (Internal Name)	Name
CO_BNSCOMPANY_CODE_MASTER_DATA	BNSCompanyCodeMasterDataReplicationBundleRequest_Out
CO_SDMD_ESR_SALES_ORGANIZATION	SalesOrganizationBulkReplication_Out
CO_SDMD_ESR_SALES_OFFICE	SalesOfficeBulkReplication_Out
CO_SDMD_ESR_SALES_GROUP	SalesGroupBulkReplication_Out
CO_SDMD_ESR_SALES_AREA	SalesAreaBulkReplication_Out
CO_SDMD_ESR_DISTR_CHANNEL	DistributionChannelBulkReplication_Out
CO_SDMD_ESR_SALES_DIVISION	SalesDivisionBulkReplication_Out
CO_FNDEI_INCOTERMS_RL	IncotermsMasterDataReplicationBundleRequest_Out
CO_MDG_BP_RPLCTRQ	BusinessPartnerSUITEBulkReplicateRequest_Out
CO_MDG_BP_RELATIONSHIP_OUT	BusinessPartnerRelationshipSUITEBulkReplicateRequest_Out
CO_MDG_BP_RELATIONSHIP_CNF_OUT	BusinessPartnerRelationshipSUITEBulkReplicateConfirmation_Out
CO_MDM_PRD_BULK_REPL_REQ_OUT	ProductMDMBulkReplicateRequest_Out
CO_FNDEI_MATERIALGROUP_RL	MaterialGroupMasterDataReplicationBundleRequest_Out
CO_MDG_BP_RPLCTCO	BusinessPartnerSUITEBulkReplicateConfirmation_Out
CO_FNDEI_REGION_RL	RegionMasterDataReplicationBundleRequest_Out

2. Configure the logical port using the following steps.
3. Choose [Create](#)
4. Select [Manual Configuration](#).
5. Under [Logical Port Name](#), enter the logical port name. For example, **LP_<system name to connect to>**.
6. Check if the [Logical Port](#) is set to [default](#) box.

Note

If the logical port is already configured for a different system, then follow the documentation and skip the steps below [SAP Master Data Integration service Business Partner configuration without using Default Logical Port on SAP S/4HANA](#).

7. Enter the port description. For example, **<For Business Partner Data Replication>** and choose [Next](#).

- Under [Consumer Security](#), configure authentication and authorization as described for the authorization type in your integration flow:

Integration Flow Authorization Type	Configuration Steps
User Role	Select the User ID/Password option. Enter the SCI User ID and password or Client ID Client Secret to connect to the SCI tenant.
Client Certificate	Choose X.509 SSL Client Certificate for Authentication Settings . Select an item for your SSL Client PSE of transaction STRUST.

- Choose [Next](#).
- Under [HTTP/ Transport Settings](#), in the [URL](#) field, enter the SCI iFlow end point
In case you are entering the URL by URL components then in the [Protocol](#) field, enter **HTTPS**.
- Choose [Next](#).
- Under [SOAP Protocol /Messaging](#), complete the fields as shown:

Field Name	Value
RM Protocol	<SAP RM>
Message ID Protocol	<SAP Message ID>
Data Transfer Scope	<Basic Data Transfer>
Transfer Protocol	<Transfer via SOAP header>

- Choose [Next](#).
- Choose [Finish](#).

3.4.3.2 Inbound Web Service Configuration

Open the [Service Administration](#) tab in SOA Manager and navigate to [Simplified Web Service Configuration](#).

For each object in the following table, search for the object name and complete the steps that follow.

Object Name (Internal Name)	Name
BUSINESSPARTNERSUITEBULKREPLIC	BusinessPartnerSUITEBulkReplicateRequest_In
BUSINESSPARTNERRELATIONSHIPSUI	BusinessPartnerRelationshipSUITEBulkReplicateRequest_In
BUSINESSPARTNERSUITEBULKREPLI1	BusinessPartnerSUITEBulkReplicateConfirmation_In
BUSINESSPARTNERRELATIONSHIPSU1	BusinessPartnerRelationshipSUITEBulkReplicateConfirmation_In

Object Name (Internal Name)	Name
PRODUCTMDMBULKREPLICATECONFIRM	ProductMDMBulkReplicateConfirmation_In

1. Enter the object name in [Search Pattern](#) and select [Go](#).
2. Select the entry in the result list.
3. For integration using [Basic Authentication](#), select the check box [User Name/Password](#), and for [Certificate-Based Authentication](#), select the check box [X.509 Client Certificate](#).
4. Choose [show details](#) to view the access URL.

Note

This URL must be entered as the address of the receiver system of the corresponding iFlow.

5. Choose [Save](#).

3.4.3.3 Retrieve Sales Quote and Sales Order PDF from SAP S4HANA

1. Open the [Service Administration](#) tab in [SOA Manager](#) and navigate to [Web Service Configuration](#). Search for the object name and complete the steps that follow:

Table 9:

Object Name (Internal Name)	Name
SALESDOCUMENTPRINTPREVIEWQUERY	SalesDocumentPrintPreviewQuery

2. Enter the object name in [Search Pattern](#) and choose [Search](#).
3. Select the entry in the result list.
4. Select [Create Service](#).
5. Enter [Service Name](#) (for example: SALESDOCUMENTPRINTPREVIEWQUERY) and [New Binding Name](#) (for example: SalesDocumentPrintPreviewQuery).
6. Choose [Next](#).
7. Under the [Provider Security](#) [Transport Channel Authentication](#) section, select [User ID/Password](#).
8. Choose [Next](#).
9. In [Alternative Access URL](#), enter the path from the iFlow [Retrieve Sales Quote PDF](#) from SAP S/4HANA (for example: /sap/bc/srt/scs/sap/salesdocumentprintpreviewquery).
10. Select [Finish](#).

3.4.4 Create Service User for Inbound Replication

This service user is used for the replication from SAP Sales Cloud and SAP Service Cloud Version 2 to SAP S/4HANA.

Procedure:

1. To create a new service user, choose one of the following navigation options:

User Action	User Action or Value
<i>Transaction code</i>	SU01
<i>SAP Menu</i>	► Tools ► Administration ► User Maintenance ► Users ►

2. In the *User* field, enter **<CLOUD_CRM>**.
3. Choose *Create* (F8).
4. Enter the following data:

Field Name	Entry
Address Tab Page	
<i>Last name</i>	<CLOUD_CRM>
<i>First name</i>	<Service user>
<i>Function</i>	<Function of user> (optional)
Logon Data Tab Page	
<i>Initial password</i>	***** (Enter password)
<i>Repeat password</i>	***** (Repeat password)
<i>User type</i>	Service
Roles Tab Page	
<i>Role</i>	Assign the roles that have authorization to replicate and save the Business Partner in scope.

Ensure that the password is a productive password. When user type is set as *Service*, then the password set is the productive password

5. Choose *Save*.

3.4.5 SAP S/4HANA Gateway Services Publishing for Code List Replication

In SAP S/4HANA you must publish service group/s using the SAP Gateway Service Administration tool. This provides additional services such as the CDS views that are required for the replication of the to SAP Sales Cloud and SAP Service Cloud Version 2. This feature is intended for technical system administrators who configure inter-system connections and manages security settings in the system landscape.

Procedure

Activate Service:

1. Open Transaction:

Table 10:

Field Name	Entry Value
Transaction Code	/n/IWFND/V4_ADMIN
Navigation	►► SPRO ► ABAP Platform ► SAP Gateway ► OData Channel ► Administration ► General Settings for OData V4 ► OData V4 Service Administration ►

2. Select [Publish Service Group](#).
3. Enter the [System Alias](#) as **LOCAL**.
4. Enter [Service Group ID](#) **<SERVICE_NAME_FROM_TABLE_BELOW >**.

Table 11:

Service Group Name
CDI_CDS

5. Select [Get Service Groups](#). Service group with the name entered in previous step appears on the list if it is unpublished.
6. Select the service.
7. Choose [Publish Service Groups](#).
8. Select [Continue](#) or [Enter](#).
9. Select or create transport request if needed.
10. Information message with text [New service group\(s\) successfully published](#) appears.

3.4.6 Configuration for Equipment and Functional Location

Equipments and Functional Location are replicated using business events via the Enterprise Event Enablement framework.

Prerequisite:

A service instance is available in SAP Event Mesh. For more information, refer to [Prerequisites \[page 5\]](#).

A user with required authorization object (for example: C_TCLA_BKA, I_BEGRP, I_BETRVORG, I_TCODE) and roles are available.

Procedure:

1. To perform the channel configuration, choose one of the following navigation options:

Field Name	Entry Value
Transaction Code	/n/IWXBE/CONFIG
Navigation	SPRO > ABAP Platform > Enterprise Event Enablement > Administration > Manage Channel and Parameters

2. Choose [Via Service Key](#) to create the channel configuration.
3. Select the [Via Service Key](#) (create new channel via Service Key).
4. Enter following:

Object
Channel
Description
Service Key
Choose Save configuration or Enter .

Note

- If the destination or the OAuth 2.0 Configuration name is not available, random names are generated.
- If there is already a channel you want to use, skip the steps above and proceed with the configuration of the outbound bindings.
- After saving, you can still change optional parameters.

5. Choose [Save](#).
6. Select the newly created channel, and choose [Outbound Bindings](#).
7. Choose [Create](#) new topic bindings and maintain the following topics.

Object	Topic
Equipment	<code>sap/s4/beh/equipment/v1/Equipment/*</code>
Functional Location	<code>sap/s4/beh/functionallocation/v1/FunctionalLocation/*</code>

8. Navigate one step back to [Channel Configuration](#). Choose [check connection](#) to perform the connectivity check.
9. Activate the event discovery service if not already activated, follow the [Activate Event Discovery Service | SAP Help Portal](#)

Note

Navigate to the transaction code `/IWXBE/EEE_SUPPR` for troubleshooting the event replication issues. Refer to the [Enterprise Event Enablement: Troubleshooting | SAP Blogs](#) for more details

10. Activate the OData service `API_EQUIPMENT` to query the *Equipment* data and `API_FUNCTIONALLOCATION` to query the *Functional Location* data from iFlow. Choose one of the following navigation options:

Field Name	Entry Value
Transaction Code	<code>/n/IWFND/MAINT_SERVICE</code>
Navigation	SPRO > ABAP Platform > SAP Gateway > Administration > General Settings > Activate and Maintain Service

11. Choose *Add Service*.
12. Enter *System Alias* as **LOCAL**.
13. Enter the *External Service Name* as **API_EQUIPMENT** for equipment and **API_FUNCTIONALLOCATION** for functional location.
14. Choose *Get Services*.
15. Select the service and choose *Add Selected Services*.
16. Under *Creation Information* in the *Package Assignment*, choose *Local Object*.
17. Choose *Continue*.
18. In the *ICF Nodes* pane, choose *ICF Node* and choose *Activate*.

3.4.7 Configuration for Employee Replication

To set up employee replication to SAP Sales Cloud and SAP Service Cloud Version 2 from SAP S/4HANA, a connectivity report needs to start in your SAP S/4HANA system.

Procedure:

1. To run the report:

User Action	User Action or Value
Transaction code	SE38
SAP Menu	Tools > ABAP Workbench > Development > ABAP Editor

2. In the *Program* field, enter the report name `RCOD_CREATE_CONNECTIVITY_SIMPL`. This report generates the *Integration settings for Data Exchange*. For more information, see *Report Documentation*.
3. Choose *Execute* (**F8**).
4. On the *Middleware Selection* screen, select *SAP Cloud Platform Integration* and *Next*.

Note

Select the icon to check the documentation of this report.

5. On the *Scope Selection* screen, select *Employees* and *Next*.
6. On the *General Settings*, enter the logical system of the SAP Sales Cloud and SAP Service Cloud Version 2 that you want to connect to, or select *Create Logical System* to create a new logical system.
7. In *Batch Job* settings, adjust *Job Schedule Interval* and *Job User* if you need and select *Next*.
8. In the *Settings* for SAP Cloud Integration, enter the *Runtime URL* of the SAP Cloud Integration. How to get the URL is described in section *How to Get the SAP Cloud Integration runtime URL* in described in scope item 6KO Integration Guide for SAP S/4HANA Cloud. Refer the link <https://api.sap.com/package/CNSDevelopment/documents>
9. In the logon procedure, select the *Authentication* method. SAP recommends that you use the *SSL Client Certificate* method, then select *Next*.
10. On the *Summary* screen, check your settings, and then choose *Generate*.
11. Confirm the question "*Do you want to generate the Connectivity settings?*".
12. When the report run is completed, the display *Logs* screen appears.
13. Update the RFC destination path.

User Action	User Action or Value
Transaction code	SM59
SAP Menu	Tools > Administration > Network > RFC Destinations

Go to the RFC destination created for employee integration.

In the technical settings, change the path prefix to /cxf/s4/cns/HRMD_A_CFS_HRMD_A09.

Note

The path prefix is case-sensitive.

In the Logon and *Security* tab , update the *Username* as the *Client ID* and *Password* as *Client Secret* from SAP Cloud Integration.

Note

Sales data is essential for creating an employee. Ensure that INFTY 0900 entry for Sales data is maintained in the table *T777D* and *Infotype* 0900 entry is maintained in the table *V_T582A*.

3.4.8 Configuration of Sales Documents

Prerequisite

A user with required authorization object (for example: V_VBAK_VK0, V_VBAK_AAT, V_VBAK_CCD) and roles to create sales documents is available.

Purpose

This additional configuration is required :

- To add an entry in *Define Types of Related Objects of SD Documents* table and activate the service that creates a link between the opportunity in SAP Sales Cloud and SAP Service Cloud Version 2 and Sales Quote on SAP S/4HANA.
- To activate all services related to Sales Documents.

Procedure

Define Types of Related Objects of SD Documents

1. Open transaction or use navigation.

Field Name	Entry Value
Transaction Code	SDPO_TYPE
Navigation	This navigation is not a continuation of the txn code.

2. Select *New Entries*.
3. Enter *Obj. Type* as **ZCNS**.
4. Enter *Description*, for example **<link Opp in SSCV2 with Sales Quote in S4>**.
5. Select *Save*.

Activate Service

1. Open transaction

Field Name	Entry Value
Transaction Code	/n/IWFND/MAINT_SERVICE
Navigation	

2. Choose *Add Service*.

3. Enter *System Alias* as **LOCAL**.
4. Enter the *External Service Name* as **API_SALES_QUOTATION_SRV**.
5. Choose *Get Services*.
6. Select the service and choose *Add Selected Services*.
7. Under *Creation Information in the Package Assignment*, choose *Local Object*.
8. Choose *Continue*.
9. In the ICF Nodes pane, choose ICF Node and choose *Activate*.
10. Repeat above steps for activating the following services:

Table 12:

External Service Name
API_SALES_ORDER_SRV
API_SALES_ORDER_SIMULATION_SRV
API_CV_ATTACHMENT_SRV

Outbound Implementation for Sales Order

Outbound implementation for sales order needs to be set up in order for sales order to be replicated.

Follow the [SAP Note 2427733](#) for detailed procedure.

3.4.8.1 Configuration of Integration

To set up Sales Order replication to SAP Sales Cloud and SAP Service Cloud Version 2 from SAP S/4HANA, a connectivity report needs to run in your SAP S/4HANA system.

Procedure

1. To run the report:

Table 13:

User Action	User Action or Value
Transaction code	SE38
SAP Menu	► <i>Tools</i> ► <i>ABAP Workbench</i> ► <i>Development</i> ► <i>ABAP Editor</i> ►

2. In the *Program* field, enter the report name **RCOD_CREATE_CONNECTIVITY_SIMPL**. This report generates the *Integration* settings for *Data Exchange*. For more information, see the *Documentation* of the report.
3. Choose *Execute F8*
4. On the *Middleware Selection* screen, select *SAP Cloud Platform Integration* and *Next*.

Note

Select the icon to check the documentation of this report.

5. On the [Scope Selection](#) screen, under [Sales Orders](#), select the checkboxes for the following questions:
 "Do you want to replicate sales orders from SAP S/4HANA to your cloud solution?"
 "Do you want to use SAP S/4HANA to calculate prices for sales quote items in your cloud solution?"
 "Do you want to replicate sales orders from your cloud solution to SAP S/4HANA ?"
6. Choose [Next](#).
7. On the [General Settings](#), enter the logical system of the SAP Sales Cloud and SAP Service Cloud Version 2 that you want to connect to, or select [Create Logical System](#) to create a new logical system.
8. In [Batch Job](#) settings, adjust [Job Schedule Interval](#) and [Job User](#) if you need and select [Next](#).
9. In the [Settings](#) for SAP Cloud Integration, enter the [Runtime URL](#) of the SAP Cloud Integration. How to get the URL is described in section How to Get the SAP Cloud Integration runtime URL in described in scope item 6KO Integration Guide for SAP S/4HANA Cloud. Refer the link <https://api.sap.com/package/CNSDevelopment/documents>.
10. In the logon procedure, select the [Authentication](#) method. SAP recommends that you use the [SSL Client Certificate](#) method, then select [Next](#).
 In case you are using basic authentication, you will need to update the RFC destination later with the [Client ID](#) and [Client Secret](#) of the SAP Cloud Integration tenant.
11. On the [Summary](#) screen, check your settings, and then choose [Generate](#).
12. Confirm the question "Do you want to generate the Connectivity settings?".
13. When the report run is completed, the display [Logs](#) screen appears.
14. Update the RFC destination path.

Table 14:

User Action	User Action or Value
Transaction code	SM59
SAP Menu	Tools > Administration > Network > RFC Destinations > HTTP Connections to External Server >

Go to the RFC destination created for Sales Order integration.

In the technical settings, change the path prefix to /cxf/S4/CNS/COD_REPLICATE_SALES_ORDER.

Note

The path prefix is case-sensitive.

In the Logon and [Security](#) tab , update the [Username](#) as the [Client ID](#) and [Password](#) as [Client Secret](#) from SAP Cloud Integration (in case of basic authentication).

3.4.8.2 Upload Pricing Components

In order to upload pricing component to SAP Sales and Service Version 2, follow the [Upload Pricing Components](#) guide.

3.4.9 Configuration for Account Hierarchy

3.4.9.1 Define Customer Hierarchy Type

Purpose

You create customer hierarchy type in SAP S/4HANA system if it does not exist.

Procedure

1. Access the below transaction or navigate to the following IMG menu:

Table 15:

Transaction Code	SPRO
SAP S/4HANA IMG Menu	Sales and Distribution > Master Data > Business Partners > Customers > Customer Hierarchy Types > Define Customer Hierarchy Types

2. Choose [New Entries](#) to create the following entry:

Table 16:

CustHType	Name	PartFunc.	Name
A	Standard Hierarchy	SP	Sold-to-Party

[Customer Hierarchy Type A](#), with [Name](#), [Standard hierarchy](#), [PartFunc.](#) [SP](#), and [Name Sold-To Party](#).

3. Choose [Save](#) and select a transport request if required.
4. Navigate back to access below IMG Menu.
5. 6. Access the below transaction or navigate to the following IMG menu:

Table 17:

Transaction Code	SPRO
SAP S/4HANA IMG Menu	Sales and Distribution > MasterData > Business Partners > Insert > Customers

6. Choose [Set Up Partner Determination for Customer Master](#).
7. Choose [Partner Functions](#) node in the left navigation structure pane.

8. Choose [New Entries](#).
9. Enter [Partner Function](#) as **1A**, [Name](#) as **Customer hierarchy 1**, [Partner Type](#) as **Customer (KU)**, [CHType](#) as **Standard Hierarchy (A)**.
10. Choose [Save](#) and select a transport request if required.
11. Repeat the above steps to create following partner functions:

Table 18:

Partner Functions	Name
1B	Customer hierarchy 2
1C	Customer hierarchy 3
1D	Customer hierarchy 4

12. Assign [Sup.Partn.Func](#) to the partner functions created above. Choose [Save](#).

Table 19:

Partner Functions	Name
1B	1A
1C	1B
1D	1C

3.4.9.2 Assign Sales Area to Customer Hierarchy

Procedure

1. Logon to SAP S/4HANA backend system.
2. Open transaction OVH3.
3. Choose [New Entries](#) and maintain the below values:

Table 20:

Cus-tHType	Sales Org.	Distr. Chl	Division	HgLvSlOrg	HLDstrCh	HgLvDivis
A	1710	10	00	1710	10	00

4. Choose [Save](#) and select a transport request if required.

3.4.9.3 Assign Account Group to Customer Hierarchy

Procedure

1. Logon to SAP S/4HANA backend system.
2. Open transaction OVH2.
3. Choose New Entries and maintain the below values:

Table 21:

Cus-tHType	Name	Acct Group	Description	HgLvAxxtGr	Description
A	Standard Hierar- chy	CUST	Customers	CUST	Customer

4. Choose [Save](#) and select a transport request if required.

3.5 SAP Event Mesh Service Configuration

Administrator access to the SAP BTP tenant is required for this configuration.

Follow the configuration provided under *Configuration* in SAP Event Mesh described in [Opportunity to Order with SAP Sales Cloud Version 2 \(6KO\)](#)  for SAP S/4HANA Cloud version.

3.6 SAP S/4HANA Data Replication Framework (DRF) Configuration

This section describes the configurations of the DRF (Data Replication Framework) in the SAP S/4HANA system.

3.6.1 Define Technical Settings for Business Systems

1. A business system can represent a central hub or a local system.

Field Name	Entry Value
Transaction Code	DRFIMG
Navigation	► Data Replication ► Define Custom Settings for Data Replication ► Define Technical Settings for Business Systems ►

2. Create new entries by selecting the [New Entry](#).
3. Set Business System: for example, **<sap_cloud_crm_mydefaultsystem>**.

Note

Log on to SAP Service Cloud Version 2 and navigate to [Communication Systems](#). The system ID that is described as default communication system must be maintained as [Business System ID](#).

4. Choose the newly created entry and select [Define Bus. Systems, Bos.](#)
5. Select the [New Entries](#) button and maintain the following entries.

BO Type	Description	Outp.Mode	Sys.Filt
194	Product	Direct Output	Checked
986	Business Partner including Relationships.	Direct Output	Checked
DRF_0027	Material Group	Direct Output	Checked
154	Company	Direct Output	Checked
DRF_0053	Sales Area	Direct Output	Checked
167	Workforce Person	Direct Output	Checked
1451_CUST	Customer Hierarchy	Direct Output	Checked

6. Select [Save](#).
7. For each entry, select the level [Define Bus. System, BOs](#) and add [Communication Channel](#) as shown below.

BO Type	Description	Communication Channel
194	Product	Replicate via Services

BO Type	Description	Communication Channel
986	Business Partner including Relationships	Replicate via Services
DRF_0027	Material Group	Replicate via Services
1451_CUST	Customer Hierarchy	Replication via IDoc

8. Select [Save](#).

3.6.2 Define Replication Model

1. Navigate to the following [Tcode](#):

Field Name	Entry Value
Transaction Code	DRFIMG
Navigation	Data Replication > Define Custom Settings for Data Replication > Define Replication Models

2. Choose [New Entries](#) (for each Business Object separate Replication model has to be created).
3. Maintain following details:

Field Name	Entry Value
Replication Model	For example: <REPL_COMP
Description	for example: <Replication Company Code>
Log Days	<50 days>

4. Select the newly created model.
5. Then select the level [Assign Outbound Implementation](#).
6. In [Assign Outbound Implementation](#), choose [New Entries](#) and enter the value [Outbound Implementation](#) for [Company Code](#) from the table below, or use the F4 help.

Business Object	Outbound Implementation
<i>Company Code</i>	AR_CCODE

7. *Description* and *Communication Channel* are completed automatically after entering the *Outbound Implementation*.
8. Select the newly created *Outbound Implementation* and go to the step *Assign Target Systems for Repl. Model / Outb. Impl.*
9. Select *New Entries* and choose the *Business System* created in the *Define Technical Settings for Business Systems [page 27]* section.

Table 22:

Field Value	Entry Value
<i>Business System</i>	For example, <sap_cloud_crm_mydefaultsystem

Note

The step of assignment of Target systems for Repl. Model/ Outbound Impl is not included in the transport chain, therefore business system needs to be created manually in the Q and P systems.

10. Select *Assign Outbound Parameter* and choose from the list of *Outbound Parameters*.

Field Name	Entry Value
<i>Outbound Parameter</i>	PACK_SIZE_BULK
<i>Outbound Parameter Value</i>	<100>
	 Note Maintain the package size as per the requirement

11. Save all changes.
12. Repeat steps 2 through 11 for the Business Objects to create a replication model for each business object:

Table 23:

Business Object	Outbound Implementation	PACK_SIZE_BULK	PACK_SIZE_SEG
<i>Sales Organization</i>	SDMD_980	N/A	N/A
<i>Sales Office</i>	SDMD_0054	N/A	N/A
<i>Sales Group</i>	SDMD_0055	N/A	N/A
<i>Business Partner</i>	986_3	<100>	N/A
<i>Product</i>	194_3	<100>	N/A

Business Object	Outbound Implementation	PACK_SIZE_BULK	PACK_SIZE_SEG
Incoterms	997_INCOTR	<100>	N/A
Material Group	993_MATGRP	<100>	N/A
Region Code	998_REGION	<100>	N/A
Customer Hierarchy	C4C_CUSTH	<1>	<5>

13. [Activate](#) the replication model.

3.6.3 Filter Reflexive Partner Functions

Partner Functions are not supported in SAP Sales Cloud and SAP Service Cloud Version 2. To prevent partner functions from being deleted when replicating business partners from SAP Sales Cloud and SAP Service Cloud Version 2 to SAP S/4HANA, follow these steps:

1. Navigate to the below path ► [Transaction Code SPRO](#) ► [Integration with Other SAP Components](#) ► [Integration with SAP Cloud for Customer](#) ► [Application-Specific Settings](#) ► [Business Partner](#) ► [Replication Parameters](#) ►.
2. Choose [Replication Parameters Activity](#).
3. Select [New Entries](#).
4. Maintain the following entries:

Field Name	Entry Value
Business System	Choose your business system, for example, <sap_cloud_crm_mydefaultsystem
Filter Reflexive Partner Function (Flt.Rfl.Pf)	Checked
C4C	Checked

5. Choose [Save](#).

ⓘ Note

Partner functions aren't supported in SAP Sales Cloud and SAP Service Cloud Version 2. Therefore, they are ignored during business partner replication from SAP S/4HANA to SAP Sales Cloud and SAP Service Cloud Version 2. Follow the steps below to prevent them from being deleted during business partner replication from SAP Sales Cloud and SAP Service Cloud Version 2 to SAP S/4HANA. For more details, see SAP Note [3290399](#) 📄.

ⓘ Note

If you are using SAP S/4HANA with addresses enabled, you currently have restricted functionality in the partner functions. Functions with multiple address entries are not accepted in the SAP Sales Cloud and SAP Service Cloud Version 2 system and you will see inbound errors. Outgoing payloads from the SAP Sales Cloud and SAP Service Cloud Version 2 system may have fewer entries than the SAP S/4HANA

system, which could result in data loss for the customer. This restriction is resolved with the new release if you actively set the address parameter for the replication in the MDG_BP_SYS_PAR table (or view MDGV_BP_SYS_PAR).

- The new parameter is only important for the outbound from SAP S/4HANA in the KNVP (Customer Master Partner Functions) table.
- If you are NOT using multiple addresses in the partner functions, you do not need to set the new parameter.
- In case of inbound in SAP S/4HANA, the payload is checked and if the address field is completely missing, it is assumed that a payload from SAP Sales Cloud and SAP Service Cloud Version 2 is received.

3.7 Configuration in SAP Cloud Connector (SCC)

SAP Cloud Connector allows SAP BTP applications to securely access remote services that run on the Internet or SAP S/4HANA.

Refer to [SAP BTP Connectivity](#) for more details.

Note

You can also use your existing reverse proxy setup. To decide which option is the best one for your use case, refer to [Outbound/On-Premise: Reverse Proxy or SAP Cloud Connector](#).

This section describes the configuration in SAP Cloud Connector.

Prerequisite:

Configure the subaccount in SAP Cloud Connector. For more details, refer to [Connect Cloud Connector with trial subaccount](#).

Procedure:

1. Log on to the SCC administration UI.
2. Select the relevant subaccount.
3. Choose [Cloud to SAP S/4HANA](#) under the subaccount menu.
4. Under [Access Control](#) tab, select + (plus) icon in [Mapping Virtual to Internet System](#) section.

Field Name	Entry Value
<i>Back-end Type</i>	ABAP System
<i>Protocol</i>	HTTPS
<i>Internal Host</i>	ldciqvp.devsys.net.sap (example)
<i>Internal Port</i>	44300
<i>Virtual Host</i>	qvp (example)
<i>Virtual Port</i>	443
<i>Principal Type</i>	None
<i>Host in Request Header</i>	Use Virtual Host
<i>Description</i>	(Not mandatory)
<i>Check Internal Host</i>	True

- After each step, choose *Next* and then *Finish*
- Select the newly created entry.
- In the *Resources of qvp :443* (example) section, select the plus icon (+).

Field Name	Entry Value
<i>URL Path</i>	/sap/bc/srt/
<i>Activate</i>	True
<i>WebSocket</i>	-
<i>Access Policy</i>	Path And All Sub-Paths
<i>Description</i>	-

- Save the entry.

Field Name	Entry Value
<i>URL Path</i>	/sap/opu/odata/sap/
<i>Activate</i>	True
<i>WebSocket</i>	-
<i>Access Policy</i>	Path And All Sub-Paths

Field Name	Entry Value
<i>Description</i>	-

9. Select [Save](#).

Field Name	Entry Value
<i>URL Path</i>	/sap/opu/odata4/sap/
<i>Activate</i>	True
<i>WebSocket</i>	-
<i>Access Policy</i>	Path And All Sub-Paths
<i>Description</i>	-

10. Select [Save](#).

11. To check if the configuration was done correctly go to:

1. Open SAP BTP Cockpit.
2. Go to the [Connectivity](#) tab.
3. Select on [Cloud Connectors](#).
4. Check if new entry is available under [Exposed Back-End Systems](#) section

4 Master Data Initial Replication

In the following sections, we describe the replication of Business Partners, Materials, Stocks, Prices, and Discounts.

This section describes how to replicate master data from SAP S/4HANA system to SAP Sales and Service Cloud Version 2 system using data replication framework.

4.1 Define Filter Criteria and Replicate by Replication Model

Procedure

1. Log on to the SAP GUI in the SAP S/4HANA system as administrator.
2. Access the following transaction code:

User Action	Entry value
Transaction Code	DRFOUT

3. Under the *Replication Model* section, select:

Field Name	Entry Value
<i>Replication Model</i>	For example: <REPL_MODEL>

For the following set of replication models, repeat steps 1 through 3 described above and perform the following steps for each replication model.

Note

Replication can be checked in real time in the SAP Service Cloud Version 2 system.

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Company Code* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Organization* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Distribution Channel* under ► *Company* ► *Distribution Channel* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Division* under ► *Company* ► *Division* ►).

(Navigate: ► [User Menu](#) ► [Settings](#) ► [All Settings](#) ►, verify [Sales Area](#) under ► [Company](#) ► [Org Structures](#) ►).

(Navigate: ► [User Menu](#) ► [Settings](#) ► [All Settings](#) ►, verify [Sales Office](#) under ► [Company](#) ► [Org Structures](#) ►).

(Navigate: ► [User Menu](#) ► [Settings](#) ► [All Settings](#) ►, verify [Sales Group](#) under ► [Company](#) ► [Org Structures](#) ►).

(Navigate: ► [Navigation Menu](#) ► [Accounts](#) ► or [Contacts](#), verify [Customers and Company](#) under [Accounts and Contact Person](#), under [Contacts](#)).

(Navigate: ► [Navigation Menu](#) ► [Products](#) ►, verify [Product](#) under [Products](#)).

(Navigate: ► [User Menu](#) ► [Settings](#) ► [All Settings](#) ►, verify [Product Group](#) under ► [Product](#) ► [Product Groups](#) ►).

4.1.1 Region Code

1. Under Outbound Implementation select:

Table 24:

Field Name	Entry Value
Outbound Implementation	<998_REGION>

2. Under [Replication Model](#), choose the [Manual](#) option.
3. Navigate to [Manual Replication Filter Criteria](#).
4. Under [DRF : Key Structure for Regions](#), enter values.

Table 25:

Field Name	Entry Value
Ctry/Reg Key	<US>

5. Save the filters and execute the replication process.

4.1.2 Company Code

Under [Outbound Implementation](#), select:

Field Name	Entry Value
Outbound Implementation	AR_CCODE

Under [Replication Model](#), choose the [Manual](#) option.

Navigate to [Manual Replication Filter Criteria](#).

Under [Filter structure for Company Code](#), enter values.

Field Name	Entry Value
<i>Company Code</i>	1710 / 1010

Save the filters and execute the replication process.

4.1.3 Sales Organization

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	SDMD_980

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *SD DRF Sales Organization Key*, enter values.

Field Name	Entry Value
<i>Sales Organization</i>	1710 / 1010

Save the filters and execute the replication process.

4.1.4 Material Group

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	993_MATGRP

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *DRF : Key Structure for Material Group*, enter values.

Field Name	Entry Value
<i>Material Group</i>	*

Save the filters and execute the replication process.

Note

Replication can be checked in real time in the SAP Service Cloud Version 2 system.

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Company Code* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Organisation* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Distribution Channel* under ► *Company* ► *Distribution Channel* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Division* under ► *Company* ► *Division* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Area* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Office* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Sales Group* under ► *Company* ► *Org Structures* ►).

(Navigate: ► *Navigation Menu* ► *Accounts* ► or *Contacts*, verify *Customers and Company* under *Accounts and Contact Person*, under *Contacts*).

(Navigate: ► *Navigation Menu* ► *Products* ►, verify *Product* under *Products*).

(Navigate: ► *User Menu* ► *Settings* ► *All Settings* ►, verify *Product Group* under ► *Product* ► *Product Groups* ►).

4.1.5 Sales Division

Under *Outbound Implementation*, select:

Field Name	Entry Value
------------	-------------

<i>Outbound Implementation</i>	SDMD_0050
--------------------------------	------------------

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *SD DRF Division Key*, enter values.

Field Name	Entry Value
------------	-------------

<i>Division</i>	00
-----------------	-----------

Save the filters and execute the replication process.

4.1.6 Sales Area

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	SDMD_0053

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *SD DRF Sales Area key*, enter values.

Field Name	Entry Value
<i>Sales Organization</i>	1710 / 1010
<i>Distribution Channel</i>	10
<i>Division</i>	00

Save the filters and execute the replication process.

4.1.7 Sales Office

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	SDMD_0054

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *SD DRF Sales Office key*, enter values.

Field Name	Entry Value
<i>Sales Office</i>	171

Save the filters and execute the replication process.

4.1.8 Sales Group

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	SDMD_0055

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *SD DRF Sales Group key*, enter values.

Field Name	Entry Value
<i>Sales Group</i>	170

Save the filters and execute the replication process.

4.1.9 Customer Hierarchy

1. Under Outbound Implementation select:

Table 26:

Field Name	Entry Value
Outbound Implementation	C4C_CUSTH

2. Under *Replication Model*, choose the *Manual* option.
3. Navigate to *Manual Replication Filter Criteria*.
4. Under *Selection of Customer Hierarchies*, enter values.

Table 27:

Field Name	Entry Value
Customer	*

5. Save the filters and execute the replication process.

4.1.10 Business Partner

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	986_3

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *BP: General DRF Filter*, enter values.

Field Name	Entry Value
<i>Business Partner</i>	<10100005> Value for DE
	<17100003> Value for US

Save the filters and execute the replication process.

4.1.11 Product

Under *Outbound Implementation*, select:

Field Name	Entry Value
<i>Outbound Implementation</i>	194_1

Under *Replication Model*, choose the *Manual* option.

Navigate to *Manual Replication Filter Criteria*.

Under *Main Filter and Plant segment filter*, enter values.

Field Name	Entry Value
<i>Material</i>	TG11
<i>Plant</i>	1710

Save the filters and execute the replication process.

5 Appendix

5.1 Check Endpoint Name in SAP Cloud Integration (SCI)

1. Connect to the [Tenant Management](#) node of the SAP Cloud Integration with the following URL.

Field	User Action or Value
URL	<a href="https://<tenant management node>/itspaces">https://<tenant management node>/itspaces

2. At the top left, choose the show icon (🔍) ([Monitor / Operations view](#)).
3. Under [Manage Integration Content](#), choose [All](#).
4. Select the needed [Integration Flow](#) from the list and copy the URL path under [Endpoints](#).

5.2 Pricing Procedure Determination

Pricing procedure is determined based on Sales Area (Sales Organization + Distribution Center + Division) + Customer Pricing Procedure + Document Pricing Procedure.

1. Sales Area is determined from Sales Document.
2. Customer Pricing Procedure is determined from Customer Master. It can be maintained in:

Field Name	Entry Value
Transaction Code	BP

Customer must be opened in [Customer](#) role. Navigate to [Sales and Distribution](#), on the [Orders](#) tab, in the [Pricing/Statistics](#) section, check the value for [Cust.Pric.Procedure](#).

3. Document Pricing Procedure is determined from Sales Document Type. It can be maintained in:

Field Name	Entry Value
Navigation	SPRO > Sales and Distribution > Sales > Sales Documents > Sales Document Header > Define Sales Document Types

Open details for selected document type by selecting the [Details](#) icon (🔍) and check the [Doc.Pricing Proc.](#) field under [Transaction flow](#) section.

4. Pricing Procedure Determination can be maintained in:

Field Name	Entry Value
Navigation	► SPRO ► Sales and Distribution ► Basic Functions ► Pricing ► Pricing Control ► Define And Assign Pricing Procedures ► Set Pricing Procedure Determination ►

5.3 Ticket Component

If you are experiencing problems, create an incident on the SAP Support Portal at <https://support.sap.com/en/index.html>

Component	Comment
CA-GTF-INT-CFC	For issues relevant to documentation
CEC-CRM-INT	For other technical issues

Important Disclaimers and Legal Information

Hyperlinks

Some links are classified by an icon and/or a mouseover text. These links provide additional information.

About the icons:

- Links with the icon  : You are entering a Web site that is not hosted by SAP. By using such links, you agree (unless expressly stated otherwise in your agreements with SAP) to this:
 - The content of the linked-to site is not SAP documentation. You may not infer any product claims against SAP based on this information.
 - SAP does not agree or disagree with the content on the linked-to site, nor does SAP warrant the availability and correctness. SAP shall not be liable for any damages caused by the use of such content unless damages have been caused by SAP's gross negligence or willful misconduct.
- Links with the icon  : You are leaving the documentation for that particular SAP product or service and are entering an SAP-hosted Web site. By using such links, you agree that (unless expressly stated otherwise in your agreements with SAP) you may not infer any product claims against SAP based on this information.

Videos Hosted on External Platforms

Some videos may point to third-party video hosting platforms. SAP cannot guarantee the future availability of videos stored on these platforms. Furthermore, any advertisements or other content hosted on these platforms (for example, suggested videos or by navigating to other videos hosted on the same site), are not within the control or responsibility of SAP.

Beta and Other Experimental Features

Experimental features are not part of the officially delivered scope that SAP guarantees for future releases. This means that experimental features may be changed by SAP at any time for any reason without notice. Experimental features are not for productive use. You may not demonstrate, test, examine, evaluate or otherwise use the experimental features in a live operating environment or with data that has not been sufficiently backed up.

The purpose of experimental features is to get feedback early on, allowing customers and partners to influence the future product accordingly. By providing your feedback (e.g. in the SAP Community), you accept that intellectual property rights of the contributions or derivative works shall remain the exclusive property of SAP.

Example Code

Any software coding and/or code snippets are examples. They are not for productive use. The example code is only intended to better explain and visualize the syntax and phrasing rules. SAP does not warrant the correctness and completeness of the example code. SAP shall not be liable for errors or damages caused by the use of example code unless damages have been caused by SAP's gross negligence or willful misconduct.

Bias-Free Language

SAP supports a culture of diversity and inclusion. Whenever possible, we use unbiased language in our documentation to refer to people of all cultures, ethnicities, genders, and abilities.

© 2024 SAP SE or an SAP affiliate company. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company. The information contained herein may be changed without prior notice.

Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.

These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies.

Please see <https://www.sap.com/about/legal/trademark.html> for additional trademark information and notices.