



Service

Generated on: 2026-07-01 14:59:24 GMT+0000

SAP S/4HANA | 2025 FPS01 (Feb 2026)

Public

Original content: https://help.sap.com/docs/SAP_S4HANA_ON-PREMISE/c9b5e9de6e674fb99fff88d72c352291?locale=en-US&state=PRODUCTION&version=2025.001

Warning


This document has been generated from SAP Help Portal and is an incomplete version of the official SAP product documentation. The information included in custom documentation may not reflect the arrangement of topics in SAP Help Portal, and may be missing important aspects and/or correlations to other topics. For this reason, it is not for production use.

For more information, please visit <https://help.sap.com/docs/disclaimer>.

Service

Service supports the setup and operation of functions and processes for service contract management, service order management, service request management, service billing, and customer engagement. The service solution also supports subscription order management and is used with various industry solutions.

This image is interactive. Hover over each area for a description. Click highlighted areas for more information.

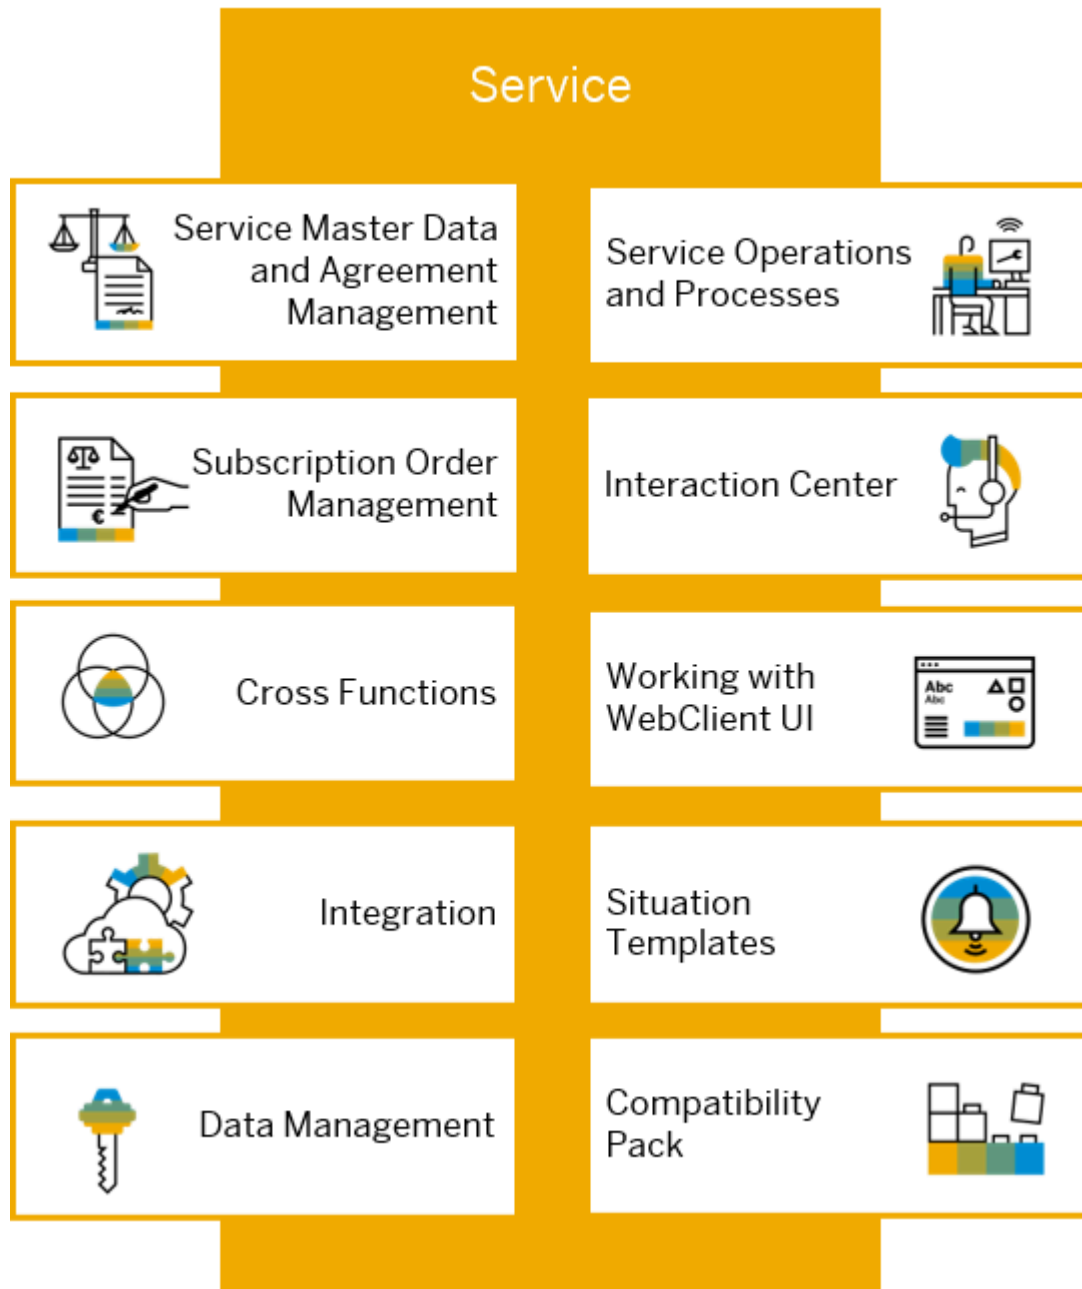

Please note that image maps are not interactive in PDF outputs.


Related Information

[CDS Views for Service](#)

Integrated Service Order Process

Service supports the following end-to-end scenarios: Customer Service to Field Service, Service Contract to Recurring Service, and Returns to In-House Service. In addition, Service is tightly integrated with billing, procurement, finance, logistics, master data management, and analytics.

Integrated Service Order Process

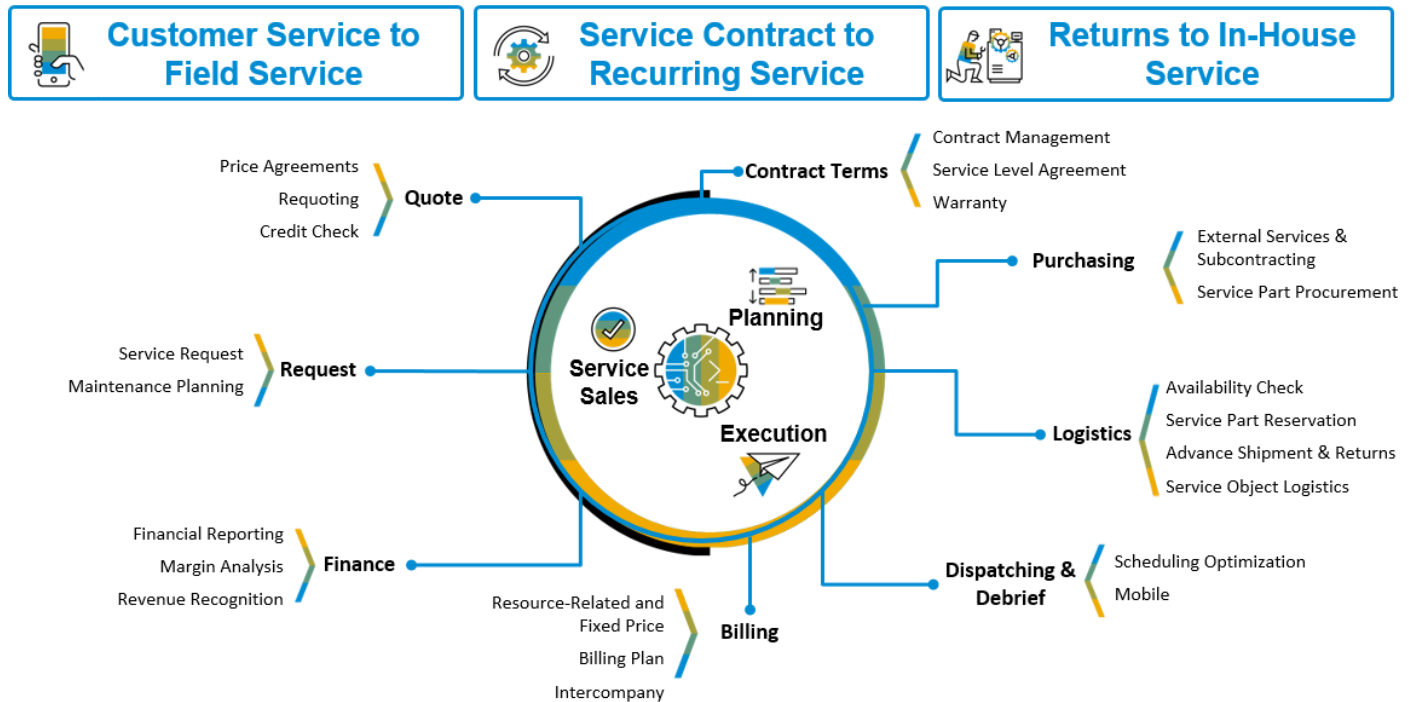

Related Information

[Service with Advanced Execution](#)

[Integrating with Account Assignment Manager](#)

[Logistics Integration](#)

[Finance Integration](#)

[Interaction Center](#)


[Master Data Management in Service](#)

[Service Monitoring and Analytics](#)

End-to-End Scenario: Customer Service to Field Service

This scenario includes customer service operations at call centers, creating service orders including warranty and contract entitlement check, dispatching service activities to technicians, and processing service confirmations for cost and revenue reporting.

Customer Service to Field Service – Example Process

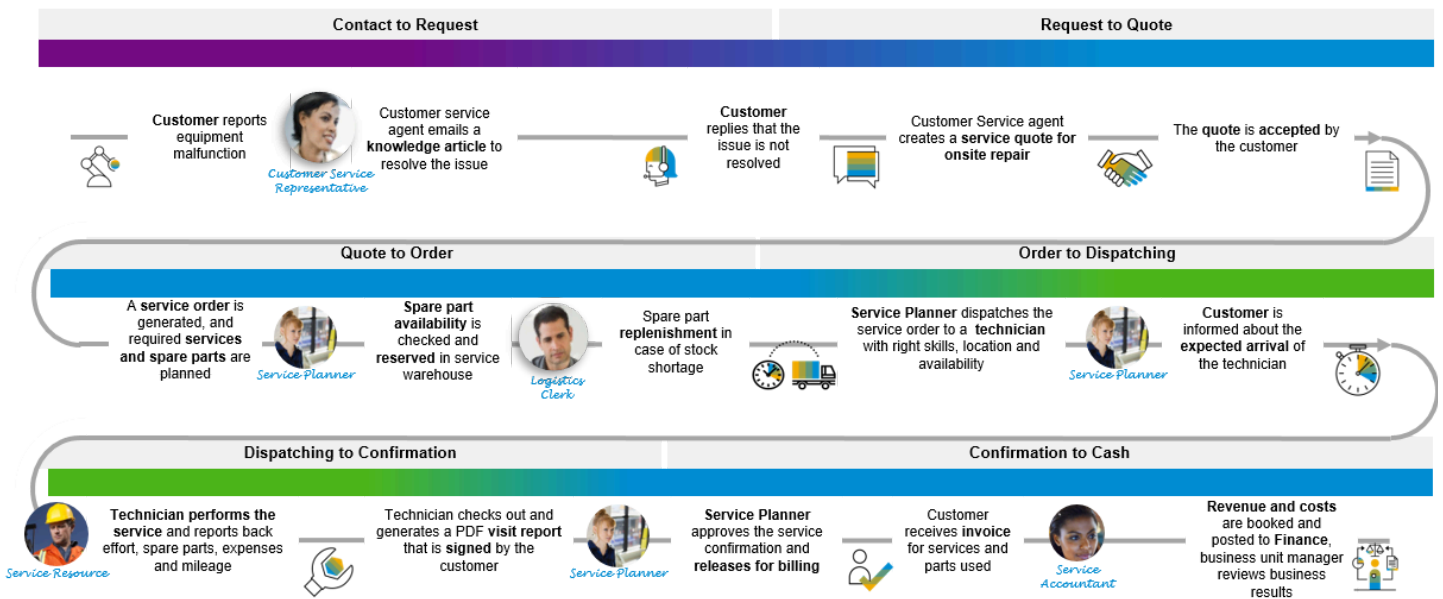

Related Information

[Service Request Management](#)


[Service Order Management](#)

[Integration with SAP Field Service Management](#)

End-to-End Scenario: Service Contract to Recurring Service

This scenario includes service contracts and their auto-renewal, billing plans and maintenance plans with recurring service orders. An integration with procurement allows you to acquire service parts and services. An integration with finance provides for financial reporting and revenue recognition.

Service Contract to Recurring Service – Example Process

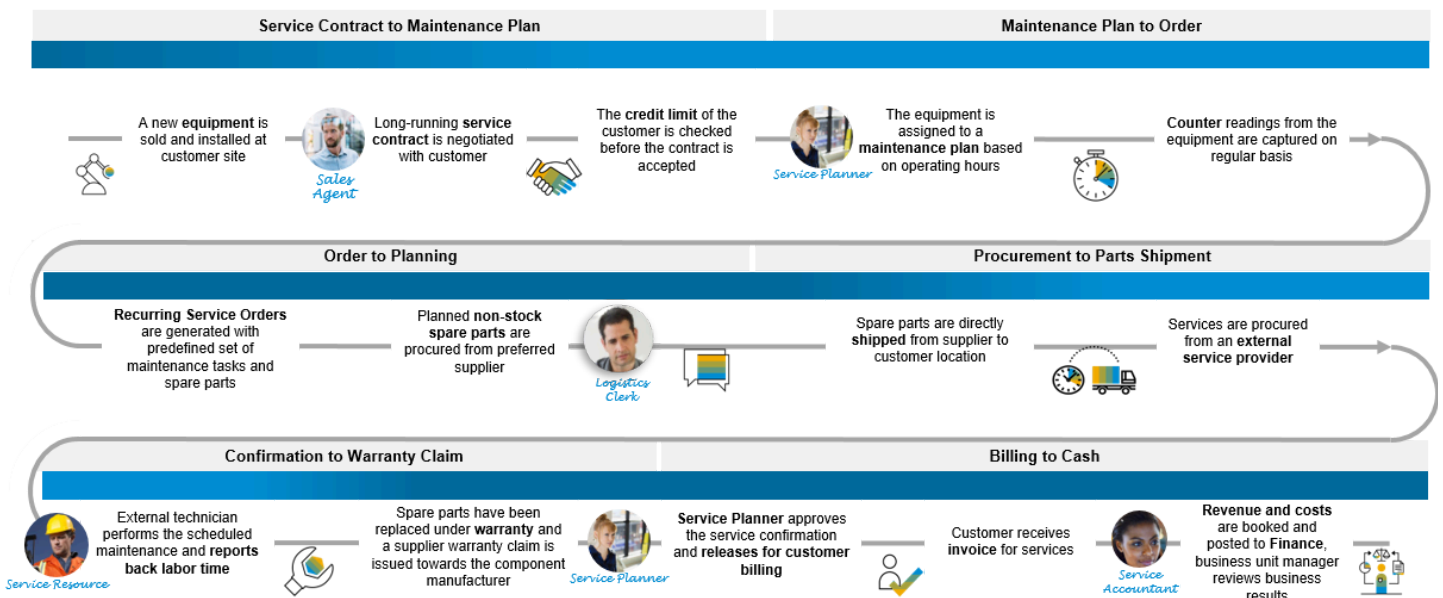

Related Information


[Service Contract Management](#)

This is custom documentation. For more information, please visit [SAP Help Portal](#).

End-to-End Scenario: Returns to In-House Service

This scenario includes creating, planning, and performing the in-house service of serialized devices and components, integrated with customer returns and procurement process.

Returns to In-House Service – Example Process

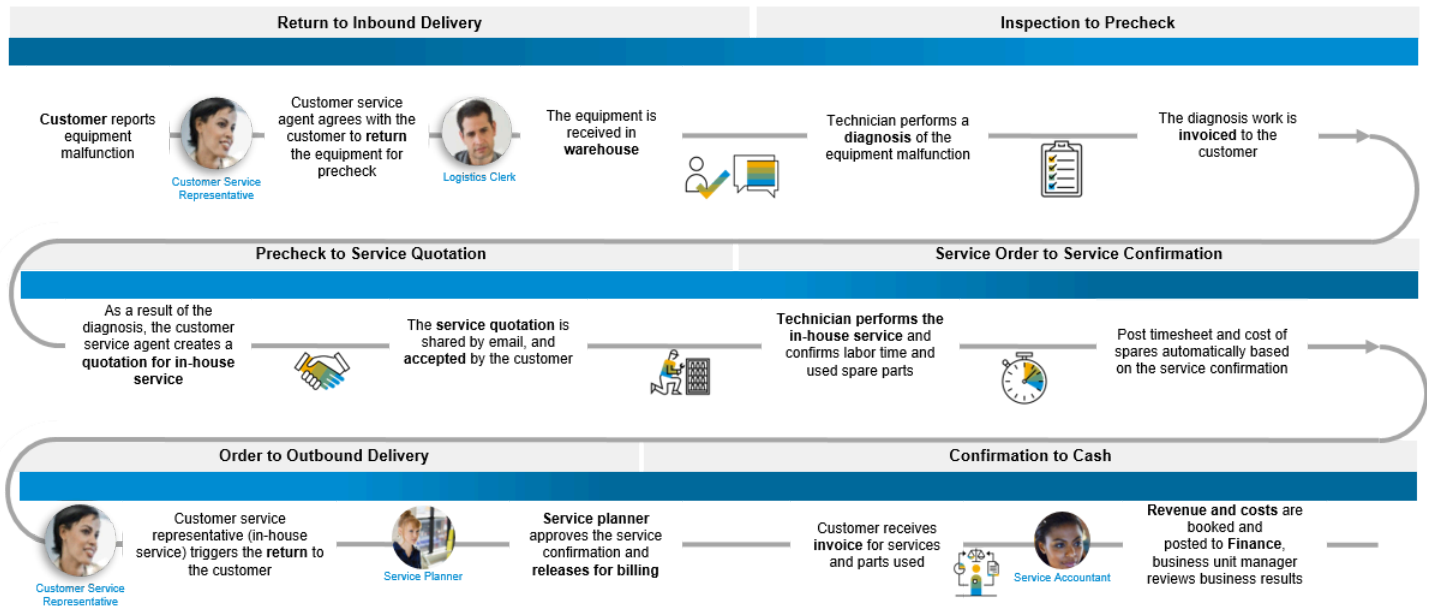

Related Information

[In-House Service](#)

Service Master Data and Agreement Management

Service Master Data and Agreement Management includes master data management to store and manage basic data used in service transactions, service contract management to create and manage contractual agreements for services, recurring service to schedule and organize periodic services, and service monitoring and analytics.

[Master Data Management in Service](#)

Master data comprises data about basic objects used in business transactions in Service and stored on a long-term basis in SAP S/4HANA or SAP S/4HANA Cloud Private Edition.

[Service Contract Management](#)

Service Contract Management in Service supports a variety of functions for service contracts. Service contracts are outline agreements with business partners that define the services offered for a particular period.

[Recurring Service](#)

You can use the recurring service to schedule and organize periodic services that occur repeatedly at certain intervals, such as regular maintenance, ahead of time. The planned recurring service helps you save costs resulting from unforeseen outages or breakdowns, to plan services in a better and more transparent way, and to schedule resources, like personnel or materials, more efficiently.

[Service Monitoring and Analytics](#)

Service Monitoring and Analytics provides monitoring and analytical features for core service business processes. They help you to get an overview of the services being executed by your teams and provide information on a range of key

performance indicators for service contracts and service orders. The solution capability also allows you to identify and address issues that are related to the fulfillment of service transactions and to derive insights for future actions.

[Warranty Management](#)

Warranty Management involves recording of warranty related information for assets sold and/or installed at customer sites, including equipment, facilities, and software applications. You can use this solution capability to streamline and manage the entire warranty claims process.

Master Data Management in Service

Master data comprises data about basic objects used in business transactions in Service and stored on a long-term basis in SAP S/4HANA or SAP S/4HANA Cloud Private Edition.

[Organizational Management in Service](#)

[Business Partners](#)

[Products](#)

[Product Bundles](#)

[Service Teams](#)

[Knowledge Articles](#)

Organizational Management in Service

Use

Service offers you two options for organizational management. One option is the enterprise organizational management that allows you to directly use sales organizational structures from Sales and enterprise service organizations. Another option is the legacy organizational management option. The legacy option offers you a flexible tool for displaying your company's task-related, functional organizational structure as a current organizational model.

Related Information

[Enterprise Organizational Management](#)

[Organizational Management \(Legacy\)](#)

Enterprise Organizational Management

The enterprise organizational management introduces the enterprise organizational model which enables direct access to sales organizational structures from Sales and easy use of enterprise service organizations and service teams. Compared with the [legacy organizational management](#), the enterprise organizational model eliminates double maintenance of sales organizational structures and allows multiple assignment of sales offices between sales groups and sales areas. The enterprise organizational model also allows service organizations to be defined not as a form of master data but in Customizing which is directly transported to the production system.

After you adopt the enterprise organizational management, some organization related functions are no longer available in the following, for example:

- [Interaction Center](#)
- [Sales Force Support](#)

- [Email Response Management System \(ERMS\)](#)
- [Case Management](#)
- [Grantor Management](#)

Related Information

[Enterprise Organizational Model](#)

[Integration](#)

[Organizational Management \(Legacy\)](#)

Enterprise Organizational Model

You can use the enterprise organizational model to define your organizational model in Service. You can enable the enterprise organizational model in Customizing under ► [Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Enable Enterprise Organizational Model](#) ►.

The enterprise organizational model includes the following:

- Sales organizational structures

Organizational structures that belong to Sales are directly used and accessed in Service. Service uses the following organizational units:

- Sales organization
- Distribution channel
- Division
- Sales office
- Sales group

i Note

When you use the enterprise service organization, the sales organizational data is determined based on the sales area of a sold-to party.

You can configure sales organizational structures in Customizing under ► [Enterprise Structure](#) ► [Definition](#) ► [Sales and Distribution](#) ►.

- Enterprise service organization

The enterprise service organization is an organizational unit within an enterprise and is responsible for providing services to customers. Enterprise service organizations can be arranged in a hierarchical manner, for example, service organization "France" can be the subnode of a parent service organization "Europe". You can define an enterprise service organization in Customizing under ► [Enterprise Structure](#) ► [Definition](#) ► [Service](#) ► [Define Enterprise Service Organization](#) ►.

You can also configure the system to automatically assign an enterprise service organization to a service transaction based on a sales area. To set up this automatic assignment, you map an enterprise service organization to a combination of a sales organization, distribution channel, and division using the Customizing activity [Assign Sales Area to Service Transaction Types](#) under ► [Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ►. For more information, see the documentation of this activity in Customizing.

You can use the following Customizing activities in [Enterprise Organizational Management](#) to define rules to determine enterprise service organizations and define enterprise service organization profiles.

- Define Enterprise Service Organization Determination Rules: This Customizing activity can be used to define rules that determine the enterprise service organization in the service transaction header.
- Define Enterprise Service Organization Profile: This Customizing activity can be used to define an enterprise service organization profile and assign a determination rule to the profile. The enterprise service organization profile can be assigned to a service transaction.
- BAdI: Determine Enterprise Service Organization: This Business Add-In (BAdI) can be used to create a custom logic to determine enterprise service organization.

- [Service team](#)

A service team is similar to the service employee group in the legacy organizational management. Service teams are created from the [Responsibility Management](#) as the form of master data with the category of **SERVICE**.

Service offers [another option](#) for organizational management. You can also use this option based on your actual conditions.

Integration

When you enable the enterprise organizational model in Customizing under **►Service ► Basic Functions ► Enterprise Organizational Management ► Enable Enterprise Organizational Model ►**, enterprise service organizations, service teams, and sales organizational structures from Sales are used in integration with scenarios such as Billing, Logistics, Financial Accounting and Controlling, Sales, and Timesheet.

Related Information

[Enterprise Organizational Model](#)

[Integration Based on Enterprise Service Organizations and Service Teams](#)

[Integration Based on Sales Organizational Structures from Sales](#)

Integration Based on Enterprise Service Organizations and Service Teams

When you enable the enterprise organizational model, enterprise service organizations and service teams are used in integration with scenarios such as Billing, Logistics, and Financial Accounting and Controlling.

Billing Integration

When Service is integrated with Billing, a plant is used to derive tax information in generating billing document requests (BDRs). Enterprise service organizations and service teams are used to determine the plant in the generated BDRs. The plant is determined by a specific sequence when BDRs are generated by a service contract, service order, or service confirmation. For more information about the determination sequence for the plant, see [Determination Sequence for Plant and Storage Location](#).

Logistics Integration

- Define logistics scenario for procurement of materials and services

The enterprise service organization is used to define the logistics scenario for procurement of materials and services. The scenario is used to determine which logistics document, for example, purchase requisition, purchase order, or reservation, is generated based on the service part items and service items of a service order.

You can define the logistics scenario for procurement in Customizing under ►►[Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Integration](#) ► [Logistics Scenario](#) ► [Define Logistics Scenario for Procurement of Materials and Services](#) ►.

- Create and change logistics scenario for material withdrawal

The enterprise service organization is used to define the logistics scenario for material withdrawal. The scenario is used to determine where to withdraw a service part based on plant/storage location, customer consignment or technician consignment.

You can define the logistics scenario for procurement in Customizing under ►►[Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Integration](#) ► [Logistics Scenario](#) ► [Define Logistics Scenario for Material Withdrawal](#) ►.

- Plant and storage location determination

Enterprise service organizations and service teams are used to determine the plant and storage location in the procurement scenario. The plant and storage location are determined by a specific sequence. For more information about the determination sequence for the plant and storage location, see [Determination Sequence for Plant and Storage Location](#).

Controlling Integration

- Establish controlling type, controlling level, and controlling scenario

The enterprise service organization is used to define the controlling type, controlling level, and controlling scenario. You can define the controlling type, controlling level, and controlling scenario in Customizing under ►►[Service](#) ► [Integration with Other SAP Components](#) ► [Customer Relationship Management](#) ► [Settings for Service Processing](#) ► [Controlling Integration](#) ► [Establish Controlling Type, Controlling Level, and Controlling Scenarios](#) ►.

i Note

If you disable the use of enterprise service organization in Customizing under ►►[Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Enable Enterprise Organizational Model](#) ►, legacy service organizations are used to define the controlling type, controlling level, and controlling scenario.

- Cost estimation calculation

You can derive a cost center rate for standard cost estimation of service products in service order items. Enterprise service organizations, service teams, and executing service employees (technician) are used to derive a cost center according to the following sequence:

- Service team

The mapping between a service team and a cost center is defined in the [Manage Teams and Responsibilities](#) app. In this app, you can define [CostCenter](#) (Cost Center) for a service team in [Responsibility Definitions](#).

- Cost center that you have specified for an executing service employee
- Enterprise service organization

You can derive a cost center using enterprise service organization in Customizing under ►►[Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Integration](#) ► [Controlling Scenario](#) ► [Assign Cost Center to Enterprise Service Organization](#) ►.

Financial Accounting Integration

A revenue accounting item is generated after a service contract item is released. When the enterprise service organization is used, it is replicated from the service contract item to the revenue accounting item. You can use the enterprise service organization to

define the performance obligation type in Customizing under ►► [Financial Accounting](#) ► [Revenue Accounting](#) ► [Revenue Accounting Contracts \(Classic\)](#) ► [Define Performance Obligation Types](#) ►.

Related Information

[Enterprise Organizational Model](#)

Determination Sequence for Plant and Storage Location

An enterprise service organization and service team are used to determine plant and storage location in integration scenarios. The determination sequence is as follows:

- Service team

The mapping between a service team and a plant/storage location is defined in the [Manage Teams and Responsibilities](#) app. In this app, you can define [ServicePrtPlant](#) (Service Part Plant) and optionally a [ServicePrtStorageLocation](#) (Service Part Storage Location) for a service team in [Responsibility Definitions](#).

- Service employee of a service order or service confirmation

The mapping between a service employee and a plant/storage location is defined in Customizing under ►► [Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Integration](#) ► [Assign Plant to Service Employee and Country/Region](#) ►.

i Note

A service employee can be an executing service employee (technician) or an employee responsible. By default, the executing service employee that you have specified is used in the determination of plant and storage location. If you have not specified the executing service employee, the employee responsible is used in the determination.

- Enterprise service organization

The mapping between an enterprise service organization and a plant/storage location is defined in Customizing under ►► [Enterprise Structure](#) ► [Definition](#) ► [Service](#) ► [Define Enterprise Service Organization](#) ►.

- Country

The mapping between a country and a plant/storage location is defined in Customizing under ►► [Service](#) ► [Basic Functions](#) ► [Enterprise Organizational Management](#) ► [Integration](#) ► [Assign Plant to Country/Region](#) ►.

If this determination logic does not meet your requirements, you can implement the Business Add-In [BAdI: Determination of Plant and Storage Location](#) (CRM_SRV_SP_LOCATION) to define your own custom logic. You can find it in Customizing for Service under ►► [Transactions](#) ► [Settings for Service Transactions](#) ► [Integration](#) ► [Logistics Integration](#) ► [Enterprise Organizational Management](#) ► [Business Add-Ins for Logistics Integration](#) ►.

Related Information

[Plant and Storage Location](#)

Integration Based on Sales Organizational Structures from Sales

When you enable the enterprise organization model, sales organizational structures from Sales are used in integration with scenarios such as Billing, Financial Accounting and Controlling, Sales, and Timesheet.

Billing Integration

When Service is integrated to Billing, sales organizational structures from Sales are transferred from service transactions to the generated billing document requests (BDRs).

Controlling Integration

When a service contract item or a service order is released, an internal order is generated. In the generated internal order, the company code is derived based on the sales area from the Sales and the controlling area is then derived based on the derived company code.

Financial Accounting Integration

You can use the sales organizations from Sales to define the relevance type for revenue accounting in Customizing under [Service > Transactions > Settings for Service Transactions > Revenue Accounting Integration > Define Relevance Type for Revenue Accounting](#).

When a service contract item is released, a revenue accounting item is generated. In the generated revenue accounting item, the company code is derived from the sales area of Sales. The sales organization, distribution channel, and division from Sales are transferred from the service contract item to the revenue accounting item.

Sales Integration

When a sales item in a service order is released, a sales order is generated. The sales organizational structures from Sales in the service order are transferred to the generated sales order.

Timesheet Integration

When a service item in a service confirmation is completed, a timesheet document is generated. The sales area from Sales in the service confirmation is used to derive company code in the generated timesheet document. The controlling area is then derived based on the derived company code.

Related Information

[Enterprise Organizational Model](#)

Authorization

Authorization object **CRMS4_SLSO** is checked in service transactions when enterprise service organizations are in use. The following table lists the fields in this authorization object:

Authorization Field	Description
VKORG	Sales organization
VTWEG	Distribution channel
SPART	Division
VKBUR	Sales office
VKGRP	Sales group

Authorization Field	Description
ACTVT	Activity

Organizational Management (Legacy)

Use

To work with Service, you can simply display the [organizational units](#) that are relevant for your sales and service-related processes

Organizational Management has many options for linking to your organizational units:

- The organizational units (for example, sales organization, service organization) are not already specified: You can include your own organizational levels and leave levels out.
- Organizational units defined in Sales (for example, sales organization, distribution channel, division, maintenance processing plant) can be assigned as attributes to the organizational units in Service. These attributes are not mandatory for planning the organizational model. However, they are required for automatically determining organizational data in transactions.
- You can activate an organization to be used for several scenarios, enabling it to be a sales organization and a service organization at the same time.
- The organizational model is time-dependent. This enables you to plan organizational changes in the future.
- Organizational units can occur as business partners. The system automatically creates a business partner record for an organizational unit with the organizational unit role. You can find further information under BP Role Organizational Unit.

Integration

The Organizational Model in Service is based on the Sales basis component Organizational Management and has been adapted for use in Service.

The organizational model is based on the organizational plan in the Human Resources System.

Features

- Maintain organizational model: You can display your sales and distribution, service, and purchasing structure by creating and processing individual organizational objects and their links. You can also assign object attributes specifically for the sales and service scenarios. You can find further information on maintaining the organizational model under [Working With the Organizational Model in Service](#).
- Organizational data profile for transaction types. You can create organizational data profiles for different transaction types, by entering mandatory fields for transactions as well as determination rules (standard roles) for organizational data determination.
- Evaluation of attributes using transaction data such as the customer number, division, and so on, in the transaction. Organizational units responsible are automatically determined using the evaluation of the assigned attributes or evaluation of the defined responsibilities.

Data Transfer

You can copy organizational data such as distribution channels, divisions, and sales areas with the relevant text from Sales to Service.

You can distribute an organizational model (in Sales, organizational plan) from Sales into Service using ALE. This can be a good idea if you are already working with SAP Workflow in Sales and have displayed a sales structure for it.

You can display the sales structure for Sales using a report in Service. You can find further information in the Customizing documentation, under ► [Master Data](#) ► [Organizational Management](#) ► [Data Transfer](#) ► [Copy SD Sales Structure](#) ►.

Customizing

You can make the settings for Organizational Management in Customizing, by choosing ► [Service](#) ► [Master Data](#) ► [Organizational Management](#) ►.

Restrictions

Matrix organizations cannot be displayed in Service.

You have more freedom when setting up your organizational model in Service than you would in Sales. However, we recommend using the same rules in both to ensure that your business processes work across components. For more information, refer to [Differences in Organizational Data in Sales and Service](#).

Differences in Organizational Data in Sales and Service

Use

Organizational Management in Service offers a flexible tool for maintaining the company structure for different scenarios (Sales and Service).

You can maintain the company structure including the positions and employees in an application and assign specific data (attributes) to the organizational units.

This new maintenance makes new functions possible, for example, you can set the automatic determination of organizational data for the transaction using the organizational model display in Customizing.

The following overview lists the main differences in the maintenance and use of organizational data between SAP Sales and Service.

Features

Function / Feature	Sales	Service
General	You maintain the sales organization in Customizing under Organization Settings.	You maintain the organizational model once for all applications in Service. Scenario-specific data in the structure is assigned by attributes to the organizational units. These attributes are passed onto subordinate organizational units.
	You maintain the organizational plan for Human Resources and Workflow independently.	
	Organizational data in Sales and Distribution is static, changes in organizational data result in major changes in Customizing.	Organizational models can be maintained and adapted dynamically.
	Responsibilities are proposed from the sales area-related data from the Business Partner	Responsibilities are defined independently from the business partner master and are determined, if required, from the organizational model.
Sales area	when creating a sales document	when creating a transaction document

Function / Feature	Sales	Service
	- entered manually or - determined using the customer master for the sold-to party	- entered manually or - determined using organizational data determination
Distribution chain (sales organization and distribution channel)	is mandatory in sales documents	can be flagged as mandatory in Customizing (org. data profile) → Recommendation We recommend that you flag the distribution chain as mandatory for sales documents
Sales organization	only one sales organization can occur in a sales document. This organization is responsible for the processing of the business transaction.	The organizational unit responsible for the document need not be a sales organization. It can also be, for example, a sales office. You can assign business partners directly to the sales organization
Distribution Channel	is an organizational object	is not an independent object. It is an attribute that can be assigned to an organizational unit.
	is defined in Customizing	can be copied from Sales or can be defined in the Customizing for Service.
Division	must be used. If a company does not use division schedule lines, a general division ("cross-division") must be set up and used.	
	is defined in Customizing	can be copied from Sales or can be defined in the Customizing for Service.
	is an organizational object can be assigned to only one distribution chain and not to a sales organization.	The division is not an organizational unit, but an attribute. Several divisions can be assigned to a sales organization independent of the distribution channel.
		Sales document has a sales area, therefore also a division at header level (header division).
Sales office	is assigned to a sales area	The sales office can be directly assigned to a sales organization.
	can be assigned to a business partner in the business partner master.	Business partners and other attributes (for example, postal code area) can be assigned to the sales office, independent of the sales area.
Sales group	can be assigned in the sales data of the business partner master to a business partner as a responsible group	Business partners and other attributes can be assigned to the sales group.
	Assignment of an employee to the sales group, sales office, and/or sales organization takes place in personnel master via Info type 900, an employee can only be assigned to one organizational unit (sales group)	Assignment of employees to an organizational unit using positions in the organizational model This makes it possible to assign an employee to different positions and organizational units.

Function / Feature	Sales	Service
Service organization	displayed as maintenance planning plant	own entity, comparable with sales organization in Sales scenario, is responsible for processing service transactions
Determination of employee responsible (ER)	via business partner master for sold-to party (or another partner in accordance with partner determination procedure)	• via the sales area-dependent partner function Employee responsible in the business partner master • via the business partner relationship defined in the business partner master • via assignment in the organizational model
Organizational unit as business partner (cross-company)	not possible; a business partner master must be created for the organizational unit	possible; when creating an organizational unit, a business partner master (organization category) is automatically created.
Sales district	is defined in the business partner master and copied from there into the document	is assigned to an organizational unit in the organizational model as an attribute and, if required, is copied from the responsible organizational unit into the document.

More Information

[General Attribute Maintenance](#)

[Determining Organizational Data](#)

Organizational Objects

Definition

Objects used for the object-orientated design of Organizational Management when structuring an organizational model. The following object types are available in Service:

- [Organizational unit](#)
- [Position](#)

Organizational models can also contain object types that come from other components, for example, employee (business partner), user.

Use

There are two ways of linking organizational objects to create an organizational model:

- You can link objects with the same object type to individual hierarchies or list them as individual catalogs
- You can link objects of different object types and so connect individual hierarchies and catalogs

You can use these links to form functional dependencies in the organizational model of your company.

You do not have to create all of the objects listed above in your organizational model. You do not have to define positions if, for example, these are not of significance to you. You must, however, create organizational units.

You can maintain your organizational model (Sales organizational plan) in Sales and distribute the data in Service using ALE. In this case, however, you must still maintain attributes for organizational units in Service.

By defining a validity period for each organizational object, you can display past, present, and future situations.

Structure

An organizational object consists of

- a **short and long description**
- an 8 digit **ID number** (assigned by the system) and a description
- a **link**, which defines the relationship of an object to another object
- a **validity period** and a **time constraint**
- a **status flag**
- assignment to one or more **scenarios**

An organizational unit also has its own specific characteristics (**attributes**).

Organizational Unit

Definition

Organizational object (object type key O), which is used to form the basis of an organizational model. Organizational units are functional units of a company. Depending on how task distribution is organized in a company, these can be, for example, departments, groups or project teams.

Use

When you set up the organizational units and their hierarchical links, you create an organizational model of your company, that is, how the organizational units fit together.

Structure

The following organizational units are available in Service for which you can enter the corresponding organizational unit in the system. You make this setting in Customizing.

Mapping Organizational Units

Scenario	Organizational attribute	Corresponds to
Sales	Sales organization	Sales organization
Sales	Sales office	Sales office
Sales	Sales group	Sales group

Service	Service organization	Planning plant
---------	----------------------	----------------

You can also assign more than one organizational attribute to an organizational unit. For example, you can specify that an organizational unit represents both the sales office and also the sales group.

You can also define individual organizational units, for example, regional office, branch etc. But you can only define a counterpart in SAP S/4HANA or SAP S/4HANA Cloud Private Edition for the above.

Organizational units have general attributes that specify, for example, the responsibility of an organizational unit for a specific area. You can define the features of an organizational unit in Service under [General Attribute Maintenance](#).

Integration

An organizational unit can be linked with:

other organizational units using the link A/B 002 (reports to / is line manager of)

positions using the links A/B 003 (belongs to / covers) and A/B 012 (manages / is managed by)

Organizational units can occur as business partners. If you create an organizational unit, the system automatically creates a business partner record for the organizational unit. For more information, see the system documentation in Customizing for Service under [Master Data > Business Partner > Integration Business Partner – Organization Management](#)

Service Organization

Definition

Organizational unit in the service area in which services are planned and prepared. The service organization is responsible for the economic success of a service area within an existing organizational model.

Several responsible service organizations can be assigned to a service organization. For example, [service organization south](#) can be sub-divided in the responsible service organizations [Munich](#) and [Stuttgart](#).

Use

In Service, there is attribute [Service Organization](#), which you set in organizational model maintenance in the [Function](#) area. This attribute flags an organizational unit as a responsible organizational unit in the service area. This means that the organizational unit is flagged as a superordinate organizational unit in the service area, to which you can assign subordinate organizational units.

Subordinate organizational units, the responsible service organizations, report to the service organization. By inheriting the attribute [Service Organization](#), the system identifies the subordinate organizational units implicitly as organizational units for the service area.

Integration

In mapping, the service organization corresponds to the maintenance planning plant in Sales. This means that the system determines the maintenance planning plant in Sales using the service organization in Service.

Sales Organization

Definition

Organizational unit in Sales that structures the company according to sales requirements.

The sales organization is responsible for the business success of a sales area in an existing organizational model.

Use

Sales transactions are prepared and implemented in a sales organization.

Several sales offices and/or sales groups, or, other freely definable organizational units can be assigned at a lower-level to a sales organization. It is not possible, however, to have further sales organizations subordinate to a sales organization.

You can assign attributes to a sales organization in organizational model maintenance. The sales organization is then responsible for these attributes, for example, one or more divisions and distribution channels or a language, a postal code, and so on. You use these attributes in business transactions to enable organizational data determination. For more information, refer to [General Attribute Maintenance](#).

Integration

Sales data in the business partner master (for example, pricing data) is dependent on the sales area (sales organization with the attributes distribution channel and division). Therefore you should enter a sales organization in sales transactions, so that the system can read the sales data for the transaction in the business partner master.

Business Place

Use

You use business places in the function for juristic persons to carry out tax reporting at local level (below the company code). This is a legal requirement in certain countries such as Brazil or Korea. If you do not (have to) carry out local tax reporting, you do not need business places.

In Organizational Management in Service you can maintain business places for the Sales and/or Service scenarios. If you mark something as a business place this does not bear any relation to whether it is already labeled as a sales or service organization.

The **Business Place** attribute is passed onto the subordinate organizational units.

In transaction processing, the business place is determined by partner processing.

Activities

If you want to use Service in a country that requires the use of business places, configure the corresponding organizational unit as a business place. You can make the necessary settings in the [View Configuration](#) screen of the WebClient UI.

Position

Definition

Organizational object (object type key S) which shows the functional task distribution of individual items and their reporting structure in the organizational model. Positions are items in an enterprise that are assigned to holders (employees or users of Service), for example, person responsible from purchasing, sales managers from Europe or secretaries from the marketing department.

There are different types of positions. A normal position is not a concrete item in a company, but an aid for creating several positions that comprise of comparable tasks and features.

Use

You can use positions to show the individual items in your company and their assignment to organizational units and their functional task distribution. You can define a **chief position** within an organizational unit to which all other positions in this organizational unit report.

In some companies the simple assignment of positions to organizational units already depicts the **reporting structure**, that is, the relationship of positions to each other according to expertise and disciplinary matters.

You need positions to

- Create **staff assignments**, this is the assignment of a holder (employee or user of Service) to a position and the corresponding organizational unit
- Distribute tasks to the items in your company
- Implement the use of Workflow Management
- Carry out **evaluations** throughout the reporting structure

A position can also be activated for one or more scenarios. This is the prerequisite for determining the employees responsible for a business transaction via the position.

Integration

In Service, a position can always be linked to:

- an [Organizational Unit](#) via the link A/B 003 (belongs to / covers)
- a [Holder](#) (employees or users of Service) via the link **A/B 008 (holder)**

A position inherits the attributes of the organizational unit to which you assign it. You cannot assign attributes directly to a position.

Holder

Definition

A natural person defined as an employee (object type key CP) or as a user (object type key US) of Service who is assigned to a position in an organizational structure.

Use

By assigning an employee or a user to a position, you can show where an employee is assigned organizationally within an enterprise (what his or her function is).

i Note

You can define the user key in the employee master. If you then assign the employee to a position, the user is automatically assigned as well and is displayed in the structure.

i Note

To enable an employee to display the worklist functions in the [Locator](#), the employee must be assigned to a position as an employee.

When using [SAP Workflow](#), users must be assigned to the position directly.

Integration

The employee is shown in Service as the business partner with the business partner role [Employee](#).

You can find further information in Customizing for **Service** under ► [Master Data](#) ► [Business Partner](#) ► [Integration Business Partner - Organizational Management](#). ►

Working With the Organizational Model in Service

Use

You want to:

- display the sales or service structure of your organization.
- make changes to the organizational model or individual [Organizational Units](#).
- display responsibilities and other data of your organizational units using attributes.
- display sales areas (sales organization, distribution channel, division).

Activities

You can perform the following activities:

Organizational Model

- You can create an organizational model by creating organizational units
- You can display the organizational model or individual organizational units
- You can edit the organizational model, that is, create new organizational units, and, assign, schedule or delete these
- You can create attributes for organizational units

Attributes

- You can create important data such as the address or validity period of an organizational unit
- You can define attributes for each organizational unit of each scenario, for example, currency, region, product group
- You can define sales areas by assigning attributes such a distribution channel and a division to a sales organization or its subordinate organization

You can find further information on maintaining attributes under [General Attribute Maintenance](#).

Repositioning Organizational Units in Service

Use

You can take an existing organizational unit and reposition it within a hierarchy level

Prerequisites

You have already created an organizational model.

You have familiarized yourself with the validity concept.

Procedure

Repositioning Organizational Units

1. In the organizational model, select the organizational unit you want to reposition.
2. Use the **Cut** and **Paste** buttons to insert the organizational unit in the desired position.

The organizational unit is repositioned. As you have merely moved the sequence in a hierarchy level, the date of your assignment remains the same.

3. Save your changes

Result

You have restructured your organizational model.

General Attribute Maintenance

Use

You can use general attribute maintenance to attribute data (attributes) to organizational units, when creating your sales and distribution or service structure. You always maintain these attributes specifically for a scenario (Sales or Service).

Service distinguishes between organizational and business attributes:

- organizational attributes define the type of organizational unit, for example, whether it is a sales organization or a service group.
- business attributes define the responsibility of an organizational unit, for example, for which distribution channels or product groups an organizational unit is responsible.

Attributes can have one or more values. For some attributes, you can also enter areas (for example, partner numbers 001 to 300).

❖ Example

You maintain the following attributes for organizational unit **Office Manchester**:

Organizational Unit		O 50001243	Office Manchester
	Scenario:	Sales	
	Org. Attribute:	Sales Office	
	BusinessAttribute:	Distr. Channel	10
		Country	GB
		Region	CH, GM, LA
	Scenario:	Service	
	Org. Attribute:	Service Organization	
	BusinessAttribute:	Country	GB
		Region	-

The organizational unit **Office Manchester** is therefore responsible for distribution channel 10 - direct sales – and the regions **Cheshire, Greater Manchester** and **Lancashire**.

For service transactions, on the other hand, the organizational unit does not have access to the attribute **Region**; it is responsible for the whole of Great Britain.

Attributes are generally inherited by the subordinate organizational unit. You can find further information under [Attribute Inheritance](#).

The values of the attributes in the organizational model can be read from the system, and can be used, for example, to find the organizational units responsible for processing a particular transaction.

Integration

Attribute maintenance can be seen in info type 1222 from the basis component **Organizational Management**. Info type 1222 (general attribute maintenance) is only used in Service.

Each scenario corresponds to a sub type from info type 1222. All modules required for reading the attributes are summarized in the function group RHOMATTRIBUTES.

Features

General attribute maintenance is used for generic data filing in the form of a key value (or value area). Using scenarios, data can be sub-divided logically.

Each attribute (key/value pair) has certain characteristics, for example

- a reference to the Data Dictionary
- specific F4 help
- specific types of inheritance

Predefined attributes are delivered for Sales and Service scenarios.

Activities

You can maintain the attributes for organizational units. You can find a list of attributes for the Sales and Service Scenarios and their most important characteristics under [Attributes for Sales and Service Scenarios](#).

You can maintain organizational attributes that correspond to your sales and distribution or service structure in the system (sales organization, sales office, sales group or service organization) on the **Function** area

Example

Restrictions

You cannot maintain attributes for the following organizational objects in Service:

- Positions

Positions inherit the attributes of the higher-level organizational unit.

- Holders (employees and users)

Attributes for Sales and Service Scenarios

Use

You can assign attributes to your organizational units in the organizational model. The system evaluates these attributes, if it uses the **organizational model** determination rule in the transactions of organizational units. You can find further information on this type of organizational data determination under [Rule Resolution Using Organizational Model](#).

The lists below display which attributes are available in Service and describe the most significant default characteristics.

Prerequisites

You are familiar with the concept of [General Attribute Maintenance](#).

Features

As a rule, attributes that you have assigned to an organizational unit are passed onto the subordinate organizational units. Inherited attributes can be overwritten. If the standard system deviates from this inheritance type, there is a note below.

Some attributes are not only used in the standard for organizational data determination; they are read by the system of this organizational unit and entered into the transaction (for example, distribution channel) after the determination of the organizational unit (Service and Sales) in the transaction.

Caution

Note that default settings for attributes should not be changed.

Business Attributes for Both Scenarios (**Sales** and **Service**)

Attribute	Technical Name	Characteristics	Read from...
Country	COUNTRY	Multiple-value	Address of main partner
Region	REGION	Multiple-value areas permitted	Address of main partner
P.O. Box	POSTBOX	Multiple-value areas permitted	Address of main partner
Postal Code	POSTCODE_1	Multiple-value areas permitted	Address of main partner
District (Sales District)	DISTRICT	Multiple-value	Address of main partner

Attribute	Technical Name	Characteristics	... Read in Document from ...
Country	COUNTRY	Multiple-value	Address of main partner
Region	REGION	Multiple-value areas permitted	Address of main partner
P.O. Box	POSTBOX	Multiple-value areas permitted	Address of main partner
Postal Code	POSTCODE_1	Multiple-value areas permitted	Address of main partner
District (Sales District)	DISTRICT	Multiple-value	Address of main partner
Activity Reason	ACT_REAS	Multiple-value	"Activity Reason" field in transaction
Last Name (of Contact Person)	NAME_LAST	Multiple-value areas permitted	Contact person of main partner entered in document
Partner Number	PARTNER	Multiple-value areas permitted	Main partner
Function of Contact Person	PARTNERFKT	Multiple-value	Function description in contact person master data (for example, janitor)
VIP Partner	PARTNERVIP	Multiple-value	Relationship of contact person to main partner from master data of main partner (for example, supervisor of...)
Branch	IND_SECTOR	Multiple-value	Main partner master record
Product Group	PRODGRP	Multiple-value	From product master (only at item level)
Product Number	PRODUCT	Multiple-value areas permitted	From product master (only at item level)
Correspondence Language	LANGU_CORR	Multiple-value	Contact person master record
Text Module - Footer	TXT_FOOTER		Not used in determination; in output using Smart Forms, a particular text module is pulled
Text Module - Header	TXT_HEADER		
Text Module - Sender	TXT_SENDER		
Text Module - Signature	TXT_SIGN		

Business Attributes for Sales Scenarios Only

Attribute	Technical Name	Characteristics	Comments
Distribution Channel	D_CHANNEL	Multiple-value	Sales data of main partner master record; Not only used for determination, but also derived from the organizational unit (Sales) of the transaction
Division	DIVISION	Multiple-value	Either: Product (at header level), if you are not using a header division Or: Organizational data of main partner master record, if you are using a header division. Not only used for determination, but also - for creation of Sales areas in CRM - to check whether product divisions of transaction item fit to Sales divisions in the Organization Model.
Combination of Division and Distribution Channel	CHAN_DIV	Multiple-value	Serves to limit combination possibilities from Division and DistributionChannel fields
Reference Currency of transaction	CURRENCY	Cannot be overwritten	Is not used for determination, but is derived from the sales organization and taken over in the transaction
Telephone Number for Call Center	DNIS		Is transferred by Computer Telephony Integration (CTI) system to the system
Status	STATUS	Multiple-value	Transaction status
Order Net Value	NET_VALUE	Areas permitted	Transaction price data
Item Quantity	QUANTITY	Areas permitted	Total quantity (confirmed quantity) of product in transaction

The attributes listed below are used exclusively in partner determination using determination rules of the [Responsibilities](#) rule type. It is therefore not useful to store values for organizational units for these attributes.

Attributes for Partner Determination Only

Attribute	Technical Name	Characteristics	Comments
Organizational Unit (Sales)	SA_RESPORG	Multiple-value areas permitted	Not used in Organizational Model; is only used for partner determination with Responsibilities rule type
Organization Unit (Service)	SE_RESPORG	Multiple-value areas permitted	


Attribute Inheritance

Use

Attributes are inherited by subordinate organizational unit. However, you can overwrite the attribute value of a subordinate organizational unit with another attribute value (inheritance type: **overwrite inherited local values**.)

Example

Inheritance

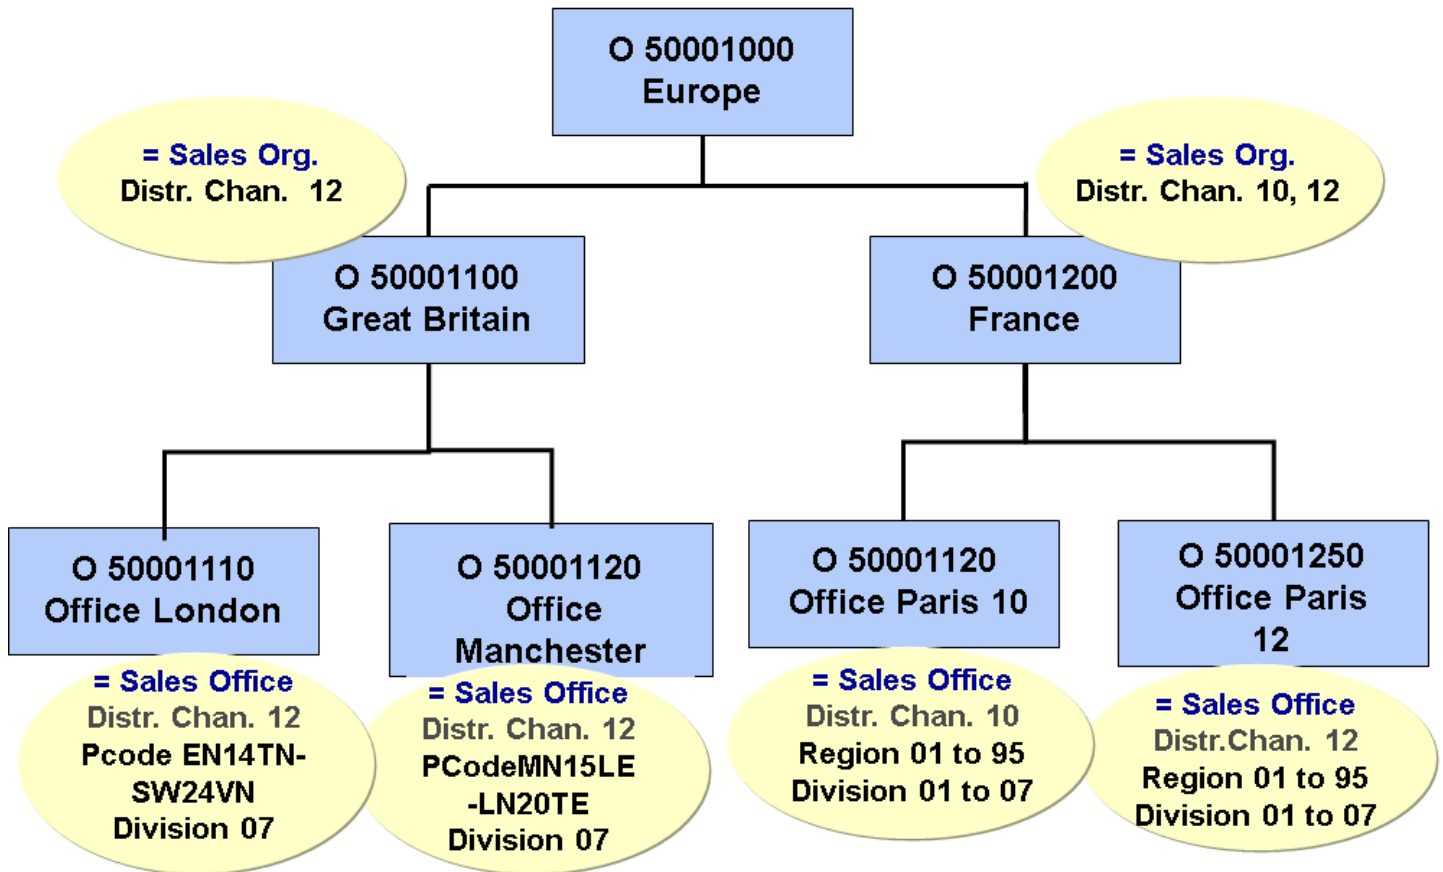

Organizational units with attributes

The following attributes are assigned to the organizational unit **Sales Organization Great Britain** (O 50001100): "is a Sales Organization" and "Distribution Channel 12 – Wholesale Trade". The attribute "Distribution 12" is automatically passed onto both subordinate sales offices. The sales offices also have the attribute SA_ORG. This shows that the sales offices belong to the higher-level organizational unit. The attribute cannot be seen in the attribute list. However, you can see the assignment on the **Function** tab page (the **Type** tab page in the Human Resources System).

The organizational unit **Sales Organization France** (O 500001200) is assigned two distribution channels: 10 – **RetailTrade** and 12 – **WholesaleTrade**. Both attribute values are passed onto the subordinate sales offices. However, you can distribute the responsibility on the sales office level by overwriting the **distributionchannel** attribute. You then have a sales office for Distribution Channel 10 – **Retail Trade**, and, a sales office for Distribution 12 – **Wholesale**.

Determining Organizational Data

Use

When processing a business transaction, certain organizational data is mandatory depending on the transaction type. In a service order, for example, the service organization that is responsible for processing is a determining factor. The distribution channel in a

sales order is as important as the responsible sales organization, as price and delivery data can depend on the distribution channel.

In Service you have the following options for determining organizational data in the transaction. You can set these in Customizing depending on the transaction type:

- no determination

In this case, enter the organizational data (for example, sales area) manually in the transaction.

- automatic determination

The system determines organizational data using the data available in the transaction, for example, the business partner number, region, product, or using the user assignments for the organizational unit (using the position).

Prerequisites

No automatic determination

1. You have created an organizational data profile in Customizing, in which **no** determination rules have been entered.
2. You have assigned this organizational data profile to the required transaction type.

Automatic determination

1. You have created a determination rule in Customizing for each determination path with the corresponding rule type.
2. You have defined one or two determination rules in the organizational data profile for evaluating the organizational data profile of a transaction.
3. You have assigned the organizational data profile to a transaction type.

You carry out the settings in Customizing. Choose **► Service ► Master Data ► Organizational Management ► Organizational Data Determination** ►. You can find further information in the documentation there.

Features

When determining organizational data, the system takes the organizational data profile defined in Customizing and the determination rules from this profile. These determination rules specify which fields are taken into account when the system determines organizational data from transaction data (for example, business partner number, telephone number). Determining organizational data can be set by assigning the organizational data profile for the business process type so that it is dependent on the business process type.

There are two determination paths provided in Service that have been characterized for the two rule types:

- Rule type [Responsibilities](#)
- Rule type [Organizational Model](#)

The rule types **Organizational Data** and **Function Module** are available in Service. For more information, see [Defining Rules Using Organizational Data](#) and [Defining Rules Using Function to Be Executed](#).

If you define two determination rules in the organizational data profile, the system creates the intersection from the resulting quantity of the two rule resolutions.

The determination of organizational data can differ according to the scenario. An organizational unit in the sales scenario may have different attributes with different values compared to an organizational unit in the service scenario.

Organizational data at item level	Customizing setting
The organizational data is copied from the document header. The division is derived from the document header.	Assign an organizational data profile without a determination rule to the item category.
There is no organizational data at item level.	Do not assign the organizational data profile to the item category.

Activities

1. The system determines the responsible organizational unit
2. The system reads the other attribute values for this organizational unit, and, if necessary, uses them to determine other data, for example, the distribution channel.

If the system determines more than one responsible organizational unit or determines several attribute values for the responsible organizational unit, a selection screen appears.

Rule Resolution Using Responsibilities

Use

You would use the **responsibilities** rule type if you

- want to determine organizational data for individual responsibilities
- have not created an organizational model but want to create one
- have a lot of organizational units and must only assign a few attributes

For the system to determine organizational data using the responsibilities rule type, you need to use organizational units. However, these do not need to be linked. Therefore you do not need to create an organizational model for this determination path. The attributes are defined directly in the rule container.

If you use rule resolution using responsibilities, you do not have to assign attributes in the organizational model, other than the attributes distribution channel and division; these are necessary for showing the sales area.


Prerequisites

You have transferred the required organizational units to Service or have created them manually.

You have created a determination rule with the responsibility rule type in Customizing and have assigned it via the organizational data profile to the required transaction type.

Process

Responsibility Rule Type - Example

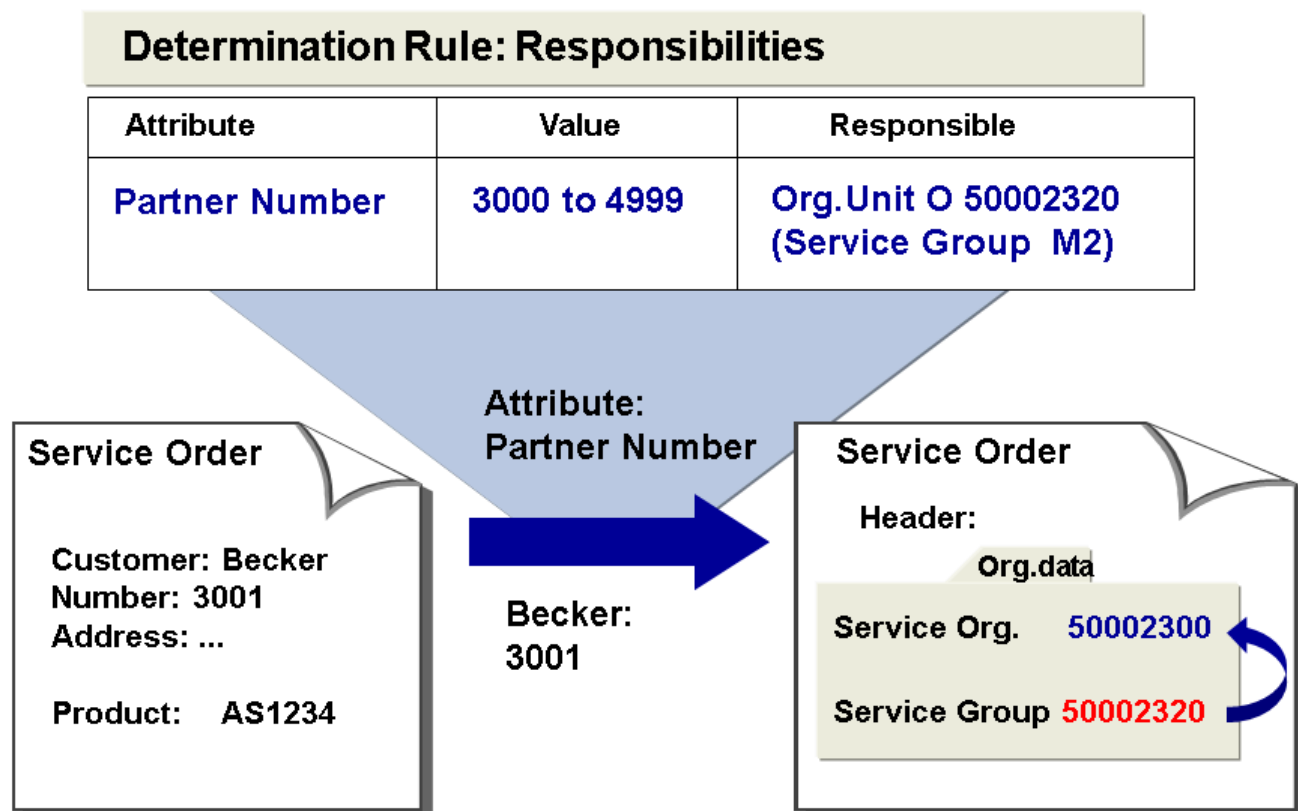

Determination of organizational data using the responsibility rule type:

Default Settings

You have defined the organizational units:

- O 50002300 – **Service Organization M**
- O 50002320 – **Service Group M2**

You have assigned a determination rule to the **Service Order** transaction type. This defines the following responsibility: Service Group M2 (O 50002320) is responsible for Partner Numbers 3000 to 4999.

Process Flow

1. You receive a service request from Customer 3001 – Becker Manchester
You create a service order.
2. The system uses the determination rule, which has been assigned to the transaction type **Service Order** in Customizing, to find the organizational unit responsible for an evaluated attribute in the transaction.
3. The system finds the attribute **Partner number**, reads the value 3001 in the transaction and uses this to determine the organizational unit responsible for it, in this case, Service Group M2.
4. The system reads the other attributes assigned to (or passed onto) the organizational unit **Service Group Manchester** and determines the data which is necessary to complete the organizational data of the transaction. In this case, Service Organization 50002300 (or in sales transactions, sales organization and distribution channel).

Result

The organizational data is in the transaction. If required, you can change this data manually.

Using organizational data, the system determines further data for the transaction, for example, involved partners, prices and terms of delivery.

Rule Resolution Using Organizational Model

Use

You would use rule resolution using organizational model if you

- have created an organizational model or have distributed a plan to Service and also want to use this for determining organizational data
- want to assign a large number of attributes to the organizational units and these must be evaluated

Prerequisites

You have created or distributed a sales and service structure as an organizational model.

You have assigned attributes to the organizational units by completing the pre-defined attributes with values.

You have released the organizational units for this scenario that should be determined for transactions in this scenario. For this set the **Object Permitted for Scenario** flag in attribute maintenance to **Released**.

→ Recommendation


To improve performance, we recommend that you release only the organizational units that are actually used in transactions of particular scenarios, as only these are evaluated during automatic evaluation.

This also helps to avoid manifold determination results.

You have created a determination rule using the **Organizational Model** rule type, and, have assigned it to the required transaction type.

Process

Determination using *Organizational Model Rule Type* - Example

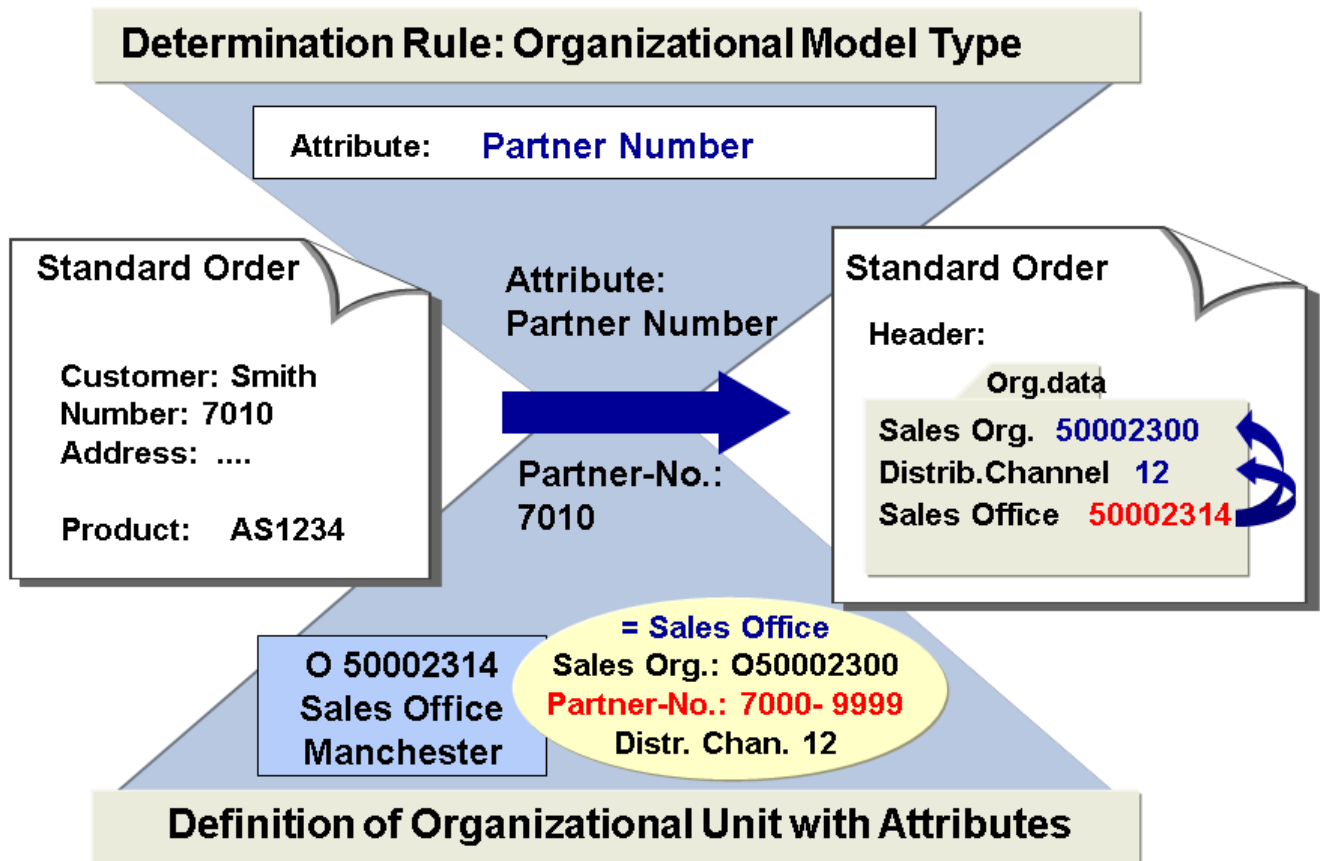

Determination of organizational data using the organizational model rule type

Default Settings

The organizational unit O 50002314 (Sales Office Manchester) contains, amongst other things, the attribute **Partner Number** with the values 7000 – 9999.

It has been released for the **Sales** scenario.

The determination rule for the sales order transaction type contains the **Partner Number** field.

Process Flow

1. You receive a sales order, for example, by telephone with the following details:

- Customer: 7010 Smith
- Product: AS1234 - Laptop AS

You create a sales order.

2. The system uses the determination rule, which has been assigned to the transaction type **Sales Order** in Customizing, to determine which attributes are to be evaluated.
3. The system finds the **Partner Number** attribute in the determination rule.
4. The system reads partner number 7010 from the order.

5. The system searches in the values in the organizational model to find which organizational attribute partner number 7010 has been assigned to and finds organizational unit [Sales Office Manchester](#).
6. The system reads the other attributes assigned (or, passed on) to the organizational unit [Sales Office Manchester](#) and determines the data which is necessary to complete the organizational data of the transaction. In this case, Sales Organization 50002300 and Distribution Channel 12.

Result

The organizational data is in the transaction. If required, you can change this data manually.

Using organizational data (sales area), the system determines further data for the transaction, for example, involved partners, prices and terms of delivery.

Organizational Data in Transactions

Use

Organizational data is shown on its own tab page in transactions.

Prerequisites

The [Org.data](#) tab page is only displayed, if you have assigned an organizational data profile to the transaction type in Customizing for Organizational Management. You can find more information in Customizing for **Service** under ► [Master Data](#) ► [Organizational Management](#) ► [Organizational Data Determination](#) ► [Change Rules and Profiles](#) ► [Assign Organizational Data Profile to Transaction Type](#) ►.

If the tab page is not shown, this means that the system does not create organizational data at the corresponding level (header or item).

Features

You can change the organizational data in the document, or enter new data if the fields are empty.

- The input help is context-sensitive in the organizational data fields.

For example, if you enter sales organization 0 5000333 – LW 1000 and then display input help for the [distribution channel](#) field, only distribution channels assigned to sales organization 0 5000333 – LW 1000 in the organizational model, are displayed.

- If you enter the data manually, the system checks whether this combination of organizational data is maintained in the organizational model.

The system checks, for example

- whether the attributes distribution channel and division are assigned to the sales organization
- whether the subordinate units (sales office, sales group, service group) are assigned to the corresponding organizational unit.

- If the fields for organizational data are completed in the document, and you make changes in the document, there is no new organizational data determination.

See also:

This is custom documentation. For more information, please visit [SAP Help Portal](#).

Check List for Organizational Data

Symptom

The system does not determine the organizational data for a transaction document (for example, a service order) as expected (org data screen is partly or completely empty or the required organizational units were not found).

This can have various causes. You can use the following checklist to check the settings for determining organizational data.

Check List

1. Organizational data model

Is the organizational data model maintained and are the organizational units provided with attributes?

Are the organizational units such as the sales organization, sales office, sales group, service organization, and purchasing organization marked as such?

Ensure that the organizational units have been activated for the required scenario during maintenance of the organizational model (for example, the service organization for the Service scenario).

2. Attribution

Are the organizational model and attributes uniquely maintained?

When attributing organizational units overlapping may occur, for example, in the following cases:

If you evaluate attributes at a higher level of the organizational model (for example, the root), these attributes and the assigned values are passed on to all subordinate organizational units for the corresponding scenario, if they are not overwritten by another value. In some cases therefore several organizational units have the same value and attribution overlaps. In organizational data determination all of these organizational units are determined with the searched value.

You can avoid this type of overlapping by overwriting the subordinate organizational units that have inherited values with other values, or, by providing them with restricted values. To make restrictions, you can use the exclusion flag Excluded.

If you go over the value areas for attributes, there will be overlapping:

You assign the postal areas 1 –12000 to organizational unit 1, the areas 5000 to 25000 to organizational unit 2. Both organizational units are responsible for a sold-to party with the postal code 10 000.

If the system determines several organizational units for a document, a selection screen appears in which you can select the required organizational unit for the current document.

3. Organizational data profile

Has an organizational data profile been created and defined in these determination rules?

To check the determination rule, you can carry out a simulation in the determination rule maintenance.

4. Organizational data profile assigned?

In order that organizational data is determined at header level for the transaction, the organizational data profile must be assigned to the corresponding business transaction type.

If the organizational data at item level should be copied from the header data, an empty organizational data profile (without determination rules) must be assigned to the corresponding item category.

If no organizational data profile is assigned, the organizational data set in the business transaction document is empty at header and/or item level and the screens for organizational data are not displayed.

It is not possible to carry out organizational data determination independently from the header data for the item level. This means that no organizational data profile can be assigned to an item category if it contains a determination rule.

5. Source data

Is the source data that is required for determining organization data available in the document?

If, for example, the determination rule states that the responsible sales organization should be determined using the postal code of the sold-to party but no address has been defined here, the system is not able to determine the sales organization.

Buffering Organizational Data

To improve system performance, you can use the HRBCI_ATTRIBUTES_BUFFER_UPDATE program to buffer the organizational model and its attributes.

Call view T770MATTR using transaction SM30 and select the **Buffering** field for each scenario to buffer the corresponding objects.

Execute program HRBCI_ATTRIBUTES_BUFFER_UPDATE (after 0:00 hours) before starting your systems. This time of after 0:00 hours is important for starting up the current day buffer, as data for organizational management is time-dependent.

→ Recommendation

We recommend you schedule the program every night as a background job.

i Note

You can also influence performance by customizing organizational data determination, using the **Responsibility** rule type. Responsibility determination rules determine the required organizational unit (or required partner) without evaluating the organizational model. For more information, see [Rule Resolution Using Responsibilities](#)

Business Partners

Use

Business partners are parties in which your company has a business interest. You can create and manage your business partners centrally for different business transactions and indicate the different roles they play, such as sold-to party and ship-to party.

A business partner can be any of the following:

- Account

An account is a company, individual, or group with which you have a business relationship. An account can be, for example, a customer, prospect, vendor, or competitor. Accounts are subdivided into the following types:

- Corporate accounts (companies or organizations)
- Individual accounts (private individuals)
- Account groups (any groupings, such as households)
- Contact

A contact is a person with whom you have a business relationship, and is mostly assigned to a corporate account.

- Employee

An employee is a member of your company and involved in the interactions between your company and customers, prospects, vendors, and other parties.

More Information

For more information about the business partner features, see [SAP Business Partner](#).

Data

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Account Classification](#)

[Industries](#)

[Status and Life Cycle Data](#)

[Sales Area Data](#)

[Business Hours and Business Appointments](#)

[Additional Data](#)

Address and Communication Data

Use

You can create one or more addresses for each business partner. If you enter only one address for a business partner, this is designated as the standard address and used for all activities. If you create multiple addresses, you can define when they should be used (as the delivery address or billing address, for example). You can utilize multiple addresses maintained in the business partner for processes such as billing when the business function Q2C_MULTIPLE_BP_ADDRESSES is activated. If this business function is disabled, the standard address maintained in the Business Partner will be used. For more information see [Multiple Address Handling for Business Partners in Sales and Distribution](#). The addresses are time-dependent.

The communication data can be specific to an address or independent. You can enter various communication data for a business partner, such as telephone and fax numbers, e-mail, or pager numbers. You can indicate which is the standard and whether a particular entry should not be used. You can also specify the communication method by which the business partner should be contacted.

Parent topic: [Data](#)

Related Information

Bank and Tax Data

Definition

Information required for correct processing of business transactions, such as bank account details, payment cards, taxation group, and identification numbers.

Use

Bank Account Details

You can enter comprehensive data about the bank accounts belonging to a business partner, as follows:

- The bank and the account can be clearly identified by the country key of the bank, the bank key, and the bank account number.
- The bank data provides additional information about the bank, such as name and address.
- You can specify an international bank account number (IBAN), and other bank account details can be automatically derived from this.

If you want to allow business users to enter an IBAN only without a bank account number, do the following:

- Activate the function **IBANONLY** in Customizing for **Cross-Application Components**, under **►SAP Business Partner ►Activation Switch for Functions ►**.
- Display the checkbox **Account Number Unknown** in your UI as described in SAP Note [1539788](#) .

Users must select the checkbox if they do not want to enter a bank account number.

- You can enter SEPA mandates.

Bank account details are time-dependent and can be changed as of the current date or a future date. The system automatically restricts the validity of the bank account details to one day before the new details become valid. When a process accesses the old details, the system determines the new bank account details based on the bank details number of the old bank account details.

You can use read programs to import bank master data from an external data medium to your database. You do this in Customizing for **Cross-Application Components**, under **►Bank Directory ►Bank Directory Data Transfer ►**.

You can make settings for bank data checks in Customizing for **SAP NetWeaver**, under **►General Settings ►Set Countries ►Set Country-Specific Checks ►**.

Payment Cards

You can enter any number of payment cards for a business partner and identify the payment card that a business partner uses most frequently as the standard payment card. A payment card can be locked for a specified period of time, such as in the case of

loss or theft.

A payment card can be assigned to the following:

- One or more business partners
- One customer

You define payment cards in Customizing under ► **Cross-Application Components** ► **Payment Cards** ►.

Tax Numbers

An identification number issued by the tax authorities to taxpayers.

You may need to quote your business partners' tax numbers in business correspondence with them (such as in invoices), or when you file reports with the tax authorities. The exact requirements vary from country to country.

You define the different types (categories) of tax numbers you require in Customizing for **Cross-Application Components**, under ► **SAP Business Partner** ► **Business Partner** ► **Basic Settings** ► **Tax Numbers** ► **Maintain Tax Number Categories** ►.

Identification Numbers

An alphanumeric key provided by external sources that can be used as an alternative to the business partner number to identify a business partner.

To distinguish the business partner as clearly as possible, you can create as many identification numbers as you require.

You define identification types and categories in Customizing for **Cross-Application Components**, under ► **SAP Business Partner** ► **Business Partner** ► **Basic Settings** ► **Identification Numbers** ► **Define Identification Categories** ► **Define Identification Types**. For more information, see the Customizing documentation **Identification Number Concept**.

You also have the option of using data cleansing services provided by a business information provider (BIP) that assigns BIP identification numbers in the context of data comparison. For more information, see the documentation of the reports BUPA_BIP_FILE_EXPORT and BUPA_BIP_FILE_IMPORT.

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Account Classification](#)

[Industries](#)

[Status and Life Cycle Data](#)

[Sales Area Data](#)

[Business Hours and Business Appointments](#)

[Additional Data](#)

SEPA Mandates

Definition

For each bank account, you can enter a SEPA mandate. This mandate is an authorization issued by the business partner (as debtor) for payment to be collected by you (as creditor) in the form of a direct debit. These authorizations are required by the

SEPA (Single Euro Payment Area) initiative to harmonize payments in the EU.

Use

SEPA mandates can be created for the following Financial Accounting (FI) components:

- **Contract Accounts Receivable and Payable** (FI-CA)
- **Accounts Receivable** (FI-AR)

Prerequisites

Settings for SEPA mandates must be defined in the corresponding FI-AR and FI-CA Customizing activities.

For **Accounts Receivable**, partners must be created using the roles **Customer** and **FI Customer**. Moreover, you must assign a company code to customers.

For **Contract Accounts Receivable and Payable**, partners are created using the role **Contract Account**.

Data

- Mandate ID

The mandate ID is unique.

If you want an ID to be assigned automatically, leave the **Mandate ID** field empty. An ID is assigned when you navigate away from the mandate by clicking **Back**.

- IBAN

To create a mandate, you must enter an IBAN.

- Contract or business agreement (not relevant for integration with FI-AR)

You can specify an FI-CA contract for which the mandate applies. Existing contracts in FI-CA are available for selection.

- Recipient (of mandate)

Recipient data is derived from Financial Accounting.

Features

- Printing

Mandate forms can be printed locally or sent to the print queue of FI-CA. The language of the form is the language that is set in the account details.

- Mandate versions

If the status or IBAN of a mandate is changed, a new version of the mandate is created. Older versions remain in the database for reference.

- Authorization checks

Authorization checks that are active in FI-CA or FI-AR are also taken into account in Service when a user edits SEPA mandates for an account. In some cases (dependent on the way the authorizations are defined), not all mandates are visible to the business user. This is the case, for example, if the user does not have authorization for the company code to which the mandate recipient is assigned. However, all mandates are accessible to users with the appropriate authorization in the **Mandates** assignment block. You can display this assignment block by configuring the **Account** page.

Account Classification

Use

Account classification enables you to classify accounts using freely-definable criteria. This is particularly useful for large companies where, for example, you want to classify different business units based on different criteria.

❖ Example

The attribute “Role” has one value for a certain combination of country, sales organization, and business unit, and a different value for another combination of the same criteria. A company could be a customer in the business unit “Automation”, but a competitor in the business unit “Mobile Phones”. Similarly, a customer could have the ranking “Gold Customer” in a certain country, and the ranking “Silver Customer” in another country.

The account classification is available as a separate assignment block on the account overview page and as a search criterion. The account classification data is available in addition to the standard account data. This means that the roles in this assignment block are independent of those in the [Roles](#) assignment block, and the rating is independent of the overall ranking of the account.

You can combine the required criteria flexibly. Each classification category consists of a maximum of five criteria, and any number of attributes.

A classification category, such as account management, enables you to define the business scope in which the account classification is used. Predefined criteria and attributes can be assigned to the category, or you can define your own.

i Note

Once data has been created for the combinations, the combination of criteria and attribute cannot be changed.

Example

The following table shows the classification of an account using the criteria sales organization, distribution channel, division, and country, and the attributes role and rating:

Corporate Account: Smith – Account Classification					
Sales Organization	Distribution Channel	Division	Country	Attribute	Value
2000	Direct Sales	Vehicles		Role	Partner
1040	Service	High Tech		Role	Competitor
2500	Sold for Resale		Germany	Rating	Silver
4520	Direct Sales		France	Rating	Gold

Prerequisites

You define account classification in Customizing for [Service](#) under [Master Data](#) > [Business Partner](#) > [Define Account Classification](#) > .

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Industries](#)

[Status and Life Cycle Data](#)

[Sales Area Data](#)

[Business Hours and Business Appointments](#)

[Additional Data](#)

Industries

Use

Industries enable you to categorize business partners (companies and organizations) according to their activities, for example, plant engineering, construction, mechanical engineering, chemicals, or pharmaceuticals. The assignment of business partners to industries provides you with an additional attribute for identifying business partners.

You can represent the conditions that apply to specific countries or industries in an industry system. Defining industry systems according to different criteria also enables you to perform reporting for your business partner data.

Prerequisites

You make settings for industries in Customizing for **Cross-Application Components**, under **SAP Business Partner** **Business Partner** **Organizations** **Maintain Industry Systems and Industries**.

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Account Classification](#)

[Status and Life Cycle Data](#)

[Sales Area Data](#)

[Business Hours and Business Appointments](#)

[Additional Data](#)

Status and Life Cycle Data

Definition

Various characteristics indicating the status of a business partner.

Use

Status

Status information indicates whether the following apply for a business partner:

- Can be contacted
- Is to be archived

This means that the business partner can be archived during the next archiving run, provided the archiving check shows that there are no active business transactions using this business partner data. If this is not the case, archiving is prevented even if the archiving indicator is set.

If the check shows that the business partner can be archived, it is assigned the status **Logically Deleted** and can no longer be used in business processes nor changed manually or by BAPIs. The next archiving run writes the record to the archive and physically deletes it.

- Is blocked centrally

In this case, certain activities cannot be performed.

- Is not released for business processes because its data still needs to be checked
- Has been blocked for the following processes:
 - Business transactions (with blocking reasons such as no sales)
 - Delivery (with blocking reasons such as credit limit, change in quantity, bottleneck)
 - Billing (with blocking reasons such as check credit or debit memo, check terms of payment, prices incomplete)

i Note

You can set the blocks company-wide or in selected sales areas. The sales area-dependent blocks are valid in addition to the central block.

You define blocking reasons in Customizing for **Service** under ► **Master Data** ► **Business Partner** ► **Status Management** ► **Define Blocking Reasons** ►.

- Active or inactive *

You define the criteria according to which accounts and contacts are considered inactive or active from a combination of the above statuses. You do this in Customizing for **Service** under ► **Master Data** ► **Business Partner** ► **Configure Business Partner** ►.

You can use the **Active** and **Inactive** statuses as a search criteria for accounts and contacts, to help business users find the relevant accounts or contacts faster.

Life Cycle

You can record the different stages of an account as it progresses through its life cycle. Each life cycle stage represents the status of the business relationship, for example, an account might start off as a potential, move on to an intermediate stage as a prospect, before finally becoming a customer.

A life cycle stage is technically a business partner role. A life cycle is technically a role exclusion group to which stages are assigned as roles. These roles are mutually exclusive, meaning that only one business partner role in an exclusion group can be assigned to an account at any time. Assigning a role which belongs to a role exclusion group is therefore the same as assigning a unique status.

You can define sequence of statuses to prevent an account from omitting a stage or returning to a previous stage. You do this by defining transitions between the roles contained in a role exclusion group, thus defining the order in which the life cycle stages occur.

You define a life cycle, stages, and stage sequences in Customizing. You also have the following options:

- Screen control: Using a Business Add-In (BAI), you can use the life cycle stage as a criterion for hiding or displaying certain assignment blocks.
- Field modification: Using a BAI, you can influence the fields in the account details based on the life cycle stage, for example, to display additional fields, or make fields mandatory or optional.
- Initial life cycle stage: You can default the initial life cycle stage when accounts are created.
- Search criterion: You can search for accounts by life cycle stage.

For more information, see the documentation in Customizing for [Service](#) , under [Master Data](#) > [Business Partner](#) > [Define Basic Settings for Account Life Cycle](#) .

i Note

The account life cycle is delivered as hidden function and has to be activated in the configuration tool.

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Account Classification](#)

[Industries](#)

[Sales Area Data](#)

[Business Hours and Business Appointments](#)

[Additional Data](#)

Sales Area Data

Definition

Data belonging to a specific sales area. This data is processed in business transactions.

Use

Sales

In this data set, you can define customer groups for pricing and statistical purposes (for example, wholesale or retail trade).

Similarly, you can group business partners for the payment guarantee procedure.

Organization

This data is used for information purposes. The entries must correspond to the sales area selected:

- Sales office. This is a location such as branch office responsible for the sales and distribution of certain products and services in a particular geographical area. Purchasing groups can be formed within a sales office.
- Sales group. A group of sales employees that is responsible for the sales and distribution of specific products and services.
- District

Shipping

In this data set, you enter default data for the processing of business transactions.

You can specify the following:

- The appropriate Incoterms so that goods are dispatched correctly. More details can be entered in the second Incoterms field.
- Delivery priority and shipping conditions.
- Whether partial deliveries are possible. The **Delivery Control Item** field controls partial deliveries at item level and allows you to choose between different partial delivery agreements
- Whether business transactions can be combined during delivery creation
- Whether unlimited overdelivery is allowed
- If unlimited tolerance is not indicated, you can specify percentage amounts (in relation to the amount ordered) that are acceptable as overdelivery

Billing

In this data set, you enter the following default data for billing:

- The customer pricing procedure, which defines which pricing procedure should be used
- The exchange rate type and the currency in which the settlement is carried out with the customer or the vendor
- Terms of payment in the form of cash discount percentage rates and payment deadlines. The key is used in orders, purchase orders and invoices
- The customer price group, the group of customers for whom the same pricing requirements apply
- The price list type. This puts together price lists with the same features
- The customer group (specific customer group for pricing and statistical purposes)
- The account assignment group. It is used by the system to create an accounting document from a billing document for determining the sales account or sales reduction account
- The currency

Customer's currency for a sales area. This currency will be used to settle the customer's charges for the given sales organization.

- The rebate relevance

Using a checkbox, you can indicate whether a customer may be granted a rebate.

Blocking Reasons

Blocking reasons for transactions, delivery, and billing

Consumers

Consumers are accounts that belong to a specific account group. The account group is assigned by choosing the dedicated business partner grouping for consumers, when the account is created in Service.

You can display the sales area data of a consumer account and distinguish whether referenced data is used or data specific to the consumer account.

You can remove the referencing and create a separate consumer data set.

Partner Functions

You can assign business partners to each other using the partner functions that define the rights and responsibilities of each business partner in business transactions. You can use partner functions if you have created sales area data.

Note that the partner functions that you use in Service are directly mapped to partner functions in Sales.

Tax Indicators

A combination of country, tax classification, and tax category

Integration

Sales areas are defined in Organizational Management.

To use your internal organizational units in business transactions, they must be available as business partners. You can make settings for the integration of organizational management with business partners in Customizing for **Service** by choosing **► Master Data ► Business Partner ► Integration Business Partner - Organizational Management ►**.

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Account Classification](#)

[Industries](#)

[Status and Life Cycle Data](#)

[Business Hours and Business Appointments](#)

[Additional Data](#)

Business Hours and Business Appointments

Definition

Information that is required for optimizing contact with your business partners.

Use

Using business hours and business appointments, you can record the best times to contact your business partners. Business hours indicate when the party concerned is open for contact, and provide the basis for scheduling your business appointments.

Business appointments can be used to generate call lists.

Business Appointments

Types

Business appointments indicate when the following types of appointment have been agreed with the party concerned:

- Telephone calls
- Visits
- Deliveries

Use

Business appointments can be created for accounts.

Structure

Business appointments consist of the following information:

- Type of rule and period for which it applies, exceptions (such as not on non-working days), and the calendar on which the data is based.
- The type of recurrence, which in turn determines what data you can specify. A weekly recurrence, for example, offers a more complex set of rules than a monthly recurrence.

Unlike business hours, you can create more than one complex rule for each rule type, each with its own validity.

Customizing Options

- You define the types of appointment rules and necessary settings in Customizing for [Service](#), under [Master Data](#) [Business Partner](#) [Basic Settings](#) [Define Time-Dependent Appointment Rule Categories](#).

❖ Example

Every year, you require a time-dependent appointment rule that is valid for a fortnight after new year. You can calculate the annual date for this appointment rule using a function module.

- You define the periods for business appointments in the above section of Customizing, in the activity [Define Periods for Appointment Rules](#).

Business Hours

For more information, search for *Business Hours* in the product assistance on SAP Help Portal.

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Account Classification](#)

[Industries](#)

[Status and Life Cycle Data](#)

[Sales Area Data](#)

[Additional Data](#)

Additional Data

Definition

Additional data is integrated for business partners. The following table lists examples of assignment blocks that might be of interest to you.

All assignment blocks available for an account, contact, or employee can be found in the UI configuration of the respective overview pages. For more information about UI configuration, see [UI Configuration Tool](#).

Use

Additional Data for Business Partners

Assignment Block	Description
Contacts	Displays current contacts of the business partner. You can also display invalid contacts by using the assignment block Invalid Contacts .
Relationships	Displays the relationships of the business partner, except for contact relationships.
Interaction History	Displays a complete history of all interactions with the business partner.
Attachments	You can assign different types of documents to a business partner. For more information, see CRM Content Management (Legacy). You assign templates for content management in Customizing for Service, under ►Master Data ► Business Partner ► Basic Settings ► Assign Templates for Content Management Folder ►.

Parent topic: [Data](#)

Related Information

[Address and Communication Data](#)

[Bank and Tax Data](#)

[Account Classification](#)

[Industries](#)

[Status and Life Cycle Data](#)

[Sales Area Data](#)

[Business Hours and Business Appointments](#)

Configurable Data Retrieval

Use

You can use configurable data retrieval to limit the data retrieved in assignment blocks, based on selection parameters defined in the UI configuration tool.

Integration

Configurable data retrieval can be enabled for the following assignment blocks. For assignment blocks, the [Data Retrieval Parameters](#) area is available in the UI configuration tool. For more information about use cases, see the application specific documentation.

Features

- For assignment blocks that have been set up for configurable data retrieval, you can define which data records are selected and displayed by defining selection parameters as part of the user interface (UI) configuration.

As a result, only specific data is displayed in the assignment block.

- The system performance can be improved because of a reduced amount of data retrieved from the database. Whether the system performance is improved or not depends on how the configurable data retrieval has been implemented for a certain assignment block.
- You can change the selection parameters at any time, altering the data selection presented to the business user.
- You can set selection parameters for each view usage (business role), because the selection parameters are specified as part of the view configuration.
- Report [Views with Configurable Data Retrieval Option](#) (BSP_DLC_CONF_DAT_RETRIEV_USAGE) provides you with a list of all views that support configurable data retrieval.
- You can use a Business Add-In to define additional data retrieval parameters.

Functions

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Search Techniques

In the WebClient UI, further search functions are available specifically for business partner searches. These are available in addition to the generally available search functions.

Fuzzy Search

You can activate a fuzzy search for accounts, contacts, and employees to provide search results when a user does not know the precise search string. For more information, see [Fuzzy Search](#).

Wildcard Search

You can improve a wildcard search for accounts and contacts in WebClient UI. By default, this search function is available only for the following communication data:

- Telephone number (all types)
- E-mail address

You can enter an asterisk (*) at the beginning or the end of the search string. For e-mail, you can also put the asterisk within the search string.

If you want to support wildcard searches for other attributes, you can create a customer enhancement of the relevant SAP-defined classes.

For more information, see the documentation for the required Customizing activity in Customizing for [Service](#), under [►Master Data ► Business Partner ► Search ► Activate Wildcard Search for Accounts and Contacts ►](#)..

Simple Search

You can activate simple search to enable business users to search for master data by entering one or more search strings in a single search field.

For more information, see the required Customizing activity in Customizing for [Service](#), under [►UI Framework ► Enterprise Search Integration ► Define Availability of Simple Search in Business Object Search ►](#). The simple search is based on Enterprise Search.

Parent topic: [Functions](#)

Related Information

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Fuzzy Search

Use

For account, contact, and employee searches, fuzzy search provides search results based on similar search strings.

Prerequisites

To implement fuzzy search, you use one of the following services, depending on your requirements:

- Partner software products that offer extended fuzzy search capabilities (see SAP Note [176559](#)  for information about certified partners)
- SAP HANA-based fuzzy search and duplicate check (see SAP Notes [2577060](#)  and [2577056](#) )

You activate fuzzy search and define the percentage match threshold in Customizing. For more information, see the documentation of the Customizing activity under ► [Service](#) ► [Master Data](#) ► [Business Partner](#) ► [Search](#) ► [Activate and Configure Fuzzy Search](#) .

Features

When fuzzy search is activated, the user can choose between the options [Regular Search](#) and [Fuzzy Search](#) in the search screens. This setting is saved even when the user logs off. Users can have different settings for account, contact, and employee searches.

The percentage match can be shown for each search result (users must personalize the search result list to display the percentage match ([% Match](#)) field).

The results list for a fuzzy search is automatically sorted by percentage match (in descending order), then by [Name1 / Last Name](#) (in ascending order), then by [Name 2 / First Name](#) (in ascending order).

Fact Sheets

Use

A fact sheet provides you with a condensed overview of an account, based on several sources such as master data, statistical data, and transaction data. Fact sheets enable you to see quickly and easily the most important details of your key customers. Using fact sheets, you can retrieve essential information quickly, for example, when interacting with customers on the phone or preparing a sales meeting.

Prerequisites

A preconfigured fact sheet is delivered and can be changed if necessary::

[Fact Sheet](#)

[Configuring the Fact Sheet.](#)

For more information about customizing the PDF version, see SAP Note [1040229](#) .

Features

Fact sheets can be online or in PDF format. Multiple PDF fact sheets can be assigned to an account, but only one online fact sheet.

Fact sheets are available on the [Account](#) page (by choosing [More...](#) at the top of the overview page).

Online Fact Sheet

The online fact sheet offers some assignment blocks available on the overview page and, in addition, some assignment blocks developed for the fact sheet.

Standard personalization options are available from the online fact sheet page, enabling you to select which assignment blocks and columns are displayed.

PDF Fact Sheet

The PDF fact sheet has a different content to the online version.

You cannot personalize the PDF fact sheet: The assignment blocks available are determined by the role to which the fact sheet is assigned (the [Sales Professional](#) role in the standard delivery).

A PDF version can be created with up-to-date data. Once it has been generated, it can be saved to your local disk or printed in the normal manner.

When creating an activity for an account, you can generate a PDF version and attach it to the activity.

Assignment Blocks

The following assignment blocks are available for the online fact sheet:

Assignment Block	Description
Account Information	
Sales Organization Selector	Fields for selecting the sales organization, distribution channel, and division.
Account Billing Data	By sales area, the information includes the pricing procedure, exchange rate, currency, payment terms, price group, price list, customer group, and billing plan.
Account Shipping Data	By sales area, the information includes the Incoterms, delivery priority, shipping conditions, delivery control, order combination, unlimited tolerance status, underdelivery tolerance, and overdelivery tolerance.
Partner Functions	Contains all the business partners who have been given a partner function for the account concerned.
Credit Information	Displays credit information for the selected account. The information is derived from an info block in the customer fact sheet.
Last Sales Docs	The last n sales documents for the selected account. This could include sales orders, quotations, or contracts.
Service Information	
Equipment	Displays a list of equipment
Service Orders	Displays a list of service orders

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Automatic Employee Assignment](#)

[Change History](#)

Automatic Employee Assignment

Use

Employees can be assigned to business partners automatically based on a set of rules, which can be freely defined. These rules could, for example, be based on geography, such as country or region, or classification, such as role or industry. They enable you to assign employees with different relationship types, together with the relevant partner functions and sales areas. Similarly, they can be used to replace existing employee relationships with the necessary data.

Prerequisites

Make the necessary settings in Customizing for **Service** by choosing **Master Data** > **Business Partner** > **Rule-Based Assignment of Employees**.

Features

- You set up the rules you require using the rule modeler. The context "Account and Contact Management" is available for this purpose.

For more information about the rule modeler, see [Rule Policies](#) and [Rules](#).

- When assigning employees automatically based on rules, you have two options:
 - You can trigger rule processing directly when working with a business partner. This calls a fixed rule policy, which has already been customized. The proposed employee assignments are created directly and shown in the **Relationships** assignment block. You can accept the assignments by saving your data.

Note that you do not have the option of selecting the relevant rule policy, as is the case in other areas which use the rule modeler, such as lead distribution.

- You can assign employees to a selection of business partners using the report CRM_BUPA_ASSIGN_EMPLOYEE. The report can be scheduled to run as frequently as required and enables you to ensure employee assignments are up-to-date. It does the following:
 - Deletes existing relationships with the relevant categories, including partner function and sales area, where only one assignment is allowed.
 - Creates new relationships, including partner function and sales area, based on the list returned by the rule engine. The **Standard** indicator is set where applicable.

For more information, see the report documentation.

- You also have the option of specifically excluding business partners from the assignment process. The **Excluded** indicator is delivered as a hidden field, which can be activated for specific user roles, such as the administrator.

- A monitoring option is available to ensure the assignment process runs smoothly. This is run with transaction SLG1 and the object CRM_BP_ASS. The log shows all messages for the related assignment process.

Activities

To define rules for rule-based employee assignment, create a rule policy on the [Rule Policy](#) page. The rule engine is used in several areas. The context for employee assignment is "Account and Contact Management".

Create a policy variant and the rules you require.

The rule folder contains the different rules. The details of the rules are shown on the right, together with the conditions that are evaluated and the actions that are taken. The preview pane describes textually the conditions and actions.

Check and release the rule.

Example

For business partners in the United States and belonging to the industry "Oil and Gas", you want to assign the employee Pam Smith as standard employee responsible, and Mark Jones as additional employee responsible.

You define the rules as follows:

You select different attributes to create the condition. The condition evaluates whether the business partner is from the United States and is assigned to the industry "Oil and Gas".

Conditions

Match	Operator	Attribute	Value
If	Country	Equals	US
and	Industry	Equals	Oil and Gas

Within the actions, you decide which type of action is to be performed, for example, assign relationship by employee ID or assign partner function by employee ID, and make the settings for this action.

In this example, two actions are executed:

1. Assign employee 551010, Pam Smith, as standard employee.
2. Assign employee 415534, Mark Jones, as an additional employee.

Actions

Action	Name	Value	Description
	Actions/Parameters		
X	Assign Relationship by Employee ID		
	Relationship Type	Is the Employee Responsible For	Is the Employee Responsible For
	Assign Business Partner ID	551010	Pam Smith
	Is Standard for this Relationship	Yes	

Action	Name	Value	Description
	Execution Behavior	Continue (even if partner(s) found)	Continue (even if partner(s) found)
X	Assign Relationship by Employee ID		
	Relationship Type	Is the Employee Responsible For	Is the Employee Responsible For
	Assign Business Partner ID	415534	Mark Jones
	Is Standard for this Relationship	No	
	Execution Behavior	Stop after execution if partner(s) found	Stop after execution if partner(s) found

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Change History

Use

The change history enables you to see what changes have been made to your business partner data. This includes changes to the general data and other data such as roles, addresses, status, bank details, payment cards, identification numbers, industries, customer sales data, and relationships.

The change history is available on the **Account**, **Contact**, and **Employee** pages and provides the following information:

- User who made the change with date and time
- Technical name of the table to which the change applies and the relevant field
- Old value and new value
- Table key

This is the technical table key. For changes to sales area data, for example, the table key gives the sales organization. In the case of bank details, the key identifies each separate set of bank details for an account:

Example

ID	Bank Name	Account Number
001	Deutsche Bank Hamburg	1234567
GIRO	National Westminster Bank	1234568

The history is sorted chronologically, with the most recent change shown first.

You also have the option of using a report to display the change history for several business partners at a time, for a selected period and specified selection criteria. Run the report BUSCHDOC, and, if required, the report BUPSELG5 or BUPSELG0 beforehand, which generate the selection criteria for the report BUSCHDOC.

i Note

A historical view of the data (**History Data**) is available for both addresses and bank details. This should not be confused with the change history.

The **History Data** option provided for addresses and bank details allows you to select a key date in the past and view the data as it was on that date. Unlike the change history, it does not track and show the changes that have been made to the data.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Time Dependency

Use

Certain business partner data is time-dependent, meaning that it can be created with validity periods. This includes the following data:

- Roles
- Addresses and their assignment to address types
- Bank details

- Payment cards
- Relationships, including contact person relationships
- Identification numbers (delivered hidden)

Prerequisites

You have activated time dependency for the relevant data in Customizing for [Cross-Application Components](#) under  **SAP Business Partner**  [Activation Switch for Functions](#) . For more information, see note [810634](#) .

Features

The data listed above is part of the normal data exchange of business partner data. However, due to the time dependency of this data, this can result in problems when the business partner data is exchanged with other applications or systems that do not support time dependency or cannot process time-dependent data. This applies in particular to bank, address, and contact person data.

The report BUPTDTRANSMIT enables you to distribute time-dependent data to other applications. The report should therefore be scheduled to run on a regular basis.

Future Validity

When business partner data is saved, those data records whose validity falls in the future are saved to a separate table, BUT_TDTRANS. This data is not initially distributed to applications that do not support time dependency.

When the validity comes into effect, however, the report BUPTDTRANSMIT can be used to distribute all entries from the table BUT_TDTRANS that are valid on the current date.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Duplicate Check for Accounts and Contacts

Use

You can implement a check that identifies potentially duplicate accounts or contacts during creation or editing and notifies the user. The user can decide whether the new account or contact is required or is in fact a duplicate of an existing account or contact. Duplicate accounts can be discarded or merged with another account.

You can use the following solutions to implement a duplicate check:

- Partner software products that offer extended capabilities for duplicate checks and fuzzy search if available (see SAP Note [176559](#)  for information about certified partners)
- Search capabilities of SAP HANA database (for more information, see SAP Note [2577060](#)  and [2577056](#) )

Prerequisites

For information about implementing and configuring the duplicate check, see Customizing for **Service**, under **►Master Data►Business Partner►Activate and Configure Duplicate Check►**.

Features

The duplicate check can be implemented for accounts only, contacts only, or for both.

The duplicate check uses the interface of the SAP NetWeaver Business Address Services. For more information, search for *Duplicate Check* in the relevant version of [SAP NetWeaver](#) on SAP Help Portal.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Data Cleansing

Use

You can merge duplicate records for accounts or employees into a single record and archive redundant records, ensuring that your data is as consistent as possible. Data records are merged in a data cleansing case.

To prevent creation of duplicate accounts, you can activate a duplicate check (see [Duplicate Check for Accounts and Contacts](#)) that informs users when they create or edit an account that is potentially a duplicate.

Prerequisites

The data cleansing function is delivered with default Customizing settings that determine which data is automatically merged and which data is displayed for selection. You can change these settings to meet your requirements. Furthermore, you can implement customer-specific checks that run before data is merged.

You adapt these settings in Customizing for [Service](#) under [Master Data](#) [Business Partner](#) [Data Cleansing](#).

Merging of business partners is performed in a background job. Action BP_REALIGN has been defined for action profile BP_TASK in Customizing for [Service](#) under [Basic Functions](#) [Actions](#) [Actions in Transaction](#) [Change Actions and Conditions](#) [Define Action Profiles and Actions](#).

Features

- You can create cleansing cases as follows when processing accounts and employees:
 - From the search result list

You can select the accounts or employees that you want to merge and create a cleansing case.
 - When creating or editing an account or employee

If the duplicate check is activated for accounts (see [Duplicate Check for Accounts and Contacts](#)), a dialog box appears when a potentially duplicate account is identified. The percentage match of the duplicate is shown.
- You can process cleansing cases immediately after creation or at a later point in time.
- When creating a cleansing case, you provide the following details, which can serve as search criteria for cleansing cases:
 - The person who is to process the data cleansing case.
 - A priority, indicating to the processor how soon the case should be processed.
 - A brief note, if necessary, for the person responsible about the data cleansing case.
- You can merge more than two records into a single record.
- Merging of records takes place as a schedule job in the background.
- Redundant duplicate records are automatically marked for archiving.

More Information

For information about the procedure of merging data, see [Merging Duplicate Accounts and Employees](#).

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

Merging Duplicate Accounts and Employees

Context

You merge duplicate accounts and employees as described below.

Procedure

1. From the search result list for accounts or employees, choose [Merge Accounts](#) or [Merge Employees](#).

Alternatively, a duplicate check can determine that an account is possibly duplicate.

2. Click [Merge Now](#) to begin the process of merging data immediately or click [Merge Later](#) to process a cleansing case later.
3. In the list of records within a cleansing case, set the status [Master](#) for the record that you want to retain.

By default, one record is defined as the master record, but you can change this setting.

All records with the status [Source](#) are automatically marked for archiving.

If necessary, set the status [Rejected](#) for any unwanted records. These records are no longer available for comparison within the case.

4. Under [Compare Accounts](#) / [Compare Employees](#), enter the ID of a record to compare it with the master record.

You can only compare two records at a time (master and source). The comparison shows only the data that differs between the selected records, and where a decision is therefore required as to which data should be retained.

5. Select the individual pieces of data that you want to retain, either from the master or source record.

All objects in the master record are selected by default, except for [Main Address](#), since the user must decide which address to retain.

General data, such as [Name](#), is unique and can only exist once.

i Note

Depending on the Customizing settings, not all data is visible in the [Referenced Data](#) assignment block. Data that is not visible is merged automatically, whereby data from the master record is retained in case of conflicts.

6. Click [Confirm](#) to confirm the changes you have made before continuing, or click [Cancel](#) to reverse your changes.

i Note

[Cancel](#) simply reverses all changes. If you want to close the cleansing case, click [Reject](#).

7. Enter a date and time for the background merge.
8. Click [Start](#) to start the merge at the specified time.

Results

The merge runs as a background job. You can find the relevant task for the merge on the [Search: Activities](#) page. If the merge has not been processed correctly, you can trigger the relevant action from within the task.

You can see the actions that took place during the merge in the [Application Log File](#) area.

Records marked for archiving are archived by the next archiving run.

Task overview: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Authorization Management

You can use the following authorization objects to control the authorizations for maintaining business partner data:

Authorization objects for the business partner:

- B_BUPA_GRP
- B_BUPA_RLT

Authorization objects for relationships:

- B_BUPR_BZT

Authorization object for customer master data:

- V_KNA1_VKO

In addition, you can assign an authorization group to a business partner in the dialog. The authorization group controls which users may maintain data for this business partner.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

Archiving Business Partners

Use

You can archive business partner data that is no longer required, and subsequently delete it from the database. In this way the volume of data is reduced and performance improved.

The archiving object for business partners is CA_BUPA.

Prerequisites

- If a business partner is a customer, you have to archive all **FI** data using archiving object FI_ACCRECV before you can archive the business partner. This principle also applies to vendors (archiving object FI_ACCPAYB) and contract accounts (archiving object FI_FICA) accordingly. For more information, search for FI_ACCRECV in the product assistance on SAP Help Portal.
- You have activated archiving. For more information about the steps required, see [Activating the Archiving Functionality](#).

For user-defined data, you must also make the appropriate settings in transaction BUS7 for Business Data Toolset (BDT) events:

- User-defined checks (event ARCH1)
- Write routines for user-defined fields or tables (event ARCH3)
- Delete routines for user-defined fields or tables (event ARCH4)

Process

The archiving and deletion of business partner data is performed in the following asynchronous steps. These steps can be scheduled as background processes in **Archive Administration** (transaction SARA). For detailed information about the archiving steps, see [Performing the Archiving](#).

1. Flag business partners as relevant for archiving

You can flag business partners for archiving as follows:

- In the WebClient UI, by setting the **To Be Archived** indicator
- Using a BAPI (method BusinessPartner . Change)
- By setting the archiving flag with the transaction BUPA_PRE_DA

→ Recommendation

Do not edit a business partner that is flagged for archiving.

For a business partner to be archived, its archiving flag must have been set for a minimum number of days as defined in archiving Customizing. The period can be customized with transaction DA_CONTROL (or in transaction SARA, by entering the ID of the archiving object and choosing **Customizing > Check and Delete**). The relevant field is **Resubmission Interval in Days**.

2. Run usage check and lock business partners for archiving

Only those business partners that are no longer used by any application and have no reference to other objects can be archived and subsequently deleted from the database. The status of these business partners is changed by the usage check to **Archivable**. The usage check is dependent on the selected archiving object. User-defined checks can also be implemented (ARCH1).

When a business partner is in the process of being archived (and has the system status **Archivable**), you can no longer edit it.

3. Write data to the archive

The business partner data with the status **Archivable** is written to an archive file. There is no status change in the business partner.

4. Compare and delete archived data

The system compares the data in the local archive with the data in the local database. All business partners contained in the specified archive file are selected. The system then deletes these business partners including the associated dependent data from the database.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Constraints

The following restrictions apply to archiving business partners:

- The reference customer may not be archived.
- A business partner may not be archived if there are still active business transactions.

The business transactions concerned must first be archived, before the relevant business partners can be archived.

- A business partner may not be archived if it is still actively used in the organizational data.

These checks are defined in the form of event modules of the Business Data Toolset (BDT) (event ARCH1). You have the option of including other check modules at this point without making modifications.

Activating the Archiving Functionality

Purpose

Archiving must first be activated. To do so, you need to carry out the following steps to be able to archive business partner data:

1. Adapt the Name and Path of the Archive File (Mandatory)

Before you carry out archiving you must adapt the definition of the archive file to your system landscape.

To adjust the definition of the archive file CA_BUPA, carry out the following steps:

1. In the [Archive Administration](#) (transaction SARA), select the archiving object CA_BUPA.
2. Choose [Customizing](#).
3. In the screen [Data Archiving Customizing](#), choose [Basis Customizing](#) > [Cross-Client File Names/Paths](#).
4. Enter data as required.

For more information, search for *Defining Logical Path and File Names* in the product assistance on SAP Help Portal.

i Note

The archive files for the archiving object CA_BUPA are created with the logical file name `ARCHIVE_DATA_FILE` in the logical path `ARCHIVE_GLOBAL_PATH`.

2. Adapt the Runtime Settings for the Archiving Object CA_BUPA (Mandatory)

Before you carry out archiving, you must check the runtime settings for the archiving object CA_BUPA and adapt them to your system requirements. Check in particular the settings for [Logical File Names](#), since it is specified here where the data will be archived.

To check the technical data of the archiving object CA_BUPA, carry out the following steps:

1. Start transaction AOBJ and select the archiving object CA_BUPA.
2. Choose [Customizing Settings](#).
3. Check the system settings for [Logical File Names](#).
4. Check the system setting for [Archive File Size](#).
5. Check the settings for [Settings for Delete Program](#).
6. Check the system settings for [Place File in Storage System](#).
7. Include your own tables in the structure definition, if required.
8. When you have adjusted the data, choose [Save](#).

3. Create Program Variants for the Program CRM_BUPA_DA_SELECTIONS (Optional)

You need to create a variant for the program CRM_BUPA_DA_SELECTIONS to be able to start the check program in the background. You can adapt the variant as appropriate so that you can restrict archiving to certain business partners.

To create a program variant, carry out the following steps:

1. In the **Archive Administration** (transaction SARA), select the archiving object CA_BUPA.
2. Choose **Customizing**.
3. In the screen **Data Archiving Customizing**, choose **Archiving Object-Specific Customizing > Check and Delete**.
4. In the screen **Customizing for Cross- Archiving-Object Programs**, choose **Create Variant**.
5. In the screen **ABAP: Variants –Initial Screen**, enter a variant name and choose **Create**.
6. In the screen **Edit Variants: Variant <Variant Name>**, enter data as required.
7. To specify attributes for these variants, choose **Attributes**.
8. To save the attributes, choose **Save**.
9. To set a variant as active for archiving, in the screen **Customizing for Cross- Archiving-Object Check/Delete**, choose this variant in the field **Active Variant**.
10. Choose **Save**.

4. Activate Archiving Information Structure CA_BUPA_ALL (Optional)

The archive information structure CA_BUPA_ALL is delivered inactive. The information structure must be activated before the first archive read.

The information structure can (if active) be automatically updated during the archiving deletion run and is required for displaying archived business partners through the archive explorer of the SAP Archive Information System.

To activate the archiving information structure, carry out the following steps:

1. Choose archiving administration (transaction SARA).
2. Choose **Goto > Information System**.
3. Choose **Customizing**.
4. In the field **Archive Infostructure**, enter CA_BUPA_ALL.
5. Choose **Archive Infostructure > Activate**.

Performing the Archiving

1. Execute the Usage Check

The system checks all business partners for which the **Archiving Flag (To Be Archived)** indicator has been set. If the check shows that the business partner can be archived, the system sets the status of the business partner to **Archivable**.

To schedule these checks to run in the background, perform the following steps:

1. Start transaction SARA.

2. Enter the archiving object CA_BUPA.
3. Choose **Check/Delete**.
4. Choose the variant you created for report CRM_BUPA_DA_SELECTIONS using the input help. You also have to enter a start date and define a spool parameter. Enter an output device in the spool parameters.
5. Choose **Execute**.
6. You can view the status of the archiving by choosing **Job Overview**.

2. Write Object Data to the Archive

The write program writes the data of all objects that have the status **Archivable** to the archive files defined for the appropriate archiving object.

In the **Archive Administration** (transaction SARA), the system sets the status of the archiving run to **Incomplete**.

1. Start writing data to the archive using the **Archive Administration** (transaction SARA).
2. Enter the archiving object CA_BUPA.
3. Choose **Write**.
4. Choose a variant of the report BUS0BARCH using the input help. You also have to enter a start data and define a spool parameter. Enter an output device in the spool parameters.

i Note

If a variant has not been defined, create a variant of the report BUS0BARCH. Select the business partners to be archived using the selection criteria and assign a short text for the archive.

5. Choose **Execute**.
6. You can view the status of the archiving by choosing **Job Overview**.

3. Delete Objects in the Database

The delete program opens the archive files that the write program previously created and reads them.

i Note

This step is only required if you have not set the flag in Customizing for automatically starting the deletion report with the stated report variant.

1. Start the deletion of data from the database using the **Archive Administration** (transaction SARA).
2. Enter the archiving object CA_BUPA.
3. Choose **Delete**.
4. Enter the archive selection, start date, and the spool parameters. You must enter an output device in the spool parameters. Normally there is the output device LP01 in the system (virtual printer).
5. Choose **Execute**.

The system sets the status of the archiving run to **Complete**.

The business partners archived or removed from the system, as well as the business partners that are still being used and that cannot be archived or deleted, are recorded in a log.

You can call up all the logs for your archiving object directly in the [Archive Administration](#).

i Note

You can delete and archive complete business partner data records only. It is not possible to archive and delete only part of the business partner data.

Monitoring

1. Usage Check

During the usage check, business partners that could not be archived are recorded in the application log. To evaluate these logs, use transaction SLG1 and enter the object BDT_DATAARCHIVING and subobject BUPA. You are advised to also specify the date and time of the usage check.

2. Archive Job

Execute transaction SARA and choose [Goto](#) → [Job Overview](#) to see the status of the jobs generated in SARA for writing or deleting the archive.

3. Archive File

Execute transaction SARA and choose [Goto](#) → [Statistics](#) to display the status of the archive files.

4. Archive Information System

Use the archive information system to display the archive files for business partners. The following prerequisites must be fulfilled to be able to display data in the archive information system:

Check if the archiving information structure CA_BUPA_ALL has already been activated.

Choose the archiving information system (transaction SARI).

Choose [Customizing](#).

In the field [Archive Infostructure](#), enter CA_BUPA_ALL.

Choose [Activate](#).

Check the system message.

Check if index structures were set up for the archive files.

Choose the archiving information system (transaction SARI).

Choose [Status](#).

In the field [Archiving Object](#), enter CA_BUPA.

Choose [Status per Archive](#).

If the structure status is incomplete, select the relevant archive.

Choose [Build Structures](#).

You can execute the creation of the index structure in dialog or in the background.

Blocking and Deletion of Personal Data

Use

Personal data collected in business partner master data can be blocked as soon as business activities for which this data is needed are completed and the residence time for this data has elapsed; after this time, only users who are assigned additional authorizations can display this data. The system determines whether business partner data is still relevant for business activities using the end of purpose check.

For more information, see [Business Partner End of Purpose \(EoP\) Check in Service](#).

After the retention period for data expires, personal data can be destroyed completely so that it can no longer be retrieved. Residence and retention periods must be defined in the customer system.

You can use the SAP Information Lifecycle Management (SAP ILM) component to support the deletion of personal data and to control the deletion and blocking of business partner master data.

For more information, see [Blocking, Unblocking, and Deletion of Personal Data in Service](#).

More Information

Security Guide for SAP S/4HANA Cloud Private Edition or SAP S/4HANA on SAP Help Portal.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Mass Changes](#)

[Deleting Business Partners](#)

Mass Changes

The mass maintenance tool allows you to change data for several business partners in one processing step (transaction MASS or MASSD). You can use the tool, for example, for reassigning Customizing attributes or external key fields (e.g. bank key).

Integration

You can integrate user-defined data into the mass maintenance tool. To do so, you must implement a class and register it in the maintenance view [V_TB053](#).

Methods exist for all application exits of the mass maintenance tool. Make the settings to register table extensions and new application tables in the transaction MASSOBJ.

Features

You can change the following business partner data in mass maintenance:

- General data I (attributes from table BUT000)
- Bank details (attributes from table BUT0BK)
- Identification numbers (attributes from table BUT0ID)
- Industries (attributes from table BUT0IS)
- Roles (attributes from table BUT100)

The changes are carried out using the APIs (Application Programming Interface) for the Business Partner. In addition, authorizations are checked, change documents written and user locks set using the APIs.

You can change address data using the quarterly adjustment provided by the Business Address Services (BAS). For more information, search for *Quarterly Adjustment* in the product assistance on SAP Help Portal.

For more information, search for *Mass Maintenance* in the product assistance on SAP Help Portal.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Deleting Business Partners](#)

Deleting Business Partners

You can delete temporary business partners that are no longer needed, or business partners that were loaded into a system by mistake without archiving these data records beforehand. In this way the volume of data is reduced and performance is improved.

Activities

You can delete business partners from your database in two ways:

One-step procedure

Using the transaction Deletion of Business Partners (BUPA_DEL), you can delete the following business partners from your system:

- BPs that you select using the business partner number
- BPs that have been given a deletion or archiving flag
- BPs that have the system status deletable

Two-step procedure

1. In preparation for the delete operation, you can firstly determine the data records for deletion and set the relevant system status using the transaction Set Deletion or Archiving Flag (BUPA_PRE_DA). For more information, see the report documentation.
2. Following this, you carry out the actual delete operation using the transaction Deletion of Business Partners (BUPA_DEL). To do this, you need to have set the flag deletable as the parameter.

In both cases, the system checks beforehand whether the business partners intended for archiving are still being actively used in the system. These checks are defined in the Business Data Toolset (BDT) event DELE1. You can also define other checks here.

i Note

You can only delete complete business partner data records. It is not possible to delete only part of the business partner data.

Parent topic: [Functions](#)

Related Information

[Search Techniques](#)

[Fact Sheets](#)

[Automatic Employee Assignment](#)

[Change History](#)

[Time Dependency](#)

[Duplicate Check for Accounts and Contacts](#)

[Data Cleansing](#)

[Merging Duplicate Accounts and Employees](#)

[Authorization Management](#)

[Archiving Business Partners](#)

[Blocking and Deletion of Personal Data](#)

[Mass Changes](#)

Products

Use

Products are goods that are the object of a company's business activities. Products can be tangible, such as a PC, or intangible, such as services like PC maintenance.

Product data includes the information required for specific business processes, such as service processes, and other basic data that describes and categorizes products, for example:

- Data of a descriptive nature such as size and weight
- Data with a control function such as the item category group for determine the category for items in business transactions

The product master is the central source of product data. It provides all information on the products that a company purchases and sells. The information is stored in individual product master records. The following table provides an overview of the main product master functionality.

Function		Description
Service Data	Service Profile/Response Profile	The service profile defines the times when a customer is entitled to a service, with specified availability times. The response profile is used to generate date and time intervals for the performance of service tasks. The system calculates the time interval within which a predefined task must be performed with reference to the service profile, to which the response profile is assigned. You can define the profiles on the SAP Easy Access menu under ►Service►Service Processes►Maintain Availability and Response Times►. i Note The profiles are available only for products assigned to a material type with reference material type specified to SERV.
	Work Duration	Specifies the duration of work and its time unit for a product representing the service which is to be performed. It is used as a default value in the service item of a business transaction, and is available as information in subsequent resource planning. It is available for service products with resources. i Note Work duration is available only for products assigned to a material type with reference material type specified to SERV.
Material Data	Item Category Group	Represents the item categories allowed for a product and enables products to be grouped together from a business perspective. During business transaction processing, the system determines the item category based on the item category group specified for the product and the business transaction type, and proposes the item category in the respective document. This determines how the item is processed in the business transaction, such as whether it is subject to the availability check and whether standard pricing or free-of-charge pricing applies. When you enter a product in a service order, for example, with a certain item category group, the system finds the relevant item category based on the item category determination. You can define item category groups in Customizing for Service by choosing ►Transactions►Basic Settings►Define Item Category Groups►. You can make the settings required for item category determination in Customizing for Service by choosing ►Transactions►Basic Settings►Define Item Category Determination►.

Function		Description
	Global Trade Item Number (GTIN)	A 14-digit number which includes various EAN/UCC numbering structures and is used to uniquely identify a product worldwide. EAN/UCC product identification numbers allow a unique identifying GTIN number to be derived in the system.
Unit of Measure		Products can be stored, sold, and delivered in various units of measure.
Description		You can create descriptions for a product for all languages defined in the system.
Note		SAP delivers organization-independent text types and distribution-chain-specific text types. The organization-independent text types include basic data text, inspection text, and internal comment. The distribution-chain-specific text types include sales text. You can define text determination procedures and access sequences in Customizing for Service by choosing  Basic Functions  Text Management  .
Attachment		You can attach a thumbnail to a product to provide a picture of the product in its general data.
Product Archiving		You can use archiving to store product master data that is no longer required and subsequently delete the data physically from the database.
Product Status		Enables you to control the processing of a product based on the statuses assigned to it. By setting a status for a product, you determine its current processing status and the actions that can be subsequently performed, for example, you can block a product from being used by assigning one or both of the following statuses to it: • Cross-distribution-chain product status • Distribution-chain-specific product status
Configurable products		When creating a service product (material type SERV), you can mark it as configurable using the Product is Configurable indicator. You must also set the class assignment for the variant of the configurable product to class type 300 (variants). To create a variant, you must create a configuration profile in which the processing mode is specified as Advanced Variant Configuration . i Note When you create a configurable service product, do not specify a value for the (MARA - SATNR) field for cross plant configurable product.

About This Document

For more information about the product master, search for *Product Master* in the product assistance on SAP Help Portal.

Products in Service Transactions

Definition

Products are central objects in a service transaction, representing the following:

- Services provided (service product: material type group [Service](#))
- Service parts required for the service (service part: product type [Material](#))

- Products sold in relation to a service (sales product: product type **Material**)

You enter each product in a separate item in your service transaction.

The following table shows the types of products that you can enter, depending on the transaction that you are processing. An X indicates that the product can be entered.

Transaction	Service Product	Service Part	Sales Product
Service order (quotation, template)	X	X	X
Service confirmation	X	X	

Product Bundles

Definition

A product bundle is a combination of different products that are sold together as a whole. The bundle components can be tangible products, services, subscription or service contract items.

A product bundle always has a bundle product that ties the bundle components together and is typically composed of various relationships at different hierarchy levels.

Use

Product bundles are designed to meet certain customer requirements and have the following advantages:

- Different products can be combined based on specified rules.
- Product bundles can contain optional components as well as alternative components in component groups.
- Products can be offered as part of a whole but processed in different follow-up business transactions.
- Products can have special prices when offered as part of a product bundle.

i Note

Product type defines certain attributes of a product and has some control functions. You can use products of the product type **BUND** as bundle products to create product bundles. If you want products of other product types to be bundle products, you need to set up the product types in Customizing for **Service** under ► **Master Data** ► **Products** ► **Product Bundles** ► **Define Product Types for Bundle Products** ►.

Authorization Object

You can use the following object to control the access to product bundles.

Authorization Object	Field	Value	Description
CRMS4_PBDL	MTART		Product type
	ACTVT	01 Create	Activity
		02 Change	

Authorization Object	Field	Value	Description
		03 Display	

Archiving

Product bundles are archived when you archive the products that are used as bundle products. For more information about the archiving of products, see *Product Archiving* in [Products](#).

→ Recommendation

Do not use the bundle component in transaction when the product bundle is flagged as **To be Archived**.

Example

Product bundle **Laptop T20 – Summer Sales** could be defined as follows:

- **Laptop T20 – Summer Sales** (bundle product)
 - **Laptop Type T20** (bundle component)
 - **Operating System** (bundle component group), which contains following alternative components:
 - Windows OS
 - Linux
 - **Installation and Setup Service** (bundle component)

Business Rules

Use

Bundle components are combined into product bundles based on relationships. Which components are actually available at runtime and how they are combined is determined by a set of rules that you define. You can use rules to define the following:

- Combination of bundle components allowed in a product bundle, such as a laptop with operating system
- Completeness of the bundle components within the product bundle, for example, some software installation (a service) must have an operating system
- Pricing
- Quantities

Features

Bundle Component Groups

The component structure is a hierarchical table with all bundle components. The sequence of the components created in the product bundle is important, as it is applied at runtime and is the sequence used in the business transactions. The structure can include individual bundle components and component groups.

A bundle component group represents a node or placeholder in the component structure and therefore in the business transactions. Exactly one bundle component within the component group can be selected to replace the placeholder. A component group as such represents a selection of alternatives. The following features are available for bundle component groups:

- The grouping mechanism enables users to select one of the bundle components from the component group, such as the desired operating system.
- You can designate one of the bundle components in the component group as the default, so that it is automatically selected in the product display. For example, a product bundle contains five laptops. The laptop set as the default is preselected in the product bundle details in the Web shop. If multiple components are designated as the default, the highest one is selected.
- You can define bundle component groups in Customizing for Service under ► **Master Data** ► **Products** ► **Product Bundles** ► **Define Component Groups for Product Bundles** ►.

Pricing

You can use pricing rules to offer special pricing for bundle components sold within product bundles, irrespective of the price of the component as defined in the master data. To set the price of a bundle component in the product bundle that you sell, use the pricing reference material of the main item field in condition type PSPB. For example, an installation service is priced differently depending on whether it is sold as a subitem for machine A or a subitem for machine B.

You set up conditions and pricing in Customizing for **Sales and Distribution** under ► **Basic Functions** ► **Pricing** ► **Pricing Control** ►.

The standard delivery contains the condition tables 4CD (Sales Org./Distr. Chl/Mnltm PRM/Material/Dura/Time unit) and 100 (SOrg/DstCh/Material_MainItem/Material), in which the field UPMAT (Pricing Reference Material of Main Item) is used specifically for product bundles.

Business Rule Framework plus (BRFplus)

You can set up complex rules to determine whether bundle components within a product bundle are displayed at runtime. Technically, these are implemented as functions in the Business Rule Framework plus. When a defined function occurs, such as a product changed at main item level, this determines whether the relevant bundle components are available or not.

You can implement and configure business rules using the Business Rule Framework plus (transaction BRF+ or BRFplus) as follows:

- To set up business rules for product bundles, you use the BRFplus application CRMS4_CFG_SC (Solution Configurator).
- To view or maintain the rules available, choose the relevant **Function**. After you click on a function, the details are displayed on the right.

You can prepare input data for specific BRFplus functions by using the BAdI in Customizing for **Customer Management** under ► **Master Data** ► **Products** ► **Product Bundles** ► **BAdI: Prepare Context for BRFplus Function** ►.

For more information about working with business rules, search for *Business Rule Framework plus (BRFplus)* in the relevant version of [SAP NetWeaver](#) on SAP Help Portal.

Conditions

You can enter several conditions into the condition parameters for each bundle component contained in the product bundle. Each of these conditions can be true or false. However, all conditions must be true to make the component available.

Conditions include the following:

- Validity dates

- BRFplus functions
- Prerequisite

For any bundle component, you can specify a product or a bundle group as prerequisite. The specified product or any bundle component within the specified group must be part of the business transaction for the prerequisite to be true. Therefore, the bundle component with such a prerequisite is available.

Generation Quantity

The number specified for the bundle component is the multiplier of the quantity of its bundle product. By default this is 1:1, but it could also be 1:n.

The number you specify can be a fixed value that means the value is multiplied by the quantity of the bundle product. You can use the fixed quantity indicator that means the value is not multiplied. For example:

- 10 ingredient capsules for each coffee machine
 - You order 30 ingredient capsules for 3 coffee machines: multiply by fixed value
- One installation service for each machine
 - You get only one installation service, even if you buy 3 machines: fixed quantity, no multiplication

Creating Product Bundles

1. Create Product Bundles

On the [Product Bundle](#) page, search for the bundle product that you need to create a new product bundle.

2. Assign Bundle Components and Bundle Component Groups

1. Assign individual bundle components or component groups to the component structure. To define bundle component groups, go to Customizing for Service under [Master Data](#) > [Products](#) > [Product Bundles](#) > [Define Component Groups for Product Bundles](#).
2. Set the following indicators if applicable:
 - Optional

Sets the bundle component or component group to optional so that the customer can select or deselect it in the business transactions such as solution quotations. The component or group is not mandatory for the sale of the product bundle.
 - Default

Sets the component to default so that it is automatically selected in the business transactions such as solution quotations. A default, non-optional component or component group is mandatory for the sale of the product bundle.
3. Maintain the necessary rules.

More Information





[Open this video in a new window](#)

[Open this video in a new window](#)

Service Teams

Use

The service team is an organizational unit to which service employees are assigned for performing service tasks. It facilitates the assignment of service employees in service transactions, related analytics, and the search for service transactions.

i Note

Service teams are created from Responsibility Management. You need to have Enterprise Organizational Model enabled to use service teams.

i Note

You cannot create a hierarchy in the structure of a team whose category is **Service**.

Prerequisites

You have enabled the use of service teams in service transactions. For more information, see [Enable the Use of Service Teams](#).

Features

The features work for the following service transactions:

- Service orders
- Service confirmations
- Service quotations
- Service requests

Service Team Determination

A service team is determined based on:

- member functions such as person responsible or executing service employee
- attributes such as country/region and postal code of the ship-to party or sold-to party

Additionally, you can determine service team from custom and standard attributes using the BAdI [Determine Service Team from Attributes](#). You can find the BAdI in Customizing under [Service > Master Data > Service Teams > BAdI: Determine Service Team from Attributes](#). A service team determination rule can also contain conditions based on both attribute and function. Service teams are automatically determined on the header of the specified service transaction. These determined service teams are inherited by the items of the specified service transaction.

Automatic Redetermination of Service Teams

When you change any of the attributes used for service team determination in a service transaction that has already been assigned a service team by the system, an automatic redetermination of the service team is triggered. However, if the origin of the existing service teams is [Manually Entered/Selected](#) or [Corrected Based on Executing Service Employee](#), the redetermination isn't triggered.

If you want to enable the automatic redetermination of service teams, click on the checkbox for [Auto Redetermination](#) when you define a service team profile in Customizing under [Service > Master Data > Service Teams > Define Service Team Profile and Assign Service Team Types](#).

Service Team Proposal

You can use the [Propose Service Team](#) function to manually trigger the service team determination for the items of the specified service transaction.

i Note

- If multiple service teams are determined for the header or items of the specified service transaction, you're prompted to select a service team.
- The determined service teams can be changed. After you change the service teams in the header of the specified service transaction, the changed service teams are inherited by the items of the specified service transaction. However, if the origin of the existing service teams is [Manually Entered/Selected](#) or [Corrected Based on Executing Service Employee](#) in the items of the specified service transaction, the service team is not inherited.

Service Team Correction

When the executing service employee wasn't a member of the assigned service team, the system automatically corrects the service team in the header and item of a service order, a service confirmation, service request, or a service quotation.

i Note

- If the executing service employee belongs to more than one service team, the system doesn't correct the service team automatically. Instead, you're prompted to choose the correct service team.
- If the executing service employee doesn't belong to any service team, the system displays an error message.

Disabling Service Team Determination Using Executing Service Employee

The service team is determined by either the event callback CRMS4_SRVTEAM_FROM_PARTNER_EC or from a determination rule. The event callback with executing service employee is always given preference over any other service team origin. To disable the service team determination by the event callback function, you can select the **Disable Executing Service Employee** checkbox in the Customizing activity **Define Service Team Profile and Assign Service Team Types** found under ► **Service** ► **Master Data** ► **Service Teams** ►

Service Team Origins

You can hover over the **Service Team** field in the header or items of the specified service transaction to see the origins of a service team. The origins of a service team are characterized as follows:

- **Determined Automatically:** The service team was determined automatically based on the country/region and postal code of the ship-to party or sold-to party that you've configured.
- **Inherited:** The service team was inherited from the header or a higher-level item of the specified service transaction.
- **Manually Entered/Selected:** The service team was manually entered or selected from the pop-up window after the service team proposal, service team determination, or service team correction.
- **Corrected Based on Executing Service Employee:** The service team was corrected based on the executing service employee.

Function Classification

You can map the team function that you have defined to the function classification **EXE_SERVICE_EMPLOYEE** or **PERS_RESPONSIBLE** so that the team member with the user-defined team function can be specified to the executing service employee or person responsible.

You can map the team function in Customizing under ► **Cross-Application Components** ► **General Application Functions** ► **Responsibility Management** ► **Teams and Responsibilities** ► **SAP Delivered Team Categories** ► **Classify Functions to Standard Team Category** ►

When you search for an executing service employee in a service transaction, function classification **EXE_SERVICE_EMPLOYEE** is filled in as a default search criteria so that you can find service employees that are specified to executing service employees in the service team. Similarly, when you search for a person responsible in a service transaction, function classification **PERS_RESPONSIBLE** is filled in as a default search criteria so that you can find service employees that are specified to the person responsible in the service team.

Related Information

[Master Data for Service Teams](#)

[Enable the Use of Service Teams](#)

Master Data for Service Teams

You can implement service teams by using the team function in [Responsibility Management](#). In the **Manage Teams and Responsibilities** app, you can create master data or maintain predelivered master data for your service teams by specifying team types of team category Service. The master data of a service team includes country/region, postal code, plant, storage location, cost center, and enterprise service organization.

- The country/region and postal code specify the location for which a service team is responsible. The system uses these two fields to determine appropriate service teams for customers in different countries and regions.
- The plant and storage location specify the default location where a service team member (executing service employee) obtains service parts to perform a service task.
- A cost center of a service team can be used to derive a cost center rate for standard cost estimation of service products in service order items.
- An enterprise service organization is an organizational unit within an enterprise and is responsible for providing services to customers. You can assign multiple service teams to an enterprise service organization.

Related Information

[Service Teams](#)

[Enable the Use of Service Teams](#)

Enable the Use of Service Teams

After creating the master data for your service teams, you can enable the use of service teams in specific service transactions. Perform the following steps to enable the use of service teams:

1. Enable the use of enterprise service organization in Customizing under **Service > Basic Functions > Enterprise Organizational Management > Enable Enterprise Organizational Model**.
2. Define the service team profile in Customizing under **Service > Master Data > Service Teams > Define Service Team Profile and Assign Service Team Types**.
3. Assign your defined service team profile to a specific transaction type in Customizing under **Service > Basic Settings > Define Transaction Types**. Here you choose a specific transaction type and define **Service Team Profile** in **Profiles** of the transaction type definition.

Related Information

[Service Teams](#)

[Master Data for Service Teams](#)

Knowledge Articles

Definition

A piece of information that can be used to resolve an issue.

❖ Example

An interaction center agent searches for knowledge articles, which can include documents, hyperlinks, and screenshots, to help resolve callers' problems.

Structure

You can record details in a knowledge article, such as language, description, and keywords, in addition to the categories assigned to the knowledge article. You can also record short notes about, for example, solutions or workarounds to problems.

You can specify administration details, such as the dates during which the knowledge article is valid, the priority of the knowledge article, or its status.

Under the relevant assignment blocks, you can add various pieces of information, such as objects and transactions, to the knowledge article, as well as assign the knowledge article to other related pieces of information.

Integration

A knowledge article can be integrated with a service request. Once you have used a particular knowledge article to process a service request, you can attach it to other similar requests as a related knowledge article.

A knowledge article can also be linked to other transactions, such as service orders.

More Information

[Working with Knowledge Articles](#)

Working with Knowledge Articles

Use

You can use this function to obtain information, such as how-to documents, user manuals, and FAQs, to process service requests.

Integration

Knowledge articles are integrated with the service request.

Prerequisites

You have made the following settings for knowledge articles in Customizing for Service:

- Specified which groups appear in the authorization scope under ► [Master Data](#) ► [Knowledge Articles](#) ►
- Defined surveys and their determination under ► [Master Data](#) ► [Knowledge Articles](#) ► [Questionnaires](#) ►

The settings you make for surveys in Customizing determine the surveys that appear in the [Questionnaires](#) assignment block for knowledge articles.

- Specified the categories to which the knowledge article can be assigned under ► [Cross-Application Components](#) ► [Multilevel Categorization](#) ►

Features

You can do the following with knowledge articles:

- Compile knowledge bases for a faster search. When you create a knowledge article in a new language, the system automatically creates a knowledge base index; the system automatically updates an existing index with new or modified knowledge articles. As an interaction center manager, you can delete, re-create, or update an index, as well as set a time and date for compilation.
- From the [Related Transactions](#) assignment block, add knowledge articles to other transactions, for example, service requests, service orders, or complaints, to have direct access to similar issues customers have had.

- Attach objects, such as documents, cases, business partners, and campaigns to knowledge articles, allowing access to various relevant types of information.
- Use the auto-suggest knowledge articles function available in the interaction center (IC). When you select a categorization for a business transaction, the system automatically checks for knowledge articles assigned to that categorization. If they exist, the system displays an alert from which you can navigate directly to the related knowledge articles.
- Create knowledge articles from a template to save time, and also create them in various languages.
- You can rate knowledge articles. To define the text used in the rating scale, use the [Define Text Values for Ratings](#) Customizing activity, found in [Service](#) > [Master Data](#) > [Knowledge Articles](#).

i Note

To find a knowledge article that you have created in a particular language, you must set this language as your default logon language before you perform a search.

More Information

[Multilevel Categorization](#)

Service Contract Management

Service Contract Management in Service supports a variety of functions for service contracts. Service contracts are outline agreements with business partners that define the services offered for a particular period.

Features

Service Contract Processing

You can create service contracts and various types of service contract items and work with them throughout their entire life cycles.

Service Contract Templates

You can create and manage templates containing service contract data that is commonly reused in your service business. You can then create service contracts as follow-up transactions of a service contract template. This helps minimize the amount of time required to create a service contract.

Service Contract Determination

When you create or edit a service order, the system automatically determines service contracts to which the service order can be assigned based on selection criteria.

Change Processes

You can make changes to existing service contracts by change processes to determine the follow-on processing of the service contract, in both contract management and accounting.

End-to-End Business Processes

You can employ end-to-end business processes through the integration with service order management, billing, pricing, controlling, and financials.

Pricing and Billing

Various pricing and billing features allow you to tailor your business processes according to your business needs:

- Periodic billing plans
- Ad hoc billing plans
- Automatic creation of billing document requests
- Price adaption
- Price agreements

Credit Management for Service Contracts

By integrating with SAP Credit Management, credit checks can be automatically triggered for business partners (payers) when a service contract is saved.

Manage Service Contracts

App ID: F3763

With this app, you can create service contracts and service contract items according to the agreements on service provision that you have made with your customers. You can process service contracts and service contract items, and retrieve related information throughout their entire life cycles. In addition, you can monitor and process the service contracts that were synchronized from external systems. Note that integration with service order management, controlling, and financials ensures that you can implement end-to-end processes according to your business requirements.

Key Features

You can use this app to do the following:

- Search for service contracts
- Display, create, edit, cancel, and release service contracts and contract items
- Set up periodic billing plans for service contract items
- Use price adaptation functions for service contract items
- Use ad hoc billing functions for service contract items
- Enable auto renewal of service contract items
- Renew an entire service contract or an individual item through change processes
- Use change processes to change the sold-to party for a released service contract
- Use price agreements to offer prices lower than those defined in other service transactions
- Use service level agreements (SLAs) to define the attributes of service products in service contracts
- Export a list of service contracts to a spreadsheet file (*.XLSX format)
- Navigate to related applications from the transaction history
- Manage service contracts that were created from another service transactions, such as solution quotations

- Add and configure a configurable product as the service contract item

Header and Item Data

Service contracts contain header and item data. The header page consists of assignment blocks for service contract details, items assigned to the service contract, cancellation, organizational data, price information, billing, transaction history, related change documents, and more. You can personalize which assignment blocks are displayed. For more information, see [Service Contracts](#).

In the item page, information in assignment blocks includes item details, billing plan, cancellation, price information, object list, product list, and more. You can also personalize which assignment blocks are displayed. For more information, see [Service Contract Item](#).

For service contract items that have the revenue recognition key, you can access the [Event-Based Revenue Recognition - Service Documents](#) application by selecting the [Revenue Recognition Monitor](#) button in the item page.

The transaction history of the service contract header and item shows all related transactions, including generated billing document requests.

Releasing Service Contracts and Service Contract Items

You can release service contracts and service contract items to activate them. The system sets their statuses to released. This triggers the follow-up billing process for the service contracts and service contract items.

Canceling Service Contracts and Service Contract Items

You can cancel service contracts and service contract items as needed. To cancel service contracts, you also provide the canceling party, cancellation date, and reason. The system sets the contract end date to the cancellation date you've defined. Note the contracts that contain invoiced billing request lines. The cancellation date must be no earlier than the billing date of the last invoiced billing request line. For information, see [Cancellation](#).

Displaying Earliest Start and Latest End Dates

You can view the earliest start and latest end dates of a service contract. From the start dates of all service contract items contained in the service contract, the system takes the earliest one as the earliest start date of the service contract. From the end dates of all service contract items contained in the service contract, the system takes the latest one as the latest end date of the service contract. You can also use these two fields to filter service contracts.

To use this feature, you can go to Customizing settings for [Service](#) under [Basic Functions](#) > [Date Management](#) and make the following settings:

- [Define Date Types, Duration Types and Date Rules for Service Transactions](#)

The following date types are available:

- Earliest start of contract (CONTERLSTDT)
- Latest end of contract (CONTLTSTDT)

- [Define Date Profile for Service Transactions](#)

Date types CONTERLSTDT and CONTLTSTDT were added to the date profile CONT002.

Displaying Credit Memos and Credit Memo Requests

When credit memos or credit memo requests are created **with reference to invoices of service contracts**, you can find them displayed in the transaction history. Cancellations of credit memos are also displayed there. From the transaction history, you can

navigate to the respective sales or billing apps for more details.

i Note

Credit memos created from credit memo requests, rather than from contract invoices, are not displayed.

Copying of Billing-related Texts

When you create a service contract, the system automatically copies any billing-related texts (text types TX05 and TX06, including all available languages) from the business partner master data to texts at the service contract header. The system does this when the following conditions are met:

- The sold-to party of the service contract matches the business partner master data.
- The sales area (sales organization, distribution channel and division) of the service contract matches the sales area that contains the billing-related texts in the business partner master data.

To use the feature, you make the Customizing settings for **Service** under **Basic Functions > Text Management > Define Text Determination Procedure** :

- Text object: CRM_ORDERH
- Text determination procedure: SVCT0001
- Access sequence: 07 for TX05 and 08 for TX06

Pricing and Billing

Various pricing and billing features allow you to tailor your business processes according to your business needs:

- Periodic billing plans

You can use periodic billing plans to schedule individual dates for the billing of service contracts, independent of the provisioning of the service. For more information about periodic billing plans, see [Periodic Billing Plans for Service Contract Billing](#).

- Ad hoc billing plans

You can use ad hoc billing plans in the items for ad hoc billing to define the dates on which billing is to occur and the value that is to be billed. For each billing date, the system generates one billing request line. For more information about ad hoc billing plans, see [Ad Hoc Billing for Service Contracts](#).

- Services rendered date

You can use the services rendered date to specify the date on which the services were provided. The system uses this date for tax calculation per billing request line. By default, the system uses the billing date as the services rendered date.

- **Technically Completed** status of billing

When service contract items have been fully billed and journal entries have been created for all associated billing documents, the **Technically Completed** status is set automatically in the **Billing** assignment block. The following can cause the indicator to be set to **No**:

- The service contract item has not been billed or only partially billed.
- Posting to financial accounting (that is, the creation of journal entries) was not successful.

- SEPA mandates

You can assign SEPA mandates in service contracts. The system forwards the SEPA mandate that you have assigned to the service contract to the follow-on billing document. Note that the currency must be Euro to use SEPA mandates. For more information about SEPA mandates, see [Service Transactions with SEPA Mandate](#).

- Price adaption

Using price adaption for service contracts, you can apply flexible pricing dates to billing request lines of service contract items and maintain prices at billing plan level manually. For more information, see [Price Adaptation for Service Contracts](#).

- Price agreement

Based on price agreements you can offer your customers lower prices than those defined in other service transactions. For more information, see [Price Agreements in Service Contracts](#).

- Tax destination country/region

You can use the tax destination country/region in the service contract header to specify which country/region's tax rate is applied to the entire service contract. Generally speaking, the tax destination country/region is derived from the ship-to party at header level. You can always set a tax destination country/region manually if the derived one doesn't meet your business requirements. Whenever the ship-to party at header level changes, the system derives a tax determination country/region again accordingly.

- Billing relevance for related transactions

When single item accounting is used in your system, you can maintain billing relevance for related transactions on service header and item, and the dynamic item processor (DIP) profile on service contract item. Billing relevance determines whether and how transaction items of a particular item category are processed in billing and revenue recognition, while DIP profile can be copied to the maintenance service order (document type: MSO). When you create a new service contract, the items automatically inherit the header billing relevance for related transactions until you change the values manually.

→ Remember

These fields are only valid and displayed when item-based accounting is used. In this type of accounting, service transaction items are recognized as account assignment objects to which costs and revenues are posted. For more information about item-based accounting, see Chapter 3.6 [Enable Item-Based Accounting for Service Management Controlling](#).

- Account assignment when item-based accounting is inactive

When the item-based accounting is inactive, you can use the revenue posting relevant internal order or the billing relevant WBS element for account assignment in the service contract header and item levels. These objects can be inherited from the header to all newly created items that can be modified individually.

Credit Management for Service Contracts

By integrating with SAP Credit Management, credit checks can be automatically triggered for business partners (payers) when a service contract is saved in the released status. The status of service contract items with negative check results is rolled back to in process and the corresponding service contract is blocked for further processing. Documented Credit Decision (DCD) cases are automatically created for those service contract items with negative check results. In the case of positive check results, the credit commitment of a business partner can be updated accordingly. The credit commitment is then consolidated into the credit exposure that consumes the available credit limit of the business partner. For more information, see [Credit Management for Service Contracts](#).

Integration

Integration with service order management enables the service contracts and service contract items that you manage here to be found and assigned in resource-related service orders. For more information, see [Service Contract Determination](#).

If you have integrated Contract Accounts Receivable and Payable (FI - CA) and Convergent Invoicing, you can assign contract accounts in your service contracts to control processes in invoicing, contract accounts receivable and payable, taxation, and correspondence. For more information, see [Contract Accounts in Service Transactions](#).

Output Management

Output management for service contracts enables you to print or e-mail service contracts. Output management in service contracts provides selected functions of the output management framework. You have the following options:

- Create output items when you create a service contract
- Display a list of output items created for a service contract
- Use the email and print functions
- Display the status of the output item

For more information about output management, see [Output Management for Service Orders, Service Quotations, and Service Contracts](#).

Attachments

You can attach files and URL links to service contracts. Most attachment functions are supported for service contracts. You have the following options:

- Upload, download, and display attachments
- Add files or URLs

For more information about the attachment, see [Managing Attachments](#).

Overview of Service Contract Statuses

The following table provides an overview of the statuses that service contracts can have. The description also applies to the item statuses.

Status	Description
Open	This is the default status that all service contracts take after they're created. It indicates that you're free to change the contract.
Released	The service contract comes into effect when it's set to released. When this status is set, the service contract, for instance, is ready for follow-up billing process. Note that you can't delete a service contract once it's set to released. If any error occurs, you can't release the items. The system automatically sets the status back to in process.
In Process	A user has manually set the status to in process, for example, a service manager who wants to edit a released service contract. A service contract is automatically set to in process when one or more of its items are set to the status of open, released, or in process.
Completed	A user has manually set the status to completed, which is usually done when a service contract reaches the end of its life cycle.

Situation Handling

- Service contract due to expire soon

This app uses Situation Handling to notify you about service contracts that are due to expire within a predefined number of days. To alert you to this situation, the system sends you notifications on SAP Fiori launchpad and displays in-app situation messages on the object pages of the affected service contracts. In addition, a situation indicator next to expiring service contracts in the list of service contracts indicates that these contracts require your attention.

Using automatic notifications, you get a brief overview of the critical service contracts, including the service contract items to expire next. You can then directly navigate to the service contract in question to review it and take appropriate action, such as renegotiating a contract or enabling auto renewal of a particular service contract item. If you renew a contract item manually, a new contract item is created. You can then set the situation to resolved and the renewed contract item to completed. This allows the system to exclude this item from the next check.

- Service contract item due to expire soon

This app uses Situation Handling to inform specific users about service contract items that are due to expire within a predefined number of days. Using an automatic notification, you get a brief overview of the critical service contract item to expire next. You can then directly navigate to the service contract in question to review it and take appropriate action, such as renegotiating a contract item or enabling auto renewal of the service contract item. If you renew a contract item manually, a new contract item is created. You can then set the situation to resolved and the renewed contract item to completed. This allows the system to exclude this item from the next check.

- Service contract item not released

This app uses Situation Handling to inform specific users when the start date of a service contract item has already passed and the service contract item is still not released. Using an automatic notification, you get a brief overview of the critical service contract item that has to be released. You can then directly navigate to the service contract in question to review it and take appropriate action, such as releasing the contract item or changing the start date of the contract item. You can then set the situation to resolved and the released contract item to completed. This allows the system to exclude this item from the next check.

- Contract with zero billing value

This app uses Situation Handling to notify you about service contracts that contain one or more billing request lines with zero billing values. To alert you to this situation, the system sends you notifications on SAP Fiori launchpad and displays in-app situation messages on the object pages of the affected service contracts.

Using automatic notifications, you get a brief overview of the critical service contracts, including the service contract items that contain zero billing values. You can then directly navigate to the service contract in question to review it and take appropriate action, such as maintain the price in the corresponding product.

- Service contract item blocked for billing

This app uses Situation Handling to inform specific users when the service contract item is blocked for billing. Using an automatic notification, you get a brief overview of the critical service contract item that is blocked for billing. You can then directly navigate to the service contract in question to review it and take appropriate action. You can then set the situation to resolved and the blocked service contract item to completed. This allows the system to exclude this item from the next check.

You can also use the [My Situations](#) app to display an overview of your open situations and close situation instances by manually setting the appropriate status.

For more information about the situation templates that are used by this app, see [Situation Templates](#).

Supported Device Types

- Desktop
- Tablet

Related Information

[Manage Service Contract Templates](#)

App Extensibility: Manage Service Contracts

You can extend the [Manage Service Contracts](#) app according to your business needs.

Features

Key users can extend the app in the [Custom Fields](#) app using the following business contexts:

- [Service Header](#)
- [Service Item](#)

Business users can display fields that you have enabled in the [Custom Fields](#) app. The fields that you enable for this app are included in the personalization options for business users for the following UI elements:

UI Element	Business Context
Filter bar	Service Header
List of service contracts	Service Header

For more information about how to adapt an SAP Fiori UI at runtime, see [Making UI Changes \(Object Pages\)](#).

i Note

This app uses a different UI technology in edit and display modes. For more information, see [WebClient UI Framework](#) and [Getting Started with the WebClient UI](#).

Related Information

[Extensibility](#)

Situation Templates

[Manage Service Contracts](#) app supports the following situation templates:

- [Service Contract Due to Expire Soon](#)
- [Service Contract Item Due to Expire Soon](#)
- [Service Contract Item Not Released](#)
- [Service Contract with Zero Billing Value](#)
- [SrvcContr Item Blocked for Billing](#)

- [Price Check for Automatic Renewal](#)
- [Service Contract GTS Blocked/Pending](#)

Service Contract Due to Expire Soon

Technical Name: SRVC_EXPIRING_SERVICE_CONTRACT

Consuming App: [Service Contracts](#)

Template used for Situation Handling that informs service professionals and service employees about service contracts due to expire within the predefined number of days.

For background information about the Situation Handling framework, see the Product Assistance for [Situation Handling](#).

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

When a service contract is close to expiring, you want your service professionals and service employees to be informed about this fact in advance. Automatic notifications allow the user to directly navigate to the service contract in question to review it and take appropriate action, such as renegotiating a contract or enabling auto renewal of a particular service contract item. This allows a service professional or service employee to proactively focus on and address such critical, expiring service contracts.

Default Settings

The following sections describe how this standard situation template is preconfigured and which predefined parameters you can configure in the [Manage Situation Types](#) app when you copy the standard template to create your own ready-to-use situation type.

For more information, see [Manage Situation Types](#).

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object: Service Contract

Anchor Object: Service Contract

Trigger Type: Batch

Description: In each batch job run, the system checks for service contracts that have service contract items due to expire within the predefined number of days from the current date. The predefined number of days is currently set to 60, but you are free to change it according to your needs.

For more information on batch jobs, see [Batch Job Scheduling](#).

Conditions

The condition in this template defines that a situation with the status **Open** is created and a notification is sent to the defined recipients if the system detects a service contract that meets the criteria specified above.

For more information, see [Conditions](#).

Situation Display

When situations occur, users are informed about them by various texts, such as in-app situation messages or notifications on SAP Fiori launchpad. In this section, you can see all preconfigured texts.

For more information, see [Situation Display](#).

i Note

When you copy the template and adapt it to your needs, you can define the notification settings and change all text elements in this section. After making the changes in the original language, please remember to translate these changes into the other languages that you want to use. The template comes with translations that can be changed directly when you copy the template.

For more information, see [Translate Situation Types](#).

Notification Recipients

For this template, the recipients of the notifications can be determined by the following predefined rule:

- **Notify responsible employee**

The rule determines that if a service contract contains a contract item that is due to expire within the next 60 days, the user who is specified as the employee responsible for it is informed about this critical business situation.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Related Information

[Situation Handling](#)

[UI Integration With Situation Handling](#)

[Service Contracts](#)

[Service Contract Item](#)

[Service Contract Management](#)

Service Contract Item Due to Expire Soon

Technical Name: SRVC_EXPIRING_SRVC_CONTR_ITEM

Consuming App: [Service Contracts](#)

Template used for Situation Handling that informs service professionals and service employees about service contract items due to expire within a defined number of days.

For background information about the Situation Handling framework, see the Product Assistance for [Situation Handling](#).

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

When a service contract item is close to expiring, you want your service professionals and service employees to be informed about this fact in advance. Automatic notifications allow the user to navigate to the service contract in question directly to review it and take appropriate action. They can, for example, renegotiate a contract or enable auto renewal of the expiring service contract item. This allows a service professionals and service employees to proactively focus on and address such critical service contract items.

Default Settings

The following sections describe how this standard situation template is preconfigured and which predefined parameters you can configure in the [Manage Situation Types](#) app when you copy the standard template to create your own situation type.

For more information, see [Manage Situation Types](#).

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object: Service Contract Item

Anchor Object: Service Contract Item

Trigger Type: Batch

Description: In each batch job run, the system checks for service contract items due to expire within a predefined number of days from the current date (**Days Until Contract Expiration: 0...60, Item Renewed: !=X**). The predefined number of days is currently set to 60, but you are free to change it according to your needs. During the check, the system ignores the service contract items that have already been renewed (**Item Renewed: =X**).

For more information on batch jobs, see [Batch Job Scheduling](#).

Conditions

The preconfigured conditions in this template are defined for processing in this order:

Condition	Condition Description
1	A situation with the status Open is created and a notification is sent to the defined recipients if the system detects a service contract item that is due to expire within the number of days you defined and hasn't been renewed yet.
2	An open situation is automatically set to Closed when the expiring service contract item has been renewed.

For more information, see [Conditions](#).

Situation Display

When situations occur, users are informed about them by various texts, such as in-app situation messages or notifications on SAP Fiori launchpad. In this section, you can see all preconfigured texts.

For more information, see [Situation Display](#).

i Note

When you copy the template and adapt it to your needs, you can define the notification settings and change all text elements in this section. After making the changes in the original language, please remember to translate these changes into the other languages that you want to use. The template comes with translations that can be changed directly when you copy the template.

For more information, see [Translate Situation Types](#).

Notification Recipients

For this template, the recipients of the notifications can be determined by the following predefined rule:

- **Notify employee responsible for the service contract**

The rule determines that if the system detects a contract item that is due to expire within the number of days you define, the user who is specified as the employee responsible for the respective service contract is informed about this critical situation.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Related Information

[Situation Handling](#)

[UI Integration With Situation Handling](#)

[Service Contracts](#)

[Service Contract Item](#)

[Service Contract Management](#)

Service Contract Item Not Released

Situation Template ID: SRVC_CONTRACT_ITEM_RELEASE_DUE

Consuming App: [Manage Service Contracts](#)

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

You want the customer service manager to be informed automatically when the start date of a service contract item has already passed, and the service contract item is still not released. The situation is then raised and notification is sent. Automatic

notifications allow the user to directly navigate to the service contract in order to review the service contract item and take appropriate action.

Default Settings

The template comes with predefined settings. For the settings that aren't visible or self-explanatory, you can find information in the following sections. For generic information about how to configure situations based on this template, refer to the documentation of the [Manage Situation Types](#) app with which you can display and use the template.

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object	Service Contract Item
CDS View for Trigger Object	C_SRVCCONTRITMRELDUESITUATION
Anchor Object	Service Contract Item
CDS View for Anchor Object	I_SRVCCONTRITEMSITUATIONANCHOR
Trigger Type	Batch

In each batch job run, the system checks if the start date of the service contract item has already passed and the item is still not released. For the following conditions no notifications will be sent:

- End date of the service contract item is already passed
- Service contract item is already released

i Note

These settings aren't visible in the template in the [Manage Situation Types](#) app and cannot be changed when you create a situation type based on this template. All of the following settings are visible in the template and you can adapt them when you copy the template to create a situation type.

Conditions

The condition in this template defines that a situation is created when the start date of the service contract item is passed.

The preconfigured conditions in this template are defined for processing in this order:

Condition	Description
1	A situation with the status Open is created and a notification is sent to the defined recipients if the system detects that the start date of a service contract item is already passed and the service contract item hasn't been released yet.
2	An open situation is automatically set to Closed when the end date of the service contract item is already passed.

For more information, see [Conditions](#).

Situation Display

When situations occur, users are informed about them by various texts, such as in-app situation messages or notifications on SAP Fiori launchpad. In this section, you can see all preconfigured texts.

i Note

When you copy the template and adapt it to your needs, you can define the notification settings and change all text elements in this section. After making the changes in the original language, please remember to translate these changes into the other languages that you want to use. The template comes with translations that can be changed directly when you copy the template.

For more information, see [Situation Display](#).

Recipients

In this section, you see the predefined settings for determining who is responsible for a situation instance. Based on these, you can define who receives a notification when a situation instance is triggered (if enabled) or who sees the instance in the [My Situations](#) app.

For this template, the recipients of the notifications can be determined by the following predefined rule:

- Notify the employee responsible if the start date of the service contract item is already passed.

The rule determines that if the system detects that the start date of a contract item is already passed, the user who is specified as the employee responsible for the respective service contract is informed about this critical situation.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Capture Data Context: You can capture the data associated with the situation type that you define with this template. You can use the [Business Situation – Read](#) API to extract the context data to another platform. It lets you capture the data listed below.

From anchor CDS view I_SrvcContrItemSituationAnchor:

Field Name	Description
DISTRIBUTIONCHANNEL	Distribution Channel
DIVISION	Division
SALESGROUP	Sales Group
SALESOFFICE	Sales Office
SALESORGANIZATION	Sales Organization
SERVICECONTRACT	Transaction ID
SERVICECONTRACTITEM	Item Number in Doc.
SERVICECONTRACTITEMENDDATE	End Date
SERVICECONTRACTITEMSTARTDATE	Start Date

Field Name	Description
SERVICECONTRACTITEMUUID	Object GUID
SERVICEDOCUMENTDESCRIPTION	Transaction Descr.
SERVICEDOCUMENTITEMISRELEASED	Release Status
SERVICEDOCUMENTITEMNETAMOUNT	Net Value
SERVICEDOCUMENTTYPE	Transaction Type
SERVICEOBJECTTYPE	Trans. Cat.
SERVICEORGANIZATION	Service Organization
TRANSACTIONCURRENCY	Currency

From trigger object CDS view C_SrvcContrItmRelDueSituation:

Field Name	Description
DISTRIBUTIONCHANNEL	Distribution Channel
DIVISION	Division
SALESGROUP	Sales Group
SALESOFFICE	Sales Office
SALESORGANIZATION	Sales Organization
SERVICECONTRACT	Service Contract ID
SERVICECONTRACTITEM	Service Contract Item
SERVICECONTRACTITEMENDDATE	End Date
SERVICECONTRACTITEMSTARTDATE	Start Date
SERVICECONTRACTTYPE	Transaction Type
SERVICEDOCUMENTDESCRIPTION	Transaction Descr.
SERVICEDOCUMENTITEMISRELEASED	Release Status
SERVICEDOCUMENTITEMNETAMOUNT	Value of Service Contract Item
SERVICEOBJECTTYPE	Trans. Cat.
SERVICEORGANIZATION	Service Organization
TRANSACTIONCURRENCY	Currency
RESPEMPLOYEEBUSINESSPARTNERID	Employee Responsible
SALESORGANIZATIONORGUNITID	Sales Org. ID
SALESOFFICEORGUNITID	Sales Office
SALESGROUPORGUNITID	Sales Group

i Note

Customers are responsible for the data, including the adherence to legal restrictions in their judicial area. Neither SAP nor its associated companies assume any responsibility for the adherence to authorizations or data protection rules for data captured and processed by its customers. This means that customers alone must ensure adherence to these rules and regulations.

Related Information

[My Situations](#)

Service Contract with Zero Billing Value

Technical Name: SRVC_CONTR_WITH_EXP_BILL_VALUE

Consuming App: [Service Contracts](#)

Template used for Situation Handling that informs service professionals and service employees of service contracts that contain one or more billing request lines with a billing value of zero.

For background information about the Situation Handling framework, see the Product Assistance for [Situation Handling](#).

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

When a service contract contains one or more billing request lines with a billing value of zero, you want your service professionals or service employees to be informed about this fact in advance. Automatic notifications allow the user to directly navigate to the service contract in question to review it and take appropriate actions, such as maintain the price in the corresponding product. This allows a service professional or a service employee to proactively focus on and address such critical service contracts with a billing value of zero.

Default Settings

The template comes with predefined settings. For the settings that aren't visible or self-explanatory, you can find information in the following sections. For generic information about how to configure situations based on this template, refer to the documentation of the [Manage Situation Types](#) app with which you can display and use the template.

For more information, see [Manage Situation Types](#).

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object: Service Contract Item

Anchor Object: Service Contract Item

Trigger Type: Batch

Description: In each batch job run, the system checks for service contracts that contains a billing value of zero by comparing with the predefined billing value. The predefined billing value is currently set to zero.

Conditions

The condition in this template defines that a situation with status **Open** is created and a notification is sent to the defined recipients if the system detects a service contract item that meets the criteria specified above.

For more information, see [Conditions](#).

Situation Display

When situations occur, users are informed about them by various texts, such as in-app situation messages or notifications on SAP Fiori launchpad. In this section, you can see all preconfigured texts.

For more information, see [Situation Display](#).

i Note

When you copy the template and adapt it to your needs, you can define the notification settings and change all text elements in this section. After making the changes in the original language, please remember to translate these changes into the other languages that you want to use. The template comes with translations that can be changed directly when you copy the template.

For more information, see [Translate Situation Types](#).

Recipients

In this section, you see the predefined settings for determining who is responsible for a situation instance. Based on these, you can define who receives a notification when a situation instance is triggered (if enabled) or who sees the instance in the [My Situations](#) app.

For this template, the recipients of the notifications can be determined by the following predefined rule:

- Notify responsible employee

The rule determines that if a service contract contains a billing value of zero, the user who is specified as the employee responsible for it is informed about this critical business situation.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Related Information

[Situation Handling](#)

[Key Concepts in Situation Handling](#)

[UI Integration With Situation Handling](#)

[Service Contracts](#)

[Service Contract Item](#)

SrvcContr Item Blocked for Billing

Situation Template ID: SRVC_CONTRACT_ITEM_BILLG_BLOCKED

Consuming App: [Manage Service Contracts](#)

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

You want the customer service manager to be informed automatically when the service contract item is blocked for billing. The situation is then raised and notification is sent. Automatic notifications allow the user to directly navigate to the service contract in order to review the service contract item and take appropriate action.

Default Settings

The template comes with predefined settings. For the settings that aren't visible or self-explanatory, you can find information in the following sections. For generic information about how to configure situations based on this template, refer to the documentation of the [Manage Situation Types](#) app with which you can display and use the template.

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object	Service Contract Item
CDS View for Trigger Object	C_SRVCCONTRITMBILLGBLKSITN
Anchor Object	Service Contract Item
CDS View for Anchor Object	I_SRVCCONTRITEMSITUATIONANCHOR
Trigger Type	Batch

In each batch job run, the system checks if the service contract item is blocked for billing.

i Note

These settings aren't visible in the template in the [Manage Situation Types](#) app and cannot be changed when you create a situation type based on this template. All of the following settings are visible in the template and you can adapt them when you copy the template to create a situation type.

Conditions

The condition in this template defines that a situation is created when the service contract item is blocked for billing.

The preconfigured conditions in this template are defined for processing in this order:

Condition	Description
1	A situation with the status Open is created and a notification is sent to the defined recipients when the system detects that any one of the billing request line item is blocked for billing.
2	A situation with the status Open is created and a notification is sent to the defined recipients when the system detects that any one of the service contract item is blocked for billing.

For more information, see [Conditions](#).

Situation Display

When situations occur, users are informed about them by various texts, such as in-app situation messages or notifications on SAP Fiori launchpad. In this section, you can see all preconfigured texts.

i Note

When you copy the template and adapt it to your needs, you can define the notification settings and change all text elements in this section. After making the changes in the original language, please remember to translate these changes into the other languages that you want to use. The template comes with translations that can be changed directly when you copy the template.

For more information, see [Situation Display](#).

Recipients

In this section, you see the predefined settings for determining who is responsible for a situation instance. Based on these, you can define who receives a notification when a situation instance is triggered (if enabled) or who sees the instance in the [My Situations](#) app.

For this template, the recipients of the notifications can be determined by the following predefined rule:

- Notify the employee responsible if the service contract item is blocked for billing.

The rule determines that if the system detects that the contract item is blocked for billing, the user who is specified as the employee responsible for the respective service contract is informed about this critical situation.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Capture Data Context: You can capture the data associated with the situation type that you define with this template. You can use the [Business Situation – Read](#) API to extract the context data to another platform. It lets you capture the data listed below.

From anchor object CDS view I_SrvcContrItemSituationAnchor:

Field Name	Description
DISTRIBUTIONCHANNEL	Distribution Channel
DIVISION	Division

Field Name	Description
SALESGROUP	Sales Group
SALESOFFICE	Sales Office
SALESORGANIZATION	Sales Organization
SERVICECONTRACT	Transaction ID
SERVICECONTRACTITEM	Item Number in Doc.
SERVICECONTRACTITEMENDDATE	End Date
SERVICECONTRACTITEMSTARTDATE	Start Date
SERVICECONTRACTITEMUUID	Object GUID
SERVICEDOCUMENTDESCRIPTION	Transaction Descr.
SERVICEDOCUMENTITEMISRELEASED	Release Status
SERVICEDOCUMENTITEMNETAMOUNT	Net Value
SERVICEDOCUMENTTYPE	Transaction Type
SERVICEOBJECTTYPE	Trans. Cat.
SERVICEORGANIZATION	Service Organization
TRANSACTIONCURRENCY	Currency

From trigger object CDS view C_SrvcContrItmBillgBlkSitn:

Field Name	Description
DISTRIBUTIONCHANNEL	Distribution Channel
DIVISION	Division
SALESGROUP	Sales Group
SALESOFFICE	Sales Office
SALESORGANIZATION	Sales Organization
SERVICECONTRACT	Transaction ID
SERVICECONTRACTITEM	Item Number in Doc.
SERVICECONTRACTITEMENDDATE	End Date
SERVICECONTRACTITEMSTARTDATE	Start Date
SERVICECONTRACTITEMUUID	Object GUID
SERVICECONTRACTTYPE	Transaction Type
SERVICEDOCUMENTDESCRIPTION	Transaction Descr.
SERVICEDOCUMENTITEMISRELEASED	Release Status

Field Name	Description
SERVICEDOCUMENTITEMNETAMOUNT	Net Value
SERVICEOBJECTTYPE	Trans. Cat.
SERVICEORGANIZATION	Service Organization
TRANSACTIONCURRENCY	Currency

i Note

Customers are responsible for the data, including the adherence to legal restrictions in their judicial area. Neither SAP nor its associated companies assume any responsibility for the adherence to authorizations or data protection rules for data captured and processed by its customers. This means that customers alone must ensure adherence to these rules and regulations.

Related Information

[My Situations](#)

Price Check for Automatic Renewal

Situation Template ID: SRVC_CONTR_AUTO_RENEW_PRICE

This is a situation template delivered by SAP for [Situation Handling](#).

Consuming App: [Manage Service Contracts](#)

The consuming app is a business app for which this template is designed and which displays a situation message.

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

You can automatically inform service professionals and service employees to check the prices for a service contract item when the predefined notification date has been reached. The service contract items must be items for price adaptation (item category SCN2) and in the released status. Notification dates must be predefined in the [Manage Service Contracts](#) app for the automatic renewal of the service contract items. The system then raises the situation, and a notification is sent. Automatic situations and notifications allow the user to directly navigate to the service contract. The user can then go to the item details page and review the prices for the automatic renewal. This allows the user to take appropriate action before the system automatically renews the service contract item.

Default Settings

The template comes with predefined settings. For the settings that aren't visible or self-explanatory, you can find information in the following sections. For generic information about how to configure situations based on this template, refer to the documentation of the [Manage Situation Types](#) app with which you can display and use the template.

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object	Service Contract Item
CDS View for Trigger Object	C_SRVCCONTRITMFUTRPRCNOTIFSITN
Anchor Object	Service Contract Item
CDS View for Anchor Object	C_SRVCCONTRITMFUTRPRCNOTIF
Trigger Type	Batch

The situation is triggered when a released service contract item is due to be automatically renewed and, according to the predefined notification date, its prices are due to be checked.

❖ Example

In the [Manage Service Contracts](#) app, you, as a service professional or service employee, have a released service contract item for price adaptation that ends on **December 31, 2024**. You want the system to automatically renew it **one week** before the contract end date. Meanwhile, you would like to define different prices for the service contract item to be renewed. You set a notification date of **November 6, 2024** for this. Therefore, the situation is triggered every day from **November 6, 2024** to **December 24, 2024**. You can close the situation manually after taking appropriate actions so that the situation and the notification no longer appear.

i Note

These settings aren't visible in the template in the [Manage Situation Types](#) app and cannot be changed when you create a situation type based on this template. All of the following settings are visible in the template and you can adapt them when you copy the template to create a situation type.

Conditions

The condition in this template defines that a situation with status **open** is created. In addition, a notification is sent to the defined recipients if the system detects a service contract item that meets the criteria specified above.

For more information, see [Conditions](#).

Recipients

In this section, you see the predefined settings for determining who is responsible for a situation instance. Based on these, you can define who receives a notification when a situation instance is triggered (if enabled) or who sees the instance in the [My Situations](#) app.

For this template, the determination of the notification recipients is predefined by a rule: Notify responsible employee. The rule determines that if a released service contract item for price adaptation is due to be automatically renewed, the user who is specified as the employee responsible for it is requested to check the prices for the automatic renewal of the item.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Related Information

[Manage Service Contracts](#)

Service Contract GTS Blocked/Pending

Situation Template ID: SRVC_CTR_GTS_BLOCKED_OR_PENDING

This is a situation template delivered by SAP for [Situation Handling](#).

Consuming App: [Service Contracts](#)

The consuming app is a business app for which this template is designed and which displays a situation message.

Business Value

You can use this template to inform your service managers automatically if a service contract is blocked by a trade compliance check or the check for the service contract is pending.

Default Settings

The template comes with predefined settings. For the settings that aren't visible or self-explanatory, you can find information in the following sections. For generic information about how to configure situations based on this template, refer to the documentation of the [Manage Situation Types](#) app with which you can display and use the template.

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object	Service Contract Item
CDS View for Trigger Object	I_SRVCCONITMGTSSTSBLKDPNDGSITN
Anchor Object	Service Contract Item
CDS View for Anchor Object	I_SRVCCONTRITEMSITUATIONANCHOR
Trigger Type	Batch

The situation is triggered when the system finds service contract items that have been blocked by the trade compliance check or for which a compliance check is pending.

i Note

These settings aren't visible in the template in the [Manage Situation Types](#) app and cannot be changed when you create a situation type based on this template. All of the following settings are visible in the template and you can adapt them when you copy the template to create a situation type.

Conditions

The condition in this template defines that a situation is created with the status Open and a notification is sent to the defined recipients if the system detects a service transaction item that meets the criteria specified.

For more information, see [Conditions](#).

This template provides some filters, such as **Service Transaction Type**, **Sales Organization**, **Distribution Channel**, that you can use to define your own conditions when you create your situation types.

Recipients

In this section, you see the predefined settings for determining who is responsible for a situation instance. Based on these, you can define who receives a notification when a situation instance is triggered (if enabled) or who sees the instance in the [My Situations](#) app.

The predefined settings in this template determine that the notification addresses only members of the **Service** team category.

In addition, the recipients of the notifications can also be determined by the predefined rule **Notify Employee Responsible for Service Contract**. This rule determines that if a service order or a service quotation contains an item that is blocked by the trade compliance check or for which the check is pending, the user who is specified as the employee responsible for this service transaction is informed about this critical business situation.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Related Information

[Situation Handling](#)

Manage Service Contract Templates

App ID: F6356

With this app, you can create and manage templates containing service contract data that is commonly reused in your service business. You can then create service contracts as follow-up transactions of a service contract template. This helps minimize the amount of time required to create a service contract.

Prerequisites

Make sure the predefined settings for service contract templates in Customizing for **Service** under **► Transactions ► Basic Settings ►** meet your business requirements.

The business transaction for service contract templates is predefined in the standard system as follows:

- Transaction type SCT
- Item categories:
 - CNT for default service contract template items
 - CNTA for service contract template items for price adaptation
 - CNTB for service contract template items for ad hoc billing

If the settings do not reflect your business requirements, you can copy them and modify the copies.

You also need to set up copying control to determine the follow-up transactions (such as service contracts) that are created from the service contract templates. The Customizing settings for copying control are checked for every item to determine the transaction type of the follow-up transaction. If multiple transaction types are selected, the first entry applies.

Key Features

You can use this app to do the following:

- Search for service contract templates
- Sort and filter a list of service contract templates
- Display, create, edit, and release service contract templates and items
- Create follow-up transactions such as service contracts, depending on your settings
- Navigate to related apps
- Personalize how assignment blocks and table columns are displayed
- Export data to spreadsheet
- Add and configure a configurable product as the service contract template item

Header Data

Service contract templates contain header and item data. The header page consists of data about the service contract template and data that is reusable for the header of subsequently created service contracts. Data about the service contract template includes its ID, description, responsible employee, the valid-from and valid-to dates. Data for the creation of service contracts includes the contract duration, items added to the template, notes, parties involved, and header price agreement.

Item Data

You can add products as items in the service contract template and assign them to one of the following item categories that are predefined in the standard system:

- Service contract template item (CNT)

This default item category in the service contract template represents the default service contract item (SCN).

- Service contract template item for price adaptation (CNTA)

This item category in the service contract template represents the service contract item for price adaptation (SCNA).

- Service contract template item for ad hoc billing (CNTB)

This item category in the service contract template represents the service contract item for ad hoc billing (SCNB).

i Note

- Ensure that the products that are used in service contract template items have been assigned to the item category group SRVP or SCNP in your product master.
- If the predefined item categories do not reflect your business requirements, you can copy them and modify the copies in your Customizing settings.

In each item, you can define the item data that is reusable for the creation of service contract items in the follow-up service contracts. This data includes item details, service level agreements (SLA), notes, billing plans, object lists, product lists, parties involved, and price agreements.

Creating Service Contracts from Templates

To create a follow-up service contract from a service contract template, the service contract template must be in the released status. After you trigger the follow-up creation, the system prompts you to provide the mandatory fields (such as the sold-to party and the service contract start date) to create a service contract. In addition, you can change some contract-specific data including the description, contract duration, item quantity, equipment, and item contract duration, and select only necessary items to be copied during creation. According to the data that you have specified, the system creates a follow-up contract in the open status.

Feature Comparison Between Service Contract Templates and Service Contracts

Service contract templates offer an easy and quick way to create service contracts that have similar attributes. Therefore, service contract templates don't contain data that is unique across contracts. The following table compares service contract templates and service contracts.

Feature	Service Contract Template	Service Contract
Parties involved	Parties involved only contain the employee responsible.	Parties involved include not only the employee responsible, but also the sold-to party, ship-to party, bill-to party, and payer.
Billing plan	- You can only specify settlement rules for the periodic billing plan as follows: - Settlement period rule - Billing date rule - Pricing date rule - The system does not generate any billing request lines. - There's no billing plan for ad hoc billing, because ad hoc billing plan is specific to individual service contract items.	- You can specify settlement rules for the periodic billing plan. - The system automatically generates billing request lines according to the settlement rules. - The ad hoc billing plan is available for ad hoc billing items.
Pricing and billing integration	Not available. Service contract templates are not relevant for pricing and billing.	Available
Auto renewal	You can specify the renewal period and contract extension. However, the template item is not renewed automatically. The data you have specified are copied to the follow-up service contracts. Auto renewal is specific to individual service contract items.	Available
Credit management	Not available. Service contract templates are not relevant for credit management.	Available
Configurable product	You can add and configure configurable products as service contract template items. The	Available

Feature	Service Contract Template	Service Contract
	characteristics and characteristic values that you have configured are forwarded to the follow-up service contracts. To use this feature, the attribute Copy Configuration for the copying control of the contract template items must be B Copy Configuration from Source Item in Customizing settings for Service under ► Transactions ► Basic Settings ► Copying Control for Business Transactions ► Define Copying Control for Item Categories ►. 2. Price details are not available in service contract templates items. They can be determined in a follow-up service contract. For more information, see “Variant configuration” section in Service Contract Item.	

Overview of Life Cycle Statuses

The following table provides an overview of the statuses that service contract templates can have. The description also applies to the item statuses.

Status	Description
Open	This is the default status of the service contract template after it has been created. It indicates that you are free to change the template.
Released	The service contract template has been finalized and no further changes are required. Most importantly, you can't change the product that has been assigned to a template item if the item status is released. You can create a follow-up service contract only when the template is in the released status.
In Process	You can manually set the status to in process when, for example, template items have been added but aren't finalized yet. A template is automatically set to in process when one or more of its items are set to the open, released, or in process status.
Completed	Use this status when you want to end the life cycle of a service contract template or when a released template fulfills specific conditions, so that the system ends use of the template. For a completed template, no fields except for the status are editable.

Supported Device Types

- Desktop
- Tablet

Related Information

[Manage Service Contracts](#)

App Extensibility: Manage Service Contract Templates (Key User)

As a key user, you can extend the [Manage Service Contract Templates](#) app according to your business needs.

Custom Fields

You can create and edit custom fields to enhance applications using the [Custom Fields](#) app. You can add fields to the following UI elements using key user adaptation:

UI Element	Business Context
Filter bar	Service Header
List of service contract templates	Service Header

For more information, see:

- [Custom Fields](#)
- [Adding Extension Fields to Apps with Different UI-Technologies](#)

i Note

This app uses a different UI technology in edit and display modes. For more information, see [WebClient UI Framework](#) and [Getting Started with the WebClient UI](#).

Related Information

[Extensibility](#)

Service Contracts

Use

Service contracts are outline agreements with business partners that define the services offered for a particular period.

Service contracts represent long-term service agreements with customers. They define the content and scope of the [services](#) guaranteed within specific tolerance limits for certain parameters, for example, within a predefined timeframe.

❖ Example

If a technical defect occurs in a customer’s machine, they are assured that a service representative will be on site at the customer’s place of business within four hours to correct the defect.

In a service contract, you specify detailed information that has been agreed upon with the service recipient, such as:

- Routine tasks for devices that you have sold or rented to the customer

- Prices for the routine tasks
- Objects for which services can be claimed
- Conditions under which the contract can be canceled

During the validity period of the service contract, you can use the service contract for the following:

- To trigger automatic periodic billing
- To determine whether a service request made by a customer is covered by the service contract
- To determine whether a cancellation request from a customer is valid
- To trigger follow-up activities before the validity period of the service contract runs out


Features

A service contract consists of header data and item data. A service product can be stipulated for each [service contract item](#) and the customer can claim this product over a certain period at a specific price.

Different types of services can be stipulated as service products in a service contract item:


- An individual service (such as a hotline)
- A complex service that is made up of multiple services and materials, such as a car inspection
- A service limited according to value or quantity (such as ten free-of-charge telephone consultations after buying software, covering costs up to USD 300)

Stipulation of Individual Services in the Service Contract

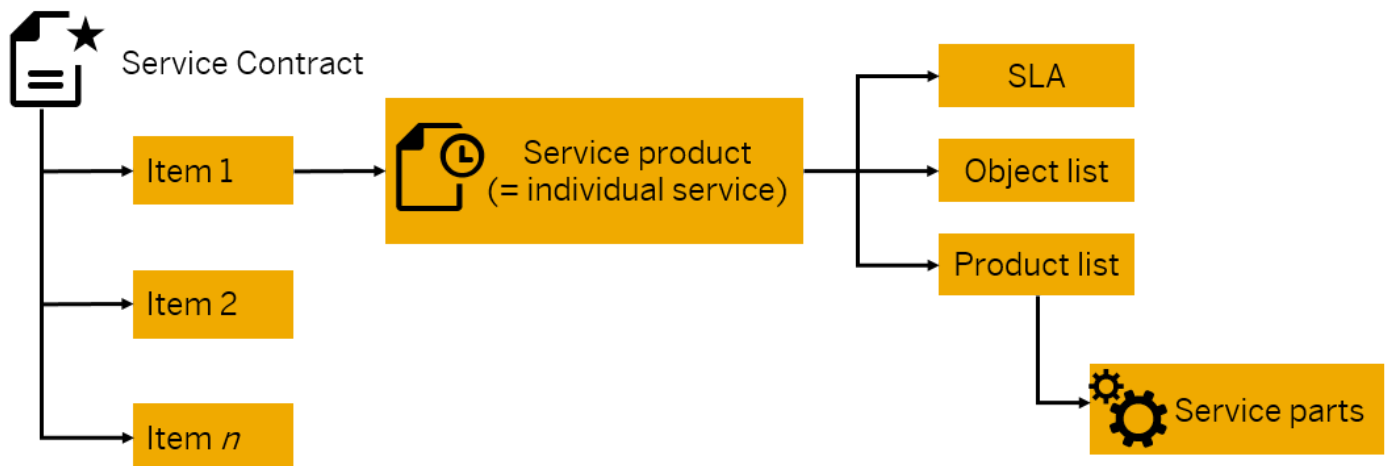

You stipulate a specific service as a product in a service contract item. If service parts are required, for example, when exchanging a computer hard drive or changing tires on a car, enter these in the [product list](#) for the contract item.

Stipulation of Service Packages in the Service Contract

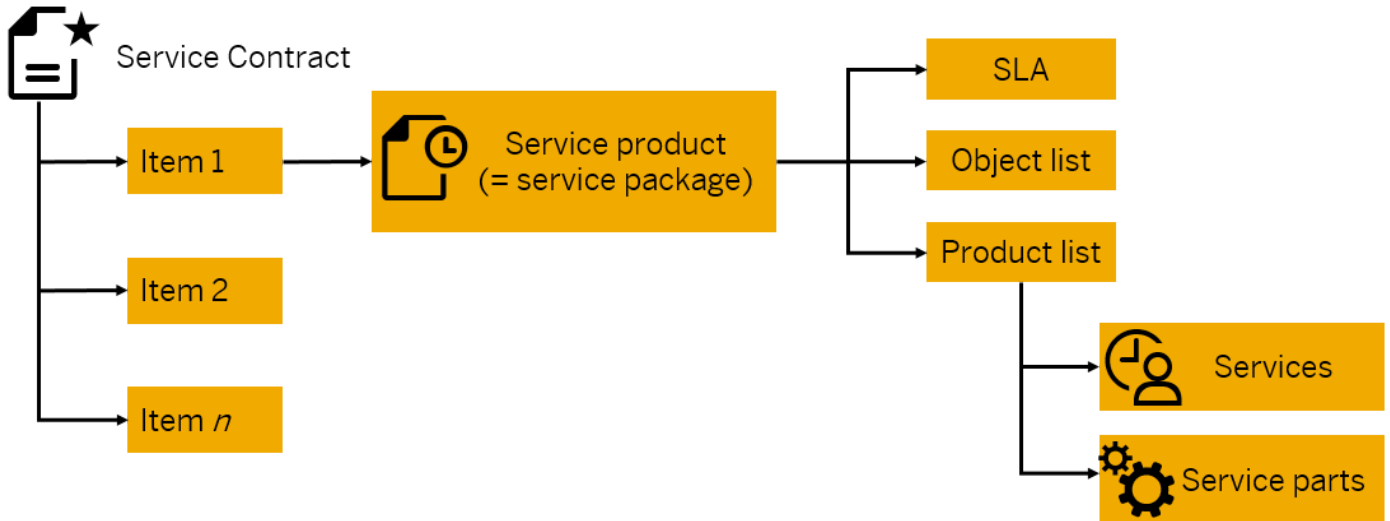

In a service contract item, you stipulate a complex service package consisting of several individual services and service parts. All of the services and service parts contained in the service package are entered in the [product list](#) belonging to the contract item.

Stipulation of Services Limited to Value or Quantity in the Service Contract

In a service contract item, you stipulate services or service packages with a specific target quantity or particular overall value. For more information, see [Service Contract Item \(Value/Quantity\)](#).

i Note

You can enter contract items with services that are limited according to value or quantity only in service contracts.

Tax Destination Country/Region

You can use the tax destination country/region in the service contract header to specify which country/region's tax rate is applied to the entire service contract. Generally speaking, the tax destination country/region is derived from the ship-to party at header level. You can always set a tax destination country/region manually if the derived one doesn't meet your business requirements. Whenever the ship-to party at header level changes, the system derives a tax determination country/region again accordingly.

Billing Relevance for Related Transactions

When single item accounting is used in your system, you can maintain billing relevance for related transactions on service header and item, and the dynamic item processor (DIP) profile on service contract item. Billing relevance determines whether and how transaction items of a particular item category are processed in billing and revenue recognition, while DIP profile can be copied to the maintenance service order (document type: MSO). When you create a new service contract, the items automatically inherit the header billing relevance for related transactions until you change the values manually.

→ Remember

These fields are only valid and displayed when item-based accounting is used. In this type of accounting, service transaction items are recognized as account assignment objects to which costs and revenues are posted. For more information about item-based accounting, see Chapter 3.6 [Enable Item-Based Accounting for Service Management Controlling](#).

Situation Handling

- Service Contract Due to Expire Soon

This app uses Situation Handling to inform specific users about service contracts that are due to expire within a predefined number of days. Using an automatic notification, you get a brief overview of the critical service contract, including a service contract item to expire next. You can then directly navigate to the service contract in question to review it and take appropriate action, such as renegotiating a contract or enabling auto renewal of a particular service contract item. If you renew a contract item manually, a new contract item is created. You can then set the situation to resolved and the renewed contract item to completed. This allows the system to exclude this item from the next check.

- Service Contract Item Due to Expire Soon

This app uses Situation Handling to inform specific users about service contract items that are due to expire within a predefined number of days. Using an automatic notification, you get a brief overview of the critical service contract item to expire next. You can then directly navigate to the service contract in question to review it and take appropriate action, such as renegotiating a contract item or enabling auto renewal of the service contract item. If you renew a contract item manually, a new contract item is created. You can then set the situation to resolved and the renewed contract item to completed. This allows the system to exclude this item from the next check.

- Service Contract with Zero Billing Value

This app uses Situation Handling to inform specific users about service contracts that contain one or more billing request lines with a billing value of zero. Using an automatic notification, you get a brief overview of the critical service contract, including one or more billing request lines with a billing value of zero. You can directly navigate to the service contract in question to review it and take appropriate actions, such as maintain the price in the corresponding product. This allows you to proactively focus on and address such critical service contracts with a billing value of zero.

You can also use the [My Situations](#) app to display your open situations in an overview table and close situation instances by manually setting the appropriate status.

i Note

To use the [My Situations](#) app, you need an additional SAP role `SAP_BR_EMPLOYEE_SITUATION`.

For more information, see [Situation Handling](#).

Related Information

[UI Integration With Situation Handling](#)

Service Contract Item

Definition

The parts of a service contract in which the [services](#) to be performed for the customer under service contract conditions are defined.

Prerequisites

You have checked whether the following types of service contract items meet your business requirements:

- Service contract items (SCN)
- Service contract items for price adaptation (SCNA). For more information, see [Price Adaptation for Service Contracts](#).
- Service contract items for ad hoc billing (SCNB). For more information, see [Ad Hoc Billing for Service Contracts](#).

- Service contract items for a certain target quantity or a certain total value (SCNC). For more information, see [Service Contract Item \(Value/Quantity\)](#).

i Note

- In Customizing, the item object type **Service Contract Item** must be assigned to the item category of the contract item in the service contract.
- Ensure that the products which are used in service contract items are assigned to the item category group SRVP or SCNP in your product master.

Copy from Template

You can add predefined items to a service contract by choosing **Copy from Template** when editing items. When you copy from a template, the system transfers service contract item data such as:

- Item number
- Higher-level item
- Product ID
- Product
- Quantity
- Unit
- Item category
- Service profile
- Response profile

You can create and display templates for service contract items. These templates contain reusable sets of service-related data but do not include information related to actual service execution. Only templates with the status Released are available for selection when copying to a service contract. For more information, see [Manage Service Contract Templates](#).

Structure

Maintenance of the following data is relevant at item level:

- Service contract item details

For service contracts, you can maintain, for example, the service agreements that define the characteristics of the service product in the contract items. A range of parameters, such as response time or availability time can be used as such concrete service agreements. For more information, see [Service Level Agreements \(SLA\)](#).

Here you can also maintain a rejection reason for a service contract item. When you enter a rejection reason, the system automatically updates the life cycle status of the item to **Completed**. If you remove the rejection reason, the system automatically updates the life cycle status to **In Process**.

- Object list

Here you assign objects to which the service product that is stipulated in the contract item refers. The object list can contain products, equipment, and functional locations.

For more information, see [Object List](#).

- Product list

Here you enter the services and service parts that the service product is to contain, as stipulated in the contract item. The product list can contain products, product categories, or product ranges (partner/product range).

For more information, see [Service and Product List](#).

- Released order list

If services or service parts entered in the product list are claimed as part of various documents, such as service orders or service order quotations, the system records these in the released order list. You can choose a document to navigate to its respective overview page.

- Billing plan

Billing plans in the contract items control periodic billing and ad hoc billing. You can use periodic billing plans to schedule individual dates for the billing of service contracts, independent of the provisioning of the service. You can use ad hoc billing plans to schedule billing dates and values freely. Depending on the billing request lines in billing plans and Customizing settings, billing document requests (BDRs) are generated and transferred directly to the billing due list in Sales Billing.

You can use the services rendered date in billing plan to specify the date on which the services were provided. The system uses this date for tax calculation per billing request line. By default, the system uses the billing date as the services rendered date.

For more information, see [Periodic Billing Plans for Service Contract Billing](#) and [Ad Hoc Billing for Service Contracts](#).

You can generate billing document requests on the [SAP Easy Access](#) menu, under [Service](#) > [Service Processes](#) > [Generate BDRs for Service Contracts](#) . For more information, see the documentation for the program [Generate BDRs for Service Contracts](#) in the system.

For more information about sales billing, search for *Sales Billing* in the relevant version of [SAP S/4HANA](#) on SAP Help Portal.

- Auto renewal

You can enable auto renewal for a service contract item so that the item is renewed automatically, according to the renewal period and the contract extension that you specify. In the renewal period field, you define how long before the end of the contract you would like the contract to be automatically renewed. In the contract extension field, you define for how long you want to extend the contract. Note that if you cancel the service contract item that has been set for auto renewal, the system removes auto renewal automatically.

For more information, see [Auto Renewal of Service Contract Items](#).

- Variant configuration

When you select a configurable product to be a service contract item, you can choose the specific variant that you want. In the standard system, condition type VASE and account key ERL are predefined for configurable products in the pricing procedure for service contract (A17020). For more information about configurable products, see [Products](#).

- Price agreement

You can offer customers lower prices for services and service parts by defining prices in price agreements. For more information, see [Price Agreements in Service Contracts](#).

- Maintenance plans

The maintenance plans that reference a service contract item are displayed in the service contract item. For more information, see [Creation of Maintenance Plans](#).

Alternatively, you can provide reference data in a service contract item. The system uses this data to automatically create a new maintenance plan when the service contract item is set to the **released** status. Using this method, you can only create time-based single cycle maintenance plans. You must specify the following reference data:

- Maintenance item: You specify an existing maintenance item, because the system uses it as the data source to create the new maintenance item in the new maintenance plan. The maintenance item must contain a service order type. Together with the provided maintenance item, the relevant maintenance plan and service order type are also displayed for your reference.

i Note

One or more objects must already exist in the object list of the service contract item before you can specify reference data. These objects are the source of technical objects in the new maintenance plan.

- Service order template: You specify an existing service order template so that the system uses it to create the new maintenance item.

i Note

After a maintenance plan is created in this way or is assigned to a service contract, any relevant data change in the service contract is not updated to that maintenance plan. You can manually update the data in the maintenance plan if your business requires an update.

- Billing relevance for related transactions

When single item accounting is used in your system, you can maintain billing relevance for related transactions on service header and item, and the dynamic item processor (DIP) profile on service contract item. Billing relevance determines whether and how transaction items of a particular item category are processed in billing and revenue recognition, while DIP profile can be copied to the maintenance service order (document type: MS0). When you create a new service contract, the items automatically inherit the header billing relevance for related transactions until you change the values manually.

→ Remember

These fields are only valid and displayed when item-based accounting is used. In this type of accounting, service transaction items are recognized as account assignment objects to which costs and revenues are posted. For more information about item-based accounting, see Chapter 3.6 [Enable Item-Based Accounting for Service Management Controlling](#).

Related Information

[Billing](#)
[Periodic Billing Plans for Service Contract Billing](#)

Differences in Item Categories

Learn about different properties in item categories. Note that the service contract item (value/quantity) is the same as the service contract item regarding the compared properties.

The following table compares the properties of different contract item categories.

Property	Service Contract Item for Ad Hoc Billing	Service Contract Item for Price Adaptation	Service Contract Item
Price Details in item	Available to add, edit, and delete	Not available	Available to add, edit, and delete
	i Note		i Note

Property	Service Contract Item for Ad Hoc Billing	Service Contract Item for Price Adaptation	Service Contract Item
	For a contract item created by copying, you must carry out repricing to activate the condition type Cumulation Condition (PCUM).		For a contract item created by copying, you must carry out repricing to activate the condition type Cumulation Condition (PCUM).
Price Details in billing request line	Not available	Available to add, edit, and delete	Available only for display
Price Total in item	Available	Not available	Available
Flexible pricing date	Not available. No need of price determination.	Available with the following options: - Item pricing date - Billing date in billing request line - Settlement start date in billing request line - Settlement end date in billing request line	Not available, only Item Pricing Date applies.
Auto renewal	Not available	Available	Available
Change processes	Only changing the sold-to party is available.	Available	Available
Services rendered date	Editable. By default, the system uses the billing date as the services rendered date.	Editable. By default, the system uses the billing date as the services rendered date.	Display only. The system always uses the billing date as the services rendered date.

Related Information

[Service Contract Item](#)

[Ad Hoc Billing for Service Contracts](#)

[Price Adaptation for Service Contracts](#)

[Service Contract Item \(Value/Quantity\)](#)

Service and Product List

Use

Services are all types of services that you can define in a service contract, such as customer service, technical installation, training, and consulting.

Integration

If a customer wants to claim a service product, the service employee creates a service order. If this has been set up in Customizing, the system determines existing valid service contract items and proposes them to be assigned.

After the corresponding service contract item has been assigned, the services and service parts from the relevant product list are automatically proposed for transfer into the service order.

The service employee selects one or more entries from the list that apply to the service order. For each service or service part that is selected, an item is automatically created in the service order. The product data is copied into this item.

For more information, see [Service Contract Determination](#).

Features

Services appear in the system as products of type service. You can define one product per contract item.

Even a complex service package that contains several individual services and service parts can be defined as a product in a service contract item.

In the **product list** belonging to a service contract item, services and service parts are entered that are in the service product, which is defined in the contract item. These services and service parts can be claimed in the course of the subsequent service order processing with reference to a service contract.

The product list can contain products and product hierarchies. It allows the following:

- Product proposal, a special value help that displays a list of services and service parts associated with the source product that you have chosen. You can select one or more products from the list and the system automatically adds them to the product list. From the following source types can you choose a source product to display:
 - The product that is specified as the current service contract item
 - Reference objects (products or equipment) that you have defined in the object list of the current service contract item

i Note

The lists of associated services and service parts must be modeled as Bills of Material (BOMs) by users who have the BOM Engineer (SAP_BR_BOM_ENGINEER) role or as equipment BOMs by users who have the Maintenance Planner (SAP_BR_MAINTENANCE_PLANNER) role. The BOM usage must be S (**Service Management**). For more information, see [Maintain Bill of Material](#).

- The proposal of services and service parts in other service transactions (see [Service Contract Determination](#))
- The function to call them from [Service Contracts](#)

i Note

Services and service parts entered in the product list must exist in the system as products.

There is input help in the object list in the form of a **Proposal for Product List** button. For more information, see [Object List](#).

Example

You define the service package **Standard Winter Check for Car** in a service contract item. This includes the following services:

- Tire check/switch (switch to snow tires, provided by customer, if necessary)
- Headlight check
- Battery check

- Replacement of windshield wipers

It includes the following service part:

- One set of windshield wipers

You enter the listed services and service parts in the product list for the contract item.

Service Level Agreements (SLA)

Use

You and the customer can use the SLA to make an agreement regarding the methods used to render a guaranteed service.

The SLAs define the attributes (such as content, scope, and means) for the service products (such as maintenance or hotline) that have been agreed on with the customer. The SLAs that are available in the standard system are the service profile and the response profile.

❖ Example

Examples of parameters within an SLA include the following:

- Response profile (the technician's response time, in other words, the time by which the technician must start the service laid down in the service transaction item, as well as the time period in which the service must be completed)
- Service profile (time period in which the services that were defined can be provided)

Integration

Default Values in Master Data

The **Service Levels** assignment block is available in the following master data and can be used in SLA determination to assign the correct service profile and response profile to service request transactions such as service requests.

- Service contracts
- Service product items and products
- Business partners (sold-to party)
- Service organizational units

In the **Service Levels** assignment block, you can specify values for the above-mentioned SLA parameters, service profile, and response profile.

Pricing

An SLA influences pricing and the business transactions in Service. Therefore, for example, the monthly price of a service can change depending on the response time defined. SLAs also influence date calculation in the service process.

Escalation Management

If the services agreed on in the SLA cannot be performed within the time specified, a predefined escalation process is started.

SAP delivers a standard procedure for escalation management that you can use and enhance if required. You can make settings for escalation management in Customizing for [Service](#), under [Transactions](#) > [Settings for Service Transactions](#) > [SLA Escalation Management](#) .

❖ Example

An escalation for a missed deadline could proceed as follows:

- The responsible processor is informed per e-mail when the **first response time** is exceeded and the transaction is **still not** in process.
- The responsible department manager is informed per e-mail when the first response time is exceeded by two hours and the transaction is still not in process.
- The responsible service manager is informed per e-mail when the first response time is exceeded by eight hours and the transaction is still not in process.

A similar escalation could occur if the **completion date** is exceeded and the transaction is **still** in process.

Features

By default, you can use the following SLA parameters:

- Service profile
- Response profile

Activities

You maintain SLA parameters on the [SAP Easy Access](#) menu, under [Service](#) > [Service Processes](#) > [Maintain Availability and Response Times](#) .

In the service contract items, you can select values for the SLA parameters.

Response Profile

In the [Maintain Availability and Response Times](#) transaction, you can use any combination of the following indicator keys to create as many time frames with duration and time unit as you want:

- Category
- Priority
- Catalog
- Code Group
- Code

In this way, you can define, for example, a duration to first response, a duration to completion, and time frames that can be established in between, such as:

- Time until the arrival of a technician at the customer site
- Duration of repair
- Downtime of machines at the customer site

To maintain the response times, choose a key combination in the transaction by selecting the required line and switching to the view for response times. There you can enter any number of time frames for the selected key combination.

Choose a duration of time for each period that was created in Customizing for date management under [Service > Basic Functions > Date Management > Define Date Types, Duration Types and Date Rules](#). Specify the duration and time unit for these.

When you maintain service products in the product master, you can enter default values for the response profile in the assignment block [Service Levels](#).

❖ Example

You receive a malfunction report from a customer on Monday at 10:00 a.m. and a service order with priority 1 is created.

In the response profile, a duration to first response of two hours and a duration to completion of eight hours is defined for service processes with priority 1. The standard service profile is defined in the service profile, which contains the following availability times: Monday to Friday from 8:00 a.m. to 5:00 p.m.

The following times/dates result from this: First response time 12:00 noon, completion time 9:00 a.m. on the following day.

This means you must have responded to the malfunction report by 12:00 noon on Monday, for example, by calling the customer to discuss or clarify the problem. The transaction must be completed by Tuesday at 9:00 a.m., for example by a technician on-site.

Service Profile

You can stipulate a service profile for each contract item during the maintenance of service contracts.

When you maintain service products in the product master, you can enter default values for the response profile in the [Service Levels](#) assignment block on the [Service](#) page. You can overwrite the default values in the service contract item in which the service product was stipulated.

❖ Example

You define a standard service profile with the following availability times: Monday to Friday from 8:00 a.m. until 5:00 p.m. Central European Time (CET).

You assign the service profile [Weekend](#) to the service product [Weekend Hotline](#), in which you define Saturday 8:00 a.m. CET to Sunday 7:00 p.m. CET as availability time.

Related Information

[Service Level Agreement \(SLA\) Determination](#)

Service Level Agreement (SLA) Determination

Use

You can use service level agreement (SLA) determination to assign the correct service profile and response profile to a service transaction, for example, service requests and incidents. This ensures that the service team processes, for example, the incident according to the agreed SLA.

Integration

You can assign SLA information to the following master data in the **Service Levels** assignment block, unless otherwise indicated.

- Products (defined as service products and identified as being part of a service contract)
- Accounts with role **Sold-To Party**
- Service organizational units (**Service Profile** and **Response Profile** are added as attributes)

Prerequisites

- You have defined SLA profiles in the **SAP Easy Access** menu under **►Service ►Service Processes ►Maintain Availability and Response Times ►** (transaction CRMD_SERV_SLA).
- For the master data to which you want to assign SLAs, you have assigned a service profile and a response profile in the **Service Levels** assignment block in the WebClient UI in Service .
- You have defined an SLA determination procedure with an access sequence in Customizing for **Service** under **►Transactions ►Settings for Service Requests ►Define SLA Determination Procedures ►**. The access sequence tells the system where and in what order to find the appropriate SLA information.
- You have assigned the SLA determination procedure to a transaction type in Customizing for **Service** under **►Transactions ►Basic Settings ►Define Transaction Types ►** in the Customizing header for the transaction category **BUS2000116 Service Process**.
- You can also use the **Business Add-In for SLA Determination** to define your own logic for determining SLAs. You can find this BAdI in Customizing for **Service** under **►Transactions ►Settings for Service Requests ►Business Add-Ins ►**.

Features

SLA determination uses an access sequence to tell the system where and in what order to find the appropriate SLA information. The system finds the first source identified in the access sequence that has both a service profile and a response profile and assigns the profiles to the service transaction item. Examples of SLA sources include service contracts, service product items, and service organizational units.

More Information

[Service Level Agreements \(SLA\)](#)

Object List

Use

You can enter equipment, products, and functional locations in the object list for which the contractual services defined in the service contract item can be claimed.

Integration

Business Transactions in Service

The object list is used by business transactions in Service to determine service contracts. Provided that this type of contract determination is set up in Customizing, the service contract items with an object list containing the reference object are

determined when a business transaction is created. For more information, see [Service Contract Determination](#).

Features

Assign Objects

In the object list, you can enter the objects that belong to a contract item and for which the contractual services defined in the service contract item can be claimed. Equipment, products, and functional locations can be used, for example, as elements of this object list.

i Note

Whether or not the object list is displayed depends on the item category that is assigned to the service product in the service contract item. If, for example, the item category is one that was defined for service contracts, the object list appears.

Display Proposal for Product List

The button **Proposal for Product List** displays a list of the associated services and service parts for the reference object that you selected in the object list of the service contract item. From this list, you can transfer them into the [product list](#).

Check for Other Service Contract Items

You can check if other service contract items already exist for the object in the object list. If this is the case, the system issues a warning message. You can activate this check by using an implementation of the BAdI CRM_ORDPRP_I_BADI, method CRM_ORDPRP_I_CHECK.

Ad Hoc Billing for Service Contracts

Get an overview about ad hoc billing.

Use

Ad hoc billing is a structured method of service contract billing that doesn't conform to periodic or milestone billing plan rules, but instead enables you to define billing values and dates freely.

Prerequisites

1. You have made the necessary settings for ad hoc billing plans in Customizing under **Service > Transactions > Basic Settings > Billing Plan > Define Billing Plan Types**. In the **BilPlanUse** field, choose **Ad Hoc Billing**.
2. The billing plan type **Ad Hoc Billing** is assigned to the relevant item category. You do this under **Service > Transactions > Basic Settings > Billing Plan > Assign Billing Plan Type to Item Category**. The predefined Customizing settings include the transaction type SC and the item category SCNB.

Features

When you create a service contract item, you can choose a product and assign it to the item category **SC Itm (Ad Hoc Bill)** (SCNB), which is intended to be used exclusively for ad hoc billing.

i Note

Be aware that you can't switch to other item categories once you have selected the item category for ad hoc billing.

Ad Hoc Billing Plan

You can use an ad hoc billing plan to define the dates on which billing is to occur and the value that is to be billed. For each billing date, the system generates one billing request line. In addition, you can optionally specify the settlement period that an individual billing request line covers.

After you create a billing request line for ad hoc billing, processing of billing request lines and the subsequent billing process is the same as for the periodic billing plan.

i Note

You must schedule batch jobs to schedule the periodic creation of billing document requests on the basis of open billing request lines. You can do this on the [SAP Easy Access](#) menu, under [►Service►Service Processes►Generate Billing Document Requests►](#). For more information, see the section *Billing Request Lines and Billing Document Requests* under [Periodic Billing Plans for Service Contract Billing](#).

Billing of Remaining Net Value

This feature enables the system to automatically generate a billing request line with all the remaining net value of the service contract item. The billing date of this billing request line is set to the current date by default.

Billing Finalization

Ad hoc billing allows a total billing value higher, lower, or equal to your item net value. Therefore you must set the [Billing Plan Is Finalized](#) indicator to let the system know that the billing plan is finalized, namely that no more billing value is to be planned. After you set the indicator, the billing status of the ad hoc billing item is set to completely billed when all the billing request lines in the billing plan are invoiced.

Item Fixed Price

Unlike the service contract items, whose prices are calculated based on the contract validity period, ad hoc billing items can be set to a fixed price by using a price condition type of manual item amount (PMV1). By doing so, the net value of the ad hoc billing item is always fixed at the manual item amount that you specify, despite the change to its validity period.

Billing Status at Service Contract Item Level

You can always view the billing status at service contract item level. It represents the overall status of all billing request lines that the billing plan of the item contains. The following table explains each status.

Billing Status at Item Level

Billing Status	Meaning
Not billed	Initial status when a billing plan is created. No billing request lines in the billing plan have been invoiced.
Partially billed	Some billing request lines in the billing plan have been invoiced. Note that for ad hoc billing items, the partially billed status is displayed even when all the billing request lines have been invoiced, but the ad hoc billing plan is not finalized.
Completely billed	All billing request lines in the billing plan have been invoiced, under the condition that the ad hoc billing plan is finalized.

Related Information

[Service Contract Item](#)

[Differences in Item Categories](#)

[Periodic Billing Plans for Service Contract Billing](#)

Price Adaptation for Service Contracts

This is the business context information about price adaptation for service contracts.

Use

For long-term service contracts, prices of individual items are always determined once and then usually remain fixed throughout the entire contract duration. These prices are determined as part of the agreement you have made with your customers. For scenarios that require flexible pricing, price adaptation for service contracts offers two methods of achieving this: One is to set a pricing date rule within a billing request line as the pricing date of a service contract item, so that varying prices can be determined according to varying pricing dates. The other method is to maintain the prices of service contract items manually at billing request line level.

Prerequisites

You must have enabled price adaptation in Customizing under ► [Service](#) ► [Transactions](#) ► [Basic Settings](#) ► [Define Item Categories](#) ►

Features

When you create a service contract item, you can choose a product and assign it to the item category [SC Itm \(Pri. Adptn.\)](#) (SCNA), which is intended to be used exclusively for price adaptation.

i Note

Be aware that you can't switch to other item categories once you have selected the item category for price adaptation.

Flexible Pricing Date for Service Contracts

You can define a pricing date rule that triggers a determination of the price in a service contract item. You have the following pricing date options to determine your prices under ► [Billing Plan](#) ► [Settlement Rules](#) ►:

- Item pricing date (for fixed pricing date)
- Billing date in billing request line
- Settlement start date in billing request line
- Settlement end date in billing request line

To set up a default pricing date, go to Customizing under ► [Service](#) ► [Transactions](#) ► [Basic Settings](#) ► [Billing Plan](#) ► [Define Billing Plan Types](#) ► [Billing Plans](#) ► [Plan Lines](#) ►. Note that the customized default pricing date does not apply to item categories that do not use price adaptation. It always uses the item pricing date.

i Note

When price adaptation runs, it pulls prices from condition records that are determined depending on the pricing dates you have defined. Make sure that condition records have been maintained with the prices that are valid throughout the period between your settlement start and end dates.

Manually Maintaining Prices at Billing Request Line Level

Under the assignment block **Billing Plan**, you can maintain the prices of service contract items manually at billing request line level.

Billing request lines are generated according to the settlement period that you have set for the periodic billing plan, such as monthly. Therefore, if you change the settlement period (for example, from quarterly to monthly) after you have manually maintained the prices or surcharges, the system doesn't populate these prices or surcharges to the billing request lines that are generated as a result of the settlement period change. For these newly generated billing request lines, you can maintain the prices and surcharges manually.

You can also use fast entry to quickly make manual changes to basic prices across settlement periods.

You cannot change prices in the billing request line after the billing document is generated.

Example

As part of a service contract with customer A, company B offers three-year maintenance of a newly installed machine. Lower maintenance fees are charged in the first year because the machine normally stays functional during this period, with little chance of failing. After the first year, fees increase. The conditions in pricing are maintained accordingly. You, as the service manager of the company, now create a service contract item in the system:

1. Choose the item category for price adaptation.
2. In the billing plan, set the billing date for the billing request as the pricing date.

The prices are automatically determined according to the validity periods in the condition records: lower in the first year; higher in the second and third years. This is shown in the price details of the respective billing request lines.

After one year, customer A requests to lower the maintenance fee for the second year. After negotiation, company B agrees with customer A on reducing the fee for the second year, but not higher than the third year. In the system, you now check the service contract item and manually change the prices in the billing request lines for the second year.


Service Contract Item (Value/Quantity)

Definition

A specific form of service contract item in which the defined service products are restricted with regard to a certain target quantity or a certain total value.

Use

As with the service contract item, an agreement is made between customer and provider that the customer can claim service products over a specific period at a specific price. In the case of the service contract item (value/quantity), however, the defined service products are restricted with regard to value or quantity.

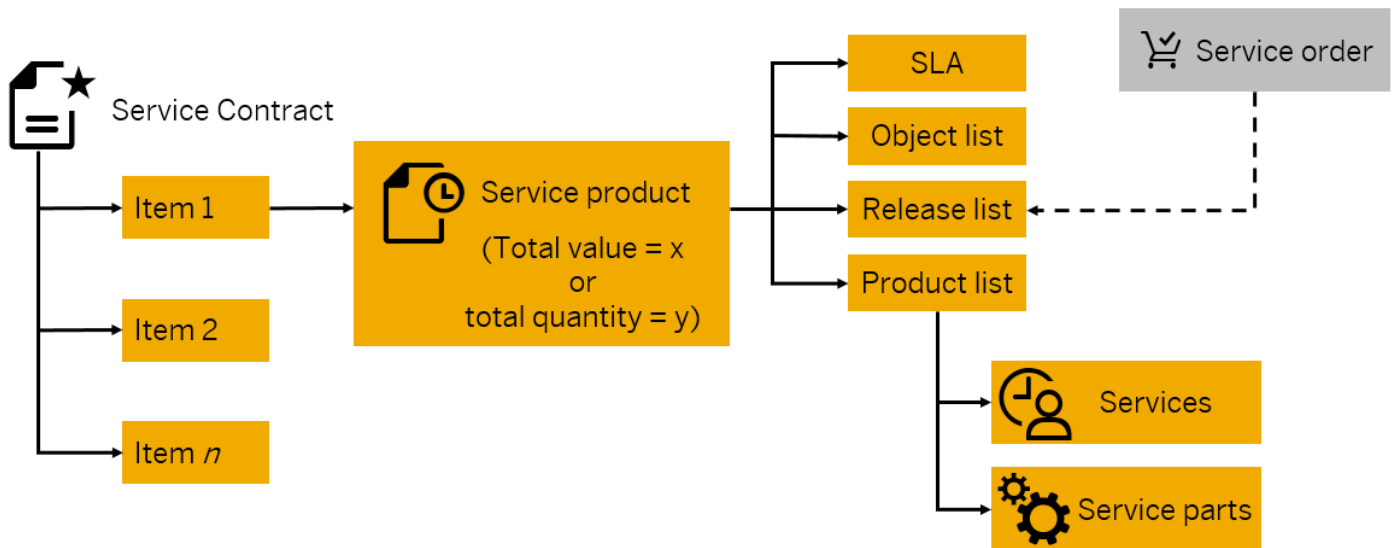

Services and service parts are entered in the product list belonging to the contract item.

The customer can claim (release) products from the product list, if required, whereby any quantity or value can be selected. The service employee creates a service order in the system for this purpose.

The system enters the released products and their quantity or value in the release list. In this way, the service employee can use the release list to trace the quantity and the value of the products that have already been claimed.

In Customizing of the item categories, you can establish:

- Whether an agreed service product can be claimed only until the total value or the target quantity has been reached
- Whether the target quantity or the total value can be exceeded only the first time
- Whether the target quantity or the total value can in principle be exceeded

For more information, see the [Integration](#) section.

Structure

Service contract items (value/quantity) include:

- Service quantity items based on a certain target quantity, such as the use of a hotline or a repair service up to 10 times
- Service value items based on a certain target value, for example service parts and services for a total of USD 500
- Combinations of service value contracts and service quantity contracts

Integration

Customizing the Transaction Type

In Customizing for the item categories, you can set whether or not the target quantity or value can be exceeded.

1. Make these settings in Customizing for [Service](#) under [Transactions](#) > [Basic Settings](#) > [Define Item Categories](#).
2. Choose the required item category. Ensure that the item object type [Service Contract Item](#) and the item quantity/value [Service: Target Value and Quantity](#) are assigned to the item category.
3. Go to the activity [Assignment of Business Transaction Categories](#) and choose [Sales](#).

4. Go to the activity [Customizing Item](#) and choose a completion rule in the set type [Contract Data](#) in the [Completion](#) field.

Example

A software firm has tailored a service package especially for customers who have just introduced the software. This package includes a check shortly before the go-live date, three telephone consultations, and a system check.

The firm offers the package as a service contract and sells it to the customer upon request, together with the software. If the customer enters into such a contract and claims a telephone consultation from the contract, the service employee then creates a service order with reference to the contract.

The system enters the service order and the service product [Telephone Consultation](#) (with a quantity of 1) into the release list, to signify that the service product has been claimed. This reduces the remaining number of consultations to 2. This process is repeated until all the consultations agreed upon have been "used up".

Price Agreements in Service Contracts

Gets an overview of price agreements in service contracts.

Use

Based on price agreements you can offer customers lower prices for services and service parts.

Integration

Price agreements rely on the determination of relevant pricing information from the condition records for service contracts.

Features

You can create, edit, delete, and display price agreements at service contract header and item levels.

You can use the following condition types that are intended for service contracts:

Header Level: Discount for service contract (DSC3)

Item Level

- Material price in service contract (PSC0)
- Material discount in service contract (DSC1)
- Group discount of material price in service contract (DSC2)

When service contract items are assigned to service transaction items after service contract determination, prices from price agreements are applied to those items. In cases where a header-level price agreement is available, the prices it defines are also applied to the service transaction items. To ensure that the price agreements work in your service transaction, you must include the above condition types in the pricing procedure of your service transaction.

Copying of Price Agreements

When you copy a service contract or a service contract item, or the system performs one of these actions (for example, through a change process), existing price agreements are also copied.

To set up the copying of price agreements for your service contract items, you make the setting in Customizing for **Service** by choosing **► Transactions ► Basic Settings ► Copying Control for Business Transactions ► Define Copying Control for Item Categories ►**. You can select the item category of your service contract items, double-click to enter the **Copy Item Categories – General Control Data** view, and select the **Price Agreements** checkbox.

Display Product List Proposal

The button **Product List Proposal** displays a list of products that are relevant in the product list of the service contract item. From this list, you can transfer them into the condition records.

How to Define Price Agreements in the Back-End System

You can create the relevant condition records by using transaction code **VK11**. To change and display condition records, use transactions **VK12** and **VK13** respectively. To maintain the condition records, you must use the SD document category **CSCT** for price agreements in service contracts.

To customize your own condition types for price agreements in service contracts, ensure that your condition tables include the following fields:

- **SD Document Category**, for both header and item level
- **Transaction ID**, for both header and item level
- **Item Number in Doc.**, only for item level

Maintain the contract price or discount for the entire service contract or individual service contract item. When the system copies data from service contract to other service transaction items after service contract determination, prices from price agreements are applied to those service transaction items.

i Note

- To use the condition types that you've customized, you must add them to the pricing procedure of the relevant service transactions.
- Condition types that you've customized can't be displayed in the price agreements in the front-end user interface.

How to Use Custom Condition Types for Your Price Agreements

If you want to use custom condition types for price agreements, you must make the necessary settings in the Customizing activity **Define Price Maintenance Scenarios** under **► Sales and Distribution ► Basic Functions ► Pricing ► Price Maintenance ►**. Afterwards, you select the respective scenarios in the following Customizing activities under **► Service ► Transactions ► Basic Settings ►**:

- For the service contract header, use the Customizing activity **Define Transaction Types**
- For the item level, use the Customizing activity **Define Item Categories**

Related Information

[Service Contract Determination](#)

[Pricing](#)

Service Contract as a Root Item in a Financial Hierarchy

Use

A financial hierarchy in revenue recognition for service contracts is a structured system designed to manage and control costs and revenue across multiple levels of related documents, such as service contracts, service orders, and maintenance orders. This hierarchy ensures consistency and accuracy in financial reporting and revenue recognition by applying specific rules and indicators at the root level and propagating them to subordinate levels.

Using a service contract as a root item in a financial hierarchy helps streamline revenue recognition, with all revenue from service orders and maintenance tasks aggregated and recognized at the service contract level, ensuring comprehensive financial reporting. Lower nodes in the hierarchy do not independently trigger revenue recognition, maintaining consistency across the contract. Similarly, costs incurred throughout various service activities are managed efficiently, avoiding independent settlement at lower nodes and promoting efficient cost control under the umbrella of the service contract. This approach not only enhances financial accuracy but also facilitates adherence to revenue recognition standards and operational efficiency in service contract management.

Prerequisites

1. You must implement process indicator to distinguish root items (service contracts) from lower nodes (service orders or maintenance orders) in the financial hierarchy, integrating the indicator field into relevant tables and screens for effective hierarchy control.

This can be achieved by enabling **Root Item in Financial Hierarchy** in Customizing under **Service Transactions > Basic Settings > Define Item Categories** for service contract business transaction category.

2. You must integrate Service with Financial Accounting and Controlling. For more information, see [Setting Up Item-Based Accounting](#)
3. You must set up revenue recognition methods that differentiate between root items and lower nodes, managing revenue postings and recognition keys at the root item level to comply with financial reporting requirements.

Features

When you create a service contract item, you can choose a product and assign it to the item category, which has the root item in the financial hierarchy enabled.

To establish the hierarchy concept, data elements will be created for process indicators that are defined in item categories for service contracts. These indicators will extend from the root document to all associated follow-up documents, ensuring consistency and alignment across the hierarchy. Revenue recognition keys will be exclusively applied at the root item level, the service contract, allowing for aggregating all revenue generated from lower nodes, such as service orders. This centralized approach enhances financial accuracy and simplifies revenue aggregation and reporting. Additionally, costs incurred across various service delivery activities, covering multiple follow-up documents, will be managed and consolidated at the root item level. This consolidation facilitates efficient cost control and comprehensive financial analysis, providing a clear view of financial performance related to service contracts. Using this concept, operations are streamlined, financial standards are maintained, and overall performance in managing service contracts is enhanced.

When you set service contract item as root item in financial hierarchy, revenue recognition uses the cost-based percentage of completion (POC) method. For more information, see [Revenue Recognition Methods for Service Contracts](#).

You can set the account assignment objects of service order items or service contract items to the status **Technically Completed (TECO)**. For more information, see [TECO Status of Account Assignment Objects in Service](#).

You can assign a financial hierarchy service contract item to an unplanned service confirmation item. During technical completion of the service contract item, these follow-up items will be considered, including unplanned item replication from the service confirmation to the service order. For more information, see [Unplanned Items](#) and [Service Planning: Managing Planned Cost and Revenue](#).

You can set the service contract to the status **Completed**, once the service has been finalized. When there are no further costs and revenues expected to be posted to the service contract in this status, you can set the service contract to **Business Completed**. For more information, see [Finalizing the Service Contract](#).

Constraints

Ad Hoc Billing Plan is not supported.

Related Information

[Finance Integration](#)

[Item-Based Accounting](#)

Change Processes

Use

You use this function to make changes to existing service contracts. Each change process has different effects on the follow-on processing of the service contract, in both contract management and accounting.

Prerequisites

You have made the settings for change processes in Customizing for **Service** under **Transactions** > **Settings for Contracts** > **Change Processes**. Here you can follow the **Prerequisites** to set up the required date profile and make settings in **Configure Change Processes** to control the change processes of service contracts.

Features

Change Processes at Header Level

Change processes at header level apply to the entire service contract. You can use the following change processes at header level:

- Change sold-to party
- Contract renewal - entire contract
- Contract renewal - new contract

Change Processes at Item Level

Change processes at item level apply to individual contract items. You can use the following features for the change processes at item level:

- Manual renewal of service contract items
- Automatic renewal of service contract items

i Note

You can't use change processes (entire contract renewal and item renewal) for ad hoc billing items or any contracts containing ad hoc billing items.

Activities

Execute change processes from a service contract

1. Open a service contract and choose **Change Processes**.
2. Select a change process.

After you select a change process, the assignment block **Change Process Parameters** appears and you can make your changes.

3. Choose **Execute Change Process**.

You can check execution results from the **Message Log**.

4. Choose **Back** and save the service contract.

For more information, see [Change Sold-To Party](#) and [Contract Renewal – Entire Contract](#).

Execute change processes from an item

Execute change processes from an item as follows:

- For manual renewal of service contract items, go to your service contract and open an item. Make sure that your item has been set to the released status. Choose **Change Processes** and select **Contract Renewal – One Item Only**. After your selection, the assignment block **Change Process Parameters** appears and you can make your changes. Choose **Execute Change Process**.

For more information, see [Contract Renewal – One Item Only](#).

- You can specify that the duration of a service contract item is renewed automatically as soon as it expires within a certain period.

For more information, see [Auto Renewal of Service Contract Items](#).

Change Sold-To Party

You can use change processes to change the sold-to party for a released service contract. A released service contract is likely to contain not only released service contract items, but also one or more completed service contract items.

Features

- The header level change process is defined in Customizing under the technical name CSLT, with the process type S4CI to create new items in a new service contract.
- The system maintains the original service contract reference in the **Transaction History** and you can also view the newly created service contract there.
- When you select **Release Automatically**, all valid items are released in the newly created service contract.
- Items from the original service contract are retained; terminated items (items already processed by this change process, for example) aren't relevant for the change process.
- After the change process is executed, the end date on the header of the original service contract is set to the effective date. The start date on the header of the new service contract is set to the effective date, while its end date is set to the latest end date of the new service contract items.

i Note

If the specified effective date is out of the contract header validity, the header start and end dates of the original contract are retained after the change process is accomplished.


- Dummy items whose start and end dates are set to the effective date with a zero net value are created after the change process when the following cases occur:
 - If the start date of the service contract is later than or on the effective date, a dummy item is created in the original service contract after the change process is accomplished.
 - If the end date of the service contract item is earlier than or on the effective date, a dummy item is created in the new service contract after the change process is accomplished.

❖ Example

The example service contract in the figure below contains three released items and one completed item. This example shows a typical case in which the effective date for the change process lies where one item ends before it, one item starts after it, and another item intersects it. You can check the details about the contract and contract items before and after the change process in the figure.

Before Change Process Execution

After Change Process Execution

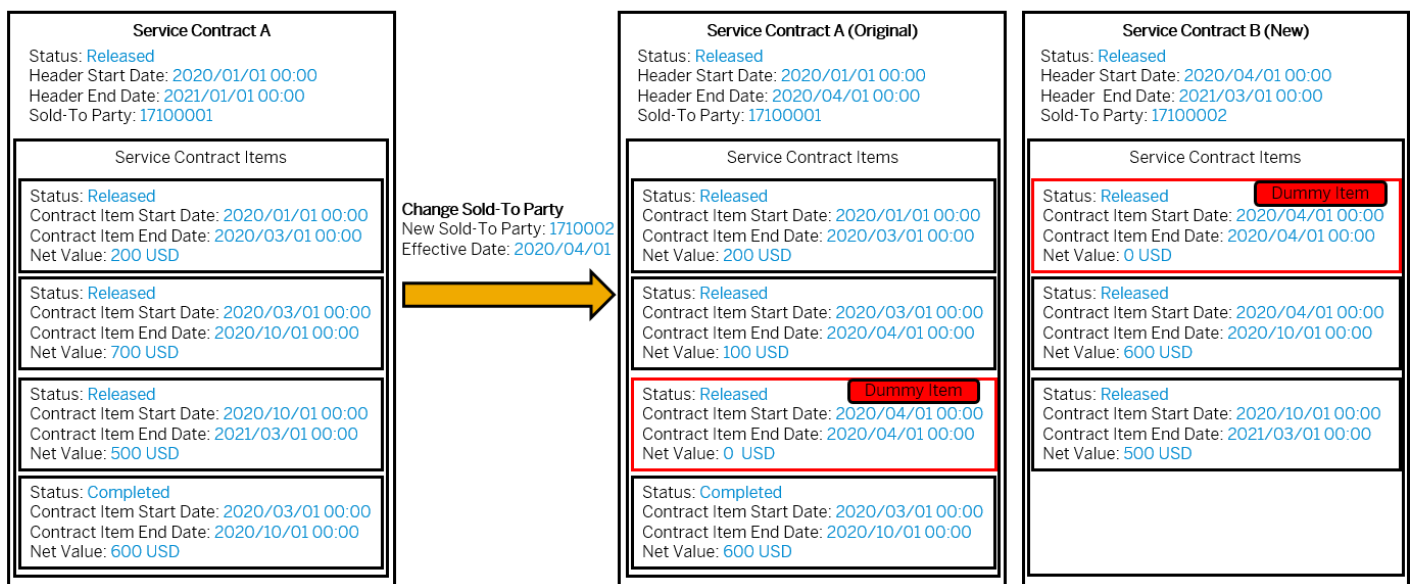

i Note

To execute the change process, make sure that your service contract doesn't contain any errors and that the status is set to **Released**.

Activities

Changing processes for a contract

1. Open a released contract and choose **Change Processes**.
2. Select **Change Sold-to Party** from the **Change Process Selection**.
3. Make the following changes for the process parameters:
 - a. **Date Received** is the current date by default. This date can be changed.

b. **Effective Date** is the start date for a newly created service contract with a new sold-to party.

c. **Earliest Effective Date** is the earliest start date of the released items contained in the service contract.

d. **Latest Effective Date** is the latest end date of the released items contained in the service contract.

4. Choose **Execute Change Process**.

i Note

Executing change process is disabled when change process applicability checks fail in service contract items. For example, an item is open or a service contract contains errors.

5. Choose **Back** and choose **Save** to execute the change process.

6. To find the newly created service contract ID, navigate to the **Transaction History** tab.

Contract Renewal – Entire Contract

You can use this change process to extend the validity period of all items contained in a released service contract. The change process takes place at header level.

Features

- This change process is defined in Customizing under the technical name CRNH. You can use the process type S4CA for a new item in the original contract or S4CI for a new item in a new service contract.
- You can enter a new duration for all valid items and click the execution button to create new items, with the new validity period starting from the validity end of the original items.
- You can view information about the preceding or succeeding item in an item's **Transaction History**.
- When you select **Release Automatically**, all new items in the service contract are released.
- When the change process executes, it skips invalid items from the original service contract. You can find detailed information in the **Message Log**.
- Terminated items (items already processed by a change process, for example), and items with a new validity period that lies in the past, are not relevant for the change process.

i Note

To execute the change process, make sure that your service contract doesn't contain any errors, and that the status is set to released. The items should not be canceled or set for auto renewal.

Contract Renewal - New Contract

You can use this change process to create a new service contract with an extended validity period for all items in a released service contract. The change process takes place at header level.

Features

- This change process is defined in Customizing under the technical name CRNC. It creates new items in a **new** service contract.

- You can enter a new duration for all valid items and click the execution button to create new items within the new service contract. The new validity period starts from the validity end of the original items. The validity period of the new service contract is the earliest validity start and the latest validity end of the new items.
- You can view information about the preceding or succeeding service contract and items in [Transaction History](#).
- When you select [Release Automatically](#), the new service contract and all of the items it contains are released.
- When the change process is performed, it skips invalid items (completed items, for example) from the original service contract. You can find detailed information in the [Message Log](#).
- Terminated items (items already processed by a renewal change process, for example), and items with a new validity period that lies in the past, are not relevant for the change process.

i Note

To execute the change process, make sure that your service contract doesn't contain any errors, and that the status is set to released. The items should not be canceled or set for auto renewal.

Contract Renewal – One Item Only

Use

You can use this function to create a follow-up item in the system when a service contract item ends.

The change process takes place at item level.

Features

- This change process is defined in Customizing under the technical name [BLEX](#). You can use the process type [S4CA](#) for a new item in the original contract or [S4CI](#) for a new item in a new service contract.
- You can enter a new duration for the service contract item and click the execution button to create a new item, with the new validity period starting from the validity end of the original item.
- You can view information about the preceding or succeeding item in the item's [Transaction History](#).
- When you select [Release Automatically](#), the new item in the service contract is released.
- Terminated items (items already processed by a change process, for example), and items with a new validity period that lies in the past, are not relevant for the change process.

i Note

To execute the change process, make sure that your service contract item and its original service contract do not contain any errors and that the status is set to released. The item should not be canceled or set for auto renewal.

Change Quotation as Intermediate Transaction in Change Processes

You can use a change quotation as an intermediate transaction in this change process. This is only allowed when the item has no assigned maintenance plan item. It allows your customer to accept changes to a service contract, and then transfer them back to the service contract after the change quotation is released and accepted.

You can use one of the following process types for change quotations:

- **S4CB**: change quotation is optional in the change process of service contracts and a new item is created in the original service contract.
- **ISTA**: change quotation is mandatory and a new item is created in the original service contract.

You can define a quotation as the change quotation by performing the Customizing activity [Define Transaction Types in Process](#) under [Service](#) > [Transactions](#) > [Settings for Contracts](#) > [Change Processes](#) > [Configure Change Processes](#). In the standard system, solution quotation (SRVP) is defined as the change quotation for service contracts. For more information about solution quotations, see [Solution Quotation Management](#).

i Note

You can only use change quotations to accept the changes from the items in the change process. Items that are added in a change quotation are not transferred back to the original service contract.

Auto Renewal of Service Contract Items

You can specify that the duration of a service contract item is to be extended automatically.

Use

You can use the auto renewal function to automatically extend the duration of service contract items, whose validity ends within a certain period.

Setting Up the Auto Renewal

Before you can use the auto renewal function for service contract items, make sure that the following setting has been made in Customizing for [Service](#):

- In the Customizing activity [Settings for the Maintenance Framework \(BTMF\)](#), the SC_ITEM_RENEW BTMF process has been entered in the [Activate Change Process](#) view.

i Note

Service contract items that support the ad hoc billing cannot be renewed automatically. In this case, the [Enable](#) checkbox is not displayed.

Enabling the Auto Renewal

To activate the auto renewal of service contract items, you must select the [Enable](#) checkbox for the service contract item. You must also define the auto renewal period and the contract extension:

- The renewal period indicates the period of time until the end of the contract during which the renewal of the service contract item is triggered automatically.
- The contract extension indicates the period for which the service contract item is to be extended.

You can't enable auto renewal in the following cases:

- If the service contract item is for ad hoc billing
- If any service contract items contain errors

- If the service contract item is not released
- If the cancellation date is set for the service contract item

i Note

Users with the product master data specialist business role (SAP_BR_PRODMASTER_SPECIALIST) can predefine a contract auto renewal indicator and a default extension period in the product master. As a result, the product that you assign to a service contract item has one of the following attributes:

- Auto renewal is open and can be enabled by you.
- Auto renewal is enabled with the default extension period, but you can make changes. In this case, a default renewal period is proposed by the system and you can change it as well.

The default renewal period can be defined in Customizing under [Service > Basic Functions > Date Management > Define Date Profile for Service Transactions](#). The predefined Customizing settings include the date profile CONT002 and the duration AR_PERIOD.

- Auto renewal is not displayed.

Executing the Auto Renewal

You can use the program [Renew Service Contract Items](#) (CRMS4_SERVICE_CONTRACT_RENEWAL) to select the service contract items that are due and need to be renewed. The program then processes all service contract items whose contract end is found within the auto renewal period that has been defined for the service contract item.

You can check the program execution in the application logs.

For more information, see the documentation for the program [Renew Service Contract Items](#) in the system.

Related Information

[Manage Product Master](#)

Defining Prices for Auto Renewal

Service contracts are long-term agreements with your customers. They can be extended to be as long as needed so that you can maintain long-term relationships with your customers. However, over time economic conditions may change: Prices for goods or services may increase rapidly, or maybe customers demand special discounts for closing a deal.

To deal with the potential impacts of price fluctuations, your company can plan the prices of the provisioned services in advance. To do so, you can predefine prices for service contract items that are planned to be extended through automatic renewal in the future. Your customer service managers can perform this task in the [Manage Service Contracts](#) app, with no need for laborious preparation efforts in pricing master data or determination logic.

Features

Item Category

You can only predefine prices for service contract items for price adaptation (item category SCN2). This allows you to define individual prices for individual billing request lines (BRLs). For more information, see [Price Adaptation for Service Contracts](#).

End of Automatic Renewal

Automatic renewal allows the system to extend the validity of your service contract items according to the parameters that you specify. As a result, contract end dates of the items are altered and new billing request lines (BRLs) are generated according to the billing plans. This enables the prices that you plan for the future to become effective during the generation of new BRLs.

To set up automatic renewal for your service contract item, you go to the automatic renewal section under the item details tab in the [Manage Service Contracts](#) app. If you only enable automatic renewal with the renewal period and the contract extension parameters, the renewal is infinite. If you want to define prices, you must also specify an end of automatic renewal.

End of automatic renewal is the date on which the automatic renewal ends. It defines the periods that you can specify the future prices for. As a result, the system sets that date directly as the contract end of the last extension.

Parameters for Defining Prices

To define prices, you must specify the following parameters that the system uses for price calculation:

- **Price calculation basis:** Defines which price the system uses as the basis to calculate future prices. This is a fundamental and therefore mandatory parameter. If you change it, the system calculates again and refreshes the data. The following options are available:

Option	Explanation
First billing request line price	When you choose this type of price, the system uses the price of the first (that is, the earliest) billing request line of the service contract item. Because the new billing request lines are generated to the end of the periodic billing plan, the first billing request line is always fixed at the top. The target prices for the future periods have the same basis.
Last billing request line price (cumulative)	When you choose this type of price, the system uses the price of the last billing request line of the service contract item. Because the new billing request lines are generated to the end of a periodic billing plan, the last billing request line always changes after the new billing request lines are added. As a result, the basis is actually different from period to period, and the target prices are always accumulated from the last billing request line of the previous period.
Manual price	When you choose this type of price, you can specify target prices directly for certain change periods in the future. In this case, you can define change periods (by specifying start and end dates) according to your business requirements. These change periods are different from the fixed change periods that the system determines when you choose the first or last billing request line price.

- **Price change ratio:** The percentage by which the price increases (positive percentage) or decreases (negative percentage) based on the price calculation basis you choose (the first or last billing request line price). If you're already using a price index that estimates price changes over time in your business, you can enter it as the price change ratio to adjust the future prices.
- **Price change amount:** The amount by which the price increases (positive value) or decreases (negative value) based on the price calculation basis you choose (the first or last billing request line price). The system adds the specified price change amount to the base price to calculate the target price of a specific change period in the future.

Change Periods

Once you have select a price calculation basis, the system generates all the periods for which you can change the prices. Every change period contains the following data:

Data	Explanation
Start and end dates	They define the period for which the specified price is to apply. One pair of start and end dates forms a one-time extension of the service contract item. When you use the first or the last BRL price as the price calculation basis, the system determines the start and end dates for the change periods. When you use manual price, you can define start and end dates for change periods that fulfill your business requirement.
Base price	The price amount in currency that the system carries from the price calculation basis that you choose. The system uses it as the basis to calculate the future prices. When you use manual price, you don't need any base prices.
Target price	The price amount in currency. The system calculates this amount based on the base price and the price change ratio that you specify. If you use the price change amount, the system calculates the target price based on the base price and the price change amount that you specify. This is the price that is to be applied to the extended service contract item. If you use manual price, you can specify a target price for each change period.
Price element	Corresponds to the condition type that is used to calculate the price for the chosen price calculation basis. The price element displayed here is used later as the active price element to determine prices for future billing request lines. When you use manual price, you can choose a price element from the options offered by the system.
Notification date	The date on which the system sends you a reminder to check the prices. For more details, see the <i>Notifications and Situations</i> section below.

After you save the above data, the system brings all the defined prices to the newly created BRLs of the extended service contract item through automatic renewal.

i Note

Changes to billing plan rules, BRL prices, parameters for automatic renewal, and so on may impact the prices you've already defined. If you want those changes apply to the future prices as well, you must manually trigger the system to recalculate.

Notifications and Situations

As you define the future prices, you may not yet be able to anticipate how exactly they will develop. In some cases, you're subject to the latest price fluctuations and may therefore like to check the prices that you defined long ago.

For such purposes, you can set a reminder that allows the system to send you notifications to check the prices. For your convenience, such notifications should be sent with ample time before the service contract item is automatically renewed. By default, this reminder is set to one week before the renewal period. You can change this period according to your business requirement.

❖ Example

You set a **one-week** renewal period for the automatic renewal of your item. It means your item is going to be renewed by the background job one week before the contract end date of December 31, 2023.

If you set a notification to be sent **one week** before that renewal period, the notification date is December 17, 2023. Therefore, the system sends you a notification (in form of a situation) every day from **two weeks** to **one week** before the background job renews the item. That is to say, notifications are sent during the period from December 17 to December 24, 2023. You have one week to decide whether the prices can be applied to the extended service contract item. Once you have taken the appropriate action, you can close the situation manually to stop additional notifications.

The system provides you with the exact notification dates, which are based on the time before the renewal period.

→ Remember

If you want to receive the notifications, your configuration expert (SAP business role SAP_BR_BPC_EXPERT) must first create the situation type based on the situation template [Price Check for Automatic Renewal](#) (SRVC_CONTR_AUTO_RENEW_PRICE). With these settings, you can also receive situation prompts in the [Manage Service Contracts](#) app.

→ Tip

If you want a default reminder that is sent earlier or later than the default one-week period before the renewal, your configuration expert can make custom settings for you. They can do this using the duration AR_NOTI in the [Define Date Profile for Service Transactions](#) configuration activity.

Related Information

[Price Check for Automatic Renewal](#)

[Price Adaptation for Service Contracts](#)

Service Contract Determination

Use

You can use this function to search for and display existing service contracts to which service transaction can be assigned. Service contract determination works for the following service transactions:

- Service orders
- Service quotations
- In-house services
- Repair orders

Prerequisites

Transaction Type

You have made settings in Customizing that define how contract determination should occur for the transaction types, such as service order. You make these settings in Customizing for **Service** by choosing **Transactions > Basic Settings > Define Transaction Types > Definition of Transaction Types** and using the **Contract Determ** indicator. You can make the following settings:

- No contract determination
- Manual contract determination
- Only at item level (setting in standard SAP Customizing)
- Contract determination at header and item level

The **Contract Determ** field is only visible in the detailed display for definition of the transaction type if you have chosen **Service Order/Quot.** (BUS2000116) or **Service Confirmation** (BUS2000117) as the leading transaction category.

For more information about these settings, see Customizing for transaction types in the field help (F1) for field **Contract Determ**.

You have set the copying control for both the transaction types and for the item categories in Customizing.

Item Category

In Customizing for the contract item category, you have defined whether the system should also find contract items whose object list or product list or service organization is empty when an item is created in one of the business transactions listed above. You make this setting in Customizing for **Service** by choosing **Transactions > Basic Settings > Define Item Categories** and using indicators **Filter Contract Item by Object List**, **Filter Contract Item by Product List** and **Filter Contract Item by Service Org**. You can see these indicators by choosing an item category with business transaction category **Service Contract** and then choosing **Customizing Item**.

For more information about these settings, see Customizing for item categories in the field help (F1) for both of these fields.

SAP standard Customizing includes contracts with empty product lists and object lists in the search results.

Features

When you create a service transaction with a transaction type for which contract determination is activated in Customizing, the system determines service contracts based on the following selection criteria:

- Sold-to party
The sold-to party in the service contract and in the service transaction must be identical.
- Sales organization and distribution channel
The sales organization and the distribution channel in the service contract and in the service transaction must be identical.
- Service organization
If a service organization is entered in the service contract, it must be identical to the one in the service transaction.
If you have enabled the [enterprise organizational model](#) for direct access of sales data from S/4HANA Sales, the enterprise service organization instead of service organization is used in service contract determination.
- Status

The status of the service contract item must be **Released**.

- Validity

The date in the **Requested Start** field in the service transaction must lie within the validity period of the service contract item.

- Object list

In standard Customizing, contract determination runs in the following sequence:

1. Contracts are found that have reference objects entered for the service transaction item in the [object list](#) of the service contract item, or that have an empty object list for the service contract item.
2. If no reference objects were entered for the service transaction item, contracts are found that have the reference object for the service transaction header entered in the object list of the service contract item, or that have an empty object list for the service contract item.
3. If the reference object was not entered in either the service transaction item or in the service transaction header, service contract items with empty object lists are found.

- Product list

The product in the service transaction item must be entered in the product list of the service contract item or be part of the product hierarchy in the product list, or the product list of the service contract item can be empty.

When the system determines only a single valid service contract item, it automatically copies the data of the service contract item to the current service transaction item. If the system determines multiple valid service contract items, it prompts you to select the relevant service contract item from the result list.

i Note

The result list displays 500 assignable service contract items maximum. If the result is more than 500 service contract items, you can use direct search as described in the Search section.

For more information, see [Service and Product List](#).

- Product in a service contract item

The service contracts whose items contain the product that you have specified in a service transaction item can be determined for your selection. The product that you have specified in a service transaction item can be the one that is not included the product lists of service contract items.

After the system has determined valid service contracts, it automatically copies the contract data to the service transaction, or you are prompted to select a contract for copying from a list.

Business Add-In (BAI)

You can use the Business Add-In definition CRMS4_SRV_CONTRACT (**Business Add-In for Service Contract Determination**) to include Business Add-Ins, which you can use to provide your own selection criteria or to limit the selection criteria (see above) delivered by SAP.

Search

You can search for a specific service contract ID and item by using respective fields. In addition, you can use the free text search above the result list to filter the assignable service contract items.

Note that the value help of the service contract ID and service contract item fields shows all service contracts and items in the system, and not just the valid (assignable) service contracts in the result list.

Activities

Automatic Determination of Service Contracts at Item Level

1. Create an item in a service transaction for which automatic contract determination is activated in Customizing.
2. The system selects appropriate service contracts according to the above-mentioned criteria and displays all permitted service contract items.

i Note

- o The system selects and offers for selection those service contract items whose product lists contain the product entered in the service transaction item.
 - o The system selects and offers for selection those service contract items that contain the product entered in the service transaction item. The product can be the one that is not included in the product lists of the service contract items.
 - o In addition, depending on Customizing settings, service contract items that have no product list are also selected.
 - o The system only selects and offers for selection those service contract items whose object lists contain the reference object entered in the service transaction item.
 - o In addition, depending on Customizing settings, service contract items that have no object list are also selected.
3. During selection of a service contract item, data from the service contract item is copied into the service transaction, and the price agreements and SLA parameters from the service contract are also activated in the service transaction.
 4. In the detailed view of the service transaction item, the contract ID appears in the **Service Contract and Warranty** section. You can click on the ID to go to the corresponding contract.

Automatic Determination of Service Contracts at Header and Item Level

1. Create a service transaction for which automatic contract determination is activated in Customizing. Maintain the header data and specify the reference object.
2. The system automatically selects appropriate service contracts according to the above-mentioned criteria and displays all permitted service contract items.
3. After selecting a valid service contract item, the products entered in the product list belonging to the contract item are displayed as default values for copying to the service transaction.

If the product list does not contain any entries, the service product that was agreed on in the contract item is proposed for copying to the service transaction.

All products that are selected and copied from the displayed list are then automatically copied as items in the service transaction.

i Note

Dates from the date profile of the transaction type are displayed in the **Dates** assignment block. When you save the service transaction, the current dates are redetermined.

Manual Determination of Service Contracts

Providing that you have set up manual contract determination in Customizing, you can use a button to manually start the determination of service contracts when a new service transaction is created.

Credit Memo Requests and Credit Memos for Service Contracts

A credit memo request is a type of sales document used to request a credit memo for a customer. Creating credit memo requests makes sense when the price that the customer has paid was too high. This could be due to lacking quality of a provided service, a mismatch between billed and delivered quantities, or delivery of an incorrect product. You use the sales document type SCR to create credit memo requests for service contracts.

A credit memo is a type of billing document. You use the billing document type G2 to create a credit memo directly.

Credit memo requests or credit memos must be created with reference to invoices of service contracts. When a credit memo request or a credit memo is created, you can find it displayed in the transaction history. Cancellations of credit memos are also displayed there. From the transaction history, you can navigate to the respective sales or billing apps for more details.

i Note

Credit memos created from credit memo requests, rather than from contract invoices, are not displayed.

Related Information

[Creating a Credit Memo Request with Reference to a Service Invoice](#)

Credit Management for Service Contracts

Use

By integrating with SAP Credit Management, credit checks can be automatically triggered for business partners (payers) when a service contract is saved in the released status.

The status of service contract items with negative check results is rolled back to in process and the corresponding service contract is blocked for further processing. Documented Credit Decision (DCD) cases are automatically created for those service contract items with negative check results.

In the case of positive check results, the credit commitment of a business partner is updated accordingly. The credit commitment is then consolidated into the credit exposure that consumes the available credit limit of the business partner.

When a billing document is created for a service contract, no new credit check is triggered, but the credit commitment is transferred from the service contract to the billing document. Only when the billing document is paid, the credit commitment is updated to zero and the consumed credit limit is released.

The following figure shows the business process of credit check management for service contracts:

- You have enabled the use of credit management for service contracts. To do that, you make the following settings in Customizing under **Financial Supply Chain Management** for **►Credit Management ► Integration with Accounts Receivable Accounting and Sales and Distribution ► Integration with Service ►**:
 - **Deactivate SAP Credit Management**

Activate credit management globally.
 - **Define Credit Control Area**

Define your credit control areas. The credit control area is an organizational unit that specifies and checks a credit limit for customers.
 - **Define Credit Segment**

Define your credit segments according to your business requirements. Credit segments are used to determine the credit limit.
 - **Assign Credit Control Area and Credit Segment**

Define credit control areas and assign them to credit segments.
 - **Assign Sales Area to Credit Control Area**

Assign a sales area to a credit control area according to your business requirements.
 - **Activate Credit Management in Service Transactions**

Activate credit management for the service transactions that you have defined based on the business transaction category **Service Contract** (BUS2000112).
 - **Activate Credit Check on Items**

Activate credit check for the service contract items that you have defined.

- You have assigned the SAP Credit Management Role (UKM000) and credit segment to the relevant business partners (payers).

If you want a credit check to be performed correctly, it's mandatory to assign the SAP Credit Management Role (UKM000) to all the relevant payers.

For more information, see [Credit Master Data](#)

- You can check whether the predefined credit exposure categories meet your business requirements. You can make your own settings in Customizing under **Financial Supply Chain Management** for ► **Credit Management** ► **Credit Risk Monitoring** ► **Credit Exposure Update** ► **Define Liability Categories** ►.

SAP Predefined Credit Exposure Categories Relevant to Service Contracts

Credit Exposure Category	Name of Credit Exposure Category	Explanation
110	Service Order & Service Contract	Released service order items to be confirmed or invoiced, and released service contract items to be invoiced.
200	Open Invoices	Invoices that haven't yet been paid.
500	Billing Document Value	A generic term for invoices, credit memos, debit memos, pro forma invoices, and cancellation documents.

i Note

- If no credit segment is assigned to a sales area in a transaction, no credit check is performed and the statuses of all the relevant transaction items are set to being in process.
- If the SAP Credit Management Role (UKM000) is not assigned to a business partner (payer) in a transaction item, no credit check is performed for all items of this payer. If you don't assign this role to a payer at the beginning, and assign this role to this payer later after any item of this payer has been posted to financial accounting and invoiced, you need to run the report UKM_COMMITMENT_REBUILD to update the corresponding credit exposure after a credit check is performed for the items of this payer. To run the report immediately, use the transaction code SE38 or schedule a background job using the transaction code SM36.

→ Recommendation

We recommend no activation of Contract Accounts Receivable and Payable (FI - CA) when you have activated SAP Credit Management for service contracts.

Features

Automatic Credit Check Upon Saving a Service Contract

A credit check is automatically triggered when you create a service contract and save the service contract in the released status. Service contract items are grouped by payer for credit value calculations and credit checks. A credit check is performed once for each payer. The status of released service contract items is rolled back to in process when a credit check fails for these contract items. A credit check is automatically triggered again when you make the following changes to a service contract:

- You have made no changes to the originally released service contract items, but you have added and released new service contract items, or you have released service contract items whose status is open or in process.

- You have increased or decreased the gross value of the originally released service contract items.

When you make the following changes to a service contract, no credit check is triggered but the corresponding credit exposures are updated:

- You have changed the life cycle status of some of the originally released service contract items to being in process or completed.
- You have changed the gross value and life cycle status of the originally released service contract items. The status of the originally released service contract items can be changed to being in process or completed.

i Note

- If a credit commitment entry has been generated for a service contract item, the currency of the corresponding service contract can no longer be changed.
- If a credit check has been performed for a service contract item and the item is saved, the payer in this service contract item and the header of the corresponding service contract cannot be changed or deleted, because a commitment entry or a DCD case has been created.
- If you have deleted a service contract item, the system automatically closes the corresponding DCD case.

After a credit check is performed for a service contract, you can view the credit status in the items of the service contract. Additionally, the credit status at service contract header level is updated according to the credit statuses of all the items that the service contract contains.

Item Credit Status	Description
Not relevant for credit check	Credit management is not activated for the service contract.
Relevant for credit check, but credit check not executed	Credit management is activated for the service contract, but no credit check has been performed.
Credit check not OK	This service contract item failed the credit check. The status of the service contract item changes to in process.
Credit check OK	This service contract item passed the credit check.
Credit released	This service contract item was released from DCD and no new credit check is performed for this service contract item. The status of the service contract item changes to released.

i Note

If you change the gross value of a service contract item that has failed a credit check, the status of the service contract item changes from **Credit Check Not OK** to **Relevant for credit check, but credit check not executed**. You can change the service contract item status to **Released** to trigger another credit check.

Header Credit Status

Header Credit Status	Description
Empty	No item is added to the service contract.
No item is relevant for credit check	Credit management is not activated for the service contract. All service contract items have the credit status Not relevant for

Header Credit Status	Description
	credit check.
Credit check pending for all relevant items	Credit management is activated for the service contract. All service contract items have the credit status Relevant for credit check, but credit check not executed .
Credit check OK for all relevant items	All service contract items have the credit status Credit check OK or Credit released . The status of the service contract changes to released.
Credit check not OK for all relevant items	All items have the credit status Credit check not OK . The status of the service contract is in process.
Credit check not OK for some items	Contains items that have the credit status Credit check not OK and items that are not credit blocked (Credit check OK and Credit released , respectively). The status of the service contract is in process.
Credit check OK for some items and pending for some items	Contains items that are not credit blocked (Credit check OK and Credit released) and items that have the credit status Relevant for credit check, but credit check not executed . The status of the service contract is in process.


Credit Commitment Update Upon Saving a Service Contract

When a service contract is saved after a credit check, the commitment of each service contract item that has passed the credit check is updated in the service contract. When the status of a service contract item is changed from being released to being in process or completed, the commitment of the service contract item is updated to zero.

Credit Commitment Transfer Between Service Contracts and Billing Documents

When a billing document is created for a service contract item, the commitment of the service contract item is transferred from the service contract item to its billing document. When a billing document is canceled for the service contract item, the commitment is transferred from the billing document back to the service contract item. When a billing document of a service contract item is posted to financial accounting, the credit commitment is directly transferred from the service contract item to the accounting document, and vice versa, if you cancel the billing document.

The following figure and table show the commitment transfer between service contracts and billing documents:

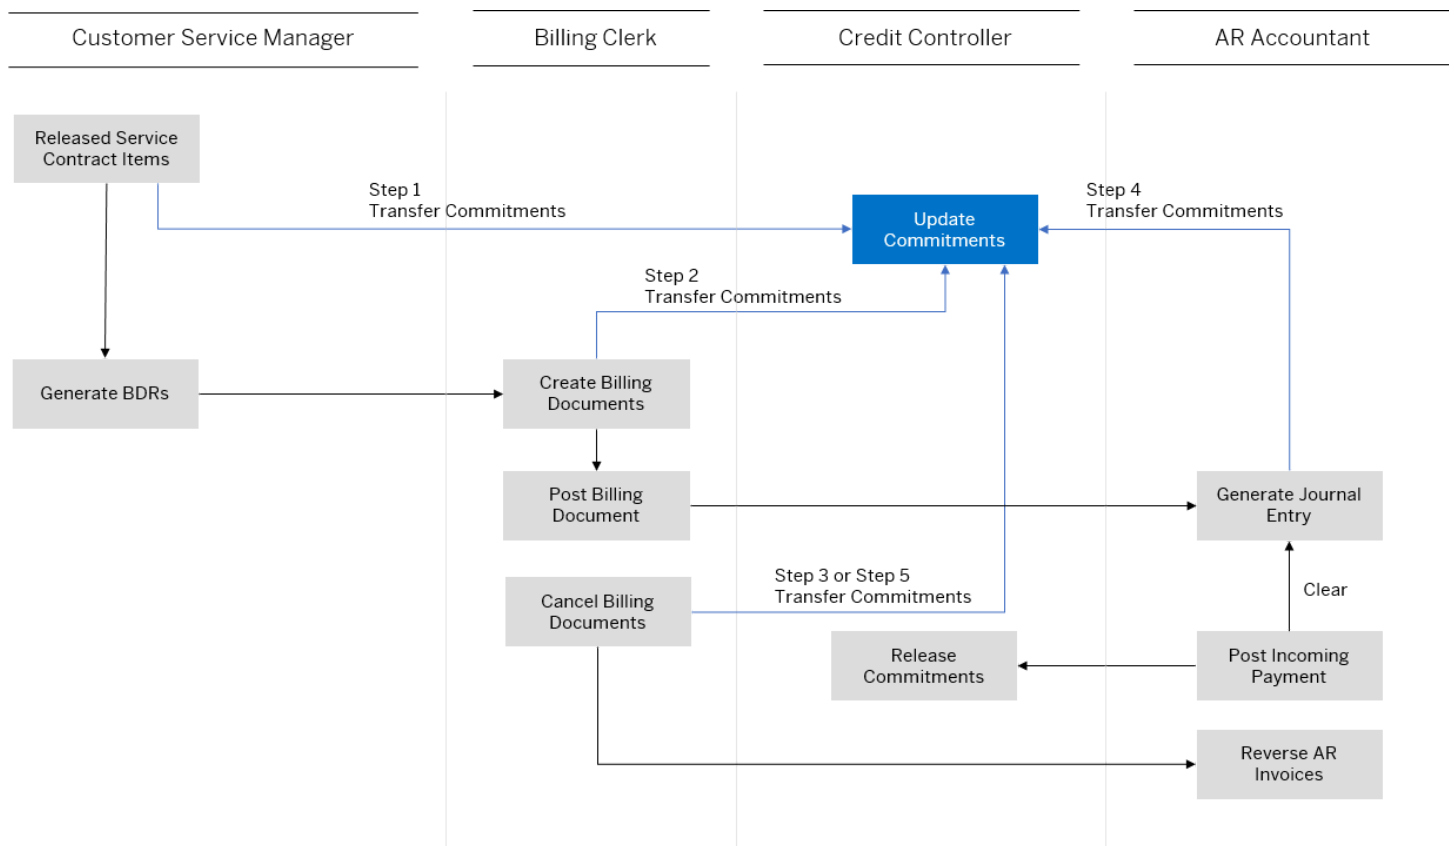

Transfer Commitments with Credit Exposure Category

No. of Step	Process Step	Credit Exposure Category Used
1	The service contract items pass credit check when the service contract items are saved in status Released .	110
2	A billing document is created for the service contract item.	Transfer from 110 to 500
3	A billing document is canceled for the service contract item.	Transfer from 500 to 110
4	A billing document is posted.	Transfer from 500 to 200
5	A posted billing document is canceled for the service contract item.	Transfer from 200 to 110

Multiple service contracts or service contract items can be billed collectively in one billing document. Each billing document item corresponds to a service contract item. If there is a discrepancy between the gross value of a service contract item and the total billing gross value, the residual commitment value of the service contract item can only be cleared when the service contract item is completed and saved.

Simulating Credit Check

An automatic credit check is triggered only when you save a service contract item with the released status. If you want to know whether the current value of the whole service contract is or not within the credit limit before saving any items in the released status, you can simulate a credit check from the service contract header. By doing so, you can also avoid the creation of unwanted DCD cases.

You can simulate a credit check using one of the following two options:

- **Simulate all items**

All items (with the open, in process, and released statuses) in the service contract are included in the simulation.

- **Simulate released items**

Only the released items in the service contract are included in the simulation.

When the simulated credit check result shows OK, the service contract items in the simulation can pass the credit check. You can directly save the service contract to trigger a real credit check for all the released service contract items.

When the simulated credit check result is not OK, the system prompts you with detailed information, such as which partner has violated the credit limit and by how much the credit limit was exceeded. With that information, you can decide how to proceed. For example, you may want to hold the release of the service contract items with higher values and only release those items with lower values to pass the credit check.

i Note

Since the simulation runs in real time, its result only represents the current, temporary state. The real credit check result may differ from the simulation result.

Rebuilding Credit Management Data

To ensure that the credit exposure is always consistent and correct, you need to rebuild the credit management data. To do this, you can run the report UKM_COMMITMENT_REBUILD using the transaction code SE38 or schedule a background job using the transaction code SM36. The following are typical scenarios in which you need to rebuild your credit management data:

- If you activate credit management in your system, where service transactions (for example, service contracts and service orders) already exist, credit checks are only performed for subsequent, new transactions, but not for old transactions that already exist in the system. When a credit check is performed for the new transactions and no changes are made to the old transactions, you need to rebuild your credit management data to ensure that the credit exposure is updated with the correct value for both old and new service transactions. After the credit exposure is updated for the old transactions, the credit status of the old transactions is not changed.
- After you have assigned your sales area to a credit segment and have created transactions using this configuration, you want to change the current credit segment assignment. You need to rebuild your credit management data after you change the current credit segment assignment.

The credit exposure is updated with the correct value after you rebuild the credit management data in the following cases:

- The service contract items have no (that is, an empty) credit status.
- The service contract items have passed a credit check.

i Note

In the above cases, all the credit-management-relevant configuration is maintained correctly for these service contract items.

The credit exposure is cleared to zero after you rebuild the credit management data in the following cases:

- Credit management is not activated.
- Credit management is activated, but the credit segment is missing.
- Credit management is activated, but the SAP Credit Management Role (UKM000) is not assigned to the relevant payer.
- A service contract item has passed a credit check and has negative credit exposure. In this case, all the credit-management-relevant configuration is maintained correctly for this service contract item.

When you rebuild the credit management data for the service contracts of the same payer and find that one of these service contracts is being edited, the service contract that is being edited is locked and the corresponding credit exposure is cleared to zero. For the rest of the service contracts, their credit exposure is updated with the correct value.

Auto Renewal of Service Contracts When Credit Management is Activated

Auto renewal can be performed for service contract items regardless of whether or not you activate credit management for these service contract items. When auto renewal is performed for service contract items in the released status, the credit check is skipped for these service contract items, even if credit management is activated.

- If the credit segment is maintained correctly for these service contract items, the credit exposure is updated for the service contract items after auto renewal is performed.
- If the credit segment is not maintained for these service contract items, the credit exposure is not updated after the auto renewal is performed.

Integration with Documented Credit Decision (DCD)

When a service contract item fails a credit check, a DCD case is created automatically for this service contract item. After validating case details, the responsible credit controller can release a service contract blocked by a negative check result.

The DCD case is automatically closed for a service contract item that has failed a credit check when the following occurs:

- The service contract item passes a new credit check.
- The service contract item is saved after its status is changed to completed.

If the service contract item is changed and saved as being in process, its change is updated in the corresponding DCD case.

For a DCD case, the responsible credit controller can do the following:

- Click **Check** in the DCD report to trigger a new credit check.
- Click **Release** in the DCD report to bypass a credit check.

i Note

- A DCD case is created for each service contract item that has failed a credit check. If you want to batch process DCD cases for a service contract, you need to search for all the required DCD cases by this service contract and then process them in a batch.
- DCD cases are created asynchronously. If an error occurs when a DCD case is created or edited, the system generates a notification in the SAP Business Workflow. It's a typical error that when a DCD case is being edited, the changes to its corresponding service contract item cannot be synchronized to the DCD case. To resolve this error, you can search for *Monitor Messages for SAP Business Workflow* in the relevant version of [SAP S/4HANA](#) on SAP Help Portal and perform steps described there. This solution is also applicable to other errors occurred when a DCD case is created or edited.

For more information about DCD, search for *Documented Credit Decisions* in the relevant version of [SAP S/4HANA](#) on SAP Help Portal.

Automatic Recheck of Service Contract Items that Have Failed a Credit Check

When a service contract item fails a credit check, it can either be manually checked by the credit controller in the DCD report or by the recheck report CRMS4_SRV_CREDIT_RECHECK. To run the report immediately, use the transaction code SE38 or schedule a background job using the transaction code SM36.

This background job checks both service contract items and service order items that have failed a credit check. For these service contract items and service order items of the same payer, the background job checks service order items first and service contract items next. If there are only service contract items being processed by the background job, the service contract items are checked by service contract start date, that is, a service contract item with an earlier contract start date is checked first.

Related Information

[SAP Credit Management \(FIN-FSCM-CR\)](#)

[Check Credit for Service Transactions](#)

Cancellation

Use

To determine when, why, and by whom a contract can be canceled, you can define a cancellation procedure that contains information about the cancellation parties, cancellation dates, and cancellation reasons.

Prerequisites

You must have created a cancellation procedure and assigned it to the required contract type in Customizing by choosing **► Service ► Transactions ► Settings for Contracts ► Cancellation ►**.

Activities

- When you create a contract, you can define the data required for cancellation in the **Cancellation** assignment block. If one of the parties wants to cancel the contract, for example, you can enter the details in this assignment block. Depending on the cancellation procedure and the information that you enter (such as the cancellation party), the system calculates when the contract can be canceled, that is, it generates a new contract end date.
- When you enter a cancellation date, the system will trigger a pop-up notification if any follow-up documents are still open and have a status indicating they are not completed. You must confirm your decision to cancel the contract. Upon confirmation, the system will proceed to determine the cancellation rules and set the cancellation date. If confirmation is not provided, the cancellation process will be halted, and no cancellation date will be set. If no open documents are found, the pop-up notification will be suppressed, and the system will proceed directly to calculate and set the cancellation date. This behaviour applies to both **Entire Service Contract Cancellation** and **Service Contract Item Cancellation**.
- When this end date is reached, the system can automatically set the contract status to **Completed**. Therefore, you must define an appropriate action that processes the existing standard method **COMPLETE_DOCUMENT** or a customer-specific method. It is then no longer possible to create release orders for the contract. You can trigger actions for a service contract in Customizing by choosing **► Service ► Basic Functions ► Actions ► Actions in Transactions ►**. For more information about the service contracts with status **Completed**, see [Completion Rules](#).

Completion Rules

Use

You can use completion rules to define what happens once the customer releases the total target quantity or target value of products against a contract. For each item in the contract, you can use Customizing to define how the system reacts when target quantities or target values are reached as follows:

- The system sets the contract status to **Completed** once the target quantity or target value has been reached (this prevents any more contract release orders from being created for this contract).
- The customer may exceed the target quantity or target value. The system does not react, or only with a warning message.
- For quantity contracts: The system splits the item that leads to the target quantity being reached. The first item contains the quantity that fills the contract, and the second item contains the remaining quantity. The contract requirements are no longer valid for the second item.

Integration

The completion rules can be integrated with the action profile so that when a contract reaches the status **Completed**, for example, an action is generated requesting the sales representative to contact the customer.

Prerequisites

You have selected a completion rule in Customizing under ► **Service** ► **Transactions** ► **Basic Settings** ► **Define Item Categories** ►. Under **Customizing Item** for the relevant item category, choose a completion rule from the **Completion** field in the **Contract Data** section.


Activities

The way in which the system processes completed contracts depends on the Customizing settings that you have made. In general, the following applies:

- If you create a contract release order for a quantity or value that exceeds the target quantity or target value in the contract, the system displays a warning message and you can choose whether to proceed. The system then sets the contract status to **Completed**.

Example

The figure below illustrates how completion rules affect the processing of contract release orders:

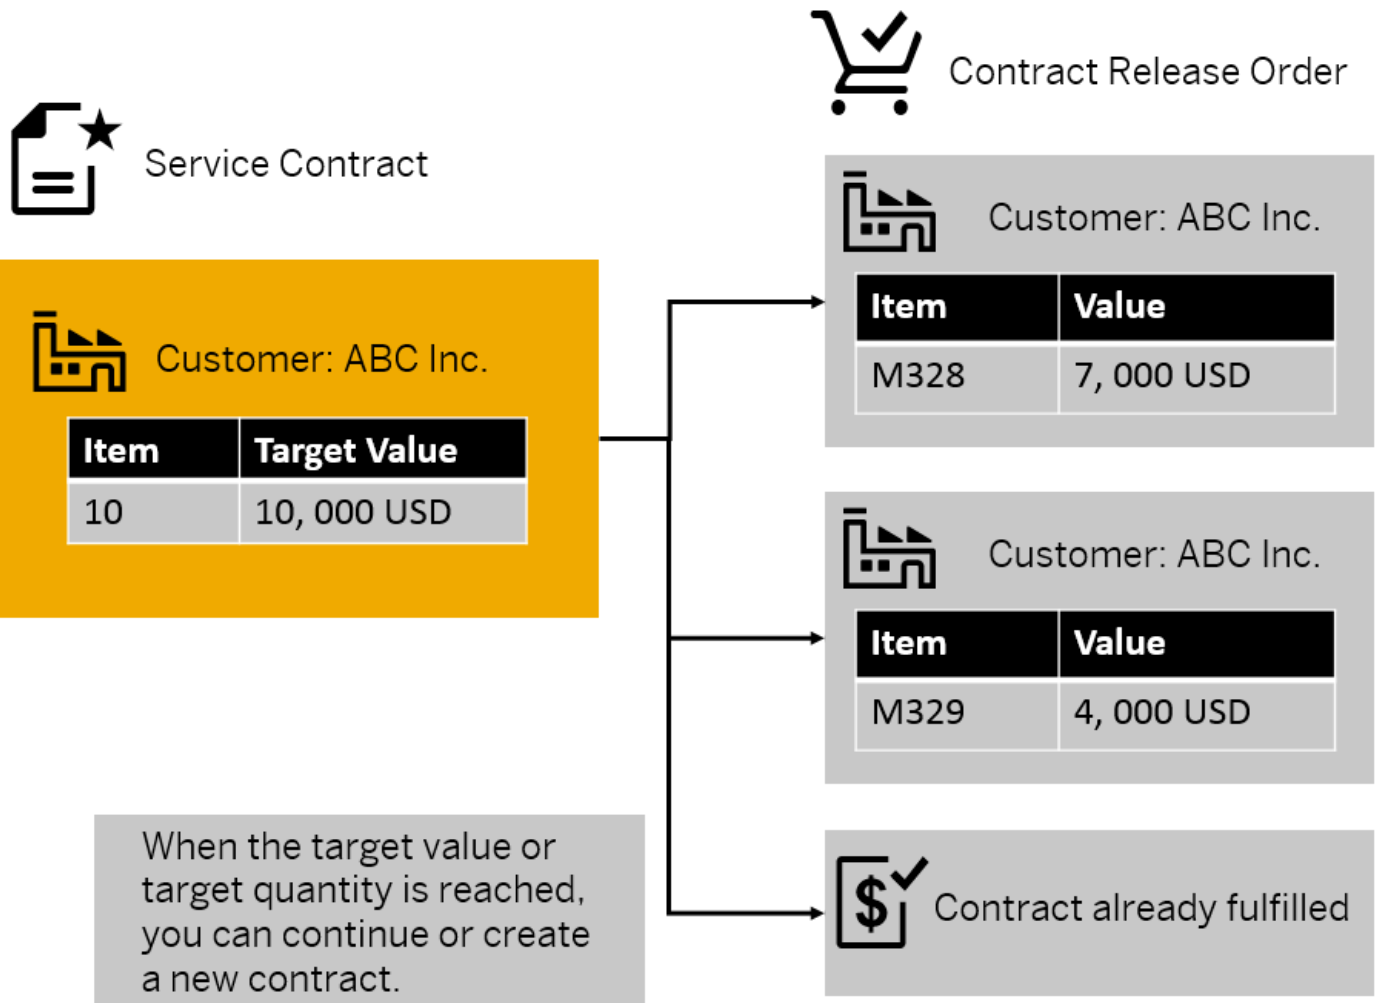

Automatic Release of Contracts

Use

This function allows contract items and contracts to be released automatically, depending on the installation date.

Prerequisites

In Customizing, the date type **SRV_INST - Installed On** is relevant for automatic release of contracts. You can find this date type in Customizing for **Service** under **Basic Functions > Date Management > Define Date Types, Duration Types, and Date Rules**.

In the Customizing activity **Define Date Profile**, this date type is assigned to the following date profiles:

- **SRV_HEADER01 - SAP Default Service Activity Header**
- **CONT002 - Date Profile for Service Contracts**

i Note

If you would rather release contracts manually instead of automatically, delete this date type from both of the date profiles listed above.

Features

At first, a newly created service contract has status **In Processing**. When the object is installed at the customer site, for example, you set the **Installed On** date at item level and save the contract. This change triggers the system to switch the status of the contract item to **Released**, copy the date from the **Installed On** field, and use that date as the contract start date. When all the contract items have status **Released**, the system also switches the status of the contract to **Released**.

Service Contract Validation

Use

Service orders can be created through different APIs (SOAP and OData APIs) and various other reports. You can assign a reference service contract and item while creating a service order through these reports and APIs. A central API is available to validate the assigned reference service contract item.

Feature

Service contract validation checks whether the assigned contract item aligns with the parameters of the service order. If any of the below validations of the service order item fails, the system raises respective error messages for the corresponding item.

- Sold-to-party of the service order and reference service contract must be the same.
- Status of service contract item must be released.
- Requested start date in the service order must be within the service contract start and end dates.
- Sales organization and distribution channel of the service order and reference service contract must be the same.
- Service organization of the service order and reference service contract must be the same. Service organization can be blank in the service contract.
- Product list
 - If the customizing for service contract item category has **Filter Contract Item by Product List** set to space (no value, that is, **No Filter**): Even if the product list of the service contract item is blank, it is still a valid service contract item.
 - If the customizing for service contract item category has **Filter Contract Item by Product List** set to **A (Ignore Service contract item with empty product list)**: The service contract becomes invalid if the service contract item's product list is blank or the product list doesn't contain the product ID of the service order item.
- Reference object list
 - If the customizing for service contract item category has **Filter Contract Item by Object List** set to space (no value, that is, **No Filter**): Even if the object list of the service contract item assigned is blank, it is still a valid service contract.
 - If the customizing for service contract item category has **Filter Contract Item by Object List** set to **A (Ignore Service contract item with empty object list)**: The service contract becomes invalid if the service contract item's object list is blank or the object list does not contain the reference object of the service order item.

If any of the above validations fail, a corresponding error message is displayed on the created service order. In such cases, depending on the contract determination customizing, you will be given an option to do one of the following:

- **Assign a valid service contract:** If contract determination is set to any value other than space in the transaction type customizing, an error message with a hyperlink is displayed that prompts you to assign a valid contract. When you choose this hyperlink message, the system displays a list of valid contracts for the service order in a pop-up window, from where you can select a contract. After assigning a valid contract from the list, error messages related to the validation disappear.
- **Remove the invalid service contract:** If contract determination is set to space in the transaction type customizing, an error message with a hyperlink is displayed on the service order along with other error messages proposing you to remove the invalid service contract. You can choose the hyperlink error message and remove the contract. All the other error messages related to the validation disappear.

Dates in Service Contracts and Service Contract Templates

Use

Date settings that you make in Customizing enable the relevant dates for business transactions to be calculated automatically.

You make date settings in Customizing, by choosing **►Service ►Basic Functions ► Date Management ►**. You use a date rule to define date types and assign these date types to a date profile.

The following table shows the most important predefined date types for the standard service transaction types:

Transaction Type	Date Profile	Date Type
Service contract (SC)	CONT002	Contract Start Date (CONTSTART)
		Contract End Date (CONTEND)
		Billing Date (BILL_DATE)
		Cancellation Date (CANCDATE)
		Settlement From (SETTLE_FROM)
		Settlement To (SETTLE_TO)
		Acceptance Date (CONTACCEPT)
		Installation (CONTINST)
Service contract template (SCT)	CONT003	Valid From (VALIDFROM)
		Valid To (VALIDTO)

You can modify the standard definitions as required.

More Information

[Date Management](#)

Mass Change of Service Contracts

App ID: F8680

With this app, you can request the system to process large volumes of service contracts or service contract items at a time. You do this by scheduling jobs that run in the background.

Key Features

You can use this app to do the following:

- Search for service contracts or service contract items by various criteria, such as sold-to party, ship-to party, sales organization, and so on
- Update prices for selected service contracts or service contract items

i Note

The scheduled jobs can't update prices for the following types of service contracts or service contract items:

- Service contracts that contain items for ad hoc billing.
 - Service contract items for ad hoc billing.
 - Service contracts or service contract items that contain errors relevant to pricing.
- Change header data for service contracts or item data for service contract items

i Note

When you apply a change to multiple service contracts or service contract items with different values for any of the fields, the system informs you about these differences. If you choose to apply your changes, the field values in all the service contracts or the service contract items are changed to the new values.

For example, you want to update the header data for service contract 70000000000 and 70000000001, which currently have different values for the payment method. You choose to change the header data and update the payment method. After you apply your changes, both service contracts contain the same updated payment method value.

The same principle applies to item changes.

- Change business partner

Supported Device Types

- Desktop
- Tablet
- Smartphone

Related Information

[Monitor Mass-Processed Service Transactions](#)

Monitor Mass-Processed Service Transactions

App ID: F7644

With this app, you can find and display all the jobs that were created in the [Mass Processing of Service Contracts](#) app. You can view job details and set failed jobs to completed.

Key Features

You can use this app to do the following:

- Search for jobs by various criteria, such as job status, user who created the job, when the job was created, and so on
- View job details
- Set failed jobs to completed

Mass Change Job Deletion

You can use the report CRMS4_MC_JOB_DELETION to delete the jobs that are older than 90 days.

Supported Device Types

- Desktop
- Tablet
- Smartphone

Related Information


[Mass Change of Service Contracts](#)

Recurring Service

You can use the recurring service to schedule and organize periodic services that occur repeatedly at certain intervals, such as regular maintenance, ahead of time. The planned recurring service helps you save costs resulting from unforeseen outages or breakdowns, to plan services in a better and more transparent way, and to schedule resources, like personnel or materials, more efficiently.

The recurring service can be implemented by using the maintenance plan functionality. A maintenance plan is used to do the following:

- Plan and perform the recurring service, enabling an object to be serviced throughout its complete lifecycle.
- Generate follow-up service quotations and service orders at freely definable points in time.
- Determine when and which service is to be planned, performed, or offered for which object; the rules therefore are defined in the service interval.

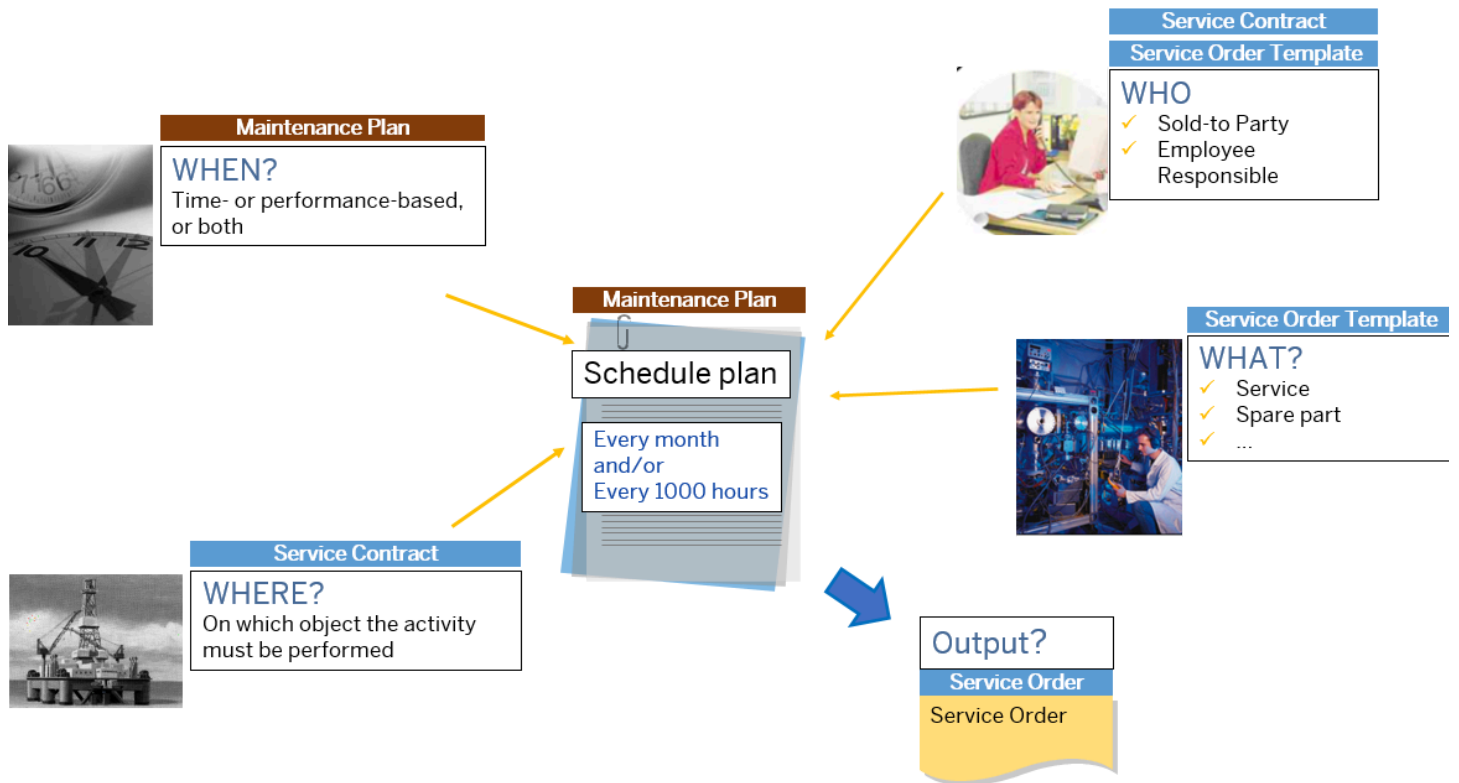

You can use the following apps to implement recurring service:

- Create Maintenance Plan
- Change Maintenance Plan
- Find Maintenance Plans - Service
- Find Maintenance Items - Service
- Schedule Maintenance Plan - Service
- Mass Schedule Maintenance Plan -Service
- Display Maintenance Plan
- Display Measuring Point
- Change Measuring Point
- Create Measuring Point
- Display Measurement Document
- Create Measurement Document for Technical Object
- Monitor Mass Scheduling Logs - Service

Recurring service uses the business role **Service Manager** (SAP_BR_SERVICE_MANAGER).

Maintenance Plans for Recurring Service

Types of Maintenance Plans

Recurring service supports single cycle plans and multiple counter plans.

Single Cycle Plan (Time-Based)

Maintenance is performed in specific cycles for time-based maintenance planning, for example, every two months or every six months.

Single Cycle Plan (Performance-Based)

With performance-based maintenance plans, you can plan regular maintenance based on counter readings maintained for technical objects and products.

After a counter is assigned to a maintenance plan, maintenance takes place when the counter for a technical object has reached a certain reading, for example, every 100 operating hours, or every 500 miles. The planned date is calculated depending on the counter reading at the time of planning and the estimated annual performance that has been defined for the counter.

Multiple Counter Plan

A multiple counter plan is used in counter-based (performance-based) maintenance. In the multiple counter plan, you create maintenance cycles and allocate counters of equipment or functional locations with different dimensions to them, for example, flight hours, number of take-offs and landings, and kilometers traveled. You can also integrate time-based cycles into the maintenance plan. However, these do not have counters.

If you schedule the multiple counter plan, the system calculates the planned deadlines for each maintenance cycle based on the current counter reading and the estimated annual counter activity. For a time-based cycle, the system calculates the deadlines based on the time unit and the cycle duration.

The cycles for a multiple counter plan are linked with either an OR operation or an AND operation.

- For an OR operation, the call object generation is triggered for the earliest possible planned date. If maintenance is due, for example, every 100 tons produced or every 50 operating hours or every two weeks, the decisive factor is which occurs first.
- For an AND operation, the call object generation is triggered for the last planned date. If maintenance is due, for example, every 100 tons produced or every 50 operating hours or every two weeks, the decisive factor is which occurs last.

Maintenance Plan Category for Recurring Service

You use the maintenance plan category to determine which call object the system generates from a maintenance plan when a maintenance call is due. Recurring service uses the default maintenance plan category **Service Order**. You can define your own maintenance plan category based on your actual requirements.

Call Object

Call object is the transaction generated by a system for a due maintenance call. Recurring service supports the creation of **Service Order** and **Service Quotation** as call objects.

Creation of Maintenance Plans

Use

You can create maintenance plans based on service contracts and service order templates.

Prerequisites

Before creating a maintenance plan ensure that you have prepared the related service contracts and service order templates.

Before creating a performance-based plan or a multiple counter plan, ensure that you have created counters and measurement documents in the [Create Measurement Point](#) app and the [Create Measurement Document for Technical Object](#) app.

Create a Single Cycle Plan (Time-Based)

Use

You can create a time-based single cycle maintenance plan by using the [Create Maintenance Plan](#) app.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the [Create Maintenance Plan](#) app.
3. Specify the maintenance plan for [Service Order](#).
4. Specify the maintenance plan type as [Single Cycle \(Time-Based\)](#) and continue.
5. On the items tab, enter a new item by specifying item description, technical object/product, service contract, service contract item, service order template, and order type.

i Note

- o The service call object must be specified as service order or service quotation. To make the service order or service quotation as an available option for your choice in the service call object drop-down list, you must make the following settings:
 - Specify the target transaction type of the call object and the source transaction type of the service contract in Customizing for [Service](#) under [Transactions](#) > [Basic Settings](#) > [Copying Control for Business Transactions](#) > [Define Copying Control for Transaction Types](#).
 - Specify the target transaction type of the call object and the source transaction type of the service order template in Customizing for [Service](#) under [Transactions](#) > [Basic Settings](#) > [Copying Control for Business Transactions](#) > [Define Copying Control for Transaction Types](#).
 - Specify a value for the service contract determination option in Customizing for [Service](#) under [Transactions](#) > [Basic Settings](#) > [Define Transaction Types](#).
- o You can use the value help when entering a service contract or a service contract item. In the search criteria for the value help, your entered product or technical object is filled as search criteria by default. The service contract items whose object lists contain the product or the technical object are displayed for your selection. You can also specify more products or technical objects. If the specified products and technical objects belong to the same object list of a service contract item, the service contract item is displayed for your selection.
- o You can use the value help when entering a service order template. In the search criteria for the value help, your entered product or technical object is filled in as search criteria by default. The service order templates whose reference object is the product or the technical object are displayed for your selection. If the specified technical object is a piece of equipment and no corresponding service order template is found, the service order templates which contain the reference product of the equipment are displayed for your selection.

6. Choose the newly created item.

7. On the general data tab in the details for item section, specify the service priority.

i Note

- Here you can click **Do Not Release Immediately** so that the generated call objects have the open status. If you do not click this option, the generated call object that contains no errors will have the released status.

8. On the object list tab in the details for item section, specify technical objects/products.

i Note

If the object list has been specified in the service contract item that you have specified, you are prompted to select technical objects upon the first time you fill in the object list for the maintenance plan.

9. On the planning data tab, enter a description for your maintenance plan.

10. In the date determination section, specify the start date for scheduling, end date for scheduling, [shift factor](#), [tolerance](#), and [scheduling indicator](#).

i Note

- When you specify the start date for scheduling and end date for scheduling, ensure that this period is within the start date and end date of the specified service contract item with the release status. If the end date for scheduling is not specified, the maintenance plan can be repeatedly scheduled. It is recommended that you specify the start date for scheduling. If you do not specify the start date for scheduling, the maintenance plan cannot be scheduled through mass scheduling.

11. In the call control section, specify the [scheduling period](#), [call horizon](#), and completion required.

i Note

- If you specify completion required, a call object is not generated until the previous call object is completed. When a maintenance plan has multiple maintenance items, call objects are not generated from a maintenance item until all the call objects of the previous maintenance item are completed with completion date updated. If you want to start generating call objects from a maintenance item, you can manually set the completion date for call objects generated from the previous maintenance item.

12. In the cycle section, specify the cycle/unit, cycle description, and [offset](#)/unit.

Create a Single Cycle Plan (Performance-Based)

Use

You can create a performance-based single cycle maintenance plan by using the **Create Maintenance Plan** app.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the **Create Maintenance Plan** app.
3. Specify the maintenance plan for **Service Order**.

4. Specify the maintenance plan type as **Single Cycle (Performance-Based)** and continue.

5. In the items tab, enter a new item by specifying item description, technical object/product, service contract, service contract item, service order template and order type.

i Note

- o The service call object must be specified as service order or service quotation. To make the service order or service quotation as an available option for your choice in the service call object drop-down list, you must make the following settings:
 - Specify the target transaction type of the call object and the source transaction type of the service contract in Customizing for **Service** under **▮ Transactions ▸ Basic Settings ▸ Copying Control for Business Transactions ▸ Define Copying Control for Transaction Types ▾**.
 - Specify the target transaction type of the call object and the source transaction type of the service order template in Customizing for **Service** under **▮ Transactions ▸ Basic Settings ▸ Copying Control for Business Transactions ▸ Define Copying Control for Transaction Types ▾**.
 - Specify a value for the service contract determination option in Customizing for **Service** under **▮ Transactions ▸ Basic Settings ▸ Define Transaction Types ▾**.
- o You can use the value help when entering a service contract or a service contract item. In the search criteria for the value help, your entered product or technical object is filled as search criteria by default. The service contract items whose object lists contain the product or the technical object are displayed for your selection. You can also specify more products or technical objects. If the specified products and technical objects belong to the same object list of a service contract item, the service contract item is displayed for your selection.
- o You can use the value help when entering a service order template. In the search criteria for the value help, your entered product or technical object is filled as the search criteria by default. The service order templates whose reference object is the product or the technical object are displayed for your selection. If the specified technical object is a piece of equipment and no corresponding service order template is found, the service order templates which contain the reference product of the equipment are displayed for your selection.

6. Choose the newly created item.

7. On the general data tab in the details for item section, specify the service priority.

i Note

- o Here you can click **Do Not Release Immediately** so that the generated call objects have the open status. If you do not click this option, the generated call object that contains no errors will have the released status.

8. On the object list tab in the details for item section, specify technical objects/products.

i Note

If the object list has been specified in the service contract item that you have specified, you are prompted to select technical objects upon the first time you fill in the object list for the maintenance plan.

9. On the planning data tab, enter a description for your maintenance plan.

10. In the date determination section, specify the start date for scheduling, end date for scheduling, [shift factor](#), [tolerance](#), and [scheduling indicator](#).

i Note

- When you specify the start date for scheduling and end date for scheduling, ensure that this period is within the start date and end date of the specified service contract item with the released status. If the end date for scheduling is not specified, the maintenance plan can be repeatedly scheduled. It is recommended that you specify the start date for scheduling. If you do not specify the start date for scheduling, the maintenance plan cannot be scheduled through mass scheduling.

11. In the call control section, specify the [scheduling period](#), [call horizon](#), and completion required.

i Note

- If you specify completion required, a call object is not generated until the previous call object is completed. When a maintenance plan has multiple maintenance items, call objects are not generated from a maintenance item until all the call objects of the previous maintenance item are completed with completion date updated. If you want to start generating call objects from a maintenance item, you can manually set the completion date for call objects generated from the previous maintenance item.

12. In the cycle section, specify the cycle/unit, cycle description, [offset](#)/unit, and counter.

Create a Multiple Counter Plan

Use

You can create a multiple counter maintenance plan by using the [Create Maintenance Plan](#) app.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the [Create Maintenance Plan](#) app.
3. Specify the maintenance plan for [Service Order](#).
4. Specify the maintenance plan type as [Multiple Counter](#).
5. On the planning data tab, specify the description of the maintenance plan.
6. In the date determination section, specify the start date, end date, start time, and [lead float](#) for the maintenance plan.

i Note

The start time and lead float are optional.

7. In the call control section, specify the [scheduling period](#), completion required, and operation type.

i Note

- If you specify completion required, a call object is not generated until the previous call object is completed. When a maintenance plan has multiple maintenance items, call objects are not generated from a maintenance item until all the call objects of the previous maintenance item are completed with completion date updated. If you want to start generating call objects from a maintenance item, you can manually set the completion date for call objects generated from the previous maintenance item.

8. In the cycles section, specify the cycle, unit, description of cycle, counter, [cycle set](#) sequence, [repeat factor](#), and [offset](#).

9. In the items tab, create a new item by specifying item description, technical object/product, service contract, service contract item, service order template, order type, and cycle set sequence.

i Note

- The service call object must be specified as service order or service quotation. To make the service order or service quotation as an available option for your choice in the service call object drop-down list, you must make the following settings:
 - Specify the target transaction type of the call object and the source transaction type of the service contract in Customizing for **Service** under **Transactions > Basic Settings > Copying Control for Business Transactions > Define Copying Control for Transaction Types**.
 - Specify the target transaction type of the call object and the source transaction type of the service order template in Customizing for **Service** under **Transactions > Basic Settings > Copying Control for Business Transactions > Define Copying Control for Transaction Types**.
 - Specify a value for the service contract determination option in Customizing for **Service** under **Transactions > Basic Settings > Define Transaction Types**.
- You can use the value help when entering a service contract or a service contract item. In the search criteria for the value help, your entered product or technical object is filled in as search criteria by default. The service contract items whose object lists contain the product or the technical object are displayed for your selection. You can also specify more products or technical objects. If the specified products and technical objects belong to the same object list of a service contract item, the service contract item is displayed for your selection.
- You can use the value help when entering a service order template. In the search criteria for the value help, your entered product or technical object is filled in as the search criteria by default. The service order templates whose reference object is the product or the technical object are displayed for your selection. If the specified technical object is a piece of equipment and no corresponding service order template is found, the service order templates which contain the reference product of the equipment are displayed for your selection.

Scheduling Parameters

You can use the scheduling parameters to adapt the scheduling process to meet your individual requirements.

Shift Factor

There are two shift factors:


- Early completion
- Late completion

You can define the shift factor specifically for your maintenance plan by specifying the shift percentage to be taken into account when calculating the next planned date.

The shift factor only applies once the maintenance plan has already been scheduled, and when the difference between the planned date and actual date lies outside the tolerance range.

Example

Assume that the cycle is 30 days, the first planned date for your service order is April 10, the completion date of the first schedule is April 20. If the shift factor for late completion is set to 80%, then the planned date of the second schedule will be delayed for 8 days (10 days x 80%). For details, see the following figure:

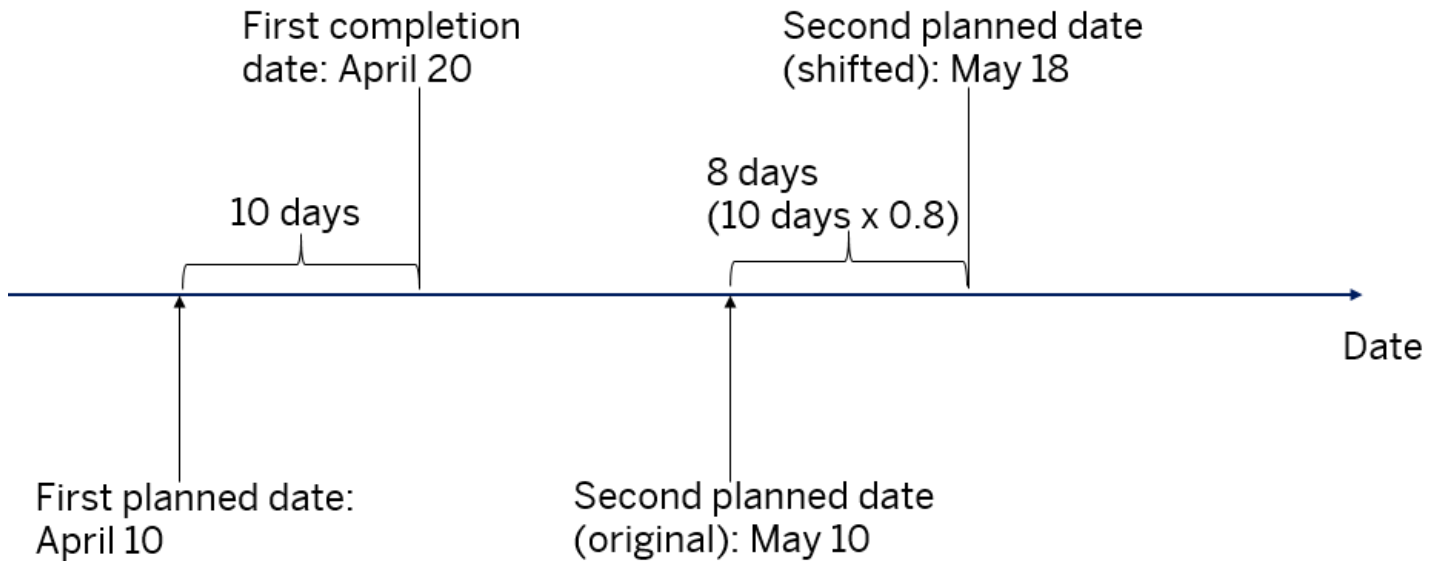

Tolerance

There are two tolerance ranges for the scheduling parameters:

- Tolerance (+)

For a late completion, this tolerance defines the time span in which a positive deviation between the actual and planned date does not influence any subsequent scheduling.

- Tolerance (-)


For an early completion, this tolerance defines the time span in which a negative deviation between the actual and planned date does not influence any subsequent scheduling.

Example

Tolerance can define a threshold to decide whether the next planned date should be shifted. Assume that the cycle is 30 days and tolerance (+) is set to 40%. In this case, the threshold is 12 days.


- If the completion date minus the planned date is within the threshold 12 days, the next planned date will not be changed.

Cycle = 30 days
 Shift factor for late completion = 50% → $10 \text{ days} \times 50\% = 5 \text{ days}$
 Tolerance (+) = 40% → Threshold = 12 days
 Completion date – planned date ≤ Threshold → Next planned date is not changed

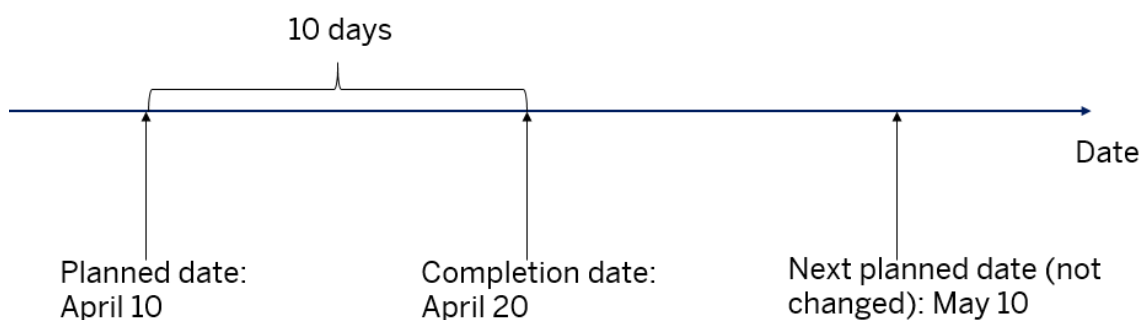

- If the completion date minus the planned date is greater than the threshold 6 days (30 days x 20%), the next planned date will be delayed according to the [shift factor](#) that you specified.

Cycle = 30 days
 Shift factor for late completion = 50% → 10 days x 50% = 5 days
 Tolerance (+) = 20% → Threshold = 6 days
 Completion date – planned date > Threshold → Next planned date is delayed

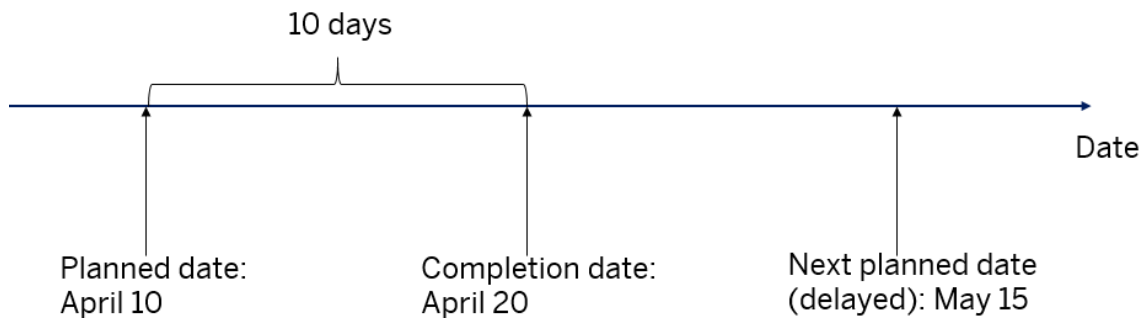

Scheduling Period

You can use the scheduling period to display a preview of the maintenance dates in the queue. The scheduling period specifies in days, months, or years the actual length of time over which scheduling will take place. For example, if you want a maintenance plan to be scheduled for the entire year, so that all the calls are generated for this year, you can enter 365 days or 12 months as the scheduling period.

Call Horizon

The call horizon specifies when a call object should be created, meaning how much time there should be between the confirmation date or start date and the next planned date of a maintenance plan before the maintenance order is created. You can define a percentage, a number of calendar days, or a number of working days for the call horizon.

- If you specify % (Percent), the system calculates the times for the maintenance call based on this percentage of the maintenance cycle and creates service orders or service quotations **after** the specified time.
- If you specify calendar days (DAY), the system generates the call objects a certain number of days **before** the planned date. When scheduling the maintenance call, the system does not take weekends, holidays, or your company's vacation shutdowns into account.
- If you specify working days, or factory calendar days (FCD), the system generates the call objects a certain number of working days **before** the planned date. The system bases scheduling on the assigned factory calendar and takes weekends, holidays, and your company's vacation shutdowns into account.

Example

The total maintenance cycle is 250 days. If you define a call horizon of 0%, 80%, or 100%, the system creates service orders after the following number of days:

0%	Immediate call
80%	Call after 200 days (=80% of 250 days) If the start date is April 1, 2020, the service order will be created 200 days later on November 17, 2020.
100%	The call is made when the planned date has been reached.

Scheduling Indicator

The following scheduling indicators are supported:

- Time-based scheduling (**Time**)
- Scheduling based on a key date (**Time - key date**)
- Scheduling by factory calendar (**Time - factory calendar**)

Time- based scheduling (**Time**)

If you create a monthly maintenance cycle (one month = 30 days) and have specified time-based scheduling, planned dates are calculated as follows:

Current date	August 21, 2020
1st planned date	September 20, 2020
2nd planned date	October 20, 2020
3rd planned date	November 19, 2020

Planned dates are therefore created every 30 days.

Scheduling based on a key date (**Time - key date**)

If you create a monthly maintenance cycle (one month = 30 days) and have specified key-date scheduling, planned dates are calculated as follows:

Current date	August 21, 2020
1st planned date	September 21, 2020
2nd planned date	October 21, 2020
3rd planned date	November 21, 2020

The planned dates always fall on a specific day of each month, in this example on the 21st of each month.

i Note

You can not define a key date later than the 28th of a month.

Scheduling by factory calendar (**Time - factory calendar**)

If you create a monthly maintenance cycle (one month = 30 days) and have specified scheduling by factory calendar, planned dates are calculated as follows:

Current date	August 21, 2020
1st planned date	October 02, 2020
2nd planned date	November 15, 2020
3rd planned date	January 02, 2021


The planned dates therefore have an interval of 30 working days. In this example, five days of the week have been defined as working days in the factory calendar.

Lead Float

Lead float is only applicable to multiple counter plans. If you specify lead float, the system generates the call objects a certain number of days before the planned date.

Example

By default, lead float is set to 0. In this case, the planned date and the call date of a multiple counter maintenance plan is the same day. Assume that the cycle is 30 days and lead float is set to 4. The call date will be four days earlier than the planned date.

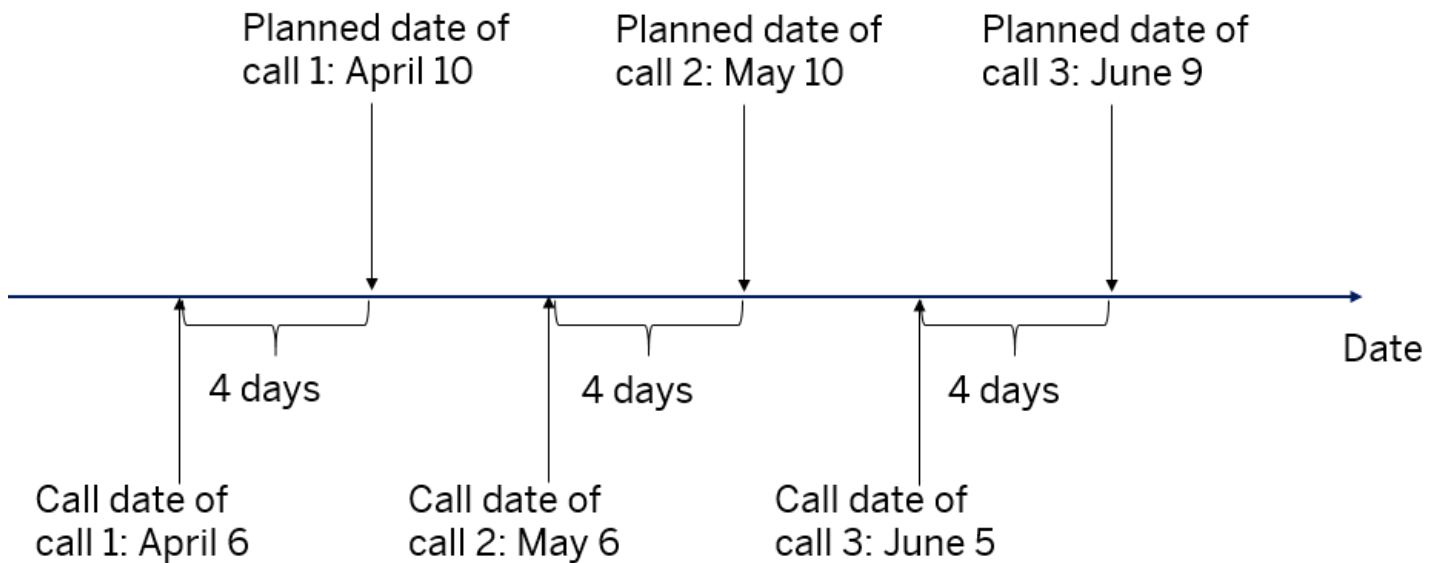


Offset

The offset of a maintenance cycle determines the time after which a maintenance cycle first becomes due.

Example

Offset defines the cycle of the first schedule. Assume that the start date of the first cycle is Jan 15, the cycle is 2 month (60 days), and the offset is 3 month (90 days). The first planned date will be April 13, 90 days after Jan 05.

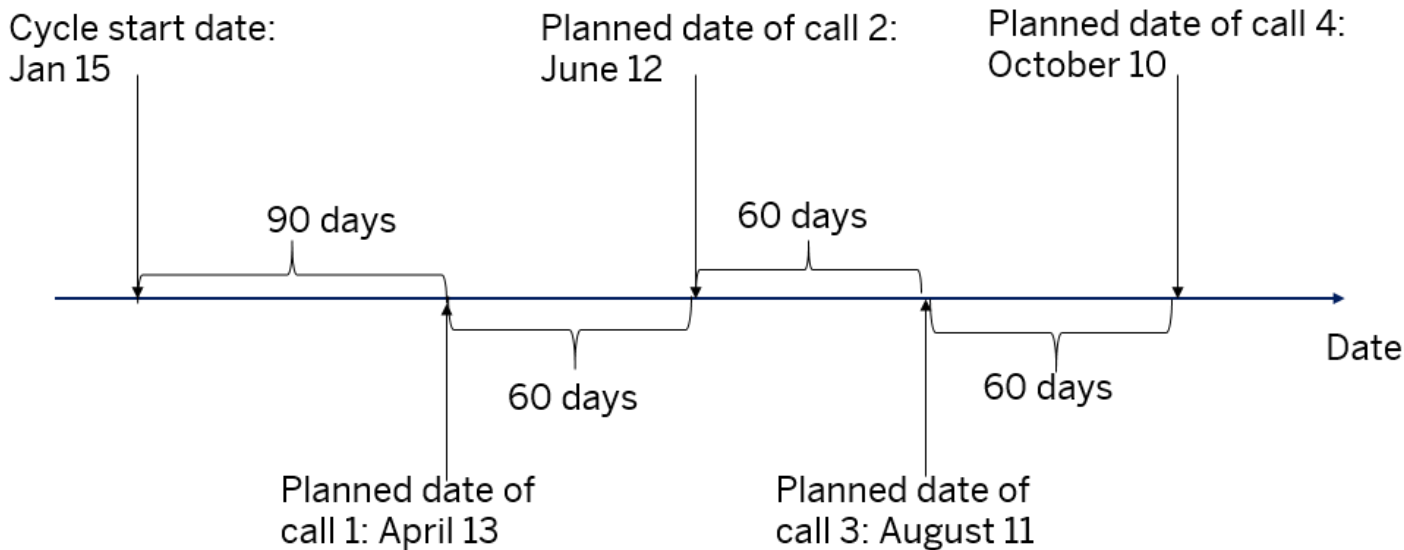


Repeat Factor

The repeat factor is used for cycle set sequence. It determines how often in a sequence a cycle set is used to calculate a date, before the system changes to the next cycle set.

Example

Assume that the repeat factor for cycle set 1 is set to 3 and the repeat factor for cycle set 2 is set to 1. The following figure shows details:

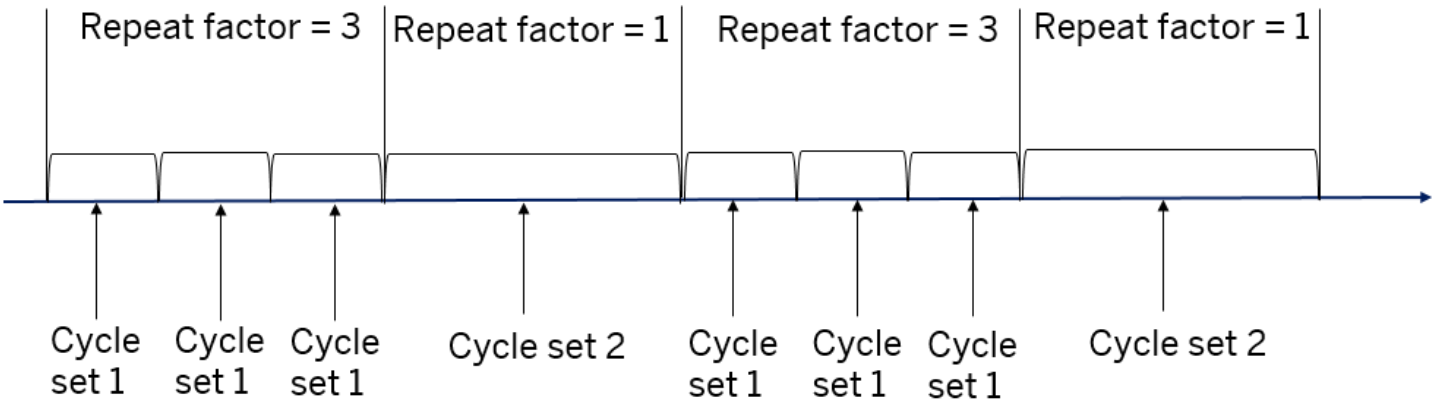

Cycle Set


A cycle set is a combination of cycles. You create a cycle set to which you assign maintenance cycles. In these maintenance cycles, you define possible times or performance levels for planned maintenance, for example, monthly, every 6,000 kilometers.

Cycle Modification Factor

You can use cycle modification factor to define the execution time for a maintenance plan individually. By entering a cycle modification factor, you can lengthen or shorten the specified cycle. A cycle modification factor greater than 1 lengthens the cycle, whereas a factor less than 1 shortens the cycle.

Example

Assume that the cycle is specified to 30 days and the cycle modification factor is set to 2. The cycle will be changed to 60 days (30 days x 2).

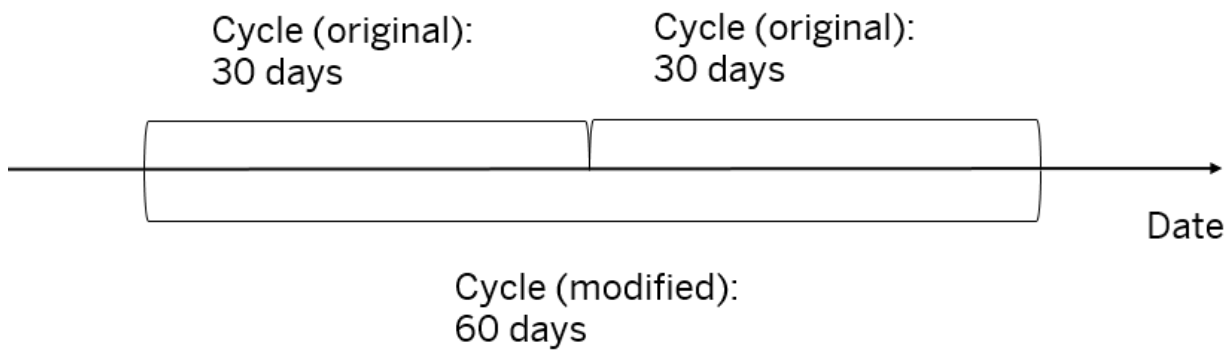

Scheduling of Maintenance Plans

You can schedule single cycle plans and multiple counter plans.

Schedule a Maintenance Plan

Use

You can use the [Schedule Maintenance Plan](#) app to schedule a maintenance plan.

Prerequisites

Before scheduling a maintenance plan, ensure that you have created a maintenance plan correctly.

Procedure

1. Log on to the SAP Fiori launchpad as a service planner.
2. Choose the [Schedule Maintenance Plan](#) app.
3. Enter the ID of the maintenance plan that you have created.
4. Choose to execute the maintenance plan in the lower right corner.
5. In the start date window that is displayed, specify the start of the cycle and continue.

i Note

If necessary, you cancel scheduling by choosing to undo scheduling in the upper left corner.

6. Save the scheduled maintenance plan.

Rescheduling

Use

You can restart scheduling for your maintenance plan. This is useful, for example, if there has been a major shutdown in your company and you want to resume maintenance from a new start date.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the [Schedule Maintenance Plan](#) app.
3. Enter the ID of the maintenance plan that you want to reschedule.
4. Choose to execute in the lower right corner.
5. Choose to new start in the upper left corner.
6. In the scheduling window that is displayed, decide whether the system should delete or skip the calls in the waiting status
7. Enter the date at which you want to restart scheduling and continue.
8. Save the rescheduled maintenance plan.

Create a Maintenance Call Manually

Use

A manual maintenance call allows you to include additional dates for maintenance calls without affecting normal scheduling. You can specify the required call date. The call horizon is not considered for a manual maintenance call. Manual calls are not supported for multiple-counter maintenance plans.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the [Schedule Maintenance Plan](#) app.
3. Enter the ID of the maintenance plan that you want to schedule.
4. Choose to execute in the lower right corner.
5. Choose manual call in the upper menu bar.
6. In the start date window that is displayed, enter the date for the manual call and continue.
7. Save the manual call.

Change the Status of a Maintenance Call

Use

If you have called up the maintenance plan in scheduling mode, you can change the status of a scheduled maintenance call.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.

2. Choose the [Schedule Maintenance Plan](#) app.
3. Enter the ID of the maintenance plan whose maintenance call status you want to change.
4. Choose to execute in the lower right corner.
5. In the scheduling list, choose a maintenance call.
6. In the lower part of the scheduling call list, choose the appropriate button to set the maintenance call status to [save to call](#), [fixed](#), or [skipped](#).

i Note

You can define the following maintenance call statuses:

- **Save to call:** After you choose to release a maintenance call, its status changes to [save to call](#). When you save the maintenance plan, the system releases the call and creates a call object.
- **Fixed:** You can specify the fixed plan date when setting the maintenance call status to [fixed](#). The system fixes the call for the date that you entered.
- **Skipped:** The system ignores a skipped maintenance call and no call object is created.

Display Call Objects

Use

When maintenance plans are scheduled, the system generates call objects. You can display call objects in the [Schedule Maintenance Plan](#) app.

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the [Schedule Maintenance Plan](#) app.
3. Enter the ID of the maintenance plan whose call objects that you want to display.
4. Choose to execute in the lower right corner.
5. In the scheduling list, choose a maintenance call and release it.
6. Save the maintenance plan.
7. Choose to execute the maintenance plan in the lower right corner.
8. In the lower part of the scheduling list, choose to display the call object for the released maintenance call.

Mass Schedule Maintenance Plans

Use

You can mass schedule maintenance plans in the [Mass Schedule Maintenance Plans - Service](#) app.

Prerequisites

To use the mass scheduling functionality correctly, you must add the entry `SAP_SERV_MASS_SCHEDULE_MPLAN` in Customizing under [SAP NetWeaver](#) > [Application Server](#) > [System Administration](#) > [Activation of Scope-Dependent Application Job Catalog Entries](#).

Procedure

1. Log on to the SAP Fiori launchpad as a service manager.
2. Choose the [Mass Schedule Maintenance Plans - Service](#) app.
3. Choose the [Create](#) button in the upper right corner to create a new job.
4. Specify the job template in step 1.
5. Specify the scheduling options in step 2.
6. Specify maintenance plan options in step 3 and choose to schedule.

Call Object Generation

Call objects are automatically generated from a maintenance plan based on the [service order template](#) and service contract that you specified in the maintenance plan. If data in the service order template and service contract has been changed, the latest data in the service order template and in the service contract at the point in time when call objects are generated is copied to the generated call objects. You can modify items in the newly generated call objects.

Generation Conditions

Call objects can be generated from a maintenance plan when the following conditions are met:

- The service contract item and service order template specified in the maintenance plan have the released status.
- The point in time to generate call objects resides within the start date and end date of the service contract item and the service order template.
- You are granted the authorization to create service orders or service quotations and to access the related data.

Generation Logic

When call objects are generated, the following applies:


- The description of a maintenance plan item is copied as the description of a generated call object.
- Service contract ID and item number are copied to a generated call object header and item.
- Sold-to party is copied from service contract to a generated call object. In the absence of a service contract, the sold-to party is copied from the technical object.
- Sales organizational data is copied from a service contract to a generated call object. In the absence of a service contract, the sales organizational data is copied from the technical object.
- Service organizational data is copied from service contract to a generated call object. In the absence of a service contract, the service organizational data is left blank.
- Employee responsible is copied from the service order template to a generated call object.

- Employee group is copied from service order template to the generated call object.

i Note

To ensure that the employee responsible and the service employee group are correctly copied from a service order template to a service order, set the employee responsible and service employee group to **Changeable** in Customizing for **Service** under **Basic Functions > Partner Processing > Define Partner Determination Procedure**.

- Service priority in a maintenance item is copied as the priority of a generated call object.
- Service items in a service order template are copied for each reference object in the generated call objects. Objects specified in the technical object, product, and object list in maintenance items are copied to the header of a generated call object as reference objects.

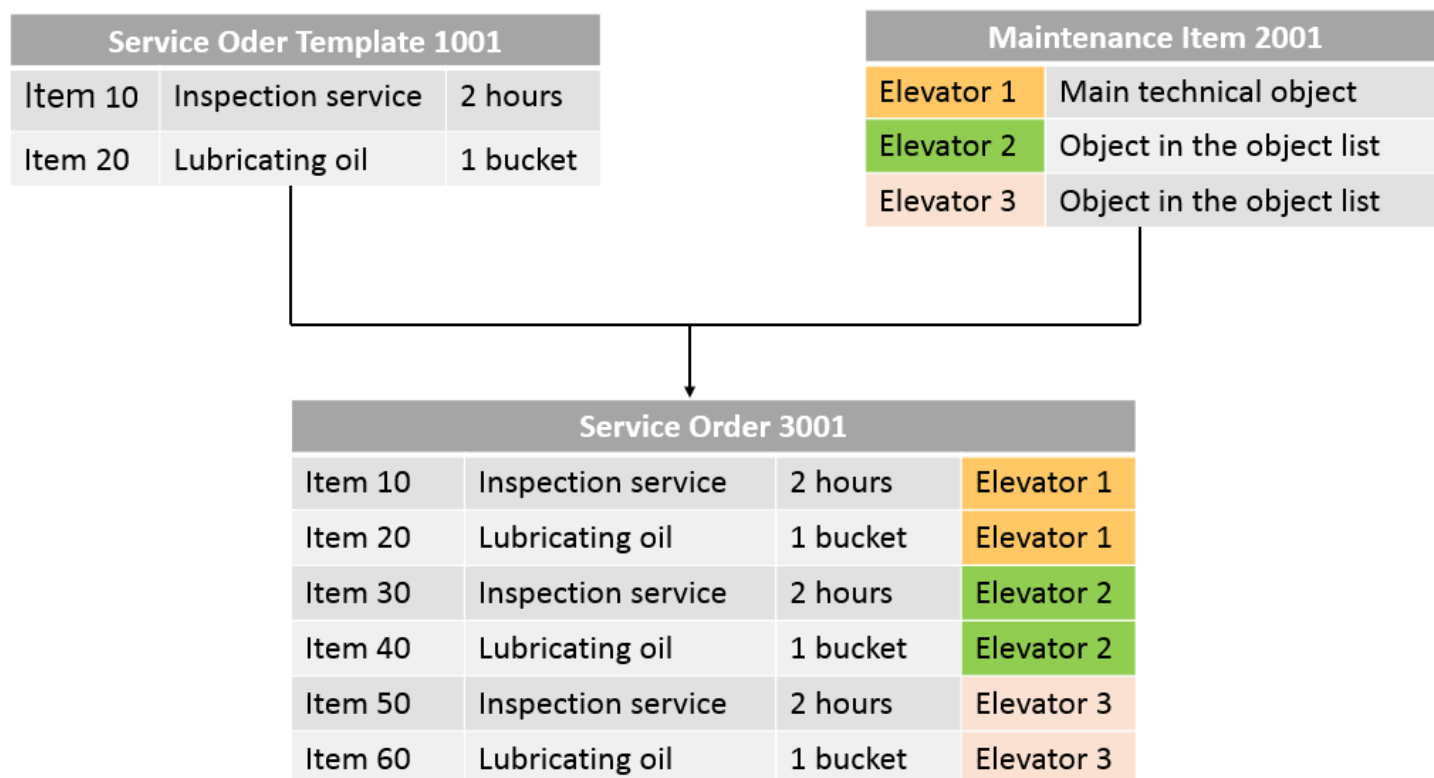

You can adapt the call object generation logic by using [BAdI: Enhancement of Service Order Generation](#).

BAdI: Enhancement of Service Order Generation

Use

This Business Add-In (BAdI) is used in the Recurring Service component (CRM-S4-SRV-MNP). You can use this BAdI to adapt the predefined call object generation logic. This BAdI uses interface IF_CRMS4_MPLAN_SCHED_MODIFY. With this BAdI, you can adjust the predefined call object generation logic based on the following fields:

- Standard fields and custom fields of a maintenance plan
- Standard fields, including service contract item and service order template, and custom fields of a maintenance item
- Maintenance plan call number, next planned date, and measurement point

You can adapt the following fields in the generated call objects:

- In call object header

Description, priority, employee responsible, status, custom fields, and partners

- In call object item


Item number, parent item number, product, quantity, unit, reference object, doc flow relation with service order template items, custom fields, and partners

This BAdI uses the following business contexts:

- **CRMS4_SERV_H**: service transaction header
- **EAMS_MPLA**: maintenance plan
- **EAMS_MPOS**: maintenance item

Example

You can use this BAdI to change the number of items, quantity, and reference objects in a call object item.

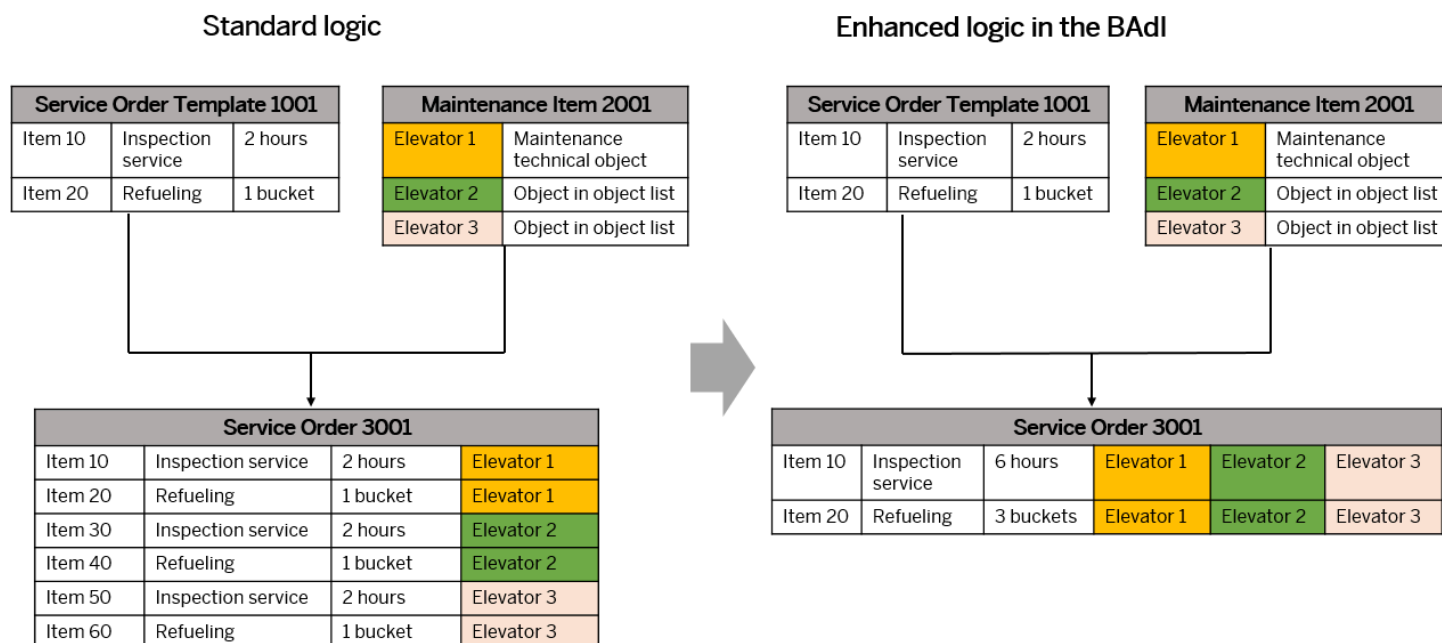

Maintenance Plan Status

A maintenance plan can be in the status of active, inactive, and deletion flag set.

- Active

When a maintenance plan status is set as active, you can make changes to the maintenance plan.

- Inactive

When a maintenance plan status is set as inactive, you can no longer schedule a maintenance plan. This means that the system does not generate any maintenance calls or call objects for the maintenance plan.

- Deletion Flag Set

When you mark a maintenance plan for deletion, the maintenance plan has been set for archiving. The system does not generate any further maintenance calls for this maintenance plan. The maintenance plan can no longer be scheduled.

When a maintenance plan has been archived, you are no longer able to view this maintenance plan in the corresponding service contract item, service order template, service quotation, or service order. A service contract or a service order template used in an active maintenance plan cannot be archived.

Error Handling

- When an authorization error occurs in a maintenance plan, the corresponding maintenance call is terminated, and the maintenance plan is no longer scheduled. An authorization error can be:
 - You have no authorization to access a service contract.
 - You have no authorization to access a service order template.
 - You have no authorization to generate a call object.
 - You have no authorization to access a maintenance plan with specific authorization groups.
- If a maintenance plan contains multiple items and any of the items has errors, call objects can still be generated for the rest of the items. In this case, the errors occur in the items can only be the following:
 - The service contract item is not in the released status.
 - The service order template is not in the released status.
 - The validity period of the maintenance item is not within the period between the start date and end date of the corresponding service contract item or service order template.
- Errors that occur in the [Schedule Maintenance Plan - Service](#) app are displayed as pop-ups, while errors that occur in the [Mass Schedule Maintenance Plan - Service](#) app are displayed in the [Monitor Mass Scheduling Logs - Service](#) app.
- If the sold-to party in a service contract is blocked due to errors, call objects are not generated from the corresponding maintenance plan.
- If the employee responsible in a service order template is blocked due to errors, call objects can be generated from the corresponding maintenance plan, but employee responsible is blank in the generated call objects.

i Note

The object and subobject for application logs are CRMS4_MPLAN and MASS_SCHEDULE_LOG respectively.

Authorization

To access, maintain and schedule maintenance plans for service quotations or service orders, the following transactions shall be available in the authorization objects I_TCODE (transaction code) and I_BEGRP (authorization group):

- CRMS4_MPLAN_CREATE
- CRMS4_MPLAN_CHANGE
- CRMS4_MPLAN_DISPLAY
- CRMS4_MITEM_CREATE
- CRMS4_MITEM_CHANGE
- CRMS4_MITEM_DISPLAY
- CRMS4_MPLAN_SCHED_S

- IP10

Display of Service Planning History

Service managers can view the service planning history of a technical object used in recurring service in the [Find Technical Object](#) app. The detailed service planning history of a technical object used in recurring service is displayed in the [Maintenance Items for Service](#) facet. On this facet, the following fields are displayed by default:

- Maintenance item
- Maintenance plan
- Service contract
- Service contract item
- Service template
- Service priority
- Service order type

i Note

- Any technical object, including equipment and functional location, that has been used in a maintenance item or maintenance item's object list, is displayed in the [Maintenance Items for Service](#) facet.
- If a technical object is used both in a maintenance item and the maintenance item's object list, only one entry is displayed for this maintenance item in the [Maintenance Items for Service](#) facet.

In the [Maintenance Items for Service](#) facet, you can navigate from a maintenance item to the following:

- Maintenance plan
- Maintenance item
- Service contract
- Service order template

i Note

- Additional data level authorization is performed when you navigate from a maintenance item to transactions like service contract and service order template. If you do not have data access right to the corresponding service contract or service order template, no data is displayed for navigation.
- Maintenance items or maintenance plans that are used for plant maintenance are not displayed in the [Maintenance Items for Service](#) facet.
- Users of service, for example, service planner and customer service manager can view the [Maintenance Items for Service](#) facet; while users of plant maintenance, for example, maintenance planner, cannot view this facet.

Apps for Recurring Service

Create Maintenance Plan

App ID: IP01

With this app, you can plan recurring service work by creating time-based and performance-based single cycle plans and multiple-counter plans. In time-based maintenance plans, maintenance is performed in specific time intervals, for example, every two months or every six months. With performance-based maintenance plans, you can plan regular maintenance based on counter readings maintained for measuring points of pieces of equipment and at functional locations.

Key Features

You can use this app to:

- Create a maintenance plan and determine which maintenance call object the system generates for the maintenance plan when a maintenance call is due (for example, service order). You can create single cycle plans or multiple-counter plans.
- Create and assign maintenance items that describe which service items need to be fulfilled for a technical object or a group of technical objects.
- View and edit general information for the maintenance item.
- You can create a new service order template or assign an existing one to the maintenance item to specify the individual service items that must be fulfilled.
- View the scheduled maintenance calls and call objects for the maintenance plan.

Supported Device Types

- Desktop
- Tablet
- Smartphone

Find Maintenance Plans - Service

App ID: F5009

With this app, you can find and display maintenance plans for the recurring service. You can do this either by filtering the list or by using a free text search. You can display a single maintenance plan to view its properties, its assigned maintenance items, and its scheduled and manual maintenance calls.

Key Features

You can use this app to:

- View maintenance plans by using the free text search or by filtering for parameters.
- View details of a maintenance plan.
- Export the maintenance plans visible in the table to a spreadsheet.
- Choose a maintenance plan to access the quick view and navigate to specific apps to perform additional tasks.

- View validity data of the respective maintenance plans

Supported Device Types

- Desktop
- Tablet
- Smartphone

Find Maintenance Items - Service

App ID: F5008

With this app, you can find and display maintenance items for the planned recurring service. You can do this either by filtering the list or by using a free text search. You can display a single maintenance item and view its properties.

Key Features

You can use this app to:

- View maintenance items by using the free text search or by filtering for parameters.
- View details of a maintenance item.
- Export the maintenance items visible in the table to a spreadsheet.
- Display quick views with details of the maintenance plan or the related technical object.
- Choose a maintenance item to access the quick view and navigate to specific apps to perform additional tasks.

Supported Device Types

- Desktop
- Tablet
- Smartphone

Schedule Maintenance Plan - Service

With this app, you can schedule a maintenance plan with which the system generates call objects (for example, service quotations or service orders) for the defined cycles.

For each scheduling, the system calculates the due date (planned date) for a call object based on the scheduling parameters and the maintenance cycles or packages and generates maintenance calls. When the maintenance call is due, the system generates a call object for each due maintenance item. Which object the system generates is determined by the maintenance plan category.

You can control scheduling requirements using the scheduling parameters in the maintenance plan. The system calculates the cycles in which call objects should be generated using these scheduling parameters.

Key Features

This app provides the following key features:

- Specify the date and time for the system to start the scheduling. You can also decide to start the scheduling immediately.
- You can cancel or restart scheduling for a maintenance plan.
- Add more scheduling options such as the calendar, or whether maintenance plans shall only be scheduled on working days.
- Enter a recurrence pattern to specify how often the scheduling job is to run. You can run the job daily or even several times a day.

Supported Device Types

- Desktop
- Tablet
- Smartphone

Mass Schedule Maintenance Plans - Service

With this app, you can schedule all maintenance plans for the recurring service that are due within a specific time frame. This simplifies the creation of call objects for maintenance plans, especially if you need to schedule a large number of maintenance plans.

For each scheduling run, the system goes through all the maintenance plans taking parameters such as counter readings into account to calculate the due date. It then generates a call object for each due maintenance item. You can control special scheduling requirements using the scheduling parameters in the maintenance plan.

Key Features

This app provides the following key features:

You can view the jobs for mass scheduled maintenance plans and generate new maintenance calls and call objects:

- Specify the date and time for the system to start the scheduling. You can also decide to start the scheduling immediately.
- Add more scheduling options such as the calendar, or whether maintenance plans shall only be scheduled on working days.
- Enter a recurrence pattern to specify how often the scheduling job is to run. You can run the job daily or even several times a day.
- Enter a time frame within which you want the system to generate the maintenance calls and call objects.
- Use parallel processing for the automatic scheduling of maintenance plans.

You then can specify the number of parallel processes and which application servers can be used to what extent.

If a maintenance plan has multiple items and any item of the maintenance plan meets the settings in maintenance plan options, the maintenance plan can be mass scheduled.

Situation Handling

This app uses Situation Handling to notify you about errors that occur in the specified mass scheduling job. To alert you to this situation, the system sends you notifications on SAP Fiori launchpad and displays in-app situation messages on the object pages

of the affected scheduling jobs.

For more information about the situation template that is used by this app, see [Service Maint. Plan Mass Schedule Issue](#).

Supported Device Types

- Desktop
- Tablet

Monitor Mass Scheduling Logs - Service

App ID: F4930

With this app, you can view application logs generated during the mass scheduling of maintenance plans for the recurring service.

Key Features

This app provides the following key features:

- View application log details
- Filter application logs by severity and by the description of mass scheduled application jobs
- Search for log texts
- Display log details

Supported Device Types

- Desktop
- Tablet

Service Maint. Plan Mass Schedule Issue

Technical Name: SRVC_MPLAN_MASS_SCHEDULING_ISSUE

Consuming App: [Mass Schedule Maintenance Plans - Service](#)

Template used for Situation Handling that informs service planners about issues occur in the specified mass scheduling job.

For background information about the Situation Handling framework, see the Product Assistance for [Situation Handling](#).

Business Value

As a configuration expert for business processes (SAP business role SAP_BR_BPC_EXPERT), you can use this template for the following situation:

You want service planners to be informed automatically when issues occur in the specified mass scheduling job.

Default Settings

The template comes with predefined settings. For the settings that aren't visible or self-explanatory, you can find information in the following sections. For generic information about how to configure situations based on this template, refer to the documentation of the [Manage Situation Types](#) app with which you can display and use the template.

For more information, see [Manage Situation Types](#).

Situation Trigger Object and Anchor Object

These technical settings define for which object a situation is displayed (anchor object) and the object based on which a situation is triggered (trigger object):

Trigger Object: Service Maintenance Plan Mass Schedule Issue

Anchor Object: Service Maintenance Plan Mass Schedule Issue

Trigger Type: Event

Description: The situation is triggered when issues occur in the specified mass scheduling job.

Conditions

Conditions in this template define that a situation is created with the status **Resolved** when issues occur in the specified mass scheduling job and that a notification is sent to the defined recipients if the system detects mass scheduling job issues that meet the criteria specified above.

i Note

The value of the **Job Short Description** filter in the condition is not more than 45 characters in length. The filter will not work if the input value exceeds 45 characters. The filter works only when your input is within the first 45 characters of the job short description.

For more information, see [Conditions](#).

Situation Display

When situations occur, users are informed about them by various texts, such as in-app situation messages or notifications on SAP Fiori launchpad. In this section, you can see all preconfigured texts.

For more information, see [Situation Display](#).

i Note

When you copy the template and adapt it to your needs, you can define the notification settings and change all text elements in this section. After making the changes in the original language, please remember to translate these changes into the other languages that you want to use. The template comes with translations that can be changed directly when you copy the template.

For more information, see [Translate Situation Types](#).

Recipients

Responsibility by Rules:

For this template, the recipients of the notifications can be determined by the following predefined rule:

- **Notify job creator**

The rule determines that if issues occur in the specified mass scheduling job, the user who is specified as the job creator for it is informed about this business situation. The user can only be a business user.

For more information, see [Recipients](#).

Situation Monitoring

Monitor Instances: Monitoring (the tracking of changes to situation instances) isn't enabled by default for situation templates. When you copy the template to create a situation type, you need to enable this option if you want to capture data for this situation type and enable the creation of [business situation events](#). You can view the data in the [Monitor Situations](#) app.

Related Information

- [Situation Handling](#)
- [Key Concepts in Situation Handling](#)
- [Mass Schedule Maintenance Plans - Service](#)
- [Monitor Mass Scheduling Logs - Service](#)

BADIs in Recurring Service

The following Business Add-Ins (BAI) can be used in Recurring Services. You can find them in Customizing under [Service Transactions](#) > [Settings for Recurring Service](#) > [Business Add-Ins](#)

BAI	Technical Name	Use
Enhancement of Service Order Generation	CRMS4_MPLAN_SCHEDULING_MODIFY	You can use this BAI to adapt the predefined service order generation logic.
Reuse Service Transaction in Recurring Service	CRMS4_MPLAN_CALL_TYPE_5	You can use this BAI to reuse a service transaction with service items and the addition of service items into an existing service transaction.
Maintenance Plan Scheduling	CRMS4_MPLAN_SCHEDULING	You can use this BAI to introduce custom validations, in addition to the existing standard validations, for the generation of the call object during scheduling.
Contract Determination in Recurring Service	CRMS4_MPLAN_ORDER_PREPARE	You can use this BAI to allow contract determination for individual service transaction items generated from a maintenance plan.

Situation Templates in Service

Get an overview of situation templates available in Service, together with the apps that display the situations. You can filter them according to various criteria.

i Note

For more information about the Situation Handling framework in SAP S/4HANA, see the Product Assistance for [Situation Handling](#).


Situation Templates in Service

Area or Topic	Solution Capability	Situation Template	Situation Template ID	Situation Template Type	Data Context	App Name	SAP F
Service	In-House Service	Situation Template: In-House Service Not Confirmed	SRVC_DELAY_IN_IHR_CONFIRMATION	Standard object-based	No	Manage In-House Services	F4029
Service	In-House Service	Situation Template: Processing of In-House Service Overdue	SRVC_DELAY_IN_IHR_PROCESSING	Standard object-based	No	Manage In-House Services	F4029
Service	In-House Service	Situation Template: Follow-Up Step of Precheck Pending	SRVC_IHRITM_PRECHECK_DELAYED	Standard object-based	No	Manage In-House Service Objects	F7695
Service	Service and Maintenance Plan	Service Maint. Plan Mass Schedule Issue	SRVC_MPLAN_MASS_SCHEDULING_ISSUE	Standard object-based	No	Mass Schedule Maintenance Plans - Service	F4929
Service	Service Contract Management	Service Contract Due to Expire Soon	SRVC_EXPIRING_SERVICE_CONTRACT	Standard object-based	No	Service Contracts	TBT11 (Web UI ID)
Service	Service Contract Management	Service Contract Item Due to Expire Soon	SRVC_EXPIRING_SRVC_CONTR_ITEM	Standard object-based	No	Service Contracts	TBT11 (Web UI ID)
Service	Service Contract Management	Service Contract Item Not Released	SRVC_CONTRACT_ITEM_RELEASE_DUE	Standard object-based	Yes	Service Contracts	F3763
Service	Service Contract Management	Service Contract with Zero Billing Value	SRVC_CONTR_WITH_EXP_BILL_VALUE	Standard object-based	No	Service Contracts	TBT11 (Web UI ID)
Service	Service Contract Management	SrvcContr Item Blocked for Billing	SRVC_CONTRACT_ITEM_BILLG_BLOCKED	Standard object-based	Yes	Service Contracts	F3763
Service	Service Contract Management	Price Check for Automatic Renewal	SRVC_CONTR_AUTO_RENEW_PRICE	Standard object-based	No	Service Contracts	F3763
Service	Service Contract Management	Service Contract GTS Blocked/Pending	SRVC_CTR_GTS_BLOCKED_OR_PENDING	Standard object-based	No	Service Contracts	F3763

Area or Topic	Solution Capability	Situation Template	Situation Template ID	Situation Template Type	Data Context	App Name	SAP F
Service	Subscription Order Management	Subscription Contract Item Due to Expire	SOM_EXPIRING_SUB_CONTR_ITEM	Standard object-based	No	Manage Subscription Contract Lifecycle	F6193
Service	Subscription Order Management	Subscription Contract Item Grace Period	SOM_GRACE_PERD_SUB_CONTR_ITEM	Standard object-based	No	Manage Subscription Contract Lifecycle	F6193
Service	Subscription Order Management	Subscription Contract Item Distribution	SOM_DISTR_ISSUE_SUB_CONTR_ITEM	Standard object-based	No	Manage Subscription Contract Lifecycle	F6193
Service	Service Order Management	Trade Compliance Check Blocked/Pending	SRVC_GTS_BLOCKED_OR_PENDING	Standard object-based	No	Manage Service Orders	TBT11 TBT11
Service	In-House Service	Situation Template: Stock Inconsistency for Service Object	SRVC_IHRITM_PROD_LOGS_ERROR	Standard object-based	No	Manage In-House Service Objects	F7695
Service	In-House Service	Situation Template: Inconsistency in Logistics Information for Service Object	SRVC_IHRITEM_EQUIP_LOGS_ERROR	Standard object-based	No	Manage In-House Service Objects	F7695

Using Situations for Managing Service Processes (English Only)

Watch this video at learning.sap.com.

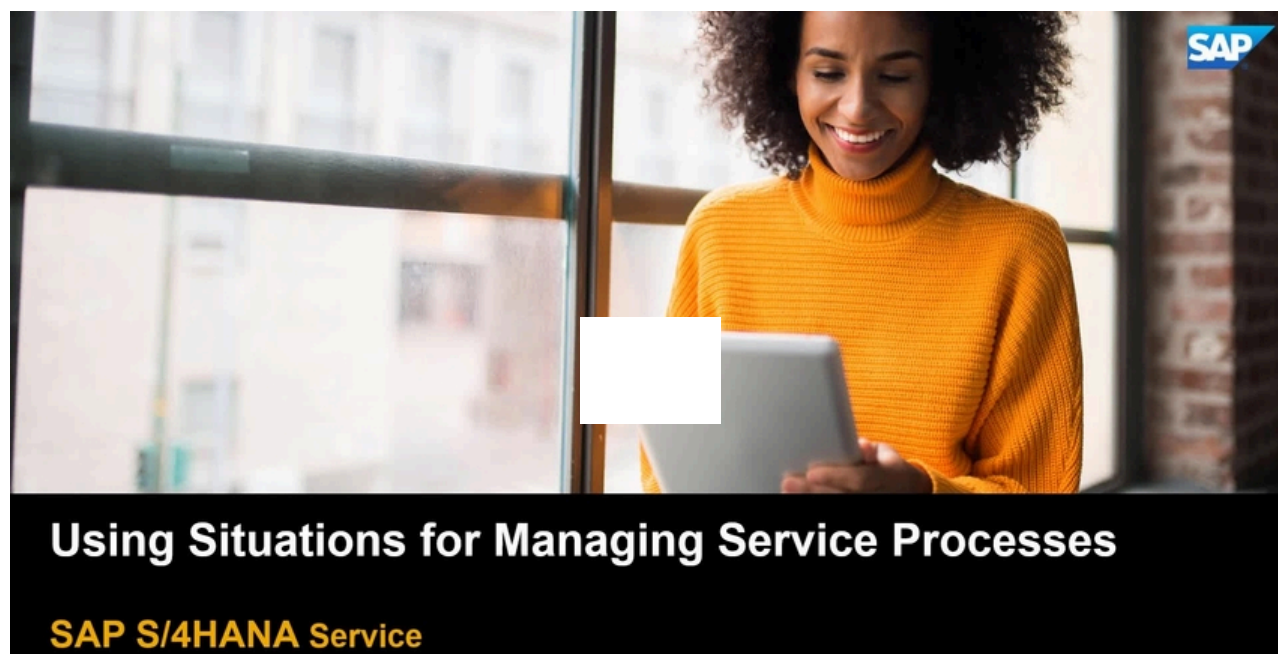

Related Information

[Use Cases for Situation Handling](#)

Data Management in Service

Data management includes data archiving, blocking, unblocking and deleting personal data, as well as data destruction.

[Data Archiving in Service](#)

[Blocking, Unblocking, and Deletion of Personal Data in Service](#)

Related Information

[Data Management in SAP S/4HANA](#)

Data Archiving in Service

Data archiving is used to remove mass data that is no longer required but must be kept in a format that can be analyzed from the database. This section includes archiving objects for Service.

For more information about the archiving objects that are used for leads, opportunities, and activities, see [Data Archiving in Sales](#).

Prerequisites for Archiving Service Transactions

Depending on the Finance integration scenario, you should consider the following when archiving service orders and service contracts:

- If you use item-based accounting, the service orders and service contracts to be archived must be set to **Business Completed**.
- If you use the integration with account assignment manager, the service orders and service contracts to be archived must be set to **Completed**.

Regardless of the Finance integration scenario used, all other transactions, such as service requests, service quotations, and service confirmations, must be set to **Completed** to be archived.

Related Information

[Data Archiving](#)

[Data Management in Global Trade Management](#)

[Item-Based Accounting](#)

[Finalizing the Service Order](#)

[Finalizing the Service Contract](#)

Archiving Service Contracts Using CRM_SRCONT

You can use archiving object CRM_SRCONT to archive service contracts.

Tables

CRM_SRCONT archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_SRCONT can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

CRM_SRCONT is delivered with the following programs:

Program	Name
Write	CRM_ARC_SRCONT_SAVE
Delete	CRM_ARC_SRCONT_DELETE_2
Preprocessing	CRM_ARC_SRCONT_CHECK_2

When archiving service contracts, you must use these programs or custom variants. For information on creating variants, see [Variants for CRM_SRCONT](#)

Prerequisites

The following prerequisites must be fulfilled before you can archive a service contract:

- The service contract has the status [Complete](#) or [Not Relevant](#).
- The residence time is fulfilled.
- Any follow-up service orders and service confirmations are archivable.
- If item-based accounting has been enabled: The service contract has been set to [Business Completed](#).

For more information about item-based accounting, see [Item-Based Accounting](#).

The following checks have been carried out:

- You've executed an archivability check for service contracts by scheduling the cross-archiving-object check program using [Check/Delete](#) in [Archive Administration](#) (transaction SARA). Using the program you can run several check jobs in parallel, which is especially useful for archiving mass data. During the archivability check, service contracts that meet the archivability criteria, receive the status [Archivable](#).
- Alternatively, you've scheduled an archivability check using the archiving-object-specific check program. You schedule this check in [Archive Administration](#) using the [Preprocessing](#) function. In this case parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to process smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_SRCONT ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

For ILM object CRM_SRCONT, you can select several of the following condition fields and put them into a specific order. These fields define your rule structure:

Condition	Description
Business Transaction Category (OBJECT_TYPE)	Use this field to define the leading business transaction category.
Transaction Type (PROCESS_TYPE)	Use this field to define the transaction type the rule applies to, for instance, SC for service contract.
Sales Organization (SALES_ORG_SD)	Use this field to define the sales organization the rule applies to.
Country/Region Key (BS_COUNTRY_OF_VKORG)	Use this field to define a country/region.
Organizational Management Object (BS_CRM_ORGUNIT)	Use this field to define the sales organization created in Service, the rule applies to.
Country/Region Key (BS_CRM_COUNTRY_OF_ORGUNIT)	Use this field to define a country/region.

Once you have selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The time reference is the date when the service contract was last changed. The available time offsets are the end of the month, quarter or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRM_SRCONT assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers an implementation of the following BAdIs for CRM_SRCONT:

- **BAdI: Tables Used by an ILM Object** (BADI_DTINF_ILM_OBJ_TABLES)
- **BAdI: Archiving Information of Tables** (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_SRCONT, there is at least one active archive information structure that contains the following selectable field:

- **Transaction ID** (object_id)

This field is used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_CRMS4_SC that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_SRCONT archiving object, you must first check the settings in Customizing for **Service** under **Transactions** > **Data Archiving**.

In the activity **Configure Archiving Preselection**, you define parameters for the check and preprocessing programs. In the activity **Define Residence Times**, you define the residence time of service contracts.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying Service Contracts Archived With CRM_SRCONT

You have the following options for displaying archived service contracts:

- From within **Archive Administration** (transaction SARA), you can search for archived service contracts using the read program CRM_ARC_SRCONT_READ
- You can also use the **Archive Information System** (transaction SARI) to display archived service contracts by entering the archiving object CRM_SRCONT and the archive infostructure SAP_CRMS4_SC

In both cases, the system provides a range of criteria that enable you to select the service contracts that you want to display.

Variants for CRM_SRCONT

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for CRM_SRCONT.

Defining Write Variants

The write variant contains the parameters for the service contracts that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the service contracts that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in [Archive Management](#).

Defining Preprocessing Variants

The preprocessing program CRM_ARC_SRCONT_CHECK_2 determines archivable service contracts.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

Archiving Service Requests Using CRM_INCDNT

You can use archiving object CRM_INCDNT to archive service requests.

Tables

CRM_INCDNT archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose **Database Tables**. You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_INCDNT can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

CRM_INCDNT is delivered with the following programs:

Program	Name
Write	CRM_ARC_SRQM_INCIDENT_SAVE
Delete	CRM_ARC_SRQM_INCIDENT_DELETE_2
Preprocessing	CRM_ARC_SRQM_INCIDENT_CHECK_2

When archiving service requests, you must use these programs or custom variants. For information on creating variants, see [Variants for CRM_INCDNT](#).

Prerequisites

The following prerequisites must be fulfilled before you can archive a service request:

- The service request has the status **Complete** or **Not Relevant**.
- The residence time is fulfilled.
- Any follow-up service orders and service confirmations are archivable.

The following checks have been carried out:

- You've executed an archivability check for service requests by scheduling the cross-archiving-object check program using **Check/Delete** in **Archive Administration** (transaction SARA). Using the program you can run several check jobs in parallel, which is especially useful for archiving mass data. During the archivability check, service requests that meet the archivability criteria, receive the status **Archivable**.
- Alternatively, you've scheduled an archivability check using the archiving-object-specific check program. You schedule this check in **Archive Administration** using the **Preprocessing** function. In this case parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to process smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_INCDNT ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

For ILM object CRM_INCDNT, you can select several of the following condition fields and put them into a specific order. These fields define your rule structure:

Condition	Description
Business Transaction Category (OBJECT_TYPE)	Use this field to define the leading business transaction category.
Transaction Type (PROCESS_TYPE)	Use this field to define the transaction type the rule applies to, for instance, SRVR for a service request.
Sales Organization (SALES_ORG_SD)	Use this field to define the sales organization the rule applies to.
Country/Region Key (BS_COUNTRY_OF_VKORG)	Use this field to define a country/region.
Organizational Management Object (BS_CRM_ORGUNIT)	Use this field to define the sales organization created in Service, the rule applies to.
Country/Region Key (BS_CRM_COUNTRY_OF_ORGUNIT)	Use this field to define a country/region.

Once you have selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The time reference is the date when the service request was last changed. The available time offsets are the end of the month, quarter or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRM_INCDNT assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers implementations of the following BADIs for CRM_INCDNT:

- **BAdI: Tables Used by an ILM Object** (BADI_DTINF_ILM_OBJ_TABLES)
- **BAdI: Archiving Information of Tables** (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_INCDNT, there is at least one active archive information structure that contains the following selectable field:
 - **Transaction ID** (object_id)

This field is used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_CRM_INCDNT that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_INCDNT archiving object, you must first check the settings in Customizing for **Service** under **Transactions**  **Data Archiving** .

In the activity **Configure Archiving Preselection**, you define parameters for the check and preprocessing programs. In the activity **Define Residence Times**, you define the residence time of service requests.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying Service Requests Archived With CRM_INCDNT

- From within Archive Administration (transaction SARA), you can search for archived service requests using the read program CRM_ARC_SRQM_INCIDENT_READ
- You can also use the Archive Information System (transaction SARI) to display archived service requests by entering the archiving object CRM_INCDNT and the archive infostructure SAP_CRMS4_SRVR

In both cases, the system provides a range of criteria that enable you to select the service requests that you want to display.

Variants for CRM_INCDNT

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for CRM_INCDNT.

Defining Write Variants

The write variant contains the parameters for the service requests that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the service orders that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in [Archive Management](#).

Defining Preprocessing Variants

The preprocessing program CRM_ARC_SRQM_INCIDENT_CHECK_2 determines archivable service requests.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose [No success messages](#), no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

Archiving Service Orders Using CRM_SERORD

You can use archiving object CRM_SERORD to archive service orders.

Tables

CRM_SERORD archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_SERORD can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

CRM_SERORD is delivered with the following programs:

Program	Name
Write	CRM_ARC_SERORD_SAVE
Delete	CRM_ARC_SERORD_DELETE_2
Preprocessing	CRM_ARC_SERORD_CHECK_2

When archiving service orders, you must use these programs or custom variants. For information on creating variants, see [Variants for CRM_SERORD](#).

Prerequisites

The following prerequisites must be fulfilled before you can archive a service order:

- The service order has the status **Complete** or **Not Relevant**.
- The residence time is fulfilled.
- Any follow-up service confirmations are archivable.
- If item-based accounting has been enabled: The service order has been set to **Business Completed**.

For more information about item-based accounting, see [Item-Based Accounting](#).

The following checks have been carried out:

- You've executed an archivability check for service orders by scheduling the cross-archiving-object check program using **Check/Delete** in **Archive Administration** (transaction SARA). Using the program you can run several check jobs in parallel, which is especially useful for archiving mass data. During the archivability check, service orders that meet the archivability criteria, receive the status **Archivable**.
- Alternatively, you've scheduled an archivability check using the archiving-object-specific check program. You schedule this check in **Archive Administration** using the **Preprocessing** function. In this case parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to archive smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_SERORD ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

For ILM object CRM_SERORD, you can select several of the following condition fields and put them into a specific order. These fields define your rule structure:

Condition	Description
Business Transaction Category (OBJECT_TYPE)	Use this field to define the leading business transaction category.
Transaction Type (PROCESS_TYPE)	Use this field to define the transaction type the rule applies to, for instance, SRV0 for a service order.
Sales Organization (SALES_ORG_SD)	Use this field to define the sales organization the rule applies to.
Country/Region Key (BS_COUNTRY_OF_VKORG)	Use this field to define a country/region.
Organizational Management Object (BS_CRM_ORGUNIT)	Use this field to define the sales organization created in Service, the rule applies to.
Country/Region Key (BS_CRM_COUNTRY_OF_ORGUNIT)	Use this field to define a country/region.

Once you have selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The time reference is the date when the service order was last changed. The available time offsets are the end of the month, quarter or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRM_SERORD assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers implementations of the following BADIs for CRM_SERORD:

- **BAdI: Tables Used by an ILM Object** (BADI_DTINF_ILM_OBJ_TABLES)
- **BAdI: Archiving Information of Tables** (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_SERORD, there is at least one active archive information structure that contains the following selectable field:
 - **Transaction ID** (object_id)

These fields are used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_CRM54_SRV0 that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_SERORD archiving object, you must first check the settings in Customizing in [Service](#) under [Transactions](#) > [Data Archiving](#).

In the activity [Configure Archiving Preselection](#), you define parameters for the check and preprocessing programs. In the activity [Define Residence Times](#), you define the residence time of service orders.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying Service Orders Archived With CRM_SERORD

You have the following options for displaying archived service orders:

- From within [Archive Administration](#) (transaction SARA), you can search for archived service orders using the read program CRM_ARC_SERORD_READ.
- You can also use the [Archive Information System](#) (transaction SARI) to display archived service orders by entering the archiving object CRM_SERORD and the archive infostructure .

In both cases, the system provides a range of criteria that enable you to select the service orders that you want to display.

Archiving Service Orders in Hierarchical Settlements

It is possible to archive service orders even when one or more items are part of a financial hierarchy with a service contract and when hierarchical settlement is used. It is, however, required that all service contracts involved are already set to [Business Completed](#).

If you revoke a completed service contract, you can also revoke any completed follow-up service orders associated with it, provided they are within the same financial hierarchy. The following applies when doing so:

- Lower levels in the hierarchy cannot have a status that precedes the status of the higher levels.
- If the service contract is archived, the associated service orders and PM orders must also be archived.
- If the service contract is [Business Completed](#), the associated service orders and PM orders must be at least [Business Completed](#) as well. They cannot be reopened for business.

Variants for CRM_SERORD

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for CRM_SERORD.

Defining Write Variants

The write variant contains the parameters for the service orders that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the service orders that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in [Archive Management](#).

Defining Preprocessing Variants

The preprocessing program CRM_ARC_SERORD_CHECK_2 determines archivable service orders.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

Archiving In-House Services Using CRMS4_REPA

You can use archiving object CRMS4_REPA to archive in-house services.

Tables

CRMS4_REPA archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose **Database Tables**. You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRMS4_REPA can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

CRMS4_REPA is delivered with the following programs:

Program	Name
Write	CRMS4_ARC_REPA_SAVE
Delete	CRMS4_ARC_REPA_DELETE

Program	Name
Preprocessing	CRMS4_ARC_REPA_CHECK

When archiving in-house services, you must use these programs or custom variants. For information about creating variants, see [Variants for CRMS4_REPA](#).

Prerequisites

The following prerequisites must be fulfilled before you can archive an in-house service:

- The in-house service has the status **Complete**.
- The residence time is fulfilled.

The following checks have been carried out:

- You've executed an archivability check for in-house services by scheduling the cross-archiving-object check program using **Check/Delete** in **Archive Administration** (transaction SARA). You can use the program to run several check jobs in parallel, which is especially useful when archiving mass data. During the archivability check, in-house services that meet the archivability criteria, are assigned the status **Archivable**.
- Alternatively, you've scheduled an archivability check using the archiving object-specific check program. You schedule this check in **Archive Administration** using the **Preprocessing** function. In this case, parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to archive smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the ILM object CRMS4_REPA as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

You can select several of the following condition fields and put them into a specific order for the ILM object CRMS4_REPA. These fields define your rule structure:

Condition	Description
Business Transaction Category (OBJECT_TYPE)	Use this field to define the leading business transaction category.
Transaction Type (PROCESS_TYPE)	Use this field to define the transaction type to which the rule applies, for instance, REPA for in-house service.
Sales Organization (SALES_ORG_SD)	Use this field to define the sales organization to which the rule applies.
Country/Region Key (BS_COUNTRY_OF_VKORG)	Use this field to define a country/region.
Organizational Management Object (BS_CRM_ORGUNIT)	Use this field to define the sales organization created in Service, to which the rule applies.
Country/Region Key (BS_CRM_COUNTRY_OF_ORGUNIT)	Use this field to define a country/region.

Once you've selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The time reference is the date when the in-house service was last changed. The available time offsets are the end of the month, quarter, or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRMS4_REPA assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data for a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers implementations of the following BADIs for CRMS4_REPA:

- **BAdI: Tables Used by an ILM Object** (BADI_DTINF_ILM_OBJ_TABLES)
- **BAdI: Archiving Information of Tables** (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in the Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRMS4_REPA, there's at least one active archive information structure that contains the following selectable fields:
 - **Contact Person** (CONTACT_PERSON)
 - **Employee Responsible** (PERSON_RESP)
 - **Ship-To Party** (SHIP_TO_PARTY)
 - **Sold-To Party** (SOLD_TO_PARTY)

These fields are used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_CRMS4_REP1 that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRMS4_REPA archiving object, you must first check the settings in Customizing for **Service** under **Transactions**  **Data Archiving** .

In the activity **Configure Archiving Preselection**, you define parameters for the check and preprocessing programs. In the activity **Define Residence Times**, you define the residence time for in-house services.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying In-House Services Archived With CRMS4_REPA

You have the following options for displaying archived in-house services:

- From within **Archive Administration** (transaction SARA), you can search for archived in-house services using the read program CRM_ARC_REPA_READ.
- You can also use the **Archive Information System** (transaction SARI) to display archived in-house services by entering the archiving object CRMS4_REPA and the archive infostructure SAP_CRMS4_REPA.

In both cases, the system provides a range of criteria that enable you to select the in-house-services that you want to display.

Archiving of Attachments

For more information about archiving attachments using the Document Management Service (DMS), see [Archiving Document Info Records Using CV_DVS](#).

Variants for CRMS4_REPA

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for CRMS4_REPA.

Defining Write Variants

The write variant contains the parameters for the in-house services that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the in-house services that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in **Archive Management**.

Defining Preprocessing Variants

The preprocessing program CRMS4_ARC_REPA_CHECK determines archivable in-house services.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

Archiving Service Confirmations Using CRM_SRVCON

You can use archiving object CRM_SRVCON to archive service confirmations.

Tables

CRM_SRVCON archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_SRVCON can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

CRM_SRVCON is delivered with the following programs:

Program	Name
Write	CRM_ARC_SRVCON_SAVE
Delete	CRM_ARC_SRVCON_DELETE_2
Preprocessing	CRM_ARC_SRVCON_CHECK_2

When archiving service confirmations, you must use these programs or custom variants. For information on creating variants, see [Variants for CRM_SRVCON](#).

Prerequisites

The following prerequisites must be fulfilled before you can archive a service confirmation:

- The service confirmation has status **Complete** or **Not Relevant**.
- The residence time is fulfilled.
- Any follow-up transactions are archivable.

The following checks have been carried out:

- You've executed an archivability check for service confirmations by scheduling the cross-archiving-object check program using **Check/Delete** in **Archive Administration** (transaction SARA). Using the program you can run several check jobs in parallel, which is especially useful for archiving mass data. During the archivability check, service confirmations that meet the archivability criteria, receive the status **Archivable**.

- Alternatively, you've scheduled an archivability check using the archiving-object-specific check program. You schedule this check in [Archive Administration](#) using the [Preprocessing](#) function. In this case parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to archive smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_SRVCN ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

For ILM object CRM_SRVCN, you can select several of the following condition fields and put them into a specific order. These fields define your rule structure:

Condition	Description
Business Transaction Category (OBJECT_TYPE)	Use this field to define the leading business transaction category.
Transaction Type (PROCESS_TYPE)	Use this field to define the transaction type the rule applies to, for instance, SVC1 for a service confirmation.
Sales Organization (SALES_ORG_SD)	Use this field to define the sales organization the rule applies to.
Country/Region Key (BS_COUNTRY_OF_VKORG)	Use this field to define a country/region.
Organizational Management Object (BS_CRM_ORGUNIT)	Use this field to define the sales organization created in Service, the rule applies to.
Country/Region Key (BS_CRM_COUNTRY_OF_ORGUNIT)	Use this field to define a country/region.

Once you have selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The time reference is the date when the service confirmation was last changed. The available time offsets are the end of the month, quarter or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRM_SRVCN assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers implementations of the following BADIs for CRM_SRVCN:

- [BAdI: Tables Used by an ILM Object](#) (BADI_DTINF_ILM_OBJ_TABLES)
- [BAdI: Archiving Information of Tables](#) (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity [Maintain Purposes](#) (transaction DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity [Personalize Data Collection via Profiles](#) (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_SRVCN, there is at least one active archive information structure that contains the following selectable field:
 - **Transaction ID** (object_id)

This field is used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_CRMS4_SRVC that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_SRVCN archiving object, you must first check the settings in Customizing for [Service](#) under **Transactions** > **Data Archiving**.

In the activity [Configure Archiving Preselection](#), you define parameters for the check and preprocessing programs. In the activity [Define Residence Times](#), you define the residence time of service confirmations.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying Service Confirmations Archived With CRM_SRVCN

You have the following options for displaying archived service confirmations:

- From within [Archive Administration](#) (transaction SARA), you can search for archived service confirmations using the read program CRM_ARC_SERORD_READ
- You can also use the [Archive Information System](#) (transaction SARI) to display archived service confirmations by entering the archiving object CRM_SRVCN and the archive infostructure SAP_CRMS4_SRVC

In both cases, the system provides a range of criteria that enable you to select the service confirmations that you want to display.

Variants for CRM_SRVCN

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for CRM_SRVCON.

Defining Write Variants

The write variant contains the parameters for the service confirmations that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the service confirmations that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in **Archive Management**.

Defining Preprocessing Variants

The preprocessing program CRM_ARC_SRVCON_CHECK_2 determines archivable service confirmations.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

Archiving Knowledge Articles Using CRM_KA

You can use archiving object CRM_KA to archive knowledge articles.

Tables

CRM_KA archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose **Database Tables**. You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_KA can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

CRM_KA is delivered with the following programs:

Program	Name
Write	CRM_ARC_KA_SAVE
Delete	CRM_ARC_KA_DELETE_2

Program	Name
Preprocessing	CRM_ARC_KA_CHECK_2

When archiving knowledge articles, you must use these programs or custom variants. For information on creating variants, see [Variants for CRM_KA](#).

Prerequisites

The following prerequisites must be fulfilled before you can archive a knowledge article:

- The knowledge article has status **Complete** or **Not Relevant**.
- The residence time is fulfilled.

The following checks have been carried out:

- You've executed an archivability check for knowledge articles by scheduling the cross-archiving-object check program using **Check/Delete** in **Archive Administration** (transaction SARA). Using the program you can run several check jobs in parallel, which is especially useful for archiving mass data. During the archivability check, knowledge articles that meet the archivability criteria, receive the status **Archivable**.
- Alternatively, you've scheduled an archivability check using the archiving-object-specific check program. You schedule this check in **Archive Administration** using the **Preprocessing** function. In this case parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to archive smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_KA ILM object as part of SAP Information Lifecycle Management. In transaction **IRMPOL**, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

For ILM object CRM_KA, you can select several of the following condition fields and put them into a specific order. These fields define your rule structure:

Condition	Description
Business Transaction Category (BUKRS)	Use this field to define the leading business transaction category.
Transaction Type (PROCESS_TYPE)	Use this field to define the transaction type the rule applies to, for instance KNAR for a knowledge article.
Country/Region Key (BS_CRM_COUNTRY_OF_ORGUNIT)	Use this field to define a country/region.

Once you have selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The time reference is the date when the knowledge article was last changed. The available time offsets are the end of the month, quarter, or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRM_KA assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers implementations of the following BADIs for CRM_KA:

- **BAdI: Tables Used by an ILM Object** (BADI_DTINF_ILM_OBJ_TABLES)
- **BAdI: Archiving Information of Tables** (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity **Maintain Purposes** (DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_KA, there is at least one active archive information structure that contains the following selectable field:
 - **Employee Responsible** (PERSON_RESP)

This field is used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_CRMS4_KNAR that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_KA archiving object, you must first check the settings in Customizing for **Service** under **Transactions**  **Data Archiving** .

In the activity **Configure Archiving Preselection**, you define parameters for the check and preprocessing programs. In the activity **Define Residence Times**, you define the residence time of knowledge articles.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying Knowledge Articles Archived With CRM_KA

You have the following options for displaying archived knowledge articles:

- From within **Archive Administration** (transaction SARA), you can search for archived knowledge articles using the read program CRM_ARC_KA_READ
- You can also use the **Archive Information System** (transaction SARI) to display archived knowledge articles by entering the archiving object CRM_KA. You must create an archive infostructure for this purpose. For more information, see [Providing Archive Infostructures for Data Access](#)

Variants for CRM_KA

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for CRM_KA.

Defining Write Variants

The write variant contains the parameters for the activities that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the service orders that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in [Archive Management](#).

Defining Preprocessing Variants

The preprocessing program CRM_ARC_KA_CHECK_2 determines archivable knowledge articles.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose [No success messages](#), no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

Archiving Cases Using SCMG

You can use archiving object SCMG to archive cases.

Tables

SCMG archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

SCMG can trigger further archiving classes to write additional data, for example change documents, into the archive.

Programs

SCMG is delivered with the following programs:

Program	Name
Write	CASE_WRITE_PROGRAM
Delete	CASE_DELETE_PROGRAM
Preprocessing	CASE_PRE_PROGRAM

When archiving cases, you must use these programs or custom variants. For information on creating variants, see [Variants for SCMG](#).

Prerequisites

The following prerequisites must be fulfilled before you can archive a case:

- The case has status **Complete** or **Not Relevant**.
- The residence time is fulfilled.
- All follow-on transactions related to the case must be archivable.

The following checks have been carried out:

- You've executed an archivability check for cases by scheduling the cross-archiving-object check program using **Check/Delete** in **Archive Administration** (transaction SARA). Using the program you can run several check jobs in parallel, which is especially useful for archiving mass data. During the archivability check, cases that meet the archivability criteria, receive the status **Archivable**.
- Alternatively, you've scheduled an archivability check using the archiving-object-specific check program. You schedule this check in **Archive Administration** using the **Preprocessing** function. In this case parallel processing isn't possible, which makes this option less suitable for the processing of mass data. Only use it to archive smaller volumes of data or to test the archivability check.

ILM-Related Information for the Archiving Object

You can use this archiving object with the SCMG ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

For ILM object SCMG, you can select several of the following condition fields and put them into a specific order. These fields define your rule structure:

Condition	Description
Case Type (CASE_TYPE)	Use this field to define the case type.

Condition	Description
Area ID (AREA_ID)	Use this field to define the area the rule applies to, for instance case management.
RMS ID (RMS_ID)	Use this field to define the records management system ID. The RMS ID is a logical grouping of all objects that have been created for a specific business unit.
System Status (STATUS)	Use this field to define the case status the rule applies to, for instance, Completed .

Once you have selected the appropriate condition fields, you can create rules on the basis of these fields. You can define residence and retention periods for a specific number of days, months, or years. These periods have a time reference and a time offset. The available time references are the end date of the case as well as the month, quarter or year of the end date. The available time offsets are the end of the month, quarter or year. You can also choose not to define a time offset.

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object SCMG assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers implementations of the following BADIs for SCMG:

- **BAdI: Tables Used by an ILM Object** (BADI_DTINF_ILM_OBJ_TABLES)
- **BAdI: Archiving Information of Tables** (BADI_DTINF_ARCHIVE_DETAILS)

For more information, see SAP Note [2939146](#) .

Before you can start a search for personal data related to this ILM object, the following prerequisite must be fulfilled:

- In the Customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP), assign the ILM object to a purpose for which the data was collected and processed.

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object SCMG, there is at least one active archive information structure that contains the following selectable fields:
 - **Case Key** (CASE_GUID)
 - **Customer** (FIN_KUNNR)

These fields are used by the IRF to determine which data should be fetched from the archive.

You can use the archive information structure SAP_FSCM that is provided in the standard system.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the SCMG archiving object, you must first check the settings in Customizing for [Service](#) under [Transactions](#) [Data Archiving](#).

In the activity [Configure Archiving Preselection](#), you define parameters for the check and preprocessing programs. In the activity [Define Residence Times](#), you define the residence time of cases.

Authorizations Objects

You need the following authorization objects:

Activity	Required Authorization Object
Write	S_ARCHIVE
Delete	S_ARCHIVE
Read	S_ARCHIVE
Preprocess	S_ARCHIVE

Displaying Cases Archived With SCMG

You have the following options for displaying archived cases:

- From within [Archive Administration](#) (transaction SARA), you can search for archived cases using the read program CASE_READ_PROGRAM
- You can also use the [Archive Information System](#) (transaction SARI) to display archived cases by entering the archiving object SCMG and archive infostructure SAP_CRM_CMG.

In both cases, the system provides a range of criteria that enable you to select the cases that you want to display.

Related Information

[BAdis for SCMG](#)

Variants for SCMG

When you schedule an archiving run, you must either use an existing variant or create a new one. In transaction SARA, you can create variants of the write and preprocessing programs available for SCMG.

Defining Write Variants

The write variant contains the parameters for the cases that you want to archive as well as settings for the archiving run.

SAP delivers the following parameters:

- Transaction type

You can define which types of transaction you want to archive. It's possible to select multiple values. A write variant contains the parameters for the service orders that you want to archive.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Changed on

You can define a date range. All archivable transactions that are edited during the time range you define, are included.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

In this field, you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

- Archiving Session Note

Here you can enter a short text that helps you identify and better find the archiving session in [Archive Management](#).

Defining Preprocessing Variants

The preprocessing program CASE_PRE_PROGRAM determines archivable cases.

You can define variants for this program using the following parameters:

- Transaction Type

You can define which types of transaction you want to archive. It's possible to select multiple values.

- Transaction ID

You can define ranges or individual IDs that you want to include or exclude in archiving runs.

- Test mode

In the test mode, the program is only simulated, meaning that no actual changes take place on the database (for example, no data is written or deleted from the database).

- Production mode

In this mode, the data is physically processed, according to your selection criteria and if applicable, additional archiving-object-specific criteria. For example, during the delete phase data is removed from the database by the delete program.

- Detail log

Using this field you can decide whether a detail log is to be generated in addition to the summarized log during the execution of the program. The summarized log contains each message only once. For each message, the number of affected objects is listed as well as an example of an object. The detail log contains all processed objects including the corresponding messages. If you choose **No success messages**, no success messages are written to the detail log.

i Note

Only generate detail logs if you're processing a small number of objects, or, for example, in the test mode. Otherwise, the program can terminate due to a memory overflow.

- Log Output

Here you can determine, whether the log is output into the list (spool for background programs), to the application log, or to both.

BAdis for SCMG

You can enhance the archiving functions provided for cases using Business Add-Ins (BAdi).

Business Add-In	Use
ARC_SCMG_CHECK	You can use this BAdi to define custom checks that must be met before a case can be archived.
ARC_SCMG_WRITE	You can use this BAdi to write additional data to the archive that isn't directly associated with the case.
ARC_SCMG_DELETE	You can use this BAdi to delete additional data that isn't directly associated with the case.

For more information on the BAdis, see the system help in Customizing under [Service](#) [Case Management](#) [Extended Customizing](#) [Case Archiving](#) [BAdis for Case Archiving](#).

You can access the BAdIs using transaction SE18.

Archiving of Subscription Product-Specific Data Using SOM_PROD

You can use archiving object SOM_PROD to archive subscription product-specific data.

Tables

SOM_PROD archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

SOM_PROD may trigger further archiving classes to write additional data, for example change documents, into the archive. To check which classes these are, call up transaction AOBJ, select your archiving object and choose [Archiving Classes Used](#).

Programs

To find out which programs this archiving object offers, call up transaction **SARA** enter the archiving object and press ENTER.

Prerequisites

The following prerequisites must be fulfilled before subscription product-specific data can be archived:

- The related product master is marked for deletion.
- No drafts exist for the subscription-product specific data.
- The product is not used in any subscription order/contract.

ILM-Related Information for the Archiving Object

You can use this archiving object with the **SOM_PROD** ILM object as part of SAP Information Lifecycle Management. In transaction **IRMPOL**, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

The following condition fields are available:

- **PRODUCT:** Product number

The following time references are available:

- **CREATION DATE:** Date when the product was created
- **LAST_CHANGE_DATE:** Date when the product was last changed

For more information, search for SAP Information Lifecycle Management in the relevant version of [SAP S/4HANA](#) on the SAP Help Portal.

Performing Application-Specific Configuration

There is no specific Customizing for the **SOM_PROD** archiving object.

Defining Preprocessing Variants

There is no preprocessing program for **SOM_PROD**.

You can define variants for this program using the following parameters:

Defining Write Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction **SARA**.

This program analyzes the subscription product-specific data for archiving and then writes the data to an archive file. The program selects all subscription product-specific data that fits in with the selected products. You can execute the report in either test or production mode. Data, however, is written to the archive file in production mode only.

In the **Comment for Archive Run** field, you can enter your own comment for the archive run.

You can archive subscription product-specific data only if the following prerequisites are met:

- The related product master is marked for deletion.
- No draft exists for the subscription product-specific data.
- The product is not used in any subscription order or subscription contract.

A write variant contains the parameters for the subscription product-specific data that you want to archive.

SAP delivers the following parameters:

- Product

This is the product number for the related product.

The write program is CRMS4_SOM_PROD_ARCHIVE_WRITE.

Defining Delete Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

The delete program CRMS4_SOM_PROD_ARCHIVE_DELETE for SOM_PROD deletes the subscription product-specific data based on an existing archive. The program first reads the subscription product-specific data belonging to an archiving run from the archive and then deletes the appropriate entries from the database tables.

Defining Read Program Variants

The read program CRMS4_SOM_PROD_ARCHIVE_READ displays the archived subscription product-specific data. This data must be archived and deleted. The selected product IDs are displayed using ALV. You can navigate to the details of each product by double clicking on the relevant record.

You can select the archived data by using the following selection parameters:

- Subscription product-specific data UUID
- Product ID
- Key of archive file

Defining Postprocessing Variants

There is no postprocessing program for SOM_PROD.

Defining Reloading Variants

There is no reloading program from SOM_PROD.

Dependencies of SOM_PROD

Subscription orders and subscription contracts must be archived before you can archive subscription-product specific data.

The related material master (archiving object MM_MATNR) can only be archived after the subscription-product specific data is archived.

Authorizations for SOM_PROD

You need the following authorization objects:

Activity	Required Authorization Object
ACTVT: 24 - Archive	SOM_PROD
ACTVT: 01 - Add or create ARCH_OBJ: SOM_PROD APPLIC: IS	S_ARCHIVE

Enhancements for SOM_PROD

The SOM_PROD archiving object offers the following Business Add-Ins (BAIs):

BAdI / User Exit	Description	Used to
ARC_SOM_PROD_CHECK	Archiving subscription product-specific data: Check archivability	Check if an object can be archived
ARC_SOM_PROD_WRITE	Archiving subscription product-specific data: Write additional table	Write additional tables for archiving

Displaying Subscription Product-Specific Data Archived with SOM_PROD

You can use program CRMS4_SOM_PROD_ARCHIVE_READ to display archived and deleted subscription product-specific data.

Archiving of Allowance Definition Groups Using SOM_ADG

You can use archiving object SOM_ADG to archive allowance definition groups.

Tables

SOM_ADG archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose **Database Tables**. You can display the relevant tables in the lower part of the screen.

Archiving Classes

SOM_ADG may trigger further archiving classes to write additional data, for example change documents, into the archive. To check which classes these are, call up transaction AOBJ, select your archiving object and choose **Archiving Classes Used**.

Programs

To find out which programs this archiving object offers, call up transaction SARA enter the archiving object and press ENTER.

Prerequisites

The following prerequisites must be fulfilled before an allowance definition group can be archived:

- Status of the allowance definition group must NOT be **In Preparation**.

As long as the allowance definition group has this status, it can be deleted directly.

- No draft exists for the allowance definition group.
- The allowance definition group, to be deleted, is not used in any subscription product-specific data.

ILM-Related Information for the Archiving Object

You can use this archiving object with the SOM_ADG ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

The following condition fields are available:

- GROUP_ID: Allowance Definition Group ID

The following time references are available:

- CREATION_DATE: Date when the allowance group was created.
- LAST_CHANGE_DATE: Date when the allowance group was last changed.

For more information, see [SAP Information Lifecycle Management](#).

Legal Holds

It is possible to set a legal hold on the data this archiving object archives/destroys. For more information, see [Setting Legal Holds](#).

Performing Application-Specific Configuration

There is no specific Customizing for the SOM_ADG object.

Defining Preprocessing Variants

There is no preprocessing program for SOM_ADG.

Defining Write Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

A write variant contains the parameters for the allowance definition group that you want to archive. This program covers the following features:

- The analysis of allowance definition groups with respect to archivability.
- Writing allowance definition groups to an archive file based on the analysis in the previous step.

The following database tables are included:

- CRMS4_SOM_ADG
- CRMS4_SOM_ADGT

- CRMS4_SOM_AD

Additionally, change documents related to the archived allowance definition group are also archived.

SAP delivers the following parameters:

- Allowance Definition Group ID

The write program is CRMS4_SOM_ADG_ARCHIVE_WRITE.

Defining Delete Variants

The program CRMS4_SOM_ADG_ARCHIVE_DELETE is used to delete the allowance definition groups based on an existing archive.

The program first reads the allowance definition groups belonging to an archiving run from the archive, and then deletes the appropriate entries from the database tables.

Defining Read Program Variants

The read program CRMS4_SOM_ADG_ARCHIVE_READ displays the selected allowance definition groups using ALV. You can navigate to the details of each allowance definition group by double clicking on the relevant record.

You can select the archived data by using the following selection parameters:

- Allowance Definition Group UUID
- Allowance Definition Group ID
- Key for Archive File

Defining Postprocessing Variants

There is no postprocessing program for SOM_ADG.

Defining Reloading Variants

There is no reloading program for SOM_ADG.

Dependencies of SOM_ADG

Authorizations for SOM_ADG

You need the following authorization objects:

Activity	Required Authorization Object
ACTVT: 24 - Archive	CRM_ISX_AD

Activity	Required Authorization Object
ACTVT: 01 ARCH_OBJ: SOM_ADG APPLIC: IS	S_ARCHIVE

Enhancements for SOM_ADG

The SOM_ADG archiving object offers the following Business Add-Ins (BAIs):

BAdI / User Exit	Description	Used to
ARC_SOM_ADG_CHECK	Archiving Allowance Definition Group: Check Archivability	Check if an object can be archived.
ARC_SOM_ADG_WRITE	Archiving Allowance Definition Group: Write Additional Table	Write additional tables for archiving

Displaying Allowance Definition Groups Archived with SOM_ADG

You can use the program CRMS4_SOM_ADG_ARCHIVE_READ to display archived and deleted allowance definition groups.

Archiving Subscription Orders Using CRM_PRV0

You can use archiving object CRM_PRV0 to archive subscription orders (BUS2000265) in transaction SARA.

Tables

CRM_PRV0 archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_PRV0 may trigger further archiving classes to write additional data, for example change documents, into the archive. To check which classes these are, call up transaction AOBJ, select your archiving object and choose [Archiving Classes Used](#).

Programs

To find out which programs this archiving object offers, call up transaction SARA enter the archiving object and press ENTER.

Prerequisites

The following prerequisites must be fulfilled before a `subscription` order can be archived:

- The subscription order status must be set to Completed at the header level.
- The residence time (number of days after the last change to the business transaction) must have elapsed.
- Subsequent documents (such as tasks and complaints) must already be archived and deleted from the system.
- If you have set up ILM integration for the CRM_PRV0 ILM object, your ILM rules must also allow archiving.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_PRVO ILM object as part of SAP Information Lifecycle Management. In the transaction IRMPOL, you can create policies for residence time and retention rules, depending on the available policy category. Here, you can also see the available time reference and the existing condition fields. You can decide which of these will be used to define your rule structure. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

The following condition fields are available:

- OBJECT_TYPE - Business Transaction Category
- PROCESS_TYPE - Business Transaction Type
- BS_CRM_COUNTRY_OF_ORGUNIT - Country of Org Unit

The following time references are available:

- LAST_CHANGE_DATE - Last Changed On

For more information, see [SAP Information Lifecycle Management](#).

Enablement for Information Retrieval

The ILM object CRM_PRVO assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers the following implementations for CRM_PRVO:

- BAdI Implementation BADI_CRM_SUBSCR_ILM_OBJ_TABLES of BAdI: Tables Used by an ILM Object (BADI_DTINF_ILM_OBJ_TABLES)
- BAdI Implementation SOM_CRM_PRVO_ARCH_DETAILS of BAdI: Archiving Information of Tables (BADI_DTINF_ARCHIVE_DETAILS)

This BAdI is used to retrieve archived information for the IRF.

For more information, see SAP Note [2939146](#)  (S/4HANA).

Before you can start a search for personal data related to this ILM object, the following prerequisites must be fulfilled:

- Assign the ILM object to a purpose for which the data was collected and processed using customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP).

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_PRVO, there is at least one active archive information structure that contains the following selectable fields:
 - Field name (SOLD_TO_PARTY)

These fields are used by the IRF to determine which data should be fetched from the archive.

- Once the profile has been created, it can be used for data collection using the transaction DTINF_START_COLL - Start Data Collection.
- You can view the collected data using the transaction DTINF_PROC_COLL - Process Data Collection Results.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_PRVO archiving object, you must first check the settings in Customizing under  **SAP Customizing Implementation Guide** > **Service** > **Transactions** > **Data Archiving** > .

Defining Preprocessing Variants

The preprocessing program CRM_ARC_PRVO_CHECK_2 for CRM_PRVO checks the prerequisites discussed above so that subscription orders can be archived.

You can define variants for this program using the following parameters:

- Transaction Type
Here, you can restrict the transaction types of the business transactions to be analyzed for archivability.
- Transaction ID
Here, you can restrict the transaction IDs of the business transactions to be analyzed for archivability.

Defining Write Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

The write program CRM_ARC_PRVO_SAVE for CRM_PRVO writes the data to the archive file. The program contains the parameters for the subscription orders that you want to archive.

SAP delivers the following parameters:

- Transaction Type
Here, you can restrict the transaction types of the business transactions to be analyzed for archivability.
- Transaction ID
Here, you can restrict the transaction IDs of the business transactions to be analyzed for archivability.
- Changed On
Here, you can restrict the 'changed on' data of the business transactions to be archived.

Defining Delete Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

The delete program CRM_ARC_PRVO_DELETE for CRM_PRVO deletes the data from a write program successfully executed from the database tables. You must, therefore, select only a completed archiving session. Only then will the program delete the data already written to the archive.

SAP delivers the following parameters:

- Transaction Type

Here, you can restrict the transaction types of the business transactions to be analyzed for archivability.

- Transaction ID

Here, you can restrict the transaction IDs of the business transactions to be analyzed for archivability.

Changed On

Here, you can restrict the 'changed on' data of the business transactions to be archived.

Defining Read Program Variants

The read program CRM_ARC_PRVO_READ for CRM_PRVO reads data from the archive files and makes them available for a temporary display in the SAP S/4HANA system.

The read program only works if you have activated an infostructure that belongs to the archive object in the transaction SARI, step 'Customizing'. Here, you can select the parameters that you want to use for searching data in archive files.

i Note

The infostructure must be activated before the data is archived.

While SAP delivers the infostructure SAP_CRMS4_PRVO and field catalog SAP_CRMS4_PRVO, you can maintain your own infostructure and field catalogs.

Archiving Subscription Contracts Using CRM_PRVC

You can use archiving object CRM_PRVC to archive subscription contracts (BUS2000266) in transaction SARA.

Tables

CRM_PRVC archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_PRVC may trigger further archiving classes to write additional data, for example change documents, into the archive. To check which classes these are, call up transaction AOBJ, select your archiving object and choose [Archiving Classes Used](#).

Programs

To find out which programs this archiving object offers, call up transaction SARA enter the archiving object and press ENTER.

Prerequisites

The following prerequisites must be fulfilled before a subscription contract can be archived:

- The subscription contract statuses must be set to Completed and Finished at the header level
- The residence time (number of days after the last change to the business transaction) must have elapsed.

- All linked subscription orders must be archived and deleted from the system.
- The FI-CA provider contracts that correspond to the subscription contracts must be archived and deleted from the system. For more information about archiving a FI-CA provider contract, see Archiving of Provider Contracts (FI_MKKCAVT) on the [SAP Help Portal](#).
- Subsequent documents (such as tasks and complaints) must already be archived and deleted from the system.
- Sharing Contracts can only be archived when no more linked Shared Contracts exist, i. e. Shared Contracts have to be archived and deleted before the Sharing Contracts they refer to.
- If you have set up ILM integration for the CRM_PRVC ILM object, your ILM rules must also allow archiving.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM-PRVC ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

The following condition fields are available:

- OBJECT_TYPE - Business Transaction Category
- PROCESS_TYPE - Business Transaction Type
- BS_CRM_COUNTRY_OF_ORGUNIT - Country of Org Unit

The following time references are available:

- LAST_CHANGE_DATE - Last Changed On

For more information, see [SAP Information Lifecycle Management](#).

Legal Holds

It is possible to set a legal hold on the data this archiving object archives/destroys. For more information, see [Setting Legal Holds](#).

Enablement for Information Retrieval

The ILM object CRM_PRVC assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers the following implementations for CRM_PRVC:

- BAdI Implementation BADI_CRM_SUBSCR_ILM_OBJ_TABLES of BAdI: Tables Used by an ILM Object (BADI_DTINF_ILM_OBJ_TABLES)
- BAdI Implementation SOM_CRM_PRVC_ARCH_DETAILS of BAdI: Archiving Information of Tables (BADI_DTINF_ARCHIVE_DETAILS)

This BAdI is used to retrieve archived information for the IRF.

For more information, see SAP Note [2939146](#)  (S/4HANA).

Before you can start a search for personal data related to this ILM object, the following prerequisites must be fulfilled:

- Assign the ILM object to a purpose for which the data was collected and processed using customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP).

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity **Personalize Data Collection via Profiles** (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.
- Ensure that for archiving object CRM_PRVC, there is at least one active archive information structure that contains the following selectable fields:
 - Field name (SOLD_TO_PARTY)

These fields are used by the IRF to determine which data should be fetched from the archive.

- Once the profile has been created, it can be used for data collection using the transaction DTINF_START_COLL - Start Data Collection.
- You can view the collected data using the transaction DTINF_PROC_COLL - Process Data Collection Results.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM-PRVC archiving object, you must first check the settings in Customizing under **SAP Customizing Implementation Guide > Service > Transactions > Data Archiving**.

Defining Preprocessing Variants

The preprocessing program CRM_ARC_PRVC_CHECK_2 for CRM_PRVC checks the prerequisites discussed above so that subscription contracts can be archived.

You can define variants for this program using the following parameters:

- Transaction Type

Here, you can restrict the transaction types of the business transactions to be analyzed for archivability.

- Transaction ID

Here, you can restrict the transaction IDs of the business transactions to be analyzed for archivability.

Defining Write Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

The write program CRM_ARC_PRVC_SAVE FOR CRM_PRVC writes the data to the archive file. The program contains the parameters for the subscription contracts that you want to archive.

SAP delivers the following parameters:

- Transaction Type

Here, you can restrict the transaction types of the business transactions to be analyzed for archivability.

- Transaction ID

Here, you can restrict the transaction IDs of the business transactions to be analyzed for archivability.

Changed On

Here, you can restrict the 'changed on' data of the business transactions to be archived.

Defining Delete Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

The delete program CRM_ARC_PVC_DELETE for CRM_PRVC deletes the data from a write program successfully executed from the database tables. You must, therefore, select only a completed archiving session. Only then will the program delete the data already written to the archive.

Defining Read Program Variants

The read program CRM_ARC_PRVC_READ for CRM_PRVC reads data from archive files and makes them available for a temporary display in the SAP S/4HANA system.

The read program only works if you have activated an infostructure that belongs to the archive object in the transaction SARI, step 'Customizing'. Here, you can select the parameters that you want to use for searching data in archive files.

i Note

The infostructure must be activated before the data is archived.

While SAP delivers the infostructure SAP_CRMS4_PRVC and field catalog SAP_CRMS4_PRVC, you can maintain your own infostructure and field catalogs.

Archiving Master Agreements Using CRM_PRVMA

You can use archiving object CRM_PRVMA to archive Master Agreements (BUS2000267) transaction SARA.

Tables

CRM_PRVMA archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

CRM_PRVMA may trigger further archiving classes to write additional data, for example change documents, into the archive. To check which classes these are, call up transaction AOBJ, select your archiving object and choose [Archiving Classes Used](#).

Programs

To find out which programs this archiving object offers, call up transaction SARA enter the archiving object and press ENTER.

Prerequisites

The following prerequisites must be fulfilled before a master agreement can be archived:

- The header status must be set to Completed.

- The residence time (number of days after the last change to the business transaction) must have elapsed.
- All subscription orders, subscription contracts, and solution quotations that refer to the master agreement must be archived.

ILM-Related Information for the Archiving Object

You can use this archiving object with the CRM_PRVMA ILM object as part of SAP Information Lifecycle Management. In transaction IRMPOL, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

The following condition fields are available:

- PROCESS_TYPE - Business Transaction Type

The following time references are available:

- LAST_CHANGE_DATE - Last Changed On
- CONTRACT_END_DATE - Contract End Date

For more information, see [SAP Information Lifecycle Management](#).

Legal Holds

It is possible to set a legal hold on the data this archiving object archives/destroys. For more information, see [Setting Legal Holds](#).

Enablement for Information Retrieval

The ILM object CRM_PRVMA assigned to this archiving object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers the following implementations for CRM_PRVC:

- BAdI Implementation BADI_CRM_MA_ILM_OBJ_TABLES of BAdI: Tables Used by an ILM Object (BADI_DTINF_ILM_OBJ_TABLES)
- BAdI Implementation SOM_CRM_PRMA_ARCH_DETAILS of BAdI: Archiving Information of Tables (BADI_DTINF_ARCHIVE_DETAILS)

This BAdI is used to retrieve archived information for the IRF.

For more information, see SAP Note [2939146](#)  (S/4HANA).

Before you can start a search for personal data related to this ILM object, the following prerequisites must be fulfilled:

- Assign the ILM object to a purpose for which the data was collected and processed using customizing activity [Maintain Purposes](#) (transaction DTINF_MAINTAIN_PURP).

If you also want to enable the retrieval of personal data stored in archive files, perform the following additional steps:

- Create a profile for the data collection in Customizing activity [Personalize Data Collection via Profiles](#) (transaction DTINF_MAINT_PROFILE) defining that archived personal data must be included in the search.

- Ensure that for archiving object CRM_PRVMA, there is at least one active archive information structure that contains the following selectable fields:
 - Field name (SOLD_TO_PARTY)

These fields are used by the IRF to determine which data should be fetched from the archive.

- Once the profile has been created, it can be used for data collection using the transaction DTINF_START_COLL - Start Data Collection.
- You can view the collected data using the transaction DTINF_PROC_COLL - Process Data Collection Results.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Performing Application-Specific Configuration

Before you can use the CRM_PRVMA archiving object, you must first check the settings in Customizing under ► [SAP Customizing Implementation Guide](#) ► [Service](#) ► [Transactions](#) ► [Data Archiving](#) ►.

Defining Preprocessing Variants

The preprocessing program CRM_ARC_PRVMA_CHECK for CRM_PRVMA will check the prerequisites discussed above so that BUS2000267 can be archived.

You can define variants for this program using the following parameters:

- Transaction Type
Transaction type/Process type of a document to be archived.
- Transaction ID
Object ID of a document to be archived.

Defining Write Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

A write variant contains the parameters for the <business objects> that you want to archive.

SAP delivers the following parameters:

The write program CRM_ARC_PRVMA for CRM_PRVMA writes the data to the archive file. The program contains the parameters for the master agreements that you want to archive.

SAP delivers the following parameters:

- Transaction Type
Transaction type/Process type of a document to be archived.
- Transaction ID
Object ID of a document to be archived.
- Changed On

Defining Delete Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction SARA.

The delete program CRM_ARC_PRVMA_DELETE_2 for CRM_PRVMA deletes the data from a write program successfully executed from the database tables. You must, therefore, select only a completed archiving session. Only then will the program delete the data already written to the archive.

Defining Read Program Variants

The read program CRM_ARC_PRVMA_READ for CRM_PRVMA reads data from the archive files and makes them available for a temporary display in the SAP S/4HANA system.

The read program only works if you have activated an infostructure that belongs to the archive object in the transaction SARI, step 'Customizing'. Here, you can select the parameters that you want to use for searching data in archive files.

i Note

The infostructure must be activated before the data is archived.

While SAP delivers the infostructure SAP_CRMS4_PRVMA and field catalog SAP_CRMS4_PRVMA, you can maintain your own infostructure and field catalogs.

Archiving Sharing Group Using SOM_SHGR

You can use archiving object SOM_SHGR to archive sharing groups.

Tables

SOM_SHGR archives data from several tables. To check which tables these are, call up transaction SARA, enter the archiving object, and choose [Database Tables](#). You can display the relevant tables in the lower part of the screen.

Archiving Classes

SOM_SHGR may trigger further archiving classes to write additional data, for example change documents, into the archive. To check which classes these are, call up transaction AOBJ, select your archiving object and choose [Archiving Classes Used](#).

Programs

To find out which programs this archiving object offers, call up transaction SARA enter the archiving object and press ENTER.

Prerequisites

The following prerequisites must be fulfilled before a sharing groups can be archived:

- No draft exists for the sharing group.
- The sharing group is not used in a subscription order, subscription contract, or a master agreement.

ILM-Related Information for the Archiving Object

You can use this archiving object with the `SOM_SHGR` ILM object as part of SAP Information Lifecycle Management. In transaction `IRMPOL`, you can create policies for residence or retention rules, depending on the available policy category. Here you can also see the available time references and which condition fields exist, and decide which of them shall be used in which order to define your rule structure.

The following condition fields are available:

- `GROUP_ID`: Sharing group ID

The following time references are available:

- `CREATION_DATE`: Date on which the sharing group was created
- `LAST_CHANGE_DATE`: Date on which the sharing group was last changed.

For more information, see [SAP Information Lifecycle Management](#).

Legal Holds

It is possible to set a legal hold on the data this archiving object archives/destroys. For more information, see [Setting Legal Holds](#).

Performing Application-Specific Configuration

There is no specific Customizing for the `SOM_SHGR` archiving object.

Defining Preprocessing Variants

There is no preprocessing program for `SOM_SHGR`.

Defining Write Variants

When you schedule the archiving run, you must enter an existing variant or create a new one. You can do so in transaction `SARA`.

A write variant contains the parameters for the sharing object that you want to archive. The program `CRMS4_SOM_SHGR_ARCHIVE_WRITE` is used to write the archive.

This report carries out the first step in archiving sharing groups and covers the following features:

- Analyzing sharing groups with respect to archivability
- Writing sharing groups to an archive file based on the results of the analysis

The following database tables are included:

- `CRMS4_SOM_SRG`
- `CRMS4_SOM_SRGT`

Additionally, change documents related to the archived sharing group are also archived.

SAP delivers the following parameters:

- Sharing Group ID

Defining Delete Variants

The program CRMS4_SOM_SHGR_ARCHIVE_DELETE is used to delete sharing groups based on an existing archive, and is the second step of the archiving process.

The report first reads the sharing groups belonging to an archiving run from the archive and then deletes the appropriate entries from the database tables.

Defining Read Program Variants

The read program CRMS4_SOM_SHGR_ARCHIVE_READ is used to display the archived and deleted sharing groups.

You must ensure the following prerequisites are fulfilled before executing the read program:

- Data is archived and deleted

You can select the archived data by using the following selection parameters:

- Sharing Group UUID
- Sharing Group ID
- Key for Archive File

The selected sharing groups are displayed using ALV. You can navigate to the details of each sharing group by double clicking on the relevant record.

Defining Postprocessing Variants

There is no postprocessing program for SOM_SHGR.

Defining Reloading Variants

There is no reloading program for SOM_SHGR.

Dependencies of SOM_SHGR

Subscription orders, subscription contracts, and master agreements using a specific sharing group ID must be archived before you can archive the sharing group.

Authorizations for SOM_SHGR

You need the following authorization objects:

Activity	Required Authorization Object
ACTVT: 24 - Archive	SOM_SHGR
ACTVT: 01 ARCH_OBJ: SOM_SHGR	S_ARCHIVE

Activity	Required Authorization Object
APPLIC: IS	

Enhancements for SOM_SHGR

The SOM_SHGR archiving object offers the following Business Add-Ins (BAIs):

BAI / User Exit	Description	Used to
ARC_SOM_SHGR_CHECK	Archiving Sharing Group: Check Archivability	Check if an object can be archived
ARC_SOM_SHGR_WRITE	Archiving Sharing Group: Write Additional Table	Write additional tables for archiving

Displaying Sharing Groups Archived with SOM_SHGR

You can use the program CRMS4_SOM_SHGR_ARCHIVE_READ to display the archived and deleted sharing groups.

Blocking, Unblocking, and Deletion of Personal Data in Service

You can use SAP Information Lifecycle Management (SAP ILM) to control the blocking, unblocking, and deletion of business partner, customer, and supplier master data. According to the business partner approach, blocking and deletion of customer and supplier master data is part of the blocking and deletion of the business partner master data. This means that the business partner considers all residence periods of linked customer or supplier master data. Personal data collected in master data can be blocked as soon as the business activities for which this data was collected have been completed and the residence time for this data has elapsed.

After blocking, only users who are assigned additional authorizations can access this data.

After the retention period for data has expired, personal data can be deleted completely so that it can no longer be retrieved. In this case, customer and supplier master data must be archived and deleted from the database before the associated business partner master data to prevent data inconsistencies.

You define residence and retention period policies for master data in ILM policies (transaction IRMPOL).

The following scenarios for blocking business partners are supported:

1. You want to block business partner master data for which the associated customer and supplier data is blocked. The business partner master data satisfies the EoP check criteria and therefore can be blocked.
2. You want to block business partner data for which the associated customer and supplier master data is not blocked. The associated customer and supplier master data satisfies their EoP checks as does the business partner master data. All of the associated customer and supplier master data as well as the business partner master data can be blocked.
3. You want to block business partner master data for which the associated customer and supplier master data is not blocked and where at least one customer or supplier does not meet the EoP check criteria. The business partner master data cannot be blocked until all of the associated customer and supplier master data meet the EoP check criteria and can also be blocked.
4. Independent blocking of the customer and supplier master data is possible. The corresponding roles of the business partner are also blocked.

After blocking, only users who are assigned additional authorizations can access this data.

After the retention period for data has expired, personal data can be deleted completely so that it can no longer be retrieved. In this case, associated customer and supplier master data must be archived and deleted from the database before the associated business partner master data to prevent data inconsistencies.

You define residence and retention period policies for master data in ILM policies (transaction IRMPOL).

Specifics Business Partner Master Data

The functions required for blocking and unblocking or viewing blocked business partner master data are provided through the data protection specialist roles:

- SAP_CA_BP_DP_DISPLAY
- SAP_CA_BP_DP_BLOCK
- SAP_CA_BP_DP_UNBLOCK
- SAP_CA_BP_DP_BLOCK_REQUEST

Specifics for Customer and Supplier Master Data

The functions required for blocking and unblocking or viewing blocked customer and supplier master data are provided through the data protection specialist roles:


- SAP_LO_MD_CVP_DISPLAY
- SAP_LO_MD_CVP_BLOCK
- SAP_LO_MD_CVP_UNBLOCK

You can copy these template roles to custom roles, adjust them to meet your requirements, and assign them to your users.

Business Partner End of Purpose (EoP) Check in Service

An end of purpose (EoP) check determines whether data is still relevant for business activities based on the retention period defined for the data. The retention period is part of the overall lifecycle of personal data, which consists of the following phases:

- **Business activity:** The relevant data is used in ongoing business, for example contract creation, delivery or payment.
- **Residence period:** The relevant data remains in the database and can be used in subsequent processes related to the original purpose, for example reporting obligations.
- **Blocking period:** The relevant data must be retained for legal reasons. During the blocking period, business users of SAP applications are prevented from displaying and using the data. However, it can be processed, if so required due to mandatory legal provisions.
- **Deletion:** The data is deleted and no longer exists in the database.

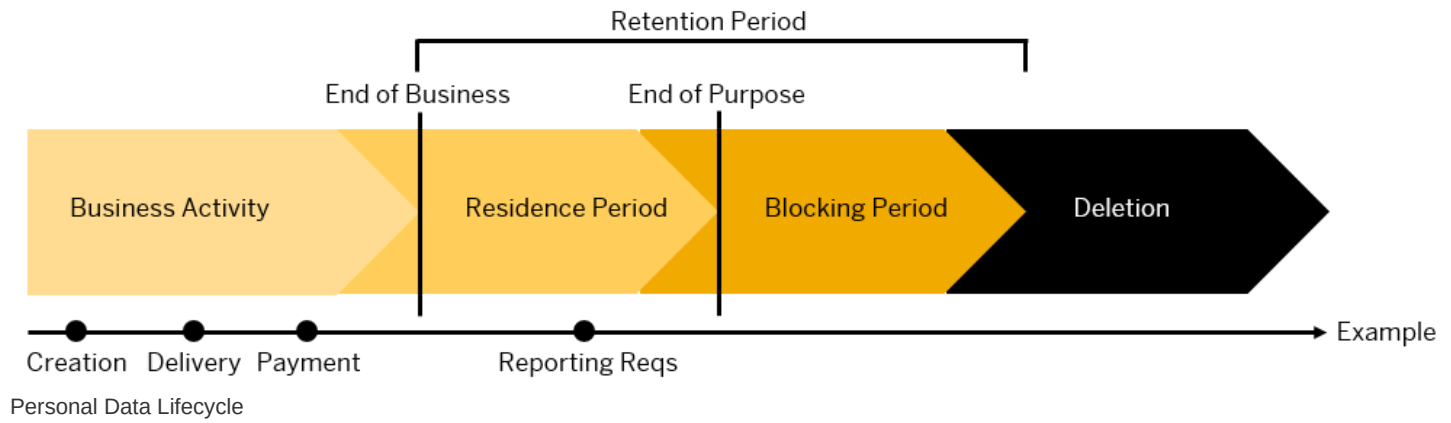

Blocking of data impacts system behavior in the following ways:

- **Display:** Only users with specific auditing authorizations can display blocked data.
- **Change:** It is not possible to change a business object that contains blocked data.
- **Create:** It is not possible to create a business object that contains blocked data.
- **Copy or follow-up:** It is not possible to copy a business object or perform follow-up activities for a business object that contains blocked data.
- **Search:** Only user with specific auditing authorizations can search for blocked data or search for a business object using blocked data.

Customizing for the End of Purpose Check

Activity	Customizing Path
Define the settings for authorization management in Customizing for Cross-Application Components under:	► Data Protection ► Authorization Management ►
Configure the settings related to the blocking and deletion of business partner master data in Customizing for Cross-Application Components under:	► Data Protection ► Blocking and Unblocking of Data ► Business Partner ►
Configure the settings related to the blocking and deletion of customer and supplier master data in Customizing for Cross-Application Components under:	► Data Protection ► Blocking and Unblocking of Data ► Customer Master/Supplier Master Deletion ►
Define whether you want to use no blocking or dual control for blocking in Customizing for Cross-Application Components under:	► Data Protection ► Blocking and Unblocking of Data ► Business Partner ► Set Activation Status of No Blocking/Dual Control for Role Group ►
Define whether you want to use dual control for unblocking in Customizing for Cross-Application Components under:	► Data Protection ► Blocking and Unblocking of Data ► Business Partner ► Define Reasons for Unblocking Business Partner ►
	► Data Protection ► Blocking and Unblocking of Data ► Business Partner ► Define Registered Function Modules for Unblock BP ►
	► Data Protection ► Blocking and Unblocking of Data ► Business Partner ► Define Dual Control Setting for Unblocking ►
	► Data Protection ► Blocking and Unblocking of Data ► Business Partner ► Set Status for Automatic Unblocking ►
Configure the settings for transactional data specific to service solution in the Customizing for Service under:	► Cross-Application Components ► Data Protection ►

For more information about the possible Customizing settings, refer to the system help of the respective activity.

Process Flow

Activity	Additional Information
Enable the end of purpose check function for the central business partner by running transaction BUPA_PRE_EOP	System help for the Blocking of Business Partner Data report
Enable the end of purpose check function for the customer and supplier master data by running transaction CVP_PRE_EOP	System help for the Block Customer and Supplier Master Data report
Request the unblocking of blocked data	Request Unblocking of Master Data
Unblock master data	Unblocking Master Data
Delete master data	Deletion of Master Data
Display application logs for the business partner, customer, and supplier	Logging

ILM-enabled Objects in Service

Service uses the central business partner CA_BUPA.

Authorizations

Users who have a role based on the SAP_CA_BP_DP_DISPLAY or SAP_LO_MD_CVP_DISPLAY template roles, can display blocked business partner master data; however, they cannot create, change, copy, or perform follow-up activities on blocked data.

Users who have a role based on the SAP_LO_MD_CVP_DISPLAY template role with the B_BUP_PCPT authorization object including the assignment of activity 03, DISPLAY can display blocked customer and supplier master data; however, they cannot create, change, copy, or perform follow-up activities on blocked data.

Business Partner Master Data in Multisystem Landscapes

In a multisystem landscape, the EoP for business partner master data is checked for an application in the local system as well as the remote systems. The EoP check is used to ensure data integrity in case of potential blocking. The EoP determines whether there are any data dependencies, that is, whether the data is still required for business activities. If there is such a dependency, the system does not block the data. If you still want to block the data, the dependent data must be blocked or deleted using archiving and deletion tools. If the EoP criteria are met, the business partner master data is blocked in the local and remote systems.

Blocking Master Data

You can use the [Blocking of Business Partner Data](#) report (transaction BUPA_PRE_EOP) to block data related to a business partner including associated customer and supplier master data or the [Block Customer and Supplier Master Data](#) report (transaction CVP_PRE_EOP) to block data related to customer and supplier master data. These reports determine whether data can be blocked using the End of Purpose (EoP) check. If the data is still in use and business activities have not been completed, the system does not block the data. If business is complete and the residence period has expired, the reports block the business partner, customer or supplier master data as defined in the report parameters. To block business partner master data, any associated customer or supplier master data must first be blocked in your system.

Business Partner Master Data

Business partner master data is blocked completely in one step.

Customer and Supplier Master Data

Data is blocked by the system in the following order:

1. Block contact persons and/or the company codes
2. Block general data

You can perform both steps at the same time. However, performing the first step separately allows the contact person and/or company code data to be blocked and the residence time of the general data to be reset. The general data can then be blocked when the revised residence time is met.

More Information

- Report documentation for the [Blocking of Business Partner Data](#) report (transaction BUPA_PRE_E0P)
- System help for the [Block Customer and Supplier Master Data](#) report (transaction CVP_PRE_E0P)

Request Unblocking of Master Data

You can request the unblocking of business partner, customer or supplier master data using the [Request Unblocking](#) report (transaction BUP_REQ_UNBLK). You may do this because new business starts with a historic business partner, customer or supplier and their master data has not yet been deleted.

More Information

System help for the [Request Unblocking](#) report (transaction BUP_REQ_UNBLK).

Unblocking Master Data

You can use the [Request Unblocking](#) report (transaction BUP_REQ_UNBLK) to unblock business partner data. If the dual control setting for unblocking data has not been set, you can unblock data from your own unblocking request. If your system has dual control for unblocking set-up, another user must process the request to unblock data.

You can unblock customer and supplier master data with the [Unblock Customer and Supplier Master Data](#) report (transaction CVP_UNBLOCK_MD).

Blocked data can only be unblocked, if the master data has not been archived and it is still within the retention period.

Unblocking is performed in the opposite order of the blocking process. That means that business partner master data is unblocked in one step.

Blocked customer or supplier master data that extends across several company codes and has several contact persons, is unblocked as follows:

1. Unblock the general data
2. Unblock the contact persons and the company codes

More Information

- Report documentation for the [Blocking of Business Partner Data](#) report (transaction BUPA_PRE_EOP)
- System help for the [Request Unblocking](#) report (transaction BUP_REQ_UNBLK)
- System help for the [Unblock Customer and Supplier Master Data](#) report (CVP_UNBLOCK_MD)
- For more information on unblocking, see [Request Unblocking of Master Data](#)
- For more information on dual control and unblocking, see the product assistance on SAP Help Portal and search for *Unblocking*.

Deletion of Master Data

After the residence period has been completed and data is blocked, it either remains in the database or is stored in an external archive. If the blocked data remains in the database, the data manager can delete the blocked business partner, customer, and supplier master data from the database using the corresponding archiving objects. The business partner master data can be deleted once all associated customer and supplier master data has been deleted from the database.

To destroy data from the database or archives, you can use the [Data Destruction](#) report (transaction ILM_DESTRUCTION). Subsequently, the data can no longer be retrieved.

Logging

You can use the [Analyze Application Log](#) report (transaction SLG1) to view the centralized business partner log. To do so, use the BDT_DATAARCHIVING object with the BUPA_EOP subobject.

You can use the [Display Stored Application Logs for Customer and Supplier](#) report (transaction CVP_DISPLAY_LOG) to display the application log for one or various subobjects including:

Subobject	Subobject Description
CUSTOMER_BLOCKING	Customer blocking
CUSTOMER_UNBLOCKING	Customer unblocking
SUPPLIER_BLOCKING	Supplier blocking
SUPPLIER_UNBLOCKING	Supplier unblocking

This report provides more contextual details at the level of the log items compared to the [Analyze Application Log](#) report.

More Information

- System help for the [Display Stored Application Logs for Customer and Supplier](#) report (transaction CVP_DISPLAY_LOG)
- System help for the [Analyze Application Log](#) report (transaction SLG1)

Blocking and Deleting Personal Data in Subscription Order Management

The processes and functions of Subscription Order Management use personal data of the SAP business partner. If, from the point of view of these processes and functions, there is no longer any reason to store the data (for example, for a possible tax audit), you can block this data from the perspective of Subscription Order Management and ultimately destroy it.

For destroying personal data, use the functions of Information Lifecycle Management (ILM). Using the ILM functions, you first block the personal data of business partners for whom there is no further business. Then you delete this data as soon as it is no longer needed.

All archiving objects in Subscription Order Management support data protection notifications (see **Deletion of Personal Data in SAP BW/4HANA and SAP BW**).

Related Information

[Deletion of Personal Data in SAP BW/4HANA and SAP BW Data Protection](#)

ILM Objects in Subscription Order Management

Use

In Subscription Order Management, the following archiving objects are enabled for use with SAP Information Lifecycle Management (SAP ILM):

ILM-Enabled Archiving Objects

Technical Name	Description	Available Fields of Retention Period	Available Start Times
SOM_PROD	Subscription product-specific data	PRODUCT - Material ID	CREATION_DATE - Created On LAST_CHANGE_DATE - Last Changed On
SOM_ADG	Allowance definition group	GROUP_ID - Allowance definition group ID	CREATION_DATE - Created On LAST_CHANGE_DATE - Last Changed On
CRM_PRVO	Subscription order	BS_CRM_COUNTRY_OF_ORGUNIT - Standard field <i>Country</i> from Org Unit OBJECT_TYPE - Business Trans. Cat. PROCESS_TYPE - Business Transaction Type	LAST_CHANGE_DATE - Last Changed On
CRM_PRVC	Subscription contract	BS_CRM_COUNTRY_OF_ORGUNIT - Standard field <i>Country</i> from Org Unit OBJECT_TYPE - Business Trans. Cat.	LAST_CHANGE_DATE - Changed On

Technical Name	Description	Available Fields of Retention Period	Available Start Times
		PROCESS_TYPE - Business Transaction Type	
CRM_PRVMA	Master agreement	OBJECT_TYPE - Business Trans. Cat CRMT_SUBOBJECT_CATEGORY_DB PROCESS_TYPE - Business Transaction Type CRMT_PROCESS_TYPE_DB	CONTRACT_END_DATE - Contract End Date LAST_CHANGE_DATE - Last Changed On
SOM_SHGR	Sharing group ID	GROUP_ID – Sharing Group ID	CREATION_DATE - Created On LAST_CHANGE_DATE - Last Changed On
CRMS4_SOM_MR_DESTRUCTION	Mass Runs	SERVICEMASSRUNTYPE – Mass Run Type SERVICEMASSRUNSTATUS – Mass Run Status	CREATION_DATE - Created On LAST_CHANGE_DATE - Last Changed On

Prerequisites

To use the blocking and delete functions, you must:

- Set up SAP Information Lifecycle Management. For more information, see [SAP Information Lifecycle Management](#).
- Activate the business function ILM. For more information, see [Activating SAP ILM](#).

ILM Notifications for Data Protection

The archiving objects in Subscription Order Management support data protection notifications. The table below highlights the specific ILM objects and the relevant fields that are included in the notifications.

ILM Object	Source Fields
Subscription Order (CRM_PRV0)	OBJECT_ID OBJTYPE_H
Subscription Contract (CRM_PRVC)	OBJECT_ID OBJTYPE_H NUMBER_INT CI_CONTRACT_ID
Master Agreement (CRM_PRVMA)	OBJECT_ID OBJTYPE_H
Allowance Definition Group (SOM_ADG)	ALLOWANCEDEFINITIONGROUPID

ILM Object	Source Fields
	ALLOWANCEDEFINITIONGROUPUUID
Subscription Product-Specific Data (SOM_PROD)	PRODUCT SUBSCRPNPRODSPECUUID
Sharing Group (SOM_SHGR)	SUBSCRPNCONTRACTSHARINGGROUPID SUBSCRPNCONTRACTSHARINGGROUPUUID

Notification Modes

ILM notification logs the following processes categorized as notification modes:

Notification Mode	Process Step
01	Archiving Write
02	Archiving Delete
03	Data Destruction Run Using Archiving Write Report
04	Data Destruction of Archive Files
05	Destruction Run Using Data Destruction Object
*	All

Authorization Objects

The authorization object **S_ILM_NOTI** is created with the Display, Delete, and Distribute activities. This object is used for the following authorizations required for performing actions on the notification logs:

- **S_ARCHIVE** is checked for creation of log entries during archive process.
- **S_ARCD_RUN** is checked for ILM destruction mode during deletion of archive files.
- **S_ARCD_OBJ** is checked when the Create API (SO Create SOAP API?) Is called from the destruction object program.
- **S_ILM_NOTI** with activity = Distribute is required to extract the notification log data.

Veto Check for HR Master Data in Service

Perform a veto check for HR master data in Service.

Use

Service provides a veto check for the deletion of the HR master data. The veto check enables the application to prevent HR master data being deleted for as long as transactions requiring HR master data information exist.

The veto check is relevant to the deletion of personnel numbers. This reference indirectly extends the residence and retention policy of the HR master data. As long as such references exist, HR master data is not being deleted.

Application Name	Function Module Type	Function Module for Check
S4CRM	For Deleting Personnel Numbers	CRMS4_HR_PER_VETO_CHECK

You have to activate all applications that should participate in the veto check for blocking data destruction

If not already available, create an entry for S4CRM in Customizing under ► [Personnel Management](#) ► [Personnel Administration](#) ► [Tools](#) ► [Data Privacy](#) ► [Data Destruction](#) ► [Block Data Destruction \(Veto\)](#) ► [Activate Applications for Veto Check](#) ►. To activate the veto checks, set the entry with S4CRM to [Needs to be checked](#) ([Application Active](#) checkbox).

If necessary, enter the logical system for S4CRM as the destination.

Technical Details

ILM Objects

The veto check evaluates data for the following ILM objects:

- CRM_SERORD (service orders)
- CRM_SRVCN (service confirmations)
- CRM_SRCONT (service contracts)
- CRMS4_REPA (in-house services)

Veto Check Implementation

Service provides the following functionality for the veto check of the HR master data:

- The application searches for the following data in relation to the HR master data:
 - Service orders, service contracts, and in-house services that do not have the status [Completed](#).
 - Service confirmations that have the status [Completed](#) but have not been released for billing.
- In the case of deletion of the personnel numbers, the application returns the personnel number to be deleted.

Based on this information, the function modules can return information at personnel number level about whether the data in the applications is still required. The [Veto](#) checkbox is selected at personnel number level.

If the [Veto](#) checkbox is selected, the system prevents both the destruction of infotype and subtype data and the deletion of personnel numbers.

Analysis

In the [ILM Data Destruction](#) app, once the job that performs the veto check has finished, the results of the check are written to the application log.

If the veto check has failed, the log provides information about any service transactions that triggered the veto and are therefore preventing the deletion of HR master data.

The log also provides the personnel numbers for the affected employees.

Related Information

Veto Check for HR Master Data in Subscription Order Management

Use

Subscription Order Management provides a veto check for the deletion of the HR Master Data. The veto check enables the application to prevent the deletion of the HR Master Data as long as transactions requiring HR Master Data information exist.

The veto check is relevant for the following situations:

- For deletion of employee data. A veto check is required to ensure that the employee data remains accessible for users (for audit and revision reasons, for example) with special authorization to the application and its processes.

These references indirectly extend the residence/retention policy of the HR Master Data. As long as such references exist, HR Master Data will not be deleted.

Application Name	Application Description	Function Module Type	Function Module for Check
Register the application and implementation class in view cluster VC_WFD_EOP_APP. Application Name: S4CRM Application Component: CRM-BF-AR	Subscription Order Management	Remote Enabled Function Module	CRMS4_HR_PER_VETO_CHECK (Veto check for HR Master - S4CRM)

You have to activate all applications that should participate in the veto check for blocking data destruction

For this, if not already available, create an entry for S4CRM in Customizing under **Personnel Management > Personnel Administration > Tools > Data Privacy > Data Destruction > Block Data Destruction (Veto) > Activate Applications for Veto Check**. To activate the veto checks, set the entry with S4CRM to **Needs to be checked** (**Application Active** checkbox).

If needed, enter the logical system for S4CRM as the destination.

Technical Details

ILM Objects

The veto check evaluates data for the following ILM objects:

- HRPB_PERNR (Destruction Object for Personnel Number)

Veto Check Implementation

Subscription Order Management provides the following functionality for the veto check of the HR master data:

- The application searches for open transactions with relation to the personnel number. If open transactions exist, the application will not allow data related to the personnel number to be deleted.

- The end of business is reached when it reaches the end of the retention period.
- The application returns the following information, depending on the scenario:
 - For data destruction, the type of data (infotype/subtype) to be destroyed as well as a list of personnel numbers and the date on which the data for each personnel number is to be destroyed
 - For deletion of personnel numbers, the personnel number to be deleted.

Based on this information, the function modules can return information on personnel number level about whether the data in the applications is still required. If the veto checkbox is selected, the system prevents the destruction of infotype and subtype data as well as the deletion of personnel numbers.

Analysis

Analysis Question	Answer
What is the purpose of the HR Master Data?	The fields from CRM tables always refer to the Business Partner ID, which is associated with (replicated from) an employee. In Service, it is mandatory to have an associated business partner.
Would a deletion in HR Master Data impact the integrity of your records?	Yes
Describe the impact.	The veto check against the blocking of the HR Master Data person is needed in case a 1Order is not completed as the data is retrieved from HR Employee and not stored in parallel in the BP.

Data Destruction Objects in Subscription Order Management

You use data destruction objects to delete data from the database that is no longer relevant to your business processes, and that you aren't legally required to keep.

SAP has defined a minimum residence time for some data objects. You can also define your own residence time. If more than one residence time is defined, the longer residence time applies.

You destroy data by using [Schedule Data Destruction Run](#). Execute a data destruction run for each data destruction object.

Destroying Mass Runs Using CRMS4_SOM_MR_DESTRUCTION

You can use the data destruction object CRMS4_SOM_MR_DESTRUCTION for destroying Subscription Order Management mass runs.

For more information, see:

- [Processing Audit Areas](#)
- [Editing ILM Policies](#)
- [Editing Retention Rules](#)

ILM-Based Information for the Data Destruction Object

You create policies and rules for the related ILM object of this data destruction object.

The following fields for the ILM object are defined in the ILM policy and are visible when creating or processing the **ILM Policies**:

- Available **Time References**
 - CREATION_DATE - Creation date of the mass run
 - LAST_CHANGE_DATE - Last change date of the mass run
- Available **Condition Fields**
 - SERVICEMASSRUNSTATUS - Status of the mass run
 - SERVICEMASSRUNTYPE - Type of the mass run

Enablement for Information Retrieval

The ILM object CRMS4_SOM_MR_DESTRUCTION assigned to this data destruction object is enabled for use with the Information Retrieval Framework (IRF). The IRF allows you to search for and retrieve personal data of a specified data subject, based on a data model you define in your system. To help you get started with the data modeling process, SAP delivers an implementation (BADI_CRM_MRUN_ILM_OBJ_TABLES) of BAdI: Tables Used by an ILM Object (BADI_DTINF_ILM_OBJ_TABLES) for CRMS4_SOM_MR_DESTRUCTION. For more information, see SAP Note [2939146](#)  (S/4HANA).

Before you can start a search for personal data related to this ILM object, you must assign it to a purpose for which the data was collected and processed using customizing activity **Maintain Purposes** (transaction DTINF_MAINTAIN_PURP).

Once the profile has been created, it can be used for data collection using the transaction DTINF_START_COLL - Start Data Collection. You can view the collected data using the transaction DTINF_PROC_COLL - Process Data Collection Results.

For more information, see [Information Retrieval Framework \(IRF\)](#).

Compatibility Scope

With this compatibility pack, SAP provides a limited use right to SAP S/4HANA customers to run certain classic SAP ERP solutions on their SAP S/4HANA installation. Use the compatibility scope to understand the compatibility packages offered.

For more information about the compatibility scope and the compatibility packages offered for SAP S/4HANA, see SAP Help Portal at <http://help.sap.com/s4hana>  **<Choose an on-premise release>** **Discover** **Compatibility Packs** .

i Note

- The features described in this entire compatibility scope are only available in SAP S/4HANA.
- The system behavior described in this entire compatibility scope is only valid in SAP S/4HANA.

Related Information

[SAP Note 2269324](#) 