



Service

Generated on: 2026-07-01 15:06:58 GMT+0000

SAP S/4HANA | 2025 FPS01 (Feb 2026)

Public

Original content: https://help.sap.com/docs/SAP_S4HANA_ON-PREMISE/c9b5e9de6e674fb99fff88d72c352291?locale=en-US&state=PRODUCTION&version=2025.001

Warning

This document has been generated from SAP Help Portal and is an incomplete version of the official SAP product documentation. The information included in custom documentation may not reflect the arrangement of topics in SAP Help Portal, and may be missing important aspects and/or correlations to other topics. For this reason, it is not for production use.

For more information, please visit <https://help.sap.com/docs/disclaimer>.

Interaction Center

The interaction center provides multichannel collaboration and communication tools to enable efficient and consistent customer service.

Interaction center (IC) agents can handle inbound and outbound service transactions using the phone, e-mail, fax, chat, and letter communication channels. They can process business transactions, such as service orders and enhance their productivity by using alerts and a knowledge search. All relevant account information is available to them in the IC, such as account data, service order status, and product-related information.

The IC provides agents with the tools they need for the processes that comprise their daily work. Generally, the IC supports the following processes:

- Communication process

This business process involves the communication between an IC agent and a business partner (customer, employee, and so on) in real time, for example using the telephony channel. Since IC agents can also work asynchronously, processing e-mails, service requests, or workflow items from the agent inbox, the communication process is not necessarily performed at all times.

- Interaction process

The interaction process is the central IC process, which often encompasses the communication process and the business transaction process, and is performed whenever an agent uses the IC to communicate or interact – either directly with a business partner or asynchronously by working on a business transaction belonging to a business partner.

The interaction process starts in the interaction mode with either the identification and confirmation of the business partner or the selection of a business transaction, e-mail, workflow, or other item belonging to a business partner. The interaction process includes all steps that the agent takes to work on a customer request. The interaction process can optionally result in the creation of one or more business transactions.

- Business transaction process

Some simple customer or employee requests can certainly be resolved by providing a short answer or other information, not making use of a business transaction. However, frequently an interaction will result in one or more follow-on business transactions, such as a service request. In such cases, each business transaction is linked to the interaction record, providing a connection between the business process and the interaction process.

To start the interaction center, you use the **WUI** transaction and select a corresponding business role, such as **Service IC Agent**.

Related Information

[Interaction Center WebClient](#)

[E-Mail Response Management System](#)

[Integrated Communication Interface](#)

Interaction Center WebClient

Use

The interaction center (IC) WebClient is a thin-client, highly optimized desktop application for interaction center agents. It provides a comprehensive set of interaction center (IC) functions and supports various processes required to answer customer queries and

work in corresponding business transactions.

Features

- [Account Identification](#)

A customer search function that agents use to identify customers in the system. You can set up this function to identify customers even before agents accept contacts, based on automatic number identification (ANI) or the address of an incoming e-mail.

- [Account Overview](#)

An overview that agents use to get complete information for an entire account, including individual account details, notes, roles, planned activities, and business partner relationships.

- [Interaction Record](#)

A customer-focused overview of the current interaction and customer history.

- Interaction History

A comprehensive interaction history that provides one view of a customer. Search and overview of business transactions for a customer. Agents can use various search criteria to find the business transactions they are looking for. Agents can record data both during and immediately after an interaction.

- Knowledge Article Search

Interaction center agents can search for knowledge articles, which can include documents, links to Web sites, and screenshots, to answer customer queries.

- [Agent Inbox](#)

A central worklist that allows agents to process incoming and outgoing mails, planned activities, and other work items.

- [E-Mail](#)

An interface that agents use for processing incoming and outgoing e-mails, as well as completing unfinished e-mails.

- [Chat](#)

An interface that agents use for processing incoming chat sessions.

- [Scratch Pad](#)

An electronic notepad that agents use to record miscellaneous information during an interaction. Notes from the scratch pad can be imported into fields in the IC WebClient.

- [Alerts](#)

Functions that combine system resources intelligently to guide agents during customer interactions.

- Queue Status

A feature that agents use to quickly display the channels and queues they are assigned to, based upon configuration in the communication management software.

Specifics for Business Transactions in the Interaction Center

Use

This topic summarizes the specifics that apply to the processing of business transactions in the interaction center (IC).

Features

- The information from a confirmed account is automatically copied to any newly created business transaction.
- The business transactions that you use in the IC have a tiled layout. Alternatively, you can configure an overview layout for these business transactions in Customizing for the UI framework.

Settings

- Business transaction profile in IC

You can make the following settings in Customizing for [Service](#) under [Interaction Center WebClient](#) [Business Transaction](#) [Define Business Transaction Profiles](#):

- Define which transaction types are available to the agent to create business transactions, and which transaction type is to be the default
- Define whether dialog boxes are allowed and displayed automatically (automatic display is only supported by the interaction record)
- Define the transaction type for transaction data and the additional business transactions separately

- Automatic routing

Set up automatic routing. For information about the necessary settings in the rule modeler, see [Interaction Center WebClient](#) [Business Transaction](#) [Define Automatic Routing](#).

Sales Transactions

Get an overview on how to create and change sales orders and sales quotations, display item proposals, as well as display and print sales transactions.

To use the sales transactions, you use the WUI transaction and select a corresponding role, such as [Sales Professional](#).

[Entering Sales Documents on the WebClient UI](#)

[Item Proposals in Sales Transactions](#)

[Searching for, Displaying and Printing Sales Transactions on the WebClient UI](#)

Entering Sales Documents on the WebClient UI

Use

You use this function to create and change sales orders and sales quotations.

You carry out your presales activities such as Opportunities and Activities on the WebClient UI, and then, for example, process a rush order without having to exit.

This function is of particular use to sales employees who work mainly with the WebClient UI and therefore do not require the full range of functions offered by Sales Quotation and Order Management. For example, sales assistants can use this function to

Prerequisites

You can directly create and change a sales document on the WebClient UI once you have carried out the following tasks:

- You have assigned the relevant sales documents to a profile in Customizing under [▮▮Service ▸ Transactions ▸ Settings for Sales Transactions on WebClient UI ▸ Define Profiles for Sales Transactions ▮](#).
- You have defined copy control of transaction types in Customizing for [Service](#) under [▮▮Transactions ▸ Settings for Sales Transactions on WebClient UI ▸ Copy Control for Opportunities and Sales Transactions ▮](#).
- If you want to use payment cards in sales orders, you have made settings in Customizing under [▮▮Sales and Distribution ▸ Billing ▸ Payment Cards ▮](#).

Features

When you maintain a sales document using the WebClient UI, the system enters data directly in SAP. This means that you can decide yourself which UI you use to process the sales order.

Creating Sales Quotations and Sales Orders as Follow-Up Transactions from an Opportunity

The sales representative or sales assistant has determined a potential sales opportunity, and has therefore created an opportunity. If the customer then requests a quotation, the sales employee can immediately create a sales quotation. To do so, the sales employee opens the opportunity that he or she created earlier, and creates the sales quotation as a follow-up transaction from the opportunity.

When you do so, the following data is copied to the sales quotation:

- Business partners
- Sales organization
- Distribution channel
- Division
- Sales office
- Sales group
- Product configuration
- Items
- Product
- Quantity
- Notes
- Unit

You can only display the following fields:

- Product
- Product ID

- Transfer
- Item number

You can navigate to the sales document using the transaction history in the follow-up activity.

Offering Alternative Items in Sales Quotations

In addition to the item requested by the customer, the sales employee can also offer an alternative item in the sales quotation. In order to offer the alternative item, when the sales employee copies the standard item and the alternative item from the opportunity to the sales quotation, the sales employee must make sure that the alternative item comes directly after (by item number) the standard item in the list of items.

Creating a Follow-Up Activity from a Sales Document

You can create a follow-up activity from a sales document. You can then navigate to the sales document using the transaction history of the follow-up activity. The system shows the follow-up activity in the following:

- Transaction history of sales orders and sales quotations
- Document flow shown in SAP GUI (transactions VA02, VA22, and VA42)

Correcting Errors

The system handles errors according to [Sales and Distribution](#) rules. This means that if errors occur, you cannot save the sales order. You can only continue processing the sales order after the errors have been corrected.

i Note

The assignment of digital payment cards is currently not supported on the WebClient UI.

Activities

Certain restrictions apply to this function. Therefore, it should only be used by sales employees who work with sales documents occasionally.

Example

You create a sales quotation as a follow-up transaction for an opportunity. The system copies data directly from the opportunity to the sales quotation.

Item Proposals in Sales Transactions

Use

- Item proposals are used as input help in sales orders and quotations.
- Item proposals are available on the WebClient UI for Service, including the Interaction Center (IC).

Prerequisites

You have set up the item proposals in sales transactions in Customizing by choosing **►►Service ► Transactions ► Settings for Sales Transactions on WebClient UI ► Product Proposals ►**. Under the node **Past Orders**, you make the settings for item proposals from previous orders.

Features

Item proposals are displayed directly in the **Items** assignment block.

You can automatically display item proposals, or manually trigger the display. To manually trigger the display of proposals, set the indicator **Past Orders on Request** in the Customizing of product proposals, in the activity **Assign Method Schema to Transaction Type**.

Item proposals appear at the end of the item list as suggested items, that is without item numbers. You can transfer the suggested items as final order items, by entering an order amount. Only then can the system carry out pricing and an availability check for the items.

- **Item Proposals from Past Orders**

The system proposes items from the previous sales transactions for this customer, that is products and order quantities.

- You can define the transaction types and the number of transactions in a certain time frame that the system draws from to determine proposed items, for example the last 10 sales orders from the past three months.
- You can define how the system calculates the proposed quantities: from the last order, or as an average quantity from the previously defined number of orders.
- You can select the required transactions using a popup, or the system can immediately (after you have entered the customer data) display all products from the past transactions.

Searching for, Displaying and Printing Sales Transactions on the WebClient UI

Searching for and Displaying Sales Transactions on the WebClient UI

If you want to provide your customer with information on the current status of a sales order that has already been created, you can use the **Search** function to locate transactions quickly, and forward the necessary information to the customer immediately. In addition, this function allows you to enter changes requested by the customer quickly and easily in the sales transaction.

Displaying sales transactions related to the relevant account

You can display sales transactions, that is, sales quotations and sales orders related to the relevant account on the **Account** overview page, under the corresponding assignment blocks. This allows you to gain an overview of all existing sales transactions for a specific customer, for example, in preparation for a customer visit.

Sales representatives can also create new sales transactions, edit or delete existing sales transactions from these assignment blocks. When you create a new sales transaction from here, the **Sold-to Party** field is automatically filled with the account from the **Account** overview page. Once you save and return to the **Account** overview page, the newly created sales transaction appears in the relevant assignment block.

Data retrieval parameters are delivered for each of these assignment blocks, which enable you to filter which data you want to display on the corresponding assignment blocks. For example, you may only want to display sales orders with posting dates for last month.

The following data retrieval parameters are available for the corresponding assignment blocks:

- Quotations: [Posting Date](#), [Transaction Type](#), [Valid From/To](#)
- Sales Orders: [Posting Date](#), [Transaction Type](#)

For more information on data retrieval parameters, see [Configurable Data Retrieval](#).

Printing Sales Transactions

You can print sales transactions, that is, quotations and sales orders from the WebClient UI. This allows sales representatives to preview, save or print sales transactions in order to check them, share them with their team, or file them to their documents. It is not intended for sales representatives to send transactions directly to their customers; this will continue to be done from the standard [Sales and Distribution](#) UI.

Once you have saved the sales transaction on the WebClient UI, you can use the [Preview Output](#) pushbutton for a print preview with a PDF viewer. You can also save locally or print out the preview using a PDF viewer. To print sales transactions, you can choose the output type set up in SAP [Sales and Distribution](#), including PDF-based print forms, SAPscript and Smart Forms.

For more information, see PDF-Based Print Forms

Specifics for Interaction Center: Communication Management Software

Use

Communication management software (CMS) refers to software products that manage communication channels and handle individual contacts with customers through different channels, such as phone, e-mail, and chat. The Integrated Communication Interface (ICI) allows the CMS to communicate with the Interaction Center WebClient.

For more information about ICI, see [Integrated Communication Interface](#).

For information about the features that are available in the telephony channel, see [Communication Management Software](#).

For information about the features that are available in the chat and e-mail channels, see [Chat](#) and [E-Mail](#) in the Interaction Center WebClient documentation.

Prerequisites

- You have made the settings in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Define Communication Management Software Profiles](#).
- Optionally, you have made the settings for checking the continued communication between the communication session, the CMS, and the Web browser in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Define Heartbeat Profile](#).

In this Customizing activity, you can make settings for the following checking methods:

- Heartbeat without watchdog
- Heartbeat and watchdog
- CMS session availability

Business Process Push

Use

You can use this function to push business processes to external routers or communication management software (CMS) for distribution to interaction center (IC) agents based on their real-time availability. For example, the following business processes can be pushed:

- Business transactions, such as service orders
- Faxes and letters received through SAPconnect or the ArchiveLink scenario

The ID of the business process and a parameter that specifies the type of business process are transferred to the external router or CMS.

In addition, for each business transaction, you can define a set of additional parameters to represent, for example, status and priority. In order for the business process to be pushed and prioritized correctly in the CMS, you define rule policies to set the values for the parameters before these values are transferred to the CMS.

Prerequisites

- You have made the settings for business process push in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Business Process Push](#) > [Define Settings for Business Process Push](#).
- You have assigned parameters to those agent inbox item types that you want to be pushed to external routers or CMS in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Business Process Push](#) > [Assign Parameters for Business Process Push](#).
- You have defined rule policies to set the values for the parameters. For more information, see [Rule Policies](#).
- You have made the settings for pushing faxes in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Agent Inbox](#) > [Settings for Asynchronous Inbound Processing](#) > [Define Receiving E-Mail/Fax Settings](#).
- You have made the settings for pushing letters in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Business Process Push](#) > [Define Letter Settings](#).

Features

Business transactions, such as service orders, are automatically transferred to an external router or CMS if the following conditions are met:

- The business transaction is saved and has ended, or is saved and escalated.
- The values of the parameters that have been defined in Customizing for the business transaction correspond to the values of the parameters that are set in the rule policies.

For example, the business transaction must have status [In Process](#) and priority [High](#) to be pushed to an external router or CMS.

The business transaction is locked and the current employee responsible for the business transaction is removed. No changes to the business transaction and its status are possible until the transaction has been pushed to an IC agent.

When an IC agent is alerted that an inbound business transaction is routed, the business transaction ID and type are shown on the screen. The IC agent can either accept or reject the business transaction. The IC agent who accepts it is assigned as an employee responsible and can process that business transaction and change its status.

- Rule policies

You define rule policies to set the values for the additional parameters for business transactions and cases before these values are transferred to the CMS. You define rule policies in the [Order Routing](#) and the [Intent Driven Interaction \(IC WebClient\)](#) contexts using attributes, conditions, and actions.

❖ Example

You can create the following rule policy in the [Order Routing](#) context:

Conditions:

If Priority Is Not Equal To Very High

Actions:

- Set business process push parameter (Item Type = SALES ORDER; Parameter Name = STA)
- Send business process push parameter

You can create the following rule policy in the [Intent Driven Interaction \(IC WebClient\)](#) context:

Conditions:

If Current Event Equals Order Was Saved

Actions:

- Set business process push parameter (Item Type = SALES ORDER; Parameter Name = PRI)
- Set business process push parameter (Item Type = SALES ORDER; Parameter Name = STA)

Conditions:

If Current Event Equals Interaction Ended

Actions:

Send business process push parameter

- Pushing of faxes and letters received through SAPconnect or the ArchiveLink scenario

If the Customizing settings for pushing faxes and letters have been made, faxes and letters received through SAPconnect or the ArchiveLink scenario are pushed to IC agents based on their real-time availability. The number at which the fax arrives is the indicator for pushing the fax.

An IC agent is alerted that an inbound fax or letter is pushed. The IC agent can then either accept or reject it. Once the IC agent accepts the fax or letter, the [Identify Account](#) page and the [Fax Preview](#) or [Letter Preview](#) is displayed.

ERMS E-Mail Push

Use

You can use this function to push e-mails to the communication management software (CMS) for distribution to an interaction center (IC) agent.

When e-mail is routed to an agent, the [Accept](#) and [Reject](#) context area buttons allow the agent to decide whether or not to accept the inbound message. If the agent accepts the e-mail, the system searches for the business partner based on the e-mail address. The agent can then use standard e-mail functions in the e-mail editor view.

Prerequisites

You have specified **Inbox** as the e-mail provider for the e-mail profile in Customizing for **Service** under **IC WebClient** > **Basic Functions** > **Communication Channels** > **Define E-Mail Profiles**.

Activities

- Create rules in the **ERMS** context to push e-mail to the CMS for distribution

❖ Example

You can create the following rule policy in the **ERMS** context:

Condition:

If E-Mail Sender Equals jdoe@customer.com

Action:

Push E-Mail to IC WebClient Agent

- Configure a CMS system ID that points to a CMS system that supports action routing

Create an entry for the CMS system ID **ERMS_ACTION**. You do this in the **SAP Easy Access** menu under **Service** > **Interaction Center** > **Interaction Center WebClient** > **Administration** > **Communication Management Software** > **Interface Settings** > **Maintain Communication Management Software Connections**.

More Information

[E-Mail Response Management System](#)

Queue Status

Use

The queue status, located in the bottom right hand corner of the interaction center, allows you to quickly display the channels and queues you are assigned to.

Features

The queue status:

- Displays the current date and time (default display) or queue.

If queue information is available, then an arrow is shown after the date. You can click on the arrow to show which queue the current incoming contact was sent to.

Clicking on the arrow again returns the current date and time.

- Displays a tool tip with a quick view of multichannel information.

The queue status tooltip displays the channels you are working in, for example, e-mail, chat, and telephony, specific phone numbers and e-mail addresses from which you can receive inquiries, and all queues to which you are currently assigned.

The queue status tool tip is only available if the connection to the relevant system is currently available.

- Displays the [Agent Dashboard](#).

If you click on the queue status, the agent dashboard is displayed.

Agent Dashboard

Use

You can use the agent dashboard to view information relevant to your current interaction center (IC) session. It is useful when you need more information about what is displayed in the [queue status](#). You can access the agent dashboard by clicking the queue status at the bottom right corner of the browser window.

Features

The agent dashboard displays the following information:

- Your user ID and business role
- Channels and queues

You see all channels you are working in, for example, e-mail, chat, and telephony, specific phone numbers and e-mail addresses from which you can receive inquiries, and the queues to which you are assigned.

This information is only available if:

- There is a connection to a communication management software system, and
- The communication management software passes queue and channel information to the interaction center.
- System information

System information is used primarily by system administrators for troubleshooting. It includes:

- Information on the domain in which the servers are operating (for example, wdf.sap.corp)
- Name and description of the communication management software being used

Specifics for Interaction Center: Toolbar

Use

The toolbar provides an interface between your communication management software (CMS) and the Interaction Center (IC) WebClient. The toolbar contains pushbuttons and icons for communication functions that apply to the various communication channels.

You can modify the content of the toolbar to better meet your business requirements. For example, you can specify that different sets of pushbuttons are available in the toolbar depending on the connection of an agent to the CMS and the status of the agent's interaction with a contact.

Integration

The following processes are examples of how you can use the pushbuttons in the Interaction Center toolbar:

- Communication process

For a phone call, you start the process by choosing the pushbutton **Dial** or **Accept**, and you end the process by choosing the pushbutton **Hang Up**.

- Interaction process

Includes account maintenance and the interaction record. Additionally, business processes such as sales and service can also be handled in the interaction center. You start the process by confirming the account and you end the process by choosing the pushbutton **End**.

- Communication process and interaction process

The two processes can take place simultaneously and do not necessarily start and end in the same order, for example in the following cases:

- Multiple phone calls

You can dial and end multiple phone calls during the same interaction. This occurs, for example, when a phone line is disconnected during a customer interaction and needs to be dialed again.

- Multiple interactions

Multiple interactions can happen during a single phone call. If the agent receives and accepts the next call whilst wrapping up the previous interaction, they can end the first interaction by choosing the **End** pushbutton despite already being in the next active phone call.

Prerequisites

- Your system administrator has set up the CMS and ensured that the user names there match those in the IC. For more information, see [Specifics for Interaction Center: Communication Management Software](#) and the documentation for the CMS you are using.
- You have made the settings for the toolbar in Customizing for **Service** under **Interaction Center WebClient** > **Basic Functions** > **Communication Channels** > **Define Toolbar Profiles**.

Features

You use the toolbar to work in different channels. The system determines the pushbuttons that appear in the toolbar, depending on the following:

- The communication channel in which you are currently working
- Customizing settings

Example

Pushbuttons in the IC toolbar

Channel	Name	Definition
Universal (available for all channels)	Accept	Accepts the contact. In telephony, Accept is similar to picking up the receiver.
	Reject	Sends the contact back to its original queue.

Channel	Name	Definition
	Transfer or Blind Transfer (in the telephony toolbar)	In telephony, puts caller on hold while you transfer the call to another agent's extension without first consulting with that agent.
	End	Ends the interaction (indicating that the agent has finished wrap up activities), saves all objects created or changed during the interaction, and clears customer information from the screen and from the business data context.
	Hang Up	Similar to hanging up the receiver. Ends a phone call that was started with Dial or Accept .
	Clear Interaction	Discards the interaction record and resets the account identification. i Note Discarding other transactions such as sales or service transactions is not possible in this way. Depending on the process status, this may be done by choosing Cancel if it is part of the transaction toolbar. If you want to clear the entire context of the session including the business data context, you have to choose the Clear Interaction pushbutton followed by the End pushbutton.
	Reset CTI	Resets the context area of the browser session to synchronize it with the communication session state. The different states can for instance be caused by network issues.
	Dial Pad	Displays a dial pad that looks like the numbers on a telephone, which you can use to make a call.
Telephony	Hold	Puts the active call on hold.
	Toggle	Switches between a call on hold and an active call, automatically placing the active call on hold and vice versa.
	Retrieve	Takes a call off hold and makes it active once again.
	Consult	Puts customer call on hold while you call another agent. After you are finished consulting with the other agent, the agent call is dropped and the customer call is active once again.

Channel	Name	Definition
	Warm Transfer	Puts caller on hold while you consult with another agent before transferring the call to the agent's extension.
	Conference	Puts customer on hold while you call another agent. Then you activate both calls at the same time so that all three parties can participate in a discussion.
	Wrap Up	Indicates to the system that you need time to wrap up the call. Wrap up time ends when you choose the End pushbutton.
E-Mail	Pushbuttons specific to the e-mail function, such as Reply , New , or Forward , appear on the e-mail screen dynamically, as and when they are required.	Represent standard e-mail functions.
Chat	Leave	Finishes the chat.

Work Modes

Name	Use
Ready	When you choose Ready , the CMS system sends incoming contacts to you.
Not Ready	When you choose Not Ready , the CMS system does not send incoming contacts to you.

Scratch Pad

A temporary workspace in the interaction center that you use as an electronic notepad to store miscellaneous information during an interaction.

Customers usually provide a lot of information during the first few minutes of conversation, before you have a chance to access the relevant transaction. Most agents have separate notepads to take notes and then enter the data into the system later.

The scratch pad replaces the need to write manual notes. It allows you to electronically store information so it can be copied into specific functions that require this data.

The scratch pad allows you to focus on recording and listening to what the customer is relaying. Customers do not have to hold their conversation until you follow through the sequence of the interaction, gather the preliminary information, such as contact information, and then navigate to the appropriate area in the IC WebClient to record the information. This also saves customers from having to provide information more than once.

The scratch pad is located in the top left corner of the IC, under the title bar. It is available throughout the interaction, and can be copied into different IC functions, such as the interaction record or knowledge search by choosing **Import Scratch Pad**. All of the data on the scratch pad is imported, but you can still edit, add, or delete it, if necessary.

Data remains on the scratch pad for the entire interaction until you either select **End** from the toolbar, or select **Clear**. Closing the scratch pad does not delete the contents.

Alerts and Messages

Use

These functions display texts on your page to alert you about items or situations that require your immediate attention. There are three types:

- Alerts

Alerts are predefined by system administrators or Interaction Center (IC) managers to be triggered by certain events in the system.

- Messages

There are three types of messages: informational, warning, and error.

Features

- Placement on page

Alerts appear in the alerts area and system messages appear in the system messages area.

- Alerts

- If more than two alerts appear, an arrow appears, which allows you to page through alerts in pairs.
- All alerts disappear when you choose [End](#).

Example

Alerts

Marcus is a customer service representative at an interaction center. He accepts a call from Ms. Anna Glenn and confirms her identity in the system. The following alert appears:

Service order 00225

Marcus asks Ms. Glenn if she is calling regarding this order. She says that she would like to know the status of the service order. Marcus simply chooses the link to the service order and can inform Ms. Glenn of its current status.

Creating Alerts

Use

You can create alerts in that use system information to provide agents with information they may need during customer interactions.

i Note

No preconfigured alerts are delivered. Interaction center managers define alerts in the [Alert Editor](#) and assign them through rule policies. Alerts are created independent of any rule policy context.

Alerts can only be triggered in the **Intent-Driven Interaction** context. This context allows you to automate specific interaction center functions, for example, triggering and terminating alerts, via business rules. Interaction center alerts are not relevant for other rule policy contexts.

Prerequisites

- You have completed the Customizing for **Service** under ► **Interaction Center WebClient** ► **Additional Functions** ► **Intent-Driven Interactions** ► **Service Manager** ► **Configure Alerts** ►.
- You have completed the Customizing for **Service** under ► **Interaction Center WebClient** ► **Additional Functions** ► **Intent-Driven Interaction** ► **Define Intent-Driven Interaction Profiles** ►.
- If you want to use user-triggered alerts, you have selected this alert type in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define Communication Processing Profiles** ►.

Features

The following types of alerts are available in the IC:

- Real-time alerts

With these alerts, the system continually polls the server to check for alerts.

- User-triggered alerts

With these alerts, the system waits until the user triggers an event to perform a server round-trip to check for alerts.

This type of alert allows you to show alerts without using server polling and can be used with asynchronous processing.

When creating alerts, you can select a theme that affects the appearance of alerts by changing, for example, the font style, font color, and the alert icon. You can also preview the theme. Once you select a theme, an example text is displayed with the theme applied.

Themes must be defined in Customizing before they are available for selection when creating an alert. You can define themes in Customizing for **Service** under ► **Interaction Center WebClient** ► **Additional Functions** ► **Define Themes for Alerts** ►.

Broadcast Messaging

Use

Interaction Center (IC) supervisors can send messages to IC agents in real time using broadcast messaging. They can also create and maintain distribution lists for broadcast messaging and display sent messages. IC agents can receive messages, but cannot send messages.

IC supervisors can access broadcast messaging under ► **Managing Operations** ► **Broadcast Messaging** ►.

Prerequisites

You have made the settings for broadcast messaging in Customizing for **Service** under ► **Interaction Center WebClient** ► **Additional Functions** ► **Define Broadcast Messaging Profiles** ►.

Features

- Distribution lists

To create or maintain distribution lists, click [Maintain Distribution Lists](#). Broadcast messaging profiles contain an organizational ID. When you create distribution lists, the names that appear in the input help for [Add User](#) come from the organizational unit entered in the selected broadcast messaging profile. You can also copy an existing distribution list, delete a user from a distribution list, or delete a distribution list. The default distribution list is the one that appears first alphabetically.

To share distribution lists, the owner of the list can flag other users within the list as administrators. As an administrator, you can add and remove users from the list, use the list to send broadcast messages, and you will be able to view any broadcast messages that were sent to this list in the [Sent Log](#).

- Themes

You can define themes for broadcast messaging in Customizing for [Service](#) under [Interaction Center WebClient](#) [Additional Functions](#) [Define Themes for Broadcast Messages](#).

Once a theme has been defined in Customizing, it is available for selection when creating a broadcast message. The theme affects the appearance of broadcast messages by changing, for example, the font style and color. You can also preview the theme. Once you select a theme, an example text is displayed with the theme applied.

Interaction Record

Use

The interaction record is a screen in the interaction center (IC) that contains data for the current interaction with an identified business partner. IC agents can log current interactions in this screen, and postprocess them if necessary.

Interaction with a customer always includes an interaction record, which can then be linked to another business transaction, such as a service process. The interaction record can, however, also be saved without creating another business transaction.

i Note

From a technical point of view, the interaction record is created as a business transaction.

Once an agent has identified an account, the system navigates to the interaction record. In the interaction record, the agent logs the interaction, records central data from the call, and postprocesses the interaction when the call is finished.

To increase system performance at high volume call centers, you can use the lean interaction record. The lean interaction record is a modified version of the full interaction record.

Prerequisites

- You have defined a date profile and assigned this to your transaction type to use interaction time recording in Customizing for [Service](#) under [Basic Functions](#) [Date Management](#) and [Transactions](#) [Basic Settings](#) [Define Transaction Types](#).
- You have activated the rescheduling view and optionally enabled automatic text entry for call rescheduling in Customizing for [Service](#) under [Interaction Center WebClient](#) [Business Transaction](#) [Define Business Transaction Profiles](#).
- **Using Activity Reasons:**
 - You have made the settings for activity reasons in Customizing for [Service](#) under [Transactions](#) [Settings for Activities](#) [Define Activity Reasons](#).

i Note

The interaction reason corresponds to the activity reason.

- o You have assigned the **Reason for Activity** subject profile in your transaction type to the **Business activity** transaction type in Customizing at the header level.

You can make settings for transaction types in Customizing for **Service** under ►► **Transactions** ► **Basic Settings** ► **Define Transaction Types** ►.

- **Using Multilevel Categorization:**

You have made the following settings in Customizing for **Service**:

- o Activate categorization for the interaction record under ►► **Interaction Center WebClient** ► **Business Transaction** ► **Define Business Transaction Profiles** ►.
- o Make the necessary settings under ►► **Transactions** ► **Basic Settings** ► **Define Transaction Types** ►.
- o Define the subject profile for the category modeler under ►► **Basic Functions** ► **Catalogs, Codes and Profiles** ►.
- o Make the necessary categorization settings for the interaction record under ►► **Interaction Center WebClient** ► **Business Transaction** ► **Define Categorization Profiles** ►.

See [Multi-Level Categorization](#) for more information.

- If you want to use the lean interaction record instead of the full interaction record, you have assigned a business transaction profile that contains transaction type 0100 to the business role. You do this in Customizing for **Service** under ►► **UI Framework** ► **Business Roles** ► **Define Business Role** ►.

Activity Clipboard

Use

Interaction Center (IC) agents can use this function to view a list of the business objects involved in a current or past interaction. It is located in the [Interaction Record](#) or the navigation area.

i Note

The activity clipboard in the interaction record visualizes past and current interactions.

The activity clipboard in the navigation area visualizes current interactions.

The objects that were created or changed during those interactions are listed including navigation links.

Integration

This function is integrated with:

- Interaction Record
- Interaction History
- Business data context

In the Interaction Center (IC), the activity clipboard is one view of the business data context.

Prerequisites

Depending on where you want the activity clipboard to appear, you have to make different settings in Customizing:

Activity Clipboard in the Interaction Record

- You have made the necessary settings in Customizing to define the display of the activity clipboard so that the business partner appears in the activity clipboard list. Your system administrator can either use the default activity clipboard profile, or define which objects are relevant for linking and should appear in the activity clipboard. You do this in Customizing for [Service](#), by choosing ► [Interaction Center WebClient](#) ► [Basic Functions](#) ► [Define Activity Clipboard Profiles](#) ►.
- Both the programming of the business object itself and your Customizing settings must be in place for a business object to appear in the activity clipboard.

Activity Clipboard in the Navigation Area

You have made additional settings in Customizing for [Service](#):

- Define a direct link group of the type EE under ► [UI Framework](#) ► [Technical Role Definition](#) ► [Define Navigation Bar Profile](#) ► [Define Direct Link Groups](#) ►.
- Assign the direct link group to a navigation bar profile under ► [UI Framework](#) ► [Technical Role Definition](#) ► [Define Navigation Bar Profile](#) ► [Define Navigation Bar Profiles](#) ► [Assign Direct Link Groups To Nav. Bar Profile](#) ►.
- Assign the navigation bar profile to your business role profile under ► [UI Framework](#) ► [Business Roles](#) ► [Define Business Role](#) ►.

Features

If a business object is accessed repeatedly, it only appears once on the activity clipboard, in the order in which it was first accessed.

- By default the data is displayed in three columns, however, in Customizing you can choose the number of columns to be displayed with the maximum being five columns. The first column contains the name of the object or activity. Your system administrator can define what information appears in the other columns in Customizing for the activity mentioned above. By default, the [Object ID](#) and the [Process Type](#) are displayed.
- You can use the links to navigate to objects that appear in the activity clipboard, such as leads or sales tickets.

Account Identification/Account Fact Sheet

Use

IC agents can use this part of the interaction center (IC) to identify accounts in different ways, such as by name, company, or product, and to obtain an overview of an account and contact. If an account does not yet exist in the system, or if it must be updated, IC agents can also create and change accounts from this screen. In addition, they can quick create an account with just the basic data.

Prerequisites

- You have set up one of the following account identification profiles:
 - The standard account identification profile in Customizing for [Service](#) under ► [Interaction Center WebClient](#) ► [Master Data](#) ► [Define Account Identification Profiles](#) ►.

- The profile that enables confirmation of multiple business partners at once in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Master Data](#) > [Define Account Identification Profiles for Multiple Business Partners](#).
- In your account identification profile, you have made settings for the following:
 - Contact attached data (if you want to use this feature)
 - Configurable context area (if you want to use this feature)
 - Embedded object components
 - Search scenario
 - Search results filtered for account roles and contact person roles
 - Default contact type for contact searches using search fields for contact communication details ([Telephone](#), [E-Mail](#), [Fax](#))
 - International address versions (if you want to use this feature)
 - Employee search (if you want to use this feature)

- If you are using contact attached data (CAD), you have mapped the contact attached data from the communication management software to account identification using an XML file.

You have created a function profile in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Define Profiles for Contact Attached Data](#).

Additionally, if you want to use CAD attributes when creating alerts or rules, you have enabled the relevant CAD attributes for fact gathering. For more information, see Customizing for [Service](#) under [Interaction Center WebClient](#) > [Basic Functions](#) > [Communication Channels](#) > [Enable CAD Attributes for Fact Gathering](#).

- If you are using international address versions, you must have activated them. You do this in Customizing for [Service](#) under [SAP NetWeaver](#) > [Application Server](#) > [Basis Services](#) > [Address Management](#) > [International Settings](#) > [Activate International Address Versions](#).

Mapping from logon language to address version is available in the default implementation of Business Add-In ADDR_LANGU_TO_VERSIONMAP_LANGUAGE_TO_VERSION, or an implementation exists that maps the logon language to that version.

- If you are using employee search, you have defined employees as business partners.
- If you are using the standard account identification profile, you have defined any object components that you want to be displayed in the upper right area of the screen in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Customer-Specific System Modifications](#) > [Define Object Components](#).

If you are using the account identification profile for multiple business partners, you can define object components within the search tabs you define in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Master Data](#) > [Define Account Identification Profiles for Multiple Business Partners](#).

- You have defined an interaction history profile in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Master Data](#) > [Define Interaction History Profiles](#).
- If you are using the briefcase, you have made the necessary setting in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Master Data](#) > [Define Briefcase](#).
- If you are using the enhanced search, you have made the necessary setting in Customizing for [Service](#) under [Master Data](#) > [Business Partner](#) > [Search](#) > [Activate Wildcard Search for Accounts and Contacts](#).
- If you want to ensure that all rules and events that are triggered when the [Business Partner Confirmed](#) (BPConfirmed) event is raised are also triggered when a call is transferred, you have added the [Business Partner Confirmed for Call](#)

Transfer (BPConfirmed_Trans) event to the relevant rule policy in the rule modeler. Once you have done so, an account that is confirmed by an agent is confirmed automatically if the call is transferred to a second agent, and the system does not create a new interaction record when the call is transferred. For more information about creating rule policies, see [Rule Modeler](#).

Features

- Automatic number identification (ANI)

If your telephony switch system has ANI, the system can identify accounts even before IC agents accept contacts.

- Business context data (BCD)

When IC agents confirm an account or product, the system displays all relevant information for the account or product in the activity clipboard. This information is also recorded in the BDC so that it can be reused by other functions.

For more information, see [Activity Clipboard](#).

- Contact Attached Data

When IC agents confirm an account, the system can incorporate contact attached data from the communication management software (CMS). This information is displayed on the contact attached data screen.

You can also enable contact attached data attributes for fact gathering so that these attributes can be used when creating alerts or rules. Using these attributes, you can, for example, retrieve a service request number from the CAD attributes of an incoming call and set up a rule that displays an alert providing this information to the IC agent once the account has been confirmed. The IC agent can then click the service request number in the alert to navigate directly to the service order. When using CAD attributes for this purpose, you must ensure that the data that is passed has the same CAD group name and CAD attribute name that have been defined in Customizing.

- Configurable Context Area

The context area provides background information for the current interaction. If you would like to display different account information in the context area, ask your system administrator to configure the context area accordingly.

- Embedded Object Components

If you are using the standard account identification profile, you can replace the upper right area of the **Account Identification** screen with your own views that enable you to search for business partner-related business objects. You can define object components so that the agent can search for:

- Objects based on the confirmed business partner
- Business partners based on the confirmed objects

If you are using the account identification profile for multiple business partners, you can define object components within the search tabs you have defined.

- International Address Versions

If international address versions are activated in your system, you can use the default character set or the international character set to search for business partners (provided a character set is defined for your logon language).

The system automatically searches in both the default character set and the international character set. For example, in Japan, agents can search for the caller's name using the furigana version of the name. As a result, all names with the same pronunciation are displayed, irrespective of the character set.

International address versions are available for all countries for which you have maintained an international address version.

- Search Scenario

You can customize search fields and search views that appear as tabs on the **Account Identification** screen. For each search, you can define the title of the tab and the type of search (for example, business partner or object component).

You can also define the sequence of relationship types that appear in the search criteria.

- Filter search results for account roles and contact person roles

You can set the system to filter search results for account searches by account roles and by contact person roles.

- Define default contact type for searches using the contact communication data search criteria

For contact searches using the fields for contact communication details (**Telephone, E-Mail, Fax**), you can set a default contact type in Customizing that determines whether the search criteria are used to search for a contact of the type account, contact person, or both. IC agents can change this setting in the WebClient UI.

- Use contact name in account search

When searching for accounts in the IC, entering data in both the contact name fields and the account fields will generate a combined search result and provide more precise results.

i Note

You cannot search for accounts using the account search fields in combination with the search fields for contact communication details (**Telephone, E-Mail, Fax**). The contact communication details take priority over search criteria entered in the other search fields. If one of the search fields for contact communication details is filled, the system performs a contact search based on the communication details only.

- Employee Search

You can configure your interaction center to service internal employees. IC agents can use the employee search to look up employee details such as cost center, personnel area, employee group, and employee subgroup. They can also look up telephone numbers and e-mail addresses, or, when they receive a telephone call or e-mail, the system can identify the employee by ANI or from the incoming e-mail, and display the employee's details.

- Multiple Business Partners

You can configure your interaction center so that IC agents can confirm more than one business partner at once. You can also define a list of partner functions that can be used to confirm business partners and determine the sequence in which partner functions are displayed. You can then map the partner functions of confirmed business partner to the existing partner functions in business transactions and the interaction record.

- Account Fact Sheet

The account fact sheet gives an overview of the confirmed account. You can personalize views of the fact sheet. For more information, see [Fact Sheet](#).

- Briefcase

You can set up a briefcase that contains a collection of briefing cards that give you an overview of relevant information, such as addresses and contacts. Each briefing card can be assigned to more than one briefcase.

- Account Quick Create

You can quick create an account from every business object such as an opportunity or an activity. When you save the new account, the data you have entered in the fields for the business object is automatically filled in for the new account.

- Enhanced Search

You can search for an account and contact with the following search criteria:

- Region by Country

The search criterion refines your search for accounts by filtering the correct region of the respective country.

- E-Mail, Telephone, and Website

You can enter an asterisk (*) at the beginning or the end of a search string to perform a wildcard search. For e-mail, you can also put the asterisk within a search string.

Chat

Use

Interaction center (IC) agents can use the chat function to process incoming chat messages. The chat function in the IC includes standard chat functions, such as joining chat sessions, sending messages, and transferring chat sessions. Agents can transfer chat sessions to other queues or agents. Agents can also see additional details such as chat subject, location where the customer initiated the chat, and shopping cart items. Further features are described below.

Integration

Chat is integrated with the following IC functions:

- Toolbars

Agents use the channel-specific toolbar that is available for telephony, e-mail, and chat. The toolbar options change dynamically depending upon what channel is selected.

- Interactive scripting

Agents can use scripts to guide them through the chat session. The script is available directly next to the chat text area, so agents can easily and quickly access the information without navigating to a different screen.

- Knowledge search

Agents can use the knowledge search to find solutions to problems or other issues reported by customers.

- Telephony

Agents can remain in the chat channel and make a short phone call by using **Dial** in the toolbar.

- Interaction record

Depending on Customizing settings, the chat transcript can be saved and later accessed in the activity clipboard of the interaction record.

Prerequisites

- The Integrated Communication Interface (ICI) is configured (see [Integrated Communication Interface](#)).
- You have defined the chat profiles in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define Chat Profiles** ►.
- You have assigned chat profiles to agents through business roles.
- If you want to use standard responses, you have defined the standard response group in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define Standard Response Groups** ►.
- If you want to add additional knowledge bases for use with chat, you have made the settings for knowledge base implementation in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication**

- If you want a list of available queues when transferring chat sessions, [Communication Management Software](#) settings are defined.

Features

- Account identification

The customer search is automatically started when an incoming chat session is routed to an available agent. The customer's e-mail address or other business partner details are used to determine if customer data exists. If the account is confirmed, then chat transcripts can be saved to the confirmed business partner's interaction record. For more information, see [Account Identification/Account Fact Sheet](#).

- Standard responses

IC agents can insert standard responses into the chat text. They can choose from a predefined list of commonly used responses, or can use the standard response screen to search and preview other responses.

- Knowledge base integration

You can define which knowledge bases IC agents can access while using the chat function. You can, for example, integrate knowledge bases such as interactive scripts, knowledge articles, mail forms (standard responses), solution database (problems and solutions), or chat transcripts.

- Multiple chat sessions

IC agents can process multiple chat requests simultaneously to maximize efficiency.

i Note

For more information about settings for multiple chat, contact your communication management software (CMS) vendor.

When you use multiple chat, several parallel HTTP sessions are created on the server in Service. This affects the sizing on the server side.

If you are using multiple chat, the client switch scenario is not supported.

- Web shop integration

IC also supports chat in Live Web Collaboration in Web Channel. You can integrate IC with your Web shop and with Internet Customer Self-Service (ICSS) so that customer requests for assistance via chat are forwarded directly to the interaction center.

E-Mail

Use

You can use this function to process incoming and outgoing e-mails. This function is integrated with the following functions in the interaction center (IC):

- Toolbar

IC agents use the channel-specific toolbar, which is available for telephony, e-mail, and chat. The toolbar options change dynamically depending upon what channel is selected.

- Account identification

Upon receipt of an e-mail, the customer search is automatically initiated based upon the **From** e-mail address. For more information, see [Account Identification/Account Fact Sheet](#).

- Information search

Results from the knowledge search can be added to e-mails as attachments or as text in the e-mail message. For more information, see [Knowledge Articles](#).

- Agent inbox

IC agents can access e-mail through their inbox and process them. For more information, see [Agent Inbox](#).

- Interaction record

IC agents have access to previously sent or saved e-mails in the confirmed business partner's interaction record. For more information, see [Interaction Record](#).

- Telephony

IC agents can make a phone call by using the **Dial** function in the application toolbar while remaining in the e-mail channel.

Prerequisites

- You have made settings to display fields (for example, date and from fields) and editor buttons in Customizing for **Service** under **UI Framework > Technical Role Definition > Define Parameters**. If you make fields visible, IC agents can personalize by choosing to show or hide those fields. If you set no parameters, the system shows all fields.
- You have made settings for e-mail in Customizing for **Service** under **Interaction Center WebClient > Basic Functions > Communication Channels**. For example, you have made the following settings:
 - You have defined toolbar properties for e-mail in Customizing for **Service** under **Interaction Center WebClient > Basic Functions > Communication Channels > Define Toolbar Profiles**.
 - You have defined standard response groups in Customizing for **Service** under **Interaction Center WebClient > Basic Functions > Communication Channels > Define Standard Response Groups**.
 - You have defined outgoing e-mail address groups in Customizing for **Service** under **Interaction Center WebClient > Basic Functions > Communication Channels > Define Outgoing E-Mail Address Groups**.
 - You have defined e-mail profiles in Customizing for **Service** under **Interaction Center WebClient > Basic Functions > Communication Channels > Define E-Mail Profiles**.

Features

- Standard responses

IC agents can reuse use predefined text. For more information, see [Standard Responses](#).

- Multiple incoming e-mail addresses

Interaction centers can use more than one incoming e-mail address. Each address is assigned to a group of IC agents. IC agents can be assigned to more than one address.

- Multiple outgoing e-mail addresses

Interaction centers can also use more than one outgoing e-mail address. IC agents are assigned to one default outgoing e-mail address based upon their e-mail profile as defined in Customizing.

- Unfinished e-mails

IC agents can process unfinished e-mails if they need to deal with another transaction before completing an e-mail response.

Smart Responses

Use

Smart responses are [standard responses](#) with the ability to include additional dynamic information not limited to simple business partner attributes or system information.

Text is populated with business values and inserted into the e-mail content at runtime. This reduces the amount of time agents have to spend searching for and compiling information in a response. Agents are unaware if the response they choose is a standard response or a smart response.

Example

A customer sends an e-mail to the interaction center asking what his account balance is. After the agent confirms the business partner and initiates a reply to the e-mail, the agent selects a standard response. Variables such as account balance and account number are populated with the business partner's values in the response.

Note

Interaction center agents cannot insert smart responses manually into an e-mail using the **Standard Response** dropdown.

Prerequisites

- You have defined mail forms in the WebClient user interface. You can access this function in the role of an interaction center manager under **Knowledge Management > Mail Forms**.
- You have defined [Multilevel Categorization](#). (Not relevant for Auto Acknowledgements)
- You have defined the [rule policy](#) with the **Send Auto Acknowledgement**, **Auto Respond**, and/or **Auto Prepare** actions.
- You have assigned mail forms to actions in the WebClient UI or to categories through multilevel categorization.
- You have defined the data source classes in Customizing for **Service** by choosing **Interaction Center WebClient > Customer-Specific System Modifications > Smart Responses > Define Data Source Classes**.

Features

Like standard responses, you can insert placeholders in the mail form that can be filled in by data related to the e-mail or to the business partner of the e-mail. You can define how the values for business and transactional data are retrieved and placed in mail forms. You can use data from either the fact base attributes or from the business data context (BDC).

Smart responses can be sent automatically to customers with or without agent intervention based upon multilevel categorization. They can be inserted into the e-mail text or attached to the e-mail. For more information, see the actions and parameters table in [ERMS Rule Policies](#) for the **Auto Respond** and **Auto Prepare** actions. They also can be used in auto acknowledgements and response proposals.

Standard Responses

Use

IC agents can use standard responses to help automate e-mail processing. Standard responses use predefined text configured from mail forms that are available to IC agents in the e-mail editor. Standard responses provide consistent handling and messaging to customers regardless of which IC agent processes the e-mail.

On the e-mail editor screen, two assignment blocks offer standard responses.

1. The **Standard Responses** assignment block provides a list of standard responses from four different sources:
 - Standard response groups as defined in the **Define Standard Response Groups** Customizing
 - Standard responses are available in the e-mail editor when you select a relevant category
 - Standard responses from a manual search done by the IC agent
 - Standard responses that the IC agent has saved in their favorites.
2. The **Standard Response Tree** assignment block displays standard responses based on the assigned multilevel categorization schema. Standard responses are also available in chat text. For more information about e-mail and chat, see [E-Mail](#) and [Chat](#). Multilevel categorization and Customizing settings help determine which standard responses are available.

Prerequisites

- You have defined standard response groups in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define Standard Response Groups** ►.
- You have assigned the standard response groups to e-mail profiles in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define E-Mail Profiles** ►.
- If you want to use standard responses for chat, you must assign the standard response groups to chat profiles in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define Chat Profiles** ►.
- If you want to determine the default language for your standard response texts, you must make settings in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **BAdIs for Communication Channels** ► **BAdI: Language Determination for Standard Response Texts** ►.
- If you want to filter the standard responses to limit their use across channels, you must make settings in Customizing for **Service** under ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **BAdIs for Communication Channels** ► **BAdI: Filter for Standard Response Texts** ►.
- If you want to use the **Standard Response Tree** assignment block, you must have your e-mail editor profile to the EMAIL_PROFILE parameter for the e-mail application area. You can choose any categorization schema without the restriction of using an email profile when you use the CRM_IC_STD_RESP_SCHEMA business add-in (BAdI) definition, within enhancement spot CRM_IC_STD_RESPONSE. These standard responses will be in addition to those defined in the **Define Standard Response Group** Customizing.

Features

IC agents can do the following:

- Perform a search and preview standard response texts before choosing a standard response
- Choose the language of standard responses after searches
- Sort and filter standard responses

- Manage favorite standard responses
- View the source of standard response proposals (for example, from favorites or searches)

You can use variables in the mail form to insert placeholders for business partners. When IC agents choose the standard response or insert the standard response into an e-mail, the system fills these placeholders with values. For example, you can populate the customer's name in the salutation.

More Information

- [Auto Suggest](#)
- [Smart Responses](#)
- [Actions and Parameters](#)
- [ERMS Rule Policies](#)

Fax and Letter

Use

Interaction center (IC) agents can create, edit, and receive fax messages and letters in the interaction center. IC agents can also use an internal HTML editor to process faxes and letters.

Prerequisites

- You have made settings to display fields (for example, subject, date, and from fields) and editor buttons in Customizing for **Service** under **UI Framework** > **Technical Role Definition** > **Define Parameters**. If you make fields visible, IC agents can personalize by choosing to show or hide those fields. If you set no parameters, the system shows all fields.
- If you would like the **To** field of fax messages to be filled automatically, you have maintained the business partner (BP) data with a fax number that includes the country code.
- If you want to use business process push (BPP) with fax and letter, you have to specify the communication management software (CMS) connection by executing the program on the **SAP Easy Access** screen, under **Interaction Center** > **Interaction Center WebClient** > **Administration** > **Communication Management Software** > **Interface Settings** > **Maintain Communication Management Software Connections**. For more information about BPP, see [Business Process Push](#).

Caution

You must enter the following values:

- Under **Comm. Mgmt Software System ID** enter **FAX_LETTER**.
- Under **Connection** enter the RFC connection to your CMS system.

Features

Agents can search for incoming fax messages and letters in the agent inbox and display them. They can also view old fax messages or letters for a confirmed account in the interaction record.

i Note

This is custom documentation. For more information, please visit [SAP Help Portal](#).

Once a fax has been sent or a letter has been finished, it can no longer be edited.

Using the HTML editor, IC agents can:

- Create, send, and print fax messages and letters
- Display information for the current interaction, such as:
 - Reason
 - Priority
 - Status
 - Name
- Add and display attachments
- Change the default header data for fax messages and letters

Activities

Creating Letters

Before IC agents can process letters in the interaction center, you must upload them to the interaction center by doing the following:

1. Scan the letters.
2. Save them to your hard drive.
3. Go to transaction `oawd`.
4. Expand the node and double-click the highlighted line that appears.
5. Select **Drag & Drop**.
6. In the dialog box that appears, drag and drop the relevant files from your local drive.

Agent Inbox

Use

You can use the agent inbox (inbox) to call up e-mails, business transactions, and various other business objects for display or processing. The inbox is a central worklist that the entire team can use to work on incoming objects.

Prerequisites

- You have made the basic settings required to use the inbox. For more information, see [Basic Settings for the Agent Inbox](#).
- If you want to display an alert showing the number of incomplete e-mails linked to a particular account, you have created a rule policy and a rule to set up the alert. The rule policy must include the **Business Partner Confirmed** (BPConfirmed) event and the rule must include the **Show Number of Incomplete E-Mails** (AH_NO_CUST_MAIL) action.

For more information about creating rule policies, see [Rule Modeler](#) and [ERMS Rule Policies](#).

Features

Business Roles

You can use the inbox in business roles with the following profile types:

- [IC WebClient Business Role](#)
- [CRM WebClient Business Role](#)

i Note

The following inbox functions are not available for business roles with the profile type [CRM WebClient Business Role](#):

- Interact
- Link
- Next item
- Displaying e-mails, fax messages, and letters

Inbox Items

You can retrieve, access, and process the following items in the inbox:

- Business transactions in Service

You can call up business transactions, such as service orders.

- Workflow work items

You can process SAP workflow work items, including those that you have customized for use in the inbox. These work items can originate from the current system (SAP S/4HANA or SAP S/4HANA Cloud Private Edition) or from another SAP system.

- E-mails, fax messages, and letters

- Outbound correspondence

The inbox supports outbound e-mails, fax messages, and letters created in the interaction center (IC) and linked to an interaction record. The inbox also supports outbound e-mails created by the E-Mail Response Management System (ERMS).

- Inbound e-mails, fax messages, and letters

E-mails and fax messages that were received via SAPconnect appear as workflow work items. Inbound letters are also available in the inbox as work items.

A workflow forwards inbound e-mails to the appropriate group of agents.

- Multiple incoming and outgoing e-mail addresses

Agents can be assigned to various incoming addresses. All items sent to the agent's various addresses appear in the same inbox. Agents can also be assigned to more than one outgoing e-mail address. A default address is proposed, or the agent can select a different address.

- ERMS routing

Depending on the rule policies you define, you can use a general task for an ERMS decision to allow e-mail routing to all agents or you can specify individual agents or agent groups to allow e-mail routing only to those agents.

- o Number of incomplete e-mails linked to confirmed account

You can set up the inbox so that once an account is confirmed, an alert is displayed that shows the number of incomplete e-mails linked to the confirmed account. IC agents can click the alert to navigate directly to the inbox, where only the incomplete e-mails from the confirmed contact person of the account are displayed. If no contact person has been confirmed, only e-mails from the e-mail address linked with the account are listed in the inbox.

Inbox Search

For information about the inbox search features, see [Inbox Search](#).

Inbox Result List

For information about the inbox result list features, see [Inbox Result List](#).

Basic Settings for the Agent Inbox

Use

System administrators use this process to set up the agent inbox in the Interaction Center (IC) WebClient.

Prerequisites

- The SAPconnect interface is configured.

For more information about SAPconnect, search for “SAPconnect (BC-SRV-COM)” on the SAP Help Portal at <http://help.sap.com>.

- E-mail addresses are created.
- If you want to edit scanned letters in your agent inbox, you have defined an ArchiveLink scenario.

For more information, see the following Customizing activities under **SAP NetWeaver > Application Server > Basis Services > ArchiveLink**:

- o **Basic Customizing > Edit Document Classes** and **Edit Document Types**
- o **Customizing Incoming Documents > Workflow Scenarios > Assign Document Type to a Workflow**

Process

Step	Description
Create business partner master data for each employee, with an employee role.	Maintain all inbound e-mail addresses that the agent should be responsible for. Assign a user ID.
Maintain settings for recipient distribution	In the SAP Easy Access menu, choose Service > Interaction Center > Interaction Center WebClient > Administration > Agent Inbox > Maintain Recipient Distribution .

Step	Description
Maintain automatic workflow Customizing	In Customizing for Service, choose Basic Functions > SAP Business Workflow > Maintain Standard Settings for SAP Business Workflow. For more information, see SAP Business Workflow in the Interaction Center.
Activate event linkage for workflow template WS 14000164 and assign agents for e-mail handling	In the SAP Easy Access menu, choose Service > Interaction Center > Interaction Center WebClient > Administration > Agent Inbox > Assign Agents for Fax and Letter Processing. For more information, see Assigning Agents for E-Mail Handling.
Forward to employees/groups	In the SAP Easy Access menu, choose Service > Interaction Center > Interaction Center WebClient > Administration > Agent Inbox > Forwarding > Define Recipient Profile for Forwarding. Use this transaction to define the content of the dropdown box Forward To in the result list of the agent inbox.
Define quick searches	In the SAP Easy Access menu, choose Service > Interaction Center > Interaction Center WebClient > Administration > Agent Inbox > Define Quick Searches. Use this transaction to define the content of the dropdown box Quick Search in the agent inbox search.
Maintain Customizing activities	In Customizing for Service, choose Interaction Center WebClient > Agent Inbox. For more information, review the Implementation Guide (IMG) documentation for each activity.

More Information

[Agent Inbox in the Interaction Center WebClient](#)

Assigning Agents for Fax and Letter Processing

Use

System administrators use this procedure to make the following settings for the agent inbox (inbox) in the Interaction Center (IC) WebClient:

- Activate event linking.

Workflow can define how incoming fax messages and letters are routed and processed. Activating event linking activates the workflow you defined and allows it to be used for the agent inbox. You only have to activate event linking once.

- Assign agents for fax and letter processing.

i Note

The incoming e-mails are routed using E-Mail Response Management System (ERMS). For more information, see [ERMS Rule Policies](#).

Procedure

Activating Event Linking

1. In the **SAP Easy Access** menu, choose ► **Service** ► **Interaction Center** ► **Interaction Center WebClient** ► **Administration** ► **Agent Inbox** ► **Assign Agents for Fax and Letter Processing** ►.
2. In the **Event Linkage** column, choose **Activate event linking**.
3. Under **IC WebClient: Inbound Process AUI** expand the workflow template WS 14000164 (**IC: Mail Inbox Handling**).
4. Select the icon in the **Activate/deactivate** column.

Once selected, the icon should display as **Activated**.

Result

Workflow is activated for the agent inbox.

Define Rules for Fax and Letter Processing

Use

System administrators follow this procedure to define routing rules for incoming fax messages and letters in the agent inbox (inbox) in the Interaction Center (IC) WebClient.

The IC WebClient inbox uses workflow to route incoming fax messages and letters to agents.

Additional routing rules use business partner attributes to route e-mails to agents who specialize in particular areas (see [Additional Routing Rules for Fax and Letter Processing](#)).

i Note

The incoming e-mails are routed using E-Mail Response Management System (ERMS). For more information, see [ERMS Rule Policies](#).

Process

As a system administrator, you define routing rules in the following steps:

1. Create rules.
2. Assign rules to agents or grouping of agents.

Creating Rules

1. In the **SAP Easy Access** menu, choose ► **Service** ► **Interaction Center** ► **Interaction Center WebClient** ► **Administration** ► **Agent Inbox** ► **Define Rules for Fax and Letter Processing** ►.
2. Choose **Create responsibility**.

3. Enter the following:

- Object abbreviation
- Description
- Start date
- End date

4. Choose **Continue**.

5. Enter a priority.

6. Enter values for each business partner field that you want to use to further define routing.

To enter more than one range for the same field, select the field and choose **New row**.

Enter * (asterisk) for the fields that you do not want to define.

7. Save your data.

Assigning Rules to Agents

1. On the **Responsibilities for Rule** screen, select the rule that you created.
2. Choose **Insert agent assignment**.
3. Select an object type.
4. Search for and select one or more objects of the type that you specified in the previous step.
5. Choose **Create**.

If you want to delete an assignment, select a rule on the **Responsibilities for Rule** screen and choose **Delete agent assignment**.

Example

You want to use the business partner language Spanish as an additional routing field. You make the following settings:

Name	From	To
Address	*	<no entry>
Country	*	<no entry>
Language	ES	<no entry>
Name	*	<no entry>
Region	*	<no entry>
Postal code	*	<no entry>

Additional E-Mail Routing Rules

Use

The Interaction Center (IC) WebClient agent inbox uses workflow to route incoming mails to agents. In the standard workflow, after a customer sends an incoming mail to the interaction center, the system retrieves the address to which the customer sent the mail. It determines which agents are assigned for processing incoming mails for that address. This determination is based on the e-mail addresses entered in the employee's business partner master data.

In addition, you can use certain business partner data to define which agents or groups of agents should process the mails (for example, to route e-mails to agents who specialize in particular areas). The routing rules can be assigned to object types such as users, positions, and organizational units.

Prerequisites

Routing rules for e-mails have been defined and assigned to agents or groups of agents (see [Defining Routing Rules for E-Mails](#)).

Features


The following business partner data can be used to define how mails are routed:

- Address
- Country
- Language
- Name
- Region
- Postal code

To use other fields, you need to create a new rule. From the **SAP Easy Access** menu, choose ► **Architecture and Technology** ► **ABAP Workbench** ► **Development** ► **SAP Business Workflow** ► **Definition Tools** ► **Rules for Agent Assignment** ► **Create** ►. The **Responsibilities** tab allows the creation of rule definitions and assignments to agents.

Activities

The figure below shows how the system determines which agents process incoming mails and is followed by an explanation:

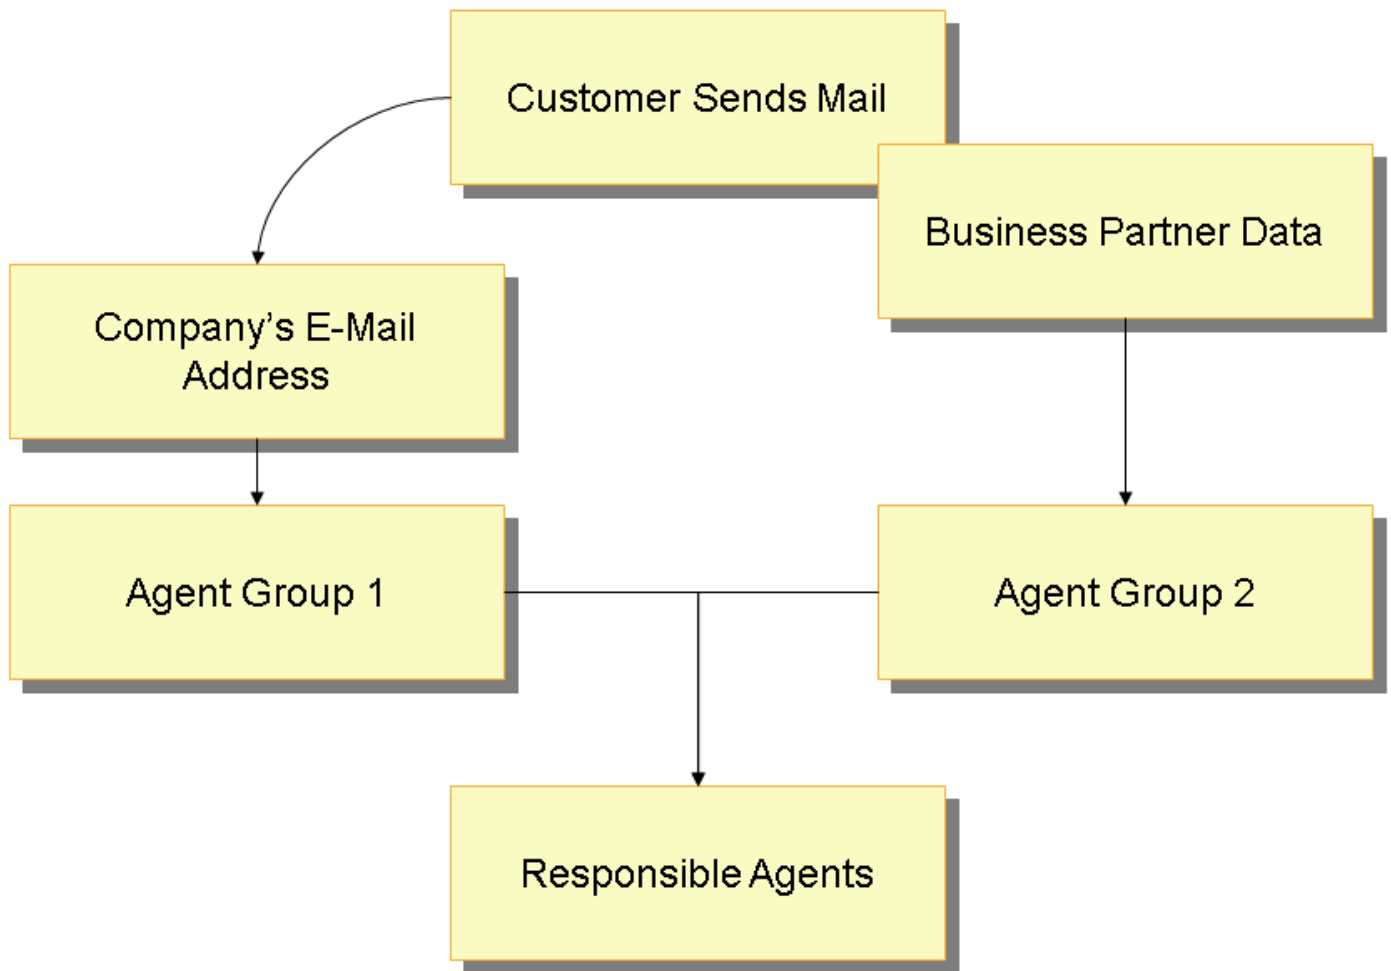

1. With additional routing rules, the system tries to determine the business partner by the customer's e-mail address. If the business partner is determined, attributes from the business partner master data can be used to further define which agents process the mail.

i Note

If the business partner cannot be determined, the additional routing rules are not used. In this case, agents who are assigned to process mails for that incoming address or number receive the mail (see [Defining Routing Rules for E-Mails](#)).

2. The system checks which agents are assigned to the incoming mail address (**Agent Group 1**), as specified in the inbound distribution.
3. The system checks which agents are assigned to process the specific business partner attributes (**Agent Group 2**) if the business partner address or number is found. This depends upon the defined rules and which agents are assigned to them.
4. The routing depends on how many agent groups exist:
 - o Two agents groups

The mail is routed only to agents who are in both of the groups (**Agent Group 1** and **Agent Group 2**). If no agents are found in both groups (agents in **Agent Group 1** and **Agent Group 2**, but none belonging to both groups) the mail is routed to all agents in each group.
 - o One agent group

If no agents are in **Agent Group 1**, the mails are routed to agents in **Agent Group 2**. Alternatively, if there are no agents in **Agent Group 2**, the mails are routed to agents in **Agent Group 1**.

Example

Routing works as follows when two agent groups exist:

1. Mr. Smith sends an e-mail to service@company.com.

Julie and David (**Agent Group 1**) are assigned to process mails sent to this e-mail address.

2. The system identifies Mr. Smith's business partner data based upon his outgoing e-mail address.

3. The system determines that an additional rule can be used based upon Mr. Smith's country (**US**).

Michael and Julie (**Agent Group 2**) are assigned to an e-mail rule for US customers.

4. The system determines that only Julie should receive the incoming mail because she is the only agent in both of the agent groups.

If Julie was not in both of the groups, then all of the agents, David, Michael, and Julie, would receive the incoming mail.

Define Recipient Profile for Forwarding

Use

Use this procedure to define to which person(s) you may forward items for further processing from the agent inbox in the Interaction Center (IC) WebClient. Inbox items may be forwarded to an individual employee or a group.

Prerequisites

Business partners specified as recipients must be defined.

Procedure

In the **SAP Easy Access** menu, choose **Service > Interaction Center > Interaction Center WebClient > Administration > Agent Inbox > Forwarding > Define Recipient Profile for Forwarding**.

Quick Searches

Use

You can define searches that can be used as options for finding business objects in the agent inbox (inbox).

Prerequisites

Features

You can define quick searches in the **SAP Easy Access** menu, under **Interaction Center > Interaction Center WebClient > Administration > Agent Inbox > Define Quick Searches**.

SAP delivers one Quick Search (0001) that is defined to select **My Open Items** sorted first by priority, then by main category. You can define additional quick searches based on your own selection criteria.

You can use an asterisk (*) as a wildcard to specify the title of a business object that has been derived from the business transaction.

You can also define a default quick search for each business role in Customizing for **Service** under **Interaction Center WebClient** **Agent Inbox** **Define Inbox Profiles**.

Note that the inbox supports the following time periods for quick searches: creation period, change period, and due period.

Example

You can define quick searches to retrieve item groups such as:

- All overdue items
- All items for which you are responsible
- All high-priority items

Inbox Search

Use

The agent inbox (inbox) search provides a broad range of search attributes and search features that you can use to tailor the inbox search according to your business requirements.

Prerequisites

You have set up and configured the inbox. For more information, see [Agent Inbox in the Interaction Center WebClient](#).

Features

Search Attributes

For information about the available search attributes, see [Search Attributes](#).

Search View: Standard and Advanced

The standard search provides a fixed arrangement of search fields that the user cannot change.

The advanced search provides selectable search attributes, the multiple use of search attributes, and the use of saved searches.

You can specify whether you want to use the standard search or the advanced search. You do this in Customizing for **Service** under **Interaction Center WebClient** **Agent Inbox** **Define Inbox Profiles**.

Lean Search

During a lean search, the system determines only the required data and does not store any data. It only determines the object attributes that are relevant for the search result list. This enables a faster search and faster processing times when working with the result list. The remaining attributes are determined when the object is used, for example, when the object is opened in the display mode or in the edit mode.

Predefined Searches

Quick Searches

You can create predefined search queries that appear as selection criteria in the **Quick Search** field. For example, you can define a search that agents can use to retrieve all high-priority items. For more information, see [Quick Searches](#).

Quick searches are assigned to business roles through the inbox profile.

Saved Searches

The saved searches function is only available in the advanced search. Saved searches are user-defined.

Search Attribute Validity Check

The following attribute validity check prevents unclear search results:

If a main category cannot be combined with a selected search attribute, the main category is excluded from the search. For example, a search involving the main category **E-Mail** in combination with the **Checklist ID** search attribute is not valid, and the search is not performed.

This system behavior also applies if only one main category has been selected or if no main category has been selected. In the latter situation, the validity check is performed for all main categories that are defined for the corresponding inbox profile in Customizing, and the search is performed for all main categories that have passed the validity check.

Search Traceability

A search processing log consolidates various detailed search messages, such as which search attribute is not supported by which main category, in a structured way. The processing log can be accessed using a corresponding button in the result toolbar.

In addition to the entries in the processing log, the following general messages are displayed on the UI, as appropriate:

- Search has been only partially performed
- Search could not be performed

This enables the user to understand the search behavior and to tailor future searches accordingly, or to contact the system administrator, as required.

Predefined Inbox Search Tables

You can use predefined inbox search tables that contain the inbox search attributes and inbox result attributes that are relevant to specific inbox item types. Predefined inbox search tables are available for the following inbox item types:

- **Inbox Item: OneOrder**
- **Inbox Item: Workitem - Inbound Email, Fax and Letter**
- **Inbox Item: Outbound Correspondence**

For information about the prerequisites and features, see [Predefined Inbox Search Tables](#).

Search Attributes

Use

You can use various search attributes and search attribute combinations to locate the required agent inbox (inbox) items.

Prerequisites

For information about the necessary settings for the inbox search, see [Inbox Search](#).

Features

Available Search Attributes

Area	Search Attribute	Function
Predefined searches	Quick Search	Predefined search criteria (for example, My Open Items) You can configure these searches on the SAP Easy Access screen under ► Interaction Center ► Interaction Center WebClient ► Administration ► Agent Inbox ► Define Quick Searches . You must assign the relevant quick searches to the corresponding inbox profile, and you can define a default quick search. You do this in Customizing for Service under ► Interaction Center WebClient ► Agent Inbox ► Define Inbox Profiles .
	Saved Searches	The saved searches function is available in the advanced inbox search.
Inbox item	Main Category	Inbox item type as defined in the following Customizing activities in Customizing for Service under ► Interaction Center WebClient ► Agent Inbox : ► Inbox Search Definitions ► Define Item Types for Searches . Define Inbox Profiles
	Object ID	ID of the inbox item
	Description	Description of the inbox item
Partner information	Created By	User who created the inbox item
	Account	Account for which the inbox item has been created
	Assigned To	Assigned agent or agent group To use the Assigned To search attribute to search for business transactions and cases, the relevant user or group must be maintained as a business partner in the system. The business transaction and case search is based on the business partner in combination with the inbox partner mapping (inbox Customizing activity Map Business Transactions to Responsible Employees and Groups). The search for work items (inbound e-mails, fax messages, and letters), outbound correspondence (outbound e-mails, fax messages, and letters), social media posts, and workflow work items is based on the assigned users. Assigned To: Me The search returns the inbox items that are assigned to the current user. The search returns the following results: - Business transactions and cases to which the current user is assigned as the employee responsible - Work items for which the current user is the employee responsible (assigned agent)

Area	Search Attribute	Function
		• Work items that are available for processing by the user and have not yet been picked by another user • Outbound correspondence that was last changed by the user • Social media posts for which the current user is the employee responsible (assigned agent) Assigned To: My Groups The search returns the inbox items that are assigned to the selected groups. The search returns the following results: • Business transactions and cases to which the selected groups are assigned as the groups responsible • Work items to which the users of the selected groups are assigned as the processor • Work items that are available for processing by the users of the selected groups • Outbound correspondence that was last changed by users of the selected groups • Social media posts to which the users of the selected groups are assigned as the processor Assigned To: <no entry> For work items, the Assigned To: My Groups search is performed. Note that the search for workflow work items always returns the workflow work items assigned to the current user. Therefore, the Assigned To search attribute is not relevant for workflow work items.
	Employee Responsible	Assigned employee responsible The specifics for the Assigned To: Me search attribute also apply to the Employee Responsible search attribute. The Employee Responsible search attribute cannot be combined with the search attribute Assigned To.
Time	Creation Period Change Period Due Period	Predefined periods of time for searching inbox items (for example, Last 3 days) In the standard search, you can use the respective From/To fields to enter a user-defined date or date range. You can define the time periods in Customizing for Service under Interaction Center WebClient > Agent Inbox > Inbox Search Definitions > Define Time Periods for Searches. You can define which time periods are available for the respective search attributes in the inbox search. You do this in Customizing for Service under Interaction Center WebClient > Agent Inbox > Define Inbox Profiles.
	Created On Changed On Due On	Date or date range These search attributes are only available in the advanced search.
Importance	Status	Inbox status, such as Open, In Process, Completed

Area	Search Attribute	Function
		You can define the inbox statuses in Customizing for Service under Interaction Center WebClient Agent Inbox Inbox Search Definitions Define Inbox Status ✎ You must map the system statuses and user statuses of the inbox item types to the inbox statuses. You do this in Customizing for Service under Interaction Center WebClient Agent Inbox Map Item Attributes to Inbox Attributes Map Item Status to Inbox Status ✎.
	Priority	Inbox priority, such as High, Medium, Low You must map the inbox item type priorities to the inbox priorities. You do this in Customizing for Service under Interaction Center WebClient Agent Inbox Map Item Attributes to Inbox Attributes Map Item Priorities to Inbox Priorities ✎.
Multilevel categorization	Category ID	ID of category used in multilevel categorization For more information, see Multilevel Categorization.
Checklist	Checklist ID	Not applicable
E-mail addresses	Sender Address Recipient Address	E-mail addresses that can be used to search for the following inbox items: - Work items (inbound e-mails, fax messages, and letters) If you are not using the predefined inbox search table for work items, entries in the Sender Address field are restricted to 20 characters (use an asterisk in case of longer e-mail addresses). - Outbound correspondence (Outbound e-mails, fax messages, and letters)
Sorting	Sort By	Sort attributes by which the search result is sorted A maximum of two sort attributes can be used for each search.
Generic functions	Clear	Clears the search attribute values
	Reset	Sets the inbox search criteria and the inbox result list back to the initial state: - The Quick Search field is cleared. - The search criteria is set back to the predefined combination of search fields (relevant to the advanced search only), and the field values are cleared. - The Maximum Number of Results field is set back to the default. - The result list is cleared, and the sorting and the filtering are set back to the initial state. Note that personalization settings for the result list and the selected display type (table or tree) are not set back.
	Maximum Number of Results	Maximum number of search results You can define the maximum number of search results to improve the search performance, for example. You can define the default values and range of user entries for the Maximum Number of Results field. You do this in Customizing for Service under Interaction Center WebClient Agent Inbox Define Inbox Profiles ✎.

Search Attributes not Enabled for Multiple Use:

- [Category ID](#)
- [Assigned To: Me](#) and [Assigned To: My Groups](#) cannot be combined with other [Assigned To](#) search criteria. You cannot for example perform a search using [Assigned To: Me](#) in combination with [Assigned To: My Groups](#).
- [Sort By](#)

Predefined Inbox Search Tables

Use

The standard system contains predefined inbox search tables, which contain the inbox search attributes and inbox result attributes relevant for a specific inbox item type. You can improve the search performance by using predefined inbox search tables. For each of the following inbox item types, a separate table is available:

- [Inbox Item: Workitem - Inbound Email, Fax and Letter](#)

Inbox search table for work items (CRMD_AUI_WI_IDX)

- [Inbox Item: Outbound Correspondence](#)

Inbox search table for outbound correspondence (CRMD_AUI_OUTCORR)

i Note

For outbound correspondence, the predefined inbox search table is mandatory for both of the abovementioned inbox item types.

- [Inbox Item: Inbox One Order item](#)

For this inbox items type a predefined search table is not required because the search is optimized already. However, in case of Customizing changes, this inbox item type must be updated. For more information, see the *Features* section.

Prerequisites

General

- You have defined the business transactions and work items that you want to use in the inbox in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Agent Inbox](#) > [Inbox Search Definitions](#) > [Define Item Types for Searches](#).
- You have assigned partner functions for use in the inbox in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Agent Inbox](#) > [Map Item Attributes to Inbox Attributes](#) > [Map Business Transactions to Responsible Employees and Groups](#).
- You have defined the inbox status mapping in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Agent Inbox](#) > [Map Item Attributes to Inbox Attributes](#) > [Map Item Status to Inbox Status](#).

Inbox Search Table for Work Items

- You have made the settings in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Agent Inbox](#) > [Settings for Asynchronous Inbound Processing](#) > [Assign Standard Tasks to Communication Methods](#).
- You have made the settings in Customizing for [Service](#) under [Interaction Center WebClient](#) > [Agent Inbox](#) > [Define Inbox Profiles](#) > [Work Item Table](#).

Inbox Search Table for Outbound Correspondence

- If you want to adjust the data record of an outbound correspondence item before it is stored in the inbox search table for outbound correspondence, you make the settings in Customizing for [Service](#) under [Interaction Center WebClient](#) [Agent Inbox](#) [Business Add-Ins](#) [BAdI: Outbound Correspondence Database Update](#).

Features

Data Load

To use the predefined inbox search tables, you first need to upload the data for the relevant main categories. You do this in the SAP GUI, on the [SAP Easy Access](#) screen under [Interaction Center](#) [Interaction Center WebClient](#) [Administration](#) [Agent Inbox](#) [Process Data for Inbox-Specific Searches](#) (transaction CRM_IC_INDEX_LOAD).

Only the main categories that are mapped to the corresponding inbox item types in Customizing activity [Define Item Types for Searches](#) are available in the program [Process Data for Inbox-Specific Searches](#).

i Note

If you change any of the Customizing settings detailed in the [Prerequisites](#) section, you must update the corresponding inbox search table accordingly.

In this case, you must also update the entries for the inbox item type [Inbox One Order Item](#) to fill various header fields in the corresponding business transaction header table, for example CRMS4D_SERV_H for service orders.

Process Data for Inbox-Specific Searches: "Inbox Item Type"

- Choose the inbox item type ONEORDER [Inbox One Order Item](#) to update the following header fields in the corresponding business transaction header table, for example CRMS4D_SERV_H (only in the case of Customizing changes):
 - INBOX_STATUS
 - INBOX_ASSIGNED_TO
 - INBOX_GROUP_ASSIGNED
 - INBOX_ACCOUNT
 - INBOX_CONTACT_PERSON
- Choose the inbox item type WORKITEM [Inbox Workitem](#) to process the data for the inbox search table for work items. The upload is required initially and if the Customizing settings under *Prerequisites* are changed.
- Choose the inbox item type OUTCORRESP [Outbound Correspondence Item](#) to process the data for the inbox search table for outbound correspondence. The upload is required initially and if the Customizing settings under *Prerequisites* are changed.

Process Data for Inbox-Specific Searches: Displayed Figures

- [Source Entries](#) (Not available for outbound correspondence)

The number of entries in the tables, which the system uses to update the corresponding predefined inbox search table

- [Target Entries](#)

The number of entries in the predefined inbox search table that is being updated

Process Data for Inbox-Specific Searches: Processing Options

- **Update**

Loads the data for the selected main categories from the source tables to the corresponding inbox search table

Note that for the selected main categories, all previous entries in the corresponding inbox search table are removed and new entries are provided.

- **Remove**

Removes the selected main categories from the corresponding inbox search table

- **Calculate**

Updates the displayed figures

- **Reset Status**

Resets the status to **Not Started**

You can use the **Reset Status** function if you have canceled a job and the status of the corresponding main category is still **In Process**.

The functions above are also available if multiple main categories are selected, unless one of the main categories cannot be processed due to the status.

Process Data for Inbox-Specific Searches: Availability of the “Update” and “Remove” Functions

The following table provides an overview of the availability of the **Update** and **Remove** functions and the corresponding status:

Context	Status of Corresponding Main Category	Update	Remove
One of the selected main categories is no longer supported according to the settings in Customizing for Service under Interaction Center WebClient Agent Inbox Inbox Search Definitions Define Item Types for Searches	Not Supported	Not enabled	Enabled
One of the selected main categories is already included in another data load.	In Process	Not enabled	Not enabled
You have canceled a job and reset the status to Not Started using the Reset Status function.	Not Started	Enabled	Enabled
The initial data load for one of the selected main categories has not yet been performed.	Not Started	Enabled	Enabled
One of the selected main categories has already been removed from the inbox search table.	Not Started	Enabled	Enabled

Context	Status of Corresponding Main Category	Update	Remove
The data for one of the selected main categories has been uploaded to the inbox search table.	Completed	Enabled	Enabled

Delta Update

The automatic delta update is limited to the main categories that you have uploaded, or are in the process of uploading, to the relevant search tables:

- Inbox search table for work items

When a work item is saved

- Outbound correspondence

- Outbound e-mails

When an e-mail is saved, sent, or deleted

- Outbound faxes and outbound letters

When a fax or letter is saved or deleted and the session is ended

- For outbound correspondence, you are not required to upload the data for the relevant main categories to enable the delta update.
- The system status is used to calculate whether a business transaction is overdue.

Specifics for the Inbox Search Table for Outbound Correspondence

The system fills the following fields from the interaction record using your settings in Customizing for [Service](#) under [Interaction Center WebClient](#) [Business Transaction](#) [Assign Partner Functions to Business Transactions](#):

- ACCOUNT
- CONTACT

If more than one interaction record is assigned to an outbound correspondence item, the interaction record that the fields are supplied from (during data load) is undefined.

During data load, the system loads the outbound correspondence items linked to an interaction record during an interaction center session or during ERMS processing. For more information, see [Interaction Record](#).

Caution

If you delete outbound correspondence items from the inbox search table, you can use the [Process Data for Inbox-Specific Searches](#) transaction to restore items that are linked to an interaction record. However, you cannot use this transaction to restore items that are not linked to an interaction record. For example, you cannot restore outbound e-mails sent by ERMS when they were not created with an interaction record.

Inbox Result List

Use

The agent inbox (inbox) result list displays the inbox search results in table or tree format and provides the functions required to process the inbox items.

Prerequisites

- You have set up and configured the inbox. For more information, see [Agent Inbox in the Interaction Center WebClient](#).
- If applicable, you have configured the result toolbar in Customizing for **Service** under **Interaction Center WebClient** > **Agent Inbox** > **Define Inbox Toolbar Profiles**.

Features

Result List in Tree Format or Table Format

You can display the result list in tree format or table format:

- The tree format provides context information, such as related business transactions.
- The table format provides better performance, sorting and filtering functions, and the use of table charts.

You can define whether the result list is displayed in tree format or in table format as a default. You do this in Customizing for **Service** under **Interaction Center WebClient** > **Agent Inbox** > **Define Inbox Profiles**.

The user can switch between the tree format and table format in the inbox, as required.

Maximum Number of Hits

You can define the maximum number of search results.

For more information, see Customizing for **Service** under **Interaction Center WebClient** > **Agent Inbox** > **Define Inbox Profiles**.

Advanced Warning for Due Date

You can define an advanced warning for each inbox item type, with reference to the due date.

For more information, see Customizing for **Service** under **Interaction Center WebClient** > **Agent Inbox** > **Inbox Search Definitions** > **Define Item Types for Searches**.

Configurable Result Toolbar

You can configure the result toolbar according to your business needs for interaction center (IC) business roles (business role profile type **IC WebClient Business Role**) and for other core business roles in Service:

- Result toolbar buttons

You can define the following for each button:

- Description
- Label
- Tooltip
- Icon

- Availability of button for use in IC business roles, in other business roles for core or both (providing the button function is available in the corresponding business role)

You can also add user-defined buttons.

- Result toolbar profiles

You can define toolbar profiles for IC business roles and for other core business roles. You can define the following for each profile:

- Which buttons are available
- Button order
- Button grouping

You can group buttons using separators.

- Whether the label, icon, or both are displayed for the button

If you do not define toolbar profiles for your business roles, the system uses default profiles.

Available Toolbar Buttons and Corresponding Functions:

Button Description	Button Function
Complete	The statuses of the selected inbox items are set to Completed. The Complete button is only supported for the following inbox items: • Work items (inbound e-mails, fax messages, and letters) • Workflow work items Whether a workflow work item can be completed depends on the corresponding workflow task. • Outbound text messages
Delete	The selected inbox items are deleted. The Delete button is only supported for the following inbox items: • Work items (inbound e-mails, fax messages, and letters)
Display	The system navigates to the details page for the inbox item in the display mode: • No interaction record is created. This also applies if the user switches from the display to the edit mode from the object. (For workflow work items and work items (e-mails, fax messages, letters), switching from the display mode to the edit mode is not supported.) • The account is not confirmed and not published in the context area. When switching to the edit mode from the object, the system defines the user who is currently logged on as the employee responsible (according to the partner mapping in the inbox Customizing activity Map Business Transactions to Responsible Employees and Groups) and confirms the business partner. The Display button is not supported for work items (inbound e-mails, fax messages, and letters) for business roles with the profile type WebClient Business Role.
Edit	The following steps are performed:

Button Description	Button Function
	• The system navigates to the details page for the selected inbox item in the edit mode. • The user that is currently logged on is defined as the employee responsible (according to the partner mapping in the inbox Customizing activity Map Business Transactions to Responsible Employees and Groups). • No interaction record is created. • The business partner is confirmed and published in the context area. If other business transactions are opened during the editing process, always the business partner of the business transaction that was most recently opened is confirmed and published in the context area. • The business transaction is linked to the activity clipboard. • All subsequently opened business transactions are also linked to the activity clipboard, unless the user chooses the End button. Choosing the End button clears the activity clipboard. • If the user chooses Interact, all business transactions that were linked to the activity clipboard during the editing process are linked to the interaction record. • Editing during an interaction If the user edits other business transactions during an interaction, the business partners for the other business transactions are not confirmed or published in the context area. The Edit button is only supported for business transactions.
Forward	Defines the forwarding target (employee or group) as the employee responsible or group responsible, respectively When the user chooses the Forward button, a dropdown menu is displayed that contains the recipients that you have defined in the recipient profile for forwarding that is assigned to the inbox profile. If the recipient profile contains more than 10 entries, the 10th item of the button dropdown menu is a More entry that launches an input help. The input help contains all remaining recipients that you have defined in the recipient profile for forwarding. The forwarding function is not supported for outbound correspondence (outbound e-mails, fax messages, letters, and text messages)
Forward (Extended)	Defines the forwarding target (employee or group) as the employee responsible or group responsible, respectively When the user chooses the Forward button, a dropdown menu is displayed that contains the following entries (maximum of 10 entries): • The recipients that you have defined in the recipient profile for forwarding that is assigned to the inbox profile • The More entry that launches an input help The input help contains the remaining recipients that you have defined in the recipient profile for forwarding. • The Other Employees entry that launches the employee search • The Other Service Teams entry that launches the business partner search The extended forwarding function is not supported for outbound correspondence (outbound e-mails, fax messages, letters, and text messages)
Interact	The following steps are performed by the system:

Button Description	Button Function
	• The system navigates to the details page of the inbox item. • The account and contact are confirmed and published in the context area. • An interaction record is created. • The user that is currently logged on is defined as the employee responsible (according to the partner mapping in the inbox Customizing activity Map Business Transactions to Responsible Employees and Groups). • In the case of work items (e-mails, fax messages, letters) and workflow work items, the system navigates to the account identification where a preview of the work item or workflow work item is displayed. The Interact button is not supported for the following inbox items: • Outbound correspondence (outbound e-mails, fax messages, letters, and text messages) • Workflow work items The Interact button is not supported for business roles with the profile type WebClient Business Role.
Link	If the user selects a second inbox item during an interaction and chooses the Link button, the second inbox item is linked to the current interaction record. The Link button is not supported for the following inbox items: • Outbound correspondence (outbound e-mails, fax messages, letters, and text messages) • Workflow work items The Link button is not supported for business roles with the profile type WebClient Business Role.
Next Item	The system navigates to the next inbox item that is available for processing and locks the item for other users. Once the user has chosen the Next Item button, the button is deactivated until the user chooses the End button. If the Next Item button is used for outbound correspondence (outbound e-mails, fax messages, and letters), the system navigates to the next outbound correspondence item that is in process and to which the current user is assigned as the employee responsible. In this case, the outbound correspondence item is not locked for other users. The Next Item button is not supported for business roles with the profile type WebClient Business Role.
Preview (Toggle)	Displays a preview of the currently selected e-mail, fax message, and letter The preview is displayed below the table chart area. The preview does not provide follow-up buttons, such as Reply and Forward.
Reference	Sets a reference to the currently selected inbox item If the user chooses the Reference button, a dropdown menu is displayed that contains the relevant entries from the activity clipboard. If the user chooses an object from the dropdown menu, the currently selected inbox item is referenced from the object (the inbox item is added to the object's business context). Note that the Reference button only works if the BUSINESS_CONTEXT function profile is assigned to the business role. In Customizing for the business context, the following is defined: • The inbox item types to which a reference can be added Only these inbox item types are available in the dropdown menu of the Reference button.

Button Description	Button Function
	Which inbox item types can be added as a reference For more information, see Customizing for Service under Transactions > Settings for Service Requests > Define Settings for Business Context . The Reference function is not supported for outbound correspondence (outbound e-mails, fax messages, letters, and text messages) and for business roles with the profile type WebClient Business Role.
Reference (Extended)	Unlike the dropdown menu for the Reference function, the dropdown menu for the Reference (Extended) function contains entries from the Recent Items. The last entry in the dropdown menu is the Other Transactions entry that launches a transaction search. Apart from this, the Reference and Reference (Extended) functions are identical. The Reference (Extended) function is not supported for outbound correspondence (outbound e-mails, fax messages, letters, and text messages) and for business roles with the profile type IC WebClient Business Role.
Refresh	The system performs the most recent search again, based on the selected search criteria or based on a quick search. The Refresh button enables the user to conduct the most recent search again without expanding the Search Criteria view and choosing the Search button, or selecting the quick search again.
Reserve	The user that is currently logged on is defined as the employee responsible (according to the partner mapping in the inbox Customizing activity Map Business Transactions to Responsible Employees and Groups). The Reserve button is not supported for outbound correspondence (outbound e-mails, fax messages, letters, and text messages)
Reset Reservation	Resets the reservation of the inbox item and removes the employee responsible Only the employee responsible assigned to the inbox item can reset the reservation of the inbox item. The Reset Reservation function is not supported for the following inbox items: - SAP ERP business transactions - Outbound correspondence (outbound e-mails, fax messages, letters, and text messages)
Reset Reservation (Extended)	Resets the reservation of inbox items on behalf of other users The Reset Reservation (Extended) function is not supported for outbound correspondence (outbound e-mails, fax messages, letters, and text messages).
Separator	The separator is used to group toolbar buttons in the result toolbar profile.
Search Processing Log	Provides access to the search processing log. For more information, see Inbox Search (Search Traceability section).
Show Table View (Toggle)	Displays the result list in table format
Show Tree View (Toggle)	Displays the result list in tree format

Multiple Selection of Inbox Items

The following functions are available when multiple inbox items are selected (unless the function is generally not available for one of the selected inbox items):

- [Delete](#)
- [Reserve](#)
- [Reset Reservation](#)
- [Complete](#)
- [Link](#)
- [Forward](#)
- [Reference](#)

The following functions are not available when multiple inbox items are selected:

- [Edit](#)
- [Display](#)
- [Interact](#)
- [Preview On](#)

Business Transaction Routing

Use

You can use this function to forward business transactions and cases in the interaction center (IC) manually or automatically.

Prerequisites

You have made the necessary settings for automatic routing in the BSP application rule editor.

For more information, see Customizing for [Service](#) under [Interaction Center WebClient](#) > [Business Transaction](#) > [Define Automatic Routing](#).

Features

You can forward business transactions and cases to agent groups as well as to individual agents. Both manual and automatic routing are available:

- Manual routing

You can manually enter a responsible employee or a responsible group as the business partner.

The transaction or case can be selected in the agent inbox of the assigned responsible employee as an open item for processing.

- Assigning a responsible employee

You can either enter an employee directly or using a search.

If you start a search and a responsible group is assigned, the system searches for agents in the responsible group. If there is no responsible group assigned, the system takes all agents into account during the search.

- Assignment of a responsible group

You can enter the responsible group directly or using a search. If you start a search and a responsible employee is assigned, the system searches for all organizational units to which this employee is assigned in the organizational model. If no responsible employee is assigned, the system searches for all organizational units that are assigned to the business role. The organizational units are displayed in the search results according to the structural authorization of the agent.

- Automatic routing

You trigger automatic routing by choosing [Escalate](#).

You can include up to five of the following attributes in the routing:

- Priority
- Status
- Confirmed product
- Confirmed customer
- Categorization
- Transaction type
- Business role

You can also push business transactions and cases to external routers or communication management software (CMS) for distribution to IC agents based on their real-time availability. For more information, see [Business Process Push](#).

E-Mail Response Management System

Use

E-Mail Response Management System (ERMS) is a tool for managing large amounts of incoming e-mail. Instead of routing all incoming e-mails into one queue, ERMS provides services for automatically processing and organizing incoming e-mail. There are several automated activities that reduce the need for manual intervention by interaction center agents, thus substantially increasing efficiency and processing accuracy, by helping agents to process e-mail in less time and allowing them to provide the same quality response regardless of agent skill level. ERMS provides tools for agents to efficiently and consistently respond to messages, and for managers to administer, monitor, and report on the whole e-mail process.

SAP delivers preconfigured ERMS settings and functions that you can extend using custom coding.

Integration

- Organizational Management

Defines how e-mails are routed and to what groups or organizations and how they are going to handle and process e-mails. You can route e-mails to an organizational unit or responsible group, a position, or even an individual user. The e-mails are routed to the agents' inboxes where they are processed.

- SAP Business Workflow

Enables automated processing and routing of e-mails. For more information, see [Workflow for ERMS](#).

- SAPconnect

Receives inbound and sends outbound e-mails. Once e-mails are received, SAPconnect creates SAP office documents, which are then processed by SAP Business Workflow.

- Multilevel Categorization
- Machine Learning

You can connect ERMS with [SAP Service Ticket Intelligence](#) to automatically categorize incoming e-mails.

- E-Mail Response Management System Analytics

Allows you to generate reports and analyze your ERMS processing on historical data. You can analyze historical ERMS e-mail volume, handling time, response time and service level.

Features

Manager Features and Tools for Productivity

The WebClient UI is available for modeling rules and categories, and for monitoring and viewing analytics.

- [Rule Policies](#)
- Category Modeler
- [ERMS Simulator](#)
- [E-Mail Workbench](#)

Agent Features and Tools for Productivity

- [Agent Inbox in the Interaction Center WebClient](#)

Central location in which agents receive and respond to e-mails. E-mails are integrated with other communication channels.

- [E-Mail Threading](#)
- Automatic Business Object Creation

Interaction records, along with appropriate interaction reasons, and service tickets can be created and associated to incoming e-mails automatically. For more information, see the [Create Interaction Record](#) and [Create Service Ticket](#) actions detailed in the actions and parameters table in [ERMS Rule Policies](#).

Automated Features

- [ERMS Responses](#)
- E-Mail Filtering

Certain incoming e-mails that are not relevant for agent processing, such as out-of-office replies, spam, or bounced e-mails, can be filtered or deleted based upon the e-mail subject or content.

- [Rules](#)

These identify and determine the automated processing of e-mails.

- E-Mail Routing

Incoming e-mails can be routed to particular queues or agent groups that are most capable of responding to the issue in the e-mail. For example, you can route e-mails that contain foreign languages to queues in which agents are fluent in that language.

- Content Analysis and Fact Gathering

The system analyzes attributes and content regarding each incoming e-mail and stores it in a fact base, enabling the use of the data for making decisions in respect to categorizing, routing, and automatic responses.

- [E-Mail Escalation](#)

E-mails can be escalated if they are not processed within a specific period of time. For more information, see [Defining E-Mail Escalation](#).

- Web Forms

In addition to accepting incoming e-mails, it is also possible to accept information created from a web form on a website.

- Support of Multiple Incoming and Outgoing E-Mail Addresses

You can define multiple incoming e-mail addresses. You can also define multiple outgoing addresses that agents can change when they are responding to e-mails.

More Information

[Setting Up ERMS](#)

ERMS Rule Policies

Use

You can create rule policies in the e-mail response management system (ERMS) context to handle and evaluate incoming e-mails.

Rules are evaluated every time an incoming e-mail is received if the policy in which they belong is invoked during rule processing.

To create ERMS rules and policies, you use objects configured in the ERMS repository.

Prerequisites

- You have defined attributes, actions, and action parameters in Customizing for **Service** under **E-Mail Response Management System** > **Define Repository**.
- You have created authorization groups in Customizing for **Service** under **E-Mail Response Management System** > **Define Repository**.
- You have assigned the authorizations groups to authorization object CRM_ERMS_P in **Role Maintenance** (transaction PFCG).
- You have assigned the authorization groups to policies in the WebClient UI in Service. You can see (and in some cases select) authorization groups in the WebClient UI under **Rule Policy Details**, after you select a policy (the top node of the policy structure). The possible values are the entries you maintained in the Customizing activity above.

Activities

- Select attributes

Most attributes are self explanatory. Only those needing further explanations are listed below.

Attribute	Use
ERMS: Content Analysis Accuracy	A value between 0 and 1 describing the accuracy of the content analysis result. Accuracy = 1 indicates the result is highly focused. All matching categories form a single path in the category hierarchy. Accuracy = 0 indicates the result is contradictory. At least two matching categories point to different paths in the category hierarchy.
ERMS: Best Minus Next Best Score	Distance in score between the category with highest score and the category with second highest score. Each matching category has a score which is a value between 0 and 1 describing how good the content-queries of the category match the given textual content.
ERMS: Number of Top Categories	Number of matching categories that all have the highest score.
ERMS: Best Category Score	Highest score among all matching categories.
ERMS: Top Scoring Category	Matching category with the highest score.
Escalation Date	Date when the escalation of an e-mail occurs. The date is calculated based upon either rule evaluation, Customizing, or service level agreements (SLA) at the time the e-mail arrives.
Escalation Time	Time when the escalation of an e-mail occurs. The time is calculated based upon either rule evaluation, Customizing, or SLA at the time the e-mail arrives.
Escalation Type	Depends on the property METHOD of the service UT_ESCALDETERM. If the METHOD is set to 1, the Escalation Type is SLA. If the METHOD is set to 2, the Escalation Type is determined as the shortest time out of one of the following: rule evaluation, Customizing, or SLA.
Response Time Duration (Hours)	Used for escalations. Represents the initial response time in hours.

- Set actions and parameters

This covers the standard delivered actions and their corresponding parameters.

Action	Use	Parameters
Add Attribute Value	Adds a value to a multi-value attribute	Attribute The attribute that a value is added to. Value The value that is added.

Action	Use	Parameters
Auto Prepare	Same as Auto Respond, except the response is not sent automatically. The agent can review the content first, make any necessary changes, and then send the response. This action is triggered when an agent selects Reply to an incoming e-mail.	Mail Form Name of the mail form that determines the content of the outgoing e-mail. Outgoing E-Mail Address Address used for the outgoing e-mail's sender address. If you do not use this parameter, the incoming e-mail address that the e-mail was originally sent to, will be used. Category Schema Schema to determine which Top Scoring Category is used. Inline Determines whether standard responses and solutions tied to the category are inserted directly into the e-mail content instead of as an attachment. If both are inserted into the e-mail content, then the standard responses are shown first in the order they are attached to the category. The solutions are then added, also in the order they are attached to the category.
Auto Respond	Sends an automated response with proposed answers and/or solutions, to an incoming e-mail, without agent intervention. The solutions are inserted into the e-mail as attachments and are determined from the Top Scoring Category of the incoming e-mail. Not to be confused with the Send Auto Acknowledgement action.	Category Schema Mail Form Outgoing E-Mail Address See descriptions above from Auto Prepare. Create Interaction Record Creates an interaction record, after the response is sent, which includes both the incoming and the outgoing e-mails. Route To (On Exception) Organizational unit that the incoming e-mail is sent to if no solutions are attached to the Top Scoring Category. Inline See description above from Auto Prepare.
Create Interaction Record	Creates an interaction record in the background, only if there is a business partner associated to the incoming e-mail address. The incoming e-mail is linked to interaction record, so the original e-mail can be viewed at a later time, if necessary.	Description Description saved in the interaction record.

Action	Use	Parameters
Create Service Ticket	Creates a service ticket in the background, only if there is a business partner associated to the incoming e-mail address. The incoming e-mail is linked to service ticket, so the original e-mail can be viewed at a later time, if necessary.	Description Description saved in the service ticket. You can configure the transaction type (for example, TSRV or TSVO) for this service ticket. You do this in Indirectly Called Services and Properties in Customizing for Service by choosing E-Mail Response Management System Service Manager Define Service Manager Profiles.
Delete E-Mail	Deletes an incoming e-mail. Can be combined with the Create Interaction Record action, so the interaction record shows an e-mail was received and was also deleted.	(No parameters)
Forward E-Mail		Forward To Forward From
Invoke Policy	Temporarily suspends the processing of the current policy and continues with the processing of the specified policy. After the specified policy is finished processing, the action stops processing the original policy, unless the processing was stopped previously by the Stop Further Rule Processing action. This action can be nested, that is a policy that is invoked may invoke other policies. If a policy has multiple variants, then the active variant is invoked.	Policy Name of the rule policy that is invoked
Push E-Mail	Allows e-mail routing through the communication management software instead of directly going to an inbox. E-mails that are pushed to agents using this action are also routed to the Agent Inbox by the ERMS default routing, unless another routing destination is specifically maintained. Therefore, we recommend directly specifying a Route E-Mail action after the Push E-Mail action, allowing all pushed e-mails to be monitored by a supervisor or special organizational unit, and avoiding incorrect routing of push e-mails to the default routing that are already completed.	Organizational Object
Route E-Mail	Directs the incoming e-mail to an agent or group of agents. The e-mail is then accessible from the agent inbox.	Organizational Object You can enter an agent's system user name or an organizational unit. If you enter an organizational

Action	Use	Parameters
		unit, then the e-mail can be processed by any agent who belongs to that organizational unit.
Route to Case Processor	Directs the incoming e-mail to the agent who is assigned as the case Processor in the Case Overview , only if the incoming e-mail is related to an existing case and the case number is still in the e-mail text.	Route To (On Exception) Organizational unit that the e-mail is routed to if there is no case associated to the incoming e-mail or if there is no processor assigned to the case.
Route to Service Ticket Responsible	Directs the incoming e-mail to the agent who is assigned as the Employee Responsible in the Service Header , only if the incoming e-mail is related to an service ticket and the service ticket number is still in the e-mail text.	Route To (On Exception) Organizational unit that the e-mail is routed to if there is no service ticket number associated to the incoming e-mail or if there is no employee responsible assigned to the service ticket.
Send Auto Acknowledgement	Sends an automatic notification that the e-mail was received.	Mail Form Outgoing E-Mail Address See descriptions from Auto Prepare . Create Interaction Record Creates an interaction record to record that an acknowledgement was sent after receiving the e-mail. (The outgoing e-mail acknowledgement text is not tied to the interaction record.)
Set Attribute Value	Allows you to set an attribute value in the fact base if certain conditions are met. This attribute can then be used in rule evaluation or passed on to actions.	Attribute Value
Show Number of Incomplete E-Mails	Searches for incomplete e-mails linked to an identified account.	(No parameters)
Stop Further Rule Processing		(No parameters)

- Set rule policy authorizations

You can define your own groupings for authorization, for example, by department or by organization.

Authorization Field	Description	Values
ACTVT	Activity	The following values affect authorizations for policies: 01: Create or Generate 02: Change 03: Display 06: Delete 43: Release (For releasing draft rules)

Authorization Field	Description	Values
ERMS_AUGR	Authorization Group	The values you defined for the authorization groups in Customizing activity Define Repository .
ERMS_CTXT	Context	The context in the WebClient UI in Service as defined in Customizing activity Define Repository .

More Information

[Rule Modeler](#)

[Rule Policies](#)

[Rules](#)

[Conditions](#)

[Actions and Parameters](#)

[Conflict Resolution](#)

[Rule Policy Authorizations](#)

ERMS Simulator

Use

The **ERMS Simulator** allows an interaction center (IC) manager to simulate the results of new or changed rules contained in rule policies that are used for e-mail handling. IC managers also see a detailed view of the resulting actions and categorizations for those e-mails. An IC manager can run the simulation in the background and have the result sent to an e-mail address.

The functions in the **ERMS Simulator** are available in the WebClient UI.

Prerequisites

- You have created [rule policies](#).
- You have set up ERMS and already processed incoming e-mails, using ERMS.

More Information

[Setting Up ERMS](#)

E-Mail Workbench

Use

The **E-Mail Workbench** is an overview of e-mail processing in an interaction center, which you can also use as a means to mass process e-mails.

You can access the **E-Mail Workbench** in the WebClient UI by choosing **IC Manager > E-Mail Workbench**.

You can perform manual operations for e-mails, such as searching, routing, forwarding, re-categorizing, and deleting e-mails. You can also view the specific rules that were invoked for a particular e-mail and process [escalated e-mails](#).

You can view and in some cases edit the following elements of an e-mail:

- E-mail text
- Attachments
- [Rules](#) for processing the e-mail
- Associated categories, that you can add or remove. Automated processing can assign categories to e-mails as determined from Multilevel Categorization. You can change these categories if the assignment is not accurate or complete.
- The Fact Base
- Related e-mails

Prerequisites

- You have [set up](#) and actively used ERMS to process incoming e-mails.
- You have set **UT_ERMS_REPLICAT** as your ERMS service manager profile for **Directly Called Services**. You do this in Customizing for **Service** by choosing **E-Mail Response Management System > Service Manager > Define Service Manager Profiles**.

ERMS Responses

Use

There are several types of E-Mail Response Management System (ERMS) responses you can use to automate e-mail processing. This automated processing saves agents time in compiling and searching for information and ensures consistent handling and messaging to customers. You can use mail forms to configure the e-mail content for the responses.

Prerequisites

- You have defined mail forms in the WebClient user interface. You can access this function under **Knowledge Management > Mail Forms**.
- You have defined multilevel categorization. (Not relevant for Auto Acknowledgements)
- You have defined a rule policy with the **Send Auto Acknowledgement**, **Auto Respond**, and/or **Auto Prepare** actions.
- You have assigned mail forms to actions in the WebClient UI or to categories through multilevel categorization.

Features

The following is a list of responses you can determine for ERMS:

- Auto Acknowledgement

When an e-mail is received, the system can send an automatic acknowledgment informing the sender that the e-mail was received. If the business partner is identified, you can use business partner attributes, such as first and last name, to personalize the response.

- Auto Response

The system can send a solution or a response automatically, without intervention from agents, based upon the e-mail content.

- Auto Prepare

Response proposals are similar to auto responses. However, instead of automatically sending the response, the response is reviewed by agents for accuracy. Agents can send, modify, or delete the proposal.

More Information

[ERMS Rule Policies](#)

E-Mail Threading

Use

You can use e-mail threading for service requests and incidents to link e-mails to the associated business transaction, keeping all communication and related e-mails together for easy access to the information, regardless who handles the business transaction. E-mail threading also enables the e-mails to be routed to the person responsible for that business transaction if the customer sends the e-mail back to the interaction center.

Mail forms are used to create a tracking text.

Prerequisites

- You have created tracking text in WebClient UI under ► **Knowledge Management** ► **Mail Forms** ►. You can add the **Email Response Management** context attribute to the **Text Element**.

The **Service Request Tracking Text** mail form field is available as a variable for service requests and incident numbers.

If the variable is not available in the mail form, you have to manually add the CRMS_ERMS_SCENARIO_FIELDS structure to the **ERMS** context in Customizing. You do this in Customizing for **Service** by choosing ► **Basic Functions** ► **Communication Channels** ► ► **Maintain Attribute Contexts for Mail Forms** ►.

- You have enabled tracking text insertion by maintaining the **Tracking Text Form** field and selecting the **Track Text on Reply** indicator in Customizing for **Service**. You do this by choosing ► **Interaction Center WebClient** ► **Basic Functions** ► **Communication Channels** ► **Define E-Mail Profiles** ►.
- You have defined rules using the **Route to Service Request Responsible** action. For more information, see the actions and parameters table in [ERMS Rule Policies](#).

Features

- E-Mail Tracking Thread

The threading is enabled by the use of tracking text you define. You use a variable that is filled at runtime with the service request number to insert in the tracking text. This variable allows e-mails to be linked to business transactions.

- Tracking Text Insertion

The system inserts the tracking text in the e-mail content when an e-mail is created, either manually or automatically through automated processing, or when the e-mail is replied to. If a service request or incident is automatically created for an incoming e-mail from the auto acknowledgement action, you can link both the incoming e-mail and the outgoing reply to the service request or incident.

- **Thread Detection and Routing**

When customers reply to e-mails, the system determines whether tracking text is inserted. The incoming e-mail can be associated automatically to the related business transaction. Attributes from these transactions, such as the service request number, can be used during rule evaluation. When you create rule policies, you can create rules that route the e-mail to the agent who is currently assigned to the business transaction.

Example

❖ Example

You create a mail form with the following as the tracking text.

```
***** DO NOT DELETE *****
```

```
{SrvReqNo:[8000006814]}
```

```
***** DO NOT DELETE *****
```

You define a rule, "If Service Request Responsible Is Not Equal To "", Then Route to Service Request Responsible to forward the e-mail".

More Information

[E-Mail Threading Process](#)

E-Mail Threading Process

Use

This process describes e-mail threading using service tickets as the relevant business object.

Prerequisites

You have defined [e-mail threading](#).

Process

1. The customer sends an e-mail.
2. Either an agent sends a manual response or the system sends an automatic response.

Manual Response

- a. The agent processes the e-mail and creates a service ticket.
- b. The agent replies to the e-mail.

- c. The system uses the mail form you entered in the agent's e-mail profile. It inserts the mail form text and tracking text into the outgoing e-mail. The system populates the variable with the actual service ticket number that was just created.

Automatic Response

- a. The e-mail response management system processes the e-mail automatically and creates a service ticket, as defined through an [action](#).
 - b. The system sends a reply to the customer as defined in an action, such as **Send Auto Acknowledgement**.
 - c. The system uses the mail form that is defined as a parameter in the **Send Auto Acknowledgement** action. The mail form includes the service ticket tracking variable. When the system sends the reply, the variable is populated with the service ticket number that was just created.
3. The customer replies to the e-mail and sends it back to the interaction center.
 4. The fact gathering services scan the e-mail and pick up the tracking text and store this in the fact base during automated processing.
 5. The e-mail is associated to the service ticket.
 6. The e-mail is routed to the agent who is processing the service ticket through a [rule](#) that uses the **Route to Service Ticket Responsible** action.

E-Mail Escalation

Use

E-mails can be escalated if they are not processed within a specific period of time, for example, e-mails that are not processed within 24 hours after the initial receipt are escalated. You can define the time periods that determine the escalation and you can be notified and view escalated e-mails as soon as the escalation occurs. From reviewing escalated e-mails, you can reroute the e-mail or decide on another action to speed up processing.

Integration

The SAP Business Workflow is used for the escalation process. In [Workflow for ERMS](#), the escalation times you define are used as the **Latest End** date and time.

Prerequisites

You have [defined e-mail escalations](#).

Features

Escalation Definition

Escalated e-mails are determined when defined initial response times are not met. The initial response time is the time between an e-mail is received in the system until the time that an agent processes the e-mail.

Initial response time is calculated by one of the following:

- [Service Level Agreements](#) (SLA)

You can set a deadline for escalation by using a service contract. The system uses the service contract that is assigned to the business partner and reads the duration time from the response profile associated with the service contract.

- [Rules](#) and [actions](#)

In the WebClient user interface, you create a rule using the **Set Attribute Value** action with the value **Response Time Duration** to determine at what point an e-mail is considered escalated. You can also use some fact base attributes as additional criteria, for example, if a customer is a high priority and valued customer with a specific system status, and sends an e-mail with a request, but the e-mail is not processed within a specific number of hours as determined in the rule, the e-mail is escalated.

- E-Mail Addresses

You can determine an escalation time based upon the receiving e-mail address.

Escalation Determination

You can choose which method is used to determine the initial response time. You can either use the:

- Service Level Agreement
- Combination of SLA, rules and actions, and e-mail addresses

The system uses the definition with the shortest initial response time out of all three methods.

Escalation Process

See [E-Mail Escalation Process](#).

Escalation Notification

You are notified of a new escalated e-mail by receiving an e-mail. Mail forms are used to create the notification text.

Escalation Monitoring

After receiving the escalation notification, you use the overview in the [E-Mail Workbench](#) to monitor the number of escalated e-mails per organizational unit and navigate directly to the individual e-mail for further action.

E-Mail Escalation Process

Use

This process describes the e-mail escalation process.

Prerequisites

You have [defined e-mail escalations](#).

Process

1. An e-mail is received in the interaction center (IC).
2. Automated processing begins.
3. The initial response time (IRT) is determined by the escalation definition.

4. If the IRT limit is reached, the e-mail becomes escalated and the workflow escalation process starts.
5. The notification e-mail is sent to the IC manager.
6. The manager accesses the [E-Mail Workbench](#), views the situation and takes further actions with the escalated e-mail.

More Information

[E-Mail Escalation](#)

Defining E-Mail Escalation

Prerequisites

You have authorization to read mail forms.

Context

You use this procedure to define and setup [E-Mail Escalation](#).

Procedure

1. Define the method used for determining initial response times.
 - o Service Level Agreements
 - a. Run transaction CRMD_SERV_SLA.
 - b. Maintain a response profile and assign a response time. For **Name of Duration**, select **Duration Until First Reaction**. The response profile is associated to a service contract. For more information, see [Service Level Agreements \(SLA\)](#).
 - o Rules and Actions

Define a rule in the WebClient user interface and use the **Set Attribute Value** action with the **Response Time Duration** attribute.
 - o E-Mail Addresses

Define the escalation time period for each receiving e-mail address in Customizing for **Service** by choosing **Interaction Center WebClient > Agent Inbox > Settings for Asynchronous Inbound Processing > Define Receiving E-Mail/Fax Settings**.
2. Assign the method used for determining initial response times and assign the fact gathering service.
 - a. In Customizing for **Service** choose **E-Mail Response Management System > Service Manager > Define Service Manager Profiles**.
 - b. Select your service manager profile.
 - c. Under **Directly Called Services**, find the Service ID RE_RULE_EXEC and add the following services underneath to ensure that they are executed in the correct order with the attribute **Invocation Order**. If you do not use Rules and Actions to determine your initial response times, the order of the services could be invoked before RE_RULE_EXEC:
 - i. Under **Directly Called Services**, add the Service ID FG_ESCALTIME if it is missing. You can maintain the property values using the F1 field help.

- ii. Under **Directly Called Services**, add or select Service ID UT_ESCALDETERM and choose **Properties**.
- iii. In the **Property ID** field add or select **METHOD**, and in the **Property Value** field enter the value. Refer to the F1 field help for e-mail escalation values.

i Note

Do not include the service UT_SEND_ESCL as part of your **DEFAULT** service manager profile.

3. Customizing of the notification mail.

- a. In the WebClient UI, define the mail form used for notifying managers of the e-mail escalation. This is done in the interaction center (IC) manager role under **Knowledge Management > Mail Forms**. Insert escalation specific placeholders by clicking **Attributes** in the mail form and adding those specific escalation fields (for example, escalation date, time and type, sender's name and e-mail address and the e-mail subject).

If these escalation objects are not available, ensure that object CRMS_ERMS_ESC_FIELDS has been added and configured to the correct context in the mail form. In Customizing for **Service** choose **Basic Functions > Communication Channels > Maintain Attribute Contexts for Mail Forms**.

- b. Assign the mail form and the receiver's and sender's e-mail information to the service manager profile.

- i. In Customizing choose **Service > E-Mail Response Management System > Service Manager > Define Service Manager Profiles**.
 - ii. Select service manager profile ERMS_ESCALMSG and maintain the property values of the service UT_SEND_ESCL under **Directly Called Services**. Refer to the F1 field help for e-mail escalation values.
- c. In Customizing choose **Service > E-Mail Response Management System > Service Manager > Assign Service Manager Profiles**. Assign the service manager profile ERMS_ESCALMSG to the object **ObjectID** 15107965 without entering the **Address/Number**.
- d. In transaction SWU3 under **Maintain Runtime Environment**, maintain the **Schedule Background Job for Workflow Deadline Monitoring** and specify the interval until next deadline check.

Automated Processes and Architecture

Rule Processing Services

Use

Rule processing, or rule invocation, services is one of the four types of services found in the E-Mail Response Management (ERMS) service manager. There are standard delivered rule processing services available. For more information, see Customizing documentation for **Service > E-Mail Response Management System > Service Manager**.

Features

Rule processing services evaluate a set of predefined rules and determine a set of actions that need to be executed during rule processing.

Rules consist of conditions and actions that are triggered if the conditions evaluate to true. The rule processing services support rules and nested rules. Nested rules are only processed if the condition in the higher-level rule is true.

Rule processing starts with the first rule defined within a given policy and continues sequentially with all subsequent rules in exactly the order defined in the rule modeler. All actions that are triggered during rule evaluation are collected and passed back to the service manager. For each of these actions, the service manager determines the appropriate action handler and calls these handlers accordingly.

Special rule processing

The **Stop Further Rule Processing** action can immediately interrupt rule processing. If this action is triggered, only that actions that have executed to that point are passed to the service manager.

The **Invoke Policy** action is executed by the service manager after the current policy is completely processed. It is not executed immediately.

Content Analysis

Use

This function identifies the categories that best match specific content and makes automatic category suggestions.

Content analysis is used in the E-Mail Response Management System (ERMS) to analyze the content of inbound e-mails. It uses predefined search queries that are assigned to categorization schemas, to determine suitable categories.

Integration

Function	Description
Category Modeler	You define content queries for content analysis in the category modeler. If necessary, you can reset the content analysis in the page area Application Areas for each application area. You do this by choosing Reset Content Analysis.
E-Mail Response Management System (ERMS) - automated processing	ERMS manages a high volume of inbound e-mails. This system partially automates routing and responding to e-mails. The automated processing of e-mails in the ERMS uses content analysis to evaluate conditions assigned to categories. The following ERMS components relate to content analysis: • Fact gathering • Rule operators Matches Category and Rule Attributes
Interaction Center	Content analysis provides suggested categories based on the content of e-mails received in the interaction center and selected for processing in the agent inbox. These categories are then displayed in the relevant fields of the following IC-specific business transactions: • Service order • Service request • Interaction record

Prerequisites

You have made content analysis settings in Customizing for [Service](#) by choosing [Cross-Application Components](#) [Multilevel Categorization](#) [Define Application Areas for Categorization](#).

Features

- Automated categorization

Category suggestions are made automatically using content queries.

- Language detection

Content analysis also supports automatic language detection for textual content.

More Information

[E-Mail Response Management System](#)

Fact Base

Use

The fact base is an E-Mail Response Management System (ERMS) component that serves as a data container for any information that is related to an inbound e-mail and can be relevant during rule evaluation.

Integration

Fact gathering services gather data relevant to the inbound e-mail and add the data to the fact base.

The rule engine runtime retrieves data from the fact base and uses it for rule evaluation and processing.

Features

The fact base stores information that is relevant for exactly one instance of an inbound e-mail. Such information may include e-mail content, business partner information, and the incoming e-mail address to which the e-mail was originally sent.

The fact base is organized as an XML document. Its structure is flexible to include any tree structure and content, depending upon your business requirements.

Updates and read access to the fact base occurs through XSL transformations (XSLT) and XPath queries. These standardized methods are platform- and programming-language independent. This provides maximum flexibility if you need to extend the fact base, for example, for data residing in legacy systems.

Overview Report

This report provides a real-time snapshot of the activity and current status of the [E-Mail Response Management System \(ERMS\)](#). It gives you an overview of the volume of incoming e-mails, which you can display by organizational unit, e-mail address, or Web form ID.

To use this monitoring function, you must be actively using ERMS. To use this function, you must be running Service, and you must activate the necessary BSP service.

Performance Report

You can use this report to monitor the overall effectiveness of the [E-Mail Response Management System](#) (ERMS) in your interaction center. This report provides a real time overview of key performance indicators such as volume, average handling time, average response time, and service level. You can sort this information by organizational unit or by e-mail address.

To use this monitoring function, you must be actively using ERMS.

Workflow for ERMS

Use

This workflow is used for the E-Mail Response Management System (ERMS) in the Interaction Center.

ERMS allows automated processing of inbound e-mails received via SAPconnect. E-mails can be automatically responded to or routed to an agent group for manual processing. An inbound communication triggers the workflow template WS00200001, which controls the work item processing and fulfills several tasks.

The following system tasks are the most important:

- Determining the responsible agent group and routing the work item to that group
- Deleting and stopping further manual processing

For a complete list of tasks, see the workflow template WS00200001 in the workflow definition tools.

Prerequisites

ERMS configuration activities are completed.

Process

1. The incoming e-mail is received.
2. Task TS00207915 **ERMS Rule Execution** invokes the service manager.

The service manager provides capabilities (necessary to process e-mails) such as fact gathering, content analysis, and rule processing.

3. Depending on the outcome of the service manager invocation, the system continues processing the work item by one of the following steps:

- Delete

You can determine when the system deletes an item by using a rule, for example, in cases of junk e-mail (spam). Task TS66107918 **ERMS Delete E-Mail** removes the office document. The workflow is ended.

- Do not process further

You define when processing is stopped in either a rule or in one of the services in the service manager.

- o Route

Task TS00207914 **ERMS Decision** forwards the work item to an agent or agent group as selected by the processor determination.

The processor determination decides which agents are responsible for a work item. Task TS00207914 determines which agents or agent groups are eligible for processing e-mails. The actual determination of which agent or agent group receives the work item is defined in rules.

Technical Execution

The following technical information is useful if you wish to customize your own workflow:

- Workflow template

The actual procedure is implemented in the workflow template WS00200001 (**ERMS1**).

- Triggering events for the workflow template

The event **MailReceived** of Business Object Repository (BOR) object ERMSSUPRT2 is maintained as a triggering event in the template WS00200001.

- Processing methods

The following table explains how methods of BOR object ERMSSUPRT2 are used in the corresponding tasks of the workflow template WS00200001:

Method	Use
RECEIVE	Receives the mail from SAPconnect
RULEEXECUTION	Raises the event MailReceived and triggers workflow

Setting Up ERMS

Use

This procedure describes the basic settings needed for [E-Mail Response Management System](#).

Prerequisites

Your IT administrator has created e-mail addresses for receiving incoming e-mails.

Procedure

Mandatory and Recommended Steps

Step	Description
Create an organizational model.	In Customizing for Service under Master Data Organizational Management Organizational Model Create Organizational Model .
Maintain workflow standard settings.	In Customizing for Service under Basic Functions SAP Business Workflow Maintain Standard Settings for SAP Business Workflow .

Step	Description
Define receiving e-mail addresses.	In the SAP Menu, choose Interaction Center > E-Mail Response Management System > Settings > Define Receiving E-Mail Addresses/Fax Numbers .
Assign receiving e-mail addresses to ERMS workflow.	In the SAP Menu, choose Interaction Center > E-Mail Response Management System > Settings > Maintain Recipient Distribution .
Assign agents for e-mail handling.	In the SAP Menu, choose Interaction Center > E-Mail Response Management System > Settings > Assign Agent for E-Mail Handling . Choose Assign Agents . Under workflow ERMS 1 either: • Use a general task for ERMS decision to allow e-mail routing to all agents, depending on the rules, or • Specify individual agents or agent groups to allow e-mail routing only to those agents, depending on the rules.
Activate event linking. Incoming e-mails can use workflow to define how mails are routed and how they are handled. Activating event linking activates the workflow you defined and allows it to be used for ERMS.	In the SAP Menu, choose Interaction Center > E-Mail Response Management System > Settings > Assign Agent for E-Mail Handling . Choose Activate Event Linking . For New Recipient , choose possible entries and select SAP Object Instance . Use business object repository (BOR) Object Type ERMSSUPRT2 (ERMS Support 2) . When this BOR object type is invoked, it triggers workflow WS00200001 (ERMS1). For more information, see Workflow for ERMS .
Define outgoing e-mail addresses.	In the SAP Menu, choose Interaction Center > E-Mail Response Management System > Settings > Maintain Sender E-Mail Addresses .
Define service manager profiles.	In Customizing for Service under E-Mail Response Management System > Service Manager > Define Service Manager Profiles . Choose Default and double click Directly Called Services to set the DEF_ROUTING for Invocation Order 50 to an organizational unit.
Assign service manager profiles.	In Customizing for Service under E-Mail Response Management System > Service Manager > Assign Service Manager Profiles .
Create ERMS policies and rules	In the Interaction Center, choose Process Modeling > Rule Policies . Choose E-Mail Response Management System as the Context .
Assign standard tasks to communication methods	In Customizing for Service under Interaction Center WebClient > Agent Inbox > Settings for Asynchronous Inbound Processing > Assign Standard Tasks to Communication Methods . Choose INT as the communication method for Object ID 207914 .
Define e-mail templates and e-mail forms.	In the Interaction Center, choose Knowledge Management > Mail Forms .

Optional Steps/Extensions of Default Customizing

Step	Description
Define additional services. You can define services that are available in the service manager. This activity determines how all necessary services for evaluating policies are invoked. You should only	In Customizing for Service under E-Mail Response Management System > Service Manager > Define Services .

Step	Description
execute this activity if you want to change the default settings or create new services.	
Extend the ERMS repository.	In Customizing for Service under E-Mail Response Management System Define Repository .
Define additional e-mail profiles.	In Customizing for Service under Interaction Center WebClient Basic Functions Communication Channels Define E-Mail Profiles .
Define catalogs, codes, and subject profiles. Catalogs are resources which help ensure the uniform use of terms	In Customizing for Service under Basic Functions Catalogs, Codes and Profiles .
Define additional categorization profiles. This influences which categorization schema(s) are displayed in the corresponding business transactions, and the behavior of the auto suggest function.	In Customizing for Service under Interaction Center WebClient Business Transaction Define Categorization Profiles .
Define reporting for e-mail statuses and events.	In Customizing for Service under E-Mail Response Management System Reporting .
Delete reporting data.	In the SAP Menu, choose Interaction Center E-Mail Response Management System Utilities Delete Reporting Data .

Integrated Communication Interface


Use

The Integrated Communication Interface (ICI) supports the integration of non-SAP communication products with SAP components that use communication services. The ICI is intended in particular for scenarios involving multiple communication channels such as telephony, e-mail, and chat, but it can also be used in single-channel scenarios. It enables activities such as an agent accepting an inbound phone call or deflecting an inbound chat request, or a supervisor monitoring a queue. The ICI is only one of several components required to implement communication scenarios of this kind.

i Note

An example scenario is the integration of communication management software systems with the interaction center (IC), specifically the IC WebClient and IC manager dashboard. For illustration purposes, this example is used throughout this documentation.


The graphic below represents a simplified view an example scenario without detailing the interfaces. The scenario is made up of functionality from three distinct sources – an application component, a technology component, and an external (non-SAP) component.

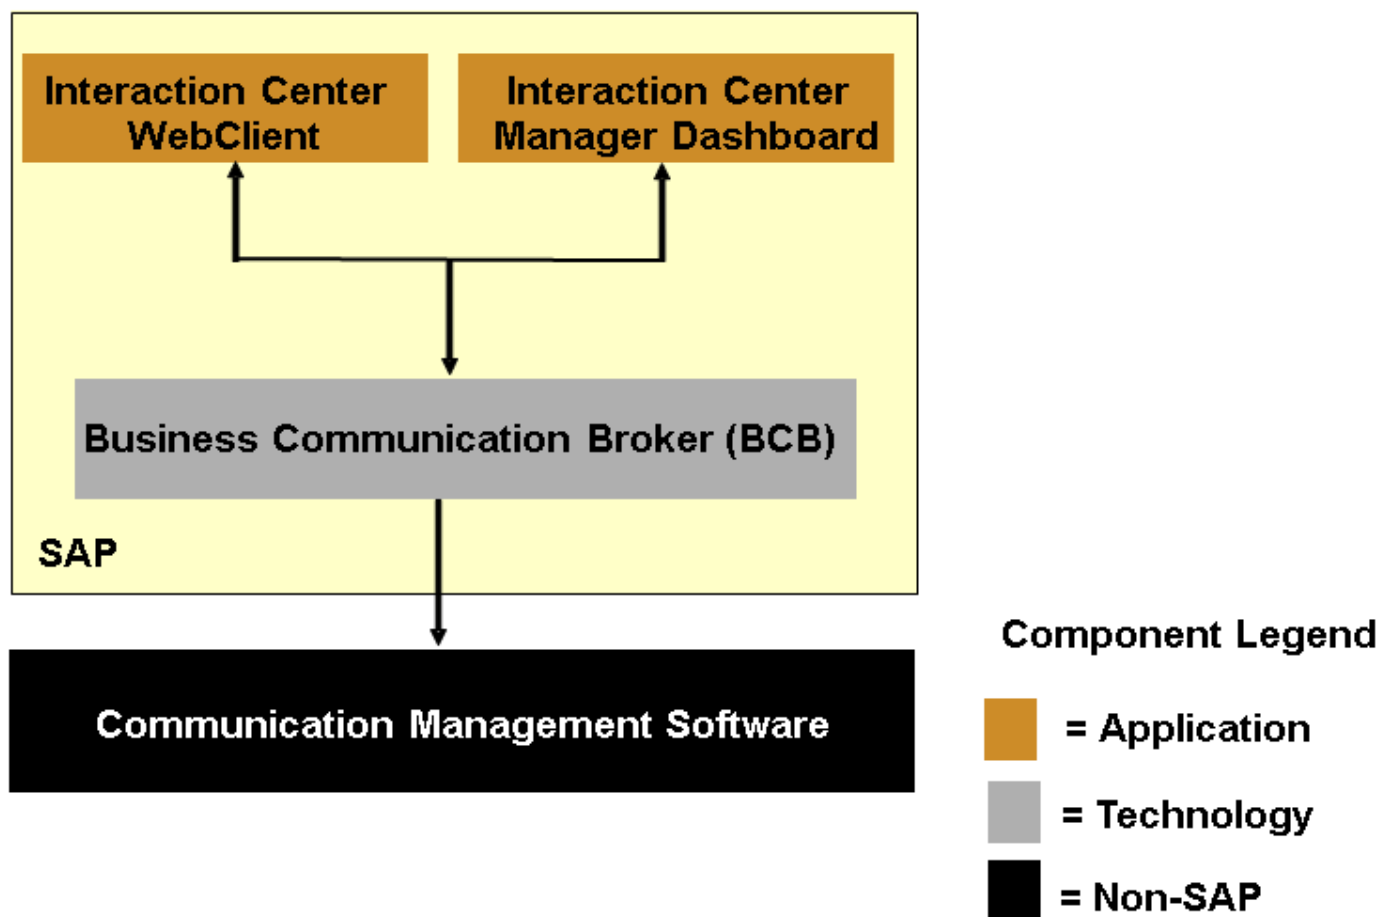

Integration

The ICI is based on Simple Object Access Protocol (SOAP) and Extensible Markup Language (XML); they are non-proprietary, Web-oriented, open interface technologies. HTTP is used at the transport level.

The system architecture required to connect the interaction center with external communication management software using the ICI is made up of several components. The system architecture of the interaction center example scenario in a live environment is shown below:

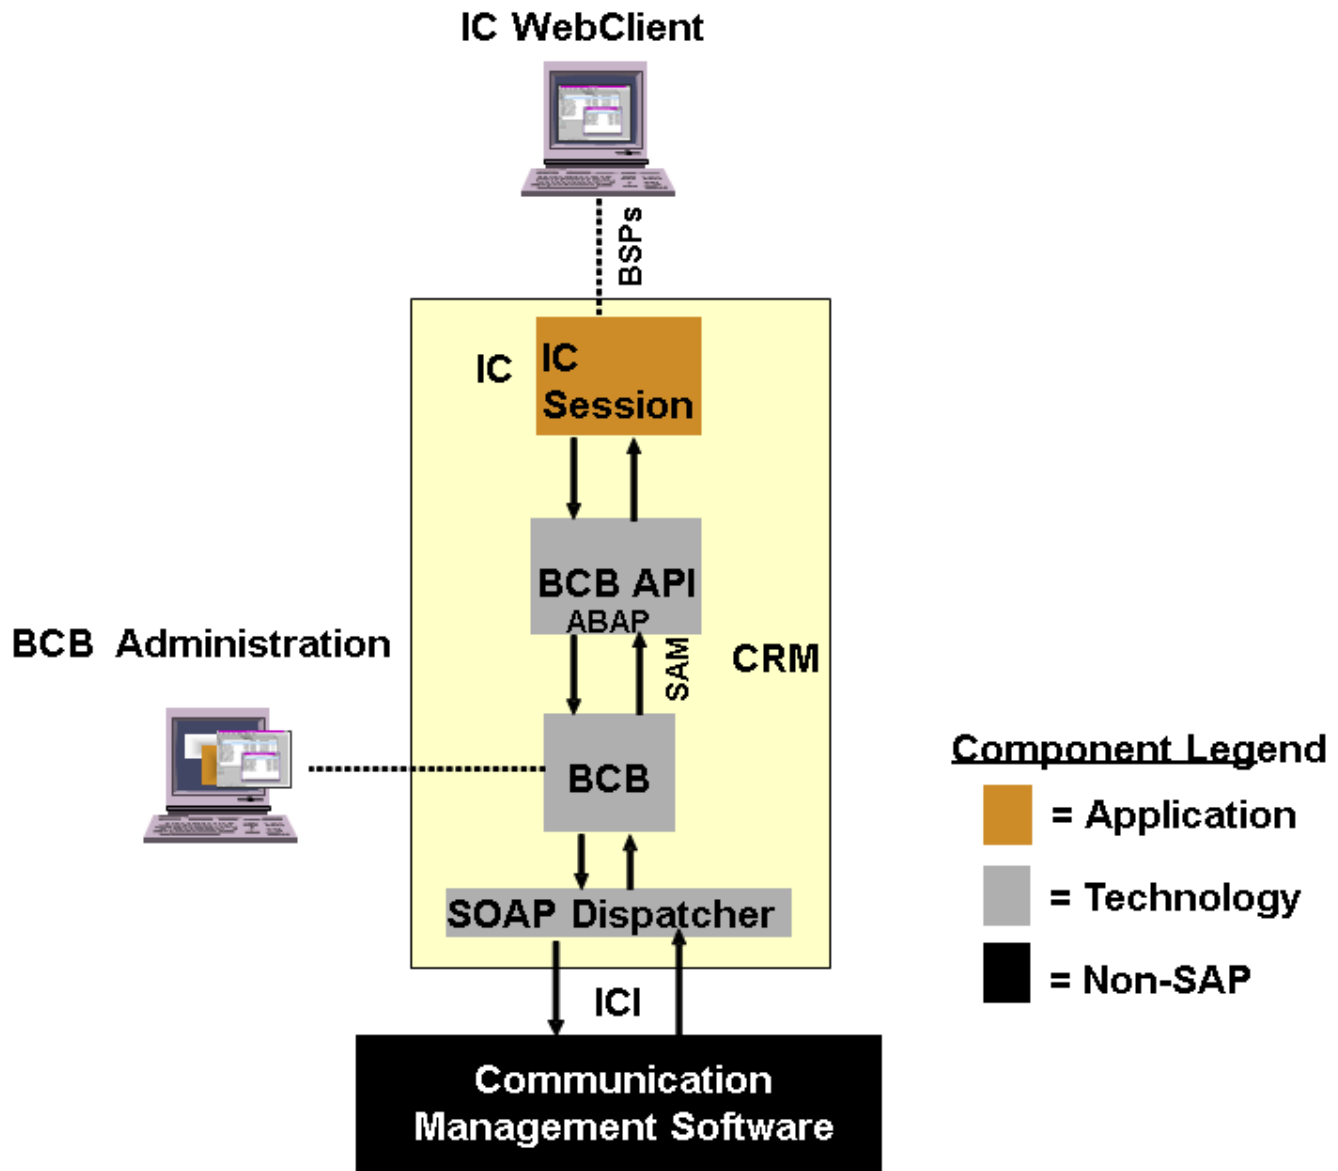

Live System Architecture

BCB Components

The BCB, BCB API, and SOAP dispatcher components enable the CMS. The messages passed between the application component and the external component are passed via the ICI.

i Note

CMS Customizing for IC WebClient is done using transaction CRMM_BCB_ADM.

Application-Specific Components

The application-specific components are linked to the ICI-specific components via the Business Communication Broker Application Programming Interface (BCB API). This is the API for application customizing.

In the interaction center example scenario, the application consists of the IC WebClient, which provides an ABAP-based user interface for interaction center agents.

The IC server sends actions to the communication management software via the ICI-specific components and receives events back from the communication management software also via the ICI-specific components. The actions might include agent logon,

initiate outbound phone call, or remove chat line from chat session. The events might include new inbound phone call, or new posting in chat session.

External Components

These are non-SAP communication systems. In this scenario, the external product is the communication management software, which is a multichannel communication product. This is responsible for merging requests from different media, routing requests to specific agents or agent groups, queuing requests, signaling inbound requests to the IC, and so on. The external products communicate with SAP via the ICI using SOAP and XML.

Certification

A certification process is implemented to verify the connectivity of external communication products with SAP using the ICI. An external product does not have to support the ICI in full. Partial certification is possible to enable the connection of single-channel communication products, such as telephony products.

Features

Many application components use external communication services. Integrating an external communication product with an application component using the ICI can provide:

- Integration of multiple communication channels such as phone, e-mail, and chat
- Active reporting of new, changed, or completed phone calls, e-mails, or chat sessions (known generically as items)
- Monitoring and statistics

i Note

Multichannel management (that is, the synchronization and serialization of incoming communications) is not part of this SAP functionality. The ICI is a server-to-server interface. It does not support direct communication between the SAP client and the external communication product.

Working with WebClient UI

WebClient UI is a UI technology used in Service that delivers a harmonized user interface. Learn how the UI is structured, how to navigate the apps and search the data. Get an overview of the WebClient UI Framework in general, including the framework architecture, tools, generic UI functions, and integration with other UI technologies.

[Getting Started with the WebClient UI
WebClient UI Framework](#)

Getting Started with the WebClient UI

You can use the Web-based user interface to perform your daily tasks quickly and easily. This guide tells you all you need to know to quickly find your way, for example, how the user interface is structured, how to navigate between pages, or how to search for and edit data.

Signing In and Out

Procedure

Entering your user ID and password in the logon page takes you to the home page, which contains your most important personal information, such as tasks and appointments. From here, you can access the search, quickly create appointments, tasks, and contact persons, and send e-mails.

Click [Sign Out](#) to end your work session.

i Note

Your user ID and password determine the role with which you sign in. You can also choose the language. If you click [Change Password](#), you can enter a new password.

More Information

[Working with Business Roles](#)

Accessibility in WebClient UI

Use

WebClient UI applications provide accessibility options. The applications and controls are accessible by default. You can use settings to personalize keyboard shortcuts, and use the high contrast black or high contrast white theme.

Keyboard Shortcuts

You can access all interactive screen elements, like links, fields, buttons, and so on, using keyboard actions. There are special navigation shortcuts that you can use for setting the cursor to focus on specific screen areas.

Personalizing Shortcuts

1. To open the personalization page, choose the [Personalize](#) link in the user menu. If you are using the WebClient launchpad integration mode, choose the [My Dashboard](#) button in the WebClient UI App toolbar to open the dashboard page instead.
2. In the [Shortcuts](#) block, choose the [Personalize Shortcuts](#) link.
3. Here, you can define your own shortcuts.

For more information, see

- [Keyboard Shortcuts for Navigation](#)
- [Keyboard Shortcuts for Spreadsheet](#)
- [Keyboard Shortcuts for Standard Buttons](#)

High Contrast Themes

WebClient UI provides a high contrast black and high contrast white theme to support people with visual impairments.

Choosing the High Contrast Black or White Theme

1. To open the personalization page, choose the [Personalize](#) link in the user menu.

2. In the **Skin** block, choose **SAP High Contrast Black** or **SAP High Contrast White** to switch to the high contrast themes.

In WebClient UI launchpad-integrated mode, use the SAP Fiori launchpad user settings to choose the **SAP High Contrast Black** or **High Contrast White** theme.

Working with Business Roles

Use

You can use predefined business roles to access all the data and information that you require for your daily work, at any time. You sign in with your business role and have access to all applications and data that are assigned to this role.

If you are using SAP Fiori launchpad integrated mode, see [Integration with SAP Fiori Launchpad](#)

i Note

System administration creates your business roles for you, determines the role content, and assigns the required authorizations.

In the organizational information section of the personal data in the central personalization page, you can see with which business role you are signed in to the system.

More Information

[Personalizing the User Interface](#)

What Does the User Interface Look Like?

Use

The SAP Fiori visual theme for the WebClient UI Framework aligns with the look and feel with SAP Fiori 3. Skins from the classical WebClient UI Framework and personalized skins that are not Fiori-compatible will not be available. If you have a Fiori-compatible skin defined and selected in Personalization, that skin will be loaded, otherwise, the system will load the SAP Morning Horizon skin by default.

Features

The table below contains a description of each area:

Area	Use
Header	The header is always visible. Features of the header include: • Menu icon: Allows you to toggle the visibility of the side panel • Breadcrumbs and history navigation • Home button • Logo

Area	Use
	• Timer • Title • Access to the main menu, if configured • Search launcher • Quick create button • Notification Center • User menu i Note The title and main menu will not be part of the header if you are using the IC WebClient business role.
Side Panel	You can toggle the visibility of the side panel using the menu icon in the header. The side panel contains the logo and logo text, system information, and group links. The main menu could also be configured to be visible here instead of in the header.
User Menu	The user menu is accessed by choosing the the user icon in the header. • Your user name • Personal settings • Share • Role Select • System news • Help center • Sign Out
Group Links	This is a set of tabs for navigating. The tabs that appear in your group links depend on your Customizing and personalization settings. Some of the tabs you may see include the main menu (apps) and recent items.
Work Area	The main portion of the screen is the work area. The overview pages as well as the advanced search pages are displayed here. There is a work area header and an anchor bar when applicable. Success messages are toasted in the work area.
Work Area Anchor Bar	The anchor bar is displayed when you have multiple assignment blocks within your work area. You can navigate to these assignment blocks quickly using the anchor bar rather than scrolling vertically.
Footer	The floating footer is displayed when there are messages, or closing or finalizing actions for the work area. On the left side of the footer, you find a message icon, visible when there are messages. On the right side, closing or finalizing actions are displayed, with the left most action emphasized.

Area	Use
Message Area	A message area icon appears in the footer when there are messages. The appearance of this icon changes to match the classification of the most severe message type. By default, in the event of error messages, the message area opens automatically, otherwise, you can open the area by choosing the message button. You can enable and disable the automatic expansion of the message area in your personalization settings. Using the message summary bar, you are able to view all of the messages or filter them based on the message type. If more information is available about a particular message, you can access this information by selecting the chevron to the right of the message. Message types: • Message with an error short text • Message with a warning short text • Message with a positive short text • Message with an information short text

More Information

[Personalizing the User Interface](#)

[Keyboard Navigation](#)

What Pages Are There?

Use

On each page, you can execute different tasks. For example, you can search for data in the search page or view business object data in the overview page.

Features

The table below contains a description of the pages in the user interface:

Page	Use
Home Page	This is used as the entry point for your daily work. The page contains your most important personal data and gives you central access to the functions you use most frequently.
Work Center	This is used as the entry point for all role-dependent areas. The page contains data and hyperlinks for pages you access most frequently.

Page	Use
	Here you can search for business objects or create new business objects.
Search Page	This is used to search for business objects. You can launch the page from the header or the home page.
Overview Page	This contains all the important information on a single business object and the business objects assigned to it. From here, you can navigate to subordinate overview pages. In certain business objects, the details are displayed as a hierarchy. The overview page is used in two modes: • In display mode, you can view all data • In edit mode (editable overview page), you can change business object data as well as the data in most assignment blocks.
Assignment Block	This is in the overview page and contains the most important data for an assigned business object. This data is frequently displayed in a list. You can navigate from here to the edit page, where you can edit the data.
Edit Page	This helps you to edit assigned business objects. The data is displayed in forms or tables.
Report Page	This contains hyperlinks to reports. You can launch the page from the top level in the navigation bar.
Dashboard Page	This contains business intelligence analyses and hyperlinks to more analyses. You can launch the page from the second level in the navigation bar.

More Information

[Navigating Between Pages](#)

Buttons and Icons

Use

You can use buttons and icons to perform your daily tasks, for example, displaying, editing, deleting, or printing data.

Features

The table below contains a description of general icons, buttons, and hyperlinks:

Icons, Buttons, and Hyperlinks	Function
	Creates a new business object
	Saves a new or edited business object You can save a new or edited business object only in the editable overview page. When you save, you can no longer change the data in the overview page.
	Deletes a business object After deleting, you return to the last page you viewed that does not belong to this business object. In assignment blocks, you can use this function to delete the business object assignments.
	Edits a business object In assignment blocks, you can use this function to edit the detail data of a business object or an assigned business object. ❖ Example You can edit the business appointments of the account, or the organizational data of the sales order.
	Returns to the page that you visited previously You use this function to return from the edit page or editable overview page of an assigned business object to the overview page of the business page; you can save the changed data here.
	Prints the current page
	Opens the online help The online help opens for the page you are currently viewing.
	Navigates back to the page you viewed previously You use this function to navigate from the page that you are currently on to the page you viewed previously.
	Navigates to the next page You use this function to navigate to the page that you viewed after a page that you navigated back to.
	Opens the dropdown box under < and > In the respective dropdown boxes, you can choose the pages to which you want to navigate.
	Copies a business object
	Cancels and returns to the previous page Your latest changes are not saved, and you see the data that you saved last.
	Additional functions that are grouped in a dropdown box under the pushbutton

Icons, Buttons, and Hyperlinks	Function
	Refreshes the display
	Exports data to spreadsheets, for example, to Microsoft Excel
	Personalizes the display in pages, tabular assignment blocks, and tables
	Opens and closes a table shown as a chart, in result lists and assignment blocks You can choose between pie charts and bar charts.
	Opens the input help or search help for the relevant field
	Opens the calendar
	Adds an existing business object, in assignment blocks, for example
+ and 	Adds and removes additional search lines in the search
	Selects and deselects all search results in the result list and in other lists
✓ and >	Shows and hides assignment blocks on the overview page
	Goes to the top of an overview page This icon is on the right of the title bar in all assignment blocks. In long overview pages with a large number of assignment blocks, you can use this icon to return to the top of the page instead of scrolling vertically to it.
	Starts the configuration of the corresponding page
	Shows and hides the configurable areas on a page When you click the selected area, you start the configuration of the corresponding area.
Button Search	Launches the search on the search page You can also launch the search by pressing the  key.
Button Clear	Resets the search fields and the result list in the search
Button Reset to Default	Resets to the default settings, in the personalization of the user interface layout, for example
Button Insert	Inserts an assigned business objects In an assignment block, click Edit List to add more business objects to the list.

Icons, Buttons, and Hyperlinks	Function
Button Mass Change	Applies changes that were made to one business object, to multiple business objects
Button Follow-Up	Creates a follow-up transaction, such as a task, interaction log, business activity, appointment, or e-mail
Button Output	Prints or sends a business object by fax or e-mail
Hyperlinks Show Search Fields and Hide Search Fields	Shows and hides search fields on the search page
Hyperlinks Expand and Collapse	Expands and collapses additional lines in tables You can use these hyperlinks to expand and collapse additional lines in tables, when a specific number of lines is exceeded.
Hyperlink Edit List	Navigates to the list of assigned business objects When you click this hyperlink in assignment blocks, you can directly edit the list of assigned business objects.

i Note

In business roles that use communication management software, you require special functions to make and accept calls.

More Information

[Personalizing Pages](#)

[Exporting Data](#)

[Performing a Search](#)

[Personalizing the Search Result](#)

Personalizing

Use

You can personalize the user interface, for example, by selecting various themes. You can personalize individual pages, and adjust the search result to your personal requirements.

More Information

[Personalizing the User Interface](#)

[Personalizing Pages](#)

[Personalizing the Search Result](#)

Personalizing the User Interface

Procedure

When you sign on, the user interface has a particular default layout. You can personalize the user interface, however. That is, you can adjust the display to meet your own requirements.

In the user menu, which is found in the header, you can navigate to the central personalization page using the [Personalize](#) link.

i Note

If you want to personalize the page currently displayed, click the [Personalize](#) icon on the top right of the page. In the [Content](#) dropdown box, you can select the information block that you want to see in this location on the page. If you choose the blank line, the information block remains empty. Click [Save](#) to save your personalization. If you click [Reset to Default](#), the standard settings are restored.

Changing Personal Data

You can change your personal data, such as your first name or last name. You can change communication information such as your telephone number, fax number, or e-mail address. You can view organizational information, such as in which organizational unit or position you are employed. In the [Business Role](#) field, you can see with which role you are signed into the system.

Changing Your Password

If you click [Change Password](#), you can change your current password by entering a new one.

Personalizing General Settings

You can make general settings, for example time zone, date format, or time format. You can activate the configuration mode, that is, activate the configuration of pages and views directly from the user interface. You can activate the tab order mode, that is, you can define your own tab order on the user interface. You can change table settings to enable filter saving, sort saving, and automatic text wrapping. In addition, you can activate favorites and tag clouds.

Defining Groupware Integration

You can set up your e-mail transfer in Microsoft Outlook. You can edit your settings for synchronizing your personal calendar, tasks, and contacts in the system. You can install the new version of Groupware synchronization software on your local computer.

Defining the Layout

You can define the layout of the user interface.

- You can choose between different skins, and view each one in a thumbnail.
- You can choose the option [Optimize for Touch Input](#) to increase the size and spacing of controls. This allows you to interact with them more easily using your fingertip. This is useful for hybrid devices that combine touch and mouse events.

You can set up the user interface so that you waive some functions and visual effects, in favor of better performance. You can also disable suggestions for entries in input helps.

Personalizing the Navigation Links

You can personalize the navigation links, by defining which of the links available for your role are displayed. This includes recent items, quick creates and other link groups and apps. You can also determine the sequence of the displayed links.

Personalizing Recent Items

You can define whether the **Recent Items** block is displayed in your business role. In this block, you see the titles of the items that you have recently used, as hyperlinks in the side panel. In addition, you can determine the number of titles displayed, up to a maximum of 25 entries.

Setting Up Keyboard Shortcuts

You can set up personal keyboard shortcuts. The system makes a distinction between those shortcuts with which you focus on certain areas in the user interface, and those with which you control navigation to other pages or business objects.

Example

You can set up shortcuts that focus on the header area, the side panel, or the work area. You can define shortcuts that control navigation to the home page, calendar, or activities.

Add Application Links, Web Links, and Widgets

You can add application links, Web links, and widgets to the home page of your role. You can choose which of the links that are available in your role should be displayed on the home page. You can also determine the sequence of the displayed links.

You can also make these settings directly on the home page of your role, if you click the **Personalize** icon in the menu of the respective information block.

Subscribing to a Feed

You can subscribe to your personal feed. To do so, copy the link to your feed reader.

More Information

[What Does the User Interface Look Like?](#)

[Keyboard Navigation](#)

[Navigating](#)

[Defining Tab Order](#)

[Using Favorites](#)

[Using Tag Clouds](#)

Personalizing Pages

Use

When you sign in, all pages have a particular default layout. However, you can personalize your pages. That is, you can adjust the way that pages are displayed, to meet your own requirements.

Procedure

Personalizing the Home Page, Work Center Pages and Report Pages

On the home page, work center pages, and report pages, you can define which entries are displayed in information blocks. The personalization is the same for all three pages.

When you sign in, the home page is the first thing you see. To navigate to a work center, you choose a role-dependent area in the apps. The report pages are accessed from **Reports** in the side panel.

At the top right of the page, click the **Personalize** icon to personalize the home page.

Using drag and drop, you can change the sequence of the information blocks on the page by moving them from left to right, or up and down.

You can define which entries are displayed in information blocks. Click the **Personalize** icon from the menu in the information block, and select the entries that you would like displayed. In the list of displayed entries, you can define the sequence in which they are displayed in the information block.

Personalizing the Overview Page

You have searched for a business object, for example a service order, and are in the overview page for that service order. Click the **Personalize** icon to display the personalization dialog.

Just like in the home page, work center pages and report pages, you can use drag and drop to position the assignment blocks in the overview page.

In the personalization dialog for the overview page, you can define which assignment blocks are always directly visible and open. To do so, activate the checkbox **Display Expanded** for the relevant assignment block, under **Displayed Assignment Blocks**.

i Note

If you click **Reset to Default**, the standard settings are restored.

Personalizing Columns in Assignment Blocks

In the personalization dialog for assignment blocks, you can determine which columns should be displayed. You can use **Up** and **Down** or drag and drop, to define the sequence of the displayed columns. You can specify the absolute (pixel) column width, and the relative (percentage) column width in relation to the total width. You can also enter the maximum number of rows that should be displayed in this assignment block.

i Note

With the runtime merge of the configuration and personalization, the newly added or removed assignment block or column will be automatically added to the existing personalization. The changes will be reflected in the UI for the user without deleting the existing user personalization.

More Information

[What Pages Are There?](#)

[Personalizing the Search Result](#)

Personalizing Tables

Use

You can personalize tables using the [Personalization](#) dialog, which you open from the [Personalization](#) icon on the top right in the title bar of the results list.

Procedure

When you perform a search, your results are displayed in a results list or table.

The result list contains at least 10 lines per page. No blank lines are displayed. That is, if the search finds fewer than 10 results, you see only the number of results found.

The minimum number of lines displayed, and the appearance of columns depend on the business object for which you are searching.

Specifying the Maximum Number of Search Results

Under the search fields, you can define the maximum number of rows that should be displayed in the result list.

i Note

If the search result exceeds this value, a corresponding message appears in the message bar in the header area. The value you set is not exceeded in the result list.

Defining and Fixing Columns

You can define the column width of individual columns

- In relation to the total width
- In absolute width in pixels
- In relative width in percent

You can fix columns on the left and/or right of the table. In this case, you must use column width in pixels.

Showing and Hiding Search Fields

You can use the [Show Search Fields](#) and [Hide Search Fields](#) hyperlinks to show or hide the search fields. This lets you make the result list larger or smaller, for example if you need more space for displaying search results.

If you hide the search fields, the result list contains at least 20 rows by default, unless you enter a different value in the [Maximum Number of Results](#) field.

Sorting Search Results

If you click a column title, you can sort all search results in the corresponding column. A dropdown box appears in which you can choose between the following options:

- Sort ascending

All search results are sorted alphabetically or numerically in ascending order. The column title is marked with a small triangle pointing upwards.

- Sort descending

All search results are sorted alphabetically or numerically in descending order. The column title is marked with a small triangle pointing downwards.

i Note

The sort functions in the dropdown box are separated from the filter functions, by a dashed line.

Filtering the Search Result

If you click a column title, you can filter the corresponding column. A dropdown box appears in which you can choose between the following options:

- (All)

All highlighting and filter values in the corresponding column are reset. Any sorting of the column is kept.

- (Custom...)

If you click this entry, you can enter a filter value according to which the column is filtered. You can use the wildcard characters ' * ' and ' + ' here. The filter icon after the column title shows that this column was filtered.

❖ Example

The wildcard character ' * ' replaces multiple unknown letters, for example `Wal l *` or `Wal *dor f`. The wildcard character ' + ' replaces one unknown letter, for example `Wal +dor f`.

- (Too Many Entries...)

This appears in the dropdown box if more than 100 different data records were found in the search. If you click this entry, you can enter a filter value according to which this column should be filtered. You can use the wildcard character ' * ' here, which replaces any number of characters. The filter icon after the column title shows that this column was filtered.

- Data records displayed in the column

The data records displayed are alphabetically or numerically sorted. If there are more than eight data records, you can scroll up and down in the dropdown box. A maximum of 100 data records is displayed in the dropdown box.

If you click a particular data record in the dropdown box, the column is filtered according to this data record. The filter icon after the column title shows that this column was filtered.

i Note

The filter icon appears after the column title even if its text is truncated. If you hover over the column title with the mouse, you see the complete column title in a quick info text.

More Information

[Editing Data](#)

[Creating Data](#)

[Personalizing the User Interface](#)

[Using Charts](#)

[Exporting Data](#)

Defining Tab Order

Prerequisites

Before you define the tab order, you must activate the tab order definition mode in the central personalization page, in the general settings.

Context

You can define your own tab order, that is, you can define the sequence of fields that you edit on a page yourself.

Procedure

1. Select the required business object.

You do this on the overview page of the business object.

2. Click **Edit**.

You are then in the edit page of the business object.

3. Click the icon **Define Tab Order** at the top right of the page.

The page segment now has a blue frame, and is shaded.

4. Click the first field of your tab order.

The number "1" appears in the clicked field.

5. Click the subsequent fields of your tab order.

The respective numbers appear in the clicked fields. To change the sequence, click the numbered fields again. The sequence is changed accordingly.

6. Save your new tab order.

You are then in the edit page of the business object.

Example

In the advanced search page of service orders, for example, enter your search criteria and select a service order. In the overview page of the service order, click **Edit**. On the edit page, click the icon **Define Tab Order**. You can now define your personal tab order.

Next Steps

[Personalizing the User Interface](#)

Searches

Use

You can search for business objects such as accounts, products, opportunities, or activities. The result of your search is displayed in the result list.

A series of search operators, described in one of the following documents, is available for the search. Input help or search help in certain fields also assists you in your search.

More Information

Using the Central Search

Use

Searching for data is one of your most important tasks. The central search is a fast and flexible tool for this. In Customizing, you define that the central search is located in the header area of the user interface, and is therefore visible and accessible at all times, regardless of the application you are in.

Procedure

Opening the Central Search

When you open the search menu of the central search in the header area, you can choose between the following options:

- Saved searches
- Search all objects
- Search individual applications

i Note

You can use the wildcard character ' * ' if you are not sure of a spelling, *a* for example.

If you want to further refine your search criteria, execute a search to navigate to the search page of the application and choose **Show Search Fields**.

Performing Saved Searches

In the search menu, choose **Saved Searches**. The field label takes on the name **Saved Searches**. Now you can select and perform a saved search. Selecting the saved search name from the dropdown directly executes the saved search. You can change the search criteria of your saved search and save it again.

Searching All Objects

In the search menu, select **All Objects**. The field label takes on the name **Search for All Objects**. You can enter key words, IDs, or free text in the search field. The search is performed in all applications that belong to your role.

If you choose an individual application and the attribute **Free Text** in the search menu, you can also enter free text in the search field.

i Note

If you are searching for an ID, you must enter the wildcard character ' * ' in front of the ID, in the search field.

Searching Individual Applications

When you open the search menu, you see an alphabetical list with all applications that belong to your role. Choose an application. You automatically see all attributes that belong to this application. As soon as you choose an application and an attribute, both are highlighted in color. Choose your selection. The field label takes on the name of the search that you want to perform, for example **Service Order/Description**. Enter a search term in the search field, and choose the **Search** icon or **ENTER** to perform your search.

Result

The result of your search by individual application is displayed in the result list of the respective application. If you search in all the applications of your role, you see the result in the search result page. You see the search result of each individual application in a separate result list on this page.

More Information

[Performing a Search](#)

[Using Saved Searches](#)

[Personalizing the Search Result](#)

Performing a Search

In the search, you have a variety of search criteria with which you can refine your search to find precisely the data you are looking for.

❖ Example

For example, in the service role, you want to find the Service Order business object. The business object Service Order belongs to the Service area.

1. In the Apps, choose the area to which the business object you are looking for belongs.
2. In this area, choose the required business object.

Using the example above, you see the search page for service orders.

i Note

You can also launch the search page for service orders by choosing the business object you want in the corresponding work center or home page under **Search**.

3. Refine your search criteria.

- a. Use the default search criteria or select other criteria from the dropdown list.

Search criteria describe characteristics of the business object that you are looking for.

Example search criteria for service orders are [Search Order ID](#), [Description](#), [Created By](#), or [Status](#).

- b. Select the search operators.

Search operators define how data is filtered. Example search operators are [is](#) or [starts with](#).

- c. If necessary, enter data to refine your search.

Use the wildcard character asterisk (*) to replace one or more characters. Use wildcards asterisks when you are not sure how to spell the search term you want, for example, [T*st*](#) or [*est](#).

4. In the field [Maximum Number of Results](#), you can enter the maximum number of business objects that should be in the result list for this search.

5. Choose [Search](#) or to confirm.

In the result list you can see the data that matches your search criteria. If the result list is empty, a message appears in the message bar.

i Note

Click [Clear](#) to clear all search fields and the result list for the current search. However, this does not reset the search criteria and search operators for the current search. Search lines you may have added in the current search are not removed. The field [Save Search As](#) is also not cleared.

Additional Search Criteria

To copy or delete a search line, click the icons [Copy Line](#) and [Remove Line](#) next to the search line. You can use the copied search lines without making any changes to them, or select an additional search criterion from the dropdown list.

Performing an Archive Search

Procedure

In the WebClient UI, you can search for archived business objects. If you searched for a business object but did not find it, you can perform an archive search.

❖ Example

You can search for archived service orders in the service role. The [Service Order ID](#) is available as a search criteria.

1. Click [Search Archive](#) in the search page for the business object under the title of the page.

You see the search page for the archive search. The result list in the search page is empty.

2. Enter your search criteria.

3. Click [Search](#).

In the result list you can see the data that matches your search criteria. If the result list is empty, a message appears in the message bar.

i Note

To return to the standard search, click [Back to Search](#) under the title of the search page.

More Information

[Performing a Search](#)

Search Operators

You can use search operators to refine your search to meet your specific requirements.

The table below lists the search operators you can use in the search:

Search Operator	Description	Use
is	Identical	In text- and date fields, in numeric fields, in ID fields, as well as in search fields with dropdown lists
is not	Not identical	In text- and date fields, in numeric fields, in ID fields, as well as in search fields with dropdown lists
starts with	Texts that start with a particular letter of the alphabet	In text fields
contains	Includes	In text fields, numeric fields, and ID fields
is greater than	Range after a certain value	In numeric fields and ID fields
is less than	Range before a certain value	In numeric fields and ID fields
is empty	No value	In text fields, in numeric fields, in ID fields, as well as in search fields with dropdown lists
is between	Range between two values	In numeric fields, ID fields, and date fields
is earlier than	Range before a certain date	In date fields
is later than	Range after a certain date	In date fields

Using Saved Searches

Procedure

You can save your search criteria for further use. Your saved searches are displayed in the search menu of the central search, in the header area. You can also display your searches in a tree structure where saved searches are grouped by categories.

If you are using the tree structure, you can organize the saved searches by defining the order and using folders as categories. Defining your own order can be done using drag and drop. To create new categories, use the main folder's context menu.

Saving Searches

1. Enter your search criteria in the search fields on the search page.

2. In the **Save Search As** field, enter a name for the search.

3. Click **Save**.

The search criteria are saved. In the message bar in the header area, you get a message stating that your search was saved. Your saved search is displayed:

- In the search menu under **Saved Searches** in the central search in the header area
- On the home page under **My Saved Searches**, if this information block is displayed on the home page
- In the tree structure, if configured.

i Note

If you leave a search field empty, this search criterion is not saved in the search. For example, if you leave the **Country** search field empty, this search criterion is not saved.

If you leave all search fields empty, you cannot save the search. In the message bar in the header area, you get a message informing you to fill in at least one search field.

Performing Saved Searches

1. In the search menu, choose **Saved Searches**.

Select the saved search that you want to perform either from the central search or the saved search name from the tree structure.

The search with your saved search criteria is performed. You see the search results in the result list.

Deleting Saved Searches

1. In the search menu in the central search **Saved Searches**, select the search that you want to delete.

If you are using the tree structure, you can delete a saved search using the context menu of the selected saved search.

2. Click **Delete**.

The saved search is deleted and you receive a corresponding message.

Fiori Layouts

For more information about advanced search pages with Fiori layouts, see [Advanced Search Pages with Fiori Layout](#).

More Information

[Using the Central Search](#)

Using Input Help and Search Help

Procedure

You can use input help and search help to search for values for individual fields. The respective field determines whether the input help or the search help launches.

Example

In the service role, when creating an order, you want to search for a particular currency or contact. You also want to determine the planned start and end date.

Using Input Help to Search

1. Click the icon at the end of the field.

You see the input help.

2. Select the value that you want.

The selected value is copied to the corresponding field.

i Note

Using the SVH_DISABLED parameter in the [Define Parameters](#) Customizing activity for [UI Framework](#) [Technical Role Definition](#) you can set various options for the input help. For example, you could set the input help for to show the last values. In this case, if you double-click in fields with input help, or use the BACKSPACE KEY in an empty field with input help, you can see your last five entries in this field. Your last entry appears first, in the list that you see underneath the input field.

Using Search Help to Search

1. Click the icon at the end of the field.

You see the search help.

2. Enter your search criteria in the search fields.

3. Click [Search](#).

You see all the values that match these search criteria.

4. Select the value that you want.

The selected value is copied to the field.

Searching for a Date

1. Click the date icon at the end of the corresponding field.

You see the current month in the calendar.

Use the arrow icon on the left to select the previous month, and the arrow icon on the right to select the following month.

2. Click the date that you want.

The date you want is copied to the field.

More Information

[Performing a Search](#)

Navigating

Use

Navigation follows standard navigation paradigms of various web applications. The WebClient UI Framework combines the hub-and-spoke navigation model with an application network model.

Using the Header to Navigate

You can use the header to navigate to the home page and to recently viewed pages using breadcrumbs and history. The main menu, if configured to be in the header, can be used to navigate to other pages.

Using the Side Panel to Navigate

You can toggle the visibility of the side panel using the menu icon. When visible, the side panel can be used to see system information and system links. If the main menu is configured, you can navigate to other pages from here. You can also navigate to other pages using configured group links and recent items. Recent items are displayed in the sequence in which you used the items, with the most recent at the top of the list.

Page Navigation

- The home page is your starting point when you sign in. It contains personal information and navigation to your most frequently used tools.
- The work center pages summarize all the business content related to that work center. It contains shortcuts and provides access to related components, including reports.
- The reports page is a central page where you can access analytical information and reports.
- Overview pages provide an overview of the information regarding a single instance of an object such as an account. Assignment blocks show related information. This page contains shortcuts to related information.
- The search page allows you to find and navigate to instances of any type of object that is available for your role from the results list or table.

More Information

[What Pages Are There?](#)

[Keyboard Navigation](#)

[Navigating Between Pages](#)

Navigating Between Pages

Procedure

You can navigate between different pages in the user interface. Once you have signed in, the home page appears, where you find your tasks and appointments.

Navigating to the Work Center

If you select a role-dependent area from the apps, the work center is displayed. Here you have the following options:

- Under **Search**, you can launch the respective search page.
- Under **Create**, you can select the new business objects you want to create.
- Under **Reports**, you can find links to the most important reports in this area.

❖ Example

In the service role, you open the **Service** work center. Under **Search**, you can search for service orders, service requests or service confirmations. Under **Create**, you can create service orders, service quotations, or service requests. Under **Reports**, you find reports as customized.

Navigating to the Search Page

If you select a role-dependent business object, the search page of the corresponding business object is launched.

❖ Example

In the service role, you want to search for service orders in the **Service** area.

Navigating to the Overview Page

If you click a hyperlink in the result list on the search page, the overview page of the selected business object is displayed. Here you find the most important information about the selected business object.

❖ Example

In the service order search, if you click a hyperlink in the **Service Order ID** column, you see the overview page for the selected service order.

If you click a hyperlink in the assignment block of an assigned business object, the overview page of the corresponding business object is displayed.

❖ Example

If you click a hyperlink in the **Involved Parties** assignment block in a service order, the overview page of the selected person or organization is displayed.

Navigating to Lower-Level Overview Pages

If you click a hyperlink in an assignment block on the overview page of a selected business object, you navigate to a lower-level overview page.

❖ Example

In the service role, if you click a selected item in the **Item No.** column in the **Items** assignment block in a service order, you navigate to the overview page for this item.

More Information

[What Pages Are There?](#)

[Performing a Search](#)

[Editing Data](#)

Keyboard Shortcuts for Navigation

Use

You can use the keyboard to control interactive elements (for example, hyperlinks or pushbuttons) on the user interface (UI).

Features

Standard Keyboard Navigation

Action	Keyboard Command
Activate selected pushbutton	ENTER
Open menu of a menu button	ENTER
Go to next entry in menu of a menu button	TAB or DOWN ARROW
Go to previous entry in menu of a menu button	SHIFT + TAB or UP ARROW
Choose entry in menu of a menu button	ENTER
Activate navigation link	ENTER
Select or deselect checkbox	SPACEBAR
Select or deselect radio button	SPACEBAR
Select line of a table	ENTER
Go to next entry in column of editable table, if entry is not in list box	DOWN ARROW
Go to previous entry in column of editable table, if entry is not in list box	UP ARROW
Expand or collapse hierarchy level in hierarchy tree	ENTER
Open list box	DOWN ARROW
Go to next entry in list box	DOWN ARROW
Go to previous entry in list box	UP ARROW
Select entry in list box	ENTER or TAB

Side Panel

The side panel contains menus with two levels.

Action	Keyboard Command
Go to next entry on same level.	DOWN ARROW or TAB
Go to previous entry on same level.	UP ARROW or SHIFT + TAB
Activate entry (applies to first and second level of the menu).	ENTER

Action	Keyboard Command
Open second level of menu when cursor focus is on an entry in first level of menu.	RIGHT ARROW
Close second level of menu and place cursor focus on corresponding entry in first level of menu.	LEFT ARROW

Standard Shortcuts

Action	Keyboard Command
Place the cursor focus on the first hyperlink in the system links.	ALT + 1
Place the cursor focus on the first hyperlink in the navigation bar.	ALT + 2
Place the cursor focus on the first interactive element in the create area of the navigation bar.	ALT + 3
Place the cursor focus on the first interactive element in the work area.	ALT + 4
Place the cursor focus on the first pushbutton of the work-area toolbar. When this shortcut is pressed for a page that has no work-area toolbar, such as the home page, this shortcut does not move the cursor position.	ALT + 5
Place the cursor focus on the first pushbutton of the table toolbar when the actual focus is already inside the table.	ALT + 6
Place the cursor focus on the first interactive element in the page navigation area of a table when the focus is already inside the table.	ALT + 7
Place the cursor focus on the first interactive element of the table when the cursor focus is already in the table.	ALT + 8
Place the cursor focus on the first interactive element in the previous group (an assignment block on an overview page or a group on a home or work-center page). If this group does not contain an interactive element, the cursor focus is placed on the next previous group that contains an interactive element.	ALT + PAGE UP
Place the cursor focus on the first interactive element in the next group (an assignment block on an overview page or a group on a home or work-center page). If this group does not contain an interactive element, the cursor focus is placed on the next group that contains an interactive element.	ALT + PAGE DOWN

If you want to use different key combinations for the shortcuts, click [Personalize](#) in the system links. For each of the shortcuts, you can select your own combination of ALT, CTRL, SHIFT, or ESC, with another key from the dropdown box.

More Information

[What Does the User Interface Look Like?](#)

Keyboard Shortcuts for Spreadsheet

Use

You can use the following keyboard navigation and mouse navigation in the spreadsheet.

Features

Keyboard Navigation

Keyboard Command	Usage
ENTER	Triggers a submission of all the modified cells, unless application disables that functionality by setting the <code>commitOnEnter</code> tag attribute to FALSE
TAB	Navigates in top left table cell to bottom right table cell direction Focus only stops on active cells, that is, when clicking Expand/Collapse buttons or with editable input fields • Tabbing through table header and lead column cells highlights the corresponding column or row. • Tabbing through table data cells highlights the corresponding column and row Table will scroll if needed
SHIFT + TAB	Navigates in bottom right table cell to top left table cell direction stopping only onto the active cells, and scrolling if needed
ARROW UP	Navigates in bottom column cell to top column cell direction stopping on every data and header cell Table will scroll if needed
ARROW DOWN	Navigates in top column cell to bottom column cell direction stopping on every header and data cell Table will scroll if needed
ARROW LEFT	Navigates in right row cell to left row cell direction stopping on every data and header cell Table will scroll if needed
ARROW RIGHT	Navigates in left row cell to right row cell direction stopping on every header and data cell Table will scroll if needed
CTRL + S	If the save button exists on the page, it will be triggered.
CTRL + X	In an editable field, cuts the selected characters and saves them to clipboard
CTRL + C	In an editable field, copies the selected characters and saves them to clipboard
CTRL + V	In an editable field, pastes the content of the clipboard to the spreadsheet

Navigation with the Mouse

Action	Usage
Clicking the left mouse button	- Executes a button - Selects a cell
Double-clicking the left mouse button	Positions the cursor on an input field
Spinning the mouse-wheel	Scrolls the spreadsheet vertically
SHIFT + Spinning the mouse-wheel	Scrolls the spreadsheet horizontally

Keyboard Shortcuts for Standard Buttons

The standard buttons are assigned default shortcuts for basic operations.

Action	Shortcut (Microsoft Windows)	Shortcut (Mac OS)	Relevant Page	Prerequisite
Create or new	CTRL + ENTER	CMD + ENTER	Advance search Object page	
Delete table entry	CTRL + D	CMD + D	Advance search Object page	The row is selected.
Edit page level	CTRL + E	CMD + E	Object page	The focus is set anywhere on the object page.
Save page level	CTRL + S	CMD + S	Object page	The page is in edit mode. The focus is set anywhere on the object page.
Cancel	CTRL + Q	CTRL + Q	Object page	The page is in edit mode. The focus is set anywhere on the object page.
Print	CTRL + P	CMD + P	Advance search Object page	
Go or search	ENTER or RETURN	ENTER or RETURN	Advance search Object page	The focus is in the search area.
Select row in tables	SHIFT + SPACEBAR	SHIFT + SPACEBAR	Advance search Object page	The focus is on a table cell.
Table settings	CTRL + ,	CTRL + ,	Advance search Object page	The focus is set on the table.

Action	Shortcut (Microsoft Windows)	Shortcut (Mac OS)	Relevant Page	Prerequisite
Export as	SHIFT + CTRL + E	SHIFT + CMD + E	Advance search Object page	The focus is set on the table.

The development of the application does not necessarily take advantage of these shortcuts. Non-standard buttons may be developed to look like the standard ones. These non-standard buttons are not automatically assigned the standard button shortcuts. The above standard buttons could also be customized to use different shortcuts.

You can confirm button shortcuts from the UI using the tooltip. The tooltip displays the shortcut if there is one associated with the button.

Editing

Use

You can create new business objects or edit, assign, or delete existing ones. You can also create new business objects quickly.

Regardless of the page you are currently in, you can create new tasks, business activities, appointments, and e-mails at any time. You do this using the **Quick Create** button in the header.

More Information

[Creating Data](#)

Creating Data

You can create new business objects and enter their details. The details you enter depend on the type of the respective business object. For example, you can create new business objects in the following pages:

- In the Work Center
- In the overview page for existing business objects
- In the result list in search pages

❖ Example

If you create a new corporate account, enter general data such as name and ID, address- and communication data, and the employee responsible. Then assign planned activities, contact persons, or opportunities to the corporate account.

Creating New Business Objects

In the Work Center under **Create**, if you click the business object that you want to create, you see the edit page in which you can enter the details of the business object.

❖ Example

In the **Accounts and Products** work center under **Create**, click **Corporate Account** to display the edit page for the account. Here you can enter the account details.

Creating New Business Objects Quickly

In the header, click the quick creates icon to display a list of business objects that can be created quickly. Click a business object to display the edit page in which you can enter business object details.

Note

The business objects you can select using quick creates depend on your role. In the sales pro role, for example, you can create service orders, service quotations, or services requests.

Editing Data

You can edit business object data. The data you can edit depends on the type of the respective business object.

Example

You want to edit the rating of a corporate account. The communication data for an assigned contact has changed. You also want to edit the list of assigned products.

Editing Business Object Data

In the overview page of a business object, if you click **Edit** in the details title bar, the overview page appears in edit mode (editable overview page). Here, you can edit the details of the selected business object. Click **Save** to save your changes. You return to the display mode of the business object's overview page.

Example

In the overview page of the corporate account, click **Edit** in the details title bar. In edit mode of the overview page (editable overview page), change the rating of the account. Click **Save** to save the changed rating and return to the display mode of the account's overview page.

Editing Assigned Business Object Data

In the assignment block on the left next to an assigned business object, if you click **Edit**, the edit page with details of the selected business object appears. Edit your data and click **Back** to return to the overview page of the business object. Click **Save** to save your changes.

Example

In the overview page of the corporate account, in the **Contacts** assignment block, click the **Edit** icon by the contact you want. In the edit page, change the contact's communication data. To return to the overview page of the corporate account, click **Back**. Click **Save** to save the changed communication data.

Editing Lists with Assigned Business Objects

In the assignment block, if you click **Edit List**, a list of all assigned business objects is displayed. In this list, you can add or remove business objects. Click **Save** to save your changes.

Example

In the **Products** assignment block in the overview page of the corporate account, click **Edit List**. Click **Insert** and select a product in the product search. Select a product in the list and click **Delete** to remove the product from the list. Click **Save** to save your changes.

Editing Multiple Data Records Simultaneously

You can use the “Mass Change” function to make the changes made to one business object apply to multiple business objects simultaneously. Select the lines of the business objects you want to edit. Click **Mass Change**. Edit your data and save your changes.

i Note

The mass change is only possible with business objects which have been configured by applications.

Adding Data

Procedure

You can add more business objects to a list of assigned business objects. To do this, you can either select business objects that are already available or create new ones.

Example

In the **Contacts** assignment block in the overview page for the business account, click **New** to display the edit page for contacts. In the **Contact ID** field in the search help, you can select an existing contact.

Adding an Existing Business Object

1. Click the search help icon at the end of the corresponding field.

You see the search page.

2. Enter your search criteria in the search fields.
3. Click **Search**.

The result list displays all the search results.

4. Select the value you want.

The value is copied to the corresponding field.

Adding a New Business Object

1. Click the search help icon at the end of the corresponding field.

You see the search page.

2. Click **New**.
3. Enter the data you want in the fields.
4. Click **Back** to return to the edit page.

The value is copied to the corresponding field.

5. Click **Back** to return to the overview page.

6. Click **Save**.

i Note

In both cases, the business object is added to the list of assigned business objects in the assignment block.

More Information

[Using Input- and Search Help](#)

[Performing a Search](#)

Deleting Data

Procedure

You can delete certain business objects. There are other business objects, such as accounts or employees, that you cannot delete. These business objects are part of the master data, that is, they remain unchanged for a long period and contain information that you require again and again.

i Note

The authorization concept for the deletion of business objects is dependent on the respective company. Authorization for deletion can therefore be adapted to the requirements of the respective company. The system administrator sets up and assigns the authorization.

Caution

When you delete a business object, you cannot undo the transaction. The business object itself is deleted, as well as assignments to other business objects.

Deleting Business Objects in the Result List

1. Search for the business object you want to delete.
2. In the result list, choose the required business object.

i Note

You can also select and delete multiple business objects in the result list simultaneously. However, this is not applicable to all business objects.

3. Click the icon **Delete** in the result list.

Deleting Business Objects on the Overview Page

1. Search for the business object you want to delete.
2. In the result list, choose the required business object.

3. Click the hyperlink in the result list.

You navigate to the business object's overview page.

4. Click the icon **Delete** on the overview page.

Deleting Assignments

1. In the assignment block of a business object, click the **Delete** icon.

i Note

The business object is removed from the assignment block. However, the business object itself is not deleted, just the assignment to another business object.

2. In the overview page, click one of the following icons:

- **Save**, if you want to delete the assignment
- **Cancel**, if you do not want to delete the assignment

More Information

[Performing a Search](#)

Exporting Data

Procedure

You can create export files, and reuse data that has already been entered. For example, you can create an export file from the result list of a search. This data is exported to a table processing program, for example Microsoft Excel.

1. Perform the search.

The search result is displayed in the result list.

2. Click the icon **Export to Spreadsheet** on the top right of the result list.

The export file with the search results is created in a table processing program, for example Microsoft Excel, and it then opens.

3. Use the standard processing of the table processing program to edit and save the export file.

More Information

[Performing a Search](#)

Printing Data

Procedure

You can print all business object data that you can access. You can choose between two options.

Printing the Browser View

You are in the overview page of a business object, and you click the **Print** icon. The overview page is launched in the browser view. You can use your browser's print function to print the overview page.

Displaying and Outputting PDF-Based Documents

You are in the overview page of a business object, such as a sales contract. Click **Trigger Output**. A message in the message bar informs you that the output has been triggered. Click **Preview Output** to trigger a PDF view of the overview page. You can print the PDF file by using the PDF print function.

More Information

[Performing a Search](#)

Adding Attachments

You can add attachments, such as documents or presentations in various formats, to most business objects. Most business objects have an **Attachments** assignment block in their overview pages, where you can upload and add attachments. You can add documents or Web addresses as attachments.

Adding Documents

Click **Attachment** to add a document to a business object as an attachment. You can either add a document from Content Management and attach it as a link, or upload a document from your local hard disk. Click **Browse** to search for a document on your hard disk. Enter the name and a description of the document and click **Attach** to add the document as an attachment.

Adding Web Addresses

Click **URL** to add a Web address to a business object as an attachment. Enter the Web address, a name and a description. Click **Attach** to add the URL as an attachment.

Adding Document Templates

Click **With Template** to add a document template to a business object as an attachment. Select the required document template. You receive notification that the selected document template was successfully saved. When you close the document template selection and return to the overview page of the business object, the selected document template appears in the list of attachments.

Editing Attachments

Click **Advanced** to edit attachments. You can choose between the following functions:

Function	Function	Description
Folder		Creates a new folder in the assignment block
Delete		Deletes an attachment from the list of attachments

Function	Function	Description
		The assignment is deleted, not the attachment itself.
Copy		Copies an existing attachment The copied attachment can be saved under a different name.
Cut		Cuts the content of an existing attachment
Paste		Copies the content of an existing attachment into another one
More		
	Edit	Edits an attachment
	Check Out	Downloads and saves an attachment to a local hard disk or to another server
	Check In	Uploads an attachment from a local hard disk
	Paste Link	Pastes a link to another attachment
	Remove Check Out Lock	Removes the lock for downloading an attachment
	Refresh	Updates the attachment data

Using Charts

Procedure

In result lists and assignment blocks, you can display the information from tables in the form of a chart. You see the chart directly under the result list or assignment block.

Display Chart

The display of tables as charts is identical in both result lists and assignment blocks. The following description applies to result lists, as well as to assignment blocks:

1. Click the icon **Open Chart** in the title bar of the table.

The area in which you see the chart opens, underneath the table.

i Note

If you do not see the chart, click **Play** in the context menu.

2. Choose the column whose data should be shown in the chart.
3. Choose between pie chart and bar chart.
4. Use the zoom function to zoom in or out on the chart.

Update Chart

In the table, if you click the title of the column that you selected, you can filter this column. The chart is updated, and the corresponding bar or segment is highlighted in the chart. If you click another column title in the table and filter it, the table and the chart are both updated again.

Select Bar or Segment

If you select a bar or a segment in the chart, it is highlighted, and marked with a frame in the legend. The table is automatically filtered according to the selected bar or segment.

More Information

[Performing a Search](#)

[Personalizing the Search Result](#)

Using Favorites

Use

You can create favorites for business objects. Favorites are displayed on the home page of your role.

Prerequisites

Before you can use favorites, you must activate them in the central personalization page, in the general settings.

Procedure

Creating Favorites

1. Select the required business object.
2. Click the icon **Add to Favorites** at the top of the business object's overview page.
3. Enter a name for the favorite, and choose the folder in which it should be created.

You can also create a new folder, which is then added to the existing folder structure.

i Note

If a favorite has already been created for this business object, the path is displayed. If you want to create a new favorite for the selected business object, delete the existing favorite.

4. Select the checkbox **Share**, if you want to share the favorite with all users who are signed in to the system with the same role as you.
5. Save your entries.

Maintaining Favorites

You can see your personal favorites within the folder structure **My Favorites**, in the information block **Favorites** on the home page. You can see the favorites that you share with other users, under **Community Favorites**. All favorites are displayed as hyperlinks.

When you click a hyperlink, you navigate to the corresponding business object.

1. Choose **My Favorites** in the dropdown box.

The folder structure with your personal favorites is displayed.

2. Select folders or favorites, and move them one after the other to the required location in the folder structure, using drag and drop.

You can move favorites to other folders, or move whole folders with favorites within the folder structure.

Filtering Favorites

You can filter your personal favorites, as well as the community favorites, according to various criteria. If you choose **All items** in the filter dropdown box, all favorites are displayed. If you select a business object in the filter dropdown box, only favorites of this type are displayed.

Personalizing Favorites

On the home page, you can click the icon **Personalize** at the top right of the information block **Favorites**, to personalize your favorites using drag and drop. You can create new folders in the folder structure, rename, or delete existing folders and favorites, and copy or insert folders and favorites. You can also move them up and down within the folder structure. When you are finished, save your changes.

More Information

[Personalizing the User Interface](#)

Using Tags

Use

You can add tags to business objects.

Prerequisites

Before you use tags, you must activate the function in the central personalization page, in the general settings.

Procedure

Creating Tags

1. Select the required business object.
2. Click the icon **Tag Current Item** at the top of the business object's overview page.
3. Enter a term for the tag.

In the search help, you can search for existing tags to add to this business object. You can also use tags that other users have assigned to this business object. The system suggests these tags as terms that you can use.

4. Click **Add**, to add the tag to the business object.

Newly added but unsaved tags are shown in italics. You can delete your tags for a business object at any time.

5. Confirm your entries by clicking **Save** or cancel all newly added tags by clicking **Cancel**.

Displaying Tags

You can see tags in tag clouds on the home page of your role, in the information block **Tags**. You can see your tags in your personal tag cloud. In the community cloud, you see the tags from all users who are signed in to the system with the same role as you.

All tags are displayed as hyperlinks. When you click a hyperlink, you navigate to the corresponding business object. If a tag is assigned to multiple business objects, you navigate to a page on which you see the assigned objects.

The bigger a tag is in the tag cloud, the more business objects are assigned to this tag.

Sorting Tags

You can sort tags in your tag cloud and in the community cloud alphabetically, and in ascending or descending order of occurrence.

Displaying Popular Tags

If you select **Popular tags** in the dropdown box, you see the community tags.

Recent Tags

Select **My recent tags** in the dropdown box. You see a maximum of five tags that you have used recently. If you select a tag, you navigate to the corresponding business object or to a page with multiple objects.

Searching for Tags

If you select **Search** in the dropdown box, you can search for objects that belong to your tags, and to the community tags. In the search help, select one of your available tags or a community tag. When you choose **Search**, you navigate to the corresponding business object or to a page with multiple objects.

Deleting Tags

Choose **Clear all my tags** in the dropdown box, to delete your tags.

Personalizing Tags

You can specify how many popular tags you want to display in the tag cloud. Click the icon **Personalize** at the top right of the information block, and choose the number.

More Information

[Personalizing the User Interface](#)