



PUBLIC
2026-01-29

SAP Service Cloud V2 Integration Guide for S/4 HANA

Content

1	Integrate Masterdata with SAP S/4HANA.	3
2	Integrate Service Orders with S/4HANA.	4
2.1	Prerequisites.	4
2.2	Configuration Steps for End-to-End Replication of Service Orders.	4
	Configuration in SAP Service Cloud Version 2.	4
	Configuration in SAP Cloud Integration.	5
	Configuration Steps for SOA Manager in S4 HANA.	6
3	Integrate Service Contracts with S/4HANA.	8
3.1	Prerequisites.	8
3.2	Configuration Steps for End-to-End Replication of Service Contracts.	8
	Configuration in SAP Service Cloud Version 2.	8
	Configuration in SAP Cloud Integration.	10
	Configuration Steps for SOA Manager in S4 HANA.	14

1 Integrate Masterdata with SAP S/4HANA

You can learn about integrating masterdata with SAP S/4HANA by accessing the SAP API Business Accelerator Hub.

For more information, see [SAP Sales Cloud and SAP Service Cloud Version 2 Integration for Master Data with SAP S/4HANA](#) .

2 Integrate Service Orders with S/4HANA

This document describes how to integrate SAP Service Cloud Version 2 with SAP S/4HANA.

SAP does not deliver the configuration steps as they are customer-specific, and the customer must complete those. This document describes the general configuration steps to manually set up the configuration within the existing system landscape.

2.1 Prerequisites

You have access to the SAP Service Cloud Version 2 system. This includes:

- The necessary permissions to use the `sap.crm.service.serviceOrderService` business service.
- Access to the Service Orders application.

You have access to the SAP Cloud Integration system. This includes:

- If you are not using a client certificate for authentication in SAP Cloud Integration (CPI), a business user with the required permissions for `serviceOrderService` must be configured in CPI.
- Cloud Connector must be set up to enable communication between SAP Cloud Integration and the SAP S/4HANA system.

2.2 Configuration Steps for End-to-End Replication of Service Orders

The following sections describe all settings required for this scope item.

2.2.1 Configuration in SAP Service Cloud Version 2

Prerequisites

1. Ensure you are scoped in with the [sap.crm.service.serviceOrderService](#) business service and have the [Service Orders](#) in your applications list.

2. If not using a client certificate for configuration in SAP Cloud Integration, a business user scoped in with [serviceOrderService](#) is required and needs to be configured in SAP Cloud Integration.

Procedure

1. Go to your user profile and select: ► [Settings](#) ► [All Settings](#) ► [Communication Systems](#) ►.
2. Select [+ \(Create\)](#) to create a communication system with the ID of the SAP S/4HANA Cloud Public Edition Private Edition.
 - a. Enter [Display ID](#).
 - b. Enter [Description](#).
 - c. Enter [Technical ID](#), if required.
3. Configure the inbound and outbound settings of the communication system.
4. Save your changes.
5. Go to your user profile and select: ► [Settings](#) ► [All Settings](#) ► [Communication Configuration](#) ►.
6. Select the pre-delivered communication configuration [Integrate Service order with SAP S/4HANA](#).
7. Select [Copy](#).
8. Assign the communication system and value mapping group to the newly created communication arrangement.

You can test the outbound configuration via the ping function.

2.2.2 Configuration in SAP Cloud Integration

Prerequisites

Ensure cloud connector configuration is set up to connect between SAP Cloud Integration and the SAP S/4HANA Cloud Public Edition Private Edition.

Procedure

Configure the two iflows present in the package [SAP Service Cloud Integration with SAP S/4HANA](#).

- a. To replicate the service order from SAP Service Cloud Version 2 to SAP S/4HANA Cloud Public Edition Private Edition, use the SAP S/4HANA Cloud Public Edition Private Edition side details configured in the cloud connector in the [Receiver](#) tab.
- b. To replicate the service order from SAP S/4HANA Cloud Public Edition Private Edition to SAP Service Cloud Version 2, configure the business user created for the [CNS](#) receiver in the [Receiver](#) tab. For [CNS_Confirmation](#), ensure the credentials point to those defined in the communication system/inbound

2.2.3 Configuration Steps for SOA Manager in S4 HANA

Prerequisites

Ensure you have access to the necessary WSDL files and the S4 HANA backend.

Procedure

1. Prepare the WSDL File.
 - a. Go to ► [Monitor](#) ► [Manage Integration Content](#) ► to copy the URL from CPI.
 - b. Add the URL to the WSDL file present in the folder.
- Note**

The WSDL in the folder is only for ServiceOrderNotification_Out. Other WSDLs can be downloaded from the S4 HANA backend using T-code: SPROXY. Alternatively, download the WSDL from CPI and make changes in service, binding, and URL.
2. Configure the Central System.
 - a. In the S4 HANA central system's backend, go to T-code: SOAMANAGER.
 - b. Choose the mode as [central view](#).
3. Create a Domain System.
 - a. Go to ► [Technical Administration](#) ► [Domain Systems](#) ► and upload the WSDL.
 - b. Save the changes.
4. Create a Domain.
 - a. Go to ► [Technical Administration](#) ► [Domains](#) ►. During creation, assign a random weight and configure as follows:
 - Select [SSL \(https\)](#) for [Transport Level Security](#).
 - Select [None](#) for [Message Level Security](#).
 - Select the [User ID/Password](#) checkbox under [Transport Channel Authentication](#) in the [Authentication Method](#) section.
 - Add both standard and previously created domain systems.
 - Activate the domain.
5. Create Logon Data.
 - a. Go to ► [Service Administration](#) ► [Logon Data Management](#) ► and create new logon data using the P-user credentials for CPI systems.
6. Create Integration Scenario Configuration.
 - a. Go to ► [Service Administration](#) ► [Integration Scenario Configuration](#) ► [Create](#) ► to create a service group connection.

- b. Add [Actors](#), with the first being the system default and the second from the created domain system.
 - c. Select a one-way [Connection Type](#) and [Service Group](#) accordingly.
 - d. Assign the logon data to the service group connection.
 - e. [Activate](#) and [Release](#) the integration scenario configuration.
 - f. Verify the successful release status in [Config. State](#) field.
7. Configure the Local System.
 - a. Proceed to the system you want to configure to SOAMANAGER and choose the mode as [Local View](#).
8. Verify Web Service Configuration.
 - a. Go to ► [Technical Administration](#) ► [Web Service Configuration](#) ► and verify whether the configuration has been created.
9. Configure the Receiver.
 - a. Go to ► [Service Administration](#) ► [Logical Determination of Receiver using Service Groups](#) ► and create a new one with service group and destination IBC reference.

You can add routing details to configure when to trigger the SOAP notification to the configuration.

3 Integrate Service Contracts with S/4HANA

This document describes how to integrate SAP Service Cloud Version 2 with SAP S/4HANA.

SAP does not deliver the configuration steps as they are customer-specific, and the customer must complete those. This document describes the general configuration steps to manually set up the configuration within the existing system landscape.

3.1 Prerequisites

You have access to the SAP Service Cloud Version 2 system. This includes:

- The necessary permissions to use the `sap.crm.service.serviceContractService` business service.
- Access to the Service Contracts application.

You have access to the SAP Cloud Integration system. This includes:

- If you are not using a client certificate for authentication in SAP Cloud Integration, a business user with the required permissions for `serviceContractService` must be configured in Cloud Integration.
- Cloud Connector must be set up to enable communication between SAP Cloud Integration and the SAP S/4HANA system.

3.2 Configuration Steps for End-to-End Replication of Service Contracts

The following sections describe all settings required for this scope item.

3.2.1 Configuration in SAP Service Cloud Version 2

Prerequisites

1. Ensure you are scoped in with the [sap.crm.service.serviceContractService](#) business service and have the [Service Contracts](#) in your applications list.

2. If not using a client certificate for configuration in SAP Cloud Integration, a business user scoped in with [serviceContractService](#) is required and needs to be configured in SAP Cloud Integration.

Procedure

1. Go to your user profile and select: ► [System Settings](#) ► [All Settings](#) ► [Communication Systems](#) ►.
2. Select [+ \(Create\)](#) to create a communication system with the ID of the SAP S/4HANA Cloud Public Edition Private Edition.
 - a. Enter [Display ID](#).
 - b. Enter [Description](#).
 - c. Enter [Technical ID](#), if required.
3. Configure the inbound and outbound settings of the communication system. For the inbound settings, maintain the user name and password. For the outbound settings, maintain the required protocol and provide the CPI tenant host name where the initial load iFlow is deployed. Additionally, update the authentication method by maintaining the appropriate user name and password.
4. Save your changes.
5. Go to your user profile and select: ► [Settings](#) ► [All Settings](#) ► [Communication Configuration](#) ►.
6. Provide a communication configuration name, select the communication system created earlier, and keep the Value Mapping Group field empty for now.
7. In the [Asynchronous Inbound Configurations](#) section, search for and add [Replicate Service Contract from External System](#).
8. In the [Scheduled Asynchronous Outbound Configurations](#) section, search for and add [Schedule Service Contract Replication from External System](#).

To trigger the initial load iFlow, schedule it from the Schedule Asynchronous Outbound Configurations section. Click the Job Schedule action in this section and schedule it as an Immediate Run or One-Time Run under Run Details, then save. The job will execute and create the corresponding outbound and inbound message requests. To view the messages, open the Message Monitor from System Settings and check the processed messages.

Note

Recurring Run scheduling is not supported.

9. Go to ► [CPI Monitor](#) ► [Integrations and APIs](#) ► [Security Material](#) ► [Create User Credentials](#) ►.
10. You require three user credentials for the initial load iFlow to run.
11. Create S/4 OData access credentials using a technical user name and password.
12. Create user credentials for Service Cloud using a business user name and password.
13. Create user credentials for the Connector service using a technical user name and password, which should be the same as the one used in the communication system.


3.2.2 Configuration in SAP Cloud Integration

Prerequisites

Ensure cloud connector configuration is set up to connect between SAP Cloud Integration and the SAP S/4HANA Cloud Public Edition Private Edition.

Procedure

Configure the two iflows present in the package *SAP Service Cloud Integration with SAP S/4HANA*.

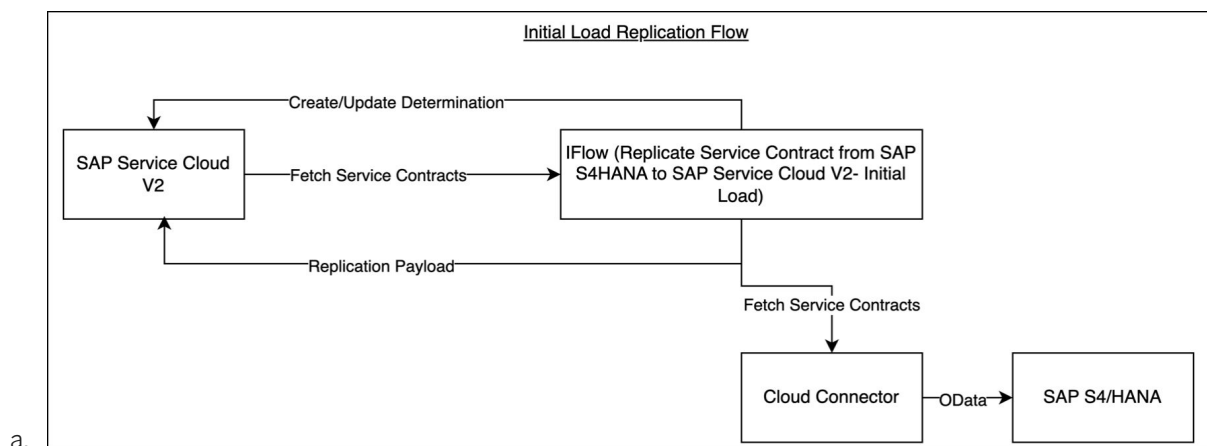

Replicate Service Contract from SAP S4HANA to SAP Service Cloud V2- Initial Load


Name	Description	Default Value
S4_host_URL	Base URL of the SAP S/4HANA system from which Service Contracts are read.	http://tenant.wdf.sap.corp:8080/
location_id	Logical location identifier used for routing or tenant-specific processing. Optional parameter.	
S4_credential_name	Credential artifact in SAP Cloud Integration used to authenticate to SAP S/4HANA OData services..	S4_CredentialName
SAP Service Cloud Base URL	Base URL of the SAP Service Cloud tenant used for Service Contract replication.	https://tenant.cxm-salescloud.com/
Credential Name	Credential artifact in SAP Cloud Integration for authenticating to SAP Service Cloud.	ServiceCloudCredentials

Name	Description	Default Value
sap-client	SAP client number used for communication with the SAP S/4HANA system.	sap-client=100
Timeout	Timeout value (in seconds) for synchronous calls to backend systems.	
P_ExtensionEnabled	Flag to enable or disable custom extension logic during Service Contract processing.	
Extension Address	Relative endpoint for custom extension implementation, used only if extensions are enabled.	/s4/c4c/serviceContractExit
displayId	Service Contract display ID used for testing or selective processing.	
lifeCycleStatus	Lifecycle status of the Service Contract (for example, Active).	A
serviceContractType	Type of Service Contract to be processed by the integration flow.	SC
S4_ODATA_AUTH	Authentication mechanism used for SAP S/4HANA OData service calls.	Basic
CNS_AUTH	Authentication mechanism used for SAP Service Cloud CNS API calls	Basic
CNS_ADDRESS	API endpoint path for Service Contract staging service in SAP Service Cloud (Pre-Production).	/sap/c4c/api/v1/service-contract-service/servicecontractspreprod
C4C_AUTH	Authorization model used by SAP Service Cloud for inbound requests.	RoleBased
C4C_USER_ROLE	Required SAP Service Cloud role to authorize message processing.	ESBMessaging.send
Timeout_ms	Timeout value (in milliseconds) for long-running or asynchronous operations.	12000
Connector Credential Name	Credential used by SAP Cloud Connector for outbound connectivity to SAP Service Cloud.	CloudConnectorCredentials
ReceiverCommSysDisplayId	Display ID of the receiver communication system representing SAP Service Cloud.	sap_cloud_crm
SenderCommSysDisplayId	Display ID of the sender communication system representing SAP S/4HANA	S4_DisplayId
filter	OData filter condition used to select Service Contracts based on creation date.	ServiceDocCreationDateTime ge 2025-12-22T00:00:00Z

Name	Description	Default Value
ServiceDocCreationDateTime	Reference timestamp used for Service Contract filtering and comparison logic.	2022-03-05T01:11:02Z
query	OData query defining selected fields, expansions, filters, and count logic for Service Contract retrieval from SAP S/4HANA	Refer to the note below.

Note

For an OData query that defines selected fields, expansions, filters, and count logic for retrieving service contracts from SAP S/4HANA, use this default value: \$select=ServiceContract, ServiceContractType, ServiceContractDescription, Language, ServiceContractStatus, SrvcContrBillingStatus, SrvcDocRejectionStatus, ServiceContractCanclnSts, SalesOrganizationOrgUnitID, DistributionChannel, Division, SalesGroupOrgUnitID, SalesOfficeOrgUnitID, ServiceDocNetAmount, ServiceDocTaxAmount, ServiceDocGrossAmount, TransactionCurrency, SoldToParty, ContactPersonBusinessPartnerId, BillToParty, ShipToParty, PayerParty, RespEmployeeBusinessPartnerId, ServiceOrganization, ServiceContractStartDateTime, ServiceContractEndDateTime&\$expand=_Item(\$select=ServiceContract, ServiceContractItem, ServiceContractItemDescription, Language, ServiceContractItemStatus, ServiceContractItemCategory, Product, SalesOrganization, DistributionChannel, Division, SalesGroup, SalesOffice, ServiceDocumentItemNetAmount, ServiceDocumentItemTaxAmount, ServiceDocItemGrossAmount, ServiceContractItemQuantity, SrvcContrItemQtyUnitISOCode, ServiceContrItemStartDateTime, ServiceContrItemEndDateTime, SoldToParty, ContactPersonBusinessPartnerId, ShipToParty, BillToParty, PayerParty, RespEmployeeBusinessPartnerId;\$expand=_ReferenceObject,_ItemProduct)&\$filter={\$property.filter}&\$count=true

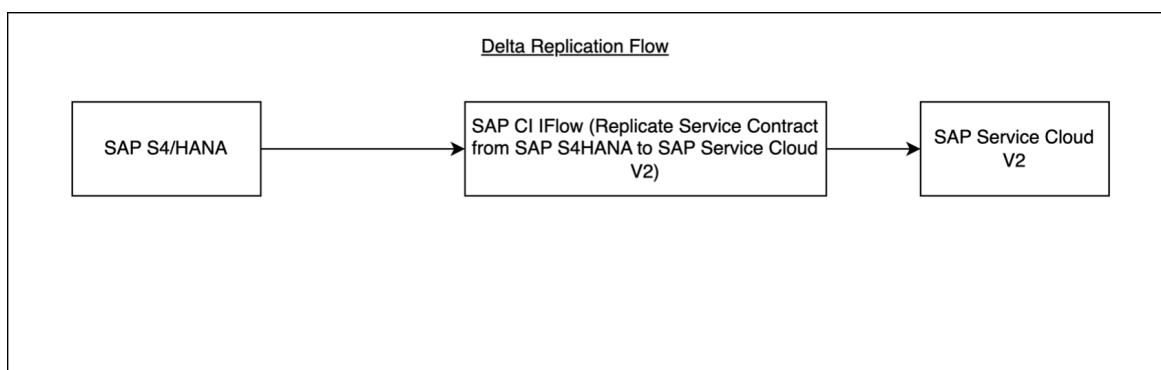

b.

Replicate Service Contract from SAP S/4HANA to SAP Service Cloud Version 2.

Parameter Name	Description	Default/Example Value
SAP Service Cloud Base URL	Base URL of the SAP Service Cloud tenant used to replicate Service Contracts.	https://tenant.cxm-salescloud.com/

Parameter Name	Description	Default/Example Value
Credential Name	Name of the credential artifact in SAP Cloud Integration used to authenticate with SAP Service Cloud.	credentialName
S4_host_URL	Base URL of the SAP S/4HANA system from which Service Contracts are read.	http://s4hana.wdf.sap.corp:8080
location_id	Logical location identifier used for tenant-specific or routing-based processing. Leave blank if not required	(Optional)
S4_Credentials_name	Credential artifact in SAP Cloud Integration for authenticating to SAP S/4HANA OData services	S4_CredentialName
CNS_HOST_URL	Base host URL of SAP Service Cloud used for CNS API calls.	https://tenant.cxm-salescloud.com/
CNS_Credentials	Credential artifact used for authenticating CNS / Service Cloud service calls.	CNS_CredentialName
Extension Address	Relative endpoint for custom extension logic. Used only if extension handling is enabled.	/s4/c4c/serviceContractExit
sap-client	SAP client number used for S/4HANA communication.	sap-client=100
S4 ODATA AUTH	Authentication type used for S/4HANA OData service calls.	Basic
CNS AUTH	Authentication mechanism used for SAP Service Cloud CNS API calls.	Basic
Timeout	Timeout value (in seconds) for synchronous integration calls.	1
Timeout_ms	Timeout value (in milliseconds) for long-running or asynchronous operations.	60000
IFlow Address	Relative endpoint address of the integration flow exposed in SAP Cloud Integration.	/s4/cns/replicateServiceContract
Authorization	Authorization model used by SAP Service Cloud for inbound requests.	RoleBased
User Role	Required SAP Service Cloud role to authorize message processing.	ESBMessaging.send
ReceiverCommSysDisplayId	Display ID of the receiver communication system representing SAP Service Cloud.	sap_cloud_crm
SenderCommSysDisplayId	Display ID of the sender communication system representing SAP S/4HANA.	S4_DisplayID

Parameter Name	Description	Default/Example Value
P_ExtensionEnabled	Flag to enable or disable custom extension logic during Service Contract replication.	FALSE
Proxy Type	Proxy type used for outbound connectivity (for example, via SAP Cloud Connector).	sapcc

3.2.3 Configuration Steps for SOA Manager in S4 HANA

Prerequisites

Ensure you have access to the necessary WSDL files and the SAP S/4HANA backend.

Procedure

1. Prepare the WSDL File.
 - a. Go to **Monitor** > **Manage Integration Content** to copy the URL from CPI.
 - b. Add the URL to the WSDL file present in the folder.
- Note**

The WSDL in the folder is only for ServiceOrderNotification_Out. Other WSDLs can be downloaded from the S4 HANA backend using T-code: SPROXY. Alternatively, download the WSDL from CPI and make changes in service, binding, and URL.
2. Configure the Central System.
 - a. In the S4 HANA central system's backend, go to T-code: SOAMANAGER.
 - b. Choose the mode as *central view*.
 3. Create a Domain System.
 - a. Go to **Technical Administration** > **Domain Systems** and upload the WSDL.
 - b. Save the changes.
 4. Create a Domain.
 - a. Go to **Technical Administration** > **Domains**. During creation, assign a random weight and configure as follows:
 - Select *SSL (https)* for *Transport Level Security*.
 - Select *None* for *Message Level Security*.
 - Select the *User ID/Password* checkbox under *Transport Channel Authentication* in the *Authentication Method* section.

- Add both standard and previously created domain systems.
 - Activate the domain.
5. Create Logon Data.
 - a. Go to ► [Service Administration](#) ► [Logon Data Management](#) ► and create new logon data using the P-user credentials for CPI systems.
 6. Create Integration Scenario Configuration.
 - a. Go to ► [Service Administration](#) ► [Integration Scenario Configuration](#) ► [Create](#) ► to create a service group connection.
 - b. Add [Actors](#), with the first being the system default and the second from the created domain system.
 - c. Select a one-way [Connection Type](#) and [Service Group](#) accordingly.
 - d. Assign the logon data to the service group connection.
 - e. [Activate](#) and [Release](#) the integration scenario configuration.
 - f. Verify the successful release status in [Config. State](#) field.
 7. Configure the Local System.
 - a. Proceed to the system you want to configure to SOAMANAGER and choose the mode as [Local View](#).
 8. Verify Web Service Configuration.
 - a. Go to ► [Technical Administration](#) ► [Web Service Configuration](#) ► and verify whether the configuration has been created.
 9. Configure the Receiver.
 - a. Go to ► [Service Administration](#) ► [Logical Determination of Receiver using Service Groups](#) ► and create a new one with service group CO_CRMS4_SRV_SC_OUT and destination IBC reference.

You can add routing details to configure when to trigger the SOAP notification to the configuration.

Important Disclaimers and Legal Information

Hyperlinks

Some links are classified by an icon and/or a mouseover text. These links provide additional information.

About the icons:

- Links with the icon  : You are entering a Web site that is not hosted by SAP. By using such links, you agree (unless expressly stated otherwise in your agreements with SAP) to this:
 - The content of the linked-to site is not SAP documentation. You may not infer any product claims against SAP based on this information.
 - SAP does not agree or disagree with the content on the linked-to site, nor does SAP warrant the availability and correctness. SAP shall not be liable for any damages caused by the use of such content unless damages have been caused by SAP's gross negligence or willful misconduct.
- Links with the icon  : You are leaving the documentation for that particular SAP product or service and are entering an SAP-hosted Web site. By using such links, you agree that (unless expressly stated otherwise in your agreements with SAP) you may not infer any product claims against SAP based on this information.

Videos Hosted on External Platforms

Some videos may point to third-party video hosting platforms. SAP cannot guarantee the future availability of videos stored on these platforms. Furthermore, any advertisements or other content hosted on these platforms (for example, suggested videos or by navigating to other videos hosted on the same site), are not within the control or responsibility of SAP.

Beta and Other Experimental Features

Experimental features are not part of the officially delivered scope that SAP guarantees for future releases. This means that experimental features may be changed by SAP at any time for any reason without notice. Experimental features are not for productive use. You may not demonstrate, test, examine, evaluate or otherwise use the experimental features in a live operating environment or with data that has not been sufficiently backed up.

The purpose of experimental features is to get feedback early on, allowing customers and partners to influence the future product accordingly. By providing your feedback (e.g. in the SAP Community), you accept that intellectual property rights of the contributions or derivative works shall remain the exclusive property of SAP.

Example Code

Any software coding and/or code snippets are examples. They are not for productive use. The example code is only intended to better explain and visualize the syntax and phrasing rules. SAP does not warrant the correctness and completeness of the example code. SAP shall not be liable for errors or damages caused by the use of example code unless damages have been caused by SAP's gross negligence or willful misconduct.

Bias-Free Language

SAP supports a culture of diversity and inclusion. Whenever possible, we use unbiased language in our documentation to refer to people of all cultures, ethnicities, genders, and abilities.

© 2026 SAP SE or an SAP affiliate company. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company. The information contained herein may be changed without prior notice.

Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.

These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies.

Please see <https://www.sap.com/about/legal/trademark.html> for additional trademark information and notices.

