

In [1]:

```
import numpy as np
import pandas as pd
from sklearn import preprocessing
import matplotlib.pyplot as plt
import seaborn as sns
sns.set(style="white")
sns.set(style="whitegrid",color_codes=True)
import warnings
warnings.simplefilter(action='ignore')
```

In [2]:

```
train_df=pd.read_csv(r"C:\Users\pucha\Downloads\train.gender_submission.csv")
train_df
```

Out[2]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fa
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.25
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.28
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.92
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.10
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.05
...
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.00
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.00
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.45
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.00
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.75

891 rows × 12 columns




In [3]:

```
test_df=pd.read_csv(r"C:\Users\pucha\Downloads\train.gender_submission.csv")
test_df
```

Out[3]:

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fa
0	1	0	3Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.25
1	2	1	1Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.28
2	3	1	3Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.92
3	4	1	1Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.10
4	5	0	3Allen, Mr. William Henry	male	35.0	0	0	373450	8.05
...
886	887	0	2Montvila, Rev. Juozas	male	27.0	0	0	211536	13.00
887	888	1	1Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.00
888	889	0	3Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.45
889	890	1	1Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.00
890	891	0	3Dooley, Mr. Patrick	male	32.0	0	0	370376	7.75

891 rows × 12 columns



In [4]:

```
train_df.shape
```

Out[4]:

(891, 12)

In [6]:

```
train_df.head()
```

Out[6]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500

In [7]:

```
test_df.shape
```

Out[7]:

(891, 12)

In [8]:

```
train_df.describe
```

Out[8]:

<bound method NDFrame.describe of				PassengerId	Survived	Pclass
0	1	0	3	\		
1	2	1	1			
2	3	1	3			
3	4	1	1			
4	5	0	3			
..			
886	887	0	2			
887	888	1	1			
888	889	0	3			
889	890	1	1			
890	891	0	3			

				Name	Sex	Age	S
ibSp							
0				Braund, Mr. Owen Harris	male	22.0	
1	\						
1				Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	
1							
2				Heikkinen, Miss. Laina	female	26.0	
0							
3				Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	
1							
4				Allen, Mr. William Henry	male	35.0	
0							
..				
...							
886				Montvila, Rev. Juozas	male	27.0	
0							
887				Graham, Miss. Margaret Edith	female	19.0	
0							
888				Johnston, Miss. Catherine Helen "Carrie"	female	NaN	
1							
889				Behr, Mr. Karl Howell	male	26.0	
0							
890				Dooley, Mr. Patrick	male	32.0	
0							

Parch		Ticket	Fare	Cabin	Embarked
0	0	A/5 21171	7.2500	NaN	S
1	0	PC 17599	71.2833	C85	C
2	0	STON/O2. 3101282	7.9250	NaN	S
3	0	113803	53.1000	C123	S
4	0	373450	8.0500	NaN	S
..
886	0	211536	13.0000	NaN	S
887	0	112053	30.0000	B42	S
888	2	W./C. 6607	23.4500	NaN	S
889	0	111369	30.0000	C148	C
890	0	370376	7.7500	NaN	Q

[891 rows x 12 columns]>

In [9]:

```
train_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
```

```
RangeIndex: 891 entries, 0 to 890
```

```
Data columns (total 12 columns):
```

#	Column	Non-Null Count	Dtype
0	PassengerId	891 non-null	int64
1	Survived	891 non-null	int64
2	Pclass	891 non-null	int64
3	Name	891 non-null	object
4	Sex	891 non-null	object
5	Age	714 non-null	float64
6	SibSp	891 non-null	int64
7	Parch	891 non-null	int64
8	Ticket	891 non-null	object
9	Fare	891 non-null	float64
10	Cabin	204 non-null	object
11	Embarked	889 non-null	object

```
dtypes: float64(2), int64(5), object(5)
```

```
memory usage: 83.7+ KB
```

In [10]:

```
test_df.describe
```

Out[10]:

<bound method NDFrame.describe of				PassengerId	Survived	Pclass
0	1	0	3	\		
1	2	1	1			
2	3	1	3			
3	4	1	1			
4	5	0	3			
..			
886	887	0	2			
887	888	1	1			
888	889	0	3			
889	890	1	1			
890	891	0	3			

				Name	Sex	Age	S
ibSp							
0				Braund, Mr. Owen Harris	male	22.0	
1	\						
1				Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	
1							
2				Heikkinen, Miss. Laina	female	26.0	
0							
3				Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	
1							
4				Allen, Mr. William Henry	male	35.0	
0							
..				
...							
886				Montvila, Rev. Juozas	male	27.0	
0							
887				Graham, Miss. Margaret Edith	female	19.0	
0							
888				Johnston, Miss. Catherine Helen "Carrie"	female	NaN	
1							
889				Behr, Mr. Karl Howell	male	26.0	
0							
890				Dooley, Mr. Patrick	male	32.0	
0							

Parch		Ticket	Fare	Cabin	Embarked
0	0	A/5 21171	7.2500	NaN	S
1	0	PC 17599	71.2833	C85	C
2	0	STON/O2. 3101282	7.9250	NaN	S
3	0	113803	53.1000	C123	S
4	0	373450	8.0500	NaN	S
..
886	0	211536	13.0000	NaN	S
887	0	112053	30.0000	B42	S
888	2	W./C. 6607	23.4500	NaN	S
889	0	111369	30.0000	C148	C
890	0	370376	7.7500	NaN	Q

[891 rows x 12 columns]>

In [11]:

```
test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     891 non-null   int64
1   Survived        891 non-null   int64
2   Pclass         891 non-null   int64
3   Name            891 non-null   object
4   Sex             891 non-null   object
5   Age            714 non-null   float64
6   SibSp          891 non-null   int64
7   Parch          891 non-null   int64
8   Ticket         891 non-null   object
9   Fare           891 non-null   float64
10  Cabin          204 non-null   object
11  Embarked       889 non-null   object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

In [12]:

```
train_df.isnull().sum()
```

Out[12]:

```
PassengerId    0
Survived        0
Pclass         0
Name           0
Sex            0
Age           177
SibSp          0
Parch          0
Ticket         0
Fare           0
Cabin         687
Embarked       2
dtype: int64
```


In [13]:


```
test_df.isnull().sum()
```

Out[13]:

```
PassengerId    0
Survived        0
Pclass          0
Name            0
Sex             0
Age            177
SibSp           0
Parch           0
Ticket          0
Fare            0
Cabin          687
Embarked        2
dtype: int64
```

In [14]:

```
ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='cyan',alpha=0.6)
train_df["Age"].plot(kind='density',color='teal')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

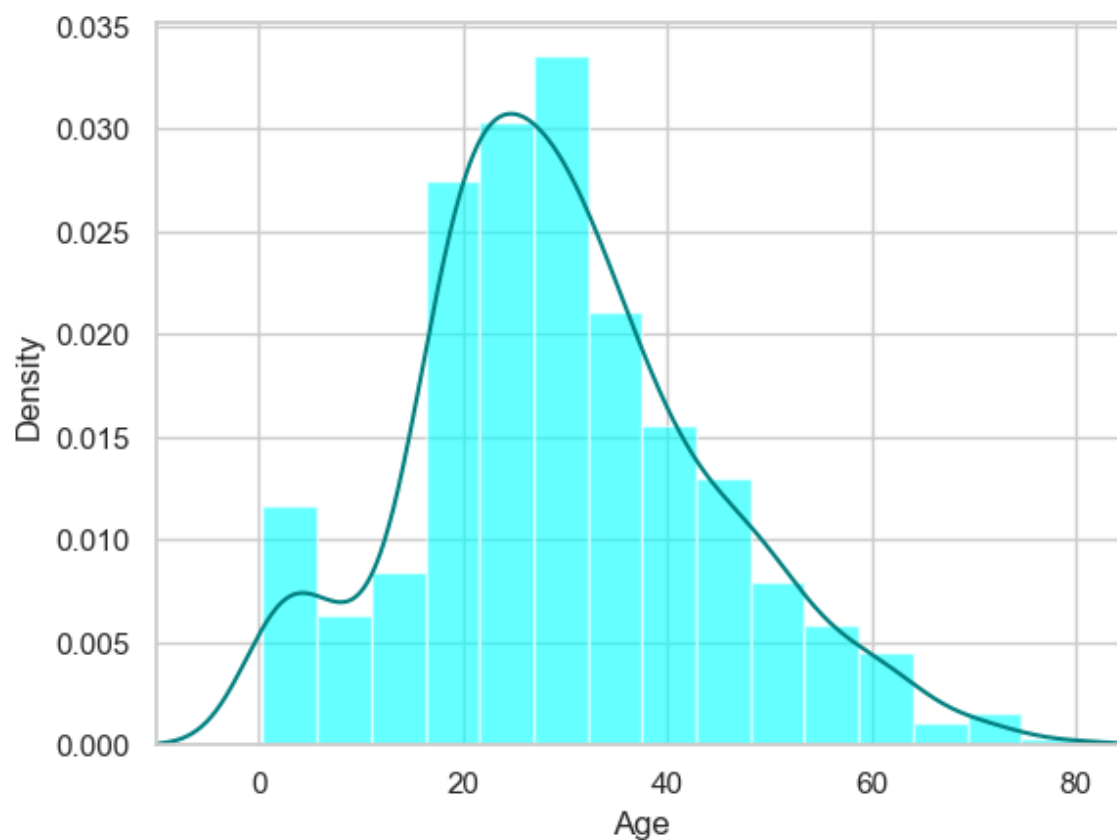

In [15]:

```
print(train_df["Age"].mean(skipna=True))  
print(train_df["Age"].median(skipna=True))
```

29.69911764705882
28.0

In [16]:

```
print((train_df['Cabin'].isnull().sum()/train_df.shape[0]*100))
```

77.10437710437711

In [17]:

```
print((train_df['Embarked'].isnull().sum()/train_df.shape[0]*100))
```

0.22446689113355783

In [18]:

```
print('Boarded passengers grouped by part of embarkation (C = Cherbourg,Q=Queenstown,')
print(train_df['Embarked'].value_counts())
sns.countplot(x='Embarked',data=train_df,palette='Set2')
plt.show()
```

Boarded passengers grouped by part of embarkation (C = Cherbourg,Q=Queenstown,S=Southampton):


Embarked

S 644

C 168

Q 77

Name: count, dtype: int64

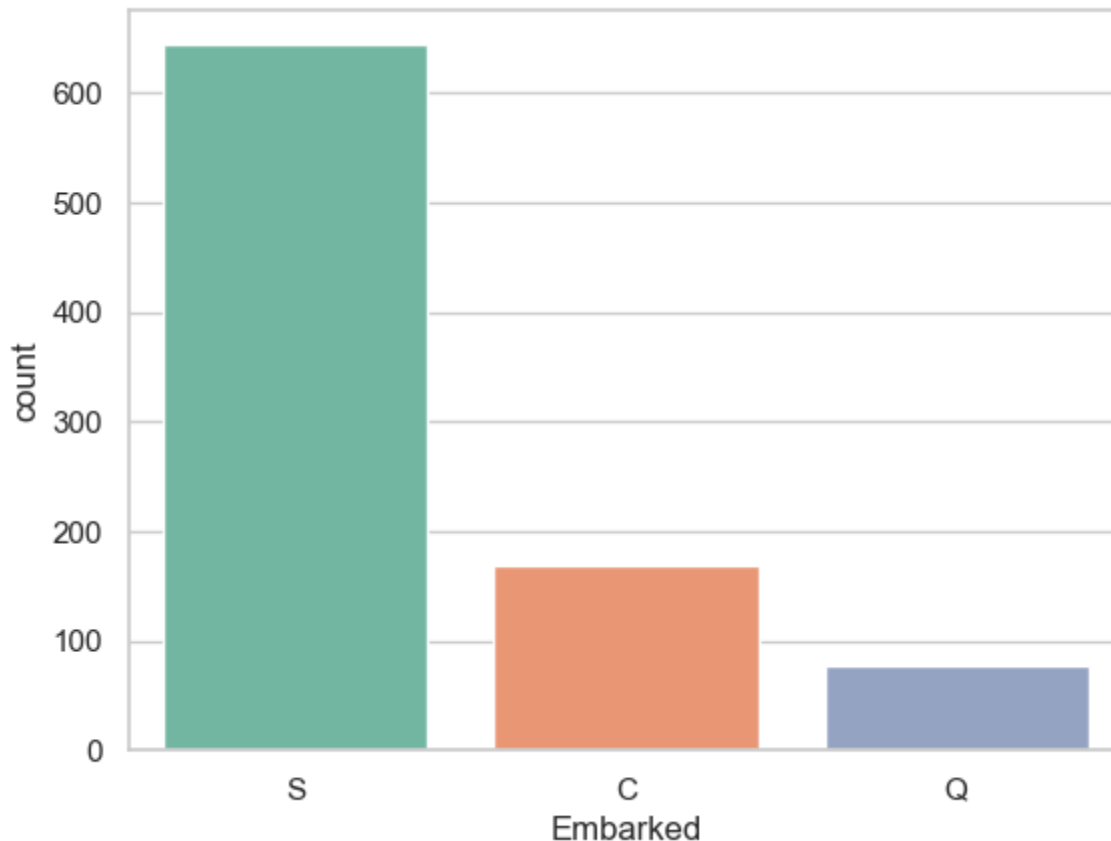

In [19]:

```
print(train_df['Embarked'].value_counts().idxmax())
```

S

In [20]:

```
train_data=train_df.copy()
train_data["Age"].fillna(train_df["Age"].median(skipna=True),inplace=True)
train_data["Embarked"].fillna(train_df["Embarked"].value_counts().idxmax(),inplace=True)
train_data.drop('Cabin',axis=1,inplace=True)
```

In [21]:

```
train_data.isnull().sum()
```

Out[21]:

```
PassengerId    0
Survived        0
Pclass          0
Name            0
Sex             0
Age            0
SibSp          0
Parch          0
Ticket         0
Fare           0
Embarked       0
dtype: int64
```

In [22]:


```
train_data.head()
```

Out[22]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500

In [23]:

```
plt.figure(figsize=(15,8))
ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='teal',alpha=0.6)
train_df["Age"].plot(kind='density',color='teal')
ax=train_data["Age"].hist(bins=15,density=True,stacked=True,color='orange',alpha=0.5)
train_data["Age"].plot(kind='density',color='orange')
ax.legend(["Raw Age","Adjusted Age"])
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

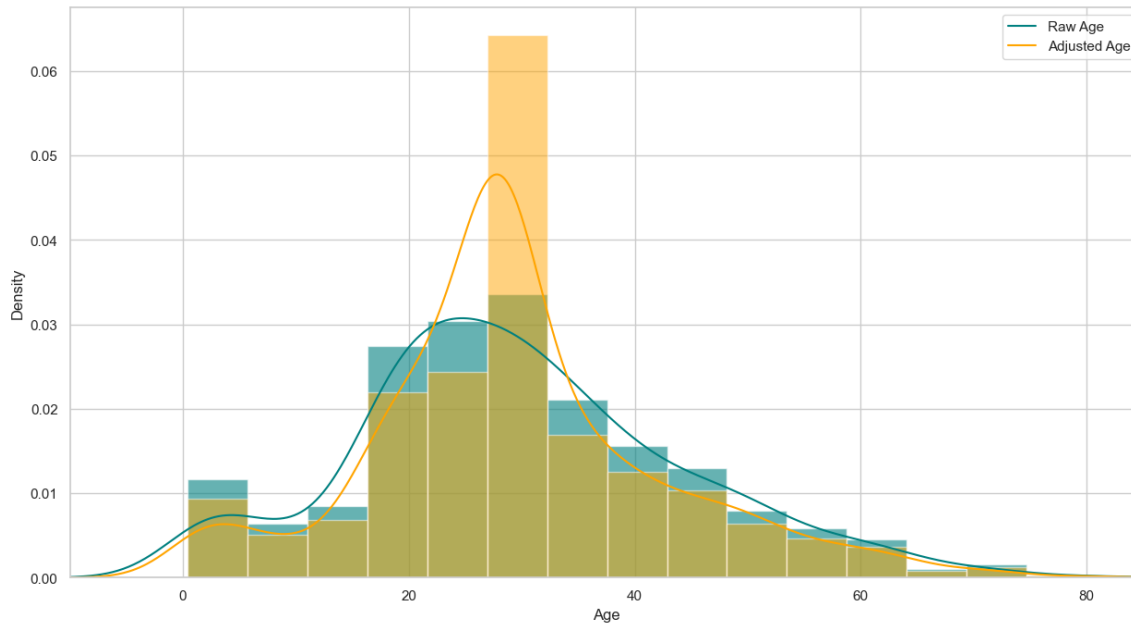

In [24]:

```
train_data['TravelAlone']=np.where((train_data["SibSp"]+train_data["Parch"])>0,0,1)
train_data.drop('SibSp',axis=1,inplace=True)
train_data.drop('Parch',axis=1,inplace=True)
```

In [25]:

```

training=pd.get_dummies(train_data,columns=["Pclass", "Embarked", "Sex"])
training.drop("Sex_female",axis=1,inplace=True)
training.drop("PassengerId",axis=1,inplace=True)
training.drop("Name",axis=1,inplace=True)
training.drop("Ticket",axis=1,inplace=True)

final_train=training
final_train.head()

```

Out[25]:

	Survived	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embark
0	0	22.0	7.2500	0	False	False	True	False	
1	1	38.0	71.2833	0	True	False	False	True	
2	1	26.0	7.9250	1	False	False	True	False	
3	1	35.0	53.1000	0	True	False	False	False	
4	0	35.0	8.0500	1	False	False	True	False	

In [26]:

```
test_df.isnull().sum()
```

Out[26]:

```

PassengerId      0
Survived          0
Pclass           0
Name             0
Sex              0
Age             177
SibSp            0
Parch            0
Ticket           0
Fare             0
Cabin           687
Embarked         2
dtype: int64

```

In [27]:

```

test_data=test_df.copy()
test_data["Age"].fillna(train_df["Age"].median(skipna=True),inplace=True)
test_data["Fare"].fillna(train_df["Fare"].median(skipna=True),inplace=True)
test_data.drop('Cabin',axis=1,inplace=True)

test_data['TravelAlone']=np.where((test_data["SibSp"]+test_data["Parch"])>0,0,1)

test_data.drop("SibSp",axis=1,inplace=True)
test_data.drop("Parch",axis=1,inplace=True)

testing=pd.get_dummies(train_data,columns=["Pclass","Embarked","Sex"])
testing.drop("Sex_female",axis=1,inplace=True)
testing.drop("PassengerId",axis=1,inplace=True)
testing.drop("Name",axis=1,inplace=True)
testing.drop("Ticket",axis=1,inplace=True)

final_train=testing
final_train.head()

```

Out[27]:

	Survived	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embark
0	0	22.0	7.2500	0	False	False	True	False	
1	1	38.0	71.2833	0	True	False	False	True	
2	1	26.0	7.9250	1	False	False	True	False	
3	1	35.0	53.1000	0	True	False	False	False	
4	0	35.0	8.0500	1	False	False	True	False	

In []: