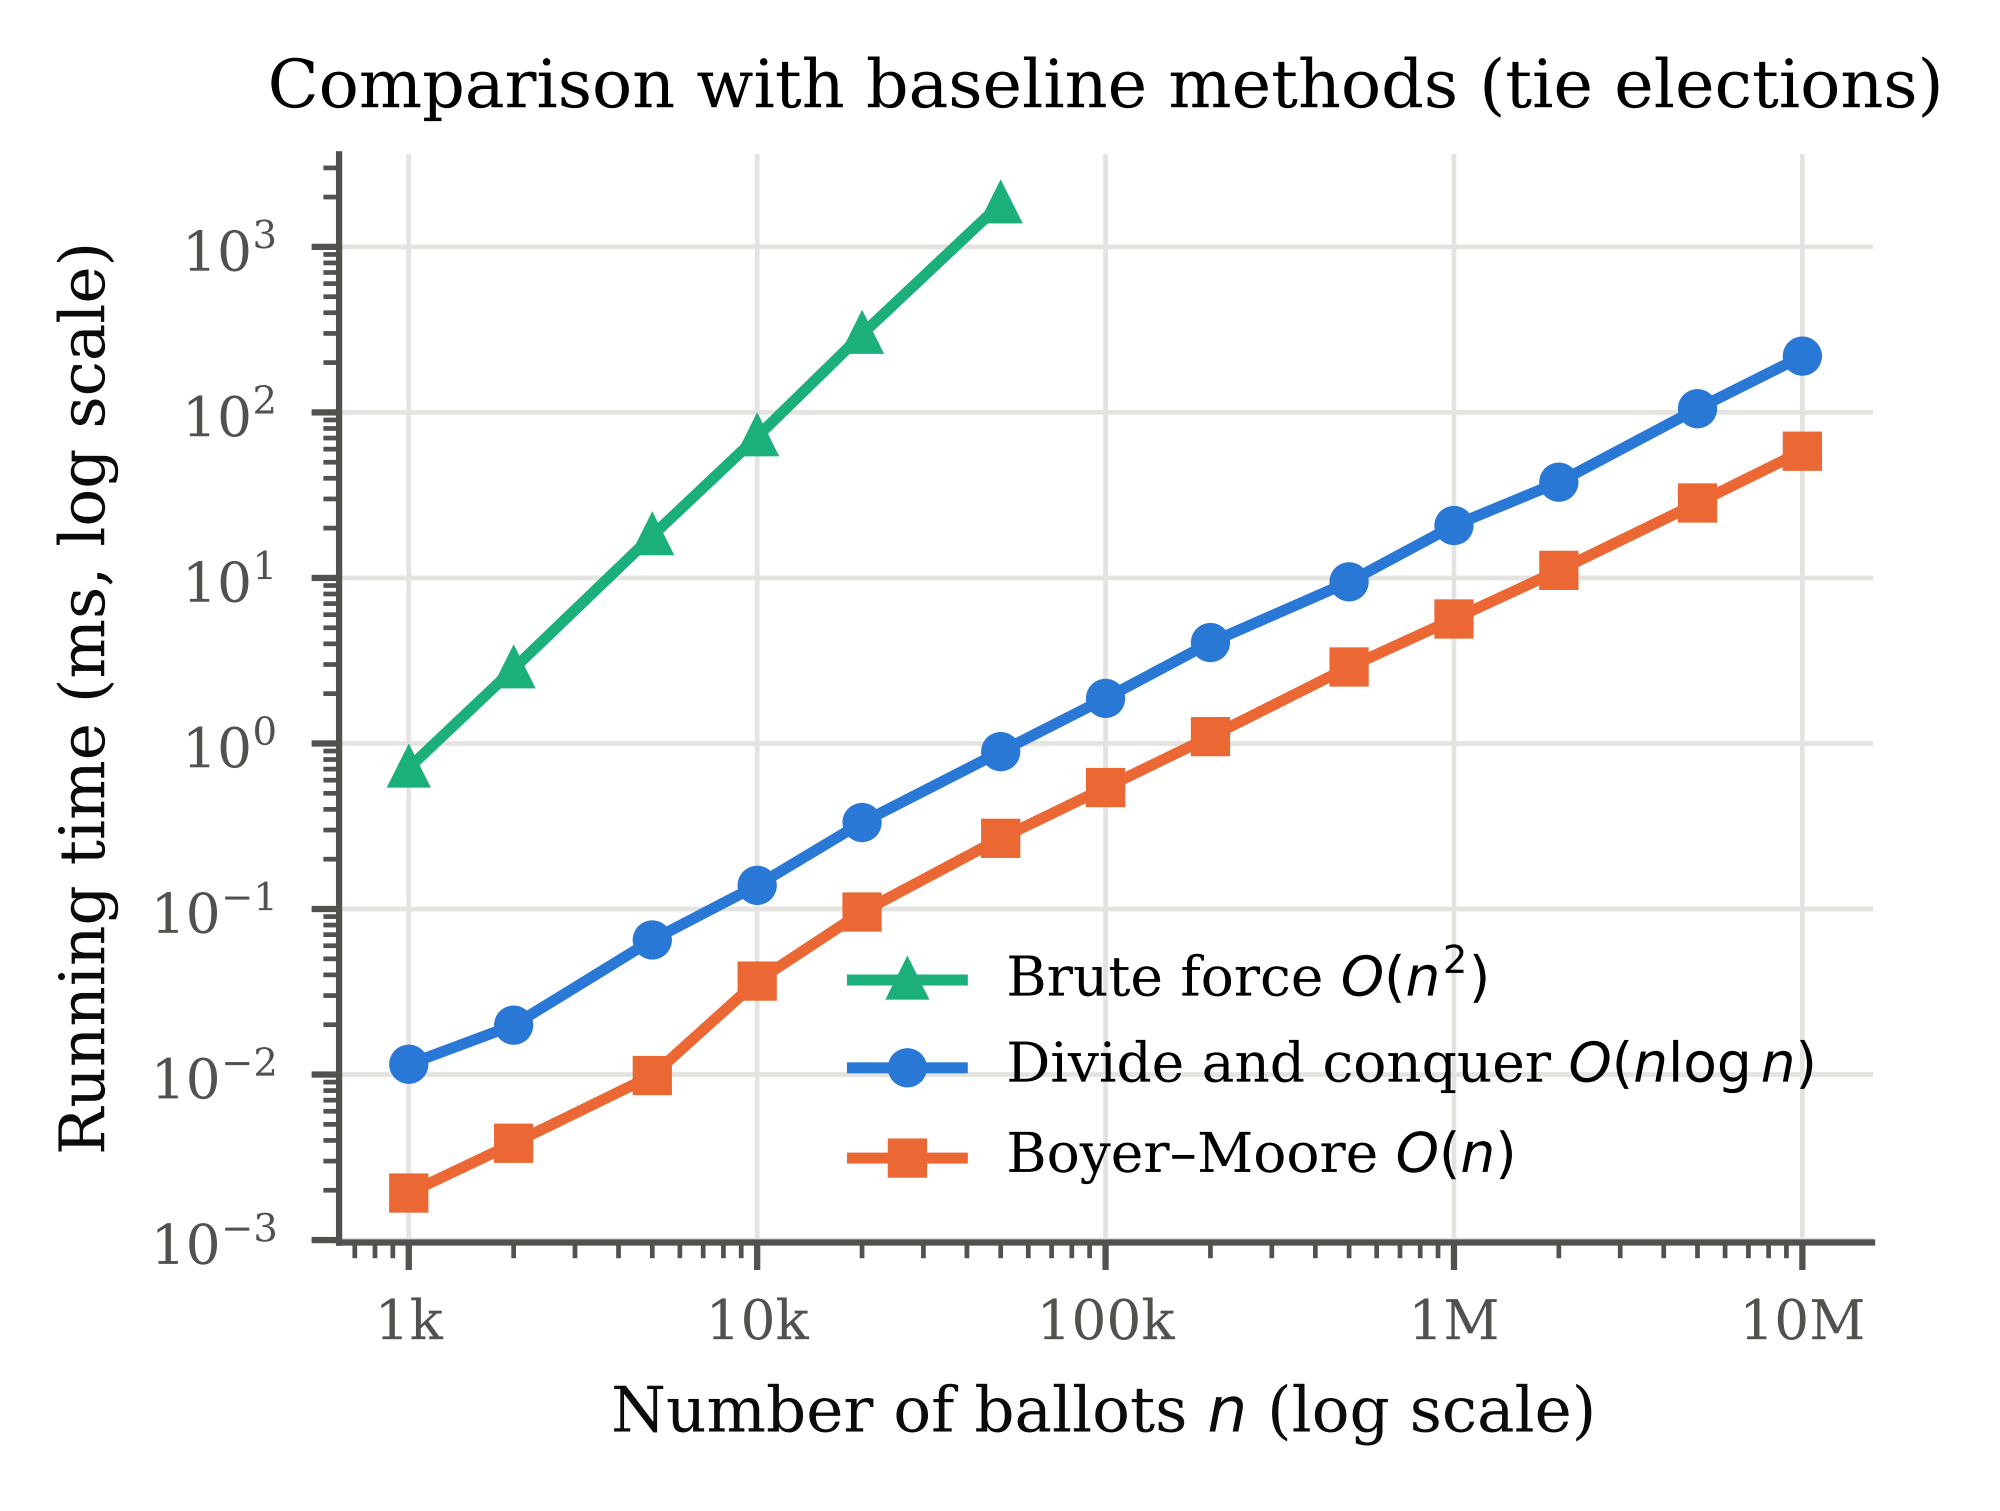
Comparison with baseline methods (tie elections)
Running time (ms, log scale)
$10^3$
$10^2$
$10^1$
$10^0$
$10^{-1}$
$10^{-2}$
$10^{-3}$
1k
10k
100k
1M
10M
Number of ballots $n$ (log scale)
Brute force $O(n^2)$
Divide and conquer $O(n \log n)$
Boyer–Moore $O(n)$