
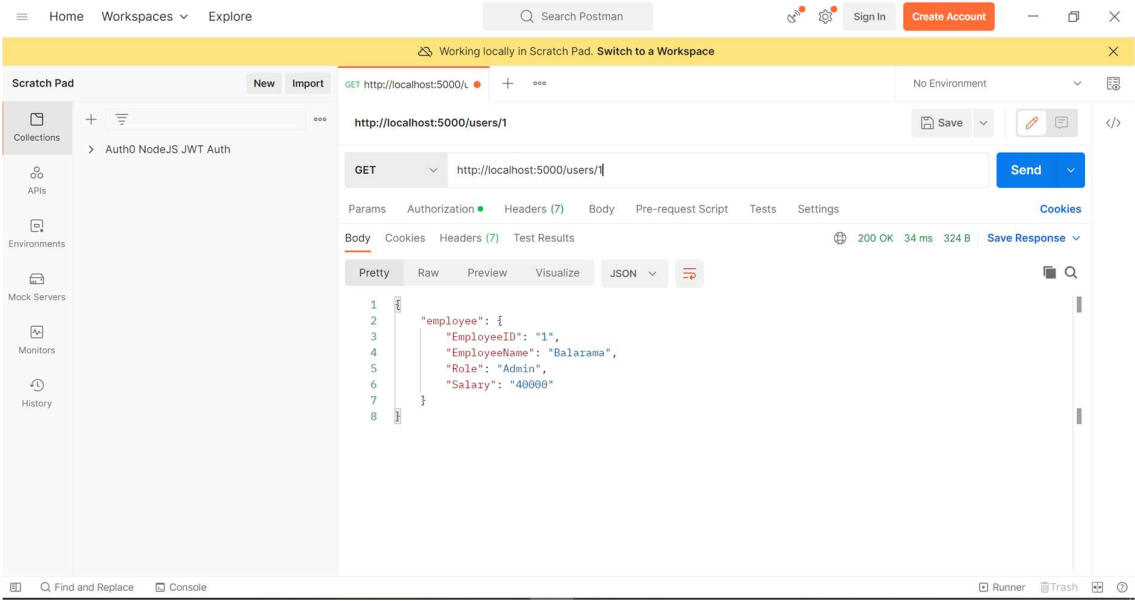


Mullapudi Sriganesh

Q48)

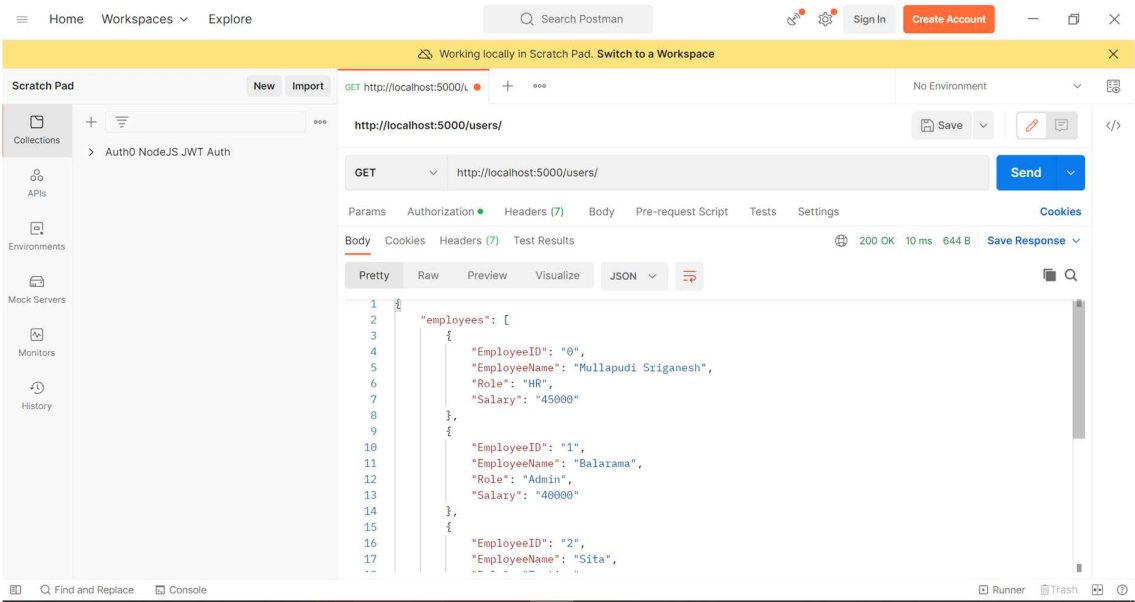

The screenshot shows the Visual Studio Code interface with the following components:

- EXPLORER:** Displays the project structure for 'FINAL48', including 'node_modules', 'routers', 'service', 'employees.js', 'foo.getempbyID.js', 'foo.getemployees.js', 'app.js', 'package-lock.json', and 'package.json'.
- EDITOR:** Shows the content of 'employees.js' with the following code:

```
17     "Role": "Testing",
18     "Salary": "25000",
19   },
20 },
21 {
22   "EmployeeID": "3",
23   "EmployeeName": "Krishna",
24   "Role": "Developer",
25   "Salary": "60000",
26 },
27 {
28   "EmployeeID": "4",
29   "EmployeeName": "Ramu",
30   "Role": "Manager",
31   "Salary": "65000",
32 }
33 ];
34 module.exports=employees;
```
- TERMINAL:** Shows the output of running 'nodemon app.js'. The output includes:

```
C:\Users\mullapudi.sriganesh\Downloads\Final48>nodemon app.js
[nodemon] 2.0.19
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,json
[nodemon] starting `node app.js`
Mr.Mullapudi Sriganesh all parameters running successfully, We are good to go
```