
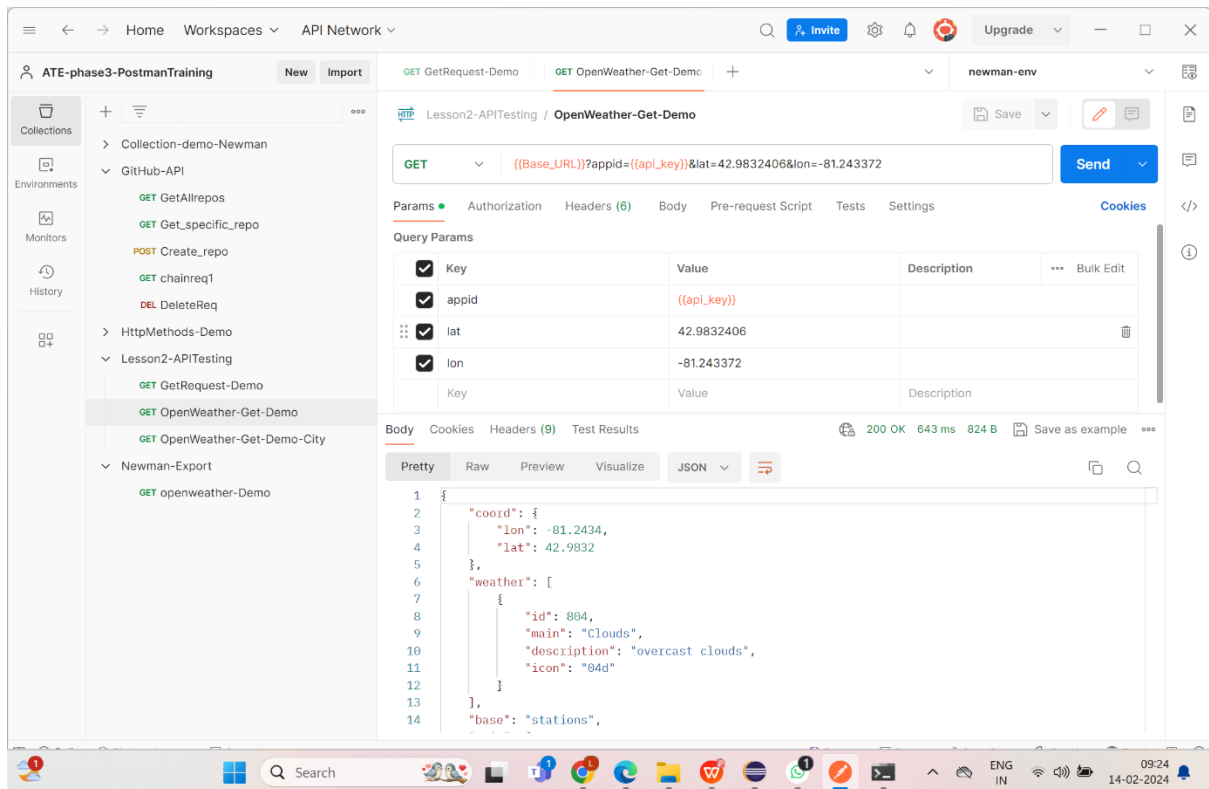


# Lesson End Project:

## Screenshots:

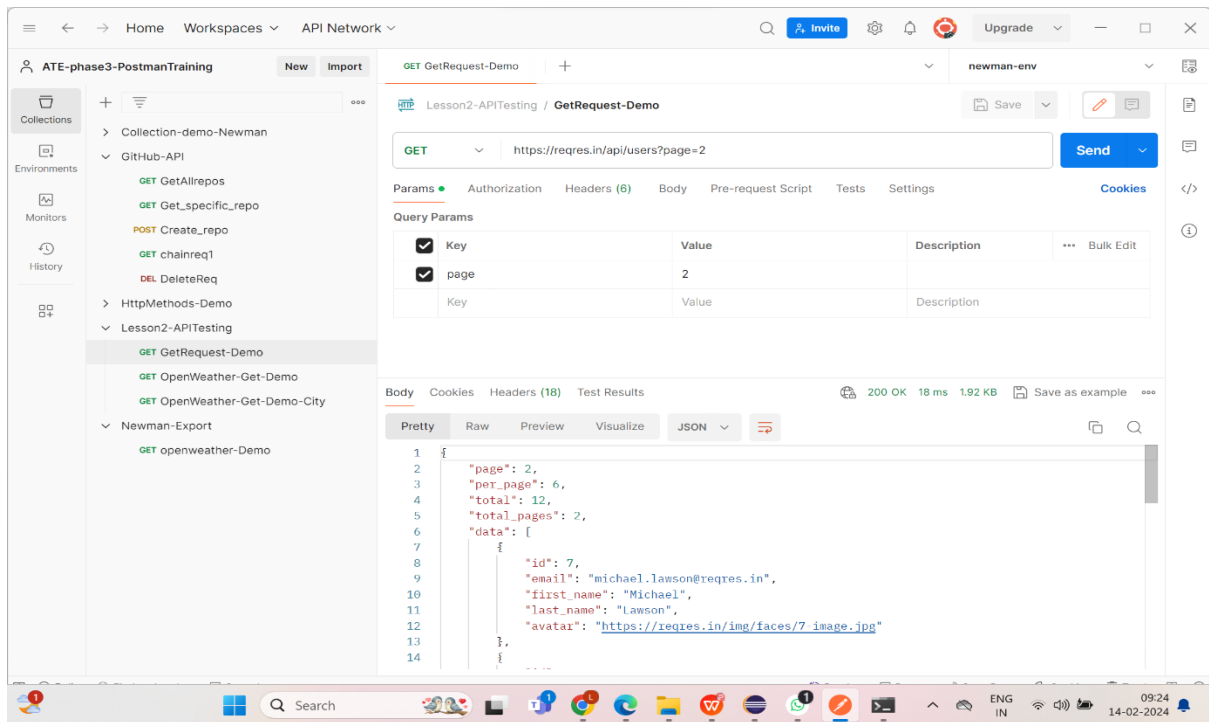

ATE-phase3-PostmanTraining

Lesson2-APITesting / OpenWeather-Get-Demo-City

GET

{{Base\_URL}}?appid={{api\_key}}&q={{City\_name}}

Send

Params Authorization Headers (6) Body Pre-request Script Tests Settings Cookies

Query Params

<input checked="" type="checkbox"/>	Key	Value	Description	Bulk Edit
<input checked="" type="checkbox"/>	appid	{{api_key}}		
<input checked="" type="checkbox"/>	q	{{City_name}}		
	Key	Value	Description	

Response

Click Send to get a response

ATE-phase3-PostmanTraining

newman-env

newman-env

Filter variables

	Variable	Type	Initial value	Current value	
<input checked="" type="checkbox"/>	City	default	London	London	
<input checked="" type="checkbox"/>	reponame	default		APITestPostMan802	
<input checked="" type="checkbox"/>	owner	default		SriharikotaLekhana	
	Add new variable				

Use variables to reuse values and protect sensitive data

Store sensitive data in variable type secret to keep its values masked on the screen. Learn more about [variable type](#). Work with the current value of a variable to prevent sharing sensitive values with your team. Learn more about [variable values](#).

