

WEEK – 5 - Microservices with Spring Boot 3 and Spring Cloud

Creating Microservices for account and loan

ACCOUNT :

//AccountApplication.java

```
package com.cognizant.account;
```

```
import org.springframework.boot.SpringApplication;
```

```
import org.springframework.boot.autoconfigure.SpringBootApplication;
```

```
@SpringBootApplication
```

```
public class AccountApplication {
```

```
    public static void main(String[] args) {
```

```
        SpringApplication.run(AccountApplication.class, args);
```

```
    }
```

```
}
```

//AccountController.java

```
package com.cognizant.account.controller;
```


```
import org.springframework.web.bind.annotation.*;
```

```
import java.util.*;
```

```
@RestController
@RequestMapping("/accounts")
public class AccountController {

    @GetMapping("/{number}")
    public Map<String, Object> getAccount(@PathVariable String number)
    {
        Map<String, Object> response = new HashMap<>();
        response.put("number", number);
        response.put("type", "savings");
        response.put("balance", 234343);
        return response;
    }
}
```

OUTPUT:

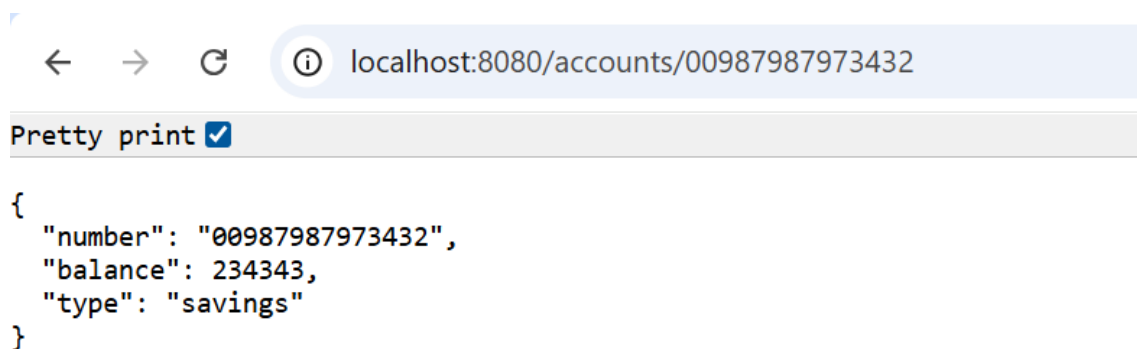

← → ↻ ⓘ localhost:8080/accounts/00987987973432

Pretty print ☒

```
{
  "number": "00987987973432",
  "balance": 234343,
  "type": "savings"
}
```

LOAN:

//LoanApplication.java

```
package com.cognizant.loan;
```

```
import org.springframework.boot.SpringApplication;
```

```
import org.springframework.boot.autoconfigure.SpringBootApplication;
```

```
@SpringBootApplication
```

```
public class LoanApplication {
```

```
    public static void main(String[] args) {
```

```
        SpringApplication.run(LoanApplication.class, args);
```

```
    }
```

```
}
```

//LoanController.java

```
package com.cognizant.loan.controller;
```

```
import org.springframework.web.bind.annotation.*;
```

```
import java.util.*;
```

```
@RestController
```

```
@RequestMapping("/loans")
```

```
public class LoanController {

    @GetMapping("/{number}")
    public Map<String, Object> getLoan(@PathVariable String number) {
        Map<String, Object> response = new HashMap<>();
        response.put("number", number);
        response.put("type", "car");
        response.put("loan", 400000);
        response.put("emi", 3258);
        response.put("tenure", 18);
        return response;
    }
}
```

OUTPUT:

