

WEEK – 7 REACT

1.REACTJS – HOL-9

```
//ListofPlayers.js
```

```
import React from 'react';
```

```
const ListofPlayers = () => {
```

```
  const players = [
```

```
    { name: 'Virat', score: 95 },
```

```
    { name: 'Rohit', score: 45 },
```

```
    { name: 'KL Rahul', score: 72 },
```

```
    { name: 'Jadeja', score: 85 },
```

```
    { name: 'Hardik', score: 50 },
```

```
    { name: 'Pant', score: 66 },
```

```
    { name: 'Shami', score: 30 },
```

```
    { name: 'Bumrah', score: 74 },
```

```
    { name: 'Surya', score: 90 },
```

```
    { name: 'Iyer', score: 69 },
```

```
    { name: 'Ashwin', score: 80 }
```

```
  ];
```

```
// Filter players with score less than 70 using ES6 arrow function
```

```
const lowScorers = players.filter(player => player.score < 70);
```

```
return (
```

```
  <div>
```

```
    <h2>All Players</h2>
```

```
<ul>

  {players.map((player, index) => (
    <li key={index}>{player.name} - {player.score}</li>
  ))}
</ul>
```

```
<h2>Players with Score < 70</h2>
```

```
<ul>

  {lowScorers.map((player, index) => (
    <li key={index}>{player.name} - {player.score}</li>
  ))}
</ul>
</div>
```

```
);
```

```
};
```

```
export default ListofPlayers;
```

```
//IndianPlayers.js
```

```
import React from 'react';
```

```
const IndianPlayers = () => {
```

```
  const oddTeam = ['Virat', 'KL Rahul', 'Hardik', 'Shami', 'Surya'];
```

```
  const evenTeam = ['Rohit', 'Jadeja', 'Pant', 'Bumrah', 'Iyer', 'Ashwin'];
```

```
// Destructuring example
```

```
const [player1, player2, ...restOdd] = oddTeam;
```

```
const [even1, even2, ...restEven] = evenTeam;
```

```
const T20Players = ['Rohit', 'Virat', 'Surya'];
const RanjiTrophyPlayers = ['Iyer', 'Jadeja', 'Pant'];

// Merging using spread operator
const allPlayers = [...T20Players, ...RanjiTrophyPlayers];

return (
  <div>
    <h2>Odd Team</h2>
    <ul>
      <li>{player1}</li>
      <li>{player2}</li>
      {restOdd.map((p, i) => <li key={i}>{p}</li>)}
    </ul>

    <h2>Even Team</h2>
    <ul>
      <li>{even1}</li>
      <li>{even2}</li>
      {restEven.map((p, i) => <li key={i}>{p}</li>)}
    </ul>

    <h2>Merged Players (T20 + Ranji)</h2>
    <ul>
      {allPlayers.map((p, i) => <li key={i}>{p}</li>)}
    </ul>
  </div>
```

```
);  
};
```

```
export default IndianPlayers;
```

//App.js

```
import React from 'react';
```

```
import ListofPlayers from './ListofPlayers';
```

```
import IndianPlayers from './IndianPlayers';
```

```
function App() {
```

```
  const flag = true; // or false
```

```
  return (
```

```
    <div className="App">
```

```
      <h1> 🏏 Welcome to CricketApp</h1>
```

```
      {flag ? <ListofPlayers /> : <IndianPlayers />}
```

```
    </div>
```

```
  );
```

```
}
```

```
export default App;
```

OUTPUT:

If flag =true



Welcome to CricketApp


All Players

- Virat - 95
- Rohit - 45
- KL Rahul - 72
- Jadeja - 85
- Hardik - 50
- Pant - 66
- Shami - 30
- Bumrah - 74
- Surya - 90
- Iyer - 69
- Ashwin - 80

Players with Score < 70

- Rohit - 45
- Hardik - 50
- Pant - 66
- Shami - 30
- Iyer - 69

If flag=false

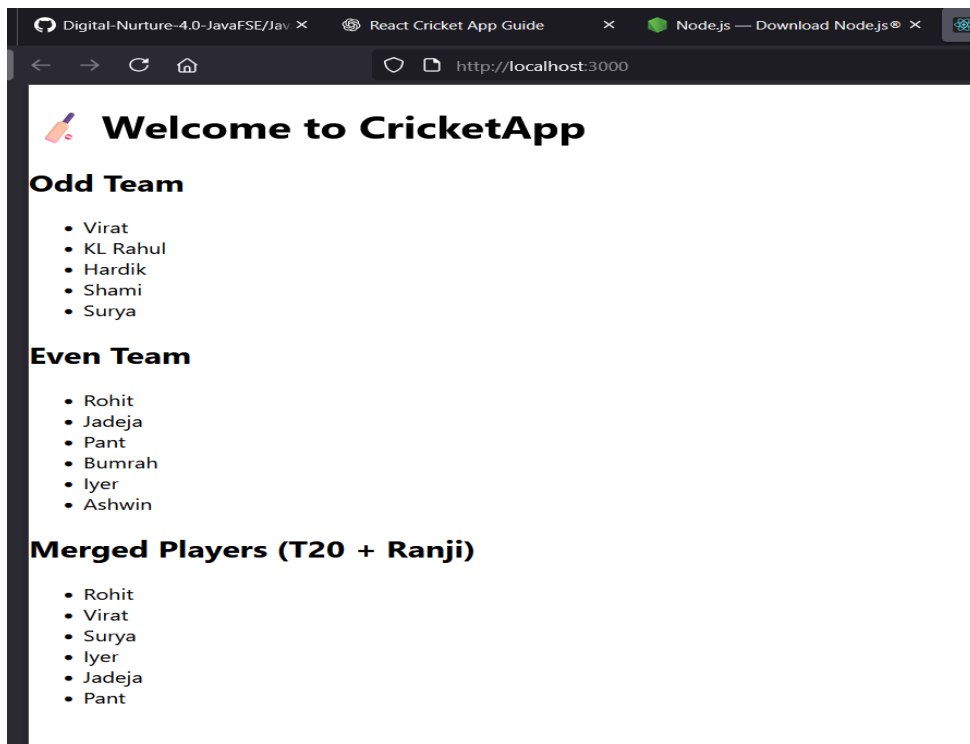

2.REACTJS - HOL – 10

//App.js

```
import React from 'react';
```

```
import './App.css';
```

```
function App() {
```

```
  const offices = [
```

```
    {
```

```
      id: 1,
```

```
      name: 'Urban WorkNest',
```

```
      rent: 60000,
```

```
      address: 'HSR Layout, Bangalore',
```

```
      image: 'https://images.unsplash.com/photo-1618220179428-22790b461013?auto=format&fit=crop&w=800&q=60'
```

```
    }
```

```
  ];
```

```
  return (
```

```
    <div className="App">
```

```
      <h1 style={{ textAlign: 'center', margin: '20px', color: '#2c3e50' }}>Office Space Rental App</h1>
```

```
      <div className="office-container">
```

```
        {offices.map((office) => (
```

```
          <div key={office.id} className="office-card">
```

```
            <img
```

```
              src={office.image}
```

```

        alt={office.name}

        style={{ width: '100%', height: '200px', objectFit: 'cover', borderRadius: '10px' }}
      />
      <h2>{office.name}</h2>
      <p style={{ color: office.rent < 60000 ? 'red' : 'green', fontWeight: 'bold' }}>
        Rent: ₹{office.rent}
      </p>
      <p>Address: {office.address}</p>
    </div>
  )}
</div>
</div>
);
}

```

```
export default App;
```

```
//App.css
```

```

.App {
  font-family: Arial, sans-serif;
  background-color: #f7f7f7;
  padding: 20px;
}

```

```


.office-container {
  display: flex;
  justify-content: center;
  gap: 20px;
}

```

```
flex-wrap: wrap;  
}
```

```
.office-card {  
  background-color: #fff;  
  padding: 15px;  
  width: 300px;  
  box-shadow: 0 4px 10px rgba(0, 0, 0, 0.1);  
  border-radius: 10px;  
}
```

OUTPUT:

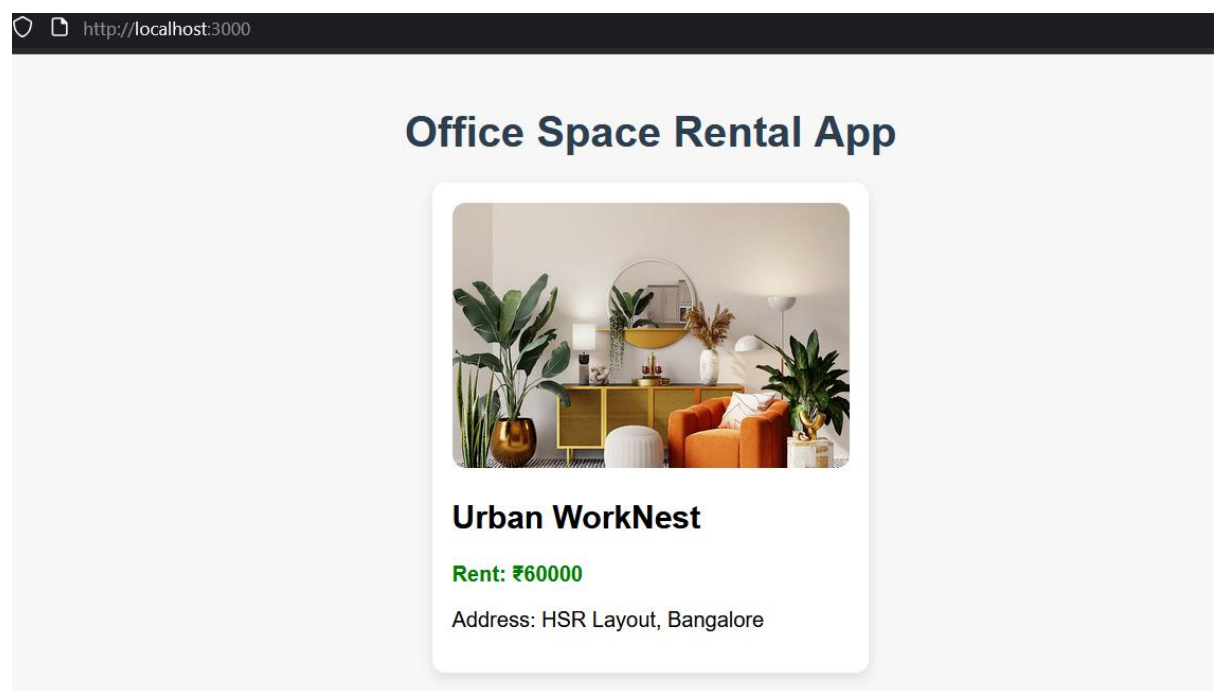

3.REACTJS – HOL – 11

//App.js

```
import React, { useState } from 'react';
```

```
import CurrencyConverter from './CurrencyConverter';
```

```
function App() {
```

```
  const [count, setCount] = useState(0);
```

```
  const increment = () => {
```

```
    setCount(prev => prev + 1);
```

```
    sayHello();
```

```
  };
```

```
  const decrement = () => {
```

```
    setCount(prev => prev - 1);
```

```
  };
```

```
  const sayHello = () => {
```

```
    console.log("Hello! You clicked the increment button.");
```

```
    alert("Hello! Increment Successful.");
```

```
  };
```

```
  const sayWelcome = (msg) => {
```

```
    alert(msg);
```

```
  };
```

```
  const handleClick = (event) => {
```

```
    console.log("Synthetic Event:", event);
```

```
    alert("I was clicked!");
  };

  return (
    <div style={{ padding: "30px", fontFamily: "Arial" }}>
      <h1>React Event Examples</h1>

      <div style={{ marginBottom: "20px" }}>
        <h2>Counter: {count}</h2>
        <button onClick={increment} style={{ marginRight: '10px' }}>Increment</button>
        <button onClick={decrement}>Decrement</button>
      </div>

      <div style={{ marginBottom: "20px" }}>
        <button onClick={() => sayWelcome("Welcome to React Event Handling!")}>Say
Welcome</button>
      </div>

      <div style={{ marginBottom: "20px" }}>
        <button onClick={handleClick}>OnPress Button</button>
      </div>

      <hr />

      <CurrencyConverter />
    </div>
  );
}
```

```
export default App;
```

// CurrencyConverter.js

```
import React, { useState } from 'react';
```

```
function CurrencyConverter() {
```

```
  const [rupees, setRupees] = useState("");
```

```
  const [euro, setEuro] = useState(null);
```

```
  const handleSubmit = (e) => {
```

```
    e.preventDefault();
```

```
    const euroValue = parseFloat(rupees) / 90; // assuming 1 Euro = ₹90
```

```
    setEuro(euroValue.toFixed(2));
```

```
  };
```

```
  return (
```

```
    <div style={{ marginTop: "40px" }}>
```

```
      <h2>Currency Converter</h2>
```

```
      <form onSubmit={handleSubmit}>
```

```
        <label>
```

```
          Enter amount in ₹ Rupees:
```

```
          <input
```

```
            type="number"
```

```
            value={rupees}
```

```
            onChange={(e) => setRupees(e.target.value)}
```

```
            style={{ marginLeft: "10px" }}
```

```
            required
```

```
    />
  </label>

  <button type="submit" style={{ marginLeft: "10px" }}>Convert</button>
</form>
```

```
    {euro !== null && (
      <p style={{ marginTop: "20px" }}>
        € Euro Equivalent: <strong>{euro}</strong>
      </p>
    )}
  </div>
);
}
```

```
export default CurrencyConverter;
```

```
//index.js
```

```
import React from 'react';
```

```
import ReactDOM from 'react-dom/client';
```

```
import App from './App';
```

```
const root = ReactDOM.createRoot(document.getElementById('root'));
```

```
root.render(<App />);
```

OUTPUT:

React Event Examples

Counter: 1

Currency Converter

Enter amount in ₹ Rupees:

🌐 localhost:3000

Hello! Increment Successful.

OK

React Event Examples

Counter: 1

Currency Converter

Enter amount in ₹ Rupees:

🌐 localhost:3000

Welcome to React Event Handling!

OK

React Event Examples

Counter: 1

Currency Converter

Enter amount in ₹ Rupees:

🌐 localhost:3000

I was clicked!

☐ Don't allow localhost:3000 to prompt you again

OK

React Event Examples

Counter: 1

Increment

Decrement

Say Welcome

OnPress Button

Currency Converter

Enter amount in ₹ Rupees:



Convert

€ Euro Equivalent: **71.11**

4.REACTJS – HOL -12

//App.js

```
import React, { useState } from 'react';
```

```
const GuestPage = () => (
```

```
<div>
```

```
<h2>Welcome Guest!</h2>
```

```
<p>Here are some available flight details:</p>
```

```
<ul>
```

```
<li>Flight: AI202 | Delhi → Mumbai | ₹5,500</li>
```

```
<li>Flight: AI303 | Chennai → Bangalore | ₹3,200</li>
```

```
<li>Flight: AI404 | Kolkata → Delhi | ₹6,100</li>
```

```
</ul>
```

```
<p><b>Please log in to book your tickets.</b></p>
```

```
</div>
```

```
);
```

```
const UserPage = () => (  
  <div>  
    <h2>Welcome Back, User!</h2>  
    <p>Select your flight to book tickets:</p>  
    <ul>  
      <li>✅ Flight: AI202 | Book Now</li>  
      <li>✅ Flight: AI303 | Book Now</li>  
      <li>✅ Flight: AI404 | Book Now</li>  
    </ul>  
  </div>  

```

```
function App() {  
  const [isLoggedIn, setIsLoggedIn] = useState(false);  
  
  const handleLogin = () => setIsLoggedIn(true);  
  const handleLogout = () => setIsLoggedIn(false);  
  
  return (  
    <div style={{ padding: '20px', fontFamily: 'Arial' }}>  
      <h1>✈️ Ticket Booking Application</h1>  
      {  
        isLoggedIn ? (  
          <>  
            <UserPage />  
            <button onClick={handleLogout} style={{ marginTop: '20px' }}>Logout</button>  
          </>  
        ) : (  
          <UserPage />  
        )  
      }  
    </div>  
  );  
}
```

```

):{
  <
  <GuestPage />
  <button onClick={handleLogin} style={{ marginTop: '20px' }}>Login</button>
  </>
}
}
</div>

);
}

```

export default App;

OUTPUT:



Ticket Booking Application

Welcome Guest!

Here are some available flight details:

- Flight: AI202 | Delhi → Mumbai | ₹5,500
- Flight: AI303 | Chennai → Bangalore | ₹3,200
- Flight: AI404 | Kolkata → Delhi | ₹6,100

Please log in to book your tickets.

Login



Ticket Booking Application

Welcome Back, User!

Select your flight to book tickets:

- ☒ Flight: AI202 | Book Now
- ☒ Flight: AI303 | Book Now
- ☒ Flight: AI404 | Book Now

Logout

5.REACTJS – HOL -13

//BookDetails.js

```
import React from 'react';
```

```
const BookDetails = () => {
```

```
  return (
```

```
    <div style={{ marginTop: '20px' }}>
```

```
      <h2>Book Details</h2>
```

```
      <p>Title: The Alchemist</p>
```

```
      <p>Author: Paulo Coelho</p>
```

```
      <p>Genre: Inspirational Fiction</p>
```

```
    </div>
```

```
  );
```

```
};
```

```
export default BookDetails;
```

//BlogDetails.js

```
import React from 'react';
```

```
const BlogDetails = () => {
```

```
  return (
```

```
    <div style={{ marginTop: '20px' }}>
```

```
      <h2>Blog Details</h2>
```

```
      <p>Title: React Conditional Rendering</p>
```

```
      <p>Author: Dev Blogger</p>
```

```
      <p>Date: July 31, 2025</p>
```

```
    </div>
```

```
  );
```

```
};
```

```
export default BlogDetails;
```

//CourseDetails.js

```
import React from 'react';
```

```
const CourseDetails = () => {
```

```
  return (
```

```
    <div style={{ marginTop: '20px' }}>
```

```
      <h2>Course Details</h2>
```

```
      <p>Course: Full Stack Web Development</p>
```

```
      <p>Instructor: Jane Doe</p>
```

```
      <p>Duration: 12 Weeks</p>
```

```
    </div>

  );
};

export default CourseDetails;
```

//App.js

```
import React, { useState } from 'react';
import BookDetails from './components/BookDetails';
import BlogDetails from './components/BlogDetails';
import CourseDetails from './components/CourseDetails';

function App() {
  const [showBook, setShowBook] = useState(true);
  const [showBlog, setShowBlog] = useState(true);
  const [showCourse, setShowCourse] = useState(true);

  return (
    <div style={{ padding: '20px', fontFamily: 'Arial' }}>
      <h1>Blogger App</h1>

      { /* Conditional rendering using ternary operator */ }
      <button onClick={() => setShowBook(!showBook)}>
        Toggle Book Details
      </button>

      {showBook ? <BookDetails /> : <p>Book Details Hidden</p>}

      { /* Conditional rendering using logical AND */ }
```

```
<button onClick={() => setShowBlog(!showBlog)}>
```

```
  Toggle Blog Details
```

```
</button>
```

```
{showBlog && <BlogDetails />}
```

```
{/* Conditional rendering using variable assignment */}
```

```
<button onClick={() => setShowCourse(!showCourse)}>
```

```
  Toggle Course Details
```

```
</button>
```

```
{{() => {
```

```
  if (showCourse) {
```

```
    return <CourseDetails />;
```

```
  } else {
```

```
    return <p>Course Details are hidden.</p>;
```

```
  }
```

```
}}()}}
```

```
</div>
```

```
);
```

```
}
```

```
export default App;
```

OUTPUT:



Welcome to CricketApp

All Players

- Virat - 95
- Rohit - 45
- KL Rahul - 72
- Jadeja - 85
- Hardik - 50
- Pant - 66
- Shami - 30
- Bumrah - 74
- Surya - 90
- Iyer - 69
- Ashwin - 80

Players with Score < 70

- Rohit - 45
- Hardik - 50
- Pant - 66
- Shami - 30
- Iyer - 69