

Python Dictionaries

[< Previous](#)[Next >](#)

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}
```

Dictionary

Dictionaries are used to store data values in key:value pairs.

A dictionary is a collection which is ordered*, changeable and does not allow duplicates.

As of Python version 3.7, dictionaries are *ordered*. In Python 3.6 and earlier, dictionaries are *unordered*.

Dictionaries are written with curly brackets, and have keys and values:

Example

Create and print a dictionary:

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}
```

[Try it Yourself »](#)

Dictionary Items

Dictionary items are ordered, changeable, and does not allow duplicates.

Dictionary items are presented in key:value pairs, and can be referred to by using the key name.

Example

Print the "brand" value of the dictionary:

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
print(thisdict["brand"])
```

[Try it Yourself »](#)

Ordered or Unordered?

As of Python version 3.7, dictionaries are *ordered*. In Python 3.6 and earlier, dictionaries are *unordered*.

When we say that dictionaries are ordered, it means that the items have a defined order, and that order will not change.

Unordered means that the items does not have a defined order, you cannot refer to an item by using an index.



Changeable

Dictionaries are changeable, meaning that we can change, add or remove items after the dictionary has been created.

Duplicates Not Allowed

Dictionaries cannot have two items with the same key:

Example

Duplicate values will overwrite existing values:

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964,  
    "year": 2020  
}  
print(thisdict)
```

[Try it Yourself »](#)

Dictionary Length

To determine how many items a dictionary has, use the `len()` function:

Example

Print the number of items in the dictionary:

```
print(len(thisdict))
```



Dictionary Items - Data Types

The values in dictionary items can be of any data type:

Example

String, int, boolean, and list data types:

```
thisdict = {  
    "brand": "Ford",  
    "electric": False,  
    "year": 1964,  
    "colors": ["red", "white", "blue"]  
}
```

[Try it Yourself »](#)

type()

From Python's perspective, dictionaries are defined as objects with the data type 'dict':

```
<class 'dict'>
```

Example

Print the data type of a dictionary:

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964
```



Try it Yourself »

Python Collections (Arrays)

There are four collection data types in the Python programming language:

- **List** is a collection which is ordered and changeable. Allows duplicate members.
- **Tuple** is a collection which is ordered and unchangeable. Allows duplicate members.
- **Set** is a collection which is unordered, unchangeable*, and unindexed. No duplicate members.
- **Dictionary** is a collection which is ordered** and changeable. No duplicate members.

*Set *items* are unchangeable, but you can remove and/or add items whenever you like.

**As of Python version 3.7, dictionaries are *ordered*. In Python 3.6 and earlier, dictionaries are *unordered*.

When choosing a collection type, it is useful to understand the properties of that type. Choosing the right type for a particular data set could mean retention of meaning, and, it could mean an increase in efficiency or security.

[< Previous](#)[Next >](#)


NEW

We just launched
W3Schools videos



HTML

CSS

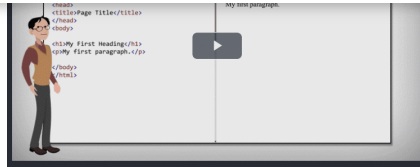

Explore now

COLOR PICKER



Get certified
by completing
a course today!



Get started

CODE GAME

[HTML](#)[CSS](#)

[Play Game](#)

[Report Error](#)

[Forum](#)

[About](#)

[Shop](#)

Top Tutorials

[HTML Tutorial](#)

[CSS Tutorial](#)

[JavaScript Tutorial](#)

[How To Tutorial](#)

[SQL Tutorial](#)

[Python Tutorial](#)

[W3.CSS Tutorial](#)

[Bootstrap Tutorial](#)

[PHP Tutorial](#)

[Java Tutorial](#)

[C++ Tutorial](#)

[jQuery Tutorial](#)

Top References

[HTML Reference](#)

[CSS Reference](#)

[JavaScript Reference](#)

[SQL Reference](#)

[Python Reference](#)

[W3.CSS Reference](#)



HTML COLOURS

[Java Reference](#)

[Angular Reference](#)

[jQuery Reference](#)

Top Examples

[HTML Examples](#)

[CSS Examples](#)

[JavaScript Examples](#)

[How To Examples](#)

[SQL Examples](#)

[Python Examples](#)

[W3.CSS Examples](#)

[Bootstrap Examples](#)

[PHP Examples](#)

[Java Examples](#)

[XML Examples](#)

[jQuery Examples](#)

Web Courses

[HTML Course](#)

[CSS Course](#)

[JavaScript Course](#)

[Front End Course](#)

[SQL Course](#)

[Python Course](#)

[PHP Course](#)

[jQuery Course](#)

[Java Course](#)

[C++ Course](#)

[C# Course](#)

[XML Course](#)

[Get Certified »](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2021 by Refsnes Data. All Rights Reserved.

W3Schools is Powered by W3.CSS.

