

```
In [28]: import pandas as pd
import numpy as np
import warnings
warnings.filterwarnings('ignore')
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [29]: data=pd.read_csv(r"C:\Users\srish\Downloads\uber.csv")
```

```
In [30]: list(data)
```

```
Out[30]: ['Unnamed: 0',
'key',
'fare_amount',
'pickup_datetime',
'pickup_longitude',
'pickup_latitude',
'dropoff_longitude',
'dropoff_latitude',
'passenger_count']
```

```
In [31]: data.shape
```

```
Out[31]: (200000, 9)
```

```
In [32]: data.head(5)
```

```
Out[32]:
```

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_latitude
0	24238194	2015-05-07 19:52:06.00000003	7.5	2015-05-07 19:52:06 UTC	-73.999817	40.73835
1	27835199	2009-07-17 20:04:56.00000002	7.7	2009-07-17 20:04:56 UTC	-73.994355	40.72822
2	44984355	2009-08-24 21:45:00.000000061	12.9	2009-08-24 21:45:00 UTC	-74.005043	40.74077
3	25894730	2009-06-26 08:22:21.00000001	5.3	2009-06-26 08:22:21 UTC	-73.976124	40.79084
4	17610152	2014-08-28 17:47:00.000000188	16.0	2014-08-28 17:47:00 UTC	-73.925023	40.74408

In [33]: data.tail(5)

Out[33]:

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_la
199995	42598914	2012-10-28 10:49:00.00000053	3.0	2012-10-28 10:49:00 UTC	-73.987042	40.7
199996	16382965	2014-03-14 01:09:00.00000008	7.5	2014-03-14 01:09:00 UTC	-73.984722	40.7
199997	27804658	2009-06-29 00:42:00.00000078	30.9	2009-06-29 00:42:00 UTC	-73.986017	40.7
199998	20259894	2015-05-20 14:56:25.00000004	14.5	2015-05-20 14:56:25 UTC	-73.997124	40.7
199999	11951496	2010-05-15 04:08:00.00000076	14.1	2010-05-15 04:08:00 UTC	-73.984395	40.7

In [34]: data.describe()

Out[34]:

	Unnamed: 0	fare_amount	pickup_longitude	pickup_latitude	dropoff_longitude	dropoff
count	2.000000e+05	200000.000000	200000.000000	200000.000000	199999.000000	199999
mean	2.771250e+07	11.359955	-72.527638	39.935885	-72.525292	3
std	1.601382e+07	9.901776	11.437787	7.720539	13.117408	
min	1.000000e+00	-52.000000	-1340.648410	-74.015515	-3356.666300	-88
25%	1.382535e+07	6.000000	-73.992065	40.734796	-73.991407	4
50%	2.774550e+07	8.500000	-73.981823	40.752592	-73.980093	4
75%	4.155530e+07	12.500000	-73.967154	40.767158	-73.963658	4
max	5.542357e+07	499.000000	57.418457	1644.421482	1153.572603	87

In [35]: data.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 200000 entries, 0 to 199999
Data columns (total 9 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Unnamed: 0            200000 non-null  int64
1   key                   200000 non-null  object
2   fare_amount           200000 non-null  float64
3   pickup_datetime       200000 non-null  object
4   pickup_longitude       200000 non-null  float64
5   pickup_latitude        200000 non-null  float64
6   dropoff_longitude      199999 non-null  float64
7   dropoff_latitude       199999 non-null  float64
8   passenger_count        200000 non-null  int64
dtypes: float64(5), int64(2), object(2)
memory usage: 13.7+ MB
```

In [36]: data.min()

```
Out[36]: Unnamed: 0            1
key                   2009-01-01 01:15:22.0000006
fare_amount           -52.0
pickup_datetime       2009-01-01 01:15:22 UTC
pickup_longitude      -1340.64841
pickup_latitude       -74.015515
dropoff_longitude     -3356.6663
dropoff_latitude      -881.985513
passenger_count        0
dtype: object
```

In [37]: data.max()

```
Out[37]: Unnamed: 0            55423567
key                   2015-06-30 23:40:39.0000001
fare_amount           499.0
pickup_datetime       2015-06-30 23:40:39 UTC
pickup_longitude       57.418457
pickup_latitude       1644.421482
dropoff_longitude     1153.572603
dropoff_latitude       872.697628
passenger_count        208
dtype: object
```

```
In [38]: data.groupby('passenger_count').count()
```

```
Out[38]:
```

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_lat
passenger_count						
0	709	709	709	709	709	
1	138425	138425	138425	138425	138425	13
2	29428	29428	29428	29428	29428	2
3	8881	8881	8881	8881	8881	
4	4276	4276	4276	4276	4276	
5	14009	14009	14009	14009	14009	1
6	4271	4271	4271	4271	4271	
208	1	1	1	1	1	

```
In [39]: data['pickup_datetime']=pd.to_datetime(data['pickup_datetime'])
```

```
In [40]: data['year'] = data['pickup_datetime'].dt.year
data['date'] = data['pickup_datetime'].dt.date
data['time'] = data['pickup_datetime'].dt.time
data
```

Out[40]:

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_latitude
0	24238194	2015-05-07 19:52:06.0000003	7.5	2015-05-07 19:52:06+00:00	-73.999817	40.750000
1	27835199	2009-07-17 20:04:56.0000002	7.7	2009-07-17 20:04:56+00:00	-73.994355	40.750000
2	44984355	2009-08-24 21:45:00.00000061	12.9	2009-08-24 21:45:00+00:00	-74.005043	40.750000
3	25894730	2009-06-26 08:22:21.0000001	5.3	2009-06-26 08:22:21+00:00	-73.976124	40.750000
4	17610152	2014-08-28 17:47:00.000000188	16.0	2014-08-28 17:47:00+00:00	-73.925023	40.750000
...
199995	42598914	2012-10-28 10:49:00.00000053	3.0	2012-10-28 10:49:00+00:00	-73.987042	40.750000
199996	16382965	2014-03-14 01:09:00.00000008	7.5	2014-03-14 01:09:00+00:00	-73.984722	40.750000
199997	27804658	2009-06-29 00:42:00.00000078	30.9	2009-06-29 00:42:00+00:00	-73.986017	40.750000
199998	20259894	2015-05-20 14:56:25.00000004	14.5	2015-05-20 14:56:25+00:00	-73.997124	40.750000
199999	11951496	2010-05-15 04:08:00.00000076	14.1	2010-05-15 04:08:00+00:00	-73.984395	40.750000

200000 rows × 7 columns



```
In [41]: print(data[['pickup_datetime', 'year', 'date', 'time']].head().reset_index())
```

	index	pickup_datetime	year	date	time
0	0	2015-05-07 19:52:06+00:00	2015	2015-05-07	19:52:06
1	1	2009-07-17 20:04:56+00:00	2009	2009-07-17	20:04:56
2	2	2009-08-24 21:45:00+00:00	2009	2009-08-24	21:45:00
3	3	2009-06-26 08:22:21+00:00	2009	2009-06-26	08:22:21
4	4	2014-08-28 17:47:00+00:00	2014	2014-08-28	17:47:00

```
In [42]: data['year'] = pd.to_datetime(data['date']).dt.year  
result = data.groupby('year')['passenger_count'].sum().reset_index()  
result
```

Out[42]:

	year	passenger_count
0	2009	51398
1	2010	50849
2	2011	53079
3	2012	54156
4	2013	53343
5	2014	50923
6	2015	23159

```
In [43]: data['month'] = pd.to_datetime(data['date']).dt.month  
result = data.groupby('month')['passenger_count'].sum().reset_index()  
result
```

Out[43]:

	month	passenger_count
0	1	29432
1	2	28028
2	3	31032
3	4	31061
4	5	31847
5	6	29959
6	7	25693
7	8	24314
8	9	25349
9	10	27492
10	11	25944
11	12	26756


```
In [44]: data['date'] = pd.to_datetime(data['date']).dt.date  
result = data.groupby('date')['passenger_count'].sum().reset_index()  
result
```

Out[44]:

	date	passenger_count
0	2009-01-01	113
1	2009-01-02	113
2	2009-01-03	147
3	2009-01-04	132
4	2009-01-05	109
...
2367	2015-06-26	145
2368	2015-06-27	133
2369	2015-06-28	123
2370	2015-06-29	99
2371	2015-06-30	103

2372 rows × 2 columns

```
In [45]: plt.scatter(data['passenger_count'], data['fare_amount'])  
plt.xlabel('Passenger Count')  
plt.ylabel('Fare Amount')  
plt.title('scatter Plot: Passenger Count vs. Fare Amount')  
plt.show()
```

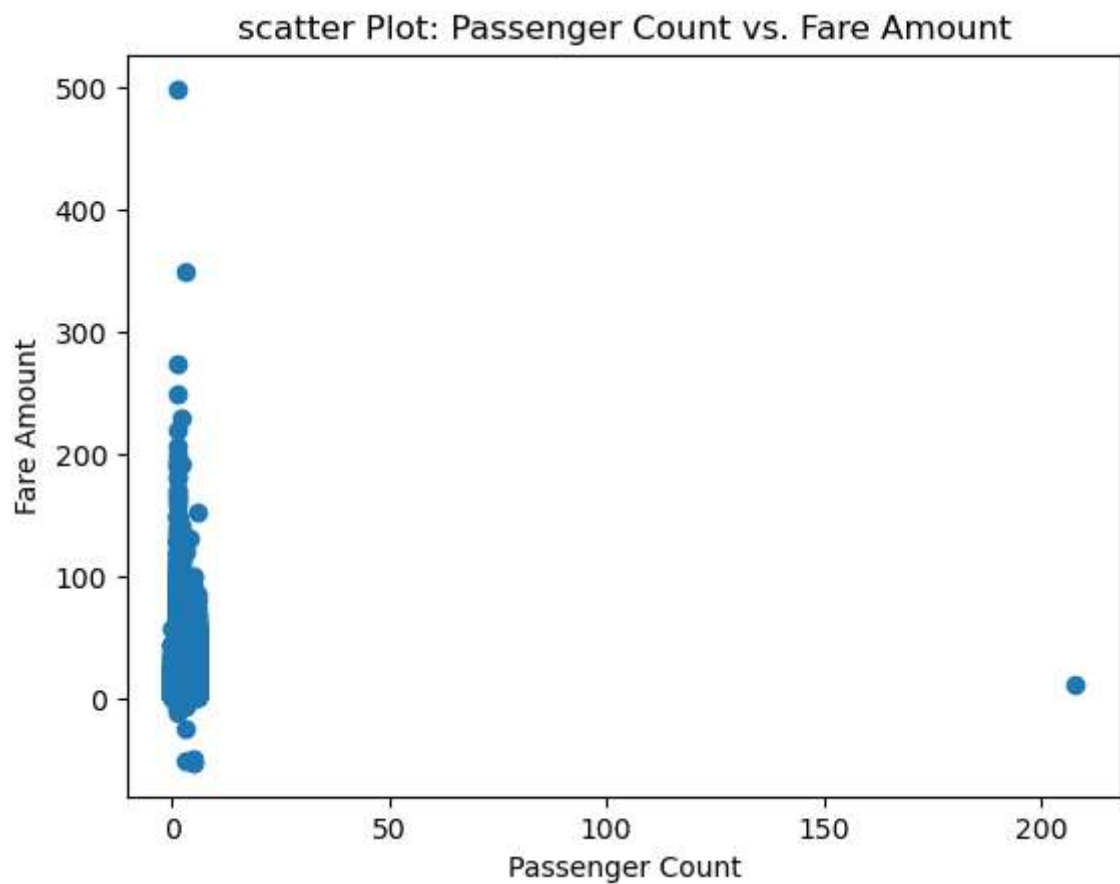


```
In [46]: data1=data.drop(['Unnamed: 0', 'key', 'pickup_datetime', 'pickup_longitude', 'pick
data1
```

Out[46]:

	fare_amount	passenger_count	year	date	time	month
0	7.5	1	2015	2015-05-07	19:52:06	5
1	7.7	1	2009	2009-07-17	20:04:56	7
2	12.9	1	2009	2009-08-24	21:45:00	8
3	5.3	3	2009	2009-06-26	08:22:21	6
4	16.0	5	2014	2014-08-28	17:47:00	8
...
199995	3.0	1	2012	2012-10-28	10:49:00	10
199996	7.5	1	2014	2014-03-14	01:09:00	3
199997	30.9	2	2009	2009-06-29	00:42:00	6
199998	14.5	1	2015	2015-05-20	14:56:25	5
199999	14.1	1	2010	2010-05-15	04:08:00	5

200000 rows × 6 columns

```
In [47]: data_numeric = data.select_dtypes(include='number')
cor_mat = data_numeric.corr()
```


In [48]: cor_mat

Out[48]:

	Unnamed: 0	fare_amount	pickup_longitude	pickup_latitude	dropoff_longitude
Unnamed: 0	1.000000	0.000589	0.000230	-0.000341	0.000270
fare_amount	0.000589	1.000000	0.010457	-0.008481	0.008986
pickup_longitude	0.000230	0.010457	1.000000	-0.816461	0.833026
pickup_latitude	-0.000341	-0.008481	-0.816461	1.000000	-0.774787
dropoff_longitude	0.000270	0.008986	0.833026	-0.774787	1.000000
dropoff_latitude	0.000271	-0.011014	-0.846324	0.702367	-0.917010
passenger_count	0.002257	0.010150	-0.000414	-0.001560	0.000033
year	-0.001324	0.118335	0.009966	-0.010233	0.008467
month	0.001299	0.023814	-0.004665	0.004625	-0.003605

```
In [49]: import seaborn as sns
sns.heatmap(cor_mat,vmax=1,vmin=-1,annot=True,linewidth=5,cmap='viridis')
```

Out[49]: <Axes: >

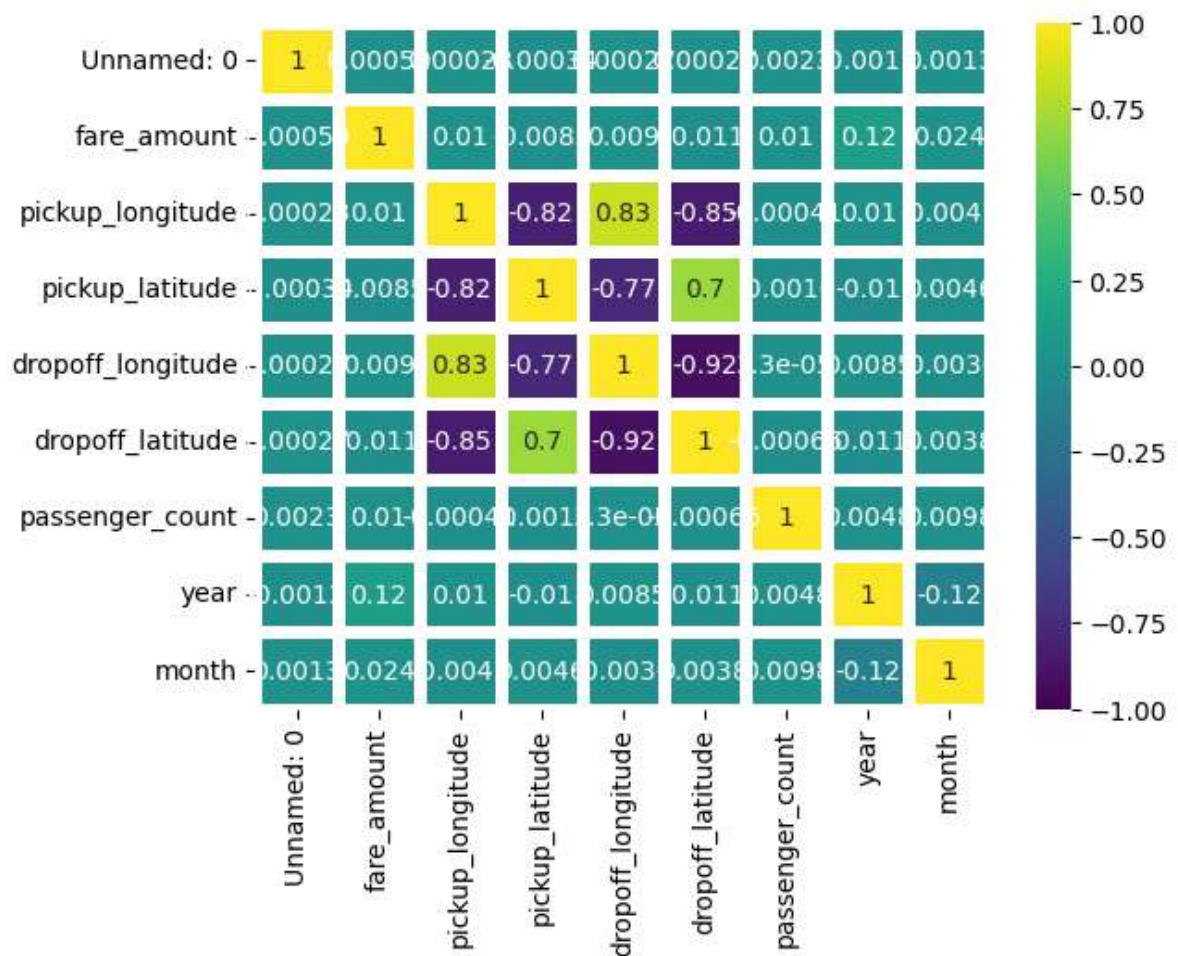


```
In [50]: data_numeric = data1.select_dtypes(include='number')
cor_mat1 = data_numeric.corr()
cor_mat1
```

Out[50]:


	fare_amount	passenger_count	year	month
fare_amount	1.000000	0.010150	0.118335	0.023814
passenger_count	0.010150	1.000000	0.004798	0.009773
year	0.118335	0.004798	1.000000	-0.115859
month	0.023814	0.009773	-0.115859	1.000000

```
In [51]: import seaborn as sns
sns.heatmap(cor_mat1,vmax=1,vmin=-1,annot=True,linewidth=5,cmap='viridis')
```

Out[51]: <Axes: >

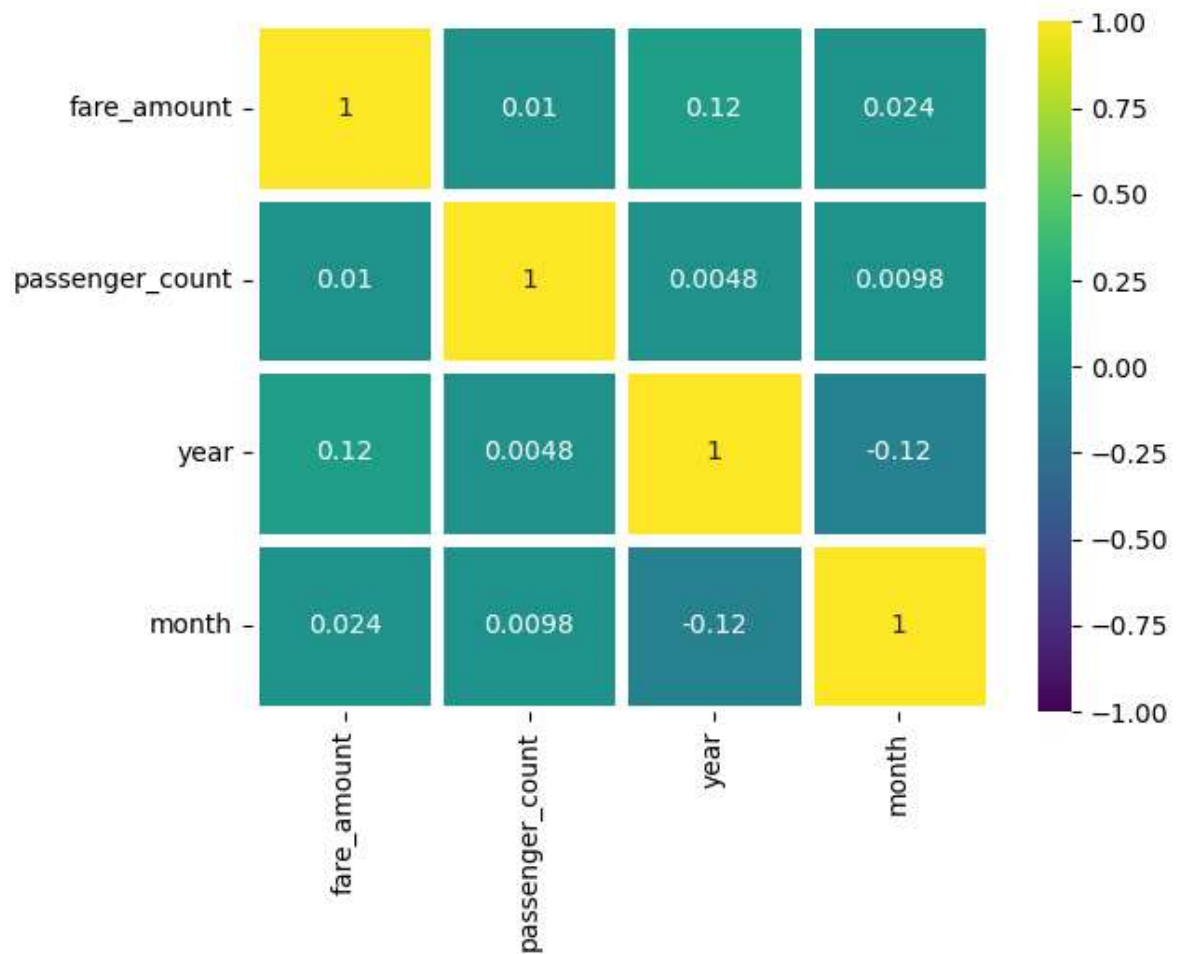


```
In [52]: plt.hist(data1['fare_amount'])  
plt.hist(data1['passenger_count'])  
plt.title('Histogram')  
plt.show()
```

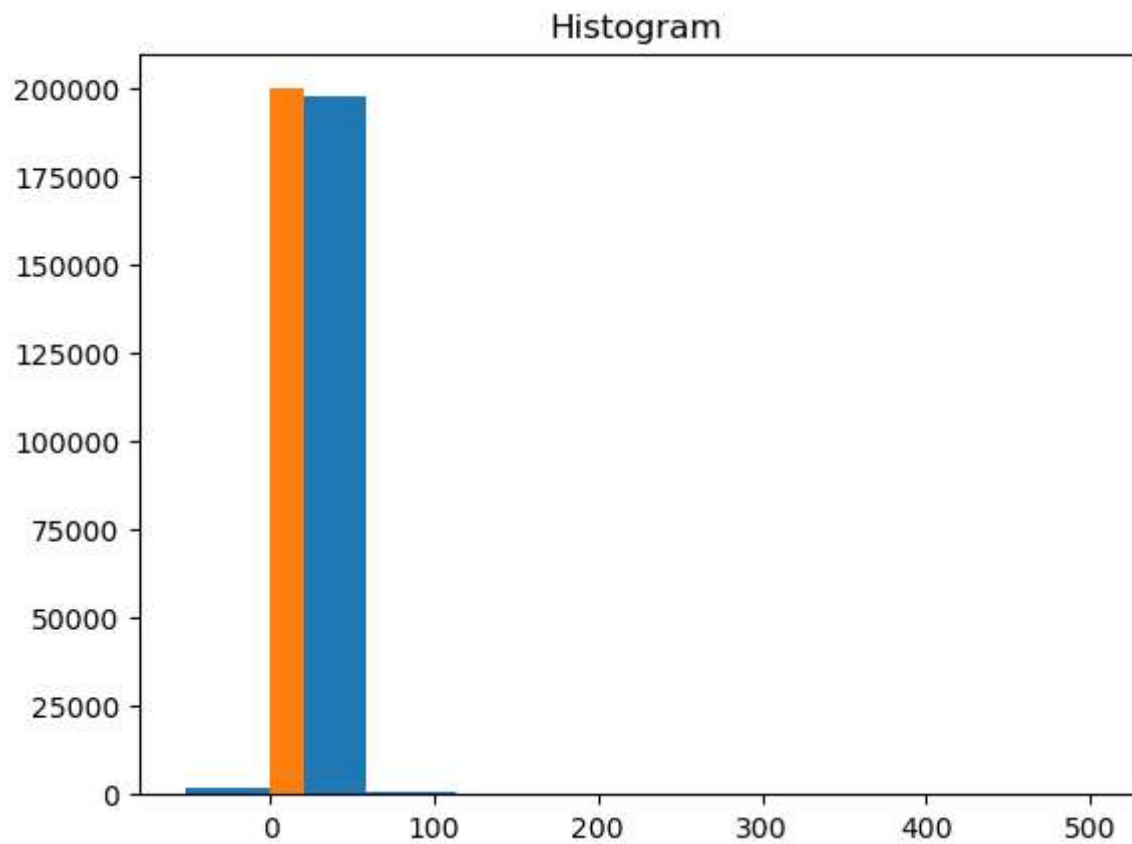

```
In [53]: sns.lineplot(x='fare_amount',y='passenger_count',data=data)  
sns.lineplot(x='year',y='month',data=data)
```

```
Out[53]: <Axes: xlabel='fare_amount', ylabel='passenger_count'>
```

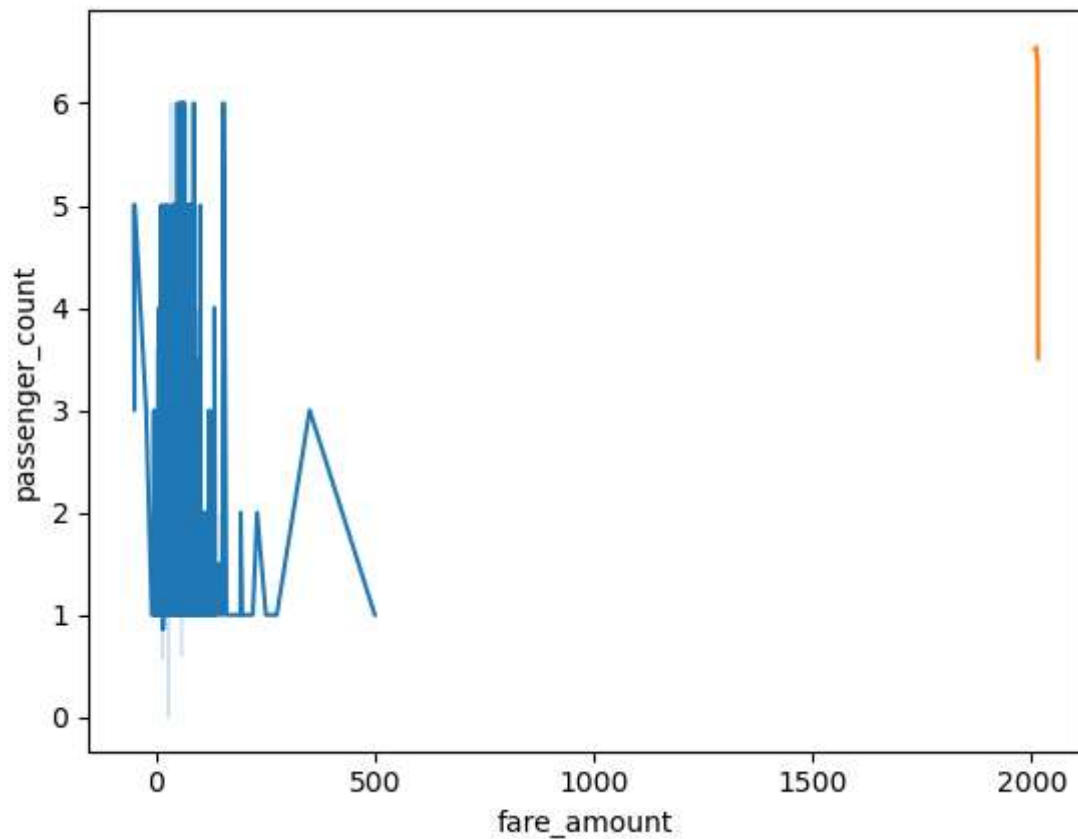

```
In [54]: data1.to_csv('new_uber_csv')
```

```
In [ ]:
```