


Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49 50–89 90–100



METRICS

Expand view

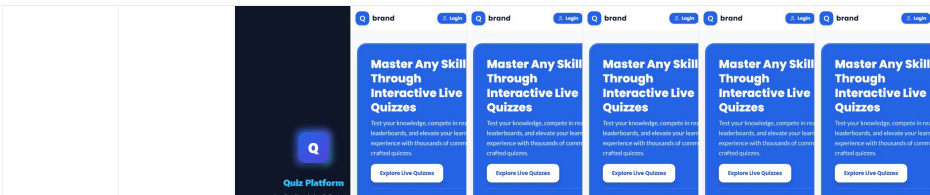
▲ First Contentful Paint
3.3 s

▲ Largest Contentful Paint
4.7 s

Total Blocking Time
150 ms

Cumulative Layout Shift
0.001

▲ Speed Index
7.9 s



Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)

INSIGHTS

▲ Render-blocking requests — Est savings of 560 ms

Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. FCP LCP Unscored

☒ Show 3rd-party resources (1)

URL	Transfer Size	Duration
Google Fonts Cdn	2.0 KiB	960 ms
/css2?family=... (fonts.googleapis.com)	2.0 KiB	960 ms
amplifyapp.com 1st Party	16.8 KiB	420 ms
/assets/index-DzXOXVSu.css (master.d3dm0w3rrtyoay.amplifyapp.com)	16.8 KiB	420 ms

▲ Forced reflow ^

A forced reflow occurs when JavaScript queries geometric properties (such as `offsetWidth`) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about [forced reflows](#) and possible mitigations. Unscored

Source	Total reflow time
[unattributed]	43 ms

▲ LCP breakdown ^

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	3,160 ms
Element render delay	1,500 ms



h1.text-3xl.sm:text-4xl.md:text-5xl.font-extrabold.font-poppins.leading-tight.mb-2.text-white

▲ Network dependency tree ^

[Avoid chaining critical requests](#) by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **7,747 ms**

Initial Navigation

https://master.d3dm0w3rrtyoay.amplifyapp.com - **3,247 ms**, 1.79 KiB

/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com) - **3,750 ms**, 288.06 KiB

...site/partners (d3pq8cuxqmho0p.cloudfront.net) - **7,747 ms**, 1.25 KiB

/api/previous-works (d3pq8cuxqmho0p.cloudfront.net) - **7,659 ms**, 1.40 KiB

/api/quizzes (d3pq8cuxqmho0p.cloudfront.net) - **7,648 ms**, 2.76 KiB

/css2?family=... (fonts.googleapis.com) - **3,717 ms**, 1.97 KiB

...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **4,737 ms**, 7.58 KiB

...v25/S6u9w4BMU....woff2 (fonts.gstatic.com) - **4,730 ms**, 13.86 KiB

...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **4,695 ms**, 7.83 KiB

...v25/S6u8w4BMU....woff2 (fonts.gstatic.com) - **4,694 ms**, 14.54 KiB

...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **4,671 ms**, 7.69 KiB

...v25/S6uyw4BMU....woff2 (fonts.gstatic.com) - **4,238 ms**, 13.68 KiB

...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **4,236 ms**, 7.66 KiB

/assets/index-DzXOXVSu.css (master.d3dm0w3rrtyoay.amplifyapp.com) - **3,393 ms**, 16.78 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

Origin	Source
https://fonts.googleapis.com/	link
Unused preconnect. Check that the `crossorigin` attribute is used properly.	
https://fonts.gstatic.com/	link
Unused preconnect. Check that the `crossorigin` attribute is used properly.	

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

Origin	Est LCP savings
https://fonts.gstatic.com	480 ms
https://fonts.googleapis.com	380 ms
https://accounts.google.com	360 ms

Layout shift culprits

Layout shifts occur when elements move absent any user interaction. [Investigate the causes of layout shifts](#), such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored

Element

Total

h2.text-xl.sm:text-2xl.font-bold.font-poppins.text-[var(--text-main)]

...v24/pxiByp8kv....woff2 (fonts.gstatic.com)

button.text-xs.sm:text-sm.font-semibold.font-poppins.text-[var(--color-prim...

...v24/pxiByp8kv....woff2 (fonts.gstatic.com)

...v25/S6u8w4BMU....woff2 (fonts.gstatic.com)

button.flex.flex-col.items-center.justify-center.py-1.px-2.5.rounded-xl.transiti...

...v25/S6u9w4BMU....woff2 (fonts.gstatic.com)

...v24/pxiByp8kv....woff2 (fonts.gstatic.com)

Optimize DOM size

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. [Learn how to avoid an excessive DOM size.](#) (Unscored)

Statistic	Element	Value
Total elements	span	579
DOM depth		13
Most children	div.flex.animate-marquee-x.gap-4.py-1	16

3rd parties

about:blank

4/31

3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. Unscored

3rd party	Transfer size	Main thread time
Other Google APIs/SDKs Utility	97 KiB	17 ms
/gsi/client (accounts.google.com)	97 KiB	17 ms
hbmdlfjdjkhbkmgclkjpcpmofglfej	0 KiB	2 ms
chrome-extension://hbmdlfjdjkhbkmgclkjpcpmofglfej/content.js	0 KiB	2 ms
ajagbhbjlennihehkdeoapelhfbjhjdl	0 KiB	1 ms
chrome-extension://ajagbhbjlennihehkdeoapelhfbjhjdl/content.js	0 KiB	1 ms
Google Fonts Cdn	75 KiB	0 ms
...v25/S6u8w4BMU....woff2 (fonts.gstatic.com)	15 KiB	0 ms
...v25/S6u9w4BMU....woff2 (fonts.gstatic.com)	14 KiB	0 ms
...v25/S6uyw4BMU....woff2 (fonts.gstatic.com)	14 KiB	0 ms
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	2 KiB	0 ms
cloudfront.net	5 KiB	0 ms
/api/quizzes (d3pq8cuxqmho0p.cloudfront.net)	3 KiB	0 ms
/api/previous-works (d3pq8cuxqmho0p.cloudfront.net)	1 KiB	0 ms
...site/partners (d3pq8cuxqmho0p.cloudfront.net)	1 KiB	0 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

 Reduce unused JavaScript — Est savings of 281 KiB



Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity.
[Learn how to reduce unused JavaScript.](#) FCP LCP Unscored

☒ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
amplifyapp.com 1st Party	269.1 KiB	210.4 KiB

URL	Transfer Size	Est Savings
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	269.1 KiB	210.4 KiB
Other Google APIs/SDKs Utility	84.9 KiB	70.7 KiB
/gsi/client (accounts.google.com)	84.9 KiB	70.7 KiB

▲

Minimize main-thread work — 4.8 s

^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT Unscored

Category	Time Spent
Other	1,957 ms
Style & Layout	1,768 ms
Script Evaluation	636 ms
Rendering	343 ms
Parse HTML & CSS	57 ms
Script Parsing & Compilation	45 ms

○

Avoid long main-thread tasks — 18 long tasks found

^

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT Unscored

☒ Show 3rd-party resources (1)



URL	Start Time	Duration
amplifyapp.com 1st Party		1,339 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	1,646 ms	394 ms
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	5,585 ms	154 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	2,264 ms	153 ms
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	5,337 ms	96 ms

URL	Start Time	Duration
https://master.d3dm0w3rrtyoay.amplifyapp.com	1,117 ms	69 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	2,196 ms	68 ms
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	5,433 ms	67 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	2,417 ms	66 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	2,139 ms	57 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	1,186 ms	56 ms
/assets/index-DzXOXVSu.css (master.d3dm0w3rrtyoay.amplifyapp.com)	1,438 ms	55 ms
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	5,793 ms	53 ms
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	5,739 ms	51 ms
Unattributable		428 ms
Unattributable	1,242 ms	196 ms
Unattributable	1,016 ms	101 ms
Unattributable	1,573 ms	73 ms
Unattributable	958 ms	58 ms
Other Google APIs/SDKs Utility		62 ms
/gsi/client (accounts.google.com)	4,301 ms	62 ms

☐ Avoid non-composited animations — 4 animated elements found ^

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS
Unscored

Element	
	button.h-2.sm:h-2.5.rounded-full.transition-all.duration-300.cursor-pointer.w-6.sm:w-8.bg-[var(--color... Unsupported CSS Property: width

Element	
	div.absolute.w-[78%].xs:w-[82%].sm:w-full.max-w-[270px].sm:max-w-xl.md:max-w-2xl.rounded-2xl.sm:r...
Unsupported CSS Property: z-index	
Unsupported CSS Property: box-shadow	
	div.absolute.w-[78%].xs:w-[82%].sm:w-full.max-w-[270px].sm:max-w-xl.md:max-w-2xl.rounded-2xl.sm:r...
Unsupported CSS Property: z-index	
Unsupported CSS Property: box-shadow	
	button.h-2.sm:h-2.5.rounded-full.transition-all.duration-300.cursor-pointer.w-2.sm:w-2.5.bg-[var(--bor...
Unsupported CSS Property: width	

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (18)

Hide

Use efficient cache lifetimes



A long cache lifetime can speed up repeat visits to your page. [Learn more about caching.](#) FCP LCP Unscored

Document request latency



Your first network request is the most important. [Reduce its latency](#) by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP Unscored

Avoids redirects

Server responds quickly (observed 88 ms)

Applies text compression

Duplicated JavaScript



Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Unscored	
Font display	^
Consider setting font-display to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with font metric overrides . Unscored	
Improve image delivery	^
Reducing the download time of images can improve the perceived load time of the page and LCP. Learn more about optimizing image size FCP LCP Unscored	
☐ INP breakdown	^
Start investigating how to improve INP by looking at the longest subpart. Unscored	
☐ LCP request discovery	^
Optimize LCP by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading Unscored	
Legacy JavaScript	^
Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile Baseline features, unless you know you must support older browsers. Learn why most sites can deploy ES6+ code without transpiling FCP LCP Unscored	
Modern HTTP	^
HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. Learn more about using modern HTTP . FCP LCP Unscored	
Optimize viewport for mobile	^
Tap interactions may be delayed by up to 300 ms if the viewport is not optimized for mobile. Unscored	
meta	
Minify CSS	^
Minifying CSS files can reduce network payload sizes. Learn how to minify CSS . FCP LCP Unscored	
Minify JavaScript	^
Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript . FCP LCP Unscored	

Reduce unused CSS

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS](#) FCP LCP Unscored

Avoids enormous network payloads — Total size was 489 KiB

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes](#). Unscored

☒ Show 3rd-party resources (8)

URL	Transfer Size
amplifyapp.com 1st Party	304.8 KiB
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	288.1 KiB
/assets/index-DzXOXVSu.css (master.d3dm0w3rrtyoay.amplifyapp.com)	16.8 KiB
Other Google APIs/SDKs Utility	96.9 KiB
/gsi/client (accounts.google.com)	96.9 KiB
Google Fonts Cdn	72.8 KiB
...v25/S6u8w4BMU....woff2 (fonts.gstatic.com)	14.5 KiB
...v25/S6u9w4BMU....woff2 (fonts.gstatic.com)	13.9 KiB
...v25/S6uyw4BMU....woff2 (fonts.gstatic.com)	13.7 KiB
...v24/pxiByp8kv.....woff2 (fonts.gstatic.com)	7.8 KiB
...v24/pxiByp8kv.....woff2 (fonts.gstatic.com)	7.7 KiB
...v24/pxiByp8kv.....woff2 (fonts.gstatic.com)	7.7 KiB
...v24/pxiByp8kv.....woff2 (fonts.gstatic.com)	7.6 KiB

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks](#). Unscored

JavaScript execution time — 0.7 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) (TBT) (Unscored)

☒ Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
amplifyapp.com (1st Party)	3,700 ms	537 ms	15 ms
https://master.d3dm0w3rrtyoay.amplifyapp.com	2,808 ms	73 ms	2 ms
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com)	837 ms	464 ms	13 ms
/assets/index-DzXOXVSu.css (master.d3dm0w3rrtyoay.amplifyapp.com)	55 ms	0 ms	0 ms
Unattributable	982 ms	40 ms	0 ms
Unattributable	982 ms	40 ms	0 ms
Other Google APIs/SDKs (Utility)	83 ms	43 ms	26 ms
/gsi/client (accounts.google.com)	83 ms	43 ms	26 ms

Image elements have explicit width and height ^

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions.](#) (CLS) (Unscored)

Page didn't prevent back/forward cache restoration ^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache.](#) (Unscored)



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

BEST PRACTICES

▲

[user-scalable="no"] is used in the <meta name="viewport"> element or the [maximum-scale] attribute is less than 5.

^

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

Failing Elements

meta

▲

Touch targets do not have sufficient size or spacing.

^

Failing Elements



button.h-2.sm:h-2.5.rounded-full.transition-all.duration-300.cursor-pointer.w-2.sm:w-2.5.bg-[var(--bor...



button.h-2.sm:h-2.5.rounded-full.transition-all.duration-300.cursor-pointer.w-6.sm:w-8.bg-[var(--color...



button.h-2.sm:h-2.5.rounded-full.transition-all.duration-300.cursor-pointer.w-6.sm:w-8.bg-[var(--color...



button.h-2.sm:h-2.5.rounded-full.transition-all.duration-300.cursor-pointer.w-2.sm:w-2.5.bg-[var(--bor...

These items highlight common accessibility best practices.

CONTRAST

▲

Background and foreground colors do not have a sufficient contrast ratio.

^

Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)



Failing Elements



p.text-base.sm:text-lg.font-lato.text-blue-100.mb-4.max-w-2xl.leading-relaxed

about:blank

12/31

Failing Elements	
	
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	div.text-xs.font-lato.text-blue-200
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	div.text-xs.font-lato.text-blue-200
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	div.text-xs.font-lato.text-blue-200
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	span.truncate
	div.bg-[var(--bg-main)].p-2.rounded-xl.border.border-[var(--border-theme)].text-[11px].font-lato.text-...
	span
	div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px].font-mono.font-bold.shado...

1



10

14/31

Failing Elements	
	span.text-[10px].font-mono.font-bold.uppercase.tracking-wider.text-amber-600.dark:text-amber-400.b...
	div.bg-[var(--bg-main)].text-[var(--text-main)].transition-colors.duration-300.flex.flex-col.font-lato.min-...
	span.text-[9px].font-bold.text-emerald-500
	div.w-72.sm:w-80.shrink-0.bg-[var(--bg-card)].border.border-[var(--border-theme)].rounded-2xl.p-5.sh...
	span.text-[10px].font-mono.px-2.py-0.5.rounded-full.bg-amber-500/10.text-amber-600.dark:text-amb...
	div.w-72.sm:w-80.shrink-0.bg-[var(--bg-card)].border.border-[var(--border-theme)].rounded-2xl.p-5.sh...
	h4.font-poppins.font-bold.text-xs.sm:text-lg
	div.absolute.w-[78%].xs:w-[82%].sm:w-full.max-w-[270px].sm:max-w-xl.md:max-w-2xl.rounded-2xl.sm:r...
	p.font-lato.text-[10px].sm:text-xs.opacity-90
	div.absolute.w-[78%].xs:w-[82%].sm:w-full.max-w-[270px].sm:max-w-xl.md:max-w-2xl.rounded-2xl.sm:r...
	p
	footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...

Failing Elements



button.hover:underline.cursor-pointer



footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...



button.hover:underline.cursor-pointer



footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...



button.hover:underline.cursor-pointer



footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...





These are opportunities to improve the legibility of your content.

NAVIGATION

▲ Heading elements are not in a sequentially-descending order ^

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

Failing Elements

h4.font-poppins.font-bold.text-sm.text-[var(--text-main)].group-hover/card:text-[var(--color-primary-6...

h4.font-poppins.font-bold.text-xs.sm:text-lg

These are opportunities to improve keyboard navigation in your application.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)	Hide
Interactive controls are keyboard focusable Custom interactive controls are keyboard focusable and display a focus indicator. Learn how to make custom controls focusable. Unscored	^
Interactive elements indicate their purpose and state Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints. Unscored	^
The page has a logical tab order Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering. Unscored	^
Visual order on the page follows DOM order DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering. Unscored	^
User focus is not accidentally trapped in a region A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps. Unscored	^
The user's focus is directed to new content added to the page If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content. Unscored	^
HTML5 landmark elements are used to improve navigation	^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#) (Unscored)

Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#) (Unscored)

Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#) (Unscored)

Custom controls have ARIA roles ^

Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#) (Unscored)

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

PASSED AUDITS (15) Hide

[aria-*) attributes match their roles ^

Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. [Learn how to match ARIA attributes to their roles.](#)

[aria-hidden="true"] is not present on the document <body> ^

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. [Learn how aria-hidden affects the document body.](#)

[aria-*) attributes have valid values ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

[aria-*) attributes are valid and not misspelled ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

Buttons have an accessible name ^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.	
[aria-hidden="true"] elements do not contain focusable descendants	^
Focusable descendants within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	
Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.	
Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
<html> element has a [lang] attribute	^
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.	
<html> element has a valid value for its [lang] attribute	^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.	
Links have a discernible name	^
Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.	
Lists contain only elements and script supporting elements (<script> and <template>).	^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.	
List items () are contained within , or <menu> parent elements	^
Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure.	
Document has a main landmark.	^

One main landmark helps screen reader users navigate a web page. [Learn more about landmarks.](#)

NOT APPLICABLE (44)

Hide

- ☐

[\[accesskey\]](#) values are unique

^
- Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#) Unscored
- ☐

[button](#), [link](#), and [menuitem](#) elements have accessible names

^
- When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#) Unscored
- ☐

Deprecated ARIA roles were not used

^
- Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#) Unscored
- ☐

Elements with `role="dialog"` or `role="alertdialog"` have accessible names.

^
- ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#) Unscored
- ☐

ARIA input fields have accessible names

^
- When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#) Unscored
- ☐

ARIA [meter](#) elements have accessible names

^
- When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#) Unscored
- ☐

ARIA [progressbar](#) elements have accessible names

^
- When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#) Unscored
- ☐

[\[role\]](#)s have all required [\[aria-*\]](#) attributes

^
- Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#) Unscored
- ☐

Elements with an ARIA [\[role\]](#) that require children to contain a specific [\[role\]](#) have all required children.

^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#) (Unscored)

- ☐ [role]s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#) (Unscored)

- ☐ [role] values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#) (Unscored)

- ☐ Elements with the `role=text` attribute do not have focusable descendents. ^

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=text` attribute.](#) (Unscored)

- ☐ ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#) (Unscored)

- ☐ ARIA `tooltip` elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#) (Unscored)

- ☐ ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling treeitem elements.](#) (Unscored)

- ☐ The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#) (Unscored)

- ☐ `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#) (Unscored)

- ☐ Definition list items are wrapped in `<d1>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#) (Unscored)

ARIA IDs are unique
The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs. Unscored
No form fields have multiple labels
Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels. Unscored
<frame> or <iframe> elements have a title
Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles. Unscored
<html> element has an [xml:lang] attribute with the same base language as the [lang] attribute.
If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute. Unscored
Image elements have [alt] attributes
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute. Unscored
Input buttons have discernible text.
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons. Unscored
<input type="image"> elements have [alt] text
When an image is being used as an <input> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text. Unscored
Form elements have associated labels
Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels. Unscored
Links are distinguishable without relying on color.
Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable. Unscored
The document does not use <meta http-equiv="refresh">

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#) (Unscored)

☐ `<object>` elements have alternate text

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#) (Unscored)

☐ Select elements have associated label elements.

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#) (Unscored)

☐ Skip links are focusable.

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#) (Unscored)

☐ No element has a `[tabindex]` value greater than 0

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#) (Unscored)

☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#) (Unscored)

☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#) (Unscored)

☐ `[lang]` attributes have a valid value

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#) (Unscored)

☐ `<video>` elements contain a `<track>` element with `[kind="captions"]`

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#) (Unscored)

☐ `autocomplete` attributes are used correctly

The `autocomplete` attribute values must be valid and correctly applied for screen readers to function correctly. [Learn more about valid autocomplete values.](#) (Unscored)

○ Elements with `role="none"` or `role="presentation"` do not have conflicts

There are certain cases where the semantic role of an element with `role="none"` or `role="presentation"` does not resolve to none or presentation. To ensure the element remains removed from the accessibility tree, you should not add any global ARIA attributes to the element or make it focusable. [Learn more about presentation role conflict.](#) (Unscored)

○ SVG elements with an `img` role have an accessible text alternative

Ensures SVG elements with an `img`, `graphics-document` or `graphics-symbol` role have an accessible text alternative. [Learn more about SVG alt text.](#) (Unscored)

○ Tables have different content in the summary attribute and `<caption>`.

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#) (Unscored)

○ All heading elements contain content.

A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#) (Unscored)

○ Uses ARIA roles only on compatible elements

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#) (Unscored)

○ Image elements do not have `[alt]` attributes that are redundant text.

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute.](#) (Unscored)

○ Identical links have the same purpose.

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links.](#) (Unscored)



Best Practices

GENERAL

▲

Browser errors were logged to the console

^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

Source	Description
amplifyapp.com 1st Party	
splash-loader.gif:1	Failed to load resource: the server responded with a status of 404 ()

▲

Missing source maps for large first-party JavaScript

^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps](#). (Unscored)

URL	Map URL
amplifyapp.com 1st Party	
/assets/index-EtZNwEzS.js (master.d3dm0w3rrtyoay.amplifyapp.com) Large JavaScript file is missing a source map	

TRUST AND SAFETY

☐

Ensure CSP is effective against XSS attacks

^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#). (Unscored)

Description	Directive	Severity
No CSP found in enforcement mode		High

☐

Use a strong HSTS policy

^

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy](#). (Unscored)

Description	Directive	Severity
No HSTS header found		High

Ensure proper origin isolation with COOP

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#) Unscored

Description	Directive	Severity
No COOP header found		High

Mitigate clickjacking with XFO or CSP

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#) Unscored

Description	Severity
No frame control policy found	High

Mitigate DOM-based XSS with Trusted Types

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#) Unscored

Description	Severity
No 'Content-Security-Policy' header with Trusted Types directive found	High

BROWSER COMPATIBILITY

Baseline Features

Lists web features used on the page and their Baseline status as of 2026-06-05. [Learn more about Baseline.](#) Unscored

☒ Show 3rd-party resources (1)

Web-features	Baseline Status	Source
amplifyapp.com	1st Party	

Web-features	Baseline Status	Source
page-visibility-state	Limited Availability	(index):1
long-animation-frames	Limited Availability	(index):1
layout-instability	Limited Availability	(index):1
display-mode	Limited Availability	(index):-1
background-clip-text	Limited Availability	(index):-1
requestidlecallback	Limited Availability	(index):1
accent-color	Limited Availability	(index):-1
abortsignal-any	Newly Available (2024-03-19)	(index):1
relative-color	Newly Available (2024-09-16)	(index):-1
registered-custom-properties	Newly Available (2024-07-09)	(index):-1
scrollend	Newly Available (2025-12-12)	index-EtZNwEzS.js:8
backdrop-filter	Newly Available (2024-09-16)	(index):-1
gradient-interpolation	Newly Available (2024-06-11)	(index):-1
scrollbar-width	Newly Available (2024-12-11)	(index):-1
scrollbar-color	Newly Available (2025-12-12)	(index):-1
print-color-adjust	Newly Available (2025-05-01)	(index):-1
js-modules	Widely Available (2018-05-09)	(index):-1
nullish-coalescing	Widely Available (2020-09-16)	(index):1
aborting	Widely Available (2019-03-25)	(index):1
cascade-layers	Widely Available (2022-03-14)	(index):-1
file-selector-button	Widely Available (2021-04-26)	(index):-1
where	Widely Available (2021-01-21)	(index):-1
is	Widely Available (2021-01-21)	(index):-1

Web-features	Baseline Status	Source
contain-intrinsic-size	Widely Available (2023-09-18)	(index):-1
color-mix	Widely Available (2023-05-09)	(index):-1
not	Widely Available (2021-01-21)	(index):-1
media-query-range-syntax	Widely Available (2023-03-27)	(index):-1
flexbox	Widely Available (2015-09-30)	(index):-1
logical-assignments	Widely Available (2020-09-16)	(index):1
logical-properties	Widely Available (2021-09-20)	(index):-1
oklab	Widely Available (2023-05-09)	(index):-1
prefers-contrast	Widely Available (2022-05-31)	(index):-1
weak-references	Widely Available (2021-04-26)	(index):1
appearance	Widely Available (2022-03-14)	(index):-1
scroll-snap	Widely Available (2020-01-15)	(index):-1
will-change	Widely Available (2020-01-15)	(index):-1
individual-transforms	Widely Available (2022-08-05)	(index):-1
grid	Widely Available (2017-10-17)	(index):-1
text-indent	Widely Available (2015-07-29)	(index):-1
aspect-ratio	Widely Available (2021-09-20)	(index):-1
Other Google APIs/SDKs Utility		
outline	Widely Available (2023-03-27)	client:409

PASSED AUDITS (11)

Hide

Uses HTTPS



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders

from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids deprecated APIs ^

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Avoids third-party cookies ^

Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

Allows users to paste into input fields ^

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers.[Learn more about user-friendly input fields.](#)

Avoids requesting the geolocation permission on page load ^

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#) Also consider using the `<geolocation>` element.

Avoids requesting the notification permission on page load ^

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

Displays images with correct aspect ratio ^

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Serves images with appropriate resolution ^

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Page has the HTML doctype ^

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset ^

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

No issues in the **Issues** panel in Chrome Devtools ^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more

details on each issue.

NOT APPLICABLE (2)

Hide

☐ Redirects HTTP traffic to HTTPS

^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)

Unscored

☐ Detected JavaScript libraries

^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Unscored



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials](#).

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

☐ Structured data is valid

^

Run the [Structured Data Testing Tool](#) to validate structured data. [Learn more about Structured Data.](#)

Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Hide

Page isn't blocked from indexing

^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a <title> element

^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Document has a meta description

^

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Page has successful HTTP status code



Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text



Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable



Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

robots.txt is valid



If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

Document has a valid hreflang



hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

NOT APPLICABLE (2)

Hide

☐ Image elements have [alt] attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#) (Unscored)

☐ Document has a valid rel=canonical



Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#) (Unscored)

■ Captured at Aug 24, 2026, 4:36 PM GMT+5:30
■ Initial page load

■ Emulated Moto G Power with Lighthouse 13.4.0
■ Slow 4G throttling

■ Single page session
■ Using Chromium 151.0.0.0 with devtools