


Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)


▲ 0–49 50–89 90–100



METRICS

Expand view

▲ First Contentful Paint 10.7 s	▲ Largest Contentful Paint 45.4 s
▲ Total Blocking Time 1,460 ms	Cumulative Layout Shift 0
▲ Speed Index 12.3 s	

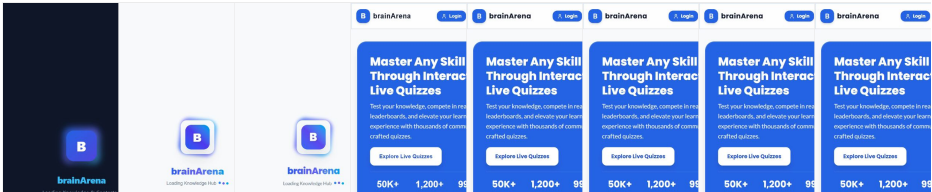

Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)

INSIGHTS

▲ Render-blocking requests — Est savings of 150 ms	⌵
--	---

Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. FCP LCP Unscored

URL	Transfer Size	Duration
Google Fonts Cdn	1.6 KiB	870 ms
/css2?family=... (fonts.googleapis.com)	1.6 KiB	870 ms

▲

Forced reflow

^

A forced reflow occurs when JavaScript queries geometric properties (such as offsetWidth) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about [forced reflows](#) and possible mitigations. Unscored

Source	Total reflow time
[unattributed]	203 ms

▲

Network dependency tree

^

[Avoid chaining critical requests](#) by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **2,111 ms**

Initial Navigation

- http://localhost:5173 - **100 ms**, 3.67 KiB
 - /css2?family=... (fonts.googleapis.com) - **249 ms**, 1.63 KiB
 - ...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **2,111 ms**, 7.83 KiB
 - ...v25/S6u8w4BMU....woff2 (fonts.gstatic.com) - **2,110 ms**, 14.54 KiB
 - ...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **2,110 ms**, 7.58 KiB
 - ...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **2,109 ms**, 7.69 KiB
 - ...v25/S6u9w4BMU....woff2 (fonts.gstatic.com) - **2,109 ms**, 13.86 KiB
 - ...v25/S6uyw4BMU....woff2 (fonts.gstatic.com) - **1,279 ms**, 13.68 KiB
 - ...v24/pxiByp8kv....woff2 (fonts.gstatic.com) - **1,267 ms**, 7.66 KiB
- /src/main.jsx?t=178... (localhost) - **166 ms**, 2.67 KiB
 - /src/App.jsx?t=178... (localhost) - **354 ms**, 48.54 KiB
 - ...services/api.js (localhost) - **447 ms**, 34.02 KiB
 - ...site/partners (localhost) - **2,041 ms**, 0.28 KiB
 - /api/previous-works (localhost) - **2,041 ms**, 0.28 KiB
 - ...site/partners (localhost) - **2,040 ms**, 2.21 KiB
 - /api/quizzes (localhost) - **2,040 ms**, 0.28 KiB
 - /api/previous-works (localhost) - **2,039 ms**, 1.92 KiB
 - /api/quizzes (localhost) - **2,038 ms**, 20.29 KiB

...components/Navbar.jsx?t=178... (localhost) - **409 ms**, 44.36 KiB

...deps/lucide-react.js?v=a8c0caf2 (localhost) - **586 ms**, 4,094.26 KiB

...services/pwaService.js (localhost) - **521 ms**, 7.70 KiB

...components/LiveQuizzes.jsx (localhost) - **414 ms**, 30.81 KiB

...components/QuizCountdownBadge.jsx (localhost) - **524 ms**, 11.15 KiB

...components/HeroBanner.jsx?t=178... (localhost) - **410 ms**, 12.97 KiB

...components/Skeleton.jsx (localhost) - **522 ms**, 5.20 KiB

...utils/dateUtils.js (localhost) - **451 ms**, 31.56 KiB

...components/InitialLogoLoader.jsx?t=178... (localhost) - **439 ms**, 14.47 KiB

...components/PwalInstallCard.jsx (localhost) - **438 ms**, 31.33 KiB

...components/BottomNav.jsx (localhost) - **428 ms**, 10.16 KiB

...components/Footer.jsx?t=178... (localhost) - **425 ms**, 60.02 KiB

...components/ReviewSection.jsx?t=178... (localhost) - **424 ms**, 28.08 KiB

...components/PreviousWorks.jsx (localhost) - **416 ms**, 37.83 KiB

...components/PartnersSection.jsx (localhost) - **412 ms**, 45.22 KiB

...deps/react-dom_client.js?v=a8c0caf2 (localhost) - **368 ms**, 2,753.73 KiB

...deps/react-dom.js?v=a8c0caf2 (localhost) - **453 ms**, 47.99 KiB

...deps/react.js?v=a8c0caf2 (localhost) - **223 ms**, 127.34 KiB

...deps/rolldown-...js?v=a8c0caf2 (localhost) - **408 ms**, 3.09 KiB

...context/AuthContext.jsx (localhost) - **370 ms**, 15.34 KiB

...context/ToastContext.jsx (localhost) - **350 ms**, 11.45 KiB

...deps/react_jsx-dev-runtime.js?v=a8c0caf2 (localhost) - **324 ms**, 34.20 KiB

/src/index.css?t=178... (localhost) - **316 ms**, 177.78 KiB

/@vite/client (localhost) - **171 ms**, 199.52 KiB

...client/env.mjs (localhost) - **381 ms**, 3.68 KiB

/@react-refresh (localhost) - **211 ms**, 109.56 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

Origin	Source
https://fonts.googleapis.com/	link
https://fonts.gstatic.com/	link
Unused preconnect. Check that the `crossorigin` attribute is used properly.	

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

Origin

Est LCP savings

https://fonts.gstatic.com	400 ms
http://localhost:5000	150 ms

Document request latency — Est savings of 2 KiB

Your first network request is the most important. [Reduce its latency](#) by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP Unscored

Avoids redirects

Server responds quickly (observed 5 ms)

No compression applied

Layout shift culprits

Layout shifts occur when elements move absent any user interaction. [Investigate the causes of layout shifts](#), such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored

Element	Layout shift score
Total	0.000
	0.000
h2.text-xl.sm:text-2xl.font-bold.font-poppins.text-[var(--text-main)]	
...v25/S6u9w4BMU....woff2 (fonts.gstatic.com)	Web font
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	Web font
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	Web font
...v25/S6u8w4BMU....woff2 (fonts.gstatic.com)	Web font
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	Web font

Optimize DOM size

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. [Learn how to avoid an excessive DOM size](#). Unscored

Statistic	Element	Value
Total elements		711

about:blank

4/38

Statistic	Element	Value
DOM depth	span	13
Most children	div.flex.animate-marquee-x.gap-4.py-1	20

LCP breakdown

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	10 ms
Element render delay	2,060 ms

h1.text-3xl.sm:text-4xl.md:text-5xl.font-extrabold.font-poppins.leading-tight.mb-2.text-white

3rd parties

3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. Unscored

3rd party	Transfer size	Main thread time
Other Google APIs/SDKs Utility	96 KiB	25 ms
/gsi/client (accounts.google.com)	96 KiB	25 ms
ajagbhbjlennihehkdeoapelhfbjhjdl	0 KiB	3 ms
chrome-extension://ajagbhbjlennihehkdeoapelhfbjhjdl/content.js	0 KiB	3 ms
hbmdlfjdjkhibkmgclkjpcpmofglfej	0 KiB	2 ms
chrome-extension://hbmdlfjdjkhibkmgclkjpcpmofglfej/content.js	0 KiB	2 ms
Google Fonts Cdn	74 KiB	0 ms
...v25/S6u8w4BMU....woff2 (fonts.gstatic.com)	15 KiB	0 ms
...v25/S6u9w4BMU....woff2 (fonts.gstatic.com)	14 KiB	0 ms
...v25/S6uyw4BMU....woff2 (fonts.gstatic.com)	14 KiB	0 ms

3rd party	Transfer size	Main thread time
...v24/pxiByp8kv...woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v24/pxiByp8kv...woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v24/pxiByp8kv...woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v24/pxiByp8kv...woff2 (fonts.gstatic.com)	8 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	2 KiB	0 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

▲ Minimize main-thread work — 6.4 s ^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) (TBT) (Unscored)

Category	Time Spent
Other	2,660 ms
Style & Layout	1,841 ms
Script Evaluation	1,658 ms
Rendering	99 ms
Script Parsing & Compilation	84 ms
Garbage Collection	41 ms
Parse HTML & CSS	27 ms

▲ Reduce JavaScript execution time — 1.7 s ^

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time](#) (TBT) (Unscored)

☒ Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
localhost 1st Party	3,855 ms	1,510 ms	20 ms
http://localhost:5173	2,225 ms	77 ms	3 ms

URL	Total CPU Time	Script Evaluation	Script Parse
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	1,428 ms	1,241 ms	16 ms
...context/ToastContext.jsx (localhost)	203 ms	192 ms	0 ms
Unattributable	2,248 ms	58 ms	0 ms
Unattributable	2,248 ms	58 ms	0 ms
Other Google APIs/SDKs Utility	109 ms	59 ms	43 ms
/gsi/client (accounts.google.com)	109 ms	59 ms	43 ms

▲ Minify JavaScript — Est savings of 6,213 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript](#). FCP LCP Unscored

URL	Transfer Size	Est Savings
localhost 1st Party	7,845.8 KiB	6,213.0 KiB
...deps/lucide-react.js?v=a8c0caf2 (localhost)	4,093.9 KiB	3,392.5 KiB
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	2,753.4 KiB	2,077.2 KiB
/@vite/client (localhost)	199.2 KiB	168.6 KiB
/@react-refresh (localhost)	109.3 KiB	99.3 KiB
...deps/react.js?v=a8c0caf2 (localhost)	127.0 KiB	95.7 KiB
...components/Footer.jsx?t=178... (localhost)	59.7 KiB	38.1 KiB
...deps/react-dom.js?v=a8c0caf2 (localhost)	47.7 KiB	35.4 KiB
/src/App.jsx?t=178... (localhost)	48.3 KiB	33.5 KiB
...components/Navbar.jsx?t=178... (localhost)	44.1 KiB	29.1 KiB
...components/PartnersSection.jsx (localhost)	44.9 KiB	28.4 KiB
...services/api.js (localhost)	33.7 KiB	25.5 KiB
...deps/react_jsx-dev-runtime.js?v=a8c0caf2 (localhost)	33.9 KiB	25.4 KiB

URL	Transfer Size	Est Savings
...utils/dateUtils.js (localhost)	31.3 KiB	24.7 KiB
...components/PreviousWorks.jsx (localhost)	37.5 KiB	23.9 KiB
...components/PwalnstallCard.jsx (localhost)	31.0 KiB	20.0 KiB
...components/LiveQuizzes.jsx (localhost)	30.5 KiB	19.9 KiB
...components/ReviewSection.jsx?t=178... (localhost)	27.8 KiB	17.9 KiB
...context/AuthContext.jsx (localhost)	15.1 KiB	10.1 KiB
...components/InitialLogoLoader.jsx?t=178... (localhost)	14.2 KiB	8.3 KiB
...components/HeroBanner.jsx?t=178... (localhost)	12.7 KiB	7.0 KiB
...context/ToastContext.jsx (localhost)	11.2 KiB	6.7 KiB
...components/QuizCountdownBadge.jsx (localhost)	10.9 KiB	6.0 KiB
...components/BottomNav.jsx (localhost)	9.9 KiB	5.9 KiB
...services/pwaService.js (localhost)	7.4 KiB	5.7 KiB
...client/env.mjs (localhost)	3.4 KiB	2.9 KiB
...components/Skeleton.jsx (localhost)	4.9 KiB	2.7 KiB
...deps/rolldown-....js?v=a8c0caf2 (localhost)	2.8 KiB	2.4 KiB

▲

Reduce unused JavaScript — Est savings of 473 KiB

^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity.
[Learn how to reduce unused JavaScript.](#) FCP LCP Unscored

☒ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
localhost 1st Party	7,173.6 KiB	410.6 KiB
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	2,753.4 KiB	339.5 KiB
...react-dom/cjs/react-dom-client.development.js	733.2 KiB	313.1 KiB
...scheduler/cjs/scheduler.development.js	8.3 KiB	1.9 KiB

URL	Transfer Size	Est Savings
...deps/lucide-react.js?v=a8c0caf2 (localhost)	4,093.9 KiB	28.5 KiB
...deps/react.js?v=a8c0caf2 (localhost)	127.0 KiB	21.6 KiB
...cjs/react.development.js	34.2 KiB	20.1 KiB
/@vite/client (localhost)	199.2 KiB	21.0 KiB
...	37.6 KiB	21.0 KiB
Other Google APIs/SDKs Utility	74.6 KiB	62.1 KiB
/gsi/client (accounts.google.com)	74.6 KiB	62.1 KiB

Minify CSS — Est savings of 7 KiB

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) FCP LCP Unscored

URL	Transfer Size	Est Savings
/*! tailwindcss v4.3.3 MIT License https://tailwindcss.com */ @layer properties; @layer theme, ...	34.0 KiB	6.6 KiB

Avoid enormous network payloads — Total size was 8,235 KiB

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#) Unscored

☒ Show 3rd-party resources (1)

URL	Transfer Size
localhost 1st Party	7,618.7 KiB
...deps/lucide-react.js?v=a8c0caf2 (localhost)	4,094.3 KiB
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	2,753.7 KiB
/@vite/client (localhost)	199.5 KiB
/src/index.css?t=178... (localhost)	177.8 KiB
...deps/react.js?v=a8c0caf2 (localhost)	127.3 KiB

URL	Transfer Size
/@react-refresh (localhost)	109.6 KiB
...components/Footer.jsx?t=178... (localhost)	60.0 KiB
/src/App.jsx?t=178... (localhost)	48.5 KiB
...deps/react-dom.js?v=a8c0caf2 (localhost)	48.0 KiB
Other Google APIs/SDKs Utility	96.4 KiB
/gsi/client (accounts.google.com)	96.4 KiB

Avoid long main-thread tasks — 15 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT Unscored

☒ Show 3rd-party resources (1)

URL	Start Time	Duration
localhost 1st Party		2,252 ms
http://localhost:5173	2,439 ms	501 ms
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	37,938 ms	379 ms
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	38,531 ms	264 ms
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	38,795 ms	227 ms
...context/ToastContext.jsx (localhost)	37,517 ms	226 ms
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	38,317 ms	214 ms
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	37,743 ms	154 ms
http://localhost:5173	2,326 ms	113 ms
http://localhost:5173	880 ms	111 ms
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	39,022 ms	63 ms
Unattributable		1,550 ms
Unattributable	1,037 ms	1,222 ms

URL	Start Time	Duration
Unattributable	722 ms	158 ms
Unattributable	619 ms	103 ms
Unattributable	2,259 ms	67 ms
Other Google APIs/SDKs Utility		101 ms
/gsi/client (accounts.google.com)	6,160 ms	101 ms

User Timing marks and measures — 69 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#) Unscored

Name	Type	Start Time	Duration
Update Blocked	Measure	940.60 ms	35.90 ms
Mount	Measure	980.50 ms	24.70 ms
Mount	Measure	1,077.90 ms	1.80 ms
Cascading Update	Measure	1,083.80 ms	9.20 ms
InitialLogoLoader	Measure	1,095.00 ms	2.40 ms
Update	Measure	1,623.00 ms	1.50 ms
Mount	Measure	1,631.10 ms	85.30 ms
Reconnect	Measure	1,651.30 ms	45.20 ms
Unmount	Measure	1,718.60 ms	0.20 ms
Mount	Measure	1,719.80 ms	22.00 ms
Reconnect	Measure	1,721.00 ms	13.30 ms
Cascading Update	Measure	1,756.80 ms	269.10 ms
Update	Measure	2,043.60 ms	1.20 ms
Mount	Measure	2,060.00 ms	2.60 ms
Mount	Measure	2,062.60 ms	1.60 ms

Name	Type	Start Time	Duration
Mount	Measure	2,064.20 ms	1.40 ms
Mount	Measure	2,065.60 ms	0.90 ms
Mount	Measure	2,066.50 ms	0.50 ms
Mount	Measure	2,067.00 ms	0.60 ms
Mount	Measure	2,067.60 ms	0.40 ms
Mount	Measure	2,068.00 ms	1.60 ms
Mount	Measure	2,069.60 ms	3.10 ms
Mount	Measure	2,078.40 ms	0.50 ms
Mount	Measure	2,078.90 ms	0.20 ms
Mount	Measure	2,079.10 ms	0.40 ms
Mount	Measure	2,100.90 ms	0.40 ms
Mount	Measure	2,101.30 ms	0.20 ms
Mount	Measure	2,101.50 ms	0.10 ms
Mount	Measure	2,101.60 ms	0.30 ms
Mount	Measure	2,101.90 ms	0.10 ms
Mount	Measure	2,102.00 ms	0.20 ms
Mount	Measure	2,102.20 ms	0.30 ms
Mount	Measure	2,102.50 ms	0.30 ms
Mount	Measure	2,102.80 ms	0.40 ms
Mount	Measure	2,103.20 ms	0.30 ms
Mount	Measure	2,103.50 ms	0.30 ms
Mount	Measure	2,103.80 ms	0.20 ms
Mount	Measure	2,104.00 ms	0.50 ms
Mount	Measure	2,104.50 ms	0.10 ms

Name	Type	Start Time	Duration
Mount	Measure	2,104.60 ms	0.10 ms
Mount	Measure	2,104.70 ms	0.20 ms
Mount	Measure	2,104.90 ms	0.10 ms
Mount	Measure	2,105.00 ms	0.20 ms
Mount	Measure	2,105.20 ms	0.20 ms
Mount	Measure	2,105.40 ms	0.20 ms
Unmount	Measure	2,107.90 ms	0.10 ms
Unmount	Measure	2,108.40 ms	0.10 ms
Unmount	Measure	2,228.00 ms	0.10 ms
Unmount	Measure	2,228.20 ms	0.10 ms
Unmount	Measure	2,228.30 ms	0.10 ms
Unmount	Measure	2,228.40 ms	0.10 ms
Mount	Measure	2,228.90 ms	0.50 ms
Mount	Measure	2,229.60 ms	0.40 ms
Mount	Measure	2,230.30 ms	0.50 ms
Mount	Measure	2,231.00 ms	0.50 ms
Mount	Measure	2,231.80 ms	0.40 ms
Mount	Measure	2,232.50 ms	0.40 ms
Mount	Measure	2,233.20 ms	0.40 ms
Mount	Measure	2,233.80 ms	0.50 ms
Mount	Measure	2,234.50 ms	0.50 ms
Update	Measure	3,237.30 ms	0.70 ms
Update	Measure	3,241.00 ms	0.30 ms
Update	Measure	3,243.50 ms	0.40 ms

Name	Type	Start Time	Duration
Update	Measure	3,247.60 ms	0.40 ms
Update	Measure	3,250.70 ms	0.40 ms
Update	Measure	4,237.10 ms	0.60 ms
Update	Measure	4,240.50 ms	0.80 ms
Update	Measure	4,246.30 ms	0.40 ms
Update	Measure	4,249.70 ms	0.40 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (13) Hide

Use efficient cache lifetimes ^

A long cache lifetime can speed up repeat visits to your page. [Learn more about caching.](#) FCP LCP Unscored

Duplicated JavaScript ^

Remove large, [duplicate JavaScript modules](#) from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Unscored

Font display ^

Consider setting [font-display](#) to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with [font metric overrides.](#) Unscored

Improve image delivery ^

Reducing the download time of images can improve the perceived load time of the page and LCP. [Learn more about optimizing image size](#) FCP LCP Unscored

☐ INP breakdown ^

Start investigating [how to improve INP](#) by looking at the longest subpart. Unscored

☐ LCP request discovery ^

[Optimize LCP](#) by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading Unscored

Legacy JavaScript ^

Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support older browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) (FCP) (LCP) (Unscored)

Modern HTTP

HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. [Learn more about using modern HTTP](#). (FCP) (LCP) (Unscored)

Optimize viewport for mobile

Tap interactions may be [delayed by up to 300 ms](#) if the viewport is not optimized for mobile. (Unscored)

meta

Reduce unused CSS

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS](#). (FCP) (LCP) (Unscored)

☐ Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) (CLS) (Unscored)

Image elements have explicit `width` and `height`

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) (CLS) (Unscored)

Page didn't prevent back/forward cache restoration

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#) (Unscored)



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio. ^


Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Failing Elements

	div.text-xs.font-lato.text-blue-100.font-medium
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	div.text-xs.font-lato.text-blue-100.font-medium
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	div.text-xs.font-lato.text-blue-100.font-medium
	div.relative.overflow-hidden.rounded-3xl.bg-[var(--color-primary-600)].text-white.p-8.sm:p-12.mb-10.s...
	span.truncate
	div.bg-[var(--bg-main)].p-2.rounded-xl.border.border-[var(--border-theme)].text-[11px].font-lato.text-...
	span
	div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px].font-mono.font-bold.shado...

Failing Elements

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...



span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px].font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...



span.truncate

div.bg-[var(--bg-main)].p-2.rounded-xl.border.border-[var(--border-theme)].text-[11px].font-lato.text...



span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px].font-mono.font-bold.shado...



div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px].font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

Failing Elements

span.truncate

div.bg-[var(--bg-main)],p-2.rounded-xl.border.border-[var(--border-theme)],text-[11px],font-lato.text-...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.truncate

div.bg-[var(--bg-main)],p-2.rounded-xl.border.border-[var(--border-theme)],text-[11px],font-lato.text-...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.truncate

div.bg-[var(--bg-main)],p-2.rounded-xl.border.border-[var(--border-theme)],text-[11px],font-lato.text-...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.truncate

div.bg-[var(--bg-main)],p-2.rounded-xl.border.border-[var(--border-theme)],text-[11px],font-lato.text-...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono.font-bold.shado...

div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

Failing Elements

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.truncate

div.bg-[var(--bg-main)].p-2.rounded-xl.border.border-[var(--border-theme)].text-[11px],font-lato.text-...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.truncate

div.bg-[var(--bg-main)].p-2.rounded-xl.border.border-[var(--border-theme)].text-[11px],font-lato.text-...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...

span.font-extrabold

div.inline-flex.items-center.space-x-1.5.px-2.5.py-1.rounded-xl.text-[11px],font-mono,font-bold.shado...
div.w-[240px].sm:w-[280px].md:w-[300px].shrink-0.bg-[var(--bg-card)].border.border-[var(--border-the...






span.text-[10px],font-mono,font-bold.uppercase.tracking-wider.text-amber-600.dark:text-amber-400.b...



div.bg-[var(--bg-main)].text-[var(--text-main)].transition-colors.duration-300.flex.flex-col.font-lato.min-...

span.text-[9px],font-bold.text-emerald-500

div.w-72.sm:w-80.shrink-0.bg-[var(--bg-card)].border.border-[var(--border-theme)].rounded-2xl.p-5.sh...

Failing Elements	
	span.text-[10px].font-mono.px-2.py-0.5.rounded-full.bg-amber-500/10.text-amber-600.dark:text-amb...
	div.w-72.sm:w-80.shrink-0.bg-[var(--bg-card)].border.border-[var(--border-theme)].rounded-2xl.p-5.sh...
	h3.font-poppins.font-bold.text-xs.sm:text-lg
	div.absolute.w-[78%].xs:w-[82%].sm:w-full.max-w-[270px].sm:max-w-xl.md:max-w-2xl.rounded-2xl.sm:r...
	p.font-lato.text-[10px].sm:text-xs.opacity-90
	div.absolute.w-[78%].xs:w-[82%].sm:w-full.max-w-[270px].sm:max-w-xl.md:max-w-2xl.rounded-2xl.sm:r...
	p
	footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...
	button.hover:underline.cursor-pointer
	footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...
	button.hover:underline.cursor-pointer

Failing Elements

`footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...`

`button.hover:underline.cursor-pointer`

`footer.bg-[var(--accent-yellow-footer)].border-t.border-[var(--border-theme)].pt-10.pb-6.text-[var(--te...`

These are opportunities to improve the legibility of your content.

NAVIGATION

▲

Heading elements are not in a sequentially-descending order

^

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

Failing Elements

`h4.font-poppins.font-bold.text-sm.text-[var(--text-main)].group-hover/card:text-[var(--color-primary-6...`

These are opportunities to improve keyboard navigation in your application.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

☐

Interactive controls are keyboard focusable

^

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#) (Unscored)

☐

Interactive elements indicate their purpose and state

^

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#) (Unscored)

☐

The page has a logical tab order

^

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#) (Unscored)

Visual order on the page follows DOM order	
DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering. Unscored	
User focus is not accidentally trapped in a region	
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps. Unscored	
The user's focus is directed to new content added to the page	
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content. Unscored	
HTML5 landmark elements are used to improve navigation	
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Unscored	
Offscreen content is hidden from assistive technology	
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content. Unscored	
Custom controls have associated labels	
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels. Unscored	
Custom controls have ARIA roles	
Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. Unscored	
These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review.	
PASSED AUDITS (17) Hide	
[aria-*] attributes match their roles	
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.	
[aria-hidden="true"] is not present on the document <body>	
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.	

[aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.	
[aria-*] attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	
Buttons have an accessible name	^
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible.	
[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.	^
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.	
ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.	
[aria-hidden="true"] elements do not contain focusable descendents	^
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	
Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.	
Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
<html> element has a [lang] attribute	^
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.	

<html> element has a valid value for its [lang] attribute	^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.	
Links have a discernible name	^
Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.	
Lists contain only elements and script supporting elements (<script> and <template>).	^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.	
List items () are contained within , or <menu> parent elements	^
Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure.	
Touch targets have sufficient size and spacing.	^
Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.	
Document has a main landmark.	^
One main landmark helps screen reader users navigate a web page. Learn more about landmarks.	
NOT APPLICABLE (44)	Hide
☐ [accesskey] values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys. (Unscored)	
☐ button, link, and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. (Unscored)	
☐ Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles. (Unscored)	
☐ Elements with role="dialog" or role="alertdialog" have accessible names.	^

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#) Unscored

☐ ARIA input fields have accessible names ^

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#) Unscored

☐ ARIA `meter` elements have accessible names ^

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#) Unscored

☐ ARIA `progressbar` elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#) Unscored

☐ `[role]`s have all required `[aria-*)` attributes ^

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#) Unscored

☐ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#) Unscored

☐ `[role]`s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#) Unscored

☐ `[role]` values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#) Unscored

☐ Elements with the `role=``text` attribute do not have focusable descendents. ^

Adding `role=``text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=``text` attribute.](#) Unscored

☐ ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#) Unscored

ARIA <code>tooltip</code> elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. (Unscored)	
ARIA <code>treeitem</code> elements have accessible names	^
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. (Unscored)	
The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks. (Unscored)	
<code><dl></code>'s contain only properly-ordered <code><dt></code> and <code><dd></code> groups, <code><script></code>, <code><template></code> or <code><div></code> elements.	^
When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly. (Unscored)	
Definition list items are wrapped in <code><dl></code> elements	^
Definition list items (<code><dt></code> and <code><dd></code>) must be wrapped in a parent <code><dl></code> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly. (Unscored)	
ARIA IDs are unique	^
The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs. (Unscored)	
No form fields have multiple labels	^
Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels. (Unscored)	
<code><frame></code> or <code><iframe></code> elements have a title	^
Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles. (Unscored)	
<code><html></code> element has an <code>[xml:lang]</code> attribute with the same base language as the <code>[lang]</code> attribute.	^
If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute. (Unscored)	
Image elements have <code>[alt]</code> attributes	^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#) (Unscored)

☐ Input buttons have discernible text. ^

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#) (Unscored)

☐ `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#) (Unscored)

☐ Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#) (Unscored)

☐ Links are distinguishable without relying on color. ^

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#) (Unscored)

☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#) (Unscored)

☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#) (Unscored)

☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#) (Unscored)

☐ Skip links are focusable. ^

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#) (Unscored)

☐ No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#) (Unscored)

- ☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#) (Unscored)

- ☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#) (Unscored)

- ☐ `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#) (Unscored)

- ☐ `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#) (Unscored)

- ☐ `autocomplete` attributes are used correctly ^

The `autocomplete` attribute values must be valid and correctly applied for screen readers to function correctly. [Learn more about valid autocomplete values.](#) (Unscored)

- ☐ Elements with `role="none"` or `role="presentation"` do not have conflicts ^

There are certain cases where the semantic role of an element with `role="none"` or `role="presentation"` does not resolve to none or presentation. To ensure the element remains removed from the accessibility tree, you should not add any global ARIA attributes to the element or make it focusable. [Learn more about presentation role conflict.](#) (Unscored)

- ☐ SVG elements with an `img` role have an accessible text alternative ^

Ensures SVG elements with an `img`, `graphics-document` or `graphics-symbol` role have an accessible text alternative. [Learn more about SVG alt text.](#) (Unscored)

- ☐ Tables have different content in the `summary` attribute and `<caption>`. ^

The `summary` attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#) (Unscored)

- ☐ All heading elements contain content. ^

A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#) (Unscored)

- ☐

Uses ARIA roles only on compatible elements

^
- Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles](#). Unscored
- ☐

Image elements do not have `[alt]` attributes that are redundant text.

^
- Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute](#). Unscored
- ☐

Identical links have the same purpose.

^
- Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links](#). Unscored



Best Practices

TRUST AND SAFETY

- ☐

Ensure CSP is effective against XSS attacks

^
- A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#). Unscored

Description	Directive	Severity
No CSP found in enforcement mode		High
- ☐

Use a strong HSTS policy

^
- Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy](#). Unscored

Description	Directive	Severity
No HSTS header found		High
- ☐

Ensure proper origin isolation with COOP

^

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#) Unscored

Description	Directive	Severity
No COOP header found		High

Mitigate clickjacking with XFO or CSP

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#) Unscored

Description	Severity
No frame control policy found	High

Mitigate DOM-based XSS with Trusted Types

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#) Unscored

Description	Severity
No 'Content-Security-Policy' header with Trusted Types directive found	High

BROWSER COMPATIBILITY

Baseline Features

Lists web features used on the page and their Baseline status as of 2026-06-05. [Learn more about Baseline.](#) Unscored

☒ Show 3rd-party resources (1)

Web-features	Baseline Status	Source
localhost 1st Party		
page-visibility-state	Limited Availability	(index):1
long-animation-frames	Limited Availability	(index):1
layout-instability	Limited Availability	(index):1

Web-features	Baseline Status	Source
requestidlecallback	Limited Availability	(index):1
beforeunload	Limited Availability	client:908
background-clip-text	Limited Availability	client:1205
accent-color	Limited Availability	client:1205
display-mode	Limited Availability	(index):-1
abortsignal-any	Newly Available (2024-03-19)	(index):1
nesting	Newly Available (2023-12-11)	client:1205
scrollbar-width	Newly Available (2024-12-11)	client:1205
backdrop-filter	Newly Available (2024-09-16)	client:1205
scrollbar-color	Newly Available (2025-12-12)	client:1205
print-color-adjust	Newly Available (2025-05-01)	client:1205
registered-custom-properties	Newly Available (2024-07-09)	client:1205
relative-color	Newly Available (2024-09-16)	client:1205
scrollend	Newly Available (2025-12-12)	react-dom_client.js?v=a8c0caf2:9210
gradient-interpolation	Newly Available (2024-06-11)	(index):-1
nullish-coalescing	Widely Available (2020-09-16)	(index):1
aborting	Widely Available (2019-03-25)	(index):1
js-modules	Widely Available (2018-05-09)	(index):-1

Web-features	Baseline Status	Source
flexbox	Widely Available (2015-09-30)	(index):-1
logical-assignments	Widely Available (2020-09-16)	(index):1
weak-references	Widely Available (2021-04-26)	(index):1
prefers-contrast	Widely Available (2022-05-31)	(index):-1
cascade-layers	Widely Available (2022-03-14)	client:1205
file-selector-button	Widely Available (2021-04-26)	client:1205
where	Widely Available (2021-01-21)	client:1205
text-indent	Widely Available (2015-07-29)	client:1205
is	Widely Available (2021-01-21)	client:1205
logical-properties	Widely Available (2021-09-20)	client:1205
contain-intrinsic-size	Widely Available (2023-09-18)	client:1205
color-mix	Widely Available (2023-05-09)	client:1205
appearance	Widely Available (2022-03-14)	client:1205
not	Widely Available (2021-01-21)	client:1205
media-query-range-syntax	Widely Available (2023-03-27)	client:1205
aspect-ratio	Widely Available (2021-09-20)	client:1205

Web-features	Baseline Status	Source
individual-transforms	Widely Available (2022-08-05)	client:1205
scroll-snap	Widely Available (2020-01-15)	client:1205
calc-constants	Widely Available (2023-06-06)	client:1205
oklab	Widely Available (2023-05-09)	client:1205
will-change	Widely Available (2020-01-15)	client:1205
grid	Widely Available (2017-10-17)	(index):-1
Other Google APIs/SDKs Utility		
outline	Widely Available (2023-03-27)	client:410

PASSED AUDITS (13)

Hide

Uses HTTPS



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#) where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids deprecated APIs



Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Avoids third-party cookies



Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

Allows users to paste into input fields



Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers.[Learn more about user-friendly input fields.](#)

Avoids requesting the geolocation permission on page load	^
Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission . Also consider using the <code><geolocation></code> element.	
Avoids requesting the notification permission on page load	^
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications .	
Displays images with correct aspect ratio	^
Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio .	
Serves images with appropriate resolution	^
Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images .	
Page has the HTML doctype	^
Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration .	
Properly defines charset	^
A character encoding declaration is required. It can be done with a <code><meta></code> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding .	
No browser errors logged to the console	^
Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit	
No issues in the Issues panel in Chrome Devtools	^
Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.	
Page has valid source maps	^
Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps . (Unscored)	

URL	Map URL
localhost 1st Party	
...utils/dateUtils.js (localhost)	
...services/pwaService.js (localhost)	
...services/api.js (localhost)	
/src/main.jsx?t=178... (localhost)	
...context/ToastContext.jsx (localhost)	
...context/AuthContext.jsx (localhost)	
...components/Skeleton.jsx (localhost)	
...components/ReviewSection.jsx?t=178... (localhost)	
...components/QuizCountdownBadge.jsx (localhost)	
...components/PwaInstallCard.jsx (localhost)	
...components/PreviousWorks.jsx (localhost)	
...components/PartnersSection.jsx (localhost)	
...components/Navbar.jsx?t=178... (localhost)	
...components/LiveQuizzes.jsx (localhost)	
...components/InitialLogoLoader.jsx?t=178... (localhost)	
...components/HeroBanner.jsx?t=178... (localhost)	
...components/Footer.jsx?t=178... (localhost)	
...components/BottomNav.jsx (localhost)	
/src/App.jsx?t=178... (localhost)	
...client/env.mjs (localhost)	
...deps/rolldown-....js?v=a8c0caf2 (localhost)	
...deps/react.js?v=a8c0caf2 (localhost)	

URL	Map URL
...deps/react-dom.js?v=a8c0caf2 (localhost)	
...deps/react-dom_client.js?v=a8c0caf2 (localhost)	
...deps/react_jsx-dev-runtime.js?v=a8c0caf2 (localhost)	
...deps/lucide-react.js?v=a8c0caf2 (localhost)	
/@vite/client (localhost)	
/@react-refresh (localhost)	

NOT APPLICABLE (2) Hide

Redirects HTTP traffic to HTTPS

^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)

Unscored

Detected JavaScript libraries

^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Unscored



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials](#).

ADDITIONAL ITEMS TO MANUALLY CHECK (1) Hide

Structured data is valid

^

Run the [Structured Data Testing Tool](#) to validate structured data. [Learn more about Structured Data.](#)

Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)		Hide
Page isn't blocked from indexing		^
Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives.		
Document has a <title> element		^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.		
Document has a meta description		^
Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description.		
Page has successful HTTP status code		^
Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes.		
Links have descriptive text		^
Descriptive link text helps search engines understand your content. Learn how to make links more accessible.		
Links are crawlable		^
Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable		
robots.txt is valid		^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt.		
Document has a valid hreflang		^
hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang.		
NOT APPLICABLE (2)		Hide
☐ Image elements have [alt] attributes		^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute. Unscored		

Document has a valid [rel=canonical](#)

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#) (Unscored)

- Captured at Aug 24, 2026, 6:03 PM GMT+5:30
- Emulated Moto G Power with Lighthouse 13.4.0
- Single page session
- Initial page load
- Slow 4G throttling
- Using Chromium 151.0.0.0 with devtools

Generated by **Lighthouse** 13.4.0 | [File an issue](#)