Vidyavardhini's College of Engineering & Technology
Department of Computer Science & Engineering (Data Science)

NAME : SrushtiLohar

Div : SE2

Roll No: 19

Branch : CSE-DS

Experiment No : 3

Experiment Title : Create a dynamic To-Do List where users can add, mark as complete, and remove tasks using JavaScript & DOM.

AIM : To design and develop a dynamic To-Do List application using JavaScript and DOM manipulation that allows users to add tasks, mark tasks as completed, and delete tasks interactively in real time.

PROGRAM:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Modern To-Do List</title>

  <style>     body {       font-family:
"Poppins", sans-serif;       background:
#f4f4f4;       display: flex;       justify-
content: center;       padding-top:
50px;
    }
   /* ✨ Fancy Glass Card */      .container {
width: 380px;       padding: 25px;       border-
radius: 20px;       background: rgba(255, 255,
255, 0.7);       backdrop-filter: blur(12px);
box-shadow: 0 15px 35px rgba(0,0,0,0.15);
transition: 0.3s ease;
    }
  .container:hover  {                transform:
translateY(-5px);       boxshadow: 0 20px
40px rgba(0,0,0,0.20);
    }   h2 {       text-
align: center;
marginbottom:
```

```
20px;
fontweight: 600;
color:
#333;       letter-spacing:
1px;
    }
 /*  ◇  Input + Button Row */
.input-section {       display: flex;       gap:
10px;   }    #taskInput {        flex: 1;
padding: 12px;       border: none;       border-
radius: 14px;       background: #ffffff;       box-
shadow: inset 0 0 8px rgba(0,0,0,0.08);
font-size: 14px;       outline: none;
transition: 0.2s;
    }
 #taskInput:focus {        box-
shadow: 0 0 0 2px #74b9ff;
    }
 /* ✨ Better Button */     #addBtn {       padding: 12px
20px;       border: none;       cursor: pointer;       borderradius:
14px;       background: linear-gradient(135deg, #6a5af9,
#795df5);       color: white;       font-weight: bold;       font-
size: 14px;       transition: 0.3s;
    }
   #addBtn:hover {       background: linear-gradient(135deg,
#5848d4, #6a50e7);       transform: scale(1.05);
```

```
    }
/* Task List */
ul {
margintop: 20px;
padding: 0;
    } ul li {       liststyle:
none;       padding:
14px;       margin-
bottom:
12px;
background:
#ffffff;
borderradius:
14px;       display:
flex;       justify-
content: space-
between;       align-
items: center;
boxshadow: 0 3px
12px
rgba(0,0,0,0.08);
transition: 0.3s;       cursor:
pointer;       font-size:
15px;
```

```
    }   ul li:hover {
transform: scale(1.02);
background: #fafafa;
    }     li.completed {
textdecoration: line-through;
color: #777;       background:
#eaf3ff;
    }
  /* Delete Button */
.remove-btn {       padding:
6px 10px;       border:
none;       borderradius:
10px;       background:
#ff6b6b;       color: white;
cursor: pointer;       font-
size:
12px;       transition:
0.25s;
    }
.remove-btn:hover      {       background:
            #e63946;       transform:
scale(1.1);
    }
  </style>
</head>
```

```
<body>

  <div class="container">

    <h2>✨ My Tasks</h2>
 <div class="input-section">
      <input type="text" id="taskInput" placeholder="Add your task...">
      <button id="addBtn">Add</button>
    </div>
  <ul id="taskList"></ul>
  </div>
  <script>                                const        addBtn        =
document.getElementById("addBtn");      const taskInput =
document.getElementById("taskInput");     const taskList =
document.getElementById("taskList");
addBtn.addEventListener("click",   addTask);         function
addTask() {        const taskText = taskInput.value.trim();  if
(taskText  ===  "")  {              alert("Please  enter  a  task!");
return;
      }
  const li = document.createElement("li");
li.textContent = taskText;

      li.addEventListener("click", function () {
li.classList.toggle("completed");
      });
```

```
    const removeBtn = document.createElement("button");
removeBtn.textContent = "✕";      removeBtn.classList.add("remove-btn");

    removeBtn.addEventListener("click", function (event) {
event.stopPropagation();        taskList.removeChild(li);
    });

    li.appendChild(removeBtn);
taskList.appendChild(li);      taskInput.value =
"";

   }
  </script>

</body>
</html>
```

OUTPUT:

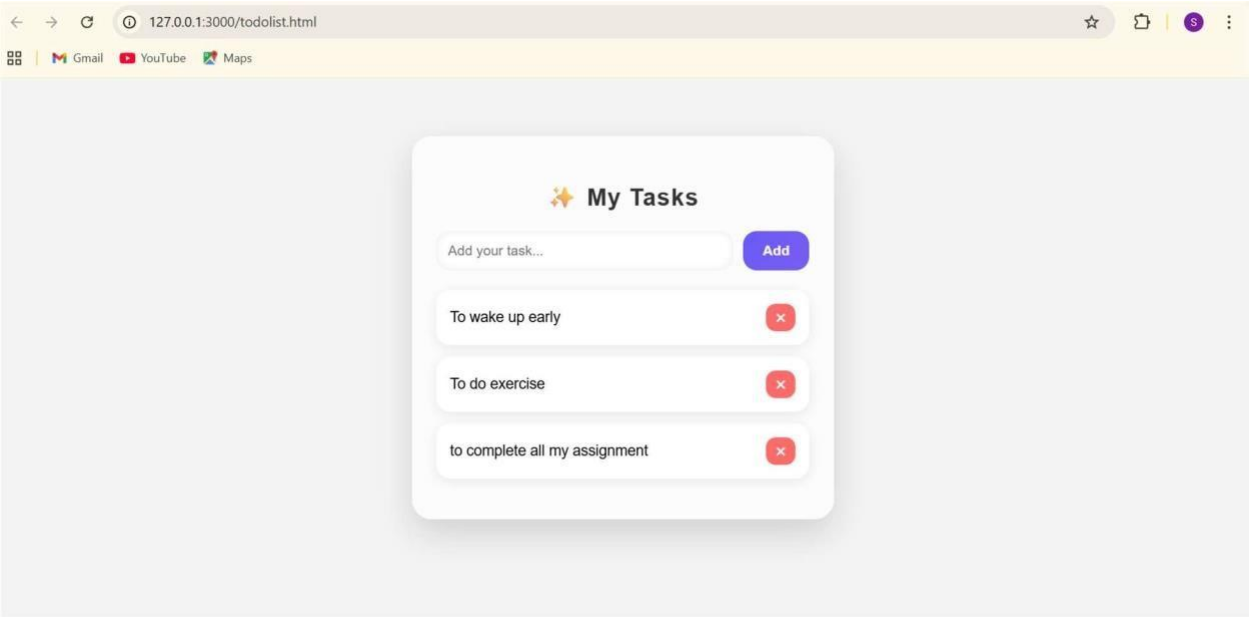
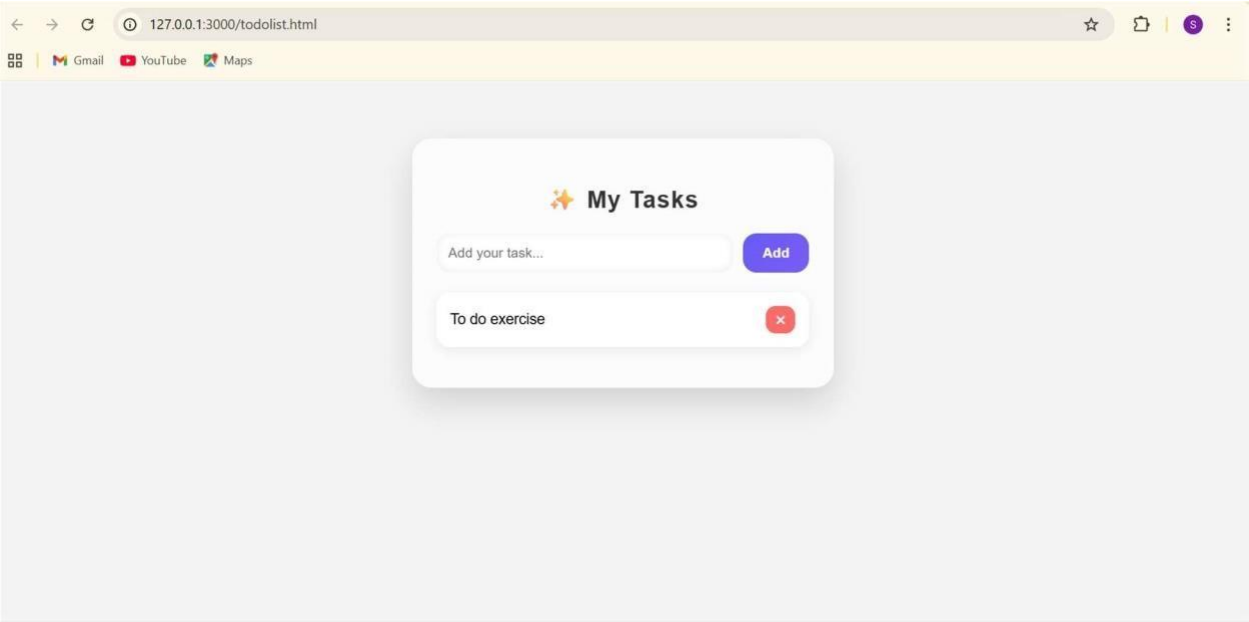
DELETING TWO TASKS