

```
In [1]: #Experiment no.8
```

```
In [5]: #Aim :To perform and analysis of Logistic Regression Algorithm
```

```
In [6]: #Name:Srushti Bawane  
#Roll no.:5  
#sec:A  
#sub:ET 1  
#date:10-19-2025
```

To Perform and Analysis og Logistic Regression Algorithm

Importing the Libraries

```
In [7]: import pandas as pd  
import numpy as np
```

Data acquisitionuing Pandas

```
In [8]: import os
```

```
In [9]: os.getcwd()
```

```
Out[9]: 'C:\\Users\\RH'
```

```
In [11]: os.chdir('C:\\Users\\RH\\Downloads')
```

```
In [12]: data=pd.read_csv("heart - heart.csv")
```

```
In [13]: data.head()
```

```
Out[13]:
```


	age	sex	cp	trestbps	chol	fbs	restecg	thalach	exang	oldpeak	slope	ca	thal	t
0	52	1	0	125	212	0	1	168	0	1.0	2	2	3	
1	53	1	0	140	203	1	0	155	1	3.1	0	0	3	
2	70	1	0	145	174	0	1	125	1	2.6	0	0	3	
3	61	1	0	148	203	0	1	161	0	0.0	2	1	3	
4	62	0	0	138	294	1	1	106	0	1.9	1	3	2	



```
In [14]: data.tail()
```

```
Out[14]:
```

	age	sex	cp	trestbps	chol	fbs	restecg	thalach	exang	oldpeak	slope	ca	thal
1020	59	1	1	140	221	0	1	164	1	0.0	2	0	2
1021	60	1	0	125	258	0	0	141	1	2.8	1	1	3
1022	47	1	0	110	275	0	0	118	1	1.0	1	1	2
1023	50	0	0	110	254	0	0	159	0	0.0	2	0	2
1024	54	1	0	120	188	0	1	113	0	1.4	1	1	3




```
In [15]: data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1025 entries, 0 to 1024
Data columns (total 14 columns):
#   Column      Non-Null Count  Dtype
---  -
0   age         1025 non-null  int64
1   sex         1025 non-null  int64
2   cp          1025 non-null  int64
3   trestbps    1025 non-null  int64
4   chol        1025 non-null  int64
5   fbs         1025 non-null  int64
6   restecg     1025 non-null  int64
7   thalach     1025 non-null  int64
8   exang       1025 non-null  int64
9   oldpeak     1025 non-null  float64
10  slope       1025 non-null  int64
11  ca          1025 non-null  int64
12  thal        1025 non-null  int64
13  target      1025 non-null  int64
dtypes: float64(1), int64(13)
memory usage: 112.2 KB
```

```
In [16]: data.describe()
```

Out[16]:

	age	sex	cp	trestbps	chol	fbs	rt
count	1025.000000	1025.000000	1025.000000	1025.000000	1025.000000	1025.000000	1025.000000
mean	54.434146	0.695610	0.942439	131.611707	246.000000	0.149268	0.500000
std	9.072290	0.460373	1.029641	17.516718	51.59251	0.356527	0.500000
min	29.000000	0.000000	0.000000	94.000000	126.000000	0.000000	0.000000
25%	48.000000	0.000000	0.000000	120.000000	211.000000	0.000000	0.000000
50%	56.000000	1.000000	1.000000	130.000000	240.000000	0.000000	1.000000
75%	61.000000	1.000000	2.000000	140.000000	275.000000	0.000000	1.000000
max	77.000000	1.000000	3.000000	200.000000	564.000000	1.000000	2.000000



In [17]: `data.shape`

Out[17]: `(1025, 14)`

In [18]: `data.size`

Out[18]: `14350`

In [19]: `data.ndim`

Out[19]: `2`

Data preprocessing data cleaning missing value treatment

In [20]: `# check Missing Value by record`

```
data.isna()
```

Out[20]:

	age	sex	cp	trestbps	chol	fbs	restecg	thalach	exang	oldpeak	slope	
0	False	False	False	False	False	False	False	False	False	False	False	False
1	False	False	False	False	False	False	False	False	False	False	False	False
2	False	False	False	False	False	False	False	False	False	False	False	False
3	False	False	False	False	False	False	False	False	False	False	False	False
4	False	False	False	False	False	False	False	False	False	False	False	False
...
1020	False	False	False	False	False	False	False	False	False	False	False	False
1021	False	False	False	False	False	False	False	False	False	False	False	False
1022	False	False	False	False	False	False	False	False	False	False	False	False
1023	False	False	False	False	False	False	False	False	False	False	False	False
1024	False	False	False	False	False	False	False	False	False	False	False	False

1025 rows × 14 columns

In [21]:

data.isna().any()

Out[21]:

ageFalse
sexFalse
cpFalse
trestbpsFalse
cholFalse
fbsFalse
restecgFalse
thalachFalse
exangFalse
oldpeakFalse
slopeFalse
caFalse
thalFalse
targetFalse
dtype: bool

In [22]:

data.isna().sum()

```
Out[22]: age      0
sex      0
cp       0
trestbps 0
chol     0
fbs      0
restecg  0
thalach  0
exang    0
oldpeak  0
slope    0
ca       0
thal     0
target   0
dtype: int64
```

Independent and Dependent Variables

```
In [23]: x=data.drop("target", axis=1)
y=data["target"]
```

Splitting of DataSet into train and Test

```
In [25]: #splitting the data into training and testing data sets
from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.2 ,random_state=42)
```

Logistic Regression

```
In [26]: from sklearn.linear_model import LogisticRegression
```

```
In [27]: log = LogisticRegression()
log.fit(x_train, y_train)
```

C:\Anaconda3_newww\Lib\site-packages\sklearn\linear_model_logistic.py:465: ConvergenceWarning: lbfgs failed to converge (status=1):
STOP: TOTAL NO. OF ITERATIONS REACHED LIMIT.

Increase the number of iterations (max_iter) or scale the data as shown in:

<https://scikit-learn.org/stable/modules/preprocessing.html>

Please also refer to the documentation for alternative solver options:

https://scikit-learn.org/stable/modules/linear_model.html#logistic-regression

n_iter_i = _check_optimize_result(

```
Out[27]: ▼ LogisticRegression ⓘ ?
LogisticRegression()
```

```
In [28]: y_pred1 = log.predict(x_test)
```

```
In [29]: from sklearn.metrics import accuracy_score
```

```
In [30]: accuracy_score(y_test,y_pred1)
```

```
Out[30]: 0.7853658536585366
```


```
In [31]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.metrics import confusion_matrix
```

```
In [32]: cm = confusion_matrix(y_test,y_pred1)
```

```
In [33]: labels = np.unique(y_test) # Get unique class labels
cm_df = pd.DataFrame(cm, index=labels, columns=labels)
```

```
In [34]: # Plot confusion matrix using seaborn
plt.figure(figsize=(6, 4))
sns.heatmap(cm_df, annot=True, fmt='d', cmap='Greens', linewidths=1, linecolor='bla

plt.xlabel("Predicted Label")
plt.ylabel("True Label")
plt.title("Confusion Matrix")
plt.show()
```

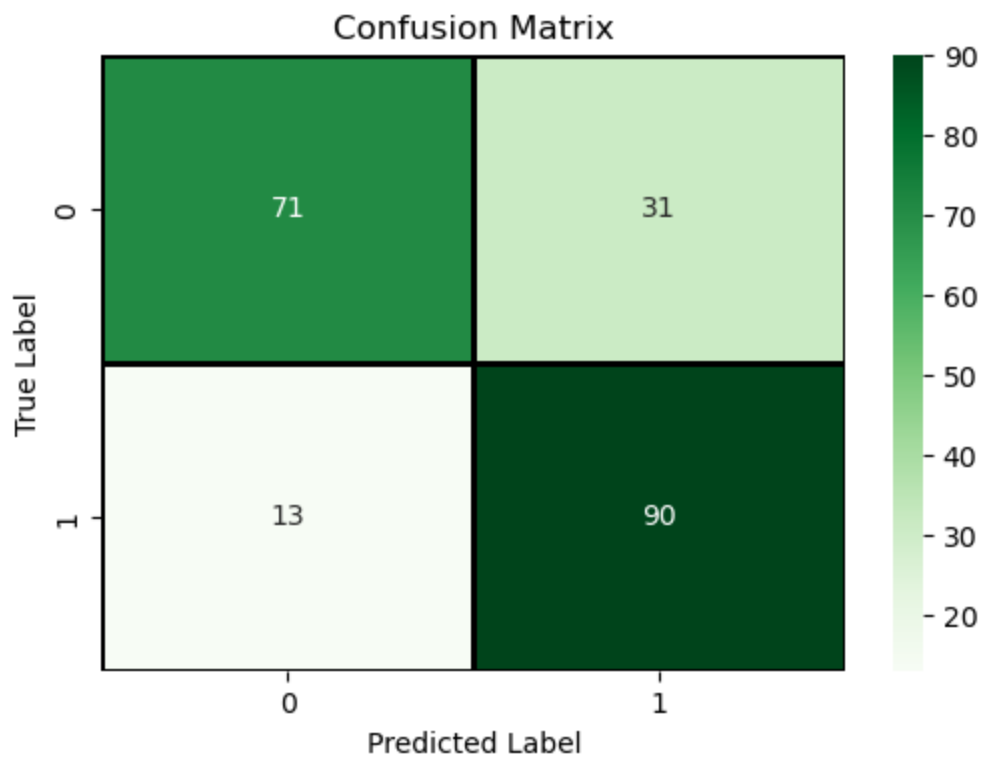

```
In [ ]:
```