


Manuscript Buddy — Complete Technical Walkthrough

Login → Logout: Every layer, every file, every theory.


1. Architecture Overview

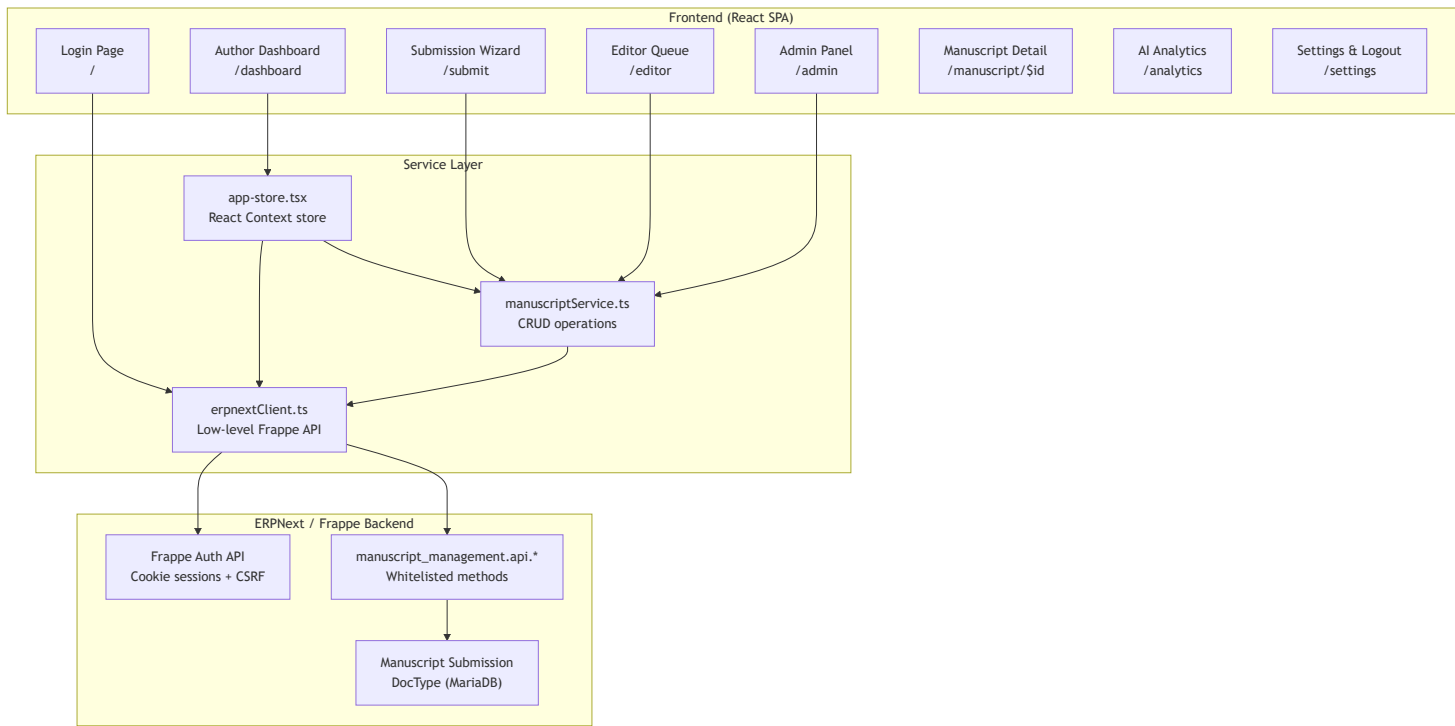

Layer	Technology	Purpose
Frontend	React 19 + TanStack Start + TanStack Router	SPA with file-based routing and SSR
UI Kit	Radix UI + Tailwind CSS 4 + Lucide icons	Accessible components + utility styling
State	React Context ([AppProvider] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/store/app-store.tsx#29-122))	Global user/manuscript state
Forms	React Hook Form + Zod	Validated forms (editor decision dialog)
Charts	Recharts	Analytics visualizations
Backend	Frappe/ERPNext (Docker)	REST API + MariaDB ORM
Database	MariaDB (InnoDB)	Frappe's default, Docker-managed
Dev Proxy	Vite server.proxy	/api → http://localhost:8080 (avoids CORS)
SSR Runtime	Nitro (Cloudflare-compatible)	Server-side rendering entry in [server.ts] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/server.ts)

2. Authentication Flow (Login → Session)

2.1 Login Sequence

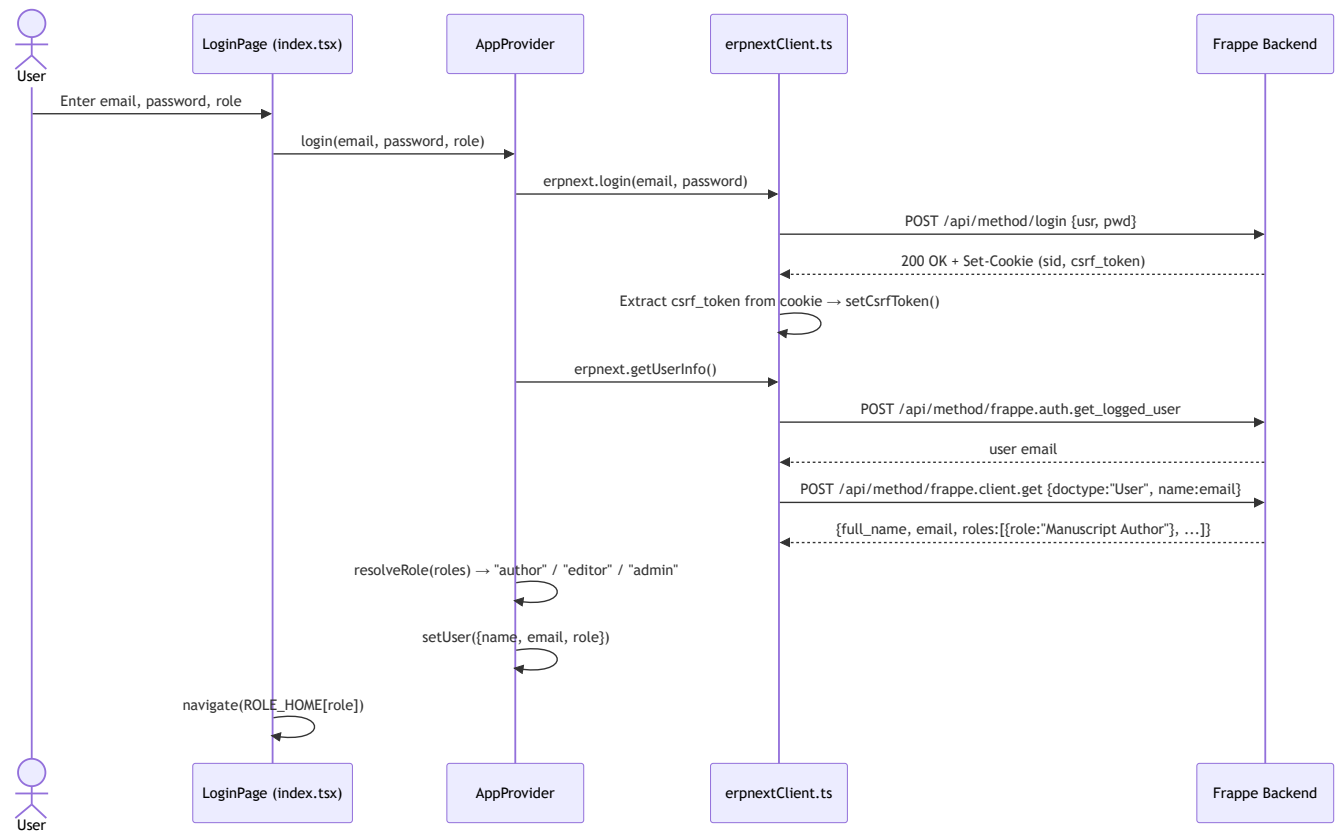

2.2 Key Technical Details

Concept	Implementation	File
Session	Cookie-based (credentials: "include" on every [fetch] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/server.ts#48-61))	[erpnextClient.ts:46] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#L44-L53)
CSRF Protection	X-Frappe-CSRF-Token header read from document.cookie	[erpnextClient.ts:85-94] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#L85-L94)
Role Resolution	"Manuscript Admin" or "System Manager" → admin; "Manuscript Editor" → editor; fallback → author	[app-store.tsx:23-27] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/store/app-store.tsx#L23-L27)
Session Persistence	On mount, [checkSession()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/store/app-store.tsx#49-65) calls [getUserInfo()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#167-200) — re-hydrates user if cookie is still valid	[app-store.tsx:48-66] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/store/app-store.tsx#L48-L66)
Error Handling	[FrappeError] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#24-37) class wraps HTTP status, _server_messages , and exc_type	[erpnextClient.ts:24-36] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#L24-L36)

2.3 Logout Flow

```
Settings page "Sign out" button
→ calls store.logout()
→ erpNext.logout()
  → POST /api/method/logout (clears server session)
  → setCsrfToken("") (clears client token)
→ setUser(null), setManuscripts([])
→ navigate("/") (back to login page)
```

Also available via the dropdown menu in [AppShell](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/AppShell.tsx#42-134) header.

3. Role-Based Access Control (RBAC)

3.1 Three Roles

Role	Frontend Key	ERPNext Role(s)	Home Route	Allowed Pages
Author	"author"	Manuscript Author	/dashboard	Dashboard, Submit, Manuscript Detail, Analytics, Settings
Editor	"editor"	Manuscript Editor	/editor	Review Queue, Manuscript Detail, Analytics, Settings
Admin	"admin"	Manuscript Admin / System Manager	/admin	Admin Panel, Analytics, Settings

3.2 Frontend Route Guard

[AppShell.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/AppShell.tsx) enforces access:

```
// Each page declares: <AppShell allow={["author"]}>
const authorized = !!role && (!allow || allow.includes(role));

useEffect(() => {
  if (!role) navigate({ to: "/", replace: true }); // not logged in → login
  else if (!authorized) navigate({ to: ROLE_HOME[role] }); // wrong role → their home
}, [role, authorized]);
```

3.3 Dynamic Navigation

NAV_BY_ROLE in [AppShell](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/AppShell.tsx#42-134) maps each role to its sidebar links:

- **Author:** Dashboard, New Submission, AI Analytics, Settings
- **Editor:** Review Queue, AI Analytics, Settings
- **Admin:** Admin Panel, AI Analytics, Settings

3.4 Backend Permissions

[manuscript_submission.json](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/erpnext_backend/manuscript_management/manuscript_management/doctype/manuscript_submission/manuscript_submission.json#L233-L258) defines DocType-level permissions:

Role	Read	Write	Create	Delete
System Manager	✓	✓	✓	✓
Manuscript Author	✓	✓	✓	✗
Manuscript Editor	✓	✓	✗	✗

Role	Read	Write	Create	Delete
Manuscript Admin	✓	✓	✓	✓

4. Global State Management

4.1 AppProvider Context

[app-store.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/store/app-store.tsx) — React Context providing:

```
interface AppState {
  user: User | null;           // {name, email, role}
  role: Role | null;          // derived from user
  manuscripts: Manuscript[]; // loaded from backend
  loading: boolean;
  error: string | null;
  login(email, password, role): Promise<void>;
  logout(): Promise<void>;
  refresh(): Promise<void>; // re-fetches all manuscripts
}
```

4.2 Data Flow



- **Single source of truth:** All pages consume [useApp()](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/store/app-store.tsx#123-128) for the same manuscript list
- **Refresh pattern:** After any mutation (submit, decision, state change), call `refresh()` to re-fetch

5. API Client Layer

5.1 erpNextClient.ts — Low-Level Frappe Client

[erpnextClient.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts)

Function	HTTP Call	Purpose
[login(usr, pwd)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#114-145)	POST /api/method/login	Authenticate, capture CSRF cookie
[logout()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#146-153)	POST /api/method/logout	Destroy session
[getLoggedInUser()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#154-166)	POST /api/method/frappe.auth.get_logged_user	Check active session
[getUserInfo()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#167-200)	[getLoggedInUser()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#154-166) + frappe.client.get on User doctype	Get name + roles

Function	HTTP Call	Purpose
[call(method, args)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#98-113)	POST /api/method/{method}	Generic whitelisted method call

Base URL logic:

- Dev: VITE_ERPNEXT_URL="" → relative paths → Vite proxy forwards to ERPNext
- Prod: Set VITE_ERPNEXT_URL=https://your.erpnext.site

5.2 manuscriptService.ts — Business Logic

[manuscriptService.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts)

Function	API Method	Purpose
[listManuscripts(options)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#57-71)	manuscript_management.api.list_manuscripts	Paginated list
[getManuscript(id)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#83-94)	manuscript_management.api.get_manuscript	Single record
[createManuscript(payload)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#126-153)	manuscript_management.api.create_manuscript	New submission
[updateState(id, state, actor)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#154-167)	manuscript_management.api.update_state	Workflow transition
[assignEditor(id, editor, actor)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#168-179)	manuscript_management.api.assign_editor	Admin action
[addEditorDecision(id, decision, ...)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#180-195)	manuscript_management.api.add_editor_decision	Approve/revise/reject
[uploadRevision(id, fileName, actor)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#196-207)	manuscript_management.api.upload_revision	Re-submit after revisions
[generateAIReport(input)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#95-125)	Client-side only	Randomized mock AI scan
[sortManuscripts(list, key, dir)] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#41-54)	Client-side only	In-memory sorting

6. Data Types & Type System

[types.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/types.ts)

6.1 Core Types

```
type Role = "author" | "editor" | "admin";

type WorkflowState = "Draft" | "AI Processing" | "Pending Editor Review"
  | "Revisions Requested" | "Approved" | "Published" | "Rejected";

interface Manuscript extends ManuscriptBase {
  state: WorkflowState;
  rejectionReason?: string; // only on RejectedManuscript
}

interface ManuscriptBase {
  id: string; // e.g. "MS-00042"
  title: string;
  author: string;
  submittedAt: string; // ISO datetime
  editor: string | null;
  genre: string;
  secondaryGenre?: string;
  audience?: string;
  keywords: string[];
  abstract?: string;
  synopsis?: string;
  pageCount?: number;
  launchDate?: string;
  fileName?: string;
  fileSize?: number;
  ai: AIReport | null;
  timeline: TimelineEvent[];
  notes: EditorNote[];
}
```


6.2 Discriminated Union Pattern

The `[Manuscript](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/types.ts#90-98)` type is a **discriminated union** on the `state` field. This ensures `rejectionReason` is only typed as required when `state === "Rejected"` :

```
type Manuscript =
  | DraftManuscript // state: "Draft"
  | ProcessingManuscript // state: "AI Processing"
  | PendingManuscript // state: "Pending Editor Review"
  | RevisionsRequestedManuscript
  | ApprovedManuscript
  | PublishedManuscript
  | RejectedManuscript; // includes rejectionReason: string
```

7. Workflow State Machine

7.1 State Transitions

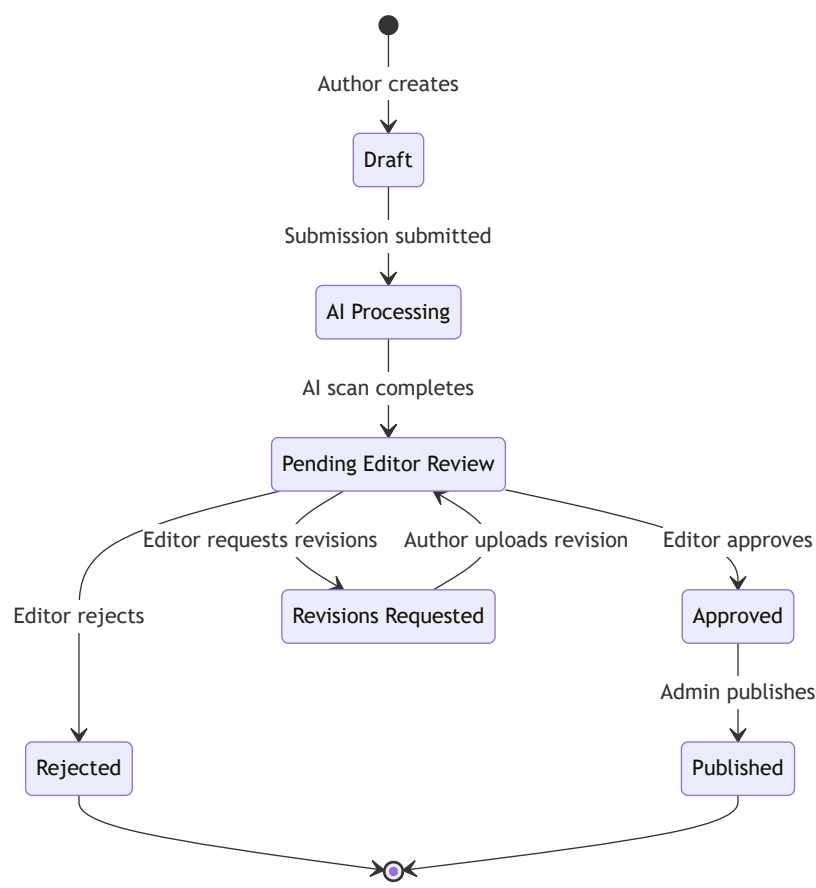

7.2 Who Triggers Each Transition

Transition	Actor	Mechanism
Draft → AI Processing	System	On submission via [createManuscript()](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#126-153)
AI Processing → Pending Editor Review	System	After AI scan completes
Pending Editor Review → Approved	Editor	[addEditorDecision(id, "approve", ...)](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#180-195)
Pending Editor Review → Revisions Requested	Editor	[addEditorDecision(id, "revise", ..., feedback)](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#180-195)
Pending Editor Review → Rejected	Editor	[addEditorDecision(id, "reject", ..., feedback, reason)](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#180-195)
Revisions Requested → Pending Editor Review	Author	[uploadRevision(id, fileName, ...)](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#196-207)
Approved → Published	Admin	[updateState(id, "Published", ...)](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#154-167)
Any → Any (force)	Admin	[updateState(id, targetState, ...)](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#154-167)

7.3 Pipeline Visualization

[PipelineTracker.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/PipelineTracker.tsx) renders the **six-step pipeline** using the `WORKFLOW_STATES` array:

Draft → AI Processing → Pending Editor Review → Revisions Requested → Approved → Published

Each step shows as completed (✓), active (ring), or future (dimmed).

8. Database Schema (ERPNext DocType)

8.1 Main DocType: Manuscript Submission

[manuscript_submission.json](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/erpnext_backend/manuscript_management/manuscript_management/ddoctype/manuscript_submission/manuscript_submission.json)

Property	Value
Autoname	format:MS-##### (e.g. MS-00001)
Engine	InnoDB (MariaDB)
Sort Field	submitted_at DESC
Title Field	title
Search Fields	title, author, state

Field groups (37 total fields):

Section	Fields
Basic	title, author, state, submitted_at, assigned_editor
Genre & Audience	genre (Select, 8 options), secondary_genre, audience, keywords
Content Details	abstract, synopsis, page_count, launch_date
Manuscript File	manuscript_file (Attach), file_name (read-only), file_size (read-only)
Rejection	rejection_reason (visible only when state=Rejected)
AI Report	ai_score, ai_readability, ai_marketability, ai_detected_pages, ai_title_matched, ai_summary, ai_genre_confidence (JSON), ai_pacing (JSON)
Timeline	timeline_events → child table Manuscript Timeline Event
Editor Notes	editor_notes → child table Manuscript Editor Note

8.2 Child Tables

Manuscript Timeline Event: actor (Data) + action (Data) + timestamp (Datetime)

Manuscript Editor Note: note_author (Data) + created_at (Datetime) + body (Text)

8.3 Server-Side Controller

[manuscript_submission.py](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/erpnext_backend/manuscript_management/manuscript_management/ddoctype/manuscript_submission/manuscript_submission.py):

```
class ManuscriptSubmission(Document):
    def before_save(self):
        # Auto-populate submitted_at on first save
        if not self.submitted_at:
            self.submitted_at = frappe.utils.now_datetime()

    def validate(self):
        # Enforce: rejected manuscripts MUST have a reason
        if self.state == "Rejected" and not (self.rejection_reason or "").strip():
            frappe.throw("Rejection reason is required when rejecting a manuscript.")
```

9. Page-by-Page Breakdown

9.1 Login (/ — [index.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/index.tsx))

- **Fields:** Email/Username, Password, Role (Select: Author/Editor/Admin)
- **Validation:** Client-side for empty fields + server error display
- **Auto-redirect:** If already logged in (`activeRole` exists), redirect to `ROLE_HOME[role]`
- **Submit:** Calls `store.login()` → navigates on success, shows error on failure

9.2 Author Dashboard (/dashboard — [dashboard.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/dashboard.tsx))

- **Guard:** `<AppShell allow=[["author"]]>`
- **Stats cards:** Total Submitted, Under Review, Action Required, Published
- **Pipeline tracker:** Shows live status of the first active manuscript
- **Manuscripts table:** Title, Submitted date, State (badge), Editor, AI Score, Actions
- **Actions:** "View Details" (all), "Continue Draft" (Draft state), "Upload Revisions" (Revisions Requested)

9.3 Submission Wizard (/submit — [submit.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/submit.tsx))

5 steps with per-step validation:

Step	Name	Fields	Validation
0	Title & Category	Title (max 120 chars), Primary Genre, Secondary Genre, Audience, Keywords (tag input)	Title required, genre required, audience required
1	Description	Abstract (min 5 words), Synopsis, Page Count, Launch Date	Abstract min 5 words, synopsis required
2	Upload PDF	Drag & drop or click-to-upload, .pdf only, max 50MB	File uploaded + 100% complete
3	Preview & AI Scan	PDF iframe preview + AI preflight report	Auto-generated by [generateAIReport()] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#95-125) (client-side)
4	Confirm	Summary of all fields + originality checkbox	Checkbox must be checked

AI Report is generated client-side with randomized scores (readability, marketability, pacing, genre confidence). This is a mock/preview; a real ML pipeline would run server-side.

Final Submit: Opens confirmation dialog → calls `[createManuscript()](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#126-153)` → refreshes store → navigates to `/manuscript/$id`.

9.4 Manuscript Detail (`/manuscript/$id` — `[manuscript.id.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/manuscript.id.tsx)`)

- **Header:** Title, Status badge, ID, submit date, editor
- **Pipeline tracker:** Six-step progress visualization
- **Three tabs:**
 - i. **AI Analysis Report:** Genre confidence bars, pacing bars, readability score, marketability index, AI executive summary
 - ii. **Workflow Timeline:** Chronological audit log with actor + action + timestamp
 - iii. **Editor Feedback:** Editor notes list + rejection reason (if any) + revision upload zone (if state = "Revisions Requested")

Revision upload: Click-to-upload `.pdf` → calls `[uploadRevision()](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#196-207)` → refreshes → toast notification.

9.5 Editor Queue (`/editor` — `[editor.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/editor.tsx)`)

- **Guard:** `<AppShell allow={{["editor"]}}>`
- **Table:** Manuscripts with state "Pending Editor Review" Or "AI Processing"
- **Sortable columns:** Manuscript (by submittedAt), Author, AI Score
- **Pagination:** 5 items per page
- **Make Decision dialog** (Zod-validated form):
 - **Approve:** No extra fields needed
 - **Request Revisions:** Feedback textarea required
 - **Reject:** Rejection reason (Select from predefined list) + explanation textarea, both required
- Calls `[addEditorDecision()](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/manuscriptService.ts#180-195)` → refreshes

9.6 Admin Panel (`/admin` — `[admin.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/admin.tsx)`)

- **Guard:** `<AppShell allow={{["admin"]}}>`
- **AdminOverview component** (25KB): Pipeline stage breakdown, stats, quick-action cards
- **ManuscriptTable:** Full table of all manuscripts with search, filter, sort
 - **Assign editor:** Dropdown of available editors
 - **Force state:** Advance to any workflow state
 - **Publish:** One-click publish for approved manuscripts
- **ManuscriptDrawer:** Slide-over panel showing full manuscript record

9.7 AI Analytics (`/analytics` — `[analytics.tsx](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/analytics.tsx)`)


- **No role restriction** (but AppShell still requires login)
- **Portfolio metrics:** Average AI score, readability, marketability across all scanned manuscripts
- **Per-manuscript bars:** Score percentage visualized with progress bars

9.8 Settings (/settings — [settings.tsx]
(file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/routes/settings.tsx))

- **Profile card:** Full name, email (from context), active role (read-only)
- **Notifications:** Toggle switches for editor decisions, AI scan completion, publication milestones
- **Sign out button:** Calls [logout()](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/erpnextClient.ts#146-153) → navigates to /

10. Frontend Component Architecture

10.1 Component Tree

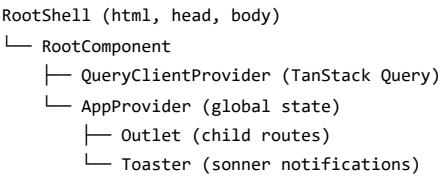

10.2 Key Shared Components

Component	File	Purpose
[AppShell] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/AppShell.tsx#42-134)	[AppShell.tsx] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/AppShell.tsx)	Layout shell with header, nav, user menu, route guard
[PipelineTracker] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/PipelineTracker.tsx#5-47)	[PipelineTracker.tsx] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/PipelineTracker.tsx)	Six-step workflow visualization
[StatusBadge] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/StatusBadge.tsx#14-27)	[StatusBadge.tsx] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/StatusBadge.tsx)	Colored pill badge per workflow state
LoremMark	[LoremMark.tsx] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/LoremMark.tsx)	Brand SVG icon
AdminOverview	[AdminOverview.tsx] (file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/components/pub/AdminOverview.tsx)	Dashboard overview for admin with pipeline stats
ManuscriptTable	admin/ subdirectory	Searchable, filterable admin table
ManuscriptDrawer	admin/ subdirectory	Slide-over detail panel

10.3 UI Component Library (Radix-based)

All under `src/components/ui/` : Button, Input, Label, Textarea, Select, Checkbox, Switch, Dialog, Tabs, RadioGroup, Progress, Pagination, DropdownMenu, Tooltip, Accordion, etc.

11. Publishing Metadata Layer

[publishingMeta.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/publishingMeta.ts) — Presentation-only derived data:

Computed Field	Logic
ISBN	Deterministic from manuscript ID hash: 978-1-xxxx-xxx-x
ISBN Status	Published → Assigned, Approved → Reserved, else → Not requested
Pipeline Stage	Maps [WorkflowState](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/services/types.ts#12-13) → 7 pipeline stages (Submitted → Published)
Proofreading %	0–100 based on state advancement
Cover Status	Not started → In design → In review → Approved
Priority	AI score ≥ 85 or Approved → High; ≥ 70 → Medium; else → Low
Due Date	Deterministic offset from current date via hash

Pipeline Stages (expanded from workflow states):

Submitted → Assigned → Editing → Review → Proofreading → Design → Published

12. Server-Side Rendering (SSR)

[server.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/server.ts) wraps the TanStack Start server entry:

- 1. Imports `@tanstack/react-start/server-entry` lazily
- 2. Forwards all requests through TanStack's SSR handler
- 3. Catches h3-swallowed 500 errors (JSON `{unhandled: true, message: "HTTPError"}`) and renders a static error page
- 4. Falls back to `renderErrorPage()` for uncaught exceptions

Error reporting integrates with Lovable's error capture pipeline via [error-capture.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/src/lib/error-capture.ts).

13. Dev & Build Configuration

13.1 Vite Config

[vite.config.ts](file:///c:/Users/rahul/OneDrive/Booksubmission_grp2/manuscript-buddy/vite.config.ts):

```
export default defineConfig({
  vite: {
    server: {
      proxy: {
        "/api": {
          target: "http://localhost:8080", // ERPNext Docker
          changeOrigin: true,
          secure: false,
        },
      },
    },
  },
  tanstackStart: {
    server: { entry: "server" }, // → src/server.ts
  },
});
```

13.2 Environment Variables

Variable	Purpose	Default
VITE_ERPNEXT_URL	ERPNext backend URL	"" (uses Vite proxy in dev)

13.3 Key Scripts

```
"dev": "vite dev",           // Start dev server
"build": "vite build",       // Production build
"preview": "vite preview"    // Preview production build
```

14. End-to-End Flow Summary

- 1. LOGIN → POST /api/method/login → cookie session → CSRF token captured
- 2. SESSION → getUserInfo() → role resolved → navigate to role home
- 3. DASHBOARD → listManuscripts() → table render → stats computed
- 4. SUBMIT → 5-step wizard → createManuscript() → backend saves to MariaDB
- 5. AI SCAN → generateAIReport() (client-side mock) → scores attached to submission
- 6. EDITOR REVIEW → editor views queue → makes decision (approve/revise/reject)
- 7. REVISIONS → author uploads new PDF → uploadRevision() → back to editor queue
- 8. ADMIN CONTROL → assign editor, force state, publish
- 9. ANALYTICS → aggregate AI scores across portfolio
- 10. LOGOUT → POST /api/method/logout → clear token → redirect to login