
## CommonGLPIInterface static \_construct() #\$othertabs #\$showTitleInNavigation Header +\$rightname CommonGLPI + \$showdebug + \$taborientation + \$get\_item\_to\_display\_tab # \$type # \$displaylist + \_\_construct() + can(\$ID, \$right, array &\$input=null) + defineTabs(\$options=[]) + addStandardTab(\$itemtype, array &\$ong, array \$options) + addDefaultFormTab (array &\$ong) + getTabNameForItem (CommonGLPI \$item, #\$foreign\_key\_fields \$withtemplate=0) + isNewItem() #\$forward\_entity to + showTabsContent(\$options=[]) #\$notable + getHeaderName() #\$plugins\_forward + display(\$options=[]) entity #\$tables\_of + getErrorMessage(\$error, +\$undisclosedFields \$object='') + static getTypeName (\$nb=0)+ static getFieldLabel() + static getType() + static canCreate() + static canView() + static canUpdate() + static canDelete() + static canPurge() + static registerStandardTab (\$typeform, \$typetab) + static getOtherTabs (\$typeform) et 17 de plus... # getFormHeaderToolbar() CommonDBTM + \$fields + \$input + \$updates + \$oldvalues + \$dohistory + \$history\_blacklist + \$auto\_message\_on\_action + \$no\_form\_page + \$additional\_fields \_for\_dictionnary + \$taborientation

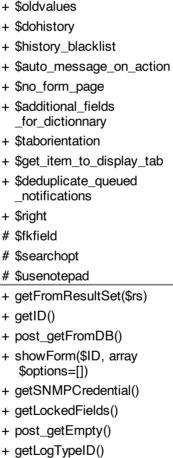

=null) + static forceTable( \$table) + static getForeignKeyField() + static getTableField (\$field, \$classname=null) + static getFromIter (DBmysqlIterator \$iter) + static unsetUndisclosedFields (&\$fields) + static getIndexName() + static isNewID(\$ID) + static getNameField()

+ post\_deleteFromDB() + cleanDBonPurge() et 87 de plus...

+ static getTable(\$classname

- + static getCompleteNameField() et 26 de plus... # saveInput()
- \$default=[])
- # clearSavedInput() # restoreInput(array
- # restoreSavedValues
- (array \$saved=[]) # cleanLockedsOnAdd()
- # cleanLockeds()

# computeFriendlyName()

CommonITILRecurrentCron