


Laminas\Validator\File  
\ExcludeExtension\isValid

isValid

getCase

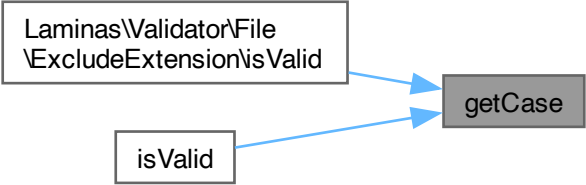

```
graph LR; A["Laminas\Validator\File<br/>\ExcludeExtension\isValid"] --> C[getCase]; B[isValid] --> C;
```

The diagram illustrates two calls to the `getCase` method. A large box on the left contains the fully qualified class and method name: `Laminas\Validator\File\ExcludeExtension\isValid`. A smaller box below it contains the method name `isValid`. Both boxes have blue arrows pointing to a gray box on the right labeled `getCase`.