

Class 5: Data Viz with ggplot2

Steven Studdard (PID: A19123470)

Table of contents

Background	1
Add some custom features	3
Import a Gene	4
Going Further	6

Background

There are many graphics systems in R for making plots and figures. These include so-called “*base R*” *graphics* like the `plot()` function and add on packages like **ggplot2**.


Let’s compare how we make a simple figure with these two systems:

We can use the in-built `cars` dataset:

```
head(cars)
```

```
  speed dist
1     4    2
2     4   10
3     7    4
4     7   22
5     8   16
6     9   10
```

```
plot(cars)
```

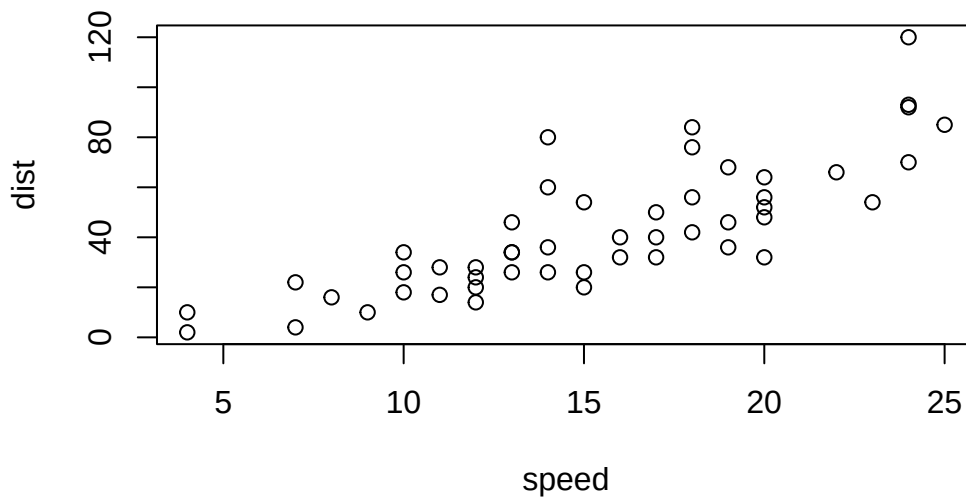

Before I can use ggplot2 I need to install it on my computer. To do this we can use the function `install.packages("ggplot2")`

N.B. We never run `install.packages()` in our quarto doc (we run it once only in our console) as it would re-install the package every time we render our quarto report.


```
library(ggplot2)
```

The Main function in the **ggplot** package is called `ggplot()`.

Every ggplot has at least 3 layers

-the **data** (a data frame of the stuff we want to plot) -the **aesthetics** (how the data maps to the plot) -the “**geom** layer” (how you want the plot drawn, e.g points, lines, etc)

```
ggplot(data = cars)+  
  aes(speed, dist)+  
  geom_point()
```

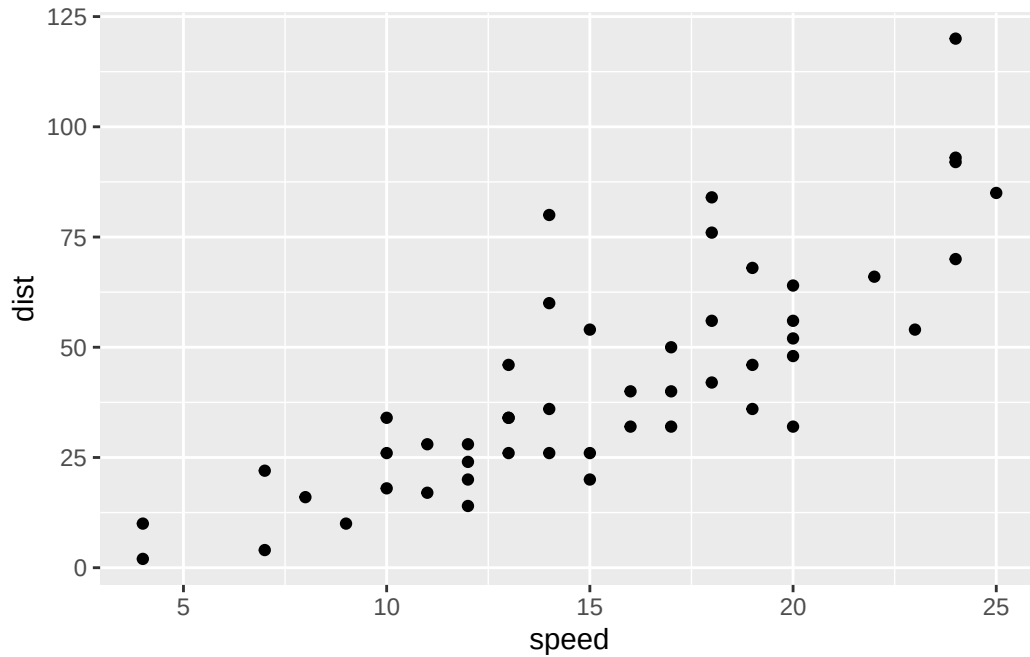


Add some custom features

Let's add a trend line that shows the relationship between speed and distance.

```
ggplot(data = cars)+  
  aes(x = speed, y = dist)+  
  geom_point()+  
  geom_smooth(se = FALSE, method = lm, col = 'yellow')+  
  theme_minimal()+  
  labs(title="Stopping Dist of Old Cars",  
        x = "Speed (MPH)",  
        y = "Distance (ft)")
```

``geom_smooth()`` using `formula = 'y ~ x'`

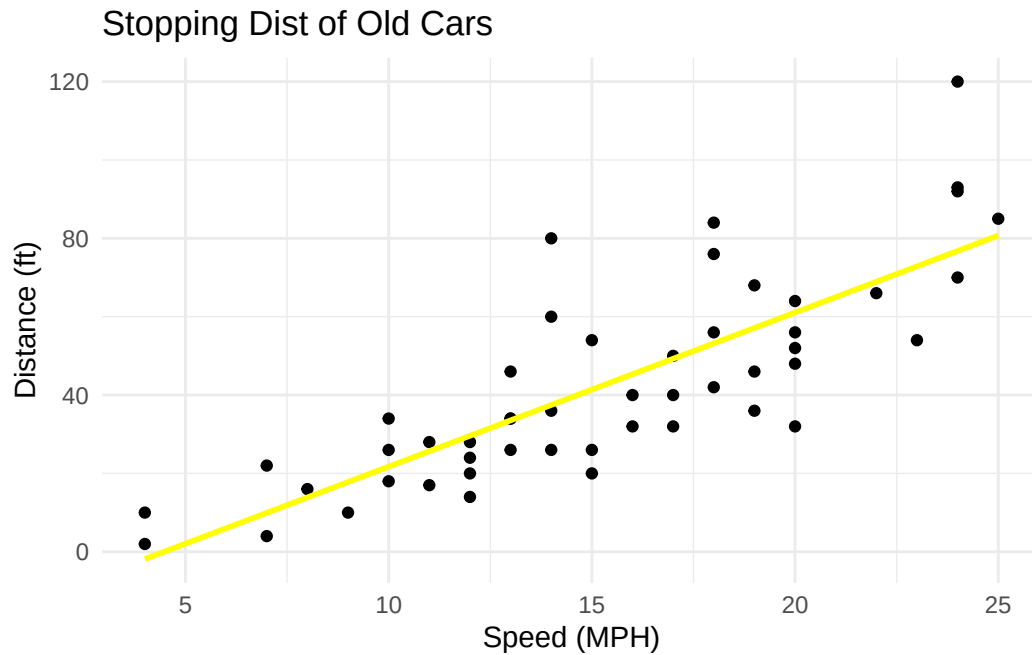

Q. Can you make the `geom_smooth()` function produce a linear straight line fit to the data and turn off the “gray” error region.

Import a Gene

```
url <- "https://bioboot.github.io/bimm143_S20/class-material/up_down_expression.txt"
genes <- read.delim(url)
head(genes, 5)
```

	Gene	Condition1	Condition2	State
1	A4GNT	-3.6808610	-3.4401355	unchanging
2	AAAS	4.5479580	4.3864126	unchanging
3	AASDH	3.7190695	3.4787276	unchanging
4	AATF	5.0784720	5.0151916	unchanging
5	AATK	0.4711421	0.5598642	unchanging

```
sum(genes$State == "up")
```

[1] 127


A useful new function in this context is the `table()` function:

```
table(genes$State)
```

down	unchanging	up
72	4997	127

First plot attempt

```
ggplot(genes)+  
  aes(Condition1, Condition2, col = State)+  
  scale_color_manual(values = c("turquoise", "gray", "violet"))+  
  geom_point()+  
  theme_bw()+  
  labs(x="No drug", y="Drug",  
       title="Expression cahnges upon GLP-1 inhibitor treatment")
```

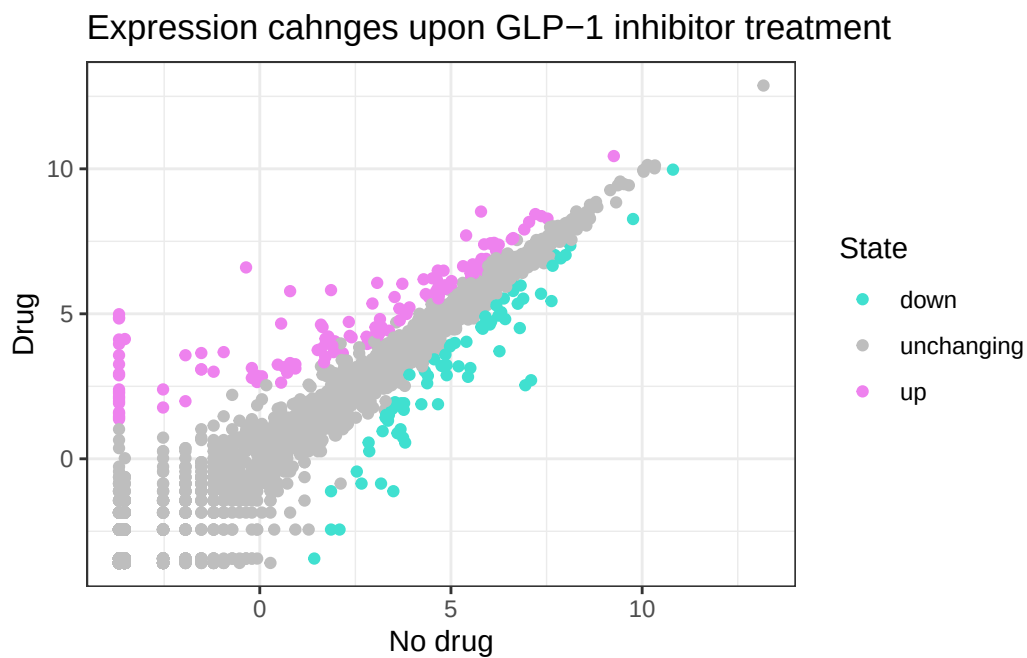

Going Further

Here we read the famous gapminder dataset:

```
url <- "https://raw.githubusercontent.com/jennybc/gapminder/master/inst/extdata/gapminder.tsv"

gapminder <- read.delim(url)
head(gapminder)
```

	country	continent	year	lifeExp	pop	gdpPercap
1	Afghanistan	Asia	1952	28.801	8425333	779.4453
2	Afghanistan	Asia	1957	30.332	9240934	820.8530
3	Afghanistan	Asia	1962	31.997	10267083	853.1007
4	Afghanistan	Asia	1967	34.020	11537966	836.1971
5	Afghanistan	Asia	1972	36.088	13079460	739.9811
6	Afghanistan	Asia	1977	38.438	14880372	786.1134

Q. How many entries (i.e rows) are in this dataset?

```
nrow(gapminder)
```

```
[1] 1704
```

Q. How many different “country” entries are in this data set.

```
length(table(gapminder$country))
```

```
[1] 142
```

```
length(unique(gapminder$country))
```


```
[1] 142
```

Let’s make our first plot of the entire dataset:

Plot of “gdpPercap” vs “lifeExp” colored by “continent”


```
p <- ggplot(gapminder)+
  aes(gdpPercap, lifeExp, col = continent)+
  geom_point(alpha=0.3)

p
```

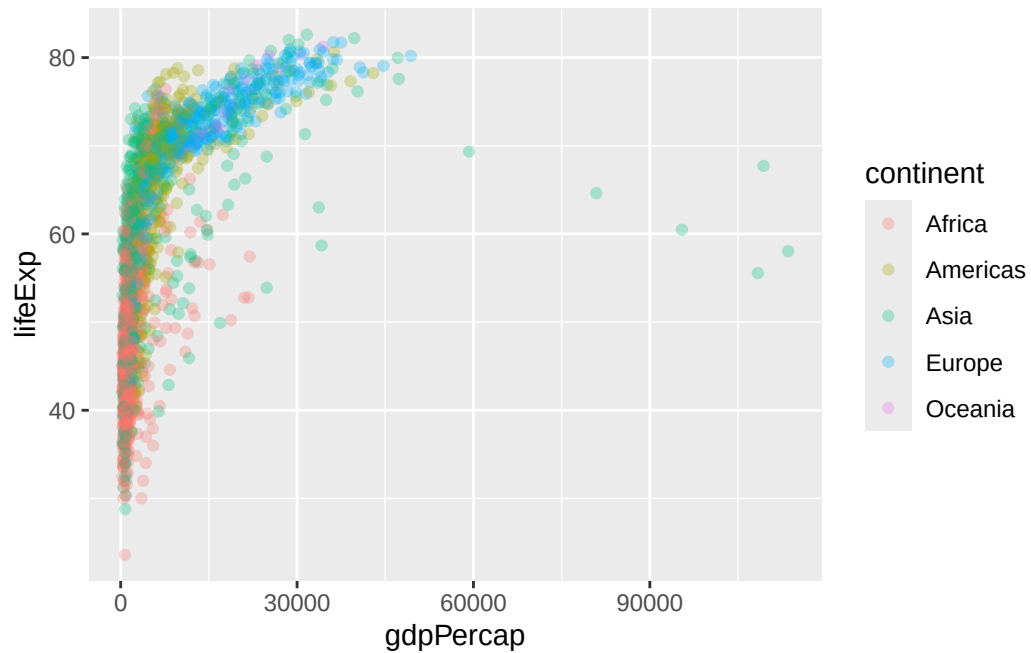

I can add more layers to p

```
p +  
  facet_wrap(~gapminder$continent)
```

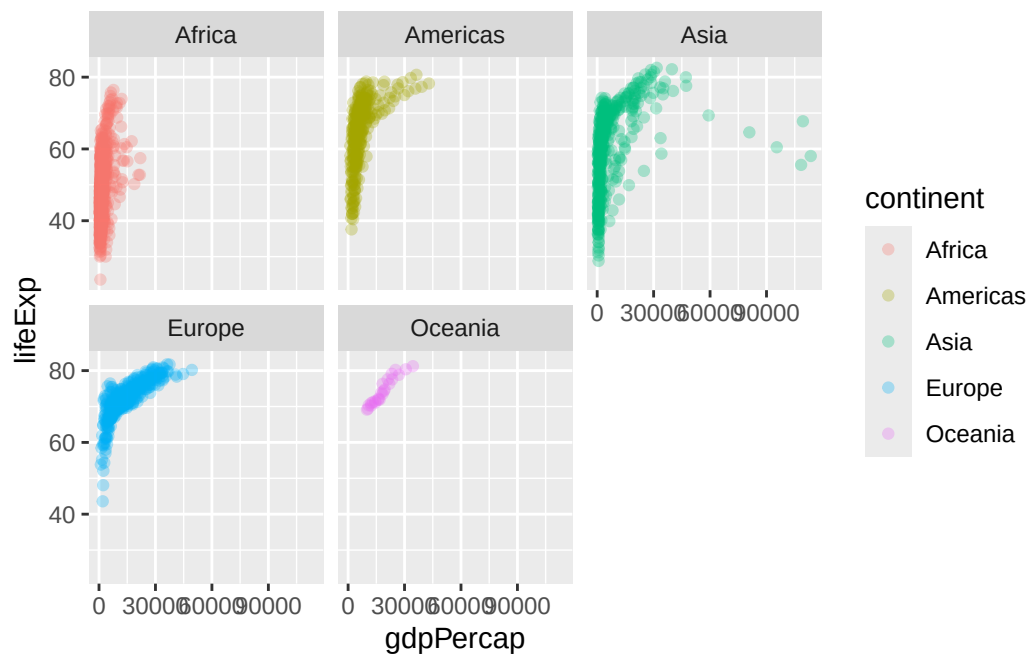


Make a plot for 1977 and 2007 only (not all the years in the dataset).

First use the **dplyr** package and the **filter()** function from that package to extract the year 2007.

```
library(dplyr)
```

```
g07 <- filter(gapminder, year == 2007)
g77 <- filter(gapminder, year == 1977)
g <- filter(gapminder, year == 2007 | year == 1977)
```


```
ggplot(g)+
  aes(gdpPercap, lifeExp, col=continent, size=pop)+
  geom_point()+
  facet_wrap(~year)
```

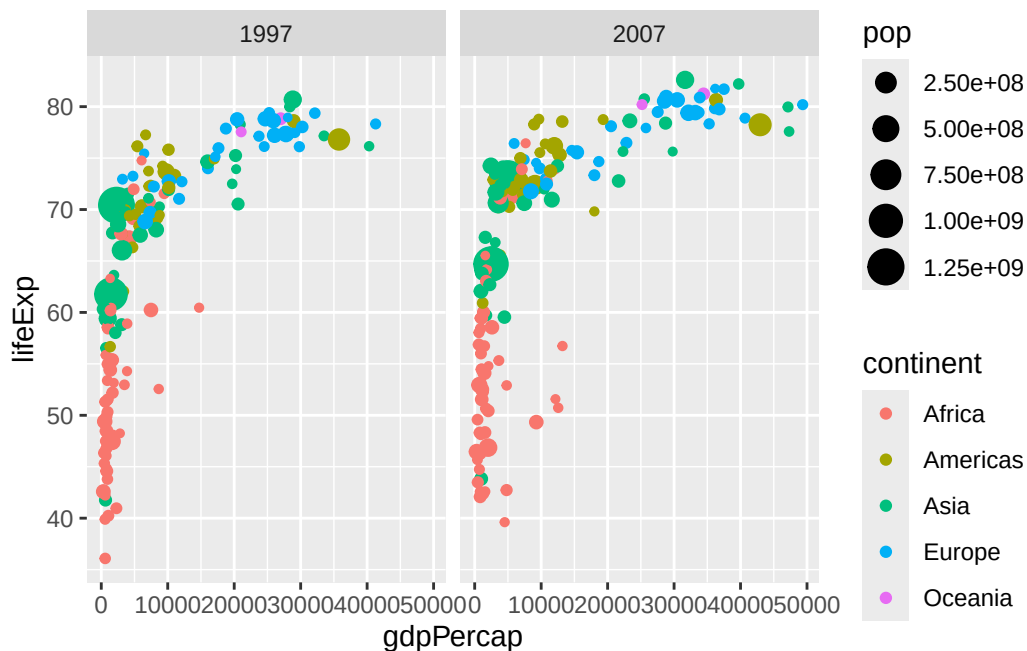

Q. Make a histogram of lifeExp colored by continent (try using **fill=continent** or **col=continent**) Q. Make a histogram of lifeExp faceted by continent

```
ggplot(gapminder)+
  aes(lifeExp, fill=continent)+
  geom_histogram()
```

``stat_bin()`` using ``bins = 30``. Pick better value ``binwidth``.

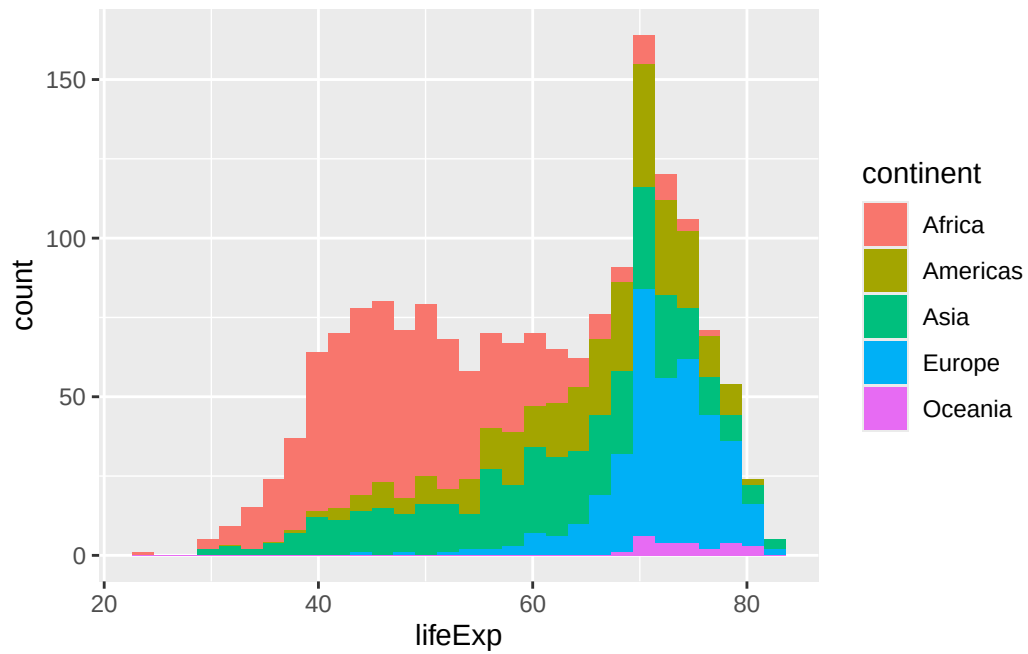

```
ggplot(gapminder)+  
  aes(lifeExp, col=continent)+  
  facet_wrap(~continent)+  
  geom_histogram()
```

``stat_bin()`` using ``bins = 30``. Pick better value ``binwidth``.

