

Packing Logical KV Slices Under CUDA 2 MiB Granularity: 42% Measured VRAM Liberation on H100

Stanislav Byriukov
Independent Researcher
`stanislav.byriukov.research@gmail.com`

Abstract

On NVIDIA H100 PCIe (driver 550.163), a user-space CUDA shim packing 512 KiB logical KV bands into 2 MiB driver leaves reduces **committed** VRAM by **42.2%** at a 70% VRAM budget fill while delivering **131%** higher budget-curve logical KV than stock at the same tier (50%/60%: 19.1%/32.6% liberation). The headline gain is a budget-curve ratio against growing stock commitment; matched-slot F1' resident stress shows **0.15%** slot gain and **100%** vs **70.3%** layout efficiency—the mechanism proof, not 131%.

We intercept `cuMemAddressReserve/cuMemCreate/cuMemMap` via `lib2adic_shim.so` and LD_PRELOAD without application source changes. Evaluation uses a **synthetic KV-band microbenchmark** with GATE12 transcripts and Docker reproduction: it isolates *allocator/driver-layer* behavior from framework paging (vLLM PagedAttention operates above this layer). **Track B** (production-stack vLLM integration) is a planned follow-up release, not part of tag `t1-eval-20260522`. We do not claim inference P99, per-`cuMem*` alloc-path latency, FLOPS/W, or industry Z-scores in this paper.

Keywords: KV cache, CUDA, GPU memory, memory granularity, data structures, reproducible benchmark, GATE12.

Declaration on the use of AI language tools: Structure assisted by Cursor Agent; all benchmarks run on H100 by the author. Generative tools did not execute GPU experiments and did not alter GATE12 metrics or reported tables.

1 Introduction

KV cache footprint dominates VRAM in long-context LLM inference [3, 7]. Allocator behavior at the CUDA driver boundary—not only high-level frameworks—determines how many logical slots fit under a memory budget [4, 5].

Problem. When the platform enforces ~ 2 MiB minimum mapping granularity, mapping one 512 KiB logical KV slice per leaf wastes physical commitment: only one quarter of the leaf carries application-visible KV bytes in the uniform-iso regime. Frameworks may request sub-leaf logical regions; the stock path in our iron baseline still commits one 2 MiB mapping per slot.

Approach. A shim intercepts `cuMem*` on the allocation path, reserves logical virtual spans, and packs multiple logical slots per 2 MiB leaf (P1 policy, $k \approx 4$ for 512 KiB slices). Mega-VA mode amortizes `cuMemAddressReserve` across resident pools used in multi-slot benches.

Contributions (measurement-backed only).

1. Iron-verified `leaf_bytes=2097152` on H100 and P1 packing for uniform 512 KiB iso slices.
2. VRAM budget curve (50/60/70% caps) with explicit stock-class pairing and plateau disclosure.
3. Reproducible artifact: evaluation repository, Docker gate, fixed `workload_id`, canonical GATE12 transcripts (Appendix A).

2 Background and Related Work

CUDA virtual memory. Modern CUDA separates virtual address reservation from physical allocation [4, 5]. Our work operates at this boundary via `LD_PRELOAD`—not kernel modules or eBPF.

LLM KV cache systems. Serving systems such as vLLM introduced paged KV attention to improve throughput [3]. **We do not benchmark vLLM** in this paper; we cite them only as motivation for KV memory pressure.

GPU memory context. Accelerator memory pressure and pooling are surveyed in [6]. Our shim is policy-specific to 2 MiB CUDA leaves and measured KV-band workloads—not a general GPU allocator.

Author measurement line. Prior work [1] documents iron GPU receipts (energy/latency) on H100-class hardware; it does **not** evaluate KV packing or CUDA `cuMem*` interception.

3 Design

3.1 Stock baseline


For each logical slot the stock path issues `cuMemAddressReserve`, `cuMemCreate`, and `cuMemMap` with physical size 2 MiB for requests up to 512 KiB (iron `frag_alloc_bytes`). Layout efficiency under uniform 512 KiB logical bands is therefore at most $512 \text{ KiB} / 2 \text{ MiB} = 25\%$ before any framework overhead; F1' resident measurement reports **70.3%** on stock vs **100%** on shim at matched stress (Table 2).

3.2 Shim packing (P1 + mega)


- **P1 pack:** up to $k=4$ logical 512 KiB slices share one `leaf_bytes` leaf when placement rounds allow.
- **Mega-VA:** one large virtual reservation backs many resident slots; required for multi-slot pools without per-slot reserve storms.
- **Evaluation-only:** `lib2adic_shim.so` + `iron_gate.v1`; production/unlimited binaries under separate license.

Figure 1 contrasts one 2 MiB leaf under stock vs packed shim policy.

Stock (one logical slot per leaf)



Shim P1 ($k=4$ logical slots per leaf)



2 MiB leaf fully utilized (100% layout efficiency at iso)

Figure 1: Uniform 512 KiB logical KV bands under 2 MiB CUDA minimum leaf size. Stock maps one band per leaf; shim packs four bands per leaf ($k=4$).

3.3 Synthetic workloads

All experiments use `workload_id=a_gate_v1_kv_microbench`, `workload_class=synthetic_kv_band`.

stress_mode	Role	Notes
f1_frag_v1	F1' resident	Uniform 512 KiB, 8 s wall, separate stock/shim processes
vram_budget_curve_v1	Budget curve	Iso fill to 50/60/70% of GPU VRAM cap; <code>cache_liberation_method=iso_logical_v2</code>

4 Iron Measurement Protocol and GATE12

4.1 Hardware and run window

All canonical numbers come from NVIDIA H100 PCIe, driver **550.163.01**, iron window 2026-05-22. Each run emits JSON artifacts under `bench.artifacts/` and a `GATE12_BEGIN...GATE12_END` stdout block for machine parsing.

4.2 GATE12 contract

GATE12 is the external metric surface: one line per field, no prose inside the block. Required fields for curve runs include `leaf_bytes`, per-tier `committed_bytes_*`, `resident_slots_*`, `cache_liberation_pct_*`, and `logical_kv_gain_pct_*` (Appendix A.1). Partnership-facing summaries must copy from `results/GATE12.canonical` without hand rounding beyond 0.1%.

4.3 Metric definitions

At matched budget tier b :

$$\begin{aligned}\text{cache_liberation_pct}_b &= \frac{C_{\text{stock},b} - C_{\text{shim},b}}{C_{\text{stock},b}} \times 100, \\ \text{logical_kv_gain_pct}_b &= \frac{L_{\text{shim},b} - L_{\text{stock},b}}{L_{\text{stock},b}} \times 100, \\ \text{layout_efficiency_pct} &= \frac{L}{C} \times 100.\end{aligned}$$

Stock-class pairing: curve claims always name budget % and report both committed totals; F1' claims name `stress_mode=f1_frag_v1` and 8s resident window.

4.4 Comparison discipline

- Stock and shim runs are separate processes for resident/F1' metrics (no cross-contamination).
- Shim env: `LD_PRELOAD=lib2adic_shim.so`, `HWATOM_SHIM_PACK=1`, `HWATOM_PACK_MEGA=1`.
- **Plateau check:** if `resident_slots_shim=65536` while `committed_shim < budget cap`, liberation compares fair stock growth vs early shim ceiling—not “shim fills entire budget.”

4.5 Docker reproduction

Image built from `docker/gate-12s/Dockerfile.f1prime`. Success signal: `A46_DOCKER_OK` plus GATE12 fields matching bare-metal F1' ordering (slot counts may differ in container cap).

5 Results

5.1 Measured leaf granularity

VRAM curve GATE12 reports `leaf_bytes=2097152` (2 MiB) on H100 for the canonical run (`run_id=1779431329`), anchoring the packing factor $k = 4$ design for 512 KiB iso slices.

5.2 VRAM budget curve

Table 1 lists all three budget tiers from `vram_curve_20260522T062629Z`. Shim `committed_bytes` plateaus at 34.36 GiB (65536 slots $\times$ 512 KiB logical layout policy) while stock committed grows with budget.

Table 1: VRAM budget curve (iso logical v2, H100, 2026-05-22).

Budget	C_{stock} (GiB)	C_{shim} (GiB)	Liberation	Log. gain	Slots (S / H)
50%	39.55	32.00	19.1%	+223%	20248 / 65536
60%	47.46	32.00	32.6%	+169%	24298 / 65536
70%	55.36	32.00	42.2%	+131%	28348 / 65536

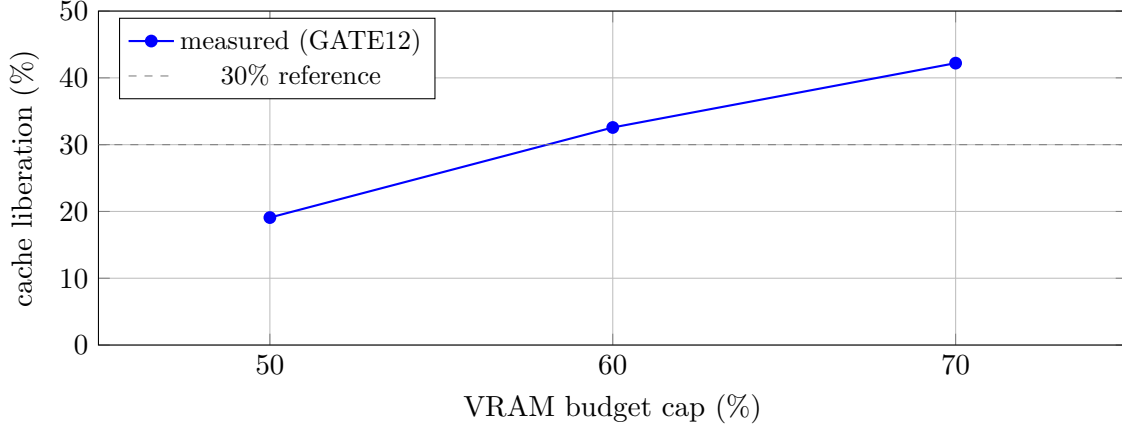


Figure 2: Cache liberation vs VRAM budget tier. Liberation rises as stock committed scales; 50% tier is below the 30% audit band because stock has not yet scaled, not because packing failed.

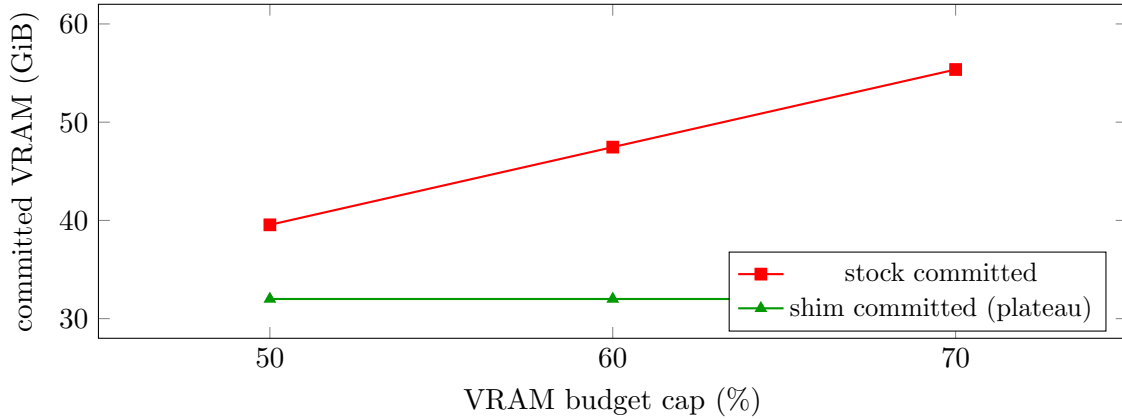


Figure 3: Committed bytes vs budget. Shim hits slot/commit plateau before consuming the full 70% budget cap.

5.3 F1' resident uniformity

Under `f1_frag_v1` with 8s resident window, stock holds 30,202 slots at 70.3% layout efficiency; shim holds 30,248 slots at 100% layout efficiency (`kv_gain_pct=0.15` at matched near-cap slot count). This isolates packing geometry from budget-fill curve effects.

5.4 Docker gate

Container F1' reproduces shim layout efficiency 100% with `resident_slots_shim=29877` (stock 40,268 in same image cap), confirming the evaluation artifact path rather than bare-metal-only scripts.

6 Discussion

Why liberation grows along the curve. Packing factor k is fixed for uniform 512 KiB iso slices; liberation percentage is a *ratio* against stock committed that increases as stock fills larger

Table 2: Canonical summary (2026-05-22, `results/GATE12.canonical.txt`). **131%** is `logical_kv_gain_pct` on the budget-fill curve (stock committed scales; shim plateaus). F1' row is matched-slot geometry (`kv_gain_pct`≈0.15%).

Scenario	Metric	Stock	Shim
VRAM @ 70%	<code>cache_liberation_pct</code>	—	42.2%
VRAM @ 70%	<code>logical_kv_gain_pct</code>	—	+131%
VRAM @ 70%	<code>committed_bytes</code>	59.45 GB	34.36 GB
VRAM @ 70%	<code>resident_slots</code>	28,348	65,536
F1' 8s	<code>resident_slots</code>	30,202	30,248
F1' 8s	<code>layout_efficiency_pct</code>	70.3%	100%
Docker F1'	<code>resident_slots</code>	40,268	29,877

budget tiers while shim committed stays at the structural plateau. Reporting only the 70% point without 50/60% misstates fair comparison protocol.

Mechanism ceiling (internal, not headline). A fixed 2 GiB logical iso target can exhibit up to ~75% liberation ($k=4$ vs one band per 2 MiB leaf). Headline partnership numbers in this paper use the budget-fill curve unless explicitly labeled iso-fixed.

Relation to framework-level paging. vLLM’s PagedAttention [3] manages logical KV pages above the CUDA driver via framework pool allocators, reducing per-slot `cuMem*` pressure on that code path. Our shim is orthogonal at the driver API layer: it benefits stacks that still issue per-allocation `cuMem*` calls (custom PyTorch inference, some TRT-LLM pre-paging paths, and evaluation harnesses). Integrating with vLLM’s pool lifecycle is **Track B** (planned public integration release), not the T1 synthetic gate in Table 2.

Headline metrics vs mechanism. The **131%** budget-curve logical KV gain is measured on the fill-to-budget curve where stock `committed_bytes` grows and shim hits a structural plateau; it must not be read as “131% more KV per slot.” F1' at matched near-cap slots (`kv_gain_pct=0.15`) is the clean packing geometry readout.

Deployment economics. VRAM savings translate to concurrent capacity and cost only after integration on a customer serving stack; we do not state \$/GPU or utilization-dollar figures without production measurements.

What we defer. **Track B** vLLM end-to-end benchmarks, multi-GPU NCCL, GQA alias paths (iron-unstable), eBPF/kernel delivery (contract tier), and future **C-layer** SKU studies (e.g. B200-class iron) with fresh GATE12 runs.

7 Limitations

1. Synthetic KV-band microbenchmark—isolates driver-layer packing; not transformer forward passes or Track B vLLM integration (planned separately).

2. Single GPU SKU (H100 PCIe); `leaf_bytes` may differ on other SKUs—re-measure before claiming portability (future C-layer/B200-class runs are out of scope here).
3. Shim slot plateau (`ISO_MAX_SLOTS=65536`) at 34.36 GiB committed under the 70% budget scenario—a bench cap, not proof that shim consumes the full budget envelope.
4. Per-call `cuMem*` allocation-path latency (stock vs shim) is **not** reported for T1 workloads in Table 2; separate scout tail benches (`kv_tail_latency_v1`) exist in the evaluation repo annex but are excluded from this paper’s claims.
5. Docker slot caps differ from bare-metal F1’; compare layout efficiency and repro signals, not absolute slot parity across environments.

8 Reproducibility and Artifact

Repository (URL at preview): `github.com/[TBD]/hardware_atom`, tag `t1-eval-20260522` [2].

```
git clone https://github.com/[TBD]/hardware_atom
cd hardware_atom
git checkout t1-eval-20260522
bash scripts/shim/run_docker_a46_gate12_f1prime_v1.sh
# Bare-metal iron (H100):
# bash scripts/shim/run_iron_vram_budget_curve_v1.sh
```

Expect `GATE12_BEGIN`, `workload_id=a_gate_v1_kv_microbench`, and tier fields matching Appendix A.1. Evaluation-Only `LICENSE.md`; production contact `stanislav.byriukov.research@gmail.com`.

Frozen table policy. Public eval Docker may add `HWATOM_PACK_K_CAP` after tag `t1-eval-20260522`; Tables 1–2 remain tied to iron/H100 measurements at that tag.

A Full GATE12 transcripts

A.1 VRAM budget curve

```
GATE12_BEGIN
workload_id=a_gate_v1_kv_microbench
workload_class=synthetic_kv_band
stress_mode=vram_budget_curve_v1
cache_liberation_method=iso_logical_v2
leaf_bytes=2097152
gpu_sku=NVIDIA H100 PCIe
driver_version=550.163.01
vram_budget_pct_50=50
cache_liberation_pct_50=19.0834
logical_kv_gain_pct_50=223
committed_bytes_stock_50=42463133696
committed_bytes_shim_50=34359738368
vram_budget_pct_60=60
cache_liberation_pct_60=32.5706
logical_kv_gain_pct_60=169
vram_budget_pct_70=70
cache_liberation_pct_70=42.2040
committed_bytes_stock_70=59450064896
committed_bytes_shim_70=34359738368
```

```
resident_slots_stock_70=28348
resident_slots_shim_70=65536
logical_kv_gain_pct_70=131
GATE12_END
```

Source: `bench_artifacts/h100_pull.20260522/vram_curve.20260522T062629Z/`.

A.2 F1' resident

```
GATE12_BEGIN
stress_mode=f1_frag_v1
resident_slots_stock=30202
resident_slots_shim=30248
layout_efficiency_stock=70.3136
layout_efficiency_shim=100.0000
kv_gain_pct=0.1523
elapsed_s=8.000
GATE12_END
```

Source: `gate12_f1prime.20260522T064350Z/`.

B Claim checklist (submit)

- Abstract states **synthetic** workload and denies inference/Z claims.
- Primary arXiv category: **cs.DS**; optional cross-list `cs.DC` / `cs.LG`.
- Numbers match `GATE12.canonical.txt` and Appendix A.1.
- Git tag `t1-eval-20260522` live before upload (replace [TBD] URL).

References

- [1] Stanislav Byriukov. Deterministic retrieval at scale: Optimal-space LCP indexing and 308x energy reduction on modern GPUs. *arXiv preprint arXiv:2602.04936*, 2026. Prior work by same author on iron GPU measurement receipts—not validation of KV shim claims.
- [2] Stanislav Byriukov. Hardware Atom: T1 Evaluation Repository. [https://github.com/\[TBD\]/hardware_atom](https://github.com/[TBD]/hardware_atom), 2026. Tag: `t1-eval-20260522`. `workload_id=a_gate_v1_kv_microbench`. Evaluation-Only LICENSE.
- [3] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with PagedAttention. In *Proceedings of the 29th Symposium on Operating Systems Principles*, 2023. Background: KV cache pressure in serving; not our evaluation stack.
- [4] NVIDIA Corporation. *CUDA C++ Programming Guide*, 2024. Virtual memory management chapter; driver API.
- [5] NVIDIA Corporation. *CUDA Driver API: Memory Management*, 2024. `cuMemAddressReserve`, `cuMemCreate`, `cuMemMap`.

- [6] Vivienne Sze, Yu-Hsin Chen, Tien-Ju Yang, and Joel S. Emer. Efficient processing of deep neural networks: A tutorial and survey. *Proceedings of the IEEE*, 105(12):2295–2329, 2017. GPU memory pressure context; same bib style as arXiv:2602.04936.
- [7] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in Neural Information Processing Systems*, 2017. Background: transformer KV growth.