

# University of Edinburgh

## School of Informatics

Plan Recognition in R.I.S.K.

4th Year Project Report  
Artificial Intelligence and Software Engineering

Jibran A.Z. Khan and Michael Rovatsos

March 28, 2013

**Abstract:** This paper presents the design and implementation of a plan recognition agent based on an algorithm published by Christopher Geib and Robert Goldman in 2009 [6] called The Probabilistic Hostile Agent Task Tracker (PHATT). The plan recognition agent's goal is to attempt to infer the unknown mission card of an agent from observations of their behaviour in the RISK environment.



## Acknowledgements

A thank you to my supervisor Michael Rovatsos for agreeing to supervise this project, his herculean effort and level of involvement with his supervisees is inspirational.

A thank you to my parents and family for their unending support in matters big and small.

A thank you to Christopher Geib for taking his time to meet with me and how he managed to decipher my cryptic blabbering to give his invaluable advice on plan recognition and the intricacies of his algorithm.

Yura.net for their work on Domination, in particular Yura who kindly took her time to explain various aspects of the program.

Friends

All the people who helped with me collect many mountains of data.



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Motivation . . . . .	1
1.2	Artificial Intelligence and Board Games . . . . .	2
1.3	Aims . . . . .	3
1.4	Hypothesis . . . . .	3
1.5	Paper Structure . . . . .	4
<b>2</b>	<b>Background</b>	<b>5</b>
2.1	Previous Work in Plan Recognition . . . . .	5
2.1.1	An Example of Plan Recognition . . . . .	6
2.2	Introduction to RISK . . . . .	8
2.2.1	Equipment . . . . .	8
2.2.2	Rules . . . . .	8
2.2.3	Turn Structure . . . . .	9
2.2.4	Cards . . . . .	12
2.3	Why Plan Recognition in Board Games . . . . .	12
2.4	Summary . . . . .	12
<b>3</b>	<b>Design</b>	<b>13</b>
3.1	Introduction to PHATT . . . . .	13
3.1.1	Computing an Explanation's Probability . . . . .	14
3.2	Environment Modelling . . . . .	14
3.2.1	Root-Goals . . . . .	14
3.2.2	Sub-Goals . . . . .	15
3.2.3	Actions . . . . .	15
3.2.4	Territory . . . . .	18
3.2.5	Continent . . . . .	20
3.2.6	Player . . . . .	20
3.3	Explanations . . . . .	20
3.3.1	Prediction Agent Pseudo Code . . . . .	22
3.3.2	Example of Operation . . . . .	28
3.3.3	Conceptual Issues . . . . .	28
3.4	Summary . . . . .	29
<b>4</b>	<b>Implementation</b>	<b>31</b>
4.1	Additional Implementation Concepts . . . . .	32
4.1.1	Data Structure Re-Use . . . . .	32
4.1.2	Google Guava Libraries . . . . .	32
4.2	Summary . . . . .	32

<b>5</b>	<b>Evaluation</b>	<b>33</b>
5.1	Experiments . . . . .	33
5.1.1	A.I. Play . . . . .	33
5.1.2	Constrained Play . . . . .	33
5.1.3	Free Play . . . . .	34
5.2	Experimental Format . . . . .	34
5.3	Data Collection . . . . .	34
5.4	Experimental Findings . . . . .	35
5.4.1	Free Play . . . . .	36
5.4.2	Constrained Play . . . . .	38
5.4.3	A.I. Play . . . . .	39
5.4.4	Nature of Game . . . . .	40
5.4.5	Simplicity of Model . . . . .	41
5.5	Outcomes . . . . .	42
5.6	Criticism . . . . .	43
<b>6</b>	<b>Conclusions</b>	<b>45</b>
6.1	Future Work . . . . .	45
<b>7</b>	<b>Appendix</b>	<b>47</b>
7.1	Experimental Results . . . . .	47
	<b>Bibliography</b>	<b>49</b>

# 1. Introduction

*AI has the potential to become the new driving force behind computer game innovation.*

John David Funge, Artificial Intelligence for Computer Games, An Introduction

## 1.1 Motivation

Artificial Intelligence for games or commonly termed 'game A.I.' has been an area of research ever since the beginning of significant work on A.I. Though techniques for game A.I. have typically come from academia, in his book Artificial Intelligence for Computer Games, An Introduction, John Funge argues [5] that academic A.I. and game A.I. are notably different in both scope and application.

Where the primary goal of academia is to further human understanding, often by solving particularly complex problems, the scope of developed A.I. techniques from academia tend to be usually more general in their application.

On the other hand, game A.I. is built to provide an enjoyable experience for those playing the game, usually by creating the illusion of intelligence. Game A.I. is frequently built with a singular purpose in mind, which is generally considered to be any kind of control problem in a game.

Companies in the video games industry who utilize game A.I. (which today is the vast majority) tirelessly seek an edge over their competition. This edge has typically come from computer graphics, effects such as dynamic rendering, the move from two dimensional to three dimensional have kept their customers interested over the years.

Emerging though is the idea that as users become accustomed to high quality graphics, developers will require something new to give their product an edge over their competitors. That edge will hopefully be better quality game A.I. and indeed there have already been examples of successful games acclaimed for their game A.I, one such example is F.E.A.R.

A First-Person-Shooter psychological horror video game, F.E.A.R utilizes a S.T.R.I.P.S. style planning-architecture which developer Jeff Orkin termed Goal-Oriented Action Planning [9]. The game gained much acclaim and is commonly referenced as an excellent example of game A.I.

With this shift in focus, there are growing incentives for developers to create more sophisticated game A.I. likely, as in the past, with techniques developed in

academia. Plan recognition may provide such an opportunity for development.

Plan recognition is the problem of inferring an agent's plans from observations. Significant research in plan recognition began in the 1980's, the results of which have had numerous applications in several fields. In Nate Blaylocks paper on "Retroactive Recognition of Interleaved Plans for Natural Language Dialogue" [1] he highlights a few of the most prominent as being:

Field	Some Applications
User Modelling	Operating Systems, Intelligent Help Systems, Intelligent Tutoring
Multi Agent Interaction	Military Tactical Defence, Multi Agent Coordination
Natural Language Processing	Story Understanding, Machine Translation, Dialogue Systems

Plan recognition continues to receive attention from various computer science communities due to its ability to both provide personalized responses, and an understanding that the consequences of failing to recognise plans can in some situations be dire; though not so much the latter point, applying plan recognition to video games is no different.

Plan recognition in video games has been used in performing dynamic analysis in game environments such as Real Time Strategy [11] and Multi-User Dungeons[4]. More exciting though is the prospect of research into combining plan recognition algorithms with planning-architectures such as G.O.A.P. The desired result being A.I. capable of recognising plans and subsequently building counter plans.

## 1.2 Artificial Intelligence and Board Games

In 1950 Alan Turing published a landmark paper "Computing Machinery and Intelligence" establishing the Turing test, marking what many consider to be the birth of Artificial Intelligence as a field of research. Soon after John McCarthy officially coined the term Artificial Intelligence at a conference in Dartmouth College. He defined it as "the science and engineering of making intelligent machines".

Interestingly though thirty five years earlier Leonardo Torres y Quevedo had built "El Ajedrecista" a chess automaton[ref] capable of playing a king and rook endgame against a king from any position. It was considered the worlds first computer game and arguably the beginning of Artificial Intelligence and board games a relationship it appears older than the term Artificial Intelligence itself.



Since then famous events such as Garry Kasparov's defeat to IBM's chess computer DEEP BLUE in 1997 continues to impress the public.

From history it seems clear that A.I. and its application in games are intertwined becoming a growing area of interest in both commercial and academic fields.

Games are often considered a good metric for testing the quality of an A.I. [Ref]. There has been some academic work done on RISK. Development of an Intelligent Artificial Player for the Game of Risk[ref]. The author Michael Wolf[ref] claims R.I.S.K. is generally well known but under recognised by academia.

Work by two guys at Stanford on A.I. [ref] agent to play R.I.S.K. They say R.I.S.K. is an intersection between traditional and modern board games.

## 1.3 Aims

- To design and implement a plan recognition agent for the board game R.I.S.K.
- For the plan recognition agent to be able to perform better than a random guess.
- To further understanding in the complexities of performing plan recognition in R.I.S.K.

## 1.4 Hypothesis

What do you want to answer?

Are plan recognition algorithms beneficial in games? Specifically RISK?

- To determine whether the accuracy of predictions are the same for winners and losers.
- If the probability of a mission card is the highest among all the other mission cards of an agent, then it will be the correct mission card.

Using more data from risk environment in the computation of the likelihood of explanations, the better the prediction accuracy will be.

## 1.5 Paper Structure

The following chapter presents a background to the project where the process of plan recognition and the board game R.I.S.K. are introduced. Reasons for using plan recognition in board games are then discussed.

Chapter 3 describes the methodology of the project, it is split into two sections. The first is design, in this section PHATT is introduced and the design of the plan recognition agent is detailed. The subsequent section is implementation. Code related issues such as modifications to the open source project and any relevant design concepts are discussed.

Finally an an evaluation plan and conclusion is presented. In these, the experimental findings are presented, discussed and any conclusions derived from the experimental findings are presented.

## 2. Background

### 2.1 Previous Work in Plan Recognition

Many consider one of the earliest major projects on plan recognition to have been in 1978. Having identified plan recognition as a problem in itself, Schmidt et al [10] conducted experiments to determine whether or not people inferred the plans of other agents. From their results they created a rule based system called BELIEVER which attempted to capture the process of plan recognition.

Three years later Cohen, Perrault and Allen identified two different types of plan recognition *keyhole* and *intended* [3].

They defined each as:

- *Keyhole plan recognition* is the recognition of an agent's plan through unobtrusive observation".
- *Intended plan recognition* is the recognition of the plan of a cooperative agent who wishes to be understood.

In 1986 Kautz and Allen published a paper titled "Generalized Plan Recognition" [8] which set the framework of many plan recognition projects that followed and formed the basis of plan recognition through logic and reasoning. They defined keyhole plan recognition as involving the identification of a set of top-level goals from possible plans, which could be decomposed into related sub-goals and basic actions, thus creating an event hierarchy also known as a *plan library*.

It was Charniak and Goldman [2] who first argued that plan recognition was largely a problem of reasoning under uncertainty and that any system which did not account for uncertainty would be inadequate. They went on to propose a probabilistic rather than logic based approach to plan recognition using a Bayesian model. Their research continues to be popular in many avenues of research including its application in games.

Albrecht, Zukerman and Nicholson [4] performed research on keyhole plan recognition using dynamic Bayesian networks to represent features of an adventure game. The result of their experiments they claimed "showed promise" for some domains.

More recently Synnaeve and Bessiere [11] published a paper of the design and implementation of a plan recognition agent in the Real-Time-Strategy game Starcraft, that through observations of building construction can predict the types of

units a player intends to produce.

### 2.1.1 An Example of Plan Recognition

We can introduce common concepts, assumptions and the process of plan recognition with an example of an agent attempting to infer the plan of another agent in a non-adversarial environment.

Person A is making a meal for Person B. For this meal A can cook only one of two kinds of burger, a meat burger or vegetarian (veg) burger. In other words A has two possible *root-goals* (a state they wish to reach) either *Cooked Veg Burger* or *Cooked Meat Burger*.

A wanting to surprise B, will not tell B what his root-goal is but B wants to know what to expect for lunch. Since B cannot know what A is thinking, B must somehow infer what A's root-goal is likely to be by *observing* A cook. In this way A's behavioural process is similar to a Hidden Markov Model to B. Person B thus models A's behaviour in the following manner.


Person B assumes A is rational and that A has a *plan* to achieve their root-goal. Whatever A's root-goal is it can likely be decomposed into a number *sub-goals* such as *Cooked Beef Patties*. Sub-goals can then often be further decomposed into *actions* to achieve them, such as *Take Beef Patties out of packet*. An important point to note is that these actions are not limited to only being a component of a sub-goal.

To simplify the example, we introduce various assumptions:

- A believes that they can cook a meal.
- B can only infer the cooking plan of A by observing what A is cooking.
- B knows everything that A can cook.
- Through observing A cook, B can predict with absolute certainty what A will cook.
- A cannot hide any observations.
- A only wishes to cook one meal.
- A has no preferences of what to cook, in other words given a choice the probability of choosing is equally likely.
- One A does not change cooking plan.

Given these assumptions and B's knowledge of A's cooking abilities we can model the set of all of A's plans, following the notation set by Geib and Goldman in

their paper presenting PHATT.

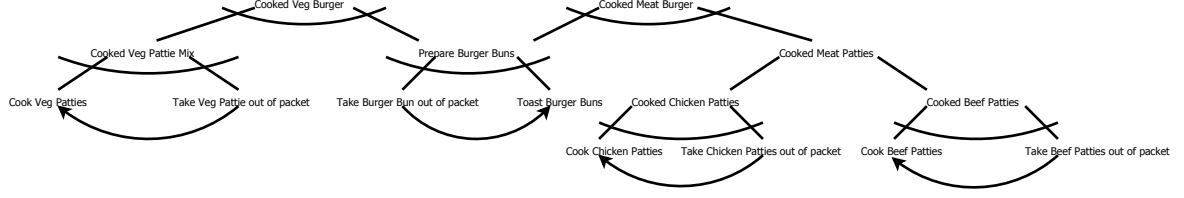

**Figure 2.1:** Root-goals are nodes that have no parent nodes. Sub-goals are nodes that have both a parent and children and actions are nodes that have no children. And-nodes are represented by an undirected arc across the lines connecting the parent node to its children. Or-nodes do not have this arc. Actions or goals that are dependant on a previous action are represented by an arc with an arrow.

A top level or root-goal is cooked vegetarian (veg) burgers, it is an and-node and this means that its children represent what needs to be done by A to accomplish that root-goal.

Children of or-nodes such as cooked meat patties represent options available to A to accomplish the goal. For example to achieve the goal cook meat patties A could either accomplish cooked chicken patties or cooked beef patties.

Arrows represent dependencies between nodes. For example to be able to accomplish the action cook beef patties, A must first perform the action Take Beef Patties out of packet.

Now A first performs the action *Take Burger Bun out of Packet*, then proceeds to *Toast Burger Buns*. At this point looking at the plan library we have two possible *explanations* for As behaviour, cooked veg burger or cooked meat hamburger.

Each of these explanations are equally likely at this point because the actions that have occurred so far could be part of either plan.

A then takes the Chicken Patties of their packet, now given our assumptions we can conclude that A's plan is to cook Meat burgers. In this way B has recognised A's plan thus performing the process of plan recognition.

## 2.2 Introduction to RISK

Developed and released by french film director Albert Lamorisse in 1957 as *La Conquête du Monde*, RISK is a turn-based board game for two to six players. This paper is only concerned with the standard version of R.I.S.K. which is an adversarial environment where players' vie to control a fully observable board portraying a static geographical map of the Earth.

### 2.2.1 Equipment



**Figure 2.2:** Risk Equipment

The game consists of three pieces of equipment:

- A board portraying a geographical map of the earth.
- Different coloured tokens called *armies*.
- Two sets of regular six-sided dice.
- A deck of forty-four cards.

### 2.2.2 Rules

The board is divided into forty two *territories*. Each territory is a partition of the land mass of the Earth. These territories are further partitioned into six *continents* usually corresponding to their real continent grouping.

Armies are placed in territories. If a player places an army in a territory, this declares that the player *occupies* that territory. Players must have at least one army placed in a territory they own at all times. Players can choose to place as many additional armies as they wish in that territory.

How a player wins largely depends on the *Game mode*. Game modes significantly impact the behaviour of players and is decided by players beforehand. In standard RISK they are:

Game Mode	Description
Domination	Players aim to conquer a certain number of territories,
Mission	Each player is given a single unique mission card. A mission card describes a state they must reach e.g. Occupy North America and Africa, for the rest of the game this is their <i>root-goal</i> which only they know. In order to win they can either complete this root-goal or eliminate all other players.
Capital Risk	Each player is given a Capital territory and to win a player must occupy all other Capital territories.

This paper is concerned with the mission game mode **only**, therefore the following sections describe rules only for that game mode.

After an initial setup, each player's turn is split into three distinct phases which always occur in the same fixed order. These phases are:

1. Reinforcement
2. Attack
3. Movement

In each phase a player performs at least one discrete *action* which helps to further the players goals, thus forming a sequential task environment.

## 2.2.3 Turn Structure

### 2.2.3.1 Initial Setup

The game begins with an an initial setup, it involves:

- Territories being divided equally between players.
- Players being given a starting number of armies which is inversely proportionally to the number of players.

- Players distributing their starting armies over their territories.
- Each player being given a mission card.

### 2.2.3.2 Reinforcement Phase

At the start of a player's turn, they receive *reinforcements* in the form of additional armies. The act of placing an army in a territory is called *reinforcement*. The number of additional armies received is based on the number of territories a player occupies and whether they occupy any continents.

Occupied Continent	Number of Bonus Armies
Asia	7
North America	5
Europe	5
Africa	3
Australia	2
South America	2

**Table 2.1:** Occupied Continent Army Reinforcement Bonus

### 2.2.3.3 Attack Phase

Once a player has distributed their armies from the reinforcement phase, they can choose to *attack*.

Territories occupied by a player that contain more than one army can attack neighbouring territories occupied by any other player. An attack consists of several *battles*. The outcome of a battle is decided by means of rolling two sets of dice, thus making it a stochastic environment. One set is rolled for the *defender* of the territory and the other for the *attacker*.

The number of dice each player receives for a battle is dependant on the number of armies placed in each of the players respective territories. The defender receives a die per army up to two armies. The attacker receives a die per army upto three armies not including the single army they are required to have in that territory while occupying it.

The general rules of engagement are: dice rolls by each player are compared on a one-to-one basis in descending order of values. The player with the lower value at each comparison loses a single army though if the die are equal in value the attacker loses an army. The number of comparisons per battle are set by



the number of dice the defending player has rolled. The attacking player can commence as many battles as they wish during an attack provided they have more than one army in the attacking territory.

An attack of a territory has three outcomes:

- A *failedAttack* by the attacker as they have only one army remaining in which case they must retreat and a *successfulDefence* by the defender who retains the territory.
- A *failedAttack* by the attacker as they choose to retreat before having only one army remaining and a *successfulDefence* by the defender who retains the territory.
- A *successfulAttack* by the attacker who occupies the territory and a *failed-Defence* by the defender who has no armies remaining and so loses the territory. The attacking player, leaving at least one army behind, must then move armies from the territory they attacked from into the newly occupied territory.

A player can perform any number of attacks from any territory they own during their turn, provided they have more than one army in the territory they choose to attack from.

#### 2.2.3.4 Movement Phase

When either the player chooses to end the attacking phase or can no longer attack because they do not occupy a territory which contains more than one army their movement phase begins.

During their movement phase a player may move armies from one territory to an neighbouring territory they own, provided they leave at least one army in the territory the armies were moved from. This action can only be done once per turn in this phase, after which the movement phase is finished.

After the movement phase has been completed the players turn ends and another players reinforcement phase begins.

### 2.2.4 Cards

For each territory is a corresponding card. As well as name of that territory each card either depicts the symbol of an infantry, cavalry or artillery. By successfully occupying another player's territory in a turn, a player is then awarded a card and no more than one in that turn. Additionally there are two wild cards which can be substituted to represent a symbol of the players choosing. Owning a set of three cards with the same symbols or a set of three distinct symbols gives the player the opportunity to trade the set of cards for additional armies.

## 2.3 Why Plan Recognition in Board Games

Algorithmic landmark - such as the solution of the game of checkers

In the realm of board games such as chess, there have for many years dominated a number of algorithms such as the:

Min-max Algorithm with Alpha-Beta Pruning

Many games today have a large number of alternative moves are stochastic and have hidden state attributes. "Applying traditional game tree search algorithms designed for perfect information games that act on the raw state representation is infeasible" [ref Monte Carlo Planning in RTS Games], the search space for such games is so large and that finding the best move would take an unreasonable amount of time (Find a ref for this) Michael Wolf paper calculating state space for RISK is infinite.

Instead of a brute force method of finding the best alternative the idea of plan recognition offers another method. Use plan recognition algorithms one can weed out unlikely explanations before committing to a search of the

Main benefit is that responses can be personalized.

This issue prompted research into the development of variants of the original algorithms that could cope but this

Using these algorithms people like Kabanza are starting to be able to tackle certain aspects which are harder to model?

## 2.4 Summary

The summary of the chapter is ...

## 3. Design

### 3.1 Introduction to PHATT

PHATT was published by Christopher Geib and Robert Goldman in 2009 [6]. PHATT's approach is that plans are executed dynamically and the set of actions that an agent can take at each step, their *pending set* depends critically on the actions that the agent has previously taken, this formed the basis of their model of plan execution.

The model is as follows. An agent would first choose a root-goal, then a set of plans to achieve that root-goal. Any actions of those plans that had no prerequisite actions would form the initial pending set of the agent. The agent would then perform an action from the initial pending set and this would result in some actions being appended to the pending set and others being removed to form a new pending set. The agent would then continue to perform actions until an outcome such as, the agent concluding the root-goal had been achieved.

From this model, Geib and Goldman proposed an algorithm utilizing a Bayesian approach to perform probabilistic plan recognition.

The algorithm computed  $Pr(g|obs)$ , the conditional probability of a root-goal  $g$  given a set of observations  $obs$  or its equivalent form  $Pr(exp|obs)$ , the conditional probability of a particular explanation  $exp$  that the agent had a root-goal, given a set of observations  $obs$ .

Using Bayes Rule they defined  $Pr(exp|obs)$  as:

$$Pr(exp|obs) = Pr(exp \wedge obs) / Pr(obs)$$

They then (as other practical Bayesian systems do) exploited the equivalent formulae

$$Pr(exp_0|obs) = Pr(exp_0 \wedge obs) / \sum_i Pr(exp_i \wedge obs)$$

This is the conditional probability of the explanation  $exp_0$  being computed by dividing the conditional probability of  $exp_0$  by the sum of the probability mass associated with all possible explanations.

### 3.1.1 Computing an Explanation's Probability

To compute the term  $Pr(exp \wedge obs)$  requires the plan library to be augmented with three probabilistic features:

1. The prior probability of the root-goal.
2. The respective probabilities of choosing any sub-goals.
3. The probabilities of picking actions from the agents pending set.

The probability of an explanation is then calculated by multiplying each of the terms together in the following manner:

$$Pr(exp \wedge obs) = P(goals)P(plans|goals)P(obs|exp)$$

## 3.2 Environment Modelling

### 3.2.1 Root-Goals

The root-goals of the RISK environment are the mission cards, these are:

- Occupy Europe, Australia and one other continent.
- Occupy Europe, South America and one other continent.
- Occupy North America and Africa.
- Occupy North America and Australia.
- Occupy Asia and South America.
- Occupy Asia and Africa.
- Occupy 24 territories.
- Occupy 18 territories and occupy each with at least two troops.
- Eliminate a player.

A subset of these where the mission involved occupying continents were chosen to be the focus of this paper. This choice made due to project time constraints.

Mission cards are of two types:

1. *Two-Continent*: Players must occupy two explicitly named continents.

2. *Two-Continent+1*: Players must occupy two explicitly named continents and another of their choice.

As mission cards are handed out at random, the prior probability of a root-goal is  $1/n$  where  $n$  is the number of mission cards. The data structure of a root-goal is in the form of a tuple containing the name of the root-goal and its prior probability.

$$RG = \{ \text{rootGoalName}, 1/n \} .$$

### 3.2.2 Sub-Goals

The root-goals of the RISK environment can be decomposed to form a set of sub-goals.

- For *Two-Continent* root-goals, the sub-goals of that root-goal are occupying each continent.
- For *Two-Continent+1* root-goals which requires players to allow an option to occupy a continent of choice, provided they also occupy two explicitly named continents.

These two types of root-goals therefore make the occupation of any single continent a sub-goal of at least one root-goal. The prior probability of a sub-goal is modelled as  $1/c$  where  $c$  is the number of alternate sub-goals available in an explanation. The data structure of a sub-goal is a tuple containing the name of the sub-goal and the probability associated with choosing that sub-goal.

$$SG = \{ \text{subGoalName}, 1/c \} .$$

### 3.2.3 Actions

Excluding card related actions, in RISK the only actions players perform are:

- Attacking a Territory.
- Defending a Territory.
- Occupying a Territory.
- Losing a Territory.
- Reinforcing a Territory.
- Moving armies into a Territory.
- Moving armies out of a Territory.

- Trading Territory Cards.

Each of these action are modelled in a manner that contributes towards explanations of a player's behaviour.

### 3.2.3.1 Attacking

Though players can perform several attacks during their turn, they can only attack one territory at a time. Thus players' must choose both which territories to attack and the order in which to attack them, provided they have neighbouring territories and sufficient armies. Modelling these choices provides an avenue to infer a players plan.

The pending set of a player's attack actions for any turn is to either successfully or unsuccessfully attack territories they do not own, that are neighbour to atleast one territory that they own which also contains at least two armies.

If a player  $p$  successfully occupies a territory  $T_o$ , then the attack actions of neighbouring territories of  $T_o$  are added to  $p$ 's attack pending set. If they lose a territory  $T_l$  due to another player's successful attack, then any attack actions of neighbouring territories of  $T_l$  are removed from their attack pending set for their next turn.

The attack action is thus modelled as a singular event that is either *consistent* or *inconsistent* with explanations of a players behaviour.

For example, given three explanations:

1. Occupy North America and Australia.
2. Occupy North America and Africa.
3. Occupy Asia and South America.

Successfully occupying a territory in North America would be consistent with explanations 1 and 2, but inconsistent with 3, or in probabilistic terms the likelihood of 1 and 2 would rise whereas 3 would fall.

Having defined the outcome of attacks as either successful or unsuccessful, attacks can be decomposed into following two actions:

Action	Consistent	Reasoning
SuccessfulAttack	Yes	A good indication of a players plan is the territories they attack and successful attacks are in themselves the best outcome.
FailedAttack	Yes	Though less significant than a successful attack, attacking a territory is indicative of a players intention to occupy that territory and therefore a consistent action with an explanation.

**Table 3.1:** Modelling Attack Actions**3.2.3.2 Defending**

Defending as opposed to attacking can be seen as a 'passive' action as an attack is required before a defence can occur. In that way the defence action is modelled as consistent or inconsistent with only the explanations it is directly related to.

For example, given the three explanations from the previous section. If a *SuccessfulDefence* were to occur in a territory in North America explanation one and two would be multiplied by a term  $x$  which would be greater than 1, whereas explanation three would not be multiplied by anything. In the case of a *FailedDefence* occurring in a territory in North America the same would occur but with  $x$  in the range  $0.9 < x < 1.0$ . This model results in an interesting side-effect.

In PHATT at some point each explanations probability is normalised. The result is that explanations that were not multiplied by  $x$  will inversely increase or decrease to explanations that were multiplied  $x$ . The more  $x$  changes the value of an explanation the greater the difference will be in explanations that were not multiplied by  $x$ . To minimize this effect as big changes in explanation probabilities are undesirable for defence actions, the value of  $x$  is kept in the range of  $0.9 < x < 1.1$ .

Defence in the same manner as attack can be either successful or unsuccessful, therefore defence can be decomposed into the following:

Action	Consistent	Reasoning
SuccessfulDefence	Yes	A successful defence of a territory may be purely a product of chance, but is more likely when they have a plan involving that territory.
FailedDefence	No	An inconsistent action because a player would not normally allow a territory to be lost if it is a part of their plan.

**Table 3.2:** Modelling Defence Actions

### 3.2.3.3 Reinforce

The reinforce actions that a player  $p$  can perform at any turn  $t$  is based solely on the territories that  $p$  owns during turn  $t$ . The pending set of any players reinforce actions is therefore modelled as follows.

For each territory  $T$  that  $p$  owns at a certain turn  $t$ . In  $p$ 's pending set is an action to reinforce  $T$ . If a territory  $T_l$  is lost by  $p$  (it is attacked then occupied by another player), its corresponding reinforce action is removed from the players pending set for the players turn at  $t + 1$ . Conversely if another territory  $T_o$  is occupied by  $p$  then a reinforce action for  $T_o$  is added to the players pending set at turn  $t$ .

### 3.2.3.4 Movement

The pending set of movement actions of player  $p$  is the set of territories a player owns that are neighbour to a territory where  $p$  has more than one army. Moving armies into a territory is modelled as a consistent action with the explanation that the territory that had armies moved into is directly related to.

### 3.2.3.5 Trading Territory Cards

Actions related to trading territory cards were not modelled. This is due to trading sets of cards only giving players bonus armies and the end effect of a player placing any number of armies is already captured by the current model.

## 3.2.4 Territory

Each territory is modelled as an entity. When a player occupies a territory the player gains access to a set of actions which together form that territories action



set.

The action set of any territory is:

Action	Description
SuccessfulAttack	Attacking and occupying the territory.
FailedAttack	Attacking and failing to occupy the territory.
SuccessfulDefence	Retaining the territory after an attack.
FailedDefence	Losing the territory due to an attack.
Movement	Moving armies in to the territory.
Reinforce	Placing armies in the territory.

**Table 3.3:** Territory Action Set

The data structure of a territory therefore is a triple containing the name of the territory the set of territory actions  $TA$  and a set of references to the territories neighbours  $TN$ .

$$T = (territoryName, TA, TN)$$

A key concept in the design of the agent is that the pending set of a player is decided *a priori* as it is based on the territories a player owns. By combining the action sets of each territory a player owns into a single set, all the actions a player can perform can be captured.

### 3.2.5 Continent

Each continent contains at least two territories and so can be modelled as a tuple of the name of the continent and the set of territories that are contained in that continent.

$$C = (continentName, \langle T_1 \dots T_n \rangle)$$

### 3.2.6 Player

The term player has been and can be used interchangeably with the term agent. A defined data structure for a player is essential to be able to separate the numerous explanations of one player from another. The data structure must contain at least three features. A player name or ID, a list of territories they own  $PT$  and a list of explanations  $PE$ .

$$P = (playerName, PT, PE)$$

## 3.3 Explanations

Explanations must be designed to contain all the necessary data required to compute its probability, it therefore contains these features:

- The explanation name.
- A root-goal  $RG$ .
- A set of sub-goals  $SGS$ .
- A set of consistent actions  $ECA$ .
- A set of inconsistent actions  $EIA$ .

The resulting data structure is:

$$E = (\textit{explanationName}, RG, SGS, ECA, EIA)$$

Inconsistent actions are stored in explanations due to modelling decisions as if it was the case that if an action is not consistent then it is inconsistent then defence actions would be modelled incorrectly. Defence actions are not considered inconsistent to explanations that they are not directly related to, but would be if any actions not in the set of consistent actions are classified as inconsistent actions to an explanation.

Explanations of the form *Two-Continent+1* have four alternate forms. For example the root-goal Occupy Europe, South America and one other continent can be any of the following:

- Occupy Europe, South America and Asia.
- Occupy Europe, South America and Africa.
- Occupy Europe, South America and North America.
- Occupy Europe, South America and Australia.

Each is a valid explanation in itself, but still falls under its parent mission card. Therefore the assumption is made that if the plan recognition agent predicts one of the four children when it is known the players mission card is the parent, it is classified as a correct prediction.

Given the list of root-goals and sub-goals, the complete list of explanations is:

- Occupy Europe, Australia and Africa.
- Occupy Europe, Australia and North America.
- Occupy Europe, Australia and South America.
- Occupy Europe, Australia and Asia.
- Occupy Europe, South America and Asia.
- Occupy Europe, South America and Africa.
- Occupy Europe, South America and North America.
- Occupy Europe, South America and Australia.
- Occupy North America and Africa.
- Occupy North America and Australia.
- Occupy Asia and South America.
- Occupy Asia and Africa.

Each of these are considered as possible explanations of a players behaviour. A design modification to PHATT follows this modelling choice. By unpacking (fully enumerating) each explanation, then assigning the full set of explanations to each player from the start of the game, the element of choice has been effectively removed. What is then measured is the probability of each separate explanation of a players behaviour over the course of the game.

### 3.3.1 Prediction Agent Pseudo Code

#### 3.3.1.1 Building the Set of Explanations

During the initialisation of the R.I.S.K. map, a set of explanations must be built for the environment to be later assigned to players. This require the explicit specification of a root-goal and sub-goals for each explanation in the environment. In addition it also requires populating each explanation with a set of consistent and inconsistent actions, this can be done by the following operation:

---

**Algorithm 3.3.1:** GENERATEEXPLANATIONLIST(—)

---

```

forall the  $C \in CS$  do
  forall the  $E \in ES$  do
    if  $C$  isSubGoalOf  $E$  then
      forall the  $T \in C$  do
        addAction(ReinforceT) to  $ECA$ 
        addAction(MovementT) to  $ECA$ 
        addAction(SuccessfulDefence) to  $ECA$ 
        addAction(FailedAttackT) to  $ECA$ 

        addAction(FailedDefenceT) to  $EIA$ 
      end
    end
  end
end

```

---

The above pseudo code loops through the data structure of each continent  $C$  in the set of continents  $CS$ . Each continent is checked against each explanation  $E$  from the set of explanation  $ES$ , for whether its name is contained in the set of sub-goals of each  $E$  by the *isSubGoalOf* operation. If true then the result is an if statement firing.

The if statement contains a loop which iterates over the set territories in the loops current continent and using the *addAction* operation, adds each territories action set to either the explanations consistent action *ECA* or inconsistent action set *EIA*.

### 3.3.1.2 Generating Pending Sets

With the set of environment explanations *ES*, each player is allocated a unique instance of each explanation. Since the computation of the probability of an explanation requires the probability of choosing a single action from a player pending set, a function is required which generates a complete pending set of available actions a player can perform.

---

#### Algorithm 3.3.2: GENERATEPS(*PT*)

---

```

playerPS  $\leftarrow \emptyset$ 
forall the T  $\in$  PT do
    addAction(ReinforceT) to playerPS
    addAction(FailedDefenceT) to playerPS
    addAction(SuccessfulDefence) to playerPS
    forall the N  $\in$  T do
        if playerOwnN then
            | addAction(MovementT) to playerPS
        else
            | addAction(FailedAttackT) to playerPS
            | addAction(SucessfulAttackT) to playerPS
        end
    end
    return playerPS
end

```

---

After initializing an empty pending set *playerPS*. The above pseudo code first loops through each territory *T* in the list of all the territories that a player owns *PT*. For each territory a *ReinforceT* action and a *LoseT* action is added to *playerPS*.

Before proceeding onto the next territory in *PT* another loop is performed through the set of neighbouring territories *TN* of that territory with an if-then-else statement. If the player owns that territory then the if condition *playerOwnN* return true and a *MovementT* action is added to *playerPS*, if not then a *OccupyT*

action is added to *playerPS*. After the operation the *playerPS* is returned and can be cached if necessary.

### 3.3.1.3 Computing Action Probabilities

Following an idea from a paper by Goldman, Geib and Miller [7] which proposes weighting actions, a method for assigning probabilities to pending set actions generated by the *generatePS* operation was used. It required an operation that would allow greater control over weighting between consistent and inconsistent actions.

---

**Algorithm 3.3.3:** COMPUTEBASEWEIGHT( $w, pTotalActNum, pConsActNum$ )

---



---

```

sumWeight  $\leftarrow w * consActNum$ 
leftOver  $\leftarrow 1.0 - sumWeight$ 
base  $\leftarrow leftOver / totalNumAct$ 
return base

```

---

Given a predefined weight  $w$ , the total number of actions in a players pending set  $pTotalActNum$  and the total number of consistent actions with an explanation  $pConsActNum$ . This operation computes a *base* weight for all actions in a pending set by subtracting the total weight of the desired actions from 1, then distributing equally the remainder amongst all the actions in the players action set. This operation could easily be replaced with another such similar method.

Given the nature of the environment where the number of actions players can perform are relatively small, this method is suitable provided the weight difference is kept small. For environments where the number of consistent or inconsistent actions a player can perform are large, this may result in the value of *sumWeight* becoming greater than one making *leftOver* negative, breaking the next calculation. Therefore a scalable method of controlling the weights between actions would be necessary in the design of such an agent for a larger action environment.

The operation *computeBaseWeight* is part of a larger function which computes a *base* value which the following *computeExpProb* operation requires.

---

**Algorithm 3.3.4:** COMPUTEOBSPROB( $playerPS, totalExpConAct, obs$ )

---

```

expConAct  $\leftarrow filterPS(totalExpConsAct, actType)$ 
pTotalAct  $\leftarrow filterPS(playerPS, actType)$ 
pTotalActNum  $\leftarrow pTotalAct.size$ 

pConsAct  $\leftarrow \emptyset$ 

forall the  $A \in playerAct$  do
    if  $A \in expConsAct$  then
        |  $addAction(A)$  to playerConsAct
    end
end
pConsActNum  $\leftarrow pConsAct.size$ 

base  $\leftarrow computeBaseWeight(w, pTotalActNum, pConsActNum)$ 

return base

```

---

Given the players pending set  $playerPS$  generated by the function  $generatePS$ , and the set of all consistent actions for an explanation  $totalExpConAct$ . Both the set of actions (must be of the type  $obs$ ) a player can currently perform  $pTotalAct$  and the consistent actions of the explanation can be filtered using the  $filterPS$  operation which given an action type and a set, removes all other action types from the given set.

The set of  $pTotalAct$  is then further filtered down into another set  $pConsAct$  which contains only the consistent actions with the explanation. The sizes of  $pConsAct$  and  $pTotalAct$  are saved in two respective variables  $pConsActNum$  and  $pTotalActNum$ .

Dividing these two variables effectively gives the proportion of available actions that a player can perform that are inconsistent and this fact is exploited by the next operation which is passed a predetermined weight and each variable to the  $computeBaseWeight$  operation which returns the  $base$  weight of an action. This base weight can easily be used to weight either inconsistent actions or consistent actions.

This formulae makes three assumptions:

1. That any territories including ones that only contain one army can attack. Though this is not technically true, due to the nature of RISK where players are not restricted in any way on where they may place their armies during the reinforcement phase a player can practically attack any territory they



do not own but have a territory they own neighbour to it at the start of their turn.

2. That the likelihood of consistent attack actions are uniformly distributed.
3. That the likelihood of inconsistent attack actions are uniformly distributed.

### 3.3.1.4 Computing Explanation Probabilities

---

**Algorithm 3.3.5:** COMPUTEEXPPROB(*explanation*, *obs*)

---

```

if not alreadyIni then
  | expProb  $\leftarrow$  1.0
  | expProb  $\leftarrow$  R * expProb
  | alreadyIni  $\leftarrow$  true
end
playerPS  $\leftarrow$  generatePS()
totalExpConsAct  $\leftarrow$  ECA
weight  $\leftarrow$  arbitraryNumber

base  $\leftarrow$  computeObsProb(playerPS, totalExpConsAct, obs)
conActProb  $\leftarrow$  base + weight
inConActProb  $\leftarrow$  base

if obs is consistent then
  | expProb  $\leftarrow$  conActProb * expProb
else if obs is inconsistent then
  | expProb  $\leftarrow$  inConActProb * expProb
end
expProb  $\leftarrow$  normalized(expProb)
return expProb

```

---

After initialising the float *expProb*, the term is multiplied by the root-goal prior *R*, this is done only when the explanation is first initialised and therefore the *alreadyIni* flag is necessary. To complete the computation of an explanation, the operation *computeObsProb* is applied to *obs*. Depending on whether *obs* is consistent or not with the explanation, the appropriate action probability is multiplied with *expProb*.

At this point in the operation *expProb* is normalized, doing this is a deviation to the design of PHATT. Normalisation in PHATT of an explanations probability is normally only done when sampling of an explanation probability is required,

not at the end of every operation. This design choice significantly decelerated the probability of any explanation from dropping to zero very quickly. As if an explanation probability did reach zero, its value would propagate over the data sample and so even if a consistent action were to occur that would normally raise the probability it would be multiplied by zero and so nothing would happen.

### 3.3.2 Example of Operation

The concepts from this chapter can be tied together with an arbitrary example.

In this example R.I.S.K map there are two explanations, Occupy-North-America-South-America (O-NA-SA) and Occupy-South-America-Africa (O-SA-A).

Since mission cards are handed out to players' at random therefore the prior probability of each root-goal is  $1/n$  where  $n$  is the number of mission cards.

Some other assumptions for this example:

- The probability of a player choosing a sub-goal is uniform.

### 3.3.3 Conceptual Issues

Main change is that PHATT works in an action space whereas I have had to adapt the implementation to represent the state of the 'risk world' for the algorithm to operate.

Another difference is that I do not store or manipulated derivative trees as the original paper includes in the pseudo code it presents, this is due to hard coding derivative trees into explanations.

Another difference is I have removed the need for sub-goal probabilities because of working with the full derivative tree.

Using the constraints in the environment initially the model was based on the plan library proposed in the PHATT paper. This was not good therefore utilized the constraints of countries to narrow the number of possible explanations and actions.

Initially the movement model was based on the attack model where the smaller the number of actions the bigger the weighting should be, this is an incorrect model as the number of territories a player owns increases as a player gains more consistent movement and reinforce actions as they continue to be successful in their goal.

### 3.3.3.1 Probability Assignment

Simple weighting based on reasoning about implications of an action to an explanation

Positively weighted probabilities towards consistent actions and negatively towards inconsistent actions

Uniform distribution

Weighting based on number of consistent and inconsistent actions available to a player when an action is performed.

Question was how to assign weights to consistent and inconsistent actions?

Total number of actions are counted, and are separated into inconsistent actions and consistent actions and a weight is split among inconsistent actions and consistent actions. Problem is that it seems this system is too sensitive.

Because of sensitivity had to make up a more evenly weighted automatic system.

Therefore made proportional weighted system


## 3.4 Summary

The summary for this section is



## 4. Implementation

Built purely in the Java programming language, the plan recognition agent follows the following *event-driven* system architecture.

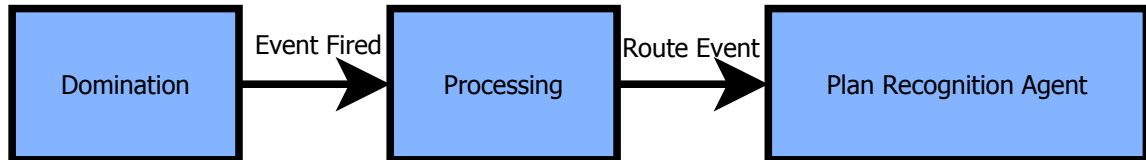

**Figure 4.1:** Event-Driven System Architecture

To operate the plan recognition agent needs to be aware of several important aspects of the game. In particular: how many players there are, when the game begins, the games initial state, any changes that occur in the game and when the game is finished. These aspects can be broken down into individual events:

- Start Game
- Player Initialisation
- Player Removal
- Territory Placement
- Successful Occupation
- Failed Occupation
- Army Movement
- Reinforcement
- End Game

When these occur a distinct event object is fired, these even objects contains important information about the event that is necessary to the plan recognition agent. These events are observed by the processing class which then routes them to the plan recognition agent. The plan recognition agent then looks at the received event objects and depending on the type of event object and the information held by them handles the object appropriately. The types of events are:

failedAttack successfulDefence failedDefence armyMovement reinforce

Event Type	Contains	Purpose
NewPlayer	Player Name	Initialises a new agent data structure.
RemovePlayer	Player Name	Destroys a specified agent data structure.
SuccessfulAttack	Attacker Name, Territory Name	Models the SuccessfulAttack action.
Failed	Attacker Name, Territory Name	Models the FailedAttack action.

**Table 4.1:** Territory Action Set

The plan recognition agent needs be aware of when the game begins, the games initial state, any changes that occur in the game and when the game is finished.

The architecture is such that the implementation of the plan recognition agent is not as dependant sub-component of the game, but rather a separate entity that operates in parallel to the game which if need be could be replaced by another plan recognition agent.

## 4.1 Additional Implementation Concepts

### 4.1.1 Data Structure Re-Use

The plan recognition agent makes use of the data structures from the game itself rather than the alternative of storing its own synchronized copy.

The advantages of this approach is less overhead as well significantly reducing the possibility that the plan recognition agents copy loses sync with the actual game state.

On the other hand the disadvantage is that this makes the agent more dependant on the methods of the developers implementations.

### 4.1.2 Google Guava Libraries

The plan recognition agent makes extensive use of the freely available Google Guava libraries to allow the prediction agent to operate concurrently with the game as well as more efficiently in its operations.

## 4.2 Summary

# 5. Evaluation

## 5.1 Experiments

### 5.1.1 A.I. Play

Domination has existing A.I. player implementations for its game modes. The A.I. players can be substituted for human players to the point where a game can consist of only A.I. who fight each other and can complete a game in a fraction of the time compared to human players.

According to the developer the A.I. does not actually actively follow a plan but according to the developer "the mission A.I. is a minimal extension of the core play. Since the core logic is reasonably good at conquering continents and eliminating opponents it just has it's decisions skewed a little to make sure it's going after the right continent/player without causing it to generally play poorly. "

Automating the process of initiating A.I. games provided an opportunity for the collection of a large number of data samples for evaluation purposes.

### 5.1.2 Constrained Play

In this form of play, players are asked only to perform actions that are *directly consistent* with their root-goal. This is opposed to *indirectly consistent* where for example players break other players continents because preventing other players from completing their mission makes completing your own mission more likely.

More formally (excluding card related actions) given a set of actions a player will only either:

- Choose to attack a territory that is directly consistent with their plan or a territory that is on the shortest route to a territory that is directly consistent with their plan.
- Reinforce a territory that is directly consistent with their plan or a territory that is on the shortest route to a territory that is directly consistent with their plan.
- Moves armies to a territory that is directly consistent with their plan or a territory that is on the shortest route to a territory that is directly consistent with their plan.

This artificially constructed form of play is designed to be the comparatively easier to perform plan recognition on. By establishing that the algorithm works given that players behave only in a manner that is directly consistent with the mission they have been given, provides grounds to establish that the majority of incorrect classifications arise from players performing actions that are either indirectly consistent or inconsistent with the players mission.

### 5.1.3 Free Play

Free play can be described simply as players "playing to win". In this manner it is how players normally play mission RISK.

## 5.2 Experimental Format

There were two experiment formats, one for constrained play, the other for free play. Before any experiment the rules of the game were explained to participants.

For constricted play, the particular play style required was described to participants.

For free play it was made clear to participants that there were two primary methods of winning in mission risk. Either by eliminating all other participants from the game, or by completing their mission card.

At the end of the game participants gave a short summary of their initial plan during the placement phase and any changes in plan from that during the course of the game.

## 5.3 Data Collection

After a game has finished the system generates two files. One a log file which using a debug tool created by the developers, allows a completely independent replay of the game.

This has significant implications in that the environment can be eliminated as a changing variable in the evaluation process since a game can be reproduced but with the plan recognition agent being implemented differently or with different probability calibrations.

The other is a csv file recording the significant features of the game namely:

- Which player won and lost.



- Each players actual mission.
- The probabilities of each players respective explanations over the course of the game.

Collection of A.I. play data samples was automated using an free macro program called *AutoHotkey*.

Python scripts were used to analyse the set of csv files.

Used a tool created by developers to replay games in-order to be able to re-test the algorithm with changes in modelling/calibration.

Using tool created by the developer of saving "Debug Logs" which could be used to reproduce a game exactly, this allows the algorithm to be tested with different parameters on the exact same game thus ruling out any environmental difference when analysing data.

Using an system built by the original developers was able to easily reproduce a game if necessary for the purposes of evaluating the algorithm under different conditions.

## 5.4 Experimental Findings

Start with major insights and prove with data

Main questions to answer.

Whether is converges?

It does converge.

SHOW LINE GRAPH SHOWING LINES CONVERGING, TALK ABOUT HOW DOING ACTIONS MAKE SOME EXPLANATIONS MORE LIKELY AND OTHERS LESS LIKELY

THEN AMONGST A GROUP OF LIKELY EXPLANATIONS SOME BECOME MORE LIKELY AND OTHER LESS LIKELY

It will not converge clearly in the case a player performs only actions that are consistent with more than one explanation.

SHOW AN EXAMPLE OF IT NOT CONVERGING

How fast it converges?

Converges quite quickly after the attacks begin

ATTACKS BEGIN TURN ?? PROBABILITIES MOVE MUCH MORE SIGNIFICANTLY AFTER THIS TURN.

why because model has been built giving attacks the most significance. use data from average data over time.

Present table of general accuracy

Game Type	Correct	Incorrect	% Accuracy
Free Play	29	32	47.54
Constrained Play	79	23	77.45
A.I. Play - Weight 100	390	714	35.33
A.I. Play - Weight 4	89	265	25.14

**Table 5.1:** General Game Accuracy

Why is the accuracy of free play and A.I. play much lower than constrained play.

Game Type	Player End State	Correct	Incorrect	% Accuracy
Free Play	Winner	11	7	61.11
	Loser	18	25	41.86
Constrained Play	Winner	14	3	82.35
	Loser	65	20	76.47
A.I. Play - Weight 100	Winner	80	104	43.48
	Loser	310	610	33.70
A.I. Play - Weight 4	Winner	16	43	27.12
	Loser	73	222	24.75

**Table 5.2:** Winner-Loser Accuracy

Present table of winner losers

Why is the accuracy of winners better than losers?

The results show on an average (calculate percentage difference across measures)

More data for winners, winners also achieve their plan with a greater degree of success meaning more consistent observations.

Some reasons for incorrect predictions because of players who lose can be eliminated early, so predictions may be wrong because of a lack of data.

Present breakdown of explanations accuracy per game type

#### 5.4.1 Free Play

General Accuracy for each explanation

General Accuracies for each explanation type separated into winners and losers.

### 5.4.2 Constrained Play

General Accuracy for each explanation

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	11	6	64.71
Occupy-Asia-South-America	16	1	94.12
Occupy-Europe-South-America-One	9	8	52.94
Occupy-North-America-Africa	13	4	76.47
Occupy-Asia-Africa	15	2	88.24
Occupy-North-America-Australia	15	2	88.24

**Table 5.3:** Constrained Play General Explanation Accuracy

Accuracy of two-continent missions appear in general to be better.

General Accuracies for each explanation type separated into winners and losers.

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	1	1	50.00
Occupy-Asia-South-America	0	0	0.00
Occupy-Europe-South-America-One	4	0	100.00
Occupy-North-America-Africa	5	1	83.33
Occupy-Asia-Africa	0	0	0.00
Occupy-North-America-Australia	4	1	80.00

**Table 5.4:** Constrained Play Winner Accuracy

The number of data samples are quite small. Why is it that there are no winners for the missions Asia-South-America and Asia-Africa. Is this because these mission cards are harder?

Would make sense seeing as there is a trend in other data showing lower percentage accuracy for that mission.

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	10	5	66.67
Occupy-Asia-South-America	16	1	94.12
Occupy-Europe-South-America-One	5	8	38.46
Occupy-North-America-Africa	8	3	72.73
Occupy-Asia-Africa	15	2	88.24
Occupy-North-America-Australia	11	1	91.67

**Table 5.5:** Constrained Play Loser Accuracy

### 5.4.3 A.I. Play

#### 5.4.3.1 AI - Weight 100

General Accuracy for each explanation

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	51	133	27.72
Occupy-Asia-South-America	50	134	27.17
Occupy-Europe-South-America-One	127	57	69.02
Occupy-North-America-Africa	58	126	31.52
Occupy-Asia-Africa	37	147	20.11
Occupy-North-America-Australia	67	117	36.41

**Table 5.6:** AI Play General Explanation Accuracy - Weight 100

Why is it that Europe-South-America-One is better than the rest when trend is normally two-continent accuracy is better?

General Accuracies for each explanation type separated into winners and losers.

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	15	21	41.67
Occupy-Asia-South-America	9	9	50.00
Occupy-Europe-South-America-One	9	8	52.94
Occupy-North-America-Africa	15	21	41.67
Occupy-Asia-Africa	14	28	33.33
Occupy-North-America-Australia	18	17	51.43

**Table 5.7:** AI Play 100 Winner Accuracy

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	36	112	24.32
Occupy-Asia-South-America	41	125	24.70
Occupy-Europe-South-America-One	118	49	70.66
Occupy-North-America-Africa	43	105	29.05
Occupy-Asia-Africa	23	119	16.20
Occupy-North-America-Australia	49	100	32.89

**Table 5.8:** AI Play Weight 100 Loser Accuracy

Why is it that Europe-South-America-One is better than the rest when trend is normally two-continent accuracy is better?

#### 5.4.3.2 A.I. - Weight 4

General Accuracy for each explanation

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	34	133	20.36
Occupy-Asia-South-America	27	140	16.17
Occupy-Europe-South-America-One	88	79	52.69
Occupy-North-America-Africa	28	139	16.77
Occupy-Asia-Africa	9	158	5.39
Occupy-North-America-Australia	49	118	29.34

**Table 5.9:** AI Play General Explanation Accuracy - Weight 4

General Accuracies for each explanation type separated into winners and losers.

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	6	27	18.18
Occupy-Asia-South-America	8	21	27.59
Occupy-Europe-South-America-One	14	20	41.18
Occupy-North-America-Africa	3	13	18.75
Occupy-Asia-Africa	1	28	3.45
Occupy-North-America-Australia	5	21	19.23

**Table 5.10:** AI Play Winner Explanation Accuracy - Weight 4

Mission	Correct	Incorrect	% Accuracy
Occupy-Europe-Australia-One	28	106	20.90
Occupy-Asia-South-America	19	119	13.77
Occupy-Europe-South-America-One	74	59	55.64
Occupy-North-America-Africa	25	126	16.56
Occupy-Asia-Africa	8	130	5.80
Occupy-North-America-Australia	44	97	31.21

**Table 5.11:** AI Play Winner Explanation Accuracy - Weight 4

#### 5.4.4 Nature of Game

The nature of classic RISK is adversarial and in-order to achieve ones own mission, players either directly or indirectly eliminate each other and must modify their own plan in order to survive or prevent other players from winning.

Given the model these changes in behaviour are often directly inconsistent with their own mission. Instead this behaviour to the plan recognition agent seems consistent with whatever explanation that those actions *are* directly consistent with instead.

Given this environment and the high-level of overlap between missions the results are misclassification.

For example:

PRESENT EXAMPLE

### 5.4.5 Simplicity of Model

Sampling of probability needs to be more frequent rather than just at end of term as many actions occur between turns and the game may end in the middle of a lot of actions during one turn. Players do a lot of significant things in one turn.

Players who spend a game fighting over a single continent raise the probability of all explanations associated with that continent and the result is a prediction of several explanations being equally likely. This also applies to fighting over two continents that are part of a three continent explanation.

Inherent issues with PHATT is unable to deal with deception[ref] and often players must perform actions unrelated to a plan to be able to complete their plan e.g survive, have to conquer other non-relevant continents, this confuses the algorithm.

Calculation problems, give example of a explanation with more territories being higher than one with fewer even though the fewer one was correct.

Misclassification's occur due to three(keep looking in data) main reasons:

by Association - Explanations appear likely because players do things related to them even though they haven't done anything in one of the continents e.g Europe SA, Asia appears likely even though there has been occupation of territories in Europe because of lots of activity in SA and Asia. This issue is slightly negated by how I have modelled the attack actions probability contribution to explanations

Misclassification by

HOW TO FIX

Solving this problem could be done in potentially two ways either:

Identifying actions are in-directly consistent and modelling them to accurately contribute to explanations.

Giving greater weights to actions that are directly consistent through the state of the game more significant.

For example, knowing that a player owns four out of five of a continents territories when they choose to attack the last territory is intuitively more significant to the explanation of the player wanting to own that continent then if they only owned a single continent of that territory and choose to attack another territory.

Use a system of tiered consistent actions!

ExplanationProb = ExplanationProb \* Weight

The weight for each consistent action is flat at the moment or more precisely actions are consistent in themselves but may not be consistent given the *context* of the game state. To deal with this, we should introduce into our calculations data from the game state.

For example

How about making a system of applying weights in a manner that is proportional to the state of the game e.g

Weight =  $0.1 * 1 - (\text{The proportion of consistent actions for that explanations}) * (\text{Proportion of territories a player owns of the continents})$  <- Proportion of reinforce actions available to the player.

Best case = Low Number of consistent actions and high number of territories owned e.g

Has 1 attack option out of 13 and owns 9 of the ten territories

$$0.1 * 1 - (1/13) * 9/10$$

Worst Case = High number of consistent actions and low number of territories owned

$$0.1 * 1 - (12/13) * 4/10$$

Has 12 attack options out of 13 and owns 4 of the ten territories

What is the weight was computed in the normal manner but would be scaled up down by two factors in-order to make an action that appear Plans should consider not only consider what occurs in the action space but the state of the environment as well.

## 5.5 Outcomes

1) Does it work?



It performs better than randomly guessing but still at a low probability

2) If not why?

Three types of games to test the algorithm in:

Players don't ignore their mission card like at first predicted, as long as the mission appears easier to complete than eliminating all other players, then players will try achieve their mission.

Do the accuracy of missions with two continents appear on average to be better?

In evaluation DO NOT JUST RELY ON MEASUREMENTS! DISCUSS OUTCOMES! MAKE INFERENCES FROM DATA!

THE WHOLE PURPOSE OF ACADEMIA IS TO LEARN, SHOW THAT YOU HAVE SOMETHING TO CONTRIBUTE TO THAT AIM TO LEARN!

What did you do that you found easy? What did you do that you found hard?

Would you recommend doing something, what would you recommend not doing?

TALK ABOUT THE OUTCOMES OF YOUR WORK!

How to decide weighting of

How to deal with this problem?

Using the plan recognition software given a programs a plan to detect how well a program performs a plan.

Using genetic algorithms to optimize this by looking at the numbers returned by the plan recognition algorithm and choosing the best configuration that survived and won.

## 5.6 Criticism

Essentially attack has been modelled following PHATT but the rest of the actions are simple given a weighting of 0.98 for inconsistent and 1.0 for consistent. Thus attack has been modelled as the most significant action in the environment and this we can intuitively tell is not the case.



## 6. Conclusions

Summary of whole report

Main insights and results

Future Work

### 6.1 Future Work

Extension of the model to include other mission cards if possible. Due to the design, eliminating players could be modelled but occupy 24, 18 has such high overlap with everything it would be hard to model this.

Eliminating players - some system where data of who is being consistently attacked is recorded and probabilities are multiplied by a number based on number of attack actions for a player and number of territories that player has remaining.

The application of more sophisticated computation models based on the idea of generating a pending set from the state of the world then performing calculations with that pending set.

Only attack actions have been modelled in a matter

Probability model changed to proportion of consistent actions \* 0.1 0.9 - proportion for consistent probability 1 - proportion for inconsistent probability

MODEL AUGMENTATION

Do not model indirectly consistent actions only directly consistent actions.

MODEL PROBLEM - MODEL HAS BEEN BUILT NOT TAKING THE EFFECTS OF OTHER PLAYERS INTO ACCOUNT EFFECTIVELY

MODEL PROBLEM - PLAYERS MAY BE IN A SITUATION WHERE THEY cannot PERFORM A CONSISTENT ACTION

MODEL PROBLEM - DID NOT MODEL MOVING ARMIES INTO A TERRITORY IN A MANNER OTHER THAN MULTIPLYING CONSISTENT BY 1.02 AND inconsistent WITH 0.98

MODEL PROBLEM - DID NOT MODEL BASED ON IMPORTANCE OF TERRITORIES E.G DID NOT TAKE INTO ACCOUNT CONTINENT ENTRY TERRITORIES

MODEL PROBLEM - ATTACK COMPUTATIONS, TREATS ANY NON OWNED CONNECTED TERRITORY AS ATTACKABLE, GOES ON ASSUMPTION THAT PLAYER HAS AT LEAST TWO ARMIES IN EVERY TERRITORY

PROBLEM - MODEL NEGLECTS THE MULTI-ATTACK NATURE OF THE GAME, SUCCESSFUL DEFENCE MODEL REALLY ONLY APPLIES FOR SINGLE ATTACKS PER TURN

MODEL IS LOP SIDED TOWARDS ATTACK, SHOULD TAKE INTO ACCOUNT WHAT TERRITORIES PLAYERS OWN AT THE END OF A TURN.

Augmentation possibility - look at where player has already placed armies and figure out a probability based on where they place armies. Argument though is placement is not restricted an form.

DO NO COMPUTATION OF NEW EXPLANATIONS AS AN INSTANCE OF THEM ARE ASSIGNED AT THE START. MEANING ACCORDING TO PHATT A LIST OF PENDING SETS SHOULD BE SAVED AND A LIST OF ACTIONS AN AGENT HAS TAKEN, BUT I HAVE NOT DONE THAT. <- MODELLING DIFFERENCE

A platform has been setup for further improvements of the model.

IMPROVEMENTS TO MODEL

CAPTURING THE CONNECTIONS BETWEEN CONTINENTS

MAKING A TIERED WEIGHTING SYSTEM FOR THE CURRENT METHOD OF COMPUTING PROBABILITIES

E.G

0.1 WEIGHT FOR MORE THAN HALF THE NUMBER OF CONSISTENT ATTACK ACTIONS IN SET OF ALL ATTACK ACTIONS

0.2 WEIGHT FOR HALF THE NUMBER OF CONSISTENT ATTACK ACTIONS IN SET OF ALL ATTACK ACTIONS

0.3 WEIGHT FOR 1/4 THE NUMBER OF CONSISTENT ATTACK ACTIONS IN SET OF ALL ATTACK ACTIONS

0.4 WEIGHT FOR 1/10 THE NUMBER OF CONSISTENT ATTACK ACTIONS IN SET OF ALL ATTACK ACTIONS

the benefit of such systems would be to such an extent that it would be considering an unfair advantage if used in events such as official tournaments.

Why because they are an artificially derived benefit which can be used by a player to optimize their behaviour, not solely , but in conjunction with the results of a plan recognition system.

# 7. Appendix

## 7.1 Experimental Results

Table of correct predictions and incorrect predictions in each game type.

Table of correctness (an percentage of correct predictions by end of game for all data)

Graph of the line of the correct explanation for each agent in a single graph.

GRAPHS to make Probabilities of each explanation over rounds, a graph for average correctness for each game type. How to make this graph meaningful?



# Bibliography

- [1] Nate Blaylock. Retroactive Recognition of Interleaved Plans for Natural Language Dialogue, December 11 2001.
- [2] Eugene Charniak and Robert P. Goldman. A Bayesian Model of Plan Recognition. 64(1):53–79, 1993.
- [3] Philip R. Cohen, C. Raymond Perrault, and James F. Allen. Beyond Question Answering. In Wendy G. Lehnert and Martin H. Ringle, editors, *Strategies for Natural Language Processing*, pages 245–274. Erlbaum, Hillsdale, 1982.
- [4] David W. Albrecht, Ingrid Zukerman and Ann E. Nicholson. Bayesian Models for Keyhole Plan Recognition in an Adventure Game. *User Modeling and User-Adapted Interaction*, 8(1-2):5–47, January 1998.
- [5] John David Funge. *Artificial Intelligence for Computer Games: An Introduction*. A K Peters, 2004.
- [6] Christopher W. Geib and Robert P. Goldman. A Probabilistic Plan Recognition Algorithm Based on Plan Tree Grammars. *Artif. Intell.*, 173(11):1101–1132, July 2009.
- [7] Robert P. Goldman, Christopher W. Geib, and Christopher A. Miller. A New Model of Plan Recognition. *Artificial Intelligence*, 64:53–79, 1999.
- [8] Henry A. Kautz and James F. Allen. Generalized Plan Recognition. In Tom Kehler, editor, *Proceedings of 1986 Conference of the American Association for Artificial Intelligence*, pages 32–37. Morgan Kaufmann, 1986.
- [9] Jeff Orkin. Symbolic Representation of Game World State: Toward Real-Time Planning in Games. In Dan Fu and Jeff Orkin, editors, *Proc. of the 2004 AAAI Workshop*, Menlo Park, CA, 2004. AAAI, AAAI Press.
- [10] Charles F. Schmidt, N. S. Sridharan, and John L. Goodson. The Plan Recognition Problem: An Intersection of Psychology and Artificial Intelligence. *Artif. Intell.*, 11(1-2):45–83, 1978.
- [11] Gabriel Synnaeve and Pierre Bessière. A Bayesian Model for Plan Recognition in RTS Games Applied to StarCraft. In Vadim Bulitko and Mark O. Riedl, editors, *Proceedings of the Seventh AAAI Conference on Artificial Intelligence and Interactive Digital Entertainment, AIIDE 2011, October 10-14, 2011, Stanford, California, USA*. The AAAI Press, 2011.