

Bootstrap專案開發

林志強

Google網路字型應用

- 網路字型介紹使用：
- 當網頁設計使用特殊字型時，Client開啟若無相對映的字型時，將跳回預設字型。
- 而網路字型為，在Client載入網頁時，同時從遠端動態載入字型來顯示。

Google網路字型應用

- 英文網路字型：(目前支援809種)
- <https://fonts.google.com/>
- `@import url('https://fonts.googleapis.com/css?family=Coiny');`
- 中文網路字型：(目前支援2種)
- Noto Sans TC(思源黑體無襯邊)
- Noto Serif TC(思源黑體有襯邊)
- 多國語言網路字型：
- <https://fonts.google.com/earlyaccess>
- 曾經中文字網路字型有五種：
 - `@import url(http://fonts.googleapis.com/earlyaccess/cwtexhei.css);` `/* (黑體) */`
 - `@import url(http://fonts.googleapis.com/earlyaccess/cwtexfangsong.css);` `/* (仿宋體) */`
 - `@import url(http://fonts.googleapis.com/earlyaccess/cwtexkai.css);` `/* (楷體) */`
 - `@import url(http://fonts.googleapis.com/earlyaccess/cwtexming.css);` `/* (明體) */`
 - `@import url(http://fonts.googleapis.com/earlyaccess/cwtexyen.css);` `/* (圓體) */`

Google網路字型應用

Google Fonts

Search

Sentence

Type something

40

Categories

Chinese (Traditional)

Font properties

☐ Show only variable fonts

2 of 1003 families

Noto Sans TC

6 styles

Google

他們所有的設備
和儀器彷彿都是
有生命的。

Noto Serif TC

7 styles

Google

他們所有的設備
和儀器彷彿都是
有生命的。

Terms

Privacy

Google網路字型應用

- 建立中英文網路字型，先將google網址匯入css檔中@import url()。
- 可於body內直接設定font-family使用
- 或於各tag外加style使用

Google網路字型應用

```
歡迎使用 test001.html ×
test001.html > html > head > style
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Document</title>
7   <link rel="stylesheet" href="custom.css">
8   <style>
9     @import url('https://fonts.googleapis.com/css?family=Lobster');
10    @import url('https://fonts.googleapis.com/css?family=Noto Sans TC');
11    @import url('https://fonts.googleapis.com/css?family=Noto Serif TC');
12    @import url(http://fonts.googleapis.com/earlyaccess/cwtexyen.css);
13    @import url(http://fonts.googleapis.com/earlyaccess/cwtexfangsong.css);
14  </style>
15 </head>
16 <body>
17   <p style="font-family: Lobster, sans-serif;font-size:5em;">ABCDEFABCDEB</p>
18   <p style="font-family: '新細明體', sans-serif;font-size:5em;">建立網路字型測試文字（新細明體） </p>
19   <p style="font-family: '標楷體', sans-serif;font-size:5em;">建立網路字型測試文字（標楷體） </p>
20   <p style="font-family: 'Noto Sans TC', sans-serif;font-size:5em;">建立網路字型測試文字（Noto Sans TC） </p>
21   <p style="font-family: 'Noto Serif TC', sans-serif;font-size:5em;">建立網路字型測試文字（Noto Serif TC） </p>
22   <p style="font-family: 'cwtexyen';font-size:5em;">建立網路字型測試文字（圓體） </p>
23   <p style="font-family: 'cwtexfangsong';font-size:5em;">建立網路字型測試文字（仿宋） </p>
24 </body>
25 </html>
```

Google網路字型應用

ABCDEF ABCDEB

建立網路字型測試文字（新細明體）

建立網路字型測試文字（標楷體）

建立網路字型測試文字（Noto Sans TC）

建立網路字型測試文字（Noto Serif TC）

建立網路字型測試文字（圓體）

建立網路字型測試文字（仿宋）

練習

- 從 fonts.google.com 或網頁找尋新的網路字型。
- 利用2個中文新聞標題與1個英文新聞標題，建立網路字型測試練習。
- 標題與內文需使用相同字體。
- 其中一種字型需建立h1標籤的css方式呈現。

Bootstrap版面規畫



最新活動 會員登入 會員註冊 會員中心 查訂單 折價券 購物車 企業專區

Search...



彩妝專區

臉部保養

美膚保養

食品保健

肝臟保養 / 芝麻素

益生菌 / 乳酸菌

鐵 / 葉酸 / 孕期補充

蔓越莓 / 女性保養

男性健康補充

銀髮健康補充

成人特殊營養品

發布到facebook

華陀扶元堂養生精選 活力充沛3折起

送禮自用 貼心孝順好選擇

領取現金券


健康養生的好幫手

華陀扶元堂養生飲品系列3折優惠，歡迎選購



預計Bootstrap版面規畫

電商藥局-網頁版面

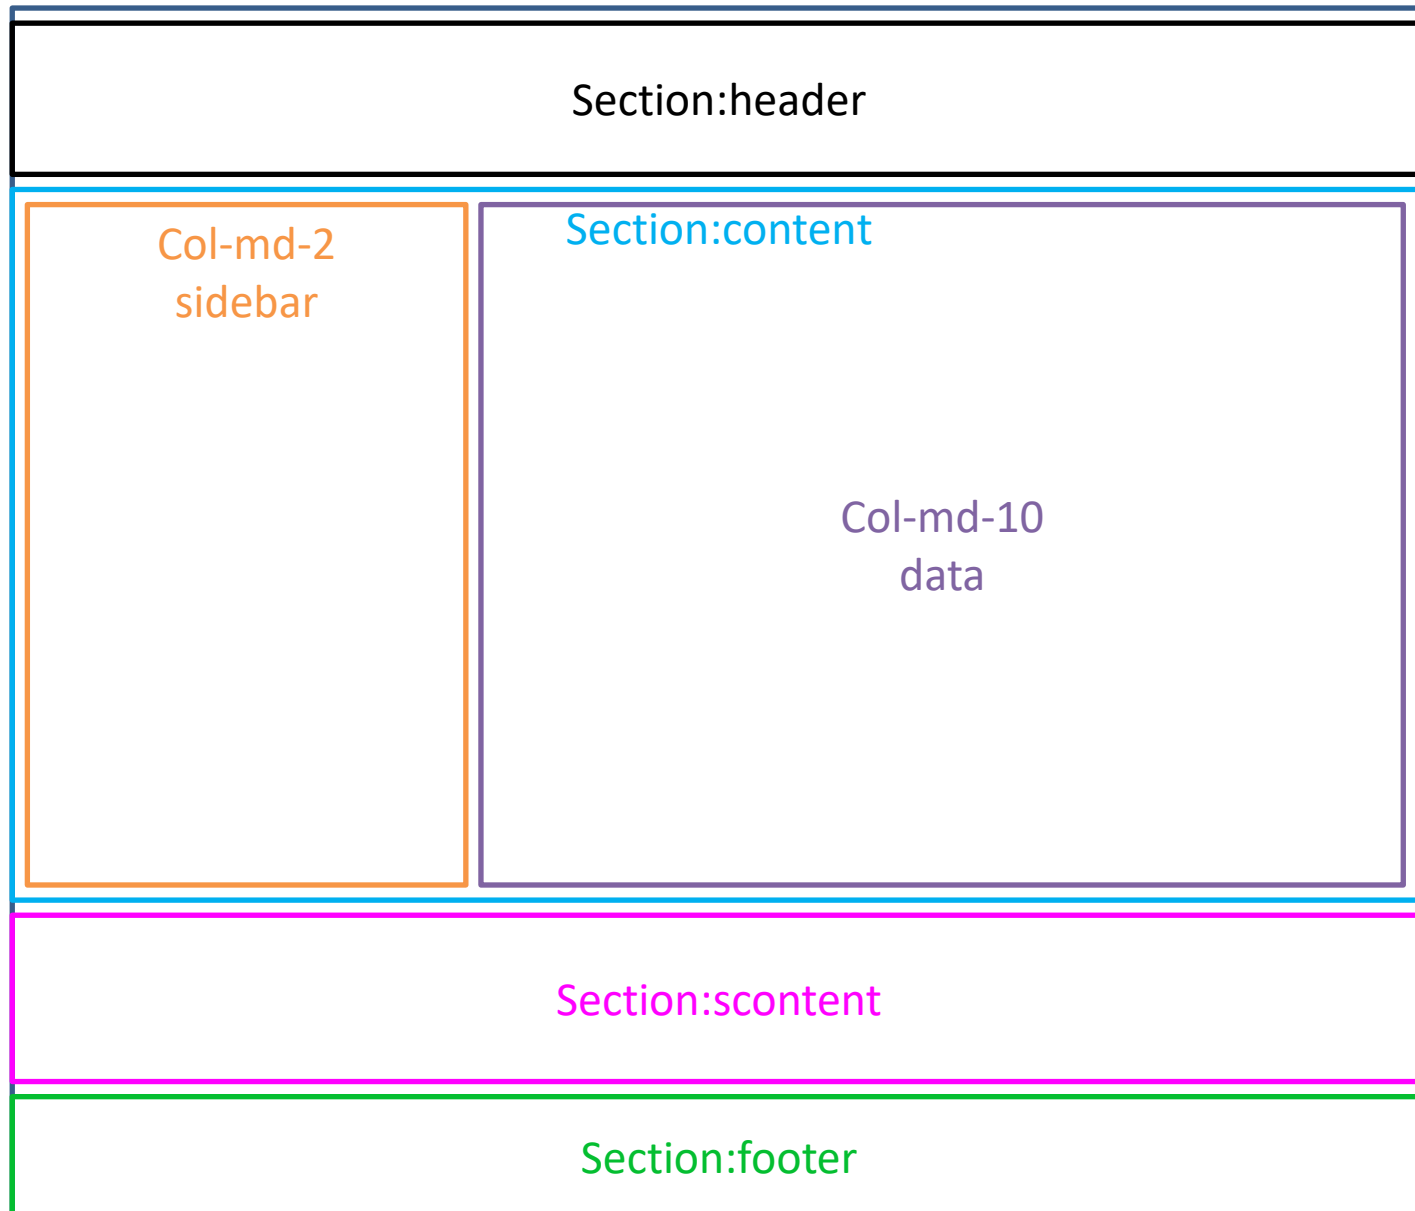

建立bootstrap CDN空白頁

```
index_s01.php bootstrap523CDN.html X website_s01.css
bootstrap523CDN.html > html > body
1 <!doctype html>
2 <html lang="en">
3
4 <head>
5   ... <meta charset="utf-8">
6   ... <meta name="viewport" content="width=device-width, initial-scale=1">
7   ... <title>Bootstrap demo</title>
8   ... <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="stylesheet"
9   ... integrity="sha384-rbsA2VBKQhggwzxH7pPCaAqO46MgnOM80zW1RWuH61DGLwZJEdK2Kadq2F9CUG65" crossorigin="anonymous">
10 </head>
11
12 <body>
13   ... <button type="button" class="btn btn-primary">Primary</button>
14   ... <button type="button" class="btn btn-secondary">Secondary</button>
15   ... <button type="button" class="btn btn-success">Success</button>
16   ... <button type="button" class="btn btn-danger">Danger</button>
17   ... <button type="button" class="btn btn-warning">Warning</button>
18   ... <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/bootstrap.bundle.min.js"
19   ... integrity="sha384-kenU1KfDfBIe4zVF0s0G1M5b4hcpyxD9F7jL+jjXkk+Q2h455rYXK/7HAuoJl+0I4"
20   ... crossorigin="anonymous"></script>
21 </body>
22
23 </html>
```

使用cdn(Content Delivery Network)建立 <https://getbootstrap.com/docs/5.2.3/getting-started/introduction/>

Getting started

- Introduction
- Download
- Contents
- Browsers & devices
- JavaScript
- Webpack
- Parcel
- Vite
- Accessibility
- RFS
- RTL
- Contribute

Customize

- Overview
- Sass
- Options
- Color
- Components
- CSS variables
- Optimize

Layout

- Breakpoints
- Containers
- Grid
- Columns

On this page

- Quick start
- CDN links
- Next steps
- JS components
- Important globals
 - HTML5 doctype
 - Responsive meta tag
 - Box-sizing
 - Reboot
- Community

2. Include Bootstrap's CSS and JS. Place the `<link>` tag in the `<head>` for our CSS, and the `<script>` tag for our JavaScript bundle (including Popper for positioning dropdowns, poppers, and tooltips) before the closing `</body>`. Learn more about our [CDN links](#).

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>Bootstrap demo</title>
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/boot
  </head>
  <body>
    <h1>Hello, world!</h1>
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/boot
  </body>
</html>
```

You can also include [Popper](#) and our JS separately. If you don't plan to use dropdowns, popovers, or tooltips, save some kilobytes by not including Popper.

```
<script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.11.6/dist/umd/p
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/bootstra
```

3. Hello, world! Open the page in your browser of choice to see your Bootstrapped page. Now you can start building with Bootstrap by creating your own [layout](#), adding dozens of [components](#), and utilizing [our official examples](#).

CDN links

建立初始網頁設定

- 預設影像位置：/images
- 產品影像位置：/product_img
- 屬性->HTML->文件標題：電商藥粧
- 建立新的CSS檔，名稱：website_s01.css
- 存檔，名稱：index_s01.php
- 更改<html lang= “en” >改成<html lang= “zh-TW” >

Font Awesome 字型圖示

- 於<head>內加入
- `<link rel="stylesheet" href="https://use.fontawesome.com/releases/v6.2.1/css/all.css">`
- Font Awesome 字型圖示查詢網址：
- <http://fontawesome.io/icons/>

設定內容

快速入門

index_s01.php

index_s01.php > html > head > link

```
1 <!doctype html>
2 <html lang="zh-TW">
3   <head>
4     <meta charset="utf-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1">
6     <title>電商藥粧</title>
7     <!-- bootstrap5.2.css -->
8     <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="stylesheet"
      integrity="sha384-rbsA2VBKQhggwzxH7pPCaAqO46MgnOM80zW1RWuH61DGLWZJEdK2Kadq2F9CUG65"
      crossorigin="anonymous">
9     <link rel="stylesheet" href="https://use.fontawesome.com/releases/v6.2.1/css/all.css">
10    <link rel="stylesheet" href="website_s01.css">
11  </head>
12  <body>
13    <h1>Hello, world!</h1>
14
15    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/bootstrap.bundle.min.js"
      integrity="sha384-kenU1KFdBIe4zVF0s0G1M5b4hcxpyD9F7jL+jjXkk+Q2h455rYXK/7HAuoJl+0I4"
      crossorigin="anonymous"></script>
16
17  </body>
18 </html>
```

加入Jquery

```
....<title>電商藥粧</title>
....<!-- bootstrap5.2.css -->
....<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="st
    integrity="sha384-rbsA2VBKQhggwzxH7pPCaAqO46MgnOM80zW1RWuH61DGLWZJEdK2Kadq2F9CUG65"
    crossorigin="anonymous">
....<link rel="stylesheet" href="https://use.fontawesome.com/releases/v6.2.1/css/all.css">
....<link rel="stylesheet" href="website_s01.css">
..</head>
..<body>
....<h1>Hello, world!</h1>
....
....<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/bootstrap.bundle.min.js"
    integrity="sha384-kenU1KFdBIe4zVF0s0G1M5b4hcpyxD9F7jL+jjXkk+Q2h455rYXK/7HAuoJl+0I4"
    crossorigin="anonymous"></script>
....<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.1/jquery.min.js"></script>
....
..</body>
</html>
```

建立初始網頁設定

- 設定導入字型檔於CSS檔中，並設定body中



The screenshot shows a code editor with three tabs: 'index_s01.php', 'website_s01.css', and 'bootstrap523CDN.html'. The 'website_s01.css' tab is active, and the cursor is positioned at the start of the 'body' selector. The code is as follows:

```
1 @import url('https://fonts.googleapis.com/css2?family=Noto+Serif+TC&display=swap');
2
3 body{
4     font-family: Arial, 'Noto Serif TC', sans-serif;
5     font-size: 16px;
6 }
7
```

建構div區塊

- Section id=header
- Section id=content
- Section id=scontent
- Section id=footer

完成後html圖

```
<body>
```

```
<section id="header"></section>
```

```
<section id="content"></section>
```

```
<section id="scontent"></section>
```

```
<section id="footer"></section>
```

建立bootstrap導覽列

The screenshot displays the Bootstrap 5.2 documentation interface. The top navigation bar is purple with links for Docs, Examples, Icons, Themes, and Blog, along with a search bar and version indicator (v5.2). The left sidebar lists various components, with 'Navbar' highlighted in a red box. The main content area shows a live preview of a Bootstrap Navbar at the top, followed by the corresponding HTML code. The code is enclosed in a red box and includes a collapseable navbar with a search form and a dropdown menu. The right sidebar lists 'On this page' topics, with 'Supported content' highlighted in a red box.

Navbar Home Link Dropdown ▾ Disabled Search Search

HTML

```
<nav class="navbar navbar-expand-lg bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="#">Home</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="#">Link</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" role="button" data-bs-toggle="dropdown">
            Dropdown
          </a>
          <ul class="dropdown-menu">
            <li><a class="dropdown-item" href="#">Action</a></li>
            <li><a class="dropdown-item" href="#">Another action</a></li>
            <li><hr class="dropdown-divider"></li>
            <li><a class="dropdown-item" href="#">Something else here</a></li>
          </ul>
        </li>
        <li class="nav-item">
          <a class="nav-link disabled">Disabled</a>
        </li>
      </ul>
      <form class="d-flex" role="search">
        <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
        <button class="btn btn-outline-success" type="submit">Search</button>
      </form>
    </div>
  </div>
</nav>
```

On this page

- How it works
- Supported content
 - Brand
 - Text
 - Image
 - Image and text
 - Nav
 - Forms
 - Text
- Color schemes
- Containers
- Placement
- Scrolling
- Responsive behaviors
 - Toggle
- External content
- Offcanvas
- CSS
 - Variables
 - Sass variables
 - Sass loop

建立bootstrap導覽列1

```
14 <body>
15   <!--<section id="header">
16     <nav class="navbar navbar-expand-lg bg-light">
17       <div class="container-fluid">
18         <a class="navbar-brand" href="#">Navbar</a>
19         <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent"
20           aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
21           <span class="navbar-toggler-icon"></span>
22         </button>
23         <div class="collapse navbar-collapse" id="navbarSupportedContent">
24           <ul class="navbar-nav mx-auto mb-2 mb-lg-0"> ...
25         </ul>
26       </div>
27     </nav>
28   </section>
29   <section id="content"></section>
30   <section id="scontent"></section>
31   <section id="footer"></section>
32
33   <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/js/bootstrap.bundle.min.js"
34     integrity="sha384-kenU1KFdBIe4zVF0s0G1M5b4hccpzyD9F7jL+jjXkk+Q2h455rYXK/7HAuoJl+0I4"
35     crossorigin="anonymous"></script>
36   <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.7.1/jquery.min.js"></script>
37
38 </body>
39 </html>
```

刪除不需要導覽列項目

```
<div class="collapse navbar-collapse" id="navbarSupportedContent">
  <ul class="navbar-nav mr-auto">
    <li class="nav-item active">
      <a class="nav-link" href="#">Home <span class="sr-only">(current)
      </span></a>
    </li>
    <li class="nav-item">
      <a class="nav-link" href="#">Link</a>
    </li>
    <li class="nav-item dropdown">
      <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown"
      role="button" data-toggle="dropdown" aria-haspopup="true"
      aria-expanded="false">
        Dropdown
      </a>
      <div class="dropdown-menu" aria-labelledby="navbarDropdown">
        <a class="dropdown-item" href="#">Action</a>
        <a class="dropdown-item" href="#">Another action</a>
        <div class="dropdown-divider"></div>
        <a class="dropdown-item" href="#">Something else here</a>
      </div>
    </li>
    <li class="nav-item">
      <a class="nav-link disabled" href="#" tabindex="-1"
      aria-disabled="true">Disabled</a>
    </li>
  </ul>
  <form class="form-inline my-2 my-lg-0">
    <input class="form-control mr-sm-2" type="search"
    placeholder="Search" aria-label="Search">
    <button class="btn btn-outline-success my-2 my-sm-0"
    type="submit">Search</button>
  </form>
```

建立bootstrap導覽列1

- 開啟文件資料將navbar的內容建入成為新的Navbar導覽列功能

```
<a class="navbar-brand" href="#">Navbar</a>
<button class="navbar-toggler" type="button" data-bs-toggle="collapse"
  data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent"
  aria-expanded="false" aria-label="Toggle navigation">
  <span class="navbar-toggler-icon"></span>
</button>
<div class="collapse navbar-collapse" id="navbarSupportedContent">
  <ul class="navbar-nav me-auto mb-2 mb-lg-0">
    <li class="nav-item"><a class="nav-link" href="#">會員註冊</a></li>
    <li class="nav-item"><a class="nav-link" href="#">會員登入</a></li>
    <li class="nav-item"><a class="nav-link" href="#">會員中心</a></li>
    <li class="nav-item"><a class="nav-link" href="#">最新活動</a></li>
    <li class="nav-item"><a class="nav-link" href="#">查訂單</a></li>
    <li class="nav-item"><a class="nav-link" href="#">折價券</a></li>
    <li class="nav-item"><a class="nav-link" href="#">購物車</a></li>
    <li class="nav-item dropdown">
      <a class="nav-link dropdown-toggle" href="#" role="button"
        data-bs-toggle="dropdown" aria-expanded="false">
        企業專區
      </a>
      <ul class="dropdown-menu">
        <li><a class="dropdown-item" href="#">認識企業文化</a></li>
        <li>
```

建立bootstrap導覽列2

```
...<li class="nav-item"><a class="nav-link" href="#">查訂單</a></li>
...<li class="nav-item"><a class="nav-link" href="#">折價券</a></li>
...<li class="nav-item"><a class="nav-link" href="#">購物車</a></li>
...<li class="nav-item dropdown">
...  <a class="nav-link dropdown-toggle" href="#" role="button"
...    data-bs-toggle="dropdown" aria-expanded="false">
...    企業專區
...  </a>
...  <ul class="dropdown-menu">
...    <li><a class="dropdown-item" href="#">認識企業文化</a></li>
...    <li><a class="dropdown-item" href="#">全台門市資訊</a></li>
...    <li><a class="dropdown-item" href="#">供應商報價服務</a></li>
...    <li><a class="dropdown-item" href="#">加盟專區</a></li>
...    <li><a class="dropdown-item" href="#">投資人專區</a></li>
...  </ul>
...</li>
</ul>
```

測試執行

Navbar 會員註冊 會員登入 會員中心 最新活動 查訂單 折價券 購物車 企業專區 ▼

認識企業文化

全台門市資訊

供應商報價服務

加盟專區

投資人專區

建立bootstrap導覽列

- 設定Navbar導覽列Band以LOGO圖取代，並輸入替代文字。

```
<section id="header">
  <nav class="navbar navbar-expand-lg navbar-light"
    style="background-color: #C7000A;">
    <a class="navbar-brand" href="#"></a>
    <button class="navbar-toggler" type="button"
      data-toggle="collapse" data-target="#navbarSupportedContent"
      aria-controls="navbarSupportedContent" aria-expanded="false"
      aria-label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>
```

建立bootstrap導覽列

- 刪除原bg-light背景顏色。

```
<body>
```

```
  <section id="header">
```

```
    <nav class="navbar navbar-expand-lg navbar-light bg-light"> 刪除  
      <a class="navbar-brand" href="#"></a>  
      <button class="navbar-toggler" type="button"  
        data-toggle="collapse" data-target="#navbarSupportedContent"  
        aria-controls="navbarSupportedContent" aria-expanded="false"  
        aria-label="Toggle navigation">  
        <span class="navbar-toggler-icon"></span>  
      </button>
```

加入fixed-top功能

```
<body>
  <section id="header">
    <nav class="navbar navbar-expand-lg navbar-light fixed-top"> 加入
      <a class="navbar-brand" href="#"></a>
      <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSup
      aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation"
        <span class="navbar-toggler-icon"></span>
      </button>
      <div class="collapse navbar-collapse" id="navbarSupportedContent">
        <ul class="navbar-nav mx-auto">
          <li class="nav-item"><a class="nav-link" href="#">會員註冊</a></li>
          <li class="nav-item"><a class="nav-link" href="#">會員登入</a></li>
          <li class="nav-item"><a class="nav-link" href="#">會員中心</a></li>
          <li class="nav-item"><a class="nav-link" href="#">最新活動</a></li>
          <li class="nav-item"><a class="nav-link" href="#">查訂單</a></li>
```

加入mx-auto置中功能

```
aria-expanded="false" aria-label="Toggle navigation">
<span class="navbar-toggler-icon"></span>
</button>
<div class="collapse navbar-collapse" id="navbarSupportedContent">
  <ul class="navbar-nav mx-auto mb-2 mb-lg-0">
    <li class="nav-item"><a class="nav-link" href="#">會員註冊</a></li>
    <li class="nav-item"><a class="nav-link" href="#">會員登入</a></li>
    <li class="nav-item"><a class="nav-link" href="#">會員中心</a></li>
    <li class="nav-item"><a class="nav-link" href="#">最新活動</a></li>
    <li class="nav-item"><a class="nav-link" href="#">查訂單</a></li>
    <li class="nav-item"><a class="nav-link" href="#">折價券</a></li>
    <li class="nav-item"><a class="nav-link" href="#">購物車</a></li>
    <li class="nav-item dropdown">
      <a class="nav-link dropdown-toggle" href="#" role="button"
        data-bs-toggle="dropdown" aria-expanded="false">
        企業專區
      </a>
```

建立bootstrap導覽列1

- 設定Navbar導覽列css功能。

```
快速入門  index_s01.php  website_s01.css ×
website_s01.css > .accordion-button
4  ....font-family: Arial, 'Noto Serif TC', sans-serif;
5  ....font-size: 14pt;
6  ....padding-top: 60px;
7  }
8  .navbar{
9  ....padding: 0px;
10 ....background-color: #C7000A;
11 }
12 .nav-link{
13 ....color: #fff !important;
14 ....font-weight: bolder;
15 ....font-size: 1.5vw;
16 }
17 .dropdown-item{
18 ....color: #337ab7 !important;
19 ....font-size: 1.2vw;
20 }
21 .dropdown .dropdown-item:hover,
22 .dropdown .dropdown-item:focus{
23 ....color: #fff !important;
24 ....background-color: #337ab7;
25 }
```

測試結果



[會員註冊](#) [會員登入](#) [會員中心](#) [最新活動](#) [查訂單](#) [折價券](#) [購物車](#) [企業專區 ▾](#)

[認識企業文化](#)
[全台門市資訊](#)
[供應商報價服務](#)
[加盟專區](#)
[投資人專區](#)

建立content內容

```
48 <section id="content">
49   <div class="container-fluid">
50     <div class="row">
51 >       <div class="col-md-2">...
180     </div>
181 >       <div class="col-md-10">...
372     </div>
373   </div>
374 </div>
375 </section>
```

content css

```
55  #content{  
56  |    margin-top:10px;  
57  }
```

建立sidebar 搜尋列

```
<section id="content">
...<div class="container-fluid">
...<div class="row">
...<div class="col-md-2">
...<div class="sidebar">
...<form name="search" id="search" action="" method="get">
...<div class="input-group">
...<input type="text" name="search_name" class="form-control" placeholder="Search...">
...<span class="input-group-btn"><button class="btn btn-default" type="submit"><i class="fas fa-search
...fa-lg"></i></button></span>
...</div>
...</form>
...</div>
...</div>
...<div class="col-md-10"></div>
...</div>
...</div>
</section>
```

建立sidebar css規則

```
23  ...color: #fff; font-weight: bold; font-size: 1.2em;
24  ...background-color: #337ab7;
25  }
26  #content{
27  ...margin-top: 10px;
28  }
29  .row .col-md-2 .sidebar, .accordion-button{
30  ...border: 2px solid #dfdfff;
31  ...background-color: #f7f7f7;
32  }
33  .sidebar{
34  ...padding: 5px;
35  }
36  .accordion-button{
37  ...font-size: 1.5vw;
38  }
39  .accordion-body table td:hover{
40  ...background-color: antiquewhite;
41  }
42  .accordion-body{
43  ...padding: 0px;
44  }
```

測試執行



[會員註冊](#) [會員登入](#)

Search...



建立下拉式功能表，取得範列程式

> Getting started

> Customize

> Layout

> Content

> Forms

> Components

Alerts

Badge

Breadcrumb

Buttons

Button group

Card

Carousel

Close button

Collapse

Dropdowns

List group

Modal

Example

Click the accordions below to expand/collapse the accordion content.

Accordion Item #1

Accordion Item #2

Accordion Item #3

```
<div class="accordion" id="accordionExample">
  <div class="accordion-item">
    <h2 class="accordion-header" id="headingOne">
      <button class="accordion-button" type="button" data-bs-toggle="collapse" data-bs-target="#co:
        Accordion Item #1
      </button>
    </h2>
    <div id="collapseOne" class="accordion-collapse collapse show" aria-labelledby="headingOne" da:
      <div class="accordion-body">
        <strong>This is the first item's accordion body.</strong> It is shown by default, until th
      </div>
    </div>
  </div>
  <div class="accordion-item">
```

Copy

On this page

How it works

Example

Flush

Always open

Accessibility

Sass

Variables

貼上accordion元件

```
57 <div class= col-md-2 >
58 <div class="sidebar">
59   <form name="search" id="search" action="" method="get">
60     <div class="input-group">
61       <input type="text" name="search_name" class="form-control" placeholder="Search...">
62       <span class="input-group-btn">
63         <button class="btn btn-default" type="submit"><i class="fas fa-search fa-lg"></i></button>
64       </span>
65     </div>
66   </form>
67 </div>
68 <div class="accordion" id="accordionExample">
69   <div class="accordion-item">
70     <h2 class="accordion-header" id="headingOne">
71       <button class="accordion-button" type="button" data-bs-toggle="collapse" data-bs-target="#collapseOne" aria-expanded="true"
72         aria-controls="collapseOne">
73         Accordion Item #1
74       </button>
75     </h2>
76     <div id="collapseOne" class="accordion-collapse collapse show" aria-labelledby="headingOne" data-bs-parent="#accordionExample">
77       <div class="accordion-body">
78         <strong>This is the first item's accordion body.</strong> It is shown by default, until the collapse plugin adds the
79         appropriate classes that we use to style each element. These classes control the overall appearance, as well as the showing
80         and hiding via CSS transitions. You can modify any of this with custom CSS or overriding our default variables. It's also
81         worth noting that just about any HTML can go within the <code>.accordion-body</code>, though the transition does limit
82         overflow.
83       </div>
84     </div>
85   </div>
86 </div>
```

修改下拉式功能表內容*3

```
...<div class="accordion-item">
...  <h2 class="accordion-header" id="headingOne">
...    <button class="accordion-button" type="button" data-bs-toggle="collapse"
...      data-bs-target="#collapseOne" aria-expanded="true" aria-controls="collapseOne">
...      <i class="fas fa-fire fa-lg fa-fw"></i>彩妝專區
...    </button>
...  </h2>
...  <div id="collapseOne" class="accordion-collapse collapse show" aria-labelledby="headingOne"
...    data-bs-parent="#accordionExample"> ...
...  </div>
...</div>
...<div class="accordion-item">
...  <h2 class="accordion-header" id="headingTwo">
...    <button class="accordion-button collapsed" type="button" data-bs-toggle="collapse"
...      data-bs-target="#collapseTwo" aria-expanded="false" aria-controls="collapseTwo">
...      <i class="fas fa-paw fa-lg fa-fw"></i>臉部保養
...    </button>
...  </h2>
...  <div id="collapseTwo" class="accordion-collapse collapse" aria-labelledby="headingTwo"
...    data-bs-parent="#accordionExample"> ...
...  </div>
...</div>
```

建立子功能表*3

```
<div class="accordion-item">
  <h2 class="accordion-header" id="headingOne">
    <button class="accordion-button" type="button" data-bs-toggle="collapse"
      data-bs-target="#collapseOne" aria-expanded="true" aria-controls="collapseOne">
      <i class="fas fa-fire fa-lg fa-fw"></i>彩妝專區
    </button>
  </h2>
  <div id="collapseOne" class="accordion-collapse collapse show" aria-labelledby="headingOne"
    data-bs-parent="#accordionExample">
    <div class="accordion-body">
      <table class="table">
        <tbody>
          <tr>
            <td><a href="#"><em class="fas fa-edit"></em>隔離/防曬/飾底乳</a></td>
          </tr>
          <tr>
            <td><a href="#"><em class="fas fa-edit"></em>BB霜/CC霜</a></td>
          </tr>
          <tr>
            <td><a href="#"><em class="fas fa-edit"></em>粉餅(蕊)/蜜粉/蜜粉/海綿</a></td>
          </tr>
          <tr>
            <td><a href="#"><em class="fas fa-edit"></em>遮瑕/毛孔/打亮</a></td>
          </tr>
        </tbody>
      </table>
    </div>
  </div>
</div>
```

Css規則

```
32 }
33 .sidebar{
34   ...padding: 5px;
35 }
36 .accordion-button{
37   ...font-size: 1.5vw;
38 }
39 .accordion-body table td:hover{
40   ...background-color: antiquewhite;
41 }
42 .accordion-body{
43   ...padding: 0px;
44 }
45 .table{
46   ...margin-bottom: 0px;
47 }
48 .table td{
49   ...border-top: none;
50   ...border-bottom: 1px solid #dee2e6;
51   ...padding-left: 2rem;
52   ...font-size: 0.8vw;
53 }
54
```

測試執行

Home Shop Cart



[會員註冊](#) [會員登入](#) [會員中心](#) [最新活動](#) [查訂單](#)

Search...



 彩妝專區 ^

 [隔離/防曬/飾底乳](#)

 [BB霜/CC霜](#)

 [粉餅\(蕊\)/蜜粉/蜜粉/海綿](#)

 [遮瑕/毛孔/打亮](#)

 臉部保養 v

 美膚保養 v

建立廣告輪播區塊

- 於<div class= “col-lg-10” >插入子項目
- 選擇carousel廣告輪播區塊，並取代內容頁，新的主題內容。
- pic1.jpg
- alt=慶祝媽媽節特惠方案
- h3=慶祝媽媽節特惠方案
- 為感恩全天下辛苦的母親節特別推出一系列優惠專案
- ...
- 完成後插入一個水平線為區隔。

取得bootstrap範例程式

B

Home Documentation Examples Icons Themes Expo Blog

v4.5

Download

Search...

Getting started

Layout

Content

Components

Alerts

Badge

Breadcrumb

Buttons

Button group

Card

Carousel

Collapse

Dropdowns

Forms

Input group

Jumbotron

List group

Media object

Modal

Navs

Navbar

Pagination

With captions

Add captions to your slides easily with the `.carousel-caption` element within any `.carousel-item`. They can be easily hidden on smaller viewports, as shown below, with optional [display utilities](#). We hide them initially with `.d-none` and bring them back on medium-sized devices with `.d-md-block`.

Second slide

Second slide label

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

```
<div id="carouselExampleCaptions" class="carousel slide" data-ride="carousel">
  <ol class="carousel-indicators">
    <li data-target="#carouselExampleCaptions" data-slide-to="0" class="active"></li>
    <li data-target="#carouselExampleCaptions" data-slide-to="1"></li>
    <li data-target="#carouselExampleCaptions" data-slide-to="2"></li>
  </ol>
  <div class="carousel-inner">
    <div class="carousel-item">
      <img alt="First slide" data-bbox="242 433 767 750" />
      <div class="carousel-caption d-none d-md-block">
        First slide label
        Lorem ipsum dolor sit amet, consectetur adipiscing elit.
      </div>
    </div>
    <div class="carousel-item">
      <img alt="Second slide" data-bbox="242 433 767 750" />
      <div class="carousel-caption d-none d-md-block">
        Second slide label
        Lorem ipsum dolor sit amet, consectetur adipiscing elit.
      </div>
    </div>
    <div class="carousel-item">
      <img alt="Third slide" data-bbox="242 433 767 750" />
      <div class="carousel-caption d-none d-md-block">
        Third slide label
        Lorem ipsum dolor sit amet, consectetur adipiscing elit.
      </div>
    </div>
  </div>
</div>
```

Copy

How it works

Example

Slides only

With controls

With indicators

With captions

Crossfade

Individual `.carousel-item` interval

Usage

Via data attributes

Via JavaScript

Options

Methods

`.carousel(options)`

`.carousel('cycle')`

`.carousel('pause')`

`.carousel(number)`

`.carousel('prev')`

`.carousel('next')`

`.carousel('dispose')`

Events

Change transition duration

<https://getbootstrap.com/docs/4.5/components/carousel/#carouselExampleCaptions>

修改程式內容

```
.....<div class="col-md-10">
<div id="carouselExampleCaptions" class="carousel slide" data-bs-ride="carousel">
<div class="carousel-indicators">
<button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="0" class="active" aria-current="true"
aria-label="Slide 1"></button>
<button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="1" aria-label="Slide 2"></button>
<button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="2" aria-label="Slide 3"></button>
</div>
<div class="carousel-inner">
<div class="carousel-item active">

<div class="carousel-caption d-none d-md-block">
<h5>雙11！天天最高送111</h5>
<p>購物金活動採單日累計消費滿額即可參加登記送活動，活動期間僅需登記一次，部分商品不適用，詳見說明。</p>
</div>
</div>
<div class="carousel-item">

<div class="carousel-caption d-none d-md-block">
<h5>建康養生的好幫手</h5>
<p>黑金鑽士雞18小時純粹滴煉，去油濾渣無膽固醇，殺菌包裝常溫保存，含BACC、雙肌肽、牛磺酸、小分子蛋白質等，可單飲或當高湯華陀扶元堂養生飲品系列3折優惠，歡迎選購</p>
</div>
</div>
<div class="carousel-item">

<div class="carousel-caption d-none d-md-block">
<h5>頂級保濕面膜，臉部滋養的好幫手</h5>
<p>保養界的藝術品！內到外優雅自成一格，堅持保養始於自然，升級膚質0負擔，讓肌膚與生活更美好。源自台灣的國際保養品牌！</p>
```

執行結果



會員註冊 會員登入 會員中心 最新活動 查訂單 折價券 購物車 企業專區 ▾

Search... 

彩妝專區

 隔離/防曬/飾底乳

 BB霜/CC霜

 粉餅(粉)/蜜粉/蜜粉/海綿

 遮瑕/毛孔/打亮

 發布到facebook

華陀扶元堂養生精選 活力充沛3折起

送禮自用 貼心孝順好選擇

 領取現金券

華陀扶元堂養生精選 活力充沛3折起優惠，歡迎選購。



建立產品縮圖區塊

- 在水平線之後插入：
- `<div class= “row text-center” >子項目</div>`
- 在子項目中插入bootstrap組件，card產品縮圖區塊，一共要放12個，並取代內容頁，新的主題內容。
- `pic0101. jpg`
- `alt=台大葉黃素膠囊`
- `h3=台大葉黃素膠囊`
- 游離型軟膠囊，採用金盞花植物萃取含20% 葉黃素
- `NT3600`
- 詳細資訊、放購物車

取得card範例程式

B

Home Documentation Examples Icons Themes Expo Blog

v4.5

Download

Search...

Getting started

Layout

Content

Components

Alerts

Badge

Breadcrumb

Buttons

Button group

Card

Carousel

Collapse

Dropdowns

Forms

Input group

Jumbotron

List group

Media object

Modal

Navs

Navbar

Pagination

Example

Cards are built with as little markup and styles as possible, but still manage to deliver a ton of control and customization. Built with flexbox, they offer easy alignment and mix well with other Bootstrap components. They have no **margin** by default, so use [spacing utilities](#) as needed.

Below is an example of a basic card with mixed content and a fixed width. Cards have no fixed width to start, so they'll naturally fill the full width of its parent element. This is easily customized with our various [sizing options](#).

Image cap

Card title

Some quick example text to build on the card title and make up the bulk of the card's content.

Go somewhere

```
<div class="card" style="width: 18rem;">
  
  <div class="card-body">
    <h5 class="card-title">Card title</h5>
    <p class="card-text">Some quick example text to build on the card title and make up the bulk of the card's content.</p>
    <button class="btn btn-primary">Go somewhere</button>
  </div>
</div>
```

Copy

About

Example

Content types

Body

Titles, text, and links

Images

List groups

Kitchen sink

Header and footer

Sizing

Using grid markup

Using utilities

Using custom CSS

Text alignment

Navigation

Images

Image caps

Image overlays

Horizontal

Card styles

Background and color

Border

Mixins utilities

Card layout

Card groups

Card decks

Grid cards

Card columns

隔離/防曬/飾底乳

BB霜/CC霜

粉餅(蕊)/蜜粉/蜜粉/海綿

遮瑕/毛孔/打亮

臉部保養

美膚保養

媽媽咪達 巧心外豆

4/18-5/14

送感恩禮金 結帳8折起

購買+贈禮+兌換再抽美容聖品

為感恩全天下辛苦的母親節特別推出一系列優惠專案

華陀扶元堂 御松田 詳情

母親節推薦

- 媽咪好禮
- 頂級饗宴
- 人氣糕點
- 夏日抗戰
- 全家出遊
- 內外美麗



台大葉黃素膠囊

游離型軟膠囊，採用金盞花植物萃取含20%葉黃素，調節生理機能，營養補給，健康維持

NT3600

[更多資訊](#)

[放購物車](#)



黃金燕窩生物纖維面膜

手術後保養，約會前急救聖品，媲美專櫃等級！網友推薦最新使用，肌膚很水嫩，感覺很透亮。

NT1200

[更多資訊](#)

[放購物車](#)



MIZON 蝸牛全效活膚霜

無論混合肌、油性肌、痘痘肌、乾性肌、過敏肌等《任何膚質適用》，是修護型保養品！！

NT690

[更多資訊](#)

[放購物車](#)



星期四農莊迷迭香精油

迷迭香精油+薰衣草精油(大自然植物舒眠系列)！！

NT1269

[更多資訊](#)

[放購物車](#)

Pagination取得範例程式

B

Home Documentation Examples Icons Themes Expo Blog

v4.5

Download

Search...

Getting started

Layout

Content

Components

Alerts

Badge

Breadcrumb

Buttons

Button group

Card

Carousel

Collapse

Dropdowns

Forms

Input group

Jumbotron

List group

Media object

Modal

Navs

Navbar

Pagination

Working with icons

Looking to use an icon or symbol in place of text for some pagination links? Be sure to provide proper screen reader support with `aria` attributes.

« 1 2 3 »

```
<nav aria-label="Page navigation example">
  <ul class="pagination">
    <li class="page-item">
      <a class="page-link" href="#" aria-label="Previous">
        <span aria-hidden="true">&laquo;</span>
      </a>
    </li>
    <li class="page-item"><a class="page-link" href="#">1</a></li>
    <li class="page-item"><a class="page-link" href="#">2</a></li>
    <li class="page-item"><a class="page-link" href="#">3</a></li>
    <li class="page-item">
      <a class="page-link" href="#" aria-label="Next">
        <span aria-hidden="true">&raquo;</span>
      </a>
    </li>
  </ul>
</nav>
```

Copy

Disabled and active states

Pagination links are customizable for different circumstances. Use `.disabled` for links that appear un-

Overview

Working with icons

Disabled and active states

Sizing

Alignment

修改程式內容

```
</div>
<div class="row mt-2">
  <nav aria-label="Page navigation example">
    <ul class="pagination justify-content-center">
      <li class="page-item">
        <a class="page-link" href="#" aria-label="Previous">
          <span aria-hidden="true">&laquo;</span>
        </a>
      </li>
      <li class="page-item"><a class="page-link" href="#">1</a></li>
      <li class="page-item active"><a class="page-link" href="#">2</a></li>
      <li class="page-item"><a class="page-link" href="#">3</a></li>
      <li class="page-item">
        <a class="page-link" href="#" aria-label="Next">
          <span aria-hidden="true">&raquo;</span>
        </a>
      </li>
    </ul>
  </nav>
</div>
</div>
</div>
```

執行結果



EVE'S 魔術性感美唇膏

魔術性感美唇膏，不沾杯超持久唇色，想不到的魔術效果持續久。

NT580

[更多資訊](#)

[放購物車](#)



DMC三合一精華霜

DMC 欣蘭 水透透三合一凝凍 洗卸/面膜/精華霜 150g。

NT850

[更多資訊](#)

[放購物車](#)



森下仁丹整晚貼眼膜

日本森下仁丹整晚貼眼膜 5對/盒，長效整晚貼，慢速釋放保濕因子。

NT300

[更多資訊](#)

[放購物車](#)



【美爽爽】泡泡染

美爽爽】泡泡染BUBBLE COLOR系列，任意顏色，買五送二。

NT3250

[更多資訊](#)

[放購物車](#)

«

1

2

3

»

建立scontent關於我們網頁1

```
<hr>
```

```
<section id="scontent">
  <div class="container-fluid">
    <div id="aboutme" class="row text-center">
      <div class="col-md-2">
      </div>
      <div class="col-md-2"><i class="fas fa-thumbs-up fa-5x"></i>
        <h3>關於我們</h3>
        關於我們<br>
        企業官網<br>
        招商專區<br>
        人才招聘<br>
      </div>
      <div class="col-md-2"><i class="fas fa-truck fa-5x"></i>
        <h3>特色服務</h3>
        特色服務<br>
        大宗採購方案<br>
        直配大陸<br>
      </div>
      <div class="col-md-2"><i class="fas fa-users fa-5x"></i>
        <h3>客戶服務</h3>
        客戶服務<br>
        訂單/配送進度查詢<br>
        取消訂單/退貨<br>
        更改配送地址<br>
        追蹤清單<br>
        12H速達服務<br>
        折價券說明<br>
      </div>
      <div class="col-md-2"><i class="fas fa-comments fa-5x"></i>
```

建立scontent關於我們網頁2

```
<div class="col-md-2"><i class="fas fa-users fa-5x"></i>
  <h3>客戶服務</h3>
  客戶服務<br>
  訂單/配送進度查詢<br>
  取消訂單/退貨<br>
  更改配送地址<br>
  追蹤清單<br>
  12H速達服務<br>
  折價券說明<br>
</div>
<div class="col-md-2"><i class="fas fa-comments-dollar fa-5x"></i>
  <h3>好康大放送</h3>
  好康大放送<br>
  新會員禮包<br>
  活動得獎名單<br>
</div>
<div class="col-md-2"><i class="fas fa-question fa-5x"></i>
  <h3>FAQ 常見問題</h3>
  FAQ 常見問題<br>
  系統使用問題<br>
  產品問題查詢<br>
  大宗採購問題<br>
  聯絡我們<br>
</div>
</div>
</div>
</section>
<section id="footer"></section>
```

建立CSS規則

```
43  ✓ #aboutme {  
44      background-color: ■ #31384a;  
45      color: □ #FFFFFF;  
46      padding-top: 30px;  
47      padding-bottom: 30px;  
48  }  
49
```

執行測試

« 1 2 3 »



關於我們

關於我們
企業官網
招商專區
人才招聘



特色服務

特色服務
大宗採購方案
直配大陸



客戶服務

客戶服務
訂單/配送進度查詢
取消訂單/退貨
更改配送地址
追蹤清單
12H速達服務
折價券說明



好康大放送

好康大放送
新會員禮包
活動得獎名單



FAQ 常見問題

FAQ 常見問題
系統使用問題
產品問題諮詢
大宗採購問題
聯絡我們

建立最後資料列

```
<section id="footer">
  <div class="container-fluid">
    <div id="last-data" class="row text-center">
      <div class="col-md-12">
        <h6>中彰投分署科技股份有限公司 40767台中市西屯區工業區一路100號 電話：04-23592181 免
        付費電話：0800-777888</h6>
        <h6>企業通過ISO/IEC27001認證，食品業者登錄字號：A-127360000-00000-0</h6>
        <h6>版權所有 copyright © 2017 WDA.com Inc. All Rights Reserved.</h6>
      </div>
    </div>
  </div>
</section>
```

建立最後資料列CSS

```
49 ✓ #last-data {  
50     height: 100px;  
51     background-color:  #B4B4B4;  
52     padding-top: 10px;  
53 }  
54
```

執行結果



關於我們

關於我們
企業官網
招商專區
人才招聘



特色服務

大宗採購方案
直配內地



客戶服務

訂單/配送進度查詢
取消訂單/退貨
更改配送地址
追蹤清單
12H速達服務
折價券說明



好康大放送

新會員禮包
活動得獎名單

中彰投分署科技股份有限公司 40767台中市西屯區工業區一路100號 電話：04-23592181 免付費電話：0800-777888

企業通過ISO/IEC27001認證，食品業者登錄字號：A-127360000-00000-0

版權所有 copyright © 2017 WDA.com Inc. All Rights Reserved.

練習

- 在網路上尋找一個主題，並整理相關圖片及文字素材。
- 仿製與本次教學內容相同，但不同主題的網站版面。