


Candidate repeat-inference calibration: simulation only

DB / task / repeat IID task / repeat

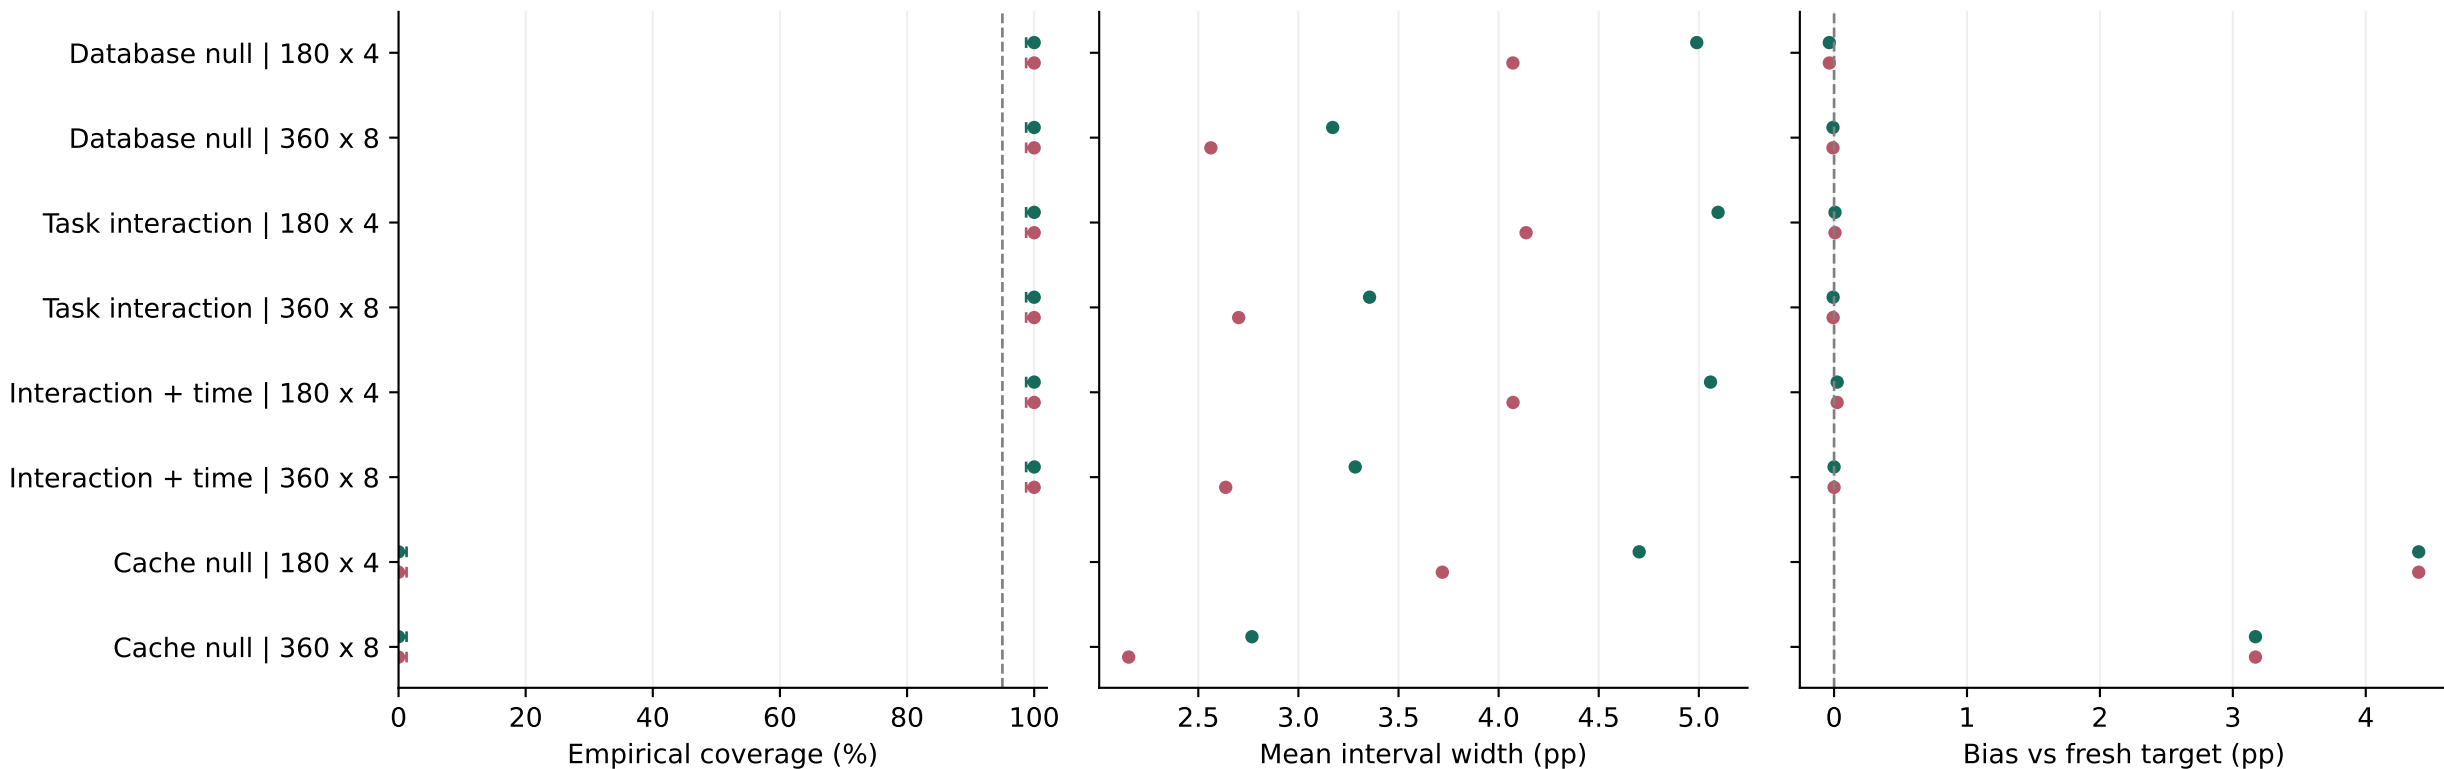

300 simulated datasets/setting; 399 bootstrap draws; 3000 independent reference draws. Coverage bars: 95% Wilson Monte Carlo intervals. Fixed anchors and 9 equal-size databases; finite-repeat fresh-policy target, not stable headroom. No formal-design clearance.