

COMPOSITE API Documentation

Table of Contents

Table of Contents

Introduction 3
UPI 7
Payment 7
Status check under UPI 14
UPI callback 20
IMPS 23
Payment 23
Status check under IMPS 28
NEFT & RTGS 32
Payment 32
Status check for NEFT & RTGS 42
High TPS NEFT payment 48
Payment 48
iNEFT callback 53
Status check 55
Account statement narration 58
Bulk payment 59
Payment 59
Create OTP API 63
Reverse MIS API 65
Request packet for Composite API with fall-back option 67
Composite API process Flow 68
API Name: CIB Registration 69
API Name: Beneficiary Registration 71
Beneficiary Registration through account number & IFSC 71
Beneficiary Registration API through VPA 73
Steps before final Integration 75
ENCRYPTION-DECRYPTION PROCESS 77
For encryption of response at ICICI 78
For decryption of response at Client 78
Steps for Encryption 78
Steps for Decryption 78
Frequently asked questions 79
APPENDIX 90

Table of Contents

Introduction

1. Brief

In today's digital era, numerous E-commerce companies, Payment Gateway Aggregators, NBFCs, and Insurance companies are transitioning towards API-based payment solutions, moving away from manual intervention and complex payment processing methods. In this document, we are introducing the "Composite API" to fulfill all your payment requirements. This comprehensive API encompasses various functionalities, including the ability to check payment status and access beneficiary services APIs for escrow account holding clients. By utilizing this API, customers can enjoy a unified API that integrates all payment modes, eliminating the need for multiple integrations with bank.

The supported payment modes currently include UPI, IMPS, NEFT, and RTGS. The API is designed to accommodate multiple payment modes, allowing for prioritization of specific modes such as IMPS and UPI for immediate payments. Clients have the flexibility to choose any desired mode of payment. The Composite Pay API is hosted on ICICI Bank's API Gateway, which efficiently routes requests to the respective payment mode based on the specified priorities in the payment request. In the context of API Banking, Composite API seamlessly integrate with the client's system, enabling direct transactions from the clients interface itself. Client can avail the transaction status through the status check API, eliminating the need for involvement of the bank's platform.

Several key benefits of incorporating composite API: -

- Implement all payment modes using a single API.
- Time & cost efficient
- 4096-bit hybrid encryption with high security
- Real-time output mechanism
- Availability of service 24 X 7 X 365*
- High TPS support available.
- Configurable beneficiary validation check

Composite API is a future-driven system, which aims to the advancement of the payment system, with modified payment mechanisms. Composite API can be used to for priority based payment modes i.e. UPI, IMPS, NEFT & RTGS**

* NEFT & RTGS services may have some limits

**Composite API can also be used for internal fund transfers through IMPS, NEFT & RTGS.

Table of Contents

To read more about composite API, click here

Refer to the flowchart given below for better understanding of composite API: -

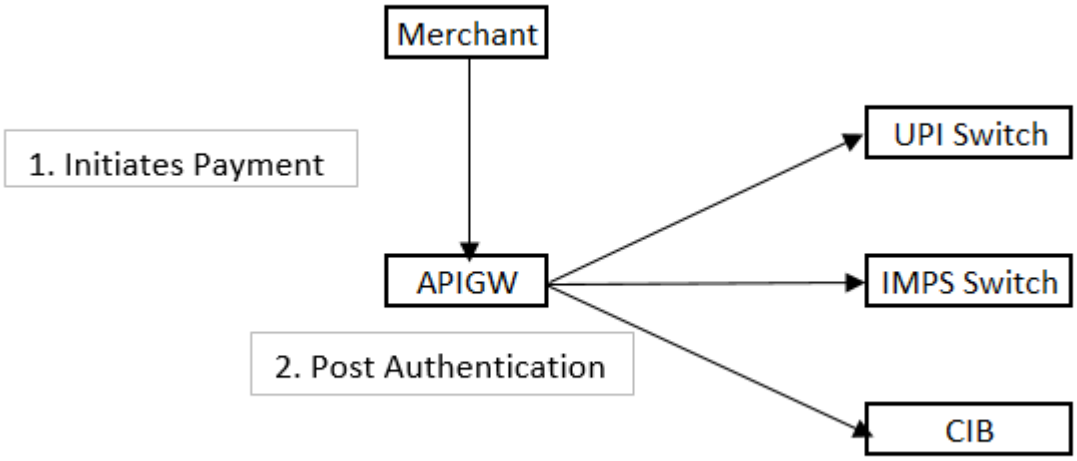


Table of Contents

2. Structure of Payments

1. CIB Registration: This is a mandatory one-time registration API which is required to access the Beneficiary Registration & Validation API, NEFT and RTGS payment mode. CIB (Corporate Internet Banking) is the internal database of ICICI Bank for composite pay API and credentials to process payments for aforementioned services are issued post completion of CIB registration.

2. Beneficiary Registration: This is the first step for clients holding the escrow account. After completing CIB registration, clients should use this API to register beneficiaries in the CIB database. Client receives a unique beneID (beneficiary ID) for every beneficiary registration.

3. Beneficiary Validation: The bene validation service is a part of composite pay API which validates whether the beneficiary mentioned in the payment request is registered in the CIB database or not. If the validation is successful, the transaction is processed through the mentioned payment mode. If the validation fails, the transaction is declined. The client gets an appropriate error code as a response denoting that the beneficiary is not registered, and the transaction request has been declined. Please note, the beneficiary validation leg is mandatory for clients with V2 flow and is optional for clients with V1 flow.

    a. CIB registration API is mandatory for clients who want to access NEFT, RTGS payment modes and beneficiary registration and validation service. Beneficiary registration & Validation is mandatory for PA & Escrow account holding clients. Please refer the section '4. Debits allowed for Escrow account holding clients in this section below.

4. Payments: The payment request through composite API will first land on the ICICI API Gateway (APIGW) from client's system. Based on the priority set by the client, APIGW will route the transaction request to the respective payment mode systems.

5. Reverse Feed: The transaction status will be shared as response within the same API call for IMPS and UPI modes whereas for NEFT and RTGS mode, actual status of the transactions will be available once the transaction batch gets processed. Client is required to fire the status check API and will receive the updated status of the transaction in response.

Please note the payment execution timelines for UPI and IMPS payment modes:

a. For UPI, the final status of the transaction will be available between 300 secs and T+2 days of initiating the transaction.
b. For IMPS, the final status of the transaction will be available between 300 secs and T+2 days of initiating the transaction.
c. The exact time period for availability of transaction status is subjective to purging activity at our end. Hence, it is recommended to resolve the status of back dated transaction within 6 months with ICICI Bank team. Please connect with the ICICI Bank support team before taking any action on back dated transactions.

6. Status Check: If the client does not receive the response of a transaction, they can use the Composite Status Check API of the respective payment mode to fetch the transaction status. Please note, until the terminal status is achieved the client is not supposed to change the transactionID and reinitiate the transaction.

Table of Contents

3. Onboarding

Technical Pre-requisite required from client's end:

1. IP Address: The IP needs to be whitelisted at our end to ensure the security. **Please note that recurring request from a non-whitelisted IP address will result in revocation of the API key

2. 4096 Bits Public Key Certificate: Composite API will follow encryption and decryption mechanism to send and receive request & response from client's end. Every certificate file will have two components, i.e. Public Key certificate & Private Key certificate. Public Key Certificates are used to encrypt, and Private Key certificates are used to decrypt. The client will use ICICI Bank's public key certificate and encrypt the payment request. ICICI Bank will decrypt the payment request using our private key certificate and then process the transaction accordingly as per the payment mode preferred. After the request has been processed, ICICI Bank will encrypt the response using client's public key certificate and post it back. Client will use their corresponding private key certificate to decrypt the response received. These certificate files are available with third party vendors. A self-signed certificate for UAT is acceptable, but for live environment, a CA signed certificate is mandatory.

4. Debits allowed for Escrow account holding clients:

Below debits are allowed in the escrow account: -

- Payment to various merchants / service providers.
- Payment to any other account on specific directions from the client.
- Transfer representing refunds for failed / disputed transactions.
- Payment of commission to the intermediaries. This amount shall be at pre-determined rates / frequency.
- Payment of amount received under promotional activities, incentives, cashbacks etc.

Beneficiary Registration and Validation is a mandatory when the client wants to use the V2 (Composite API version 2) flow. Clients must include only the beneficiaries registered using beneficiary registration API in the composite API payment request. The payment request will be processed after successful beneficiary validation.

5. Daily transaction MIS:

Daily transaction MIS will be made available on the API developer portal on T+1. (https://developer.icicibank.com). Client is required to register on the API developer portal and share the User ID with ICICI Bank's business team.

Clients will be able to download day-wise transaction MIS for the last 30 days.

Path: - Home Page > Account > MIS Download

6. Reconciliation expectation from Clients' end

Client should reconcile their Bank statement and Composite pay API responses on T+1 day and any discrepancies should be highlighted to the bank latest by T+2.

Table of Contents

UPI

Unified Payment Interface is an instant real-time payment system, which facilitates inter-bank, peer-to-peer, and person-to-merchant transactions.

Payment

Endpoints (URL)

UAT V1 Flow[1]– https://apibankingonesandbox.icicibank.com/api/v1/composite-payment

UAT V2 Flow[2] - https://apibankingonesandbox.icicibank.com/api/v2/composite-payment

LIVE V1 Flow– https://apibankingone.icicibank.com/api/v1/composite-payment


LIVE V2 Flow - https://apibankingone.icicibank.com/api/v2/composite-payment

Transaction limit: -

Transaction [24*7]	Amount (per transaction)
Minimum	INR.1
Maximum	INR.1,00,000

Note - For certain remitter MCC's, maximum limit is 2 Lakhs. Please refer FAQs for the same.

UPI: Process flow diagram: -

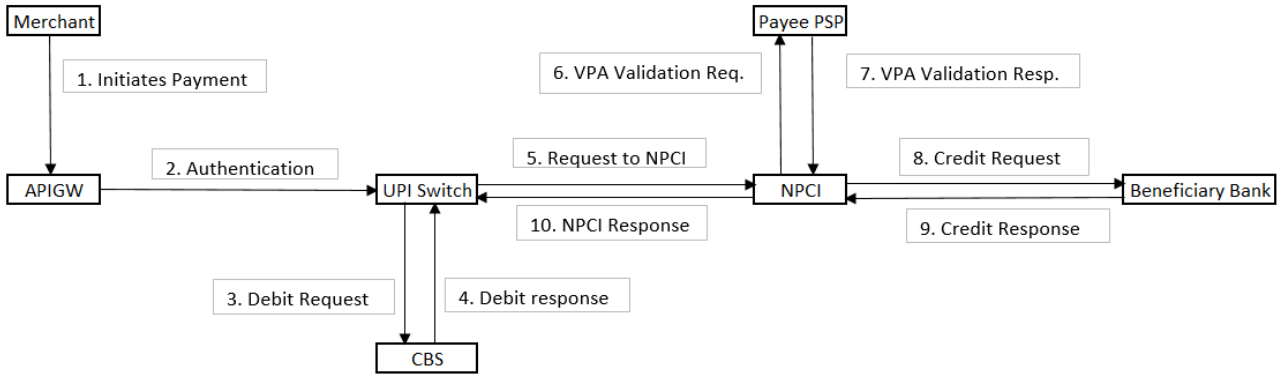

1. V1 Flow – V1 flow should be used by current account holding clients.
2. V2 Flow – V2 flow should be used by the Payment aggregators and escrow account-holding clients based on the use case. Beneficiary registration is mandatory for the clients with V2 flow irrespective of payment mode.

Table of Contents

Input parameters

Header			
Input Parameter	Description	Provided by ICICI	Mandatory value
apikey	API key is a unique value generated for each client. API Key will be provided to the client during onboarding and same needs to be used for all further transactions. Client must ensure that requests are being sent from whitelisted IP's only.	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. FOR UPI, x priority = "1000"	Yes	Mandatory

Body			
Input parameter & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
Device-ID [String (255)]	This is a Unique device Token, which should be unique per channel user. This will be created during registration, and it will be provided to the client by ICICI Bank.	Yes	Mandatory
Mobile Number [String (10)]	Mobile Number of the remitter. Mobile number provided during onboarding should be used.	Yes	Mandatory
profile-id [String (10)]	Profile ID is created during onboarding, and it will be shared with the client.	Yes	Mandatory
seq-no [String (35)]	Unique random sequence number needs to be generated by client starting with ICI of length 35 and without any special character. Clients should keep the sequence number handy to check the transaction status.	No	Mandatory
account-number	Account number of the remitter / sender	No	Conditional

Table of Contents

[Number (35)]			
account-provider	Value of “74” needs to be passed.	Yes	Mandatory
account-type [String (20)]	Account type of the sender to be passed	Yes	Optional
payee-va [String (255)]	Beneficiary VPA to be passed in this field. For payment to account number and IFSC, VPA format is: <Account number>@<IFSC code>.ifsc.npci VPA format for credit card bill payments*: a. ICICI Bank: ccpay.<credit card number>@icici b. Axis Bank: cc.91<registered mobile number><last 4 digits of credit card>@axisbank	No	Mandatory
payer-va [String (255)]	Sender (remitter) VPA to be passed in this field.	No	Mandatory
amount [Number (14)]	Total transaction amount Example: - 15,000.00 [the amount must have value until two decimals]	No	Mandatory
remarks [String (50)]	Transaction remarks, these details will be sent to NPCI. “remarks” field will be reflected in the bank statement also. This should not contain any special character.	No	Mandatory
mcc [Number (4)]	The Payer MCC code should be passed in this field. MCC [Merchant Category Code] refers to the four-digit number used by NPCI to categorize the businesses. MCC will be shared by ICICI Bank during onboarding.	Yes	Mandatory
crpID [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM. [mandatory only for BNF ID flow]	Yes	Conditional (Mandatory for BNF ID flow)

Table of Contents

userID [String (32)]	Corporate User ID of the client. User Id of the client. This will be provided during onboarding. Please check with the RM. [mandatory only for BNF ID flow]	Yes	Conditional (Mandatory for BNF ID flow)
aggrID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM. [mandatory only for BNF ID flow]	Yes	Conditional (Mandatory for BNF ID flow)
urn [String (40)]	Same as passed in CIB registration request. [mandatory only for BNF ID flow]	No	Conditional (Mandatory for BNF ID flow)
vpa [String (255)]	Should be same as Payee 'VPA".	No	Conditional (Mandatory for BNF ID flow field)
initiation-mode [Number (02)]	Initiation mode 00=Default, 01=QR Code, 02= Secure QR Code, 03=Bharat QR Code, 04=intent, 05=Secure Intent, 06=NFC, 07=BLE(Bluetooth), 08=UHF (Ultra High Frequency), 09=Aadhaar, 10=SDK, 11=UPI-Mandate, 12=FIR(Foreign Inward Remittance), 13=QR Mandate, 14=BBPS	Yes	Conditional
Purpose [Number (02)]	The purpose field is used especially for SEBI txn Purpose code 00 – Normal Transaction 01 – One Time Mandate 02 – AMC 03 – Travel 04 – Hospitality 05 – Hospital 06 – Telecom 07 – Insurance 08 – Education 09 – Gifting 10 – BBPS 11 – Global UPI 12 – Metro ATM QR 13 – Non-metro ATM QR 14 – SI 15 – Corporate disbursement 16 – UPI Lite (Financial Transaction) 17 – P2P e-rUPI 18 – Govt B2C e-RUPI	Yes	Conditional (Mandatory for B2B transactions)

Table of Contents

	19 – Private B2C e-RUPI 20 – B2B 21 – FIR 25 – RDS			
ref-id [String (35)]	Reference number Mandatory for making credit card and QR payments. 'Seq-no' can be passed in 'ref-id' field for CC payouts and QR code payouts. Ref-id should be fetched from the QR wherever it is available in the QR.	Yes	Conditional	
payee-mcc [Number][4]	If payout is being done to a merchant, the MCC of the beneficiary needs to be passed. 'payee-mcc' can be fetched from the QR.	No	Optional	
payee-name [String (100)]	Beneficiary Name	No	Optional	
bnfId [String (100)]	Beneficiary ID. If client wants to use beneficiary ID flow, "bnfId" needs to be passed in request packet.	Yes	Optional	
capability	"520000000000000<6-digit PIN code><10 digit registered mobile number> "; Please note that input value ends with a cushion of 10 spaces	No	Optional	

A Sample request packet for UPI Transaction	
Header	apikey = '----------' x-priority = '1000'
Body	{ "device-id": "40043840043840043840043840", "mobile": "7988000014", "profile-id": "2996304", "seq-no": "ICI20240113158425", "account-provider": "74", "payee-va": "pratikm1@icici", "payer-va": "uattesting0014@icici", "amount": "3.00", "remarks": "UPIPayment", "mcc": "6011",

Table of Contents

	"vpa": "pratikm1@icici", "payee-name": "PratikMundhe", "payee-mcc": "6011", "crpID": "", "aggrID": "", "userID": "", "account-type": "", "account-number": "", "urn": "", "global-address-type": "", "payee-account": "", "payee-IFSC": "", "initiation-mode": "", "purpose": "", "ref-id": "", "currency": "", “capability”:” 52000000000000040006392929292 ” }

A Sample request packet for UPI Transaction with beneficiary ID flow	
Header	apikey = ‘----------' x-priority = ’1000’

Body	{
	"mobile": "7988000014",
	"device-id": "400438400438400438400438",
	"seq-no": "ICI202310191100",
	"account-provider": "10",
	"payee-va": "",
	"payer-va": "uattesting0014@icici",
	"profile-id": "2996304",
	"amount": "4.68",
	"mcc": "6011",
	"remarks": "SATYANARAYAN M",
	"crpID": "PRACHICIB1",
	"aggrID": "CUST0663",
	"userID": "USER3",
	"urn": "3kCy4sPuSqDNi4kggXJIoE568223",
	"aggrName": "CRED",
	"ref-id": "ICI20231017110908",
	"bnfId": "3829",
	“capability”:” 52000000000000040006392929292 ”
	}

Above request packets can be directly used for UAT (User Acceptance Test) testing purpose.

Table of Contents

*According to RBI guidelines, clients cannot store customer card details. VPA for CC bill payments can be input only if customer provides credit card number during each login. Else, bnfID must be used for store details and make credit card bill payments.

Output parameters

Output parameters & type	Description
Success [Boolean]	This value of the output refers to the status of the transaction API call – success (true) /failure (false)
Response [Number]	Response code denoting the status of the transaction
Message [String]	Transactions status message explaining reason for success, failure or pendency
BankRRN [Number]	It is a unique 12-digit number used to refer a particular transaction.
UpiTranlogId [String]	Internal ID generated at UPI Switch.
UserProfile [String]	Denotes profile ID of the user
SeqNo [Number]	seq-no of the transaction will be echoed back from the request.
MobileAppData [JSON]	MobileAppData value will be Json based “STRING" (JSON – Stringified JSON.)
PayerRespCode	This is the response code populated by the Payer. For successful transactions or for transactions with no issue at the Payer side, this field will be blank
PayeeRespCode	This is the response code populated by the Payee. For successful transactions or for transactions with no issue at the Payee side, this field will be blank
PayeeRevRespCode	This is the response code populated by the Payee at the time of credit reversal. For all other cases, this will be blank.
PayerRevRespCode	This is the response code populated by the Payer at the time of debit reversal. For all other cases, this will be blank.

Sample response packet for UPI transaction	
Success	Failure
{ "success": true, "response": "0", "message": "Transaction Successful",	{ "success": true, "response": "36", "message": "Virtual address not present",

Table of Contents

"BankRRN": "401300351403", "UpiTranlogId": "89375142", "UserProfile": "2996304", "SeqNo": "ICI20240113158425", "MobileAppData": "SUCCESS", "PayerRespCode": "00", "PayeeRespCode": "00", "PayerRevRespCode": "", "PayeeRevRespCode": "" }	"BankRRN": "318700204265", "UpiTranlogId": "88282914", "UserProfile": "2996304", "SeqNo": "ICI202307061838", "MobileAppData": "", "PayerRespCode": "", "PayeeRespCode": "", "PayerRevRespCode": "", "PayeeRevRespCode": "" }

Response packet of Gateway Failure

{
"success":false,
"errorCode":"997",
"description":"Note : Initaite Status check after Some time"
}

Status check under UPI

End points (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/v1/composite-status

LIVE– https://apibankingone.icicibank.com/api/v1/composite-status

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client. Client must ensure that requests are being sent from whitelisted IP's only.	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. FOR UPI, x-priority = "1000"	Yes	Mandatory

Table of Contents

Body		
Input parameter & type (maximum character)	Description	Mandatory value
device-id [String (255)]	This is a Unique device Token, which should be unique per channel user. This will be created during registration, and it will be provided to the client by ICICI Bank.	Mandatory
mobile [Number (10)]	Mobile Number of the client (Sender).	Mandatory
seq-no [String (35)]	Unique random sequence number needs to be generated by client starting with ICI of length 35 and without any special character. This must be unique for each status check request	Mandatory
channel-code [String (15)]	Value of "MICICI" needs to be passed.	Optional
profile-id [String (10)]	Profile ID gets created during onboarding and same will be shared to the client.	Mandatory
ori-seq-no [String (35)]	Seq No of the original transaction for which the status needs to be checked.	Mandatory
date [String (10)]	Date when the transaction was initiated in the format MM/DD/YYYY	Mandatory
recon360 [String (1)]	Fixed value "Y" or "N" For Value "N," API will be routed to status API, and fetch the status available at NPCI. For value "Y," API will be routed to Recon 360 to get the status of "Deemed approved" or pending transactions. Pass this field as "N" for normal status check enquiry and "Y" for recon 360.	Mandatory

Table of Contents

A Sample request packet for UPI status check	
UPI status enquiry	UPI Recon Status enquiry

{
"date": "13/01/2024",
"recon360": "N",
"seq-no": "ICI20240311314521",
"channel-code": "MICICI",
"ori-seq-no": "ICI20240113158425",
"mobile": "7988000014",
"profile-id": "2996304",
"device-id": "400438400438400438400438"
}
	{
	"date": "07/0/2023",
	"recon360": "Y",
	"seq-no": "ICIAJRSkumar565",
	"channel-code": "MICICI",
	"ori-seq-no": "ICIAJRSkumar52",
	"mobile": "7988000014",
	"profile-id": "2996304",
	"device-id": "400438400438400438400438"
	}

Output parameters

Output parameter & type	Description
UPI status check API response	
Success [String]	Denotes whether the status check request has been successfully processed or not.
Response [Number]	This value refers to the code corresponding to the response of the status check request
Message [String]	Response code description
BankRRN [Number]	The Bank reference number of the status check request & not of the original transaction.
UpiTranlogId [String]	The Transaction ID generated by Switch for status check request.
UserProfile [String]	Profile Id of the user.
MobileAppData [JSON]	These filed provides the details of the transaction for which status check is being done.

Table of Contents

	"original-txn-response-code" from the “Mobile App data” contains the updated status of the transaction. "original-txn-rrn" reflects the original transaction RRN. Note: - Client should first check the "response" parameter for "0" and "message" parameter for "Transaction Successful." In status check API to make sure that status check request is successful. Post that, "original-txn-response-code" and "original-txn-message" to be referred from “MobileAppData” for status of original transaction.
SeqNo.[String]	Seq-no of the original transaction will be echoed back from the status check request packet
PayerRespCode	This is the response code populated by the Payer. For successful transactions or for transactions with no issue at the Payer side, this field will be blank
PayeeRespCode	This is the response code populated by the Payee. For successful transactions or for transactions with no issue at the Payee side, this field will be blank
PayeeRevRespCode	This is the response code populated by the Payee at the time of credit reversal. For all other cases, this will be blank.
PayerRevRespCode	This is the response code populated by the Payer at the time of debit reversal. For all other cases, this will be blank.
Recon 360 API response	
PayeeAccount [Numeric]	Beneficiary account number
TransactionType [Alphanumeric]	Default value as PAY for UPI payouts
PayeeIFSC [Alphanumeric]	Beneficiary IFSC
OriginatingChannel [Alphanumeric]	Default value “ UPI.NPCI”
OriginalTransactionStatus [Alphanumeric]	Status received during transaction API / status check API whichever is recently updated.
PayeeName [Alphanumeric]	Payee (Beneficiary) name
PayerIFSC [Alphanumeric]	Payer (Remitter) IFSC
PayerName [Alphanumeric]	Payer (Remitter) name
PayerVPA [Alphanumeric]	Payer (Remitter) VPA
MerchantID [Alphanumeric]	Merchant (Remitter) ID

Table of Contents

PayeeVPA [Alphanumeric]	Payee (Beneficiary) VPA
RRN [Numeric]	RRN of original transaction
TransactionAmount [Numeric]	Transaction Amount
PayerAccountNumber [Numeric]	Payer (remitter) Account Number
DateTimeStatusChange [Alphanumeric]	Date and Time of transaction status Change
CurrentTransactionStatus [Alphanumeric]	Current Transaction Status i.e the updated status of the Original transaction Success responses: Credit confirmation received, Success, Completed Failure response: Failed, Returned received, Customer Reversed Pending response: Deemed approved, Suspect, Timeout, Initiated OriginalTransactionStatus needs to be referred if the CurrentTransactionStatus field is blank
SequenceNumber [Alphanumeric]	Original transaction sequence number
IRC[Numeric]	Internal response code
DisplayMessage [Alphanumeric]	Display Message on API call. Display message is fetched form SWITCH table in 360, its show the status of the transaction like (Success, Failed, Technical Error etc) and numeric digit means “Approval number”.
OriginalTransactionDateTime [Alphanumeric]	Original Transaction Date and Time

Table of Contents

A Sample response packet for UPI status check	
Success	Failure

<pre>{
"success": true,
"response": "0",
"message": "Transaction Successful",
"BankRRN": "401300351403",
"UpiTranlogId": "346909262",
"UserProfile": "2996304",
"SeqNo": "ICI20240311314521",
"MobileAppData": {
"payee-vpa": "pratikm1@icici",
"payer-ifsc": "ICIC0DC0099",
"payer-account": "000405011452",
"original-txn-rrn": 401300351403,
"npci-resp-code": "",
"payer-remarks": "UPIPayment",
"original-txn-response-code": 0,
"original-txn-message": "SUCCESS",
"payer-account-type": ""
},
"PayerRespCode": "00",
"PayeeRespCode": "00",
"PayerRevRespCode": "",
"PayeeRevRespCode": ""
}</pre>
	<pre>{
	"success": true,
	"response": "15",
	"message": "original record not found",
	"BankRRN": "318724925198",
	"UpiTranlogId": "324925198",
	"UserProfile": "2996304",
	"SeqNo": "ICI202307051951078",
	"MobileAppData": "",
	"PayerRespCode": "",
	"PayeeRespCode": "",
	"PayerRevRespCode": "",
	"PayeeRevRespCode": ""
	}</pre>

A Sample response packet for UPI Recon status check	
Success	Failure
<pre>{ "PayeeAccount": "XXXXXXXX0151", "TransactionType": "PAY",</pre>	<pre>{ "PayeeAccount": "XXXXXXXX0151", "TransactionType": "PAY",</pre>

Table of Contents

"PayeeIFSC": "ICIC0DC0099", "OriginatingChannel": "MICICI", "OriginalTransactionStatus": "Success", "PayeeName": "PratikMundhe", "PayerIFSC": "", "PayerName": "UATTEST", "PayerVPA": "uattesting0014@icici", "MerchantID": "ICI20230705200300", "PayeeVPA": "pratikm1@icici", "RRN": "318600203972", "TransactionAmount": "3.5", "PayerAccountNumber": "XXXXXXXX1452", "DateTimeStatusChange": "", "CurrentTransactionStatus": "", "SequenceNumber": "ICI20230705200300", "IRC": "0000", "DisplayMessage": "Success. 280464", "OriginalTransactionDateTime": "2023-07-05 20:03:33.0" }	"PayeeIFSC": "ICIC0DC0099", "OriginatingChannel": "MICICI", "OriginalTransactionStatus": "Failed", "PayeeName": "PratikMundhe", "PayerIFSC": "", "PayerName": "UATTEST", "PayerVPA": "uattesting0014@icici", "MerchantID": "ICIAJHB762", "PayeeVPA": "pratikm1@icici", "RRN": "317100148049", "TransactionAmount": "6", "PayerAccountNumber": "XXXXXXXX1452", "DateTimeStatusChange": "", "CurrentTransactionStatus": "", "SequenceNumber": "ICIAJHB762", "IRC": "0000", "DisplayMessage": "Success. 826268", "OriginalTransactionDateTime": "2023-06-20 22:50:08.0" }

UPI callback

Additional information for Response packet
• Client has to pass the “N” value in the recon360 tag to get the UPI transaction status response and for Recon360 the value to be passed is “Y”
• Client will receive two different responses for status and Recon360.
• Recon360 API should be used on T+2 for pending cases post using the status API.
• Last 5 days' transaction status will be present over UPI status inquiry at any point in time.
• In case of transaction not found in recon 360 status check, client will receive a {null} response (plain text) in the same format as of Recon360 status check.
• Status check must be initiated after 300 seconds of original transaction.

Client can avail the callback for UPI transactions. Client needs to provide URL on which callbacks need to be sent. Please get in touch with your RM for more details.

Table of Contents

Clients can receive the callback for the below cases:

1. Successful transaction completion
2. Outside ICICI Bank failures
3. Transaction response from NPCI when there is a timeout at Beneficiary Bank (Deemed Approved transactions*)
4. Transactions being updated through NPCI UDIR system for Deemed Approved Transactions. This can happen 60 mins/120 mins/180 mins after the transaction initiation.

*When NPCI is not getting a transaction response from the Beneficiary bank, NPCI send the Act code of "BT"/"91" (Beneficiary timeout). This is a non-terminal status and needs to be kept as pending by the merchant.

Process flow post UPI callback integration:

1. If callback with terminal status is not received within 300 seconds of transaction initiation
    a. Status check can be initiated to get the status of the transaction.
2. If callback with terminal status is received within 300 seconds of transaction initiation
    a. The handling of the transaction to be done as per the handling of the respective response code
    b. If the transaction is in Deemed Approved state, then callbacks can be expected after 60 minutes, 120 minutes & 180 minutes after the transaction.
        i. If callback with updated status is not received even after 185 minutes, UPI recon360 status check to be done on T+2.
3. If callback is received within TAT but the terminal status is not available and status received is not "BT"
    a. Status check to be retried after 5 minutes. If still terminal status is not being received, status check to be retried at increasing intervals and handling to be done as per the error code document.

Output parameters.

Output value	Description
subMerchantId	Merchant Identifier
ResponseCode	Response Code denoting status of the transaction
PayerMobile	Mobile number of Remitter
TxnCompletionDate	Transaction completion Date
terminalId	MCC Code of Remitter
PayerName	Payer Name

Table of Contents

PayeeVPA	Payee VPA
PayerAmount	Amount
PayerVA	Payer VPA
BankRRN	Transaction RRN
merchantId	Merchant Identifier
TxnInitDate	Transaction Initiation Date
TxnStatus	Transaction Status
merchantTranId	Merchant Identifier
PayeeRespCode	Payee Response Code
PayerRespCode	Payer Response Code
PayeeRevRespCode	Payee Reversal Response Code
PayerRevRespCode	Payer Reversal Response Code

Sample response for UPI callback	
Success	Failure
{ "subMerchantId": "7891", "ResponseCode": "00", "PayerMobile": "9447540472", "TxnCompletionDate": "20220928114233", "terminalId": "0000", "PayerName": "R VINOD KUMAR", "PayeeVPA": "testo25@icici", "PayerAmount": "10.0", "PayerVA": "reuben14@icici", "BankRRN": "227100368286", "merchantId": "7891", "TxnInitDate": "20220928114231", "TxnStatus": "SUCCESS", "seq-no": "ICIo01dmii28apdh9kc37d7", "PayeeResponseCode": "00",	{ "subMerchantId": "7891", "ResponseCode": "U29", "PayerMobile": "9447540472", "TxnCompletionDate": "20221104152003", "terminalId": "6011", "PayerName": "R VINOD KUMAR", "PayeeVPA": "saaho@icici", "PayerAmount": "5.0", "PayerVA": "reuben14@icici", "BankRRN": "230800577380", "merchantId": "7891", "TxnInitDate": "20221104152002", "TxnStatus": "REJECT", "seq-no": "ICI20220818030698", "PayeeResponseCode": "ZH",

Table of Contents

"PayerResponseCode": "00", "PayeeRevResponseCode": "{}", "PayerRevResponseCode": "{}", }	"PayerResponseCode": "00", "PayeeRevResponseCode": "{}", "PayerRevResponseCode": "{}", }

Instructions for UPI callback:

- The transaction status needs to be consumed by referring to the "ResponseCode" tag in the callback.
- The response codes need to be handled as per the existing handling of Response codes in the transaction response.
- An additional response code of "501" can be expected in the callback for which the transactions can be marked as failed.
- If a different response is received than what is mapped as per the current composite Error code document, transaction should be marked as PENDING and the same needs to be highlighted to the bank.

IMPS

Immediate Payment Service [IMPS] is a service which allows fund transfers within banks across India, in a cost & time efficient manner. IMPS is supported for >700 financial institutions in India.

Payment

Endpoints (URL)

UAT V1 Flow[1]– https://apibankingonesandbox.icicibank.com/api/v1/composite-payment

UATV2 Flow[2] https://apibankingonesandbox.icicibank.com/api/v2/composite-payment

LIVE V1 Flow– https://apibankingone.icicibank.com/api/v1/composite-payment


LIVE V2 Flow - https://apibankingone.icicibank.com/api/v2/composite-payment

Transactional limit: -

Transaction [24*7]	Amount (per transaction)
Minimum	Rs.1
Maximum	Rs.5,00,000

Table of Contents

IMPS: - Process flow diagram

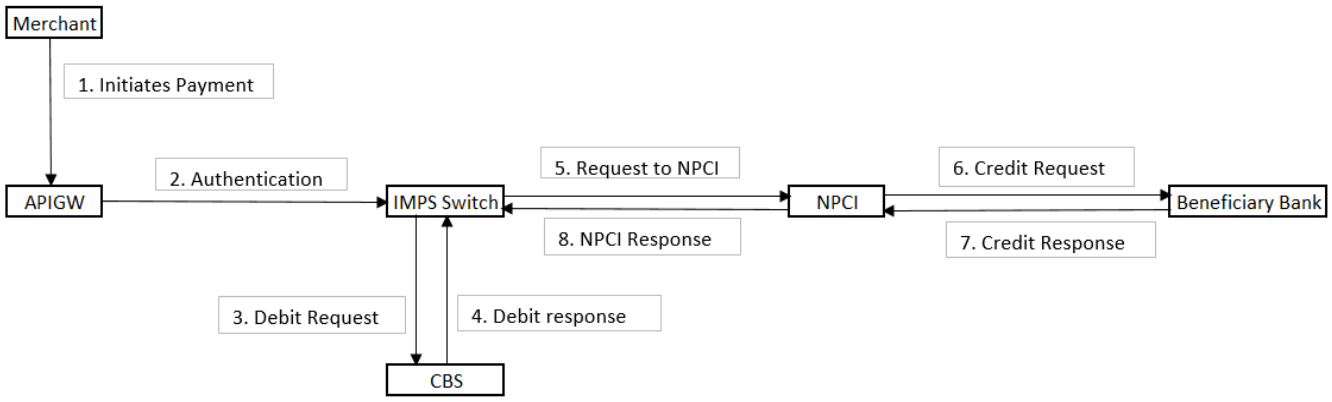

1. V1 Flow – V1 flow should be used by current account holding clients.
2. V2 Flow – V2 flow should be used by the Payment aggregators and escrow account-holding clients based on the use case. Beneficiary registration is mandatory for the clients with V2 flow irrespective of payment mode.

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client. API Key will be provided to the client during onboarding and same needs to be used for all further transactions. Client must ensure that requests are being sent from whitelisted IP's only.	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. FOR IMPS, x-priority = "0100"	Yes	Mandatory

Table of Contents

Body			
Input parameter & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
localTxnDtTime [String (16)]	Transaction Date & Time (YYYYMMDDHHmmss)	No	Optional
beneAccNo [String (35)]	Beneficiary Account Number	No	Mandatory
beneIFSC [String (11)]	Beneficiary IFSC	No	Mandatory
amount [Number (14)]	Transaction amount	No	Mandatory
tranRefNo [String (50)]	Transaction Reference Number that uniquely identifies the transaction. Unique number should be entered by the client.	No	Mandatory
paymentRef [String (50)]	Transaction remarks, these details will be sent to NPCI. Remarks mentioned here will be reflected in the bank statement also.	No	Mandatory
senderName [String (100)]	Remitter's Name as per account title.	No	Mandatory
mobile [Number (10)]	Remitter's Mobile number	No	Mandatory
retailerCode [String (20)]	Value of "rcode" to be passed	Yes	Mandatory
passCode [String]	PassCode gets generated through IMPS and provided by ICICI Bank during onboarding.	Yes	Mandatory
bcID [String]	Client BCID. This will be provided by ICICI Bank during onboarding.	Yes	Mandatory
crpId [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM. (Mandatory for BNF ID flow)	Yes	Conditional
crpUsr [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM.	Yes	Conditional

Table of Contents

	(Mandatory for BNF ID flow)		
aggrId [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM. (Mandatory for BNF ID flow)	Yes	Conditional
bnfId [String (100)]	Beneficiary ID. If client wants to use beneficiary ID flow, “bnfId” needs to be passed in request packet.	Yes	Optional

A Sample request packet for IMPS transaction	
Header	apikey = ‘----------' x-priority = ’0100’

Body	{
	"localTxnDtTime": "20240113181900",
	"beneAccNo": "123456041",
	"beneIFSC": "NPCI0000001",
	"amount": "1.00",
	"tranRefNo": "IMPSTesting01",
	"paymentRef": "IMPSTransferP2A",
	"senderName": "Pratik Mundhe",
	"mobile": "9999988888",
	"retailerCode": "rcode",
	"passCode": "447c4524c9074b8c97e3a3c40ca7458d",
	"bcID": "IBCKer00055",
	"aggrId": "",
	"crpId": "",
	"crpUsr": ""
	}

A Sample request packet for IMPS transaction with beneficiary ID flow	
Header	apikey = ‘----------' x-priority = ’0100’
Body	{ "localTxnDtTime": "20231019151100", "beneAccNo": "", "beneIFSC": "NPCI0000001", "amount": "3", "tranRefNo": "ICI20231019151100",

Table of Contents

	"paymentRef": "FTTransferP2A", "senderName": "Pratik", "mobile": "9999988888", "retailerCode": "rcode", "passCode": "447c4524c9074b8c97e3a3c40ca7458d", "bcID": "IBCKer00055", "crpId": "PRACHICIB1", "crpUsr": "USER3", "aggrId": "CUST0663", "bnfId": "56089765", "urn": "3kCy4sPuSqDNi4kggXJloE568223", "aggrName": "CRED" }

* Above request packet can be directly used for UAT (User Acceptance Testing) testing purpose.

Output parameters.

Output parameter & type	Description
Response [String (55)]	ActCode Description explains the reason for success, failure or pendency of the transaction
ActCode [String (3)]	ActCode Value denoting the status of the transaction
TranRefNo [String]	Transaction reference number as mentioned in the request. Reference number is required for performing further status check requests.
BankRRN [Number]	It is a unique 12-digit number used to refer a particular transaction
BeneName [String (20)]	Beneficiary Name
Success	This value of the output refers to the status of the transaction API call – success (true) /failure (false

A Sample response packet for IMPS transaction	
Success	Failure
{ "ActCode": "0", "Response": "Transaction Successful", "BankRRN": "401319578626", "BeneName": "kiran", "success": true, "TransRefNo": "IMPSTesting01"	{ "ActCode": "18", "Response": "NPCI/Issuing bank is not connected or down", "BankRRN": "401319578623", "BeneName": "", "success": true,

Table of Contents

}	"TransRefNo": "IMPSTesting01" }

Response packet of Gateway Failure

{
"success":false,
"errorCode":"997",
"description":"Note : Initaite Status check after Some time"
}

Status check under IMPS

End points (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/v1/composite-status

LIVE – https://apibankingone.icicibank.com/api/v1/composite-status

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client. Client must ensure that requests are being sent from whitelisted IP's only.	Yes	Mandatory
x-priority	This value states the priority order for the payment mode. FOR IMPS, x-priority = "0100"	Yes	Mandatory

Body		
Input parameter & type	Description	Mandatory value
transRefNo [String (35)]	Transaction Reference Number of the original transaction for which status check is being done.	Mandatory

Table of Contents

Passcode [String]	PassCode been generated by IMPS & will be provided to the client during onboarding.	Mandatory
bcID [String]	Client's BCID. BCID will be provided to the client during onboarding.	Mandatory
date [Date (MM/DD/YYYY)]	Date of the transaction initiated.	Mandatory
Channel-code [Alphanumeric (2)]	Channel code. For IMPS status check request, value should be "BC".	Conditional
recon360 [String (1)]	Value of "N" to be passed.	Mandatary

A Sample request packet for IMPS status check
IMPS Status enquiry request packet

{
"transRefNo": "IMPSTesting01",
"date": "07/05/2023",
"recon360": "N",
"passCode": "447c4524c9074b8c97e3a3c40ca7458d",
"bcID": "IBCKer00055"
}

Additional Information regarding Status check API
• Last 30 days transaction status will be present over IMPS status inquiry at any point in time.
• Status check must be done after 300 seconds of original transaction.

Output parameters

Output value & type (maximum character)	Description
IMPS status API response	
ActCode[Number]	Response code of the original transaction. Response code "0" indicates successful transaction.

Table of Contents

Response [String]	Original transaction Response message
BankRRN [Number]	Bank reference number of the original transaction
BeneName[String]	Beneficiary Name
TranRefNo[Number]	Transaction reference number of the original transaction
PaymentRef [String]	Payment remarks sent in original transaction.
TranDateTime [Date]	Transaction Date and time
Amount [Number]	Transaction amount
BeneMMID [Number]	Beneficiary MMID
BeneMobile[Number]	Beneficiary Mobile Number
BeneAccNo [Number]	Beneficiary Account Number
BeneIFSC [String]	Beneficiary IFSC
RemMobile[Number]	Remitter's Mobile Number
RemName [String]	Remitter's Name
RetailerCode [String]	Retailer Code sent by the client in transaction request.
CheckStatusCode	Represents the status of status check request. The value in "CheckStatusCode" tag would be 0 in case of successful status check enquiry & value will be non-zero in case of failure reflecting corresponding response code.
CheckStatusMessage	Description/interpretation of CheckStatusCode.

Note: If CheckStatusCode is anything other than 0, ActCode tag must be ignored. Client should read the ActCode tag only if value in CheckStatusCode is 0 else discard the response and continue to maintain pending status of the transaction & perform the status enquiry again as per description provided in "CheckStatusMessage". If the CheckStatusCode value is 17 or 100, client shall handle according to the instructions provided in the error code document.

A Sample response packet for IMPS status check	
IMPS Status enquiry success response packet	IMPS status enquiry failure response packet

{
"ImpsResponse": {
"CheckStatusCode": "0",
"CheckStatusMessage": "Check Transaction Successful",
"ActCode": "0",
	{
	"ImpsResponse": {
	"CheckStatusCode": "61",
	"CheckStatusMessage": "Unknown",
	"ActCode": "",
	"Response": "",
	"BankRRN": "327817407189",

Table of Contents

```
        "Response": "BC Outward transaction Successful",
        "BankRRN": "406511652988",
        "BeneName": "Kiran Kumar",
        "TranRefNo": "IMPStrans1",
        "PaymentRef": "FTTransferP2A",
        "TranDateTime": "05-03-2024 11:23:25",
        "Amount": "1",
        "BeneMMID": "1111001",
        "BeneMobile": "",
        "BeneAccNo": "123456041",
        "BeneIFSC": "NPCI0000001",
        "RemMobile": "9999988888",
        "RemName": "RemitterCustomersudbeerjnjhsdfdfsdnfda",
        "RetailerCode": "rcode"
    }
}
```

```
"BeneName": "",
 "TranRefNo": "ICI6023d3f6-b1a2-47ea-8f1c-03bea8eae57f",
 "PaymentRef": "Test Transaction",
 "TranDateTime": "05-10-2023 17:31:51",
"Amount": "1",
 "BeneMMID": "1111001",
 "BeneMobile": "",
 "BeneAccNo": "123456041",
 "BeneIFSC": "NPCI0000001",
 "RemMobile": "9999988888",
 "RemName": "Foo",
 "RetailerCode": "rcode"
 }
}
```


Table of Contents


NEFT & RTGS

Payment

NEFT is an electronic payment system developed by RBI, to facilitate the transfer of funds by customers from one bank to another bank in India. It is a secured, dependable, and efficient system of funds transfer between banks.

RTGS is a fund transfer method used to make transfers between two domestic banks on a real-time or gross basis.

NEFT – RTGS - Process flow diagram

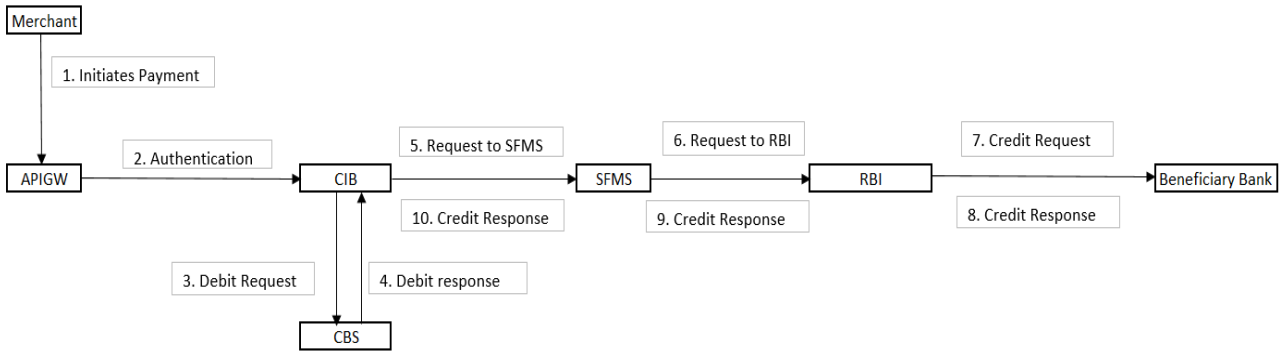

Note: - 8,9,10 is on deferred basis for NEFT.

Transactional limit: -

Transaction Type – NEFT/RTGS	Maximum cumulative limit per day	Transaction count
Working Day	No maximum limit	No maximum limit
Non-Working Day	Rs 10,00,000 for NEFT Rs. 1,00,00,000 for RTGS	No maximum limit

	Limits	1:00 AM – 7:00 PM	7PM - 1AM of next working day (post cut off hrs)	2nd & 4th Saturday, Sunday & Holidays (Clubbed)
NEFT	Cumulative amount	Existing Workflow limit mapped to Corporate	Maximum 10 Lakh	Maximum 10 Lakh
	Number of transactions	NA	NA	NA

Table of Contents

RTGS	Limits	1:00 AM – 7:00 PM	7PM - 1AM of next working day (post cut off hrs)	2nd & 4th Saturday, Sunday & Holidays (Clubbed)
	Cumulative Amount	Existing Workflow limit mapped to Corporate	Maximum 1 Crore	Maximum 1 Crore
	Number of transactions	NA	NA	NA

Note: -

1. ICICI Bank to ICICI Bank (TPA) transaction are available 24*7.
2. Non-working days include Saturday, Sunday. Additionally, daily 07:00 pm to 01:00 am is also considered as Non-Working Day.
3. RTGS requests are not processed on Sundays and Bank holidays. In case the beneficiary bank has a holiday, the account will be credited on the next working day.
4. Between 7 PM to 12 AM NEFT transactions up to 10 Lakhs can be processed. Once the limit is reached, initiated NEFT transaction will be processed on next working day.
5. Between 12 AM to 1 AM RTGS Transactions will be rejected at CIB end. Between 7 PM & 12 AM, transactions initiated beyond the limit of 1 crore will remain in queue and will be processed after 1 AM of next working day.

Endpoints (URL)

UAT V1 Flow[1]– https://apibankingonesandbox.icicibank.com/api/v1/composite-payment

UATV2 Flow[2] https://apibankingonesandbox.icicibank.com/api/v2/composite-payment

LIVE V1 Flow– https://apibankingone.icicibank.com/api/v1/composite-payment

LIVE V2 Flow - https://apibankingone.icicibank.com/api/v2/composite-payment

1. V1 Flow – V1 flow should be used by current account holding clients.
2. V2 Flow – V2 flow should be used by the Payment aggregators and escrow account-holding clients based on the use case. Beneficiary registration is mandatory for the clients with V2 flow irrespective of payment mode.

Input parameters for NEFT & RTGS payments

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client. API Key will be provided to the client during	Yes	Mandatory

Table of Contents

	onboarding and same needs to be used for all further transactions. Client must ensure that requests are being sent from whitelisted IP's only.		
x-priority	This value states the priority order for the mode of payment. FOR NEFT, x-priority = "0010" FOR RTGS, x-priority = "0001"	Yes	Mandatory

Body			
Input parameter & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
NEFT			
tranRefNo [String (40)]	Transaction Reference Number. "tranRefNo" will be populated in the bank statement.	No	Mandatory
amount [Number (18)]	Transaction Amount	No	Mandatory
senderAcctNo [Number (34)]	Sender's (remitter) Bank Account Number	No	Mandatory
beneAccNo [Number (34)]	Beneficiary Account Number	No	Mandatory
beneName [String (80)]	Beneficiary Name	No	Mandatory
beneIFSC [String (11)]	Beneficiary Bank IFSC Code. In case of ICICI Bank, this should be 'ICIC0000011'. That is ICIC followed by numbers. In case of IFSC starting with ICIC followed by alphanumeric	No	Mandatory

Table of Contents

	characters, the IFSC does not belong to ICICI Bank In case of ICICI Bank enabled cards, this should be 'ICIC0001028'		
narration1 [String (140)]	Details of the sender should be mentioned here.	No	Mandatory
narration2 [String (140)]	Narration 2 (Additional details)	No	Optional
crpId [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM.	Yes	Mandatory
crpUsr [String (32)]	Corporate User ID of the client. This will be provided during onboarding. Please check with the RM.	Yes	Mandatory
aggrId [String (100)]	Aggregator ID of the client. This will be provided to client during onboarding by RM.	Yes	Mandatory
aggrName [String (32)]	Aggregator Name of the client. This will be provided during onboarding by RM.	Yes	Mandatory
urn [String (40)]	Same as passed in CIB registration request.	No	Mandatory
txnType [String (3)]	'TPA' for ICICI as beneficiary Banks; 'RGS' for other beneficiary banks. For Virtual A/c payments Txn_type should be "VAP" and IFSC should be ICIC0000103, ICIC0000104 & ICIC0000106 depending on the client codes created for the service of virtual account number-based collection.	Yes	Mandatory
WORKFLOW_REQD [String (1)]	IF STP (Straight through processing) flow is enabled, pass the value as "N". If STP flow is not enabled, pass the value as "Y" to follow maker – checker flow.	Yes	Mandatory
bnfId [String (100)]	Beneficiary ID. If client wants to use beneficiary ID flow, "bnfId" needs to be passed in request packet.	Yes	Optional

Table of Contents

BENLEI [String (20)]	Beneficiary LEI (Legal Entity Identifier). Parameter is mandatory for transaction value more than or equal to 50 Crore.	No	Optional
RTGS			
AGGRID [String (100)]	Aggregator ID of the client. This will be provided to client during onboarding by RM	Yes	Mandatory
CORPID [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM.	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM.	Yes	Mandatory
URN [String (40)]	Same as passed in CIB registration request.	No	Mandatory
AGGRNAME [String (32)]	Aggregator Name of the client. This will be provided during onboarding by RM.	Yes	Mandatory
UNIQUEID [String (40)]	Unique Id of the transaction.	No	Mandatory
DEBITACC [Number (34)]	Debit Account no.	No	Mandatory
CREDITACC [Number (34)]	Credit Account no.	No	Mandatory
IFSC [String (11)]	Beneficiary Bank IFSC Code. In case of ICICI Bank, this should be 'ICIC0000011' In case of ICICI Bank enabled cards, this should be 'ICIC0001028'	No	Mandatory
AMOUNT [Number (18)]	Transaction Amount (Up to 2 decimals)	No	Mandatory
TXNTYPE [String (3)]	'TPA' for ICICI as beneficiary Banks; 'RTG' for other banks. For Virtual A/c payments Txn_type should be "VAP" and IFSC should be ICIC0000103, ICIC0000104 & ICIC0000106 depending on the client codes created for the service of virtual	Yes	Mandatory

Table of Contents

	account number-based collection. RTGS txn will not allow for virtual account payments.		
PAYEENAME [String (80)]	Payee (Beneficiary) Name	No	Mandatory
REMARKS [String (255)]	Transaction remarks	No	Mandatory
WORKFLOW_REQD [String (1)]	IF STP (Straight through processing) flow is enabled, pass the value as “N”. If STP flow is not enabled, pass the value as “Y” to follow maker – checker flow.	Yes	Mandatory
bnfId [String (100)]	Beneficiary ID. If client wants to use beneficiary ID flow, “bnfId” needs to be passed in request packet.	Yes	Optional
BENLEI [String (20)]	Beneficiary LEI (Legal Entity Identifier). Parameter is mandatory for transaction value more than or equal to 50 Crore.	No	Optional

A Sample request packet for NEFT transaction	
Header	apikey = ‘----------' x-priority = ’0010’
Body	{ "tranRefNo": "202401081032010", "amount": "1.00", "senderAcctNo": "000405002777", "beneAccNo": "000405001611", "beneName": "PratikMundhe", "beneIFSC": "SBIN0003060", "narration1": "NEFT transaction", "narration2": "PritamGadekar", "crpId": "SESPRODUCT", "crpUsr": "389018", "aggrId": "XXX", "aggrName": "XXX", "urn": "XXX", "txnType": "RGS",

Table of Contents

	"WORKFLOW_REQD": "N" “BENLEI”: “” }

A Sample request packet for NEFT Intra transaction (“txnType” = TPA)	
Header	apikey = ‘----------' x-priority = ’0010’

Body	{
	"tranRefNo": "20240108103584",
	"amount": "1.00",
	"senderAcctNo": "000405002777",
	"beneAccNo": "000451000301",
	"beneName": "PratikMundhe",
	"beneIFSC": "ICIC0000011",
	"narration1": "NEFT transaction",
	"narration2": "PritamGadekar",
	"crpId": "SESPRODUCT",
	"crpUsr": "389018",
	"aggrId": "XXX",
	"aggrName": "XXX",
	"urn": "XXX",
	"txnType": "TPA",
	"WORKFLOW_REQD": "N"
	}

Please note sample details for UAT testing:

- Debit Account: 000405002777
- Credit Account: 000405001611
- For ICICI as beneficiary bank use IFSC as ICIC0000011 and ‘txnType’ as “TPA” and for Non-ICICI Beneficiaries use IFSC as SBIN0003060 and ‘txnType’ as “RGS”, virtual accounts “VAP” (IFSC 103,104,106)
- WORKFLOW_REQD: - IF STP (Straight through processing) flow is enabled, pass the value as “N”.

If STP flow is not enabled, pass the value as “Y” to follow maker – checker flow.

A Sample request packet for RTGS transaction	
Header	apikey = ‘----------' x-priority = ’0001’
Body	{

Table of Contents

	"AGGRID": "XXX", "CORPID": "SESPRODUCT", "USERID": "389018", "URN": "XXX", "AGGRNAME": "XXX", "UNIQUEID": "202401131220802", "DEBITACC": "000405002777", "CREDITACC": "000405001611", "IFSC": "SBIN0003060", "AMOUNT": "200001.00", "CURRENCY": "INR", "TXNTYPE": "RTG", "PAYEENAME": "PratikMundhe", "REMARKS": "PritamGadekar", "WORKFLOW_REQD": "N" "BENLEI": "" }

A Sample request packet for NEFT transaction Bnf ID flow	
Header	apikey = '----------' x-priority = '0010'

Body	{
	"tranRefNo": "20240580z81098",
	"amount": "1.00",
	"senderAcctNo": "000405002777",
	"beneAccNo": "",
	"beneName": "PratikMundhe",
	"beneIFSC": "SBIN0003060",
	"narration1": "NEFT transaction",
	"narration2": "PritamG",
	"crpId": "SESPRODUCT",
	"crpUsr": "389018",
	"aggrId": "TXBCOMP0054",
	"aggrName": "GODREJ",
	"urn": "1885e35c-6291-4791-bca6-5d93452e4870",
	"txnType": "RGS",
	"WORKFLOW_REQD": "N",
	"bnfId": "56140363"
	}

A Sample request packet for RTGS transaction with Bnf ID flow	
Header	apikey = '----------'

Table of Contents

	x-priority = '0001'
Body	<pre>{ "AGGRID": "TXBCOMP005", "CORPID": "SESPRODUCT", "USERID": "389018", "URN": "1885e35c-6291-4791-bca6-5d93452e4870", "AGGRNAME": "GODREJ", "UNIQUEID": "2025011312458402", "DEBITACC": "000405002777", "CREDITACC": "", "IFSC": "SBIN0003060", "AMOUNT": "200001.00", "CURRENCY": "INR", "TXNTYPE": "RTG", "PAYEENAME": "PratikMundhe", "REMARKS": "PritamGadekar", "WORKFLOW_REQD": "N", "BNFID": "56140363" }</pre>

Output parameters for NEFT & RTGS payments

Output parameter & type (maximum character)	Description
Success	
REQID [Number]	Request Id of transaction
RESPONSE [String (10)]	Response message of transaction
STATUS [String]	Original transaction status
UNIQUEID [Number]	Unique transaction id. This value will be same as of "tranRefNo" from the request packet.
URN [Number (40)]	URN of the Client
UTRNUMBER [Number (22)]	UTR number generated by Bank
Failure	
RESPONSE [String (10)]	Response message of transaction
ERRORCODE [String]	Error code of the transaction.
STATUS [String (20)]	Status of the transaction
RESPONSECODE [String]	Response code of the transaction

Table of Contents

MESSAGE [Number]	Failure message

A Sample response packet for successful NEFT & RTGS transaction	
NEFT	RTGS
Success	Success

{
"REQID": "467166",
"STATUS": "SUCCESS",
"UNIQUEID": "202401081032010",
"URN": "XXX",
"UTRNUMBER": "062712521",
"RESPONSE": "SUCCESS"
}
	{
	"REQID": "455110",
	"STATUS": "SUCCESS",
	"UNIQUEID": "202307062002",
	"URN": "XXX",
	"UTRNUMBER": "ICICR42023070600508429",
	"RESPONSE": "SUCCESS"
	}
	
	{
	"REQID": "467169",
	"STATUS": "SUCCESS",
	"UNIQUEID": "202401131220802",
	"URN": "XXX",
	"UTRNUMBER": "ICICR42024011300509482",
	"RESPONSE": "SUCCESS"
	}

A Sample response packet for NEFT & RTGS failed transaction	
NEFT	RTGS
Failure	Failure

{
"MESSAGE": "Aggregator Registration missing",
"ERRORCODE": "9906",
"RESPONSECODE": "",
"STATUS": "FAILURE",
"RESPONSE": "FAILURE"
}
	{
	"MESSAGE": "Enter the valid amount in the range supported by the network.",
	"ERRORCODE": "101443",
	"RESPONSECODE": "",
	"STATUS": "FAILURE",
	"RESPONSE": "FAILURE"
	}

A Sample response packet for NEFT Intra transaction (“txnType” = TPA)	
Success	Failure
{ "REQID": "467170",	{ "MESSAGE": "Aggregator Registration missing",

Table of Contents

"STATUS": "SUCCESS", "UNIQUEID": "20240108103584", "URN": "XXX", "UTRNUMBER": "062712561", "RESPONSE": "SUCCESS" }	"ERRORCODE": "9906", "RESPONSECODE": "", "STATUS": "FAILURE", "RESPONSE": "FAILURE" }

Please note, the sample response packet mentioned above for NEFT & RTGS is standard. But, in some failure cases, parameters RESPONSECODE, STATUS & ERRORCODE might not appear but RESPONSE and MESSAGE parameters with Values will always appear.

Response packet of Gateway Failure

{
"success":false,
"errorCode":"997",
"description":"Note : Initaite Status check after Some time"
}

Status check for NEFT & RTGS

For NEFT status inquiry, below mentioned API's to be fired after a mentioned intervals to get the terminal status of transaction.

1) NEFT debit status check API – Provides the status of the debit in remitter a/c.
2) NEFT credit status check API (Incremental status check) – Provides the status of the credit in beneficiary a/c.

For RTGS status inquiry, only . debit status check should be used to receive the terminal status of the transaction N Debit status check must be done after 15 minutes of transaction request in case of RTGS.

NEFT – RTGS status enquiry over API

A] For money transferred to ICICI bank account beneficiary –

For the amount transferred within ICICI bank, that is when the beneficiary account also belongs to ICICI Bank, remitter needs to use only the first API i.e., the debit status check API to receive the terminal status of the transaction. The Client needs to fire this API and if the response received in the "STATUS" field is "SUCCESS", in that case the transaction can be marked as successful. All other status should be handled as mentioned in error code document.

All pending transactions are to be reconciled with the remitter (client's) bank statement at least after 2 hours of transaction initiation to ascertain the final status. In case of no respective debit is found in the bank statement, the transaction can be marked as failed and fresh transaction can be re-initiated. In case the debit is present in the account, the transaction can be marked as successful.

Table of Contents

Additionally, this API can also be utilized to fetch the UTR number for the transaction in case the same is not received within the initial response.

B] For money transferred to non ICICI bank account beneficiary–
There is a two-step process to identify the final status of the transaction.

1. For step 1, remitter needs to use the Debit status check. if the response received in the status field is "SUCCESS" only and only then the remitter should proceed to credit status check (incremental status check) API.
2. Under step 2, client should invoke the credit status check API (Incremental status API) with the requisite request packet as mentioned in the API documentation. Once the status is successfully received as "amount credited to beneficiary" the transaction can be marked as successful. All other status should be handled as mentioned in error code document.
3. It is possible that in some scenarios, the status is received as "posted to RBI." This status is provided for the transaction in which the beneficiary bank has not provided the terminal status to RBI. After 5hrs of the transaction, the status would be changed to "paid". In such a scenario RBI has provisioned 72 hours for the beneficiary bank to update the final status of the transaction. However, if the status does not change post 72 hours the remitter can mark these transactions as successful.

NEFT – RTGS Debit status check API: -

Endpoints (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/v1/composite-status

LIVE – https://apibankingone.icicibank.com/api/v1/composite-status

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. For NEFT - 0010 For RTGS - 0001	Yes	Mandatory

Table of Contents

Body			
Input value & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
AGGRID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM.	Yes	Mandatory
CORPID [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM.	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM.	Yes	Mandatory
URN [String (40)]	URN Number of the Client. Same as passed in CIB registration request.	No	Mandatory
UNIQUEID [String (40)]	Unique Id of the transaction (Pass the value of 'tranRefNo' of NEFT transaction for which debit status check needs to be done)	No	Mandatory

A Sample request packet for NEFT – RTGS debit status check API	
Header	apikey = '----------' x-priority "____"
Body	{ "AGGRID": "XXX", "CORPID": "SESPRODUCT", "USERID": "389018", "URN": "XXX", "UNIQUEID": "202401081032010" }

Output parameters

Output value & type (maximum character)	Description
URN [Number (40)]	URN Number of the client.
STATUS [String (20)]	Status of the transaction

Table of Contents

UNIQUEID [Number (40)]	Unique transaction id passed in the request packet under “UNIQUEID” field.
RESPONSE [String (10]	Response of the API service
UTRNUMBER [Number (32)]	UTR Number of the transaction
MESSAGE	Description of the failure status.

Sample response packet for NEFT - RTGS debit status check API	
Success	Failure

{
"STATUS": "SUCCESS",
"URN": "XXX",
"UNIQUEID": "202401081032010",
"UTRNUMBER": "062712521",
"RESPONSE": "SUCCESS"
}
	{
	"STATUS": "UNKNOWN",
	"MESSAGE": "Invalid Inquiry Req ID or Unique ID. Please enter a valid input to proceed.",
	"RESPONSE": "SUCCESS"
	}

Note: -

- Debit status check API should be fired after at least 30 minutes of the transaction for NEFT & after 15 minutes for RTGS transaction.
- Credit status check (Incremental status check) must be done post 1 hour of successful response from debit status check API. In case terminal status is not received, credit status check API should be retried after 2 hours.
- Transaction not found scenarios are when a message stating “Invalid Inquiry Req ID or Unique ID. Please enter a valid input to proceed” is received in the message field of the debit status check response. Client should re-initiate debit status check every 30 mins for 2 hours after the transaction. If the above message is received even after 2 hours of transaction initiation, the transaction should be marked as failed and a new transaction can be initiated.

Credit status check API (Incremental status check API)

To be used after 1 hour of successful response from debit status check API.

It is mandatory that client confirms a successful response in the Debit status check API before firing credit status check (incremental API)

Endpoints (URL) -

Table of Contents

UAT – https://apibankingonesandbox.icicibank.com/api/v1/CIBNEFTStatus

LIVE – https://apibankingone.icicibank.com/api/v1/CIBNEFTStatus

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory

Input parameters

Input parameter & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
AGGRID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding	Yes	Mandatory
CORPID [String (32)]	This is the Client Id in CIB. Client will get it during onboarding.	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during onboarding.	Yes	Mandatory
UTRNUMBER [String (32)]	UTN Number of the transaction	No	Mandatory
URN [String (40)]	URN Number of the client	No	Mandatory

A Sample request packet for NEFT incremental status check API	
Header	apikey = '----------'
Body	{ "AGGRID": " XXX ", "CORPID": "SESPRODUCT", "USERID": "389018", "URN": "XXX", "UTR": "062712521" }

Table of Contents

Output parameters

Output value & type (maximum character)	Description
STATUS [String (32)]	Status of the transaction. This needs to be handled as per the error code document.
UTRNUMBER [Number (32)]	UTR number of the transaction. This will reflect the same value as of "UTRNNUMBER" from request packet.
CreditDate [String (32)]	Time when amount got credited to beneficiary. DD,MM,YYYY HH:MM:SS AM/PM
Response [String (10)]	Response of the API service
ErrorCode	Error Code for failed transaction
Message	Description for the respective error code

Sample response packet for NEFT incremental status check API	
Success	Failure

{
"STATUS": "Amount credited to Beneficiary.",
"UTRNUMBER": "XXXXXXXXXX",
"CreditDate": "DD, MM,YYYY HH:MM:SS AM/PM",
"Response": "SUCCESS"
}
	{
	"STATUS": "FAILURE",
	"ErrorCode": "999922",
	"Message": "Invalid Transaction Id.",
	"Response": ""Failure"
	}

When request sent to Bene bank from RBI & ICICI got confirmation from bene bank about Amount credited
{STATUS:"Amount credited to Beneficiary.", UTRNUMBER:"XXXXXXXXXX", CreditDate:"DD,MM,YYYY HH:MM:SS AM/PM", Response:"SUCCESS"}

Table of Contents

When request sent to Bene bank from RBI & credit confirmation not received from bene bank


```
{
 STATUS:"Paid",
 UTRNUMBER:"XXXXXXXXXX",
 CreditDate:"DD,MM,YYYY HH:MM:SS
 AM/PM",
 Response:"SUCCESS"
 }
```


When Amount refunded to Remitter account due to incorrect Bene bank and incorrect messaging packet


```
{
 STATUS:"Amount refunded to Remitter.",
 UTRNUMBER:"XXXXXXXXXX",
 CreditDate:"DD,MM,YYYY HH:MM:SS
 AM/PM",
 Response:"SUCCESS"
 }
```


When Txn id or UTR number does not exist


```
{
 STATUS:"FAILURE",
 ErrorCode:"999922",
 Message:"Invalid Transaction
 Id.",
 Response:"Failure"
 }
```


High TPS NEFT payment

Payment

The High TPS NEFT Transaction API provides supports for high throughput pay-out solution through NEFT mode. Call back URL and upper amount limit per transaction must be configured basis the client's input during onboarding. Onboarding on iLMS platform is a pre-requisite for availing the high TPS NEFT payment service.

Note: - NEFT Transactions posted between 7:00 PM to 1:00 AM will be rejected. This service can only be availed for interbank transactions (ICICI bank account to other bank account). This service cannot be availed for intrabank transactions (ICICI bank account to ICICI bank account)

UAT V1 Flow– https://apibankingonesandbox.icicibank.com/api/v1/composite-payment

LIVE V1 Flow– https://apibankingone.icicibank.com/api/v1/composite-payment


Table of Contents

Transactional limit: -

Transaction	Amount (per transaction)
Minimum	Rs.1
Maximum*	Rs.1,00,000

*Maximum limit can be modified based on the business requirements

iNEFT payment - Process flow diagram

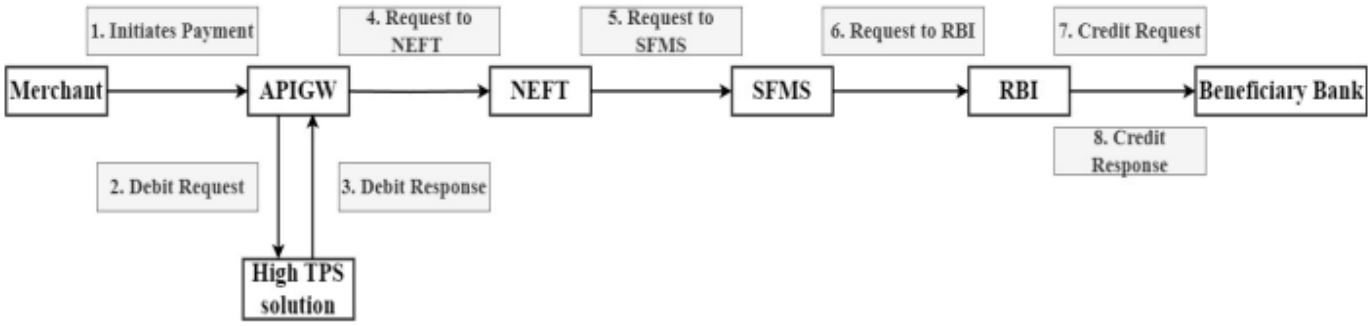

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. "ineft"	Yes	Mandatory

Body			
Input value & type	Description	Provided by ICICI	Mandatory value

Table of Contents

(maximum character)		(Yes/No)	
beneAccNo Number (35)	Beneficiary Account Number	No	Mandatory
beneName String(50)	Beneficiary name	No	Mandatory
Amount Number(19)	. Transaction amount	No	Mandatory
senderAcctNo Number(12)	Sender account number	Yes	Mandatory
beneIFSC String(11)	Beneficiary IFSC Code	No	Mandatory
narration1 String(140)	Narration	No	Mandatory
narration2 String(140)	Narration	No	Optional
tranRefNo String (16)	Unique transaction reference number. The value must end (last 3 characters) with the NEFT code provided during onboarding	No	Mandatory
crpId String (32)	This is the Client Id in CIB. Client will get it during onboarding.	No	Optional
crpUsr String (32)	This is the Client's user Id in CIB. Client will get it during onboarding.	No	Optional
urn String (40)	URN is the unique set during CIB registration	No	Optional
aggrName String (100)	Aggregator name provided at the time of onboarding	Yes	Optional
aggrId String (32)	Aggregator ID provided at the time of onboarding	Yes	Mandatory
senderEmail String (35)	Email address of the sender	No	Mandatory
senderName String (20)	Name of the sender account	No	Mandatory

Table of Contents

txnType String (3)	“RGS” value to be passed	Yes	Mandatory

A Sample request packet for ineft payment mode	
Header	apikey = ‘----------' x-priority “ineft”

Body	{
	"beneAccNo": "GMOBILR403221",
	"beneName": "Beneficiary Name",
	"amount": "1.00",
	"senderAcctNo": "000205034167",
	"beneIFSC": "SBIN0000004",
	"narration1": "NEFT HTPS Testing1",
	"narration2": "NEFT HTPS Testing2",
	"tranRefNo": "NEFTLIDxg7i47MOw",
	"crpId": "PRACHICIB1",
	"crpUsr": "USER3",
	"aggrId": "AGGRID01",
	"urn": "2022040600000000000000000001",
	"aggrName": "AGGRNAME",
	"txnType": "RGS",
	"senderEmail": "test@icicibank.com",
	"senderName": "Remitter Name"
	}

Output parameters

Response from NEFT

Output value & type (maximum character)	Description
ERRORCODE	Error code of the transaction
REQID	Request ID of the transaction
RESPONSE	API response message
RESPONSECODE	Response code from backend
STATUS	Status of the transaction
UNIQUEID	Unique transaction id passed in the request packet as “UNIQUEID” value
UTR	Unique identifier of the transaction

Table of Contents

Rejected at APIGW

Output value & type (maximum character)	Description
success	This will be “false” in these cases
errorcode	Error code of the transaction
errormessage	error response message

Sample response packet for ineft payment API	
Success	Failure

{
"REQID": "320116581363",
"RESPONSE": "SUCCESS",
"STATUS": "ACCEPTED BY BANK",
"UNIQUEID": "NEFTzd6FMSpkmNbh",
"UTR": "ICICN62025012313457196"
}
	Failed at NEFT
	{
	"RESPONSE": "SUCCESS",
	"ERRORCODE": "7506",
	"STATUS": "Rejected",
	"RESPONSECODE": "1",
	"MESSAGE": "INTERNAL ERROR"
	}
	
	{
	"RESPONSE": "SUCCESS",
	"ERRORCODE": "7508",
	"STATUS": "DUPLICATE",
	"RESPONSECODE": "2",
	"MESSAGE": "Duplicate Transaction"
	}
	
	Failed at APIGW
	{
	"success": false,
	"errorcode": 8010,
	"errormessage": "The system had an internal exception"
	}
	{
	"errorcode": "7503",
	"success": "false",
	"errormessage": "Internal Timeout"
	}
	{
	"success": "false",
	"errorcode": "IL_014",
	"errormessage": "Invalid Transaction Reference Number"}

Table of Contents

iNEFT callback

Client to provide end point (URL) for UAT & Live to receive the callbacks whenever the status of a transaction changes.

Sr no	Header level fields	Nested fields	Field description
1	tranCode		Internal TRANID of packet
2	requestor		Value “APIG” will be passed
3	fileType		Value “TRN” will be passed
4	dateTime		It is message creation date and time. Expected pattern :- YYYY-MM-DD HH:mm:ss
5	code		0 :- SUCCESS 1 :- REJECT If code = 0, refer transStatus parameter in the nested field of transStatuses parameter. If code =1, refer remark field.
6	fileNumber		Internal ID associated with a transaction
7	remark		It is sent as blank [ ] for code as 0. If code is 1, the reason for the runtime error will be sent
8	transStatuses		Opening for nested loop of individual transactions
8.1		messageType	A string value of length up to 10 will be passed
8.2		srNo	IT IS CHANNEL REFERENCE NUMBER Eg: ICICN62025012313457196

Table of Contents

8.3		failureReason	This will have value of failure reason associated with failure code received from SFMS in case of negative ack. In case of positive, this will always contain "SUCCESS" value.
8.4		processingDate	It is message processing date and time. Expected pattern:- YYYY-MM-DD HH:mm:ss
8.5		transStatus	Transaction status present in system at the time of sending the callback request. AckBySFMS – In case transaction is successfully posted from ICICI to RBI. Pending status. COMPLETED - In case of amount is settled and beneficiary has confirmed to RBI. To be considered as success. RETURNED - In case funds are returned by the beneficiary bank. To be considered as Failed. REJECTED / NACKBYSFMS / NACKBYHUB / REJECTED / FAILED denote a failed transaction status
8.6		paymentType	Value of “NS” will be present

The scenarios where callbacks will be triggered are given below:

Scenarios & Handling of Callbacks

Sr no	Value in “transStatus” to be referred	Scenario	Transaction Status to be considered
1	AckBySFMS	Accepted by SFMS	Pending
2	NackByHub,	Rejected by bank	Failed
3	NackBySFMS	Rejected by SFMS	Failed
4	Rejected	Failed at RBI	Failed
5	Completed	Success response from beneficiary bank	Success
5	Returned	Failed	Failed

Table of Contents

Sample callback packet for ineft mode	
Success	Failed

{"dateTime": "2025-01-23 11:42:21",
"fileNumber": "APIG20250123AGGRID01NFTtes100055",
"remark": [],
"transStatuses": [
{\"messageType":"pacs.008",
"srNo":"ICICN62025012314179049",
"processingDate":"2025-01-23 11:42:21",
"failureReason":"No Reason",
"transStatus":"AckBySFMS",
"paymentType":"NS"}
],
"code": "0"}
",
"responseTimestamp": "Jan 23, 2025, 11:42:25 AM"
}
	{
	"dateTime": "2023-03-29 16:07:36",
	"fileNumber": "APIG20230329AGGRID01NEFTllTbs1zcGGGH",
	"code": "0",
	"remark": [],
	"transStatuses": [
	{
	"messageType": "N06",
	"srNo": " ICICN62023071513224456",
	"processingDate": "2023-03-29 16:07:28",
	"failureReason": "(R05)BENEFICIARY NAME DIFFERES",
	"transStatus": "Returned",
	"paymentType": "NS"
	}
	],
	"tranCode": "308814300031",
	"fileType": "TRN",
	"requestor": "APIG"
	}

Status check

Status check API for iNEFT must be used on the day of transaction initiation only. Status check API MUST NOT be used on any other date other than the date of transaction initiation.

Note: Status check must be initiated at least 160 minutes after transaction initiation

Endpoints (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/v1/composite-status

LIVE – https://apibankingone.icicibank.com/api/v1/composite-status

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory

Table of Contents

x-priority	This value states the priority order for the mode of payment. “ineft”	Yes	Mandatory

Parameter Name	Type	Description	Mandatory (Y-Yes, N-No)	Provided by ICICI (Y/N)
aggrid	String [100]	Aggregator ID needs to be passed	Y	Y
uniqueid	String [16]	tranRefNo of the original transaction for which status is to be fetched to be passed here.	Y	N
date	String [8]	Date of the original Transaction [YYYYMMDD]	Y	N

Sample request packet for ineft status check


```
{
   "aggrid": "AGGRID01",
   "uniqueid": "NEFTb4iNNxn8yo36",
   "date": "20230715"
}
```


Output parameters

Parameter Name	Type	Description
dateTime	String	It is message creation Date and Time. Expected pattern: - YYYY-MM-DD HH:mm:ss
fileNumber	String	It is File ID assigned for transactions which is an internal ID E.g. APIG20230715AGGRID01NEFTLIDxg7i47MOw
code	String	0 :- SUCCESS 1 :- REJECT If code = 0, refer transStatus parameter in the nested field of transStatuses field. If code =1, refer remark field.
remark	String	Contains the reason why the status check has failed. If the status check has not failed, the remark field will be NULL E.g. "Field Requestor Is Empty." "Field File no Is Empty." "Invalid Date." "File Not Found For File number: XXXX FOR REQUESTOR: XXXX "Transactions Not Found For File id : XXXX FOR REQUESTOR : XXXX
transStatuses	String	Opening for nested loop

Table of Contents

messageType	String	“N06” will be received
srNo	String	UTR number of the transaction
processingDate	String	Message processing Date and Time. Expected Pattern: - YYYY-MM-DD HH:mm:ss
failureReason	String	Reason for the failure to get more understanding of the failure
transStatus	String	Transaction Status - Completed – If received after 2.5 hours of transaction initiation then Success. Else, pending NackByHub / NackBySFMS / Rejected / Returned – Failed Pending - Pending Any other value – Pending & highlight to bank
paymentType	String	Will contain NS
tranCode	String	Will contain request Id of transaction
fileType	String	It will be "TRN"

Sample ineft status check response

Success


```
{
   "dateTime": "2023-03-29 16:58:39",
   "fileNumber": "APIG20230329AGGRID01NEFTttTbyICijLpJ",
   "code": "0",
   "remark": [],
   "transStatuses": [
      {
         "messageType": "N06",
         "srNo": " ICICN62024122013224537",
         "processingDate": "2023-03-29 14:34:31",
         "failureReason": "No Reason",
         "transStatus": "Completed",
         "paymentType": "NS"
      }
   ],
   "tranCode": "308814495435",
   "fileType": "TRN",
```


Failed


```
{
   "dateTime": "2023-03-03 12:50:49",
   "fileNumber": "APIG20230302AGGRID01NEFTb4iNNxn8yo36",
   "code": "1",
   "remark": [
      "File not found for fileNumber : APIG20230302AG-GRID01NEFTb4iNNxn8yo36 for requestor : APIG."
   ],
   "transStatuses": [],
   "tranCode": "NA",
   "fileType": "NA",
   "requestor": "APIG",
   "uniqueid": "NEFTb4iNNxn8yo36"
}
```


Table of Contents

"requestor": "APIG", "uniqueid": "NEFTttTbyICijLpJ" }	

Note: Status check should be initiated at least 2.5 hours after transaction initiation OR 1.5 hour after receiving the callback with "transStatus":"AckBySFMS", whichever is earlier.

Account statement narration

1. Narration format for debit entry:

ILM/NEFT/<Bulk Posting Ref No>/LMS/<Batch-no.>/<client name > To NEFTOW ACC

2. Narration for Beneficiary Bank Return (Directly posted to account and not in batch file):

Narration format	Sample Narration
NEFT-RETURN-Ref no.-Beneficiary name-Return reason	NEFT-RETURN-ICICN62024122013224345 -SHAIKH-BENEFICIARY NAME DIF-FERES R05

3. Narration for SFMS Rejected Cases:

Narration format	Sample Narration
NEFT FAILED-Reference no.-Failure error-Beneficiary name -IFSC code-beneficiary account no.	NEFT FAILED-ICICN62024122013224012 -FBAPI000167 null-Beneficiary -SBIN0000000-1234567890123

4. Narration for RBI Rejected:

Narration format	Sample Narration
NEFT FAILED-Reference no.-Failure error-Beneficiary name -IFSC code-beneficiary account no.	NEFT FAILED-ICICN62024122013224013 -Beneficiary -SBIN0000004-1234567890123

Table of Contents

Batch file headers

Batch ID| Bulk Posting Ref No| Transaction RRN| Remitter acc no/VPA| Beneficiary acc no/VPA| Amount| Txn Date Time| Status| C/D/R| Payment mode| Payment Remarks

Bulk payment

This API is used to process base 64 encoded file based bulk payments using NEFT mode. OTP verification is mandatory for each bulk payment request.

Payment

UAT V1 Flow– https://apibankingonesandbox.icicibank.com/api/v1/composite-payment

LIVE V1 Flow– https://apibankingone.icicibank.com/api/v1/composite-payment

Sr no	File upload information	
1	File Length	NVARCHAR (32)
2	File Format	.txt
3	Transaction mode allowed for upload	FT/NEFT (After NEFT cut off time API will not allowed to upload the file)
4	How much record user can upload in a single file	500 Records (This restriction should be built at client end for each file upload)

Bulk payment - Process flow diagram

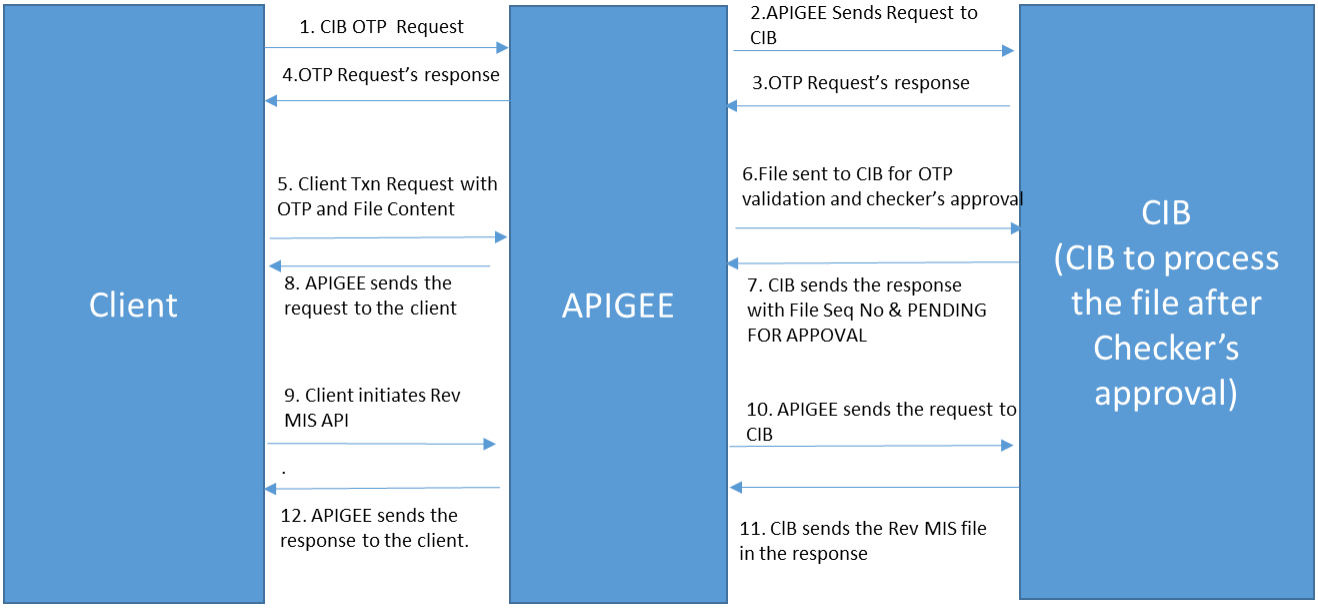


Table of Contents

Please note the following points:

a. Only registered user can upload file for BULK payment
b. Before uploading file client need to call CIB OTP API for OTP creation
c. Then same Unique id which was passed by client in create OTP API must be passed in BULK API request
d. Client needs to create payment file as per the MDC file content. For sample file and format please check this sheet 'PAB SAL File Upload Details'
e. OTP will be triggered on the registered mobile number
f. OTP validity is 15 minutes

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. "BULK"	Yes	Mandatory

Body			
Input value & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
FILE_DESCRIPTION [String]	This field will accept special characters like _, @. Enter file description	No	Mandatory
AGGR_ID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM.	Yes	Mandatory
URN [String (40)]	. URN Number of the Client. Same as passed in CIB registration request.	No	Mandatory

Table of Contents

AGGR_NAME [String (32)]	Aggregator name of the client. This will be provided during onboarding. Please check with the RM	Yes	Mandatory
USER_ID [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM	Yes	Mandatory
CORP_ID [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM.	Yes	Mandatory
UNIQUE_ID [String (40)]	Unique id value should be unique for each file upload and each file upload request unique id value should match with CIB OTP unique id	No	Mandatory
AGOTP [String (10)]	OTP received in create OTP API response	Yes	Mandatory
FILE_NAME [String]	.txt in the suffix is mandatory	No	Mandatory
FILE_CONTENT [String]	This field accept payment records in Base64 encoded text. For reference, please check sheet 'Base64encode'.	No	Mandatory

A Sample request packet for BULK payment API	
Header	apikey = '----------' x-priority "BULK"
Body	{ "CORP_ID":"PRACHICIB1", "USER_ID":"USER3", "AGGR_NAME":"XXXXXX", "AGGR_ID":"XXXXXX", "URN":"XXXXX", "UNIQUE_ID":"XXXXXXX", "FILE_DESCRIPTION":"TEST FILE", "AGOTP":"XXXXXX", "FILE_NAME":"11111.txt", "FILE_CONTENT":"RkhSfDN8MTEvMTEvMjAyMHxCVUxLVEVPfDJ8SU5SfDAwMDcwNTAwMDk2MXwwMDExXgpNRFJ8MDAwNzA1MDAwOTYxfDAwMTF8U09VUkFCSHwyfElOUnxBUElURVNUfEl DSUMwMDAwMDExfFdJQl4KTUNXfDAwMDQwNTAxMTE1NXwwMDExfFNPVVJBQkh8MXxJTlJ8VGVzdEpVTnxJQ0lDMDAwMDAxMXxXSUJeCk1DT3wwMDA0NTEwMDAzMDF8MDAxMXxSQUtFU0h8MX xJTlJ8T1RIRVJURVNUfE5GVHxETFhCMDAwMDA5MI4K"

Table of Contents

	}

Output parameters

FILE ACCEPTED

Output value & type (maximum character)	Description
AGGR_ID	Aggregator ID of the client sent in the request
AGGR_NAME	Aggregator name of the client sent in the request
CORP_ID	Corp ID of the client sent in the request
USER_ID	USER ID of the client sent in the request
URN	URN Number of the client.
UNIQUE_ID	Unique transaction id passed in the request packet under “UNIQUEID” field.
FILE_SEQUENCE_NUM	Unique identifier of the file
MESSAGE_DESC	Description of the file status

FILE REJECTED

Output value & type (maximum character)	Description
Message	Failure message description
ErrorCode	Error code against the reason for failure
Response	API response

Sample response packet for BULK payment API	
Success	Failure
(For a user with defined workflow) { "CORP_ID":"PRACHICIB1",	{ "Message":"Transactions already processed with same unique ID, please use exclusive unique id for each transaction.",

Table of Contents

<table>
<tr>
<td>"USER_ID":"USER3",
"AGGR_NAME":"XXXXXX",
"AGGR_ID":"XXXXXX",
"URN":"XXXXX",
"UNIQUE_ID":"XXXXXXX",
"FILE_SEQUENCE_NUM":"XXXXX",
"MESSAGE_DESC":"The file upload request is sent for corporate approval successfully. File Sequence No: [XXXXX]",
}

(For a user with STP)
{
"CORP_ID":"PRACHICIB1",
"USER_ID":"USER3",
"AGGR_NAME":"XXXXXX",
"AGGR_ID":"XXXXXX",
"URN":"XXXXX",
"UNIQUE_ID":"XXXXXXX",
"FILE_SEQUENCE_NUM":"XXXXX",
"MESSAGE_DESC":"The file is uploaded successfully. File Sequence No: [XXXXX]",
}</td>
<td>"ErrorCode":"999936",
"Response":"Failure"
}</td>
</tr>
</table>

Create OTP API

This API must be used to get the OTP before initiating bulk payment request

UAT URL – https://apibankingonesandbox.icicibank.com/api/Corporate/CIB/v1/Create

LIVE URL – https://apibankingone.icicibank.com/api/Corporate/CIB/v1/Create

Input parameters

Header			
Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory

Table of Contents

Body			
Input value & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
AGGRID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM	Yes	Mandatory
AGGRNAME [String (32)]	Aggregator name of the client. This will be provided during onboarding. Please check with the RM	Yes	Mandatory
CORPID [String (32)]	. This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM	Yes	Mandatory
URN [String (40)]	URN Number of the Client. Same as passed in CIB registration request	Yes	Mandatory
UNIQUEID [String (40)]	Unique ID value should be unique for each request and the same value must be passed in the bulk payment request	No	Mandatory

Sample request packet for Create OTP API	
Header	apikey = '----------'
Body	{ "AGGRID": "AGGR0356", "AGGRNAME": "ZAGGLE", "CORPID": "PRACHICIB1", "USERID": "USER3", "URN": "ABCDEFGHIJ", "UNIQUEID": "EFGHIKABCK" }

Table of Contents

Output parameters

SUCCESS

Output value & type (maximum character)	Description
RESPONSECODE	Error code against the reason for failure
MESSAGE	Error message description
RESPONSE	API response (SUCCESS or FAILURE)

FAILURE

Output value & type (maximum character)	Description
ERRORCODE	Error code against the reason for failure
MESSAGE	Error message description
RESPONSE	API response (SUCCESS or FAILURE)

Sample response packet for Create OTP API	
Success	Failure
{ "MESSAGE":"Success", "ResponseCode":"0000", "RESPONSE":"Success"}	{ "Response":"Failure", "Message":"Invalid Corp ID or User ID or Aggregator ID is passed.", "ErrorCode":"9906"}

Reverse MIS API

This API is used to fetch the status of the bulk file transaction.

Endpoints (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/v1/composite-status

LIVE – https://apibankingone.icicibank.com/api/v1/composite-status

Input parameters

Header

Table of Contents

Input parameter	Description	Provided by ICICI	Mandatory value
apikey	'API Key' is a unique value generated for each client	Yes	Mandatory
x-priority	This value states the priority order for the mode of payment. "BULK"	Yes	Mandatory

Body			
Input value & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
AGGRID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM	Yes	Mandatory
CORPID [String (32)]	. This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM	Yes	Mandatory
URN [String (40)]	URN Number of the Client. Same as passed in CIB registration request	Yes	Mandatory
UNIQUEID [String (40)]	Unique ID value should be unique for each request and the same value must be passed in the bulk payment request	No	Mandatory
FILESEQNUM	Pass the file sequence number which was received in the payment request	No	Mandatory
ISENCRYPTED	Value "Y" to be passed	No	Mandatory

Sample request packet for Reverse MIS API
{"AGGRID":"BULK0030",

Table of Contents

"CORPID":"HARSHKAB",

"USERID":"583426912.HARSHKAB",

"URN":"SR232963170",

"FILESEQNUM":"24717796",

"ISENCRYPTED":"Y"}

Response parameters

Output value & type (maximum character)	Description
FILE_SEQUENCE_NUM	File sequence number
FILE_STATUS	Status of the transaction file
FILEUPLOAD_BINARY_OUTPUT	Transaction wise status
RESPONSE	Status of the reverse MIS API

Sample response packet for Reverse MIS API
Success
{"XML":{"FILE_SEQUENCE_NUM":24717796,"FILE_STATUS":"STS","FILEUPLOAD_BINARY_OUTPUT":{"Records":{"content":"##### Output File For 7575489478 ####", "Record": ["Transaction Type|Network Id|Credit Account Number|Debit Account Number|IFSC Code|Total Amount|Host Reference Number|Host Response Code| Host Response Message|Transaction Remarks|Transaction Status","PMT|WIB|0122SLBWYTR0|668505603423|ICIC0000011|INR|4.0|032404654191|000|Payment Success|API| SUC","PMT|WIB|668501413114|0122SLBWYTR0|ICIC0000011|INR|1.0|032404660731|000|Payment Success|NEWBULKTEST|SUC","PMT|NFT|50200022523734|0122SLBWYTR0|HDFC0004256 |INR|1.0|032404660761|000|Payment Success|OTHERTEST|SUC","PMT|NFT|50200022598214|0122SLBWYTR0|HDFC0004256|INR|1.0|032404660771|000|Payment Success|OTHERTEST |SUC","PMT|WIB|668505603539|0122SLBWYTR0|ICIC0000011|INR|1.0|032404660751|000|Payment Success|NEWBULKTEST|SUC"]}},"RESPONSE":"SUCCESS"}}

Request packet for Composite API with fall-back option

In case client wishes to let the bank process a transaction via NEFT in case there is a technical decline in IMPS. This helps improve user experience at client's end. Client will get higher success rates when using fall-back option since, for their initiated transaction in single API, their payment transaction will be attempted via 2 payment methods viz. IMPS first and then by NEFT.

Table of Contents

Below packet demonstrates IMPS as first priority and NEFT as a fall-back option. In case of failure of transaction through IMPS payment mode, transaction will be routed to NEFT for processing. Response packet will be of the mode through which transaction gets processed.

URL – https://apibankingonesandbox.icicibank.com/api/v1/composite-payment

First priority – IMPS, second priority - NEFT	
Header	apikey = " ____" x-priority ="0120"
Body	<pre>{ "amount": "50.0", "tranRefNo": "20231101125600", "localTxnDtTime": "20231101125604", "beneIFSC": "NPCI0000001", "mobile": "7333378764", "txnType": "RGS", "passCode": "447c4524c9074b8c97e3a3c40ca7458d", "narration1": "Disbursement", "aggrId": "CUST1021", "paymentRef": "OPIMPS62231695621751", "urn": "759969775cff4dcc8b8c63402e645da3", "senderName": "Disbursement Escrow UAT", "bcID": "IBCKer00055", "senderAcctNo": "000451000301", "crpId": "PRACHICIB1", "beneName": "Amar ABFL Nath", "crpUsr": "USER3", "beneAccNo": "123456041", "retailerCode": "rcode", "aggrName": "HOMECREDIT" }</pre>

Composite API process Flow

To initiate a payment through Composite pay API, below mentioned flow needs to be followed by the client based on account type.

1. Clients using V2 Flow: -

   CIB registration >> Beneficiary registration >> Payment initiation >> Status check

2. Clients using UPI and IMPS in V1 Flow: -

   Payment initiation >> Status check

3. Clients using NEFT – RTGS services with V1 Flow: –

   CIB registration >> Payment initiation >> Status check

Table of Contents

4. Clients using beneficiary validation in V1 flow: -

   CIB registration >> Beneficiary registration >> Payment initiation >> Status check

API Name: CIB Registration

This is a one-time registration API, which is mandatory for clients availing NEFT, RTGS services, beneficiary validation flow in V1 or having composite V2 flow.

Endpoints (URL) -

UAT – https://apibankingonesandbox.icicibank.com/api/Corporate/CIB/v1/Registration

LIVE – https://apibankingone.icicibank.com/api/Corporate/CIB/v1/Registration

Input

Input parameter & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
AGGRNAME [String (32)]	Aggregator Name of the client. RM. will provide this during on boarding.	Yes	Mandatory
AGGRID [String (100)]	Aggregator ID of the client. RM. will provide this to the client during on boarding.	Yes	Mandatory
CORPID [String (32)]	This is the Client Id in CIB. Client will get it during on boarding. Please check with the RM.	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during on boarding. Please check with the RM.	Yes	Mandatory
URN [String (40)]	URN Number of the client. The client needs to pass this during CIB registration as a one-time request. (This should be kept handy and same should be used in all future requests). This is a unique value that client will assign to each registration from his end for security and recon.	No	Mandatory

Table of Contents

ALIASID [String (32)]	ALIAS ID 1. Keep ALIASID field empty pass CorpID and UserID value in respective parameters in case user has not created ALIASID. 2. If user created Alias id before registration, then user should pass ALIASID in Registration API. 3. ALIASID parameters need to be passed in the request packet even if it is kept empty. For clients having “ALIASID” generated from CIB, need pass it in the request.	No	Conditional

A Sample request packet for CIB registration

{
"CORPID": "SESPRODUCT1",
"USERID": "389018",
"AGGRNAME": "XXX",
"AGGRID": "XXX",
"URN": "XXX",
"ALIASID": null
}

Output parameter

Output parameter & type (maximum character)	Description
AGGRNAME [String (100)]	Aggregator name of the client.
AGGRID [String (32)]	Aggregator Id of the client.
CORPID [String (32)]	Corporate Id of the client.
USERID [String (32)]	User ID of the client.
URN [String (40)]	URN Number of the client.
Response [String (10)]	Status of CIB registration API.
Message [String (255)]	Message of the corresponding API response

Note: please note there can be only Successful registration request or failed.

Table of Contents

- While firing the registration request, the user has to user the same Corporate ID and User ID which he uses for logging into CIB. The user would get a SUCCESS/FAILURE response along with a message.
- After getting a success response, the user has to login to CIB using his/her credentials and do a Self-Approval for this request from “Pending on Me” tray to complete the one-time registration process.

API Name: Beneficiary Registration

Clients willing to initiate a transaction using an escrow account need to undertake this step, compulsorily. Beneficiary registration is mandatory for the clients with Composite V2 flow irrespective of payment mode. Under this step, the clients need to fire ‘Beneficiary Registration API,’ which will enable the bank to validate the beneficiary registration to follow up with the final payout request. This is an optional step for clients using clients with V1 flow.

There are two approaches to undertaking this step for different payment platforms.

a. Beneficiary Registration using account & IFSC – This process suffices the need for payments to be initiated under IMPS, NEFT & RTGS modes.

b. Beneficiary Registration API using VPA [Virtual Payment Address] - This process suffices the need for payments to be initiated under UPI mode.

> NOTE –
>
> For clients with an existing ALIAS ID, the default configuration for this API will not work. The client needs to delete their existing ALIAS ID through the CIB portal and create a new ALIAS ID like the existing corporate user ID.
>
> For example, if a client has ALIAS ID as ‘ICICIBank’ and corporate user ID as ‘Bank12345’, then the client needs to delete the existing ALIAS ID i.e., ‘ICICIBank’ through the CIB portal and create a new ALIAS ID as ‘Bank12345’ which must be like the corporate user ID.

Beneficiary Registration through account number & IFSC

Endpoints (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/Corporate/CIB/v1/BeneAddition

LIVE – https://apibankingone.icicibank.com/api/Corporate/CIB/v1/BeneAddition

Input parameters

Table of Contents

Input parameter & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
CrpId [NVARCHAR2(32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM.	Yes	Mandatory
CrpUsr [NVARCHAR2(32)]	User Id of the client. This will be provided during onboarding. Please check with the RM.	Yes	Mandatory
BnfName [NVARCHAR2 (80)]	Beneficiary name.	No	Mandatory
BnfNickName [NVARCHAR2 (80)]	Beneficiary Nickname. Unique forevery request.	No	Mandatory
BnfAccNo [NVARCHAR2 (32)]	Beneficiary Account number	No	Mandatory
PayeeType [CHAR (1)]	Client needs to pass respective Payee type for bene registration 'O' for other banks & 'W' for within bank WIB.	No	Mandatory
IFSC [NVARCHAR2 (32)]	Beneficiary IFSC	No	Mandatory
AGGR_ID [NVARCHAR2 (100)]	Aggregator ID of the client. RM. will provide this to the client during onboarding.	Yes	Mandatory
URN [NVARCHAR2 (40)]	Same as passed in CIB registration request	No	Mandatory

A Sample request packet for Beneficiary registration through account & IFSC


```
{
  "CrpId": "SESPRODUCT",
  "CrpUsr": "389018",
  "BnfName": "PratikMundhe",
  "BnfNickName": "Pratik",
  "BnfAccNo": "000405002777",
  "PayeeType": "O",
```


Table of Contents

```
    "IFSC": "ICIC0000011",
    "AGGR_ID": "XXX"
    "URN": "XXX"
}
```

Output parameters

Input parameter & type	Description
Message [NVARCHAR (255)]	Response Message
Response [NVARCHAR (10)]	Response (SUCCESS OR FAILURE)
Errorcode [Number (40)]	Error Code
BNF_ID [Number (10)]	Beneficiary ID

A Sample response packet for Beneficiary registration through account & IFSC	
SUCCESS	FAILURE

{
BNF_ID:"4836",
Message: "You may not be able to make Fund transfer immediately with newly added payee, please check payee status before proceeding",
Response: "SUCCESS"
}
	{
	Message: "Invalid Corp Id or User Id Or Aggregator Id is passed.",
	ErrorCode:"9906",
	Response: "Failure"
	}

Beneficiary Registration API through VPA

This API will register beneficiary through VPA essential for UPI.

Endpoints (URL)

UAT – https://apibankingonesandbox.icicibank.com/api/Corporate/CIB/VPA/v1/BeneAddition

LIVE – https://apibankingone.icicibank.com/api/Corporate/CIB/VPA/v1/BeneAddition

Input parameters

Input parameter & type	Description	Provided by ICICI	Mandatory value

Table of Contents

		(Yes/No)	
AGGRID [String (100)]	Aggregator ID of the client. This will be provided to the client during onboarding by RM.	Yes	Mandatory
CORPID [String (32)]	This is the Client Id in CIB. Client will get it during onboarding. Please check with the RM.	Yes	Mandatory
USERID [String (32)]	User Id of the client. This will be provided during onboarding. Please check with the RM.	Yes	Mandatory
URN [String (40)]	Same as passed in CIB registration request.	No	Mandatory
VPA [String (255)]	Beneficiary VPA VPA format for credit card bill payments: a. ICICI Bank: ccpay.<credit card number>@icici b. Axis Bank: cc.91<registered mobile number><last 4 digits of card>@axisbank For payment to account number and IFSC using UPI, VPA format is: <Account number>@<IFSC code>.ifsc.npci	No	Mandatory

A Sample request packet for Beneficiary registration through VPA
{ "aggrID": "XXX", "corpID": "SESPRODUCT", "userID": "389018", "urn": "XXX", "vpa": "test0@icici" }

Output parameters.

Table of Contents

Input value & type	Description
Message [String]	Response message
Response [String]	Response (SUCCESS OR FAILURE)
Errorcode [String]	Error Code

A Sample response packet for Beneficiary registration through VPA	
SUCCESS	FAILURE

{
BNF_ID:"4836",
Message: “You may not be able to make fund transfer immediately with newly added payee, please check payee status before proceeding",
Response: “SUCCESS"
}
	{
	Message: “Invalid Corp Id or User Id Or Aggregator Id is passed.",
	ErrorCode:"9906",
	Response: “Failure"
	}

Steps before final Integration

Things to be considered before moving forward with this step
• The one-time CIB registration is completed successfully.
• The beneficiary is registered and validated by using the above-mentioned API.
• The remitter must hold a current or an escrow account with the bank.
• All the necessary documents are being submitted to the RM.
• The details mentioned in the request packet for initiating the transaction are thoroughly analyzed.

Encryption & decryption

For the purpose of maintaining security of APIs initiated through composite API, it is very important for the APIs to be sent between the client and the bank in an encrypted form. Thus, it is required for the client to initiate the API in an encrypted format using their public key. The bank will also be sending the response in an encrypted format and the client needs to decrypt the same using their private key at their end.

Input value & type (maximum character)	Description	Provided by ICICI (Yes/No)	Mandatory value
requestId [String (64)]	Unique identifier for the request.	--	Optional

Table of Contents

	Not being stored at any level.		
service type [String]	Service Name; Identifying the backend service name	--	Mandatory
encryptedKey [String. Base64- encoded data (case insensitive)]	One-time use AES key encrypted by the Client's public key. Requirement is for a 128-bit key (with 256-bit key supported as an option).	--	Mandatory
oaepHashingAlgorithm [String (6)]	Describes the algorithm used for Asymmetric Encryption of one time AES key.	Value: NONE, Meaning: RSA/ECB/PKCS1 is used for Asymmetric Encryption Value : SHA1, Meaning : RSA/NONE/ OAEPWithSHA1AndMGF1Padding OR RSA/ECB/ OAEPWithSHA1AndMGF1Padding	Mandatory
Iv [String. Base64-encoded data (case insensitive) (24)]	The initialization vector used when encrypting data using the one-time use AES key.	Exactly 16 bytes actual value to match the block size	Yes, if IV is not part of encrypted data itself. Leave blank otherwise. For the response data encrypted at ICICI end, IV will always be part of encrypted Data itself and it is randomly generated for each request. Can be retrieved by Client by retrieving the first 16 bytes of Base64 decoded encryptedData
encryptedData [String. Base64-encoded data (caseinsensitive)]	Contains the encrypted dataPayload object containing the business information. Encrypted by the ephemeral AES key	--	Mandatory

Table of Contents

	using AES/CBC/PKCS5Padding. Sample unencrypted object: Please refer first section of document for a sample object.		
clientInfo [String]	ClientIP or other information	--	Optional
optionalParam [String]	Reserved for future use	--	Optional

A Sample encrypted request packet sent by ICICI Bank to client (JSON):


```
{
   "requestId": "",
   "service": "",
   "encryptedKey": "pKY7abA+qRizRdYdAmZ8P+O0Pli+4NQSoZSEEEj/kamfyfxqGtleIn65SsMJrLSPI
XtHJrjrMYoMphUXoV0zwFMl7v7AMiGgs7y2LntrDxMdOyNk7XTENouO0i7sEHmgyZWqS/y0sQQhn
k1rWEc9BZaiVBpNPsjccAZ9nx4GyRyLvso0pdMrpbpdj8zO80I+5pMAnyf1WcGx5DbZv6fRnl/OddkI
QeAQASsSG0oFoQcW8pGszg3oDa6OA0Kbd+7om4CvbcueArU6+MbH3aY3af5isGd0w7/BPTmq8
Fei2TbHpSFLRI37nqprRL6+JWk+4eKWd0xVixxFnNtIi4FDh+mnkC6CHBriC4O1hnoSpVken6wl+ItIK
Na/FFOE8RucfmBdrHF99eJASuNnU+k8fbcQKPo7gkAtavAAaN/khaQ/Msa6VEOEWM2IndUpX1PH
+dZ1pNFunRWrn813NfodIAtZ1V6KfWT/Rj1DvCsSD/aJgSr3nf1Hz9WUl9JvAtMeWBwMH+0OaRnr
toJC8Sp76Rfxm/Wb5ddQXavE8Oe4AfvvDK3IZ1hwdQYxa3NFuE9/nTXSOKsmuNrcllhnsDNmp6ndj
Xwr/jlKwH9Fw9i3LYVJL80ng55p9F1VboijVjqhm9FmSIKtmKVgXIL04lytbsm8Z1BHFU3ajvkrUNsYJr
g=",
   "oaepHashingAlgorithm": "NONE",
   "iv": "",
   "encryptedData": "mtlktFRBPPs6SVxh0RWWvsa9bj/W/M56QwvbY/vgYAIolBZuL8L0Qkq8Rxo2
4U47Tq77UXDWX+F1KCpWddxGMwnvqCL3k+2b4jJNKsWSVWykXuF3pVRGH4bKZ9gKfRh9C7w
Q9x6SuguXUDhjFp+Dss7przaNBY0GsRKXR+vUlvR1pwDW0Np+tYvkX7C0n17wg7GGbuWfN5nf9
2a9xjj512ikE3615pUyDVHBNKeUNmRHue/UB6lY3nB/+/JC/Wro",
   "clientInfo": "",
   "optionalParam": ""
}
```


ENCRYPTION-DECRYPTION PROCESS - For Composite Payment, Status Check APIs, and CIB APIs

SesionKey = Randomly generated string of length 16 (OR 32).

encryptedKey = Base64Encode (RSA/ECB/PKCS1Encryption (SesionKey,ICICIPubKey.cer))

IV = Initialization Vector- Exactly 16 bytes actual value to match the block size

Table of Contents

encryptedData = Base64Encode(AES/CBC/PKCS5Padding(Request,SessionKey, IV))

For encryption of response at ICICI

encryptedKey= Base64Encode(RSA/ECB/PKCS1Encryption(SesionKey,ClientPubKey.cer))

Session key is nothing but randomly generated string of length 16 (OR 32).

encryptedData = Base64Encode(AES/CBC/PKCS5Padding(Response,SessionKey))

For decryption of response at Client

IV=getFirst16Bytes(Base64Decode(encryptedData)

SessionKey= Base64Decode(RSA/ECB/PKCS1Decryption(encryptedKey,ClientPrivateKey.p12,))

Session key is nothing but randomly generated string of length 16 (OR 32) .

Response = Base64Decode (AES/CBC/PKCS5Padding Decryption(encryptedData,SessionKey,IV))

OR

Steps for Encryption

Generate 16-digit random number. Say RANDOMNO.

Encrypt RANDOMNO using RSA/ECB/PKCS1Padding and encode using Base64. Say encryptedKey.

Perform AES/CBC/PKCS5Padding encryption on request payload using RANDOMNO as key and ivinitialization vector. Say encryptedData.

Now client may choose to send IV in request from one of below two options.

a.) Send Base64 Encoded IV in “iv” tag. (Recommended Approach)

b.) Send IV as a part of encryptedData itself.

bytes[] iv = IV;

bytes[] cipherText = symmetrically encrypted Bytes (step3)

bytes[] concatB = iv + cipherText;

encryptedData = B64Encode(concatB);

Perform AES/CBC/PKCS5Padding encryption on DATA using RANDOMNO as key and Base64encoded RANDOMNO as IV. Say ENCR_DATA.

Steps for Decryption

Get the IV- Base64 decode the encryptedData and get first 16 bytes and rest is encrypted response.

bytes[] IV= getFirst16Bytes(Base64Decode(encryptedData)

Table of Contents

Decrypt encryptedKey using algo (RSA/ECB/PKCS1Padding) and Client's private key.

Decrypt the response using algo (AES/CBC/PKCS5Padding).

Ignore first 16 bytes of response, as it contains IV.

Frequently asked questions

COMPOSITE API		
S No.	QUESTION	ANSWER
1	What is composite API?	A single API that accommodates payments for the 4 payment methods i.e., UPI, IMPS, NEFT & RTGS.
2	What is the basic pre-requisite to be followed?	To move ahead with the procedure, several documents are required to be submitted to the RM, which are as follow's - 1. Production IP(s) 2. CA-signed 4096 bits public key certificate 3. API application form with commercials mentioned. 4. Business requirement form [transaction volumes] 5. Type of flow required – V1 /V2 flow 6. Filled UAT sign-off form
3	How the payment flow works?	The basic steps to be followed can be classified as: - 1. V2 Flow: - CIB registration >> Beneficiary registration >> Payment initiation >> Status check 2. V1 Flow: - Payment initiation >> Status check 3. NEFT – RTGS with V1 Flow: – CIB registration >> Payment initiation >> Status check 4. Clients using beneficiary validation in V1 flow: - CIB registration >> Beneficiary registration >> Payment initiation >> Status check

Table of Contents

BENEFICIARY REGISTRATION API		
S No.	QUESTION	ANSWER
1	Is Beneficiary Registration API Mandatory?	No. It is only mandatory for clients using V2 flow.
2	How do you do the status check of Beneficiary Registration API?	Fire Beneficiary registration API again, and you will receive a response, 'Beneficiary already registered.' Please test the scenario in UAT.
3	How much time does beneficiary registration API takes to register the beneficiaries?	Beneficiary Registration API is a real-time API. As soon as the API response is received, the Beneficiary is registered in the database.
4	After how much time post beneficiary registration, payment can be transferred.	Payment can be transferred after 30 minutes of successful beneficiary registration.

CIB REGISTRATION API		
S No.	QUESTION	ANSWER
1	What is CIB registration?	This is a one-time API that registers clients in CIB which is our internal system. This is required for below use cases: - 1. Clients with V1 flow & using NEFT – RTGS service. 2. Clients using V2 Flow.
3	How approval is done for CIB registration in UAT or production.	In UAT approval is done at back end, post firing the registration API. In production, the client must log in the CIB portal, select connected banking, and approve from pending approvals. Credentials can only be used only after successful approval of CIB registration from portal.

Table of Contents

ENCRYPTION-DECRYPTION PROCESS		
S No.	QUESTION	ANSWER
1	How to check the encryption-decryption mechanism at clients' end?	The client should encrypt the request using their public key and decrypt using the corresponding private key to understand the mechanism.
2	What are the encryption steps for CIB registration & Beneficiary Registration APIs?	Please refer ENCRYPTION-DECRYPTION PROCESS - For Composite Payment, Status Check APIs, and CIB APIs
3	What is the encryption-decryption mechanism for Composite API and their respective status check APIs?	Please refer ENCRYPTION-DECRYPTION PROCESS - For Composite Payment, Status Check APIs, and CIB APIs

COMPOSITE PAYOUT API		
S No.	QUESTION	ANSWER
1	What are several payment methods covered under Composite payment API?	There are four payment modes currently available under the composite payout API system, which are UPI, IMPS, NEFT and RTGS.
2	Can we prioritize more than one payment platform in a single request packet?	Yes. It is possible to prioritize more than one payment platform in a single request packet. To do so, avail a unique value of x-priority in headers. Put the value '1' against the preferred payment mode and the rest all as '0'. Therefore, in the case of just UPI, IMPS, NEFT & RTGS, x-priority shall be 1000, 0100, 0010 & 0001. Or To access, more than one mode provides 1, 2, 3, & 4 as values corresponding to the place value of each payment mode. Currently, only fallback option available is "0120" (NEFT as a fallback to IMPS)

THOUSANDTH	HUNDREDTH	TEN'TH	ONE'TH
UPI	IMPS	NEFT	RTGS

Table of Contents

<table>
<tr><td>3</td><td>What is x-priority? Where to avail this value.</td><td>It is a 4-digit input value required to be provided by the client in the ‘HEADER’ column. The first, second, third & fourth digit of this value refers to UPI, IMPS, NEFT & RTGS, respectively.

For example,

<table><tr><th>Priority Platform</th><th>“x-priority” input</th></tr><tr><td>Only UPI</td><td>1000</td></tr><tr><td>Only IMPS</td><td>0100</td></tr><tr><td>Only NEFT</td><td>0010</td></tr><tr><td>First IMPS, second NEFT</td><td>0120</td></tr></table></td></tr>
<tr><td>4</td><td>Will the request parameter’s change for accessing more than one payment mode?</td><td>Yes. The request packet needs to include the mandatory parameters for all the payment modes selected.</td></tr>
<tr><td>5</td><td>How can we check status of our transaction?</td><td>We have a ‘Status check API,’ which could be used to check the status of the transaction.</td></tr>
<tr><td>6</td><td>When can I use status check of an API and for how many days the status is available?</td><td>You can use the status check API for responses not received and for the pending scenario. Status check to be used within 5 days from the original transaction day.</td></tr>
<tr><td>7</td><td>Is it mandatory to do status check after every transaction?</td><td>No. Status check must be performed only for pending transactions</td></tr>
<tr><td>8</td><td>What is required from clients’ end for testing?</td><td>IP addresses & 4096 Bits Public key certificate.</td></tr>
<tr><td>9</td><td>Why is IP address required?</td><td>To maintain security, we whitelist clients IP addresses.</td></tr>
<tr><td>10</td><td>What will happen if request is received from non- whitelisted IP?</td><td>API key of the client will be revoked to ensure sensitive data does not get compromised. Client must notify the respective RM to whitelist new production IPs prior to initiating payments using the same</td></tr>
<tr><td>11</td><td>What is 4096 Bits Public key certificates?</td><td>Composite API will follow an encryption and decryption mechanism to send and receive requests & responses from the client’s end. Every certificate file will have two components, i.e., a Public Key certificate & Private key certificate. Public Key Certificates are used to encrypt, and Private key certificates are used to decrypt.</td></tr>
</table>

Table of Contents

		The client will use ICICI Bank's public key certificate and encrypt the payment request. ICICI Bank will decrypt the payment request using our private key certificate and then process the transaction accordingly as per the payment mode preferred. After the request has been processed, ICICI Bank will encrypt the response using the client's public key certificate and post it back. The client will use their corresponding private key certificate to decrypt the response received. These certificate files are available from third-party vendors. A self-signed certificate for UAT is acceptable, but for living environments a CA-signed one is mandatory.
12	What are the details provided by ICICI Bank after the configuration is completed?	We provide the API Key & ICICI Bank's Public key certificate separately for both UAT & production.
13	What is API Key?	'API Key' is a unique value generated for each client which is required to be passed in the header.
14	What will be the actionable at client's end against the error received?	Actionable has been mapped against each error code in the error code document against which respective response is received.
15	Can payments be done to NRE / NRO account?	IMPS payment can be done on NRO account but not on NRE account.
16	At what TPS, client can do the payouts?	Client can initiate transactions at 3/4 TPS. If requirement is of more TPS, please reach out to your RM for high TPS solution.

PAYMENT PLATFORM – UPI		
S No.	QUESTION	ANSWER
1	What is Device-ID, profile-ID, channel code, account provider, merchant type, etc. in UPI request packet?	These are fixed values that are generated when the client is configured in UAT & Production environment and the same shall be provided after the configuration.

Table of Contents

<table>
<tr><td>2</td><td>What is the ideal time to initiate UPI status check request?</td><td>Status check must be done after 300 seconds of original transaction.</td></tr>
<tr><td>3</td><td>What is the limit for number of UPI transactions?</td><td>No transaction limit on volume per day.</td></tr>
<tr><td>4</td><td>How to identify reversals in UPI?</td><td>Reversals will have same RRN as of original transaction.</td></tr>
<tr><td>5</td><td>What is the maximum time of UPI reversals?</td><td>UPI transaction will be reversed by T+1 day</td></tr>
<tr><td>6</td><td>What will be values for Payer_Resp_Code and Payer_Resp_Code, Payeerevrespcode, Payerrevrespcode</td><td>These error codes are part of the error document. Please refer below table as an example for codes which will accompany RC U29:
<table>
<tr><th>Error Code</th><th>Payee RC Code</th><th>Description</th></tr>
<tr><td>U29</td><td>UX</td><td>EXPIRED VIRTUAL ADDRESS</td></tr>
<tr><td>U29</td><td>ZG</td><td>VPA RESTRICTED BY CUSTOMER</td></tr>
<tr><td>U29</td><td>ZH</td><td>INVALID VIRTUAL ADDRESS</td></tr>
<tr><td>U29</td><td>ZE</td><td>TRANSACTION NOT PERMITTED TO VPA by the PSP</td></tr>
<tr><td>U29</td><td>91</td><td>RESPONSE TIMED OUT</td></tr>
<tr><td>U29</td><td>M3</td><td>ACCOUNT BLOCKED/FROZEN</td></tr>
<tr><td>U29</td><td>Z8</td><td>PER TRANSACTION LIMIT EXCEEDED AS SET BY REMITTING MEMBER</td></tr>
<tr><td>U29</td><td>96</td><td>UNABLE TO PROCESS</td></tr>
</table></td></tr>
<tr><td>7</td><td>What remitter MCC’s are eligible for maximum limit of 2 lakh for UPI?</td><td>Below category & respective MCC’s are eligible for enhanced limit: -
<table>
<tr><td>Category</td><td>Identifier</td></tr>
<tr><td>Capital markets</td><td>MCC – 6211</td></tr>
<tr><td>Collections</td><td>MCC – 7322</td></tr>
<tr><td>Insurance</td><td>MCC – 5960, 6300, 6529</td></tr>
<tr><td>FIR</td><td>Initiation mode-12</td></tr>
</table></td></tr>
</table>

Table of Contents

		Pre-approved disbursement	Purpose code 15 (Populated by remitter/payer PSP)

PAYMENT PLATFORM – IMPS		
S No.	QUESTION	ANSWER
1	What is BC ID, passcode, and r-code in the IMPS request packet?	These are fixed values that are generated when the client is configured in UAT & Production environment and the same shall be provided after the configuration.
2	What is the ideal time to initiate IMPS status check request?	Status check must be done after 300 seconds of original transaction.
3	What is limit for number of IMPS transactions?	No transaction limit on volume per day.

PAYMENT PLATFORM – NEFT/RTGS		
S No.	QUESTION	ANSWER
1	What is AGGRID, AGGRNAME, CORPID & USERID in the NEFT & RTGS request packet?	These are fixed values that are generated when the client is configured in UAT & Production environment and the same shall be provided after the configuration.
2	What is limit for number of NEFT and RTGS?	No transaction limit on volume per day. Post cut off-hour limits will be applicable on cumulative amount as mentioned under NEFT – RTGS.
3	Will NEFT 24X7 be implemented for corporate clients?	Yes. But from 07:00 PM to 01:00 AM cut off limits will be applicable as mentioned in the document under “NEFT & RTGS”.
4	What will be the status of NEFT transaction, if it is initiated after the NEFT time slot is over for that day?	The transaction will be kept in a pending state. No amount shall be debited until the NEFT window reopens
5	What TXN TYPE and IFSC code need to be used for making payments to sub – member banks of ICICI (Ex: IFSC – ICIC00NVJVN)?	Transaction type to be used RGS (NEFT) & IFSC allocated to the bank should be used.

Table of Contents

PAYMENT PLATFORM		
S No.	QUESTION	ANSWER
	How to handle retrial of transaction not found cases? <u>Scenario</u> Client initiates a payout request and gets a pending response from APIGW (997 or 501). The client fires a status check after some time and a status of "transaction not found" is received to client.	UPI: - a. RC-15 corresponds to "transaction not found" scenarios in UPI. b. If a RC-15 is received in status check response after 30 minutes of transaction initiation and before 23 hours of transaction initiation, the transaction can be considered as failed. c. If a RC-15 is received after 23 hours of transaction initiation, the transaction should be reconciled with the account statement. IMPS: - d. RC-17 corresponds to" transaction not found scenarios" in IMPS. e. If a RC-17 is received in status check response after 30 minutes of transaction initiation, the transaction can be considered as failed. NEFT – RTGS a. Transaction not found scenarios are when "Invalid Inquiry Req ID or Unique ID. Please enter a valid input to proceed." Is received in the message field of the status check response. b. If the above message is received in debit status check response after 2 hours of transaction initiation, transaction should be marked as failed and can be reinitiated.

DAILY TRANSACTION – MIS		
S No.	QUESTION	ANSWER
1	What is MIS?	This is a report that enables access to the status records of the initiated transaction.
2	When will MIS be received?	The MIS will be received on T+1 day.

Table of Contents

3	Where will the MIS be received?	The client will have to download daily transaction MIS from the API developer portal.
4	How to enable Composite Pay MIS?	Client should login to ICICI Bank developer portal and provide userID to the RM to enable developer portal MIS.
4	Will the MIS include failed transactions?	Yes, MIS will include failed transactions also.
5	What will be stored in "TRANSACTION_REF" of developer portal MIS?	Below fields from request packet will be published in "TRANSACTION_REF": - UPI –"seq-no" from request packet IMPS – "tranRefNo" from request packet NEFT – "tranRefNo" from request packet RTGS – "UNIQUEID" from request packet
6	Will amount be recorded in decimals in MIS?	No. Amount will not be in decimals.

ICICI Reconciliation process		
S No.	QUESTION	ANSWER
1	Client should treat status sent through status API call or status in UPI 360 API call as the source of truth or not?	Yes, Status sent via Original transaction responses or via status inquiries(including UPI 360 API) should be considered as Source of Truth
2	90% DEEMED Approved cases in UPI and IMPS should reach FAILED/SUCCESS by T+1 calendar days?	Since the status change for a deemed transaction is dependent on beneficiary bank updating the status. The TAT prescribed by NPCI is T+1. For CLIENT, deemed approved should be treated at par to Success. Beneficiary bank update can come after NPCI TAT of T+1 as well. Such status change in UPI 360 as per process. Client can approach Bank operations team via their Bank relationship team to get the updates or raise the deferred chargebacks.
3	100% transactions should reach the terminal state by T+2 calendar days through status API/Recon360 API?	Final transaction status update is provided by beneficiary bank and Remitter bank can only influence via raising deferred chargebacks. If there are any cases pending for status update beyond T+2 calendar days, then Client needs to reach out to the Bank Operations team to get the final status update.

Table of Contents

		Client needs to check status via status inquiry or Recon360 API service till T+2 day and then approach their Bank relationship teams.
4	If there are any transactions with “Success” status received from status API/Recon360 API calls and Client receives credit in the account statement does this indicate that client should mark these cases as failed?	Client will reach out to the Bank Operations team via their Bank relationship team to inform and verify the reason for this ambiguity. The Client team will update the transaction status based on confirmation from the ICICI Bank relationship team.
5	If there are any transactions with “Failed” status received from status API/Recon360 API calls and Client doesn’t receive credit in the account statement till T+2 days, how client can get their funds?	Client will reach out to the Bank relationship team who in turn will coordinate with Bank Operations team for the final status and reason for non-reversal of funds towards failed transactions. The Client team will update the transaction status based on confirmation from ICICI bank.
6	If transactions are in “Success” status and Client receives a query from the merchant that their beneficiary customer didn’t receive the money, what is the course of action available to Client?	Client’s team needs to highlight the cases to the Bank relationship team and in turn they will coordinate with bank Operations team who will engage with NPCI/ Beneficiary Banks to verify the credit status to beneficiary. Such confirmation will be relayed back to CLIENT by the Bank’s relationship team.
7	SLA for clearing payouts that breach T+2 TAT from status API. How long will the ICICI Bank relationship team take to revert back with the final status post they are highlighted?	Final status is dependent on Beneficiary bank. As per prescribed TAT by NPCI, all such cases are either marked TCC (Credit confirmation) or RET (Failed confirmation). Bank Team will raise such cases to NPCI at Issue raised date+1 business working day to facilitate the response to client. Bank’s relationship team would keep the client informed.
8	Will the payouts be updated automatically by the system, or will they be manually updated post confirmation from the ICICI team?	Any change in status is in parallel updated in Recon360 as well. However, CLIENT will treat status given by Bank’s relationship team as final.

Table of Contents

9	How will ICICI bank update CLIENT regarding status of deferred chargebacks?	Bank's relationship team would coordinate with bank's operations team to check the status of these cases in URCS and update to CLIENT at Raised Date + 5 business working day. (Raise Date + 4 days is the TAT given by NPCI for all deferred chargeback cases)

If you have any suggestions / feedback on this document, please provide us the same through either RM or write to us on "upiimpsprod@icicibank.com".

Table of Contents

APPENDIX

Changes incorporated from Composite API_Document v1.11 onwards.

1) 1, INTRODUCTION

2.4 Reverse Feed:

- Modified text: 'For UPI, the final status of the transaction will be available between 300 secs and T+2 days of initiating the transaction'.

- Modified text: 'For IMPS, the final status of the transaction will be available between 300 secs & 6 *months** of initiating the transaction.'

  (**The exact timeline is subjective to purging activity at our end. Hence, it is recommended to check with ICICI team before taking any action on back dated transaction)*

3.2 4096 Bits public key certificate:

Added text: 'A self-signed certificate for UAT is acceptable, but for live environments a CA signed one is mandatory.'

2) 2. API Details

1.5 Input Parameters:

- Addition of 'Provided by ICICI' column for all payment modes

UPI:

- Removal of MPIN, Ref-ID, Expire-after & Notes from UPI request packet section as these fields are not mandatory.
- Seq-no: This should start with 'ICI' and should not have any special characters.

NEFT:

- Removal of following optional parameters:
  senderName, senderAddress, senderContactDtls, senderIFSC, senderBankName, senderBankAddress, senderBankContactDtls, beneAddress, beneContactDtls, beneBankName, beneBankAddress, beneBankContactDtls

1.6 Sample Request Packets:

- Sample request packets have been changed for UPI.
- For NEFT & RTGS, details required for UAT testing have been updated.

1.7 Output Parameters

Table of Contents

- NEFT & RTGS out parameter table have been combined.
- Sample response packet for NEFT & RTGS have been updated.
- In case of success response packet, UTR field has been added.
- In case of failure response packet, ERRORCODE filed has been added.
- Sample response code packet have also been added along with a disclaimer 'Please note, the sample response packet mentioned above is standard. But, in some failure cases, parameters RESPONSECODE, STATUS & ERRORCODE might not appear. RESPONSE and MESSAGE parameters will always appear.'

3) 5. API Name: Beneficiary Registration

5.1 Description:

Added text: 'For clients with existing ALIAS ID, the default configuration for this API will not work. Client needs to delete their existing ALIAS ID through CIB portal and create a new ALIAS ID similar to the existing corporate user ID. For example, a client has ALIAS ID as 'ICICIBank' and corporate user ID as 'Bank12345', then client needs to delete the existing ALIAS ID i.e. 'ICICIBank' through CIB portal and create a new ALIAS ID as 'Bank12345' which has to be similar to the corporate user ID.'

Changes incorporated from Composite API_Document v1.12 onwards.

- VPA Tag added to the UPI request parameter for V2 flow
- New CIB APIs under one hybrid encryption, CIB Registration, Bene addition, Bene Validation and CIB Neft Status
- IMPS Status API added to check the terminal status of final transactions

Changes incorporated from Composite API_Document v1.14 onwards.

- IMPS and UPI, status and recon360 APIs are integrated into composite status
- Standalone status and imps recon API is removed
- Change done to IMPS status API with response starting with {"ImpsResponse":

Changes incorporated from Composite API_Document v1.16 onwards

- Changes done to composite status IMPS&UPI for recon360 API
- Changes done to for what all error codes IMPS 360 API can be invoked. I.e. for 11&30 error codes.
- Below changes in draft over status API of NEFT

Original Text:

- ICICI to ICICI fund transfer (IFT fund transfer) – Composite status API shows the final response

Table of Contents

- RGS transaction- Composite status API to be used for checking debit at account level and retrieving UTR number in case of pending transaction.
- RGS Incremental status- Incremental API to be used for final NEFT response

Modified Text:

- NEFT transaction processing essentially takes place in two steps – a) There is a debit in to remitter account first, b) Followed by transaction getting submitted to RBI for processing with the time lag.

- For NEFT status enquiry there are two sets of APIs available from ICICI bank given below as –
  3) NEFT debit confirmation API – Provides the status of the debit in remitter a/c
  4) NEFT credit confirmation API – Provides the status of the credit in beneficiary a/c

Status Enquiry –

c. For money transferred to ICICI bank account bene –

For the amount transferred within ICICI bank the remitter needs to only use the first API ie. Debit confirmation API.

The remitter needs to fire this API and if the response received in status field is "SUCCESS" in that case the transaction can be marked as successfully processed.
For the status received as failure the same can be marked as failed and that particular transaction can be re-initiated. For any other status remitter should recheck the status after 2 hours. This re-check is required to be done only once. In case the status does not change to a definite success or failure, in that case no further action is possible and this transaction is to be marked as 'pending'.

All pending transactions are to be reconciled with the remitter bank statement to ascertain the final status of the transaction. In case of no respective debit is found the transaction can be marked a failed & fresh transaction can be re-initiated. In case the debit is present in the account the transaction can be marked as successful.

Additionally, this API can also be utilized to fetch the UTR number for the transaction in case the same is not received with initial

d. For money transferred to non ICICI bank account bene –

It is a two-step process to identify the final status for this transaction.

4. The remitter needs to fire the first API (Debit) and if the response received in status field is "SUCCESS" only and only in that case the remitter should proceed to step 2 listed below.

For the status received as failure the same can be marked as failed and that particular transaction can be re-initiated. For any other status remitter should recheck the status after 2 hours. This re-check is required to be done only once. In case the status does not change to a definite success or failure, in that case no further action is possible and this transaction is to be marked as 'pending'.

Table of Contents

All pending transactions are to be reconciled with the remitter bank statement to ascertain the final status of the transaction. In case of no respective debit is found the transaction can be marked a failed & fresh transaction can be re-initiated. In case the debit is present in the account then the remitter can proceed to step 2.

5. Under step 2, the remitter should invoke the second API (Credit API) with the requisite request packet as documented in API document. Once the status is successfully received as "amount credited to beneficiary "transaction can be marked as successful.

6. It is possible that in some scenarios the status is received as "posted to RBI". This status is provided for the transaction which the beneficiary bank has not provided the ultimate status. In such a scenario RBI has provisioned for 72 hrs for the beneficiary bank to update the final status of the transaction. However, if the status does not change post 72 hrs the remitter can mark these transactions as successful.

- Neft incremental API request packet parameter changed from "UTR" to UTRNUMBER".
- Expected status values updated in NEFT incremental API_output parameters.

- New Response added to gate way sample responses:
- Response packet of Gateway Failure, common to all payment modes (failure)

```
{
"success":false,
"errorCode":"997",
"description":"Note : Initaite Status check after Some time"
}
```

- Recon360 API FAQs added

Changes incorporated from Composite API_Document v1.18 onwards

- Overall change in the format of the document to improve the readability of the same
- Addition of payee-mcc in UPI request
- Addition of character limit for all request and response packet
- Incorporation of few of the common queries in the document
- Modified the description of request packets for clients

Changes incorporated from Composite API_Document v1.19 onwards

- Addition of the description for request & response packet for all payment modes and status check.
- Addition of flow diagrams for respective payment modes.
- Addition of "account-provider" parameter in UPI request packet description.
- Provided separate endpoints (URL) for V1 & V2 composite flow for all payment modes.
- Updated the request packets for UAT testing.
- Elaborated handling for NEFT & RTGS transactions

Table of Contents

- Added the handling of “transaction not found” cases in FAQ’s.

Changes incorporated from Composite API_Document v1.20 onwards.

- Addition of transaction request packets for beneficiary ID flow.
- Addition of VPA format for credit card bill payment and account and IFSC in UPI.
- BENELEI tag addition in NEFT and RTGS.
- Addition of table of purpose codes in UPI request packet.
- Updates request and response payload for IMPS status check.
- Updated handling for transaction not found cases in IMPS, NEFT and RTGS.
- Addition of FAQs for Composite MIS & UPI.
- Addition of description of RC's under U29 in FAQs.
- Clarification on handling of Null errors in Mobile App data & packets addition for successful & failed status check requests.
- TPA, RTG & RGS - UAT request packet. Updated UAT credentials for NEFT - RTGS request packet & addition of separate request packet for txn type = "TPA".
- Specified parameter length limits wherever missing.

Changes incorporated from Composite API_Document v1.21 onwards.

- Following Act codes have been added in IMPS mode:
- U92, U78, U16, U26, U84, UZ3, U88, UQ1, 103
- Act code 27, 28 and 108 (Deemed approved) which were previously communicated through email, have been removed from IMPS mode and will not be reflected in both the transaction and status check response
- Handling for Act code 103: Keep the transaction in PENDING state if received in transaction or status check response
- Corrective action before retrying the transaction in of RC 32:
  Previous action: Re-initiate status check with seq-no of length up to 35
  Updated action: Re-initiate status check with seq-no of length 35
- aggrID changed from aggrId in UPI mode
- VPA tag is conditional, but mandatory for clients using V2 flow and BNF ID flow
- Addition of “capability” tag in UPI mode payment request
- Elimination of following tags in UPI transaction request:
  'channel-code'
  'use-default-acc'
  'pre-approved'
  'default-debit'
  'default-credit'
  'merchant-type'
  'txn-type'
- Changes in NEFT incremental status API response:

Status (Updated)	Status (Previously)
Amount credited to Beneficiary.	Amount credited to Beneficiary
Amount refunded to Remitter.	Amount refunded to Remitter
Invalid Transaction ID.	Invalid Transaction ID

- Error Code 8096 added for failure in case schema invalidation

Table of Contents

Changes incorporated from Composite API_Document v1.22 onwards. (07-04-2025)

- The following responses have been added in NEFT incremental status check:

Response	Status
Success	Transaction rejected. Reversal in T+2 days
Success	Transaction in Process. Please check the status after 2 hours, if transaction is not success, then please connect with bank team

- Following additional Act codes added in IMPS mode:

81, 83, 84, 85, 818, 851, 53, 54, PM27, U09, U27, U31, U68, U89, U91, UZ2, UP3, U94, U82, UF7, M16, C10, MA, 194

- "localTxnDtTime" tag in IMPS payment request is optional
- tranRefNo in IMPS payment request limit is revised to length 50
- Data type and length added to Bene LEI and bnfID tags in all payment reequests
- Addition of iNEFT and BULK payment modes with x-priority, “ineft” and “BULK” respectively

Changes incorporated from Composite API_Document v1.23 onwards. (05-08-2025)

- The following action to be taken has been changed in NEFT debit status check:

Response	Status	Action to be taken
Success	SUSPECT/PENDING	Re-initiate status enquiry API again after 3 hours. If same response is received, keep the transaction status pending and highlight the transaction to the bank for resolution

- Following additional Act codes added in UPI mode:
  FR5, FR9,114,115,116,117,118,119,120,501,502,102,103
- Txn limits mentioned for iNEFT along with the nonoperational time of 7:00 pm to 1:00 am

Table of Contents