

Repository Manager 2

Table of Contents

| | |
|----------------------------------|----|
| Table of Contents | 1 |
| Installation..... | 18 |
| Additional Configuration..... | 18 |
| Security | 18 |
| Synchronization | 18 |
| Repository Formats | 18 |
| Release Notes | 19 |
| Upgrade Compatibility | 19 |
| Latest Release Notes..... | 19 |
| 2020 Release Notes..... | 20 |
| Repository Manager 2.14.16 | 20 |
| 2019 Release Notes..... | 21 |
| Repository Manager 2.14.15 | 21 |
| Repository Manager 2.14.14 | 22 |
| Repository Manager 2.14.13 | 22 |
| Repository Manager 2.14.12 | 23 |
| 2018 Release Notes..... | 24 |
| Repository Manager 2.14.11 | 24 |
| Repository Manager 2.14.10 | 25 |
| Repository Manager 2.14.9 | 25 |
| Repository Manager 2.14.8 | 26 |
| Repository Manager 2.14.7 | 26 |
| Repository Manager 2.14.6 | 26 |
| 2017 Release Notes..... | 27 |
| Repository Manager 2.14.5 | 28 |

| | |
|-----------------------------------|-----|
| Repository Manager 2.14.4 | 29 |
| Repository Manager 2.14.3 | 30 |
| Older Release Notes | 31 |
| Repository Manager 2.14.2 | 31 |
| Repository Manager 2.14.1 | 32 |
| Repository Manager 2.14 | 33 |
| Repository Manager 2.13 | 34 |
| Repository Manager 2.12.1 | 35 |
| Repository Manager 2.12 | 37 |
| Repository Manager 2.11.4 | 38 |
| Repository Manager 2.11.3 | 41 |
| Repository Manager 2.11.2 | 45 |
| Repository Manager 2.11.1 | 49 |
| Repository Manager 2.11 | 50 |
| Repository Manager 2.10 | 54 |
| Repository Manager 2.9.2 | 55 |
| Repository Manager 2.9.1 | 57 |
| Repository Manager 2.9 | 58 |
| Repository Manager 2.8.1 | 61 |
| Repository Manager 2.8.0 | 65 |
| Repository Manager 2.7.2 | 69 |
| Repository Manager 2.7.1 | 70 |
| Repository Manager 2.7.0-06 | 71 |
| Repository Manager 2.7.0-05 | 71 |
| Repository Manager 2.7.0-04 | 72 |
| Repository Manager 2.7.0 | 72 |
| Repository Manager 2.6.4 | 83 |
| Repository Manager 2.6.3 | 83 |
| Repository Manager 2.6.2 | 84 |
| Repository Manager 2.6.1 | 84 |
| Repository Manager 2.6.0 | 85 |
| Repository Manager 2.5.1 | 89 |
| Repository Manager 2.5.0 | 89 |
| Repository Manager 2.4 | 96 |
| Repository Manager 2.3.1 | 100 |
| Repository Manager 2.3 | 100 |
| Repository Manager 2.2.1 | 104 |
| Repository Manager 2.2 | 104 |

| | |
|---|------------|
| Repository Manager 2.1.2 | 107 |
| Repository Manager 2.1.1 | 107 |
| Repository Manager 2.1 | 108 |
| Repository Manager 2.0.6 | 112 |
| Repository Manager 2.0.5 | 112 |
| Repository Manager 2.0.4-1 | 113 |
| Repository Manager 2.0.4 | 113 |
| Repository Manager 2.0.3 | 114 |
| Repository Manager 2.0.2 | 114 |
| Repository Manager 2.0.1 | 114 |
| Repository Manager 2.0 | 115 |
| System Requirements..... | 118 |
| Supported Versions | 119 |
| Host Operating System | 119 |
| Dedicated Operating System User Account..... | 119 |
| Adequate File Handles..... | 119 |
| Java | 120 |
| How do I check what version of Java is currently being used by Nexus Repository Manager?..... | 121 |
| How do I change the version of Java used to run Nexus Repository Manager? | 121 |
| CPU | 123 |
| Memory..... | 124 |
| Disk | 124 |
| Web Browser | 124 |
| Download..... | 125 |
| Nexus Repository Manager 2 Pro | 125 |
| Older Pro versions (not recommended) | 126 |
| Nexus Repository Manager Trial Edition Installer..... | 126 |
| Nexus Repository Manager 2 OSS..... | 126 |
| Older OSS versions (not recommended)..... | 127 |
| Download Archives - Repository Manager 2 | 127 |
| Nexus Repository Manager 2.14.16 | 127 |
| Nexus Repository Manager 2.14.15 | 127 |
| Nexus Repository Manager 2.14.14 | 128 |

| | |
|--|-----|
| Nexus Repository Manager 2.14.13 | 128 |
| Nexus Repository Manager 2.14.12 | 129 |
| Nexus Repository Manager 2.14.11 | 129 |
| Nexus Repository Manager 2.14.10 | 129 |
| Nexus Repository Manager 2.14.9 | 130 |
| Nexus Repository Manager 2.14.8 | 130 |
| Nexus Repository Manager 2.14.7 | 130 |
| Nexus Repository Manager 2.14.6 | 131 |
| Nexus Repository Manager 2.14.5 | 131 |
| Nexus Repository Manager 2.14.4 | 132 |
| Nexus Repository Manager 2.14.3 | 132 |
| Nexus Repository Manager 2.14.2 | 132 |
| Nexus Repository Manager 2.14.1 | 133 |
| Nexus Repository Manager 2.14.0 | 133 |
| Nexus Repository Manager 2.13.0 | 133 |
| Nexus Repository Manager 2.12.1 | 134 |
| Nexus Repository Manager 2.12.0 | 134 |
| Nexus Professional 2.11.4 | 135 |
| Nexus Professional 2.11.3 | 135 |
| Nexus Professional 2.11.2 | 135 |
| Nexus Professional 2.11.1 | 136 |
| Nexus Professional 2.11.0 | 136 |
| Nexus Professional 2.10.0 | 137 |
| Nexus Repository Manager 2.9.2 | 137 |
| Nexus Repository Manager 2.9.1 | 137 |
| Nexus Repository Manager 2.9.0 | 138 |
| Nexus Repository Manager 2.8.1 | 138 |
| Nexus Repository Manager 2.8.0 | 139 |
| Nexus Repository Manager 2.7.2 | 139 |
| Nexus Repository Manager 2.7.1 | 139 |
| Nexus Repository Manager 2.7.0 | 140 |
| Nexus Repository Manager 2.6.4 | 141 |
| Nexus Repository Manager 2.6.3 | 141 |
| Nexus Repository Manager 2.6.2 | 142 |
| Nexus Repository Manager 2.6.1 | 142 |
| Nexus Repository Manager 2.6.0 | 142 |
| Nexus Repository Manager 2.5.1 | 143 |
| Nexus Repository Manager 2.5.0 | 143 |
| Nexus Repository Manager 2.4.0 | 144 |

| | |
|---|------------|
| Nexus Repository Manager 2.3.1..... | 144 |
| Nexus Repository Manager 2.3.0..... | 144 |
| Nexus Repository Manager 2.2.1..... | 145 |
| Nexus Repository Manager 2.2..... | 145 |
| Nexus Professional 2.1.2 | 145 |
| Nexus Professional 2.1.1 | 146 |
| Nexus Professional 2.1 | 146 |
| Nexus Professional 2.0.6 | 147 |
| Download Archives - Repository Manager OSS | 147 |
| Nexus Repository Manager OSS 2.14.16 | 147 |
| Nexus Repository Manager OSS 2.14.15 | 147 |
| Nexus Repository Manager OSS 2.14.14 | 148 |
| Nexus Repository Manager OSS 2.14.13 | 148 |
| Nexus Repository Manager OSS 2.14.12 | 149 |
| Nexus Repository Manager OSS 2.14.11 | 149 |
| Nexus Repository Manager OSS 2.14.10 | 149 |
| Nexus Repository Manager OSS 2.14.9 | 150 |
| Nexus Repository Manager OSS 2.14.8 | 150 |
| Nexus Repository Manager OSS 2.14.7 | 150 |
| Nexus Repository Manager OSS 2.14.6 | 151 |
| Nexus Repository Manager OSS 2.14.5 | 151 |
| Nexus Repository Manager OSS 2.14.4 | 152 |
| Nexus Repository Manager OSS 2.14.3 | 152 |
| Nexus Repository Manager OSS 2.14.2 | 152 |
| Nexus Repository Manager OSS 2.14.1 | 153 |
| Nexus Repository Manager OSS 2.14.0 | 153 |
| Nexus Repository Manager OSS 2.13.0 | 153 |
| Nexus Repository Manager OSS 2.12.1 | 154 |
| Nexus OSS 2.12.0 | 154 |
| Nexus OSS 2.11.4 | 155 |
| Nexus OSS 2.11.3 | 155 |
| Nexus OSS 2.11.2 | 155 |
| Nexus OSS 2.11.1 | 156 |
| Nexus OSS 2.11.0 | 156 |
| Nexus OSS 2.10.0 | 157 |
| Nexus OSS 2.9.2 | 157 |
| Nexus OSS 2.9.1 | 157 |
| Nexus OSS 2.9.0 | 158 |

| | |
|-------------------------|-----|
| Nexus OSS 2.8.1 | 158 |
| Nexus OSS 2.8.0 | 159 |
| Nexus OSS 2.7.2 | 159 |
| Nexus OSS 2.7.1 | 159 |
| Nexus OSS 2.7.0 | 160 |
| Nexus OSS 2.6.4 | 161 |
| Nexus OSS 2.6.3 | 161 |
| Nexus OSS 2.6.2 | 162 |
| Nexus OSS 2.6.1 | 162 |
| Nexus OSS 2.6.0 | 162 |
| Nexus OSS 2.5.1 | 163 |
| Nexus OSS 2.5.0 | 163 |
| Nexus OSS 2.4.0 | 164 |
| Nexus OSS 2.3.1 | 164 |
| Nexus OSS 2.3.0 | 164 |
| Nexus OSS 2.2.1 | 165 |
| Nexus OSS 2.2..... | 165 |
| Nexus OSS 2.1.2 | 165 |
| Nexus OSS 2.1.1 | 166 |
| Nexus OSS 2.1..... | 166 |
| Nexus OSS 2.0.6 | 167 |
| Nexus OSS 2.0.5 | 167 |
| Nexus OSS 2.0.4 | 167 |
| Nexus OSS 2.0.3 | 168 |
| Nexus OSS 2.0.2 | 168 |
| Nexus OSS 2.0.1 | 168 |
| Nexus OSS 2.0..... | 169 |
| Nexus OSS 1.9.2.4 | 169 |
| Nexus OSS 1.9.2.3 | 170 |
| Nexus OSS 1.9.2.2 | 170 |
| Nexus OSS 1.9.2 | 170 |
| Nexus OSS 1.9.1.1 | 171 |
| Nexus OSS 1.9.1 | 171 |
| Nexus OSS 1.9.0.2 | 171 |
| Nexus OSS 1.9.0.1 | 172 |
| Nexus OSS 1.9..... | 172 |
| Nexus OSS 1.8.0.1 | 173 |
| Nexus OSS 1.7.2 | 173 |
| Nexus OSS 1.7.1 | 173 |

| | |
|--|------------|
| Nexus OSS 1.7.0 | 174 |
| Nexus OSS 1.6.0 | 174 |
| Concepts | 174 |
| Topics in this section:..... | 175 |
| The Basics - Components, Repositories and Repository Formats | 175 |
| An Example - Maven Repository Format | 176 |
| Repository Management | 180 |
| Software Supply Chain Automation..... | 181 |
| Installing and Running | 182 |
| Topics in this section:..... | 182 |
| Downloading | 182 |
| Downloading Nexus Repository Manager OSS | 183 |
| Downloading Nexus Repository Manager Pro | 183 |
| Installing | 183 |
| Upgrading | 185 |
| Running..... | 185 |
| Post-Install Checklist | 190 |
| Step 1: Change the Administrative Password and Email Address | 190 |
| Step 2: Configure the SMTP Settings | 190 |
| Step 3: Configure Default HTTP and HTTPS Proxy Settings | 191 |
| Step 4: Enable Remote Index Downloads..... | 191 |
| Step 5: Change the Deployment Password..... | 191 |
| Step 6: If Necessary, Set the LANG Environment Variable..... | 192 |
| Step 7: Configure Routes..... | 192 |
| Configuring Nexus Repository Manager as a Service | 192 |
| Running as a Service on Linux | 192 |
| Running as a Service on Mac OS X | 194 |
| Running as a Service on Windows..... | 195 |
| Running Behind a Reverse Proxy | 195 |
| Why Use a Reverse Proxy | 195 |
| Repository Manager Configuration..... | 195 |
| Example Reverse Proxy Configuration | 196 |

| | |
|---|------------|
| Installing a Nexus Repository Manager Pro License | 202 |
| Installing a Nexus Repository Manager Pro License | 202 |
| Directories | 204 |
| Sonatype Work Directory | 205 |
| Configuration Directory | 208 |
| Monitoring | 209 |
| Overview | 209 |
| General Logging | 210 |
| Request Access Logging | 210 |
| Using Java Management Extension (JMX) | 211 |
| Analytics | 213 |
| Maven and Other Build Tools | 215 |
| Topics in this section: | 215 |
| Apache Maven | 216 |
| Adding Repositories for Missing Dependencies | 217 |
| Adding a New Repository | 217 |
| Adding a Repository to a Group | 219 |
| Apache Ant and Apache Ivy | 221 |
| Apache Ant and Eclipse Aether | 222 |
| Gradle | 223 |
| Leiningen | 225 |
| SBT | 227 |
| Jenkins | 227 |
| Installation | 228 |
| Global Configuration | 228 |
| Tool Configuration (Optional) | 229 |
| Job Configuration | 229 |
| Using the User Interface | 233 |
| Introduction | 234 |
| Topics in this section: | 236 |
| Browsing Repositories | 236 |

| | |
|--|------------|
| Viewing the Artifact Information..... | 239 |
| Viewing Maven Information | 239 |
| View and Editing Artifact Metadata..... | 240 |
| Using the Archive Browser | 243 |
| Inspecting the Component Dependencies | 244 |
| Viewing Component Security and License Information | 245 |
| Browsing Groups..... | 249 |
| Searching for Components | 251 |
| Search Overview | 251 |
| Advanced Search | 253 |
| Searching Artifact Metadata | 255 |
| Search Example: Analyzing a Security Vulnerability | 257 |
| Search Example: Resolving a License Issue | 259 |
| Uploading Components | 261 |
| Browsing System Feeds | 262 |
| Support Tools..... | 264 |
| System Information | 264 |
| Support Zip | 265 |
| Working with Your User Profile | 265 |
| Changing Your Password | 266 |
| Additional User Profile Tabs | 266 |
| Configuration..... | 266 |
| Topics in this section:..... | 267 |
| Customizing Server Configuration..... | 267 |
| SMTP Settings | 267 |
| HTTP Request Settings | 268 |
| Security Settings | 269 |
| Application Server Settings | 270 |
| Default HTTP and HTTPS Proxy Settings | 271 |
| System Notification Settings | 272 |
| PGP Key Server Information..... | 273 |
| New Version Availability | 274 |
| Managing Repositories..... | 274 |

| | |
|--|-----|
| Proxy Repository | 275 |
| Hosted Repository | 275 |
| Virtual Repository..... | 275 |
| Configuring Repositories..... | 276 |
| Viewing the Summary Panel for a Repository..... | 283 |
| Auto Block/Unblock of Remote Repositories | 285 |
| Managing Repository Groups..... | 286 |
| Managing Routing..... | 288 |
| Automatic Routing | 288 |
| Manual Routing Configuration | 290 |
| Managing Scheduled Tasks | 293 |
| Accessing and Configuring Capabilities | 301 |
| Customizing the User Interface with Branding | 303 |
| Configuring Outreach Content in Welcome Tab | 303 |
| Network Configuration | 304 |
| Logging | 304 |
| Plugins and the REST API..... | 306 |
| Managing Security | 308 |
| Managing Privileges | 309 |
| Managing Repository Targets..... | 311 |
| Managing Roles | 313 |
| Managing Users | 316 |
| Security Setup with User Tokens | 318 |
| Introduction | 318 |
| Enabling and Resetting User Tokens..... | 319 |
| Accessing and Using Your User Tokens | 321 |
| Configuring User Token Behavior | 323 |
| Authentication via Remote User Token | 323 |
| Smart Proxy | 324 |
| Topics in this section:..... | 325 |
| Enabling Smart Proxy Publishing..... | 325 |
| Establishing Trust | 327 |

| | |
|---|------------|
| Repository Specific Smart Proxy Configuration..... | 329 |
| Smart Proxy Security and Messages..... | 330 |
| Example Setup | 331 |
| Advanced Configuration..... | 332 |
| LDAP Integration..... | 333 |
| Topics in this section:..... | 333 |
| Enabling the LDAP Authentication Realm | 333 |
| Configuring LDAP Integration | 334 |
| Connection and Authentication | 334 |
| User and Group Mapping..... | 336 |
| User Element Mapping | 336 |
| Mapping Users and Groups with Active Directory | 340 |
| Mapping Users and Groups with posixAccount..... | 342 |
| Mapping Roles to LDAP Users | 342 |
| Mapping Internal Roles for External Users..... | 343 |
| Mapping External Roles to Repository Manager Roles | 347 |
| Enterprise LDAP Support..... | 349 |
| Enterprise LDAP Fail-over Support..... | 350 |
| Support for Multiple Servers and LDAP Schemas | 351 |
| Enterprise LDAP Performance Caching and Timeout | 352 |
| User and Group Templates | 353 |
| Testing a User Login..... | 353 |
| Atlassian Crowd Support..... | 354 |
| Topics in this section:..... | 354 |
| Prepare NXRM and Atlassian Crowd | 354 |
| Prepare NXRM for Atlassian Crowd | 355 |
| Prepare Atlassian Crowd | 355 |
| Configure Nexus Repository Manager Pro Crowd Integration..... | 358 |
| Configure Nexus Repository Manager Pro to Trust Crowd's Secure URL (Optional) | 358 |
| Configure Nexus Crowd Connection | 359 |
| Configure Nexus Repository Manager Pro Crowd Security | 360 |
| Mapping a Crowd Group to Nexus Repository Manager Pro Role..... | 361 |
| Mapping a Crowd User to Nexus Role..... | 363 |

| | |
|---|------------|
| Activate Nexus Repository Manager Pro Crowd Realm | 365 |
| Procurement Suite | 366 |
| The Stages of Procurement | 366 |
| Topics in this section:..... | 367 |
| Approaches to Procurement | 367 |
| Procured Release Repository | 367 |
| Procured Development Repository | 368 |
| Providing Access with a Repository Group | 369 |
| Setting up a Procured Repository | 369 |
| Enable Remote Index Downloads | 370 |
| Create a Hosted Repository | 371 |
| Configuring Procurement for Hosted Repository | 372 |
| Procured Repository Administration | 374 |
| Configuring Procurement | 375 |
| Stopping Procurement..... | 380 |
| Staging Releases | 380 |
| Topics in this section:..... | 381 |
| Staging Overview | 381 |
| Releasing Software without a Staging Repository..... | 381 |
| How the Staging Suite Works..... | 382 |
| Configuring the Staging Suite | 383 |
| Overview | 383 |
| Configuring a Staging Profile | 384 |
| Configuring Build Promotion Profiles | 388 |
| Staging Related Security Setup..... | 389 |
| Using Repository Targets for Staging..... | 393 |
| Configuring Your Project for Deployment | 393 |
| Deployment with the Nexus Staging Maven Plugin..... | 393 |
| Deployment with the Nexus Staging Ant Tasks..... | 404 |
| Deployment with the Maven Deploy Plugin..... | 407 |
| Deployment and Staging with Gradle | 409 |
| Manually Uploading a Staged Deployment | 409 |
| Managing Staging Repositories | 410 |

| | |
|--|------------|
| Closing an Open Repository | 414 |
| Using the Staging Repository | 415 |
| Releasing a Staging Repository | 416 |
| Promoting a Staging Repository | 417 |
| Releasing, Promoting, and Dropping Build Promotion Profiles | 418 |
| Multilevel Staging and Build Promotion | 420 |
| Enforcing Standards for Deployment and Promotion with Rulesets | 421 |
| Managing Staging Rulesets | 421 |
| Defining Rulesets for Promotion | 424 |
| Policy Enforcement with Nexus IQ Server | 424 |
| Artifact Bundles | 425 |
| Creating an Artifact Bundle from a Maven Project | 425 |
| Uploading an Artifact Bundle | 428 |
| Managing Maven Settings | 429 |
| Topics in this section: | 430 |
| Manage Maven Settings Templates | 430 |
| Nexus M2Settings Maven Plugin | 433 |
| Running the Nexus M2Settings Maven Plugin | 433 |
| Configuring Nexus M2Settings Maven Plugin | 434 |
| Downloading Maven Settings | 435 |
| OSGi Bundle Repositories | 437 |
| Introduction | 437 |
| Proxy OSGi Bundle Repositories | 438 |
| Hosted OSGi Bundle Repositories | 439 |
| Virtual OSGi Bundle Repositories | 440 |
| Grouping OSGi Bundle Repositories | 441 |
| P2 Repositories | 442 |
| Introduction | 442 |
| Proxy P2 Repositories | 443 |
| Grouping P2 Repositories | 444 |
| .NET Package Repositories with NuGet | 444 |

| | |
|---|------------|
| Introduction | 445 |
| NuGet Proxy Repositories | 446 |
| NuGet Hosted Repositories..... | 448 |
| NuGet Virtual Repositories..... | 449 |
| NuGet Group Repositories..... | 450 |
| Accessing Packages in Repositories and Groups | 451 |
| Deploying Packages to NuGet Hosted Repositories | 452 |
| Creating a NuGet API-Key..... | 452 |
| Creating a Package for Deployment..... | 453 |
| Deployment with the NuPkg Upload User Interface | 453 |
| Command line based Deployment to a NuGet Hosted Repository..... | 453 |
| Integration of NuGet Repositories in Visual Studio | 453 |
| NuGet Proxy Repositories | 454 |
| NuGet Hosted Repositories..... | 456 |
| NuGet Virtual Repositories..... | 457 |
| NuGet Group Repositories..... | 458 |
| Accessing Packages in Repositories and Groups | 459 |
| Deploying Packages to NuGet Hosted Repositories | 460 |
| Creating a NuGet API-Key..... | 460 |
| Creating a Package for Deployment..... | 461 |
| Deployment with the NuPkg Upload User Interface | 461 |
| Command line based Deployment to a Nexus NuGet Hosted Repository..... | 461 |
| Integration of NuGet Repositories in Visual Studio | 461 |
| Node Packaged Modules and npm Registries..... | 462 |
| Introduction | 462 |
| Proxying npm Registries..... | 463 |
| Private npm Registries..... | 465 |
| Grouping npm Registries | 466 |
| Configuring npm | 467 |
| Publishing npm Packages | 467 |
| Encoding Credentials on Linux..... | 468 |

| | |
|--|------------|
| Encoding Credentials on Windows using "certutil" | 468 |
| Encoding Credentials on Windows using Powershell | 469 |
| Adding Credentials to the npm Configuration | 469 |
| | |
| Ruby, RubyGems and Gem Repositories | 469 |
| Introduction | 470 |
| Proxying Gem Repositories | 471 |
| Private Hosted Gem Repositories..... | 472 |
| Grouping Gem Repositories | 473 |
| Using Gem Repositories | 474 |
| Pushing Gems | 476 |
| | |
| RPM Packages and YUM Repositories..... | 477 |
| Introduction | 477 |
| Installation and Requirements | 478 |
| Configuration..... | 478 |
| Configure Hosted Yum Repositories | 479 |
| Proxying Repositories..... | 481 |
| Configure Repository Group for yum | 481 |
| Scheduled Tasks..... | 482 |
| Example Usages | 482 |
| Staging with RPMs..... | 484 |
| | |
| Site Repositories | 484 |
| Introduction | 484 |
| Creating a New Maven Project..... | 485 |
| Configuring Maven for Site Deployment | 486 |
| Adding Credentials to Your Maven Settings | 487 |
| Creating a Site Repository | 487 |
| Add the Site Deployment Role..... | 488 |
| Publishing a Maven Site | 489 |
| | |
| Repository Manager Best Practices | 491 |

| | |
|---|------------|
| Introduction | 491 |
| Repositories Per Project/Team..... | 491 |
| Partition Shared Repositories | 491 |
| Selecting an Approach..... | 492 |
| | |
| Plugins | 493 |
| Managing Plugins | 493 |
| Developing Plugins | 494 |
| Summary | 497 |
| | |
| Migrating | 497 |
| Topics in this section:..... | 497 |
| Migrating from Archiva..... | 497 |
| Introduction | 497 |
| Migrating Archiva Repositories..... | 498 |
| Migrating an Archiva Managed Repository..... | 498 |
| Migrating an Archiva Proxy Connector..... | 501 |
| Migrating from Artifactory..... | 507 |
| | |
| Secure Socket Layer SSL..... | 508 |
| Topics in this section:..... | 508 |
| Managing Outbound SSL Certificates | 508 |
| Trusting SSL Certificates of Remote Repositories | 508 |
| Trusting SSL Certificates Globally | 510 |
| Trusting SSL Certificates Using keytool | 513 |
| Configuring Inbound HTTPS | 514 |
| Terminating TLS Connections Using a Reverse Proxy | 514 |
| Terminating TLS Connections Directly | 515 |
| | |
| Community | 516 |
| Introduction | 516 |
| Community Overview..... | 516 |
| Plugins | 517 |
| Integrations | 518 |

| | |
|--------------------------------|-----|
| Other Community Projects | 519 |
| Contributing..... | 520 |
| sitemap.xml..... | 520 |

Welcome to the Help Portal for Nexus Repository Manager (NXRM) 2.

If you're just getting started, the links below represent some of the most common topics our users look for. In addition, you can use the navigation on the left to browse all topics, or use the search above to find something specific. Finally, to learn more about Nexus solutions and licenses, see our description of [Solutions vs. Products](#)¹, or contact sales@sonatype.com² for more information.

Installation

- [Installing and Running](#)(see page 182)
- [Post-Install Checklist](#)(see page 190)

Additional Configuration

- [Configuring NXRM as a Service](#)(see page 192)
- [Server Configuration](#)(see page 267)
- [Managing Repositories](#)(see page 274)

Security

- [LDAP Integration](#)(see page 333)
- [Secure Socket Layer SSL](#)(see page 508)

Synchronization

- [Smart Proxy](#)(see page 324)

Repository Formats

- [Maven and Other Build Tools](#)(see page 215)
- [OSGi Bundle Repositories](#)(see page 437)
- [P2 Repositories](#)(see page 442)
- [.NET Package Repositories with NuGet](#)(see page 444)
- [Node Packaged Modules and npm Registries](#)(see page 462)
- [Ruby, RubyGems and Gem Repositories](#)(see page 469)
- [RPM Packages and YUM Repositories](#)(see page 477)
- [Site Repositories](#)(see page 484)

¹ <https://help.sonatype.com/display/HSC/Solutions+vs.+Products>

² <mailto:sales@sonatype.com>

Release Notes

We're always improving Nexus Repository Manager products and features. We make frequent enhancements and below you will find the main features we've completed with versioned release notes.

Additionally, with on-going improvements to the [Upgrading](#)³ tool, further enhancements for Nexus Repository Manager 2 will be focused on compatibility for Nexus Repository Manager 3.

Upgrade Compatibility

Firewall Upgrade

As of [2.14.5](#)(see page 28) and [3.5.0](#)⁴, Nexus Repository Manager now supports audit- and quarantine-enabled repositories (Firewall) during an upgrade between versions. This new roll-out also includes upgrade support for cloning violation histories within IQ Server.

Watch the demo here:



Sorry, the video is not supported in this export.

But you can reach it using the following URL:

Movie URL not available.

Latest Release Notes

- [2020 Release Notes](#)(see page 20)
- [2019 Release Notes](#)(see page 21)
- [2018 Release Notes](#)(see page 24)
- [2017 Release Notes](#)(see page 27)
- [Older Release Notes](#)(see page 31)

Version 2.x to Version 3.x Upgrades

Nexus 2.14.5 is upgrade compatible with the Nexus 3.5.0 release. You can review this matrix for an [overview of 2.x to 3.x version compatibility](#)⁵.

Repository Formats - npm

Since the release of Repository Manager 2.14.4 , you can group and deploy related [npm packages](#)(see page 462) with scoped support. Of course, all scoped npm

³ <https://help.sonatype.com/display/NXRM3/Upgrading>

⁴ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.5.0>

⁵ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility+-+Repository+Manager+2+to+3>

packages are now upgradable in versions as recent as 2.14.4 and higher to 3.4.0 and higher.

2020 Release Notes

- ⓘ The notes below are a summary of new features, enhancements, and bug fixes per version release. To access the latest release, see our [download page](#)(see page 125) for details.

Repository Manager 2.14.16

❗ Security Fix for discovered Remote Code Execution (RCE) vulnerabilities

An RCE vulnerability has been found and corrected in 2.14.16, see the [CVE-2019-15893](#)⁶ advisory for details.

Sonatype recommends that administrators running NXRM2 versions up to and including 2.14.15 upgrade immediately.

This is a bug fix release and corrects vulnerabilities that were discovered in prior versions of Nexus Repository Manager 2. We recommend all users upgrade to 2.14.16 or later.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3](#)⁷ for a complete reference.

Security

- [\[NEXUS-22014\]](#)⁸ - CVE-2019-15893: Remote Code Execution vulnerability
- [\[NEXUS-22453\]](#)⁹ - Update Apache Shiro library to resolve security vulnerability

Repository

- [\[NEXUS-22313\]](#)¹⁰ - Invalid content-range header returned

⁶ https://support.sonatype.com/hc/en-us/articles/360035055794?flash_digest=c06ca0ff118b214a8de458bdcc0cc9cc02692e71&_ga=2.59378989.1625458144.1579038708-612480601.1569248902

⁷ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility+-+Repository+Manager+2+to+3>

⁸ <https://issues.sonatype.org/browse/NEXUS-22014>

⁹ <https://issues.sonatype.org/browse/NEXUS-22453>

¹⁰ <https://issues.sonatype.org/browse/NEXUS-22313>

Crowd

- [NEXUS-13306¹¹] - usernames containing non URL safe characters cannot authenticate using the Crowd realm

2019 Release Notes

 The notes below are a summary of new features, enhancements, and bug fixes per version release. To access new the latest release, see our [download page](#)(see page 125) for details.

Repository Manager 2.14.15

Security Fix for discovered Remote Code Execution (RCE) vulnerabilities

Two RCE vulnerabilities have been found and corrected in 2.14.15, see the [CVE-2019-15893¹²](#) and [CVE-2019-16530¹³](#) advisories for details.

Sonatype recommends that administrators running NXRM2 versions up to and including 2.14.14 upgrade immediately.

This is a bug fix release and corrects several vulnerabilities that were discovered in prior versions of Nexus Repository Manager 2.x. We recommend all users upgrade to 2.14.15 or later.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3¹⁴](#) for a complete reference.

Security

- [NEXUS-21044¹⁵] - CVE-2019-15893: Remote Code Execution vulnerability
- [NEXUS-21193¹⁶] - CVE-2019-16530: Remote Code Execution vulnerability

¹¹ <https://issues.sonatype.org/browse/NEXUS-13306>

¹² https://support.sonatype.com/hc/en-us/articles/360035055794?flash_digest=c06ca0ff118b214a8de458bdcc0cc9cc02692e71

¹³ <https://support.sonatype.com/hc/en-us/articles/360036132453>

¹⁴ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

¹⁵ <https://issues.sonatype.org/browse/NEXUS-21044>

¹⁶ <https://issues.sonatype.org/browse/NEXUS-21193>

- [NEXUS-20626¹⁷] - CVE-2019-5475: OS Command Injection vulnerability (second part to the fix in 2.14.14)
- [NEXUS-21512¹⁸] - Update Apache Tika and Commons Compress libraries to resolve security vulnerabilities

Repository Manager 2.14.14

This is a bug fix release and corrects a **vulnerability** that was discovered in prior versions of Nexus Repository Manager 2.x. We recommend all users upgrade to 2.14.14 or later.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3¹⁹](#) for a complete reference.

Security

- [NEXUS-20626²⁰] - CVE-2019-5475: OS command injection vulnerability
- [NEXUS-20776²¹] - CVE-2019-11358: Update jquery to resolve vulnerability

Staging

- [NEXUS-20160²²] - Fix display of html tags in staging repository summary panel
- [NEXUS-19912²³] - Add staging rule support for new POM attributes in Maven 3.6.1

Yum

- [NEXUS-19404²⁴] - Conditional GET requests for repodata/repo.xml files always return 304 unmodified

Repository Manager 2.14.13

This is a bug fix release and corrects a **vulnerability** that was discovered in prior versions of Nexus Repository Manager Pro 2.x. We recommend all Pro users upgrade to 2.14.13 or later.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3²⁵](#) for a complete reference.

¹⁷ <https://issues.sonatype.org/browse/NEXUS-20626>

¹⁸ <https://issues.sonatype.org/browse/NEXUS-21512>

¹⁹ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

²⁰ <https://issues.sonatype.org/browse/NEXUS-20626>

²¹ <https://issues.sonatype.org/browse/NEXUS-20776>

²² <https://issues.sonatype.org/browse/NEXUS-20160>

²³ <https://issues.sonatype.org/browse/NEXUS-19912>

²⁴ <https://issues.sonatype.org/browse/NEXUS-19404>

²⁵ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

Security

- [NEXUS-19761²⁶] - XSS security vulnerability addressed (CVE-2019-11629)

Repository Manager 2.14.12

This is a release with improvements, bug fixes and corrects **multiple vulnerabilities** that have been discovered in prior versions of Nexus Repository Manager 2.x. We recommend all users to upgrade to 2.14.12 or later.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3²⁷](#) for a complete reference.

General Improvements

- [NEXUS-19019²⁸] - Update Docker images to use OpenJDK 8
- [NEXUS-18919²⁹] - Prevent leaking of InputStream on root HTML index page
- [NEXUS-18271³⁰] - Changed our Welcome Outreach capability to use HTTPS instead of HTTP

Upgrade

- [NEXUS-18705³¹] - repository-changelog requests from Nexus 3 upgrade can trigger Nexus 2 outbound requests even though proxy repository is blocked

Staging

- [NEXUS-8316³²] - Prevent failing on file pattern for Profile Target Matcher staging rule

Nuget

- [NEXUS-8159³³] - Log RemoteItemNotFoundException for NuGet Proxy at debug level

Security

- [NEXUS-19314³⁴] - Multiple security vulnerabilities addressed

²⁶ <https://issues.sonatype.org/browse/NEXUS-19761>

²⁷ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

²⁸ <https://issues.sonatype.org/browse/NEXUS-19019>

²⁹ <https://issues.sonatype.org/browse/NEXUS-18919>

³⁰ <https://issues.sonatype.org/browse/NEXUS-18271>

³¹ <https://issues.sonatype.org/browse/NEXUS-18705>

³² <https://issues.sonatype.org/browse/NEXUS-8316>

³³ <https://issues.sonatype.org/browse/NEXUS-8159>

³⁴ <https://issues.sonatype.org/browse/NEXUS-19314>

2018 Release Notes

- ⓘ The notes below are a summary of new features, enhancements, and bug fixes per version release. To access new the latest release, see our [download page](#)(see page 125) for details.

Repository Manager 2.14.11

Repository Manager 2.14.11 is a Security-fix Release

This release corrects **multiple vulnerabilities** that have been discovered in prior versions of Nexus Repository Manager 2.x. We recommend all users to upgrade to 2.14.11 or later immediately. We made the following updates:

- Updated dependency that was susceptible to a DoS attack CVE-2018-11796
- Resolved internal SQL injection exploit

⚠ **Java 8 Required**

Repository Manager 2.14.11 *requires* Java 8 to consume fixes to some external libraries. Please upgrade to Java 8 before upgrading to or installing this release. See [Java System Requirements](#)(see page 120) for more general information.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3³⁵](#) for a complete reference.

Environment

- [\[NEXUS-18235\]³⁶](#) - Require Java 8 for NXRM 2

³⁵ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility+-+Repository+Manager+2+to+3>

³⁶ <https://issues.sonatype.org/browse/NEXUS-18235>

Repository Manager 2.14.10

Repository Manager 2.14.10 is a Security-fix Release

This release corrects **multiple vulnerabilities** that have been discovered in prior versions of Nexus Repository Manager 2.x. We recommend all users to upgrade to 2.14.10 or later immediately. We made the following updates:

- Updated dependency that was susceptible to a DoS attack
- Updated dependency that had a vulnerability for XSS
- Updated dependency that allowed attacker to bake a special serialized object that will execute code directly when deserialized

The following is a list of the CVEs addressed:

- CVE-2018-11771
- CVE-2015-9251
- CVE-2016-6814

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3³⁷](#) for a complete reference.

Security

- [\[NEXUS-18044\]³⁸](#) - Updates for vulnerable dependencies

Repository Manager 2.14.9

Repository Manager 2.14.9 is a Bug-fix Release

- [N³⁹EXUS-17202⁴⁰](#) - "out of range" error when installing some npm packages via proxy
- [NEXUS-16950⁴¹](#) - Permission bottleneck for large numbers of repositories in nested group repos
- [NEXUS-16667⁴²](#) - Group repository can have members removed inadvertently after update which includes a not existing member
- [NEXUS-16543⁴³](#) - XmlRolePermissionResolver permission checks bottleneck

³⁷ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

³⁸ <https://issues.sonatype.org/browse/NEXUS-18044>

³⁹ <https://issues.sonatype.org/browse/NEXUS-17202>

⁴⁰ <https://issues.sonatype.org/browse/NEXUS-17202>

⁴¹ <https://issues.sonatype.org/browse/NEXUS-16950>

⁴² <https://issues.sonatype.org/browse/NEXUS-16667>

⁴³ <https://issues.sonatype.org/browse/NEXUS-16543>

- [NEXUS-16449⁴⁴](#) - Role to privilege cache gets cleared out at inappropriate times

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3⁴⁵](#) for a complete reference.

Repository Manager 2.14.8

IQ Audit and Quarantine (Firewall) now available in OSS bundles

Repository Manager 2.14.8 introduces the Nexus Firewall functionality to the Nexus Repository Manager OSS bundle (previously only available to Pro users). To learn more, see the Nexus Firewall [quick start guide⁴⁶](#).

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3⁴⁷](#) for a complete reference.

Repository Manager 2.14.7

This is a bug-fix release, compatibility with Java 7 has been restored.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3⁴⁸](#) for a complete reference.

General Improvements

An unintended change which required running 2.14.6 with Java 8 has been reverted. While we still recommend using the latest Java 8, this repository manager release restores the ability for users to run Repository Manager 2.x with either Java 7 or Java 8.

Repository Manager 2.14.6

This is a bug-fix release to correct **multiple XSS vulnerabilities** that have been discovered in all versions of Nexus Repository Manager 2.x up to and including 2.14.5. We recommend all users upgrade to 2.14.6 or later immediately. Please see our [support knowledge base article⁴⁹](#) for more details.

See the [complete release notes⁵⁰](#) for all resolved issues.

⁴⁴ <https://issues.sonatype.org/browse/NEXUS-16449>

⁴⁵ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

⁴⁶ <https://help.sonatype.com/display/SL/Firewall+Quick+Start+Guide>

⁴⁷ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

⁴⁸ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

⁴⁹ <https://support.sonatype.com/hc/en-us/articles/360000134928>

⁵⁰ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=17220>

⚠ Java 8 Required

Repository Manager 2.14.6 requires Java 8 to use. Please upgrade to Java 8 before upgrading to or installing this release. See [Java System Requirements](#)(see page 120) for more general information.

i This was an unintentional change that we are planning to adjust in the next release. We apologize if this causes inconveniences on your attempt to upgrade. Note, we will be deprecating Java 7 support for this product in the near future so you should be prepared to install the latest supported JVM, which is always a good idea to ensure performance and security of your Java programs.

Repository Manager 3.x Upgrade Compatibility

Please see [Upgrade Compatibility - Repository Manager 2 to 3⁵¹](#) for a complete reference.

General Improvements

- [\[NEXUS-13882\]⁵²](#) - If an old indexing context is found when creating a new repository it should be deleted

Performance

- [\[NEXUS-14034\]⁵³](#) - NuGet "filter=(tolower(Id))" queries don't use a database index in NXRM 2.x, causing severe performance issues in large instances

Security

- [\[NEXUS-15723\]⁵⁴](#) - Multiple XSS security vulnerabilities addressed

2017 Release Notes

i The notes below are a summary of new features, enhancements, and big fixes per version release. To access the latest release, see our [download page](#)(see page 125) for details.

⁵¹ <https://help.sonatype.com/display/NXRM3/Upgrade+Compatibility++Repository+Manager+2+to+3>

⁵² <https://issues.sonatype.org/browse/NEXUS-13882>

⁵³ <https://issues.sonatype.org/browse/NEXUS-14034>

⁵⁴ <https://issues.sonatype.org/browse/NEXUS-15723>

Repository Manager 2.14.5

See the [complete release notes](#)⁵⁵ for all resolved issues.

Repository Manager 3.x Upgrade Compatibility

Upgrade to the latest 2.x release before upgrading to the latest 3.x version.

Repository Manager 2.14.5 is directly upgrade compatible with following newer 3.x releases, although **upgrading to at least 3.7.1 release is recommended**:

- [Repository Manager 3.7.1](#)⁵⁶ **recommended**
- [Repository Manager 3.7.0](#)⁵⁷
- [Repository Manager 3.6.2](#)⁵⁸
- [Repository Manager 3.6.1](#)⁵⁹
- [Repository Manager 3.6.0](#)⁶⁰
- [Repository Manager 3.5.0](#)⁶¹

Upgrading from an older Nexus 2.x version directly to Nexus 3.5.0 or higher is explicitly blocked - upgrade your current Nexus 2.x version to 2.14.5 first.

Nexus Firewall Quarantine Enabled Repositories Upgrade Compatibility

Those installations with [Nexus Firewall Quarantine Enabled repositories](#)⁶² can now upgrade to Repository Manager 3.5.0 and your existing audit and quarantine history will be maintained. Using IQ Server version 1.33 or greater is required for this feature.

General Improvements

Logging

- [[NEXUS-13228](#)⁶³] Bug race condition writing to request.log under high load may cause dead lock, thread pool exhaustion and CPU spike performance

⁵⁵ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=16845>

⁵⁶ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.7.1>

⁵⁷ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.7.0>

⁵⁸ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.6.2>

⁵⁹ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.6.1>

⁶⁰ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.6.0>

⁶¹ <https://help.sonatype.com/display/NXRM3/2017+Release+Notes#id-2017ReleaseNotes-RepositoryManager3.5.0>

⁶² <https://help.sonatype.com/display/NXI/Integrating+NXRM+2.x+and+IQ+Server>

⁶³ <https://issues.sonatype.org/browse/NEXUS-13228>

Security

- [[NEXUS-13865](#)⁶⁴] Bug protect against potential for logback exploit CVE-2017-5929 security
-

Repository Manager 2.14.4

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.14.4.

See the [complete release notes](#)⁶⁵ for all resolved issues.

New and Noteworthy

Nexus 3.x Upgrade Compatibility

Nexus 2.14.4 is upgrade compatible with the Nexus 3.3.0 release. Upgrading from a different Nexus 2.x version into Nexus 3.3.0 is explicitly blocked.

Edge-cases for corrupted or invalid npm and NuGet components that may exist in your Nexus 2.x instance will no longer block your upgrade to Nexus 3.x .

npm scoped packages support

By popular demand we have implemented [package scope support](#)⁶⁶ for deploying and depending on scoped npm packages. Nexus Repository Manager 3.x already has this feature and now 2.x installations can start using scoped packages and be assured their packages will migrate correctly to Nexus Repository Manager 3 when they are ready.

[Associating a scope with a registry](#)⁶⁷ is possible only by manually editing your `~/.npmrc` file.

Nexus Repository Manager 2.x does not support the special handling required to automatically add or remove scoped registries using [adduser/login](#)⁶⁸ or [logout](#)⁶⁹ commands. If you want this feature, using Nexus Repository Manager 3.x is still required.

Disabling Security Prompts for RUT Authentication

We have [added a feature](#)⁷⁰ to disable user interface security prompts when using RUT authentication and LDAP realms together.

General Improvements

Upgrade

⁶⁴ <https://issues.sonatype.org/browse/NEXUS-13865>

⁶⁵ <https://issues.sonatype.org/jira/secure/ReleaseNote.jspa?projectId=10001&version=16871>

⁶⁶ <https://docs.npmjs.com/misc/scope>

⁶⁷ <https://docs.npmjs.com/misc/scope#associating-a-scope-with-a-registry>

⁶⁸ <https://docs.npmjs.com/cli/adduser>

⁶⁹ <https://docs.npmjs.com/cli/logout>

⁷⁰ <https://sonatype.zendesk.com/hc/en-us/articles/115005199687>

- [[NEXUS-12483](https://issues.sonatype.org/browse/NEXUS-12483)⁷¹] Bug invalid nexus 2.x NuGet repository files will cause nexus 3.x upgrade to fail with NullPointerException
- [[NEXUS-12513](https://issues.sonatype.org/browse/NEXUS-12513)⁷²] Bug invalid nexus 2.x npm packages will fail the upgrade to nexus 3.x with 500 internal server error

NPM

- [[NEXUS-6857](https://issues.sonatype.org/browse/NEXUS-6857)⁷³] Improvement Support for npm scoped packages

Security

- [[NEXUS-11888](https://issues.sonatype.org/browse/NEXUS-11888)⁷⁴] Bug http request header values should be checked for validity before allowing a request to proceed security
-

Repository Manager 2.14.3

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.14.3.

See the [complete release notes](#)⁷⁵ for all resolved issues.

New and Noteworthy

Upgrade Compatibility

Nexus 2.14.3 is upgrade compatible with the Nexus Repository Manager 3.2.1 release. Upgrading from a different Nexus Repository Manager 2.x version into Nexus Repository Manager 3.2.1 is explicitly blocked.

nexus-staging-maven-plugin 1.6.8 released

We fixed a problem where the Staging Apache Maven plugin did not authenticate properly with HTTP proxy servers. [[NEXUS-10502](https://issues.sonatype.org/browse/NEXUS-10502)⁷⁶]

Support Upgrading Proxy Repositories of maven.oracle.com

We have implemented changes that will allow you to upgrade your existing Maven proxy repository of `maven.oracle.com` into the Nexus Repository Manager 3.2.1 release. Another barrier to upgrading to Nexus Repository Manager 3.x has been eliminated. [[NEXUS-10164](https://issues.sonatype.org/browse/NEXUS-10164)⁷⁷]

Performance

⁷¹ <https://issues.sonatype.org/browse/NEXUS-12483>

⁷² <https://issues.sonatype.org/browse/NEXUS-12513>

⁷³ <https://issues.sonatype.org/browse/NEXUS-6857>

⁷⁴ <https://issues.sonatype.org/browse/NEXUS-11888>

⁷⁵ <https://issues.sonatype.org/jira/secure/ReleaseNote.jspa?projectId=10001&version=16846>

⁷⁶ <https://issues.sonatype.org/browse/NEXUS-10502%E2%80%9C>

⁷⁷ <https://issues.sonatype.org/browse/NEXUS-10164%E2%80%9C>

Analysis of heap dumps from some complex customer setups has helped us identify a way to significantly reduce memory consumption in circumstances where there are large sets of group repository members.[[NEXUS-12276](#)⁷⁸]

General Improvements

- [[NEXUS-10502](#)⁷⁹] Bug nexus-staging-maven-plugin does not use proxy authentication credentials
- [[NEXUS-12276](#)⁸⁰] Improvement reduce JVM heap memory consumed by group repository 404 not found responses performance
- [[NEXUS-11909](#)⁸¹] Improvement content requests to Nexus 2 by migration agent should avoid HTTP 404 Not Found caused by URL encoding

Older Release Notes

 The notes below are a summary of new features, enhancements, and big fixes per version release. To access new the latest release, see our [download page](#)(see page 125) for details.

Repository Manager 2.14.2

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.14.2.

See the [complete release notes](#)⁸² for all resolved issues.

New and Noteworthy

Nexus 3 Upgrade Improvements

Nexus Repository Manager 2.14.2 is forward upgrade compatible with the forthcoming 3.2.0 release. Upgrading 2.14.2 into Nexus Repository Manager 3.1.0 will be blocked - releases going forward will include a compatibility check as a reminder.

Nexus Repository Manager3 adoption is growing rapidly and we identified a few edge case problems with the upgrade process. We've worked hard to get some more fixes out there for you in this release.

General Improvements

Upgrading

⁷⁸ <https://issues.sonatype.org/browse/NEXUS-12276>

⁷⁹ <https://issues.sonatype.org/browse/NEXUS-10502>

⁸⁰ <https://issues.sonatype.org/browse/NEXUS-12276>

⁸¹ <https://issues.sonatype.org/browse/NEXUS-11909>

⁸² <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=16726>

- [NEXUS-11732⁸³] Bug Prevent ClassCastException when handling StorageLinkItem during upgrade to Nexus 3
- [NEXUS-11921⁸⁴] Improvement Explicitly prevent quarantine enabled Nexus 2 repositories from upgrade into Nexus 3
- [NEXUS-11301⁸⁵] Bug Upgrade to Nexus 3 fails if Nexus 2 has no anonymous user defined
- [NEXUS-11923⁸⁶] Improvement perform version compatibility check when upgrading from Nexus 2.x to Nexus 3.x
- [NEXUS-11925⁸⁷] Bug Nexus 2 to Nexus 3 upgrade may fail with NullPointerException Cannot invoke method extract while processing RepositoryChangelogResource
- [NEXUS-11874⁸⁸] Bug npm packages cannot be migrated due to IllegalStateException PackageVersion expected when contained in a rebuilt hosted repository

Staging

- [NEXUS-11219⁸⁹] Bug Drop Inactive Staging Repositories task aborts if a repository is not found

Transport

- [NEXUS-10987⁹⁰] Bug NoClassDefFoundError for SSLSocketImpl on non-Oracle JVM prevents proxying HTTPS remote
-

Repository Manager 2.14.1

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.14.1.

See the [complete release notes](#)⁹¹ for all resolved issues.

New and Noteworthy

3.1 Future Upgrade Capability Included

This is the first release that can support upgrade to the future 3.1 final version. We are releasing 2.14.1 in advance of the 3.1 release so that Nexus Repository Manager administrators can begin preparing and planning for their eventual 3.1 upgrade.

⁸³ <https://issues.sonatype.org/browse/NEXUS-11732>

⁸⁴ <https://issues.sonatype.org/browse/NEXUS-11921>

⁸⁵ <https://issues.sonatype.org/browse/NEXUS-11301>

⁸⁶ <https://issues.sonatype.org/browse/NEXUS-11923>

⁸⁷ <https://issues.sonatype.org/browse/NEXUS-11925>

⁸⁸ <https://issues.sonatype.org/browse/NEXUS-11874>

⁸⁹ <https://issues.sonatype.org/browse/NEXUS-11219>

⁹⁰ <https://issues.sonatype.org/browse/NEXUS-10987>

⁹¹ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=16622>

Repository Manager 2.14

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.14.

See the [complete release notes⁹²](#) for all resolved issues.

New and Noteworthy

This is a bug fix release to address some critical issues affecting certain customers.

Attention Maven Snapshot Remover Task Users

A regression in the Snapshot Removal scheduled task introduced in [2.11.4\(see page 38\)](#) that causes certain files to not be deleted has been fixed in this release. Upgrading will prevent old snapshot releases from consuming unnecessary disk space.

General Improvements

Database

- [\[NEXUS-10154⁹³\]](#) Bug OrientDb allocates massive disk cache on large systems performance

LDAP,RUT Auth,User Token

- [\[NEXUS-10794⁹⁴\]](#) Bug user tokens do not work in combination with RUT Auth and LDAP realms

NPM

- [\[NEXUS-10881⁹⁵\]](#) Improvement upgrade OrientDB to version 2.1.14 to properly handle nexus-work UNC paths

Performance

- [\[NEXUS-9307⁹⁶\]](#) Bug temporary nx-tmp-content-locator files may not be reliably cleaned up

Routing

- [\[NEXUS-10233⁹⁷\]](#) Bug Central automatic routing results discarded because Prefix file size exceeds maximum allowed

Scheduled Tasks

- [\[NEXUS-10460⁹⁸\]](#) Bug Regression: Maven snapshot remover does not remove asc, md5, and sha1 files performance

⁹² <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=16423>

⁹³ <https://issues.sonatype.org/browse/NEXUS-10154>

⁹⁴ <https://issues.sonatype.org/browse/NEXUS-10794>

⁹⁵ <https://issues.sonatype.org/browse/NEXUS-10881>

⁹⁶ <https://issues.sonatype.org/browse/NEXUS-9307>

⁹⁷ <https://issues.sonatype.org/browse/NEXUS-10233>

⁹⁸ <https://issues.sonatype.org/browse/NEXUS-10460>

Security

- [NEXUS-10225⁹⁹] Bug non-admin users may be unable to see or edit IQ Server Application in staging profile edit screen
 - [NEXUS-10882¹⁰⁰] Improvement upgrade Apache Shiro dependency to 1.3.1 to pick up recent security fixes
-

Repository Manager 2.13

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.13.

See the [complete release notes](#)¹⁰¹ for all resolved issues.

New and Noteworthy

The [Nexus Firewall](#)¹⁰² solution now has the ability to [release a component from quarantine](#)¹⁰³. Also, you can now [override a vulnerability of a repository component](#)¹⁰⁴. For more details, see [IQ for Repository Manager](#)¹⁰⁵. Upgrading IQ Server to 1.20 or greater is required.

General Improvements

Configuration, Repository

- [NEXUS-9843¹⁰⁶] Improvement improve logging when a retry is made in response to remote socket exceptions

NPM

- [NEXUS-10017¹⁰⁷] Bug Unable to delete npmjs proxy repo

RubyGems

- [NEXUS-9865¹⁰⁸] Bug InvalidPathException prevents installing gems when Nexus is running on Windows

Staging

99 <https://issues.sonatype.org/browse/NEXUS-10225>

100 <https://issues.sonatype.org/browse/NEXUS-10882>

101 <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=16221>

102 <http://www.sonatype.com/nexus-firewall>

103 <https://help.sonatype.com/display/NXI/Using+Audit+and+Quarantine#UsingAuditandQuarantine-ReleasingaComponentfromQuarantine>

104 <https://help.sonatype.com/display/NXI/Using+Audit+and+Quarantine#UsingAuditandQuarantine-ViewingRepositoryResults>

105 <https://help.sonatype.com/display/NXI/IQ+Server+and+NXRM+2.x>

106 <https://issues.sonatype.org/browse/NEXUS-9843>

107 <https://issues.sonatype.org/browse/NEXUS-10017>

108 <https://issues.sonatype.org/browse/NEXUS-9865>

-
- [NEXUS-9897¹⁰⁹] New Feature rc-open goal for nexus-staging-maven-plugin

Repository Manager 2.12.1

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.12.1.

See the [complete release notes](#)¹¹⁰ for all resolved issues.

New and Noteworthy

Repository Health Check (RHC) analysis support for npm repositories

Sonatype is pleased to expand support for health analysis of your proxy repository npm packages sourced from the [official npm registry](#)¹¹¹. Data available at this time includes identity and vulnerability information. We will continue to expand our support to include more data and other repository formats. ([NEXUS-9854](#)¹¹²)

RubyGems Improvements

We fixed some important issues affecting RubyGems repositories users and encourage everyone using Rubygems with Nexus Repository Manager to upgrade.

Nexus UI XSS Vulnerabilities Squashed

A recent security audit discovered some Cross Site Scripting vulnerabilities in versions of Nexus Repository Manager from 2.8.1 to 2.12.0. While there are no known exploits of these vulnerabilities, Sonatype recommends upgrading to Nexus Repository Manager 2.12.1 to minimize the risk to your Nexus Repository Manager instance. ([NEXUS-9893](#)¹¹³)

General Improvements

Build Tooling,UI

- [NEXUS-9774¹¹⁴] Bug UI javascript files are not compressed/minimized

LDAP

- [NEXUS-9541¹¹⁵] New Feature allow setting java.naming.referral for LDAP connections performance

Licensing,UI

¹⁰⁹ <https://issues.sonatype.org/browse/NEXUS-9897>

¹¹⁰ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=15921>

¹¹¹ <https://www.npmjs.com/>

¹¹² <https://issues.sonatype.org/browse/NEXUS-9854>

¹¹³ <https://issues.sonatype.org/browse/NEXUS-9893>

¹¹⁴ <https://issues.sonatype.org/browse/NEXUS-9774>

¹¹⁵ <https://issues.sonatype.org/browse/NEXUS-9541>

- [\[NEXUS-9730\]¹¹⁶](https://issues.sonatype.org/browse/NEXUS-9730) Improvement licensing UI should show distinction between recent connections and total licensed users

Logging

- [\[NEXUS-9785\]¹¹⁷](https://issues.sonatype.org/browse/NEXUS-9785) Bug Nexus startup no longer logs the edition

NPM

- [\[NEXUS-9573\]¹¹⁸](https://issues.sonatype.org/browse/NEXUS-9573) Bug all proxied repository items should have "remoteUrl" attribute set
- [\[NEXUS-9786\]¹¹⁹](https://issues.sonatype.org/browse/NEXUS-9786) Bug IllegalArgumentException Tar does not contains /package.json rebuilding metadata for some npm packages

NPM,Scheduled Tasks

- [\[NEXUS-9856\]¹²⁰](https://issues.sonatype.org/browse/NEXUS-9856) Bug running rebuild npm hosted metadata scheduled task can change repository value

Performance,Repository

- [\[NEXUS-9612\]¹²¹](https://issues.sonatype.org/browse/NEXUS-9612) Bug better protect against conflicting simultaneous deploys of the exact same file performance

REST

- [\[NEXUS-9790\]¹²²](https://issues.sonatype.org/browse/NEXUS-9790) Bug REST client JerseyArtifactMaven does not properly handle packaging parameter

Repository Health Check

- [\[NEXUS-9854\]¹²³](https://issues.sonatype.org/browse/NEXUS-9854) New Feature Repository Health Check (RHC) analysis support for npm repositories

RubyGems

- [\[NEXUS-9618\]¹²⁴](https://issues.sonatype.org/browse/NEXUS-9618) Bug rubygems proxy repository not found cache not consulted performance
- [\[NEXUS-9705\]¹²⁵](https://issues.sonatype.org/browse/NEXUS-9705) Bug expire cache task on rubygems repositories may lead to /api/v1/dependecies api performance degradation performance
- [\[NEXUS-9637\]¹²⁶](https://issues.sonatype.org/browse/NEXUS-9637) Bug rubygems proxy repository does not respect Artifact Max Age for gem files performance

¹¹⁶ <https://issues.sonatype.org/browse/NEXUS-9730>

¹¹⁷ <https://issues.sonatype.org/browse/NEXUS-9785>

¹¹⁸ <https://issues.sonatype.org/browse/NEXUS-9573>

¹¹⁹ <https://issues.sonatype.org/browse/NEXUS-9786>

¹²⁰ <https://issues.sonatype.org/browse/NEXUS-9856>

¹²¹ <https://issues.sonatype.org/browse/NEXUS-9612>

¹²² <https://issues.sonatype.org/browse/NEXUS-9790>

¹²³ <https://issues.sonatype.org/browse/NEXUS-9854>

¹²⁴ <https://issues.sonatype.org/browse/NEXUS-9618>

¹²⁵ <https://issues.sonatype.org/browse/NEXUS-9705>

¹²⁶ <https://issues.sonatype.org/browse/NEXUS-9637>

- [NEXUS-9551¹²⁷] Bug installing gems with long dependency chains can trigger IOException File name too long

Security

- [NEXUS-9636¹²⁸] Bug revert Basic auth realm name change introduced in 2.12.0

Security,Staging

- [NEXUS-9634¹²⁹] Bug /service/local/staging/bulk/promote resource does not check drop privilege

Staging,Yum

- [NEXUS-9439¹³⁰] Bug deadlock between mergeropo and staging promotion

Yum

- [NEXUS-9652¹³¹] Bug xml:base URL in proxied yum metadata files is not rewritten
-

Repository Manager 2.12

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.12.

See the [complete release notes](#)¹³² for all resolved issues.

Sonatype Branding Updates

Our Sonatype products have aligned under the Nexus portfolio brand. You may notice some product related wording changes. We have [an article](#)¹³³ to help make sense of it all.

Nexus Firewall Support Added

This is the first version of Nexus to support [Nexus Firewall](#)¹³⁴, which allows you to block undesirable components from getting into your repositories when integrated with Nexus IQ Server.

General Improvements

NPM

- [NEXUS-9026¹³⁵] Bug orientdb may not fully recover from a restore process due to OCommandExecutionException: Class 'OUSER' was not found in current database

¹²⁷ <https://issues.sonatype.org/browse/NEXUS-9551>

¹²⁸ <https://issues.sonatype.org/browse/NEXUS-9636>

¹²⁹ <https://issues.sonatype.org/browse/NEXUS-9634>

¹³⁰ <https://issues.sonatype.org/browse/NEXUS-9439>

¹³¹ <https://issues.sonatype.org/browse/NEXUS-9652>

¹³² <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=15721>

¹³³ <https://sonatype.zendesk.com/hc/articles/215716807-Sonatype-Product-and-Solutions-Overview>

¹³⁴ <http://links.sonatype.com/nexus-firewall>

¹³⁵ <https://issues.sonatype.org/browse/NEXUS-9026>

- [NEXUS-7936]¹³⁶] Bug orientdb recovery on startup performs slowly

NPM,Scheduled Tasks

- [NEXUS-8970]¹³⁷] Bug org.sonatype.nexus.proxy.walker.WalkerException: Aborted walking on repository ID='npmjs' from path='/.nexus/trash/'.

Repository

- [NEXUS-9046]¹³⁸] Improvement remove codehaus snapshots from default configuration

Routing

- [NEXUS-9158]¹³⁹] Bug help text in routing rules is wrong

RubyGems

- [NEXUS-9545]¹⁴⁰] Bug concurrent requests to ruby proxy at /api/v1/dependencies resource using the same url can hang performance

Staging,Yum

- [NEXUS-8974]¹⁴¹] Bug Yum updates to build promotion repositories are not propagated to their parent group repositories
-

Repository Manager 2.11.4

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.11.4.

See the [complete release notes](#)¹⁴² for all resolved issues.

New and Noteworthy

Upgrade to Prevent Possible SSL Socket Timeouts

Users proxying https repositories should upgrade. We've fixed a critical issue that caused SSL sockets to never timeout if the remote server started to misbehave. [NEXUS-8856](#)¹⁴³

Performance Improvements

We continue our efforts to reduce performance bottlenecks. For example:

136 <https://issues.sonatype.org/browse/NEXUS-7936>

137 <https://issues.sonatype.org/browse/NEXUS-8970>

138 <https://issues.sonatype.org/browse/NEXUS-9046>

139 <https://issues.sonatype.org/browse/NEXUS-9158>

140 <https://issues.sonatype.org/browse/NEXUS-9545>

141 <https://issues.sonatype.org/browse/NEXUS-8974>

142 <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14831>

143 <https://issues.sonatype.org/browse/NEXUS-8856>

- snapshot removal task speed has been increased by an order of magnitude [NEXUS-8724](#)¹⁴⁴
- disk space required for the npm metadata database is reduced [NEXUS-8737](#)¹⁴⁵
- the repository list rendering speed and CPU activity has been reduced significantly for non-admin users. [NEXUS-8834](#)¹⁴⁶

Request Log Now Even More Useful

We have made improvements to the Nexus Repository Manager request log to allow better auditing of request activity.

- in certain cases, the authenticated user making the request was not logged - this has been fixed [NEXUS-7860](#)¹⁴⁷
- elapsed time is now recorded as the last field of the log pattern format - this can help identify particularly slow requests [NEXUS-8913](#)¹⁴⁸
- the request.log is archived with a more compatible name: request-YYYY-MM-DD.log.gz, instead of request.log.YYYY-MM-DD.gz [NEXUS-8737](#)¹⁴⁹

Outbound Storage Requests From Nexus Can Be Easily Monitored

A special logger named remote.storage.outbound has been available for a while at DEBUG level to help identify the requests Nexus Repository Manager makes to other proxy repositories. Now this logger logs before and after the request, includes the response status, elapsed time, and any redirect information. [NEXUS-8855](#)¹⁵⁰, [NEXUS-8837](#)¹⁵¹

General Improvements

Bootstrap

- [[NEXUS-8850](#)¹⁵²] Improvement add uptime log message on shutdown

Capabilities,CLM

- [[NEXUS-8894](#)¹⁵³] Bug If CLM server is configured, but CLM server isn't running, capabilities UI will not render

Database

¹⁴⁴ <https://issues.sonatype.org/browse/NEXUS-8724>

¹⁴⁵ <https://issues.sonatype.org/browse/NEXUS-8737>

¹⁴⁶ <https://issues.sonatype.org/browse/NEXUS-8834>

¹⁴⁷ <https://issues.sonatype.org/browse/NEXUS-7860>

¹⁴⁸ <https://issues.sonatype.org/browse/NEXUS-8913>

¹⁴⁹ <https://issues.sonatype.org/browse/NEXUS-8737>

¹⁵⁰ <https://issues.sonatype.org/browse/NEXUS-8855>

¹⁵¹ <https://issues.sonatype.org/browse/NEXUS-8837>

¹⁵² <https://issues.sonatype.org/browse/NEXUS-8850>

¹⁵³ <https://issues.sonatype.org/browse/NEXUS-8894>

- [NEXUS-8849¹⁵⁴] Bug improve robustness to orientdb shutdown after stopping the store

Installer

- [NEXUS-8746¹⁵⁵] Bug gradle simple-project-staging sample project uses an obsolete version of the nexus-staging-ant-tasks

NPM

- [NEXUS-8737¹⁵⁶] Bug npm database grows unexpectedly large on cache expired requests performance

Outreach

- [NEXUS-8829¹⁵⁷] Bug outreach does not detect http global configuration changes

Proxy Repository, Transport

- [NEXUS-8837¹⁵⁸] Improvement remote.storage.outbound logger should include http response status and have consistent format

Repository

- [NEXUS-8676¹⁵⁹] Bug mime detection may not cache properly for specific request paths
- [NEXUS-8930¹⁶⁰] Bug outbound http connections may be immediately closed on 304 response with ETAG instead of pooled performance

Repository, UI

- [NEXUS-8834¹⁶¹] Bug service/local/repository_statuses can have performance implications with large numbers of repositories performance

Scheduled Tasks

- [NEXUS-8724¹⁶²] Improvement improve snapshot remover tasks performance by reducing potential i/o performance

Security

154 <https://issues.sonatype.org/browse/NEXUS-8849>

155 <https://issues.sonatype.org/browse/NEXUS-8746>

156 <https://issues.sonatype.org/browse/NEXUS-8737>

157 <https://issues.sonatype.org/browse/NEXUS-8829>

158 <https://issues.sonatype.org/browse/NEXUS-8837>

159 <https://issues.sonatype.org/browse/NEXUS-8676>

160 <https://issues.sonatype.org/browse/NEXUS-8930>

161 <https://issues.sonatype.org/browse/NEXUS-8834>

162 <https://issues.sonatype.org/browse/NEXUS-8724>

- [\[NEXUS-8821\]¹⁶³](#) Improvement add useful logging for siesta/wonderland/authenticate resource username mismatch

Staging,Yum

- [\[NEXUS-8911\]¹⁶⁴](#) Bug releasing a yum enabled staging repository overwrites yum metadata in release repository

Support Tools

- [\[NEXUS-8920\]¹⁶⁵](#) Improvement archived request.log name format should be more easily recognized as a log file compatibility
- [\[NEXUS-7860\]¹⁶⁶](#) Bug request.log does not include authenticated userid for certain requests
- [\[NEXUS-8913\]¹⁶⁷](#) Improvement add elapsed request time to request.log

Transport

- [\[NEXUS-8855\]¹⁶⁸](#) Bug remote.storage.outbound logging reports protocol downgrade when there isn't one
- [\[NEXUS-8856\]¹⁶⁹](#) Bug outbound ssl sockets do not timeout if the remote does not respond

UI

- [\[NEXUS-8656\]¹⁷⁰](#) Bug non proxy hosts tooltip suggests a misleading syntax

User Token

- [\[NEXUS-8036\]¹⁷¹](#) Improvement User Token Protect Content feature should return 401 with message
-

Repository Manager 2.11.3

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.11.3.

See the [complete release notes¹⁷²](#) for all resolved issues.

New and Noteworthy

Notable NPM Repository Improvements

¹⁶³ <https://issues.sonatype.org/browse/NEXUS-8821>

¹⁶⁴ <https://issues.sonatype.org/browse/NEXUS-8911>

¹⁶⁵ <https://issues.sonatype.org/browse/NEXUS-8920>

¹⁶⁶ <https://issues.sonatype.org/browse/NEXUS-7860>

¹⁶⁷ <https://issues.sonatype.org/browse/NEXUS-8913>

¹⁶⁸ <https://issues.sonatype.org/browse/NEXUS-8855>

¹⁶⁹ <https://issues.sonatype.org/browse/NEXUS-8856>

¹⁷⁰ <https://issues.sonatype.org/browse/NEXUS-8656>

¹⁷¹ <https://issues.sonatype.org/browse/NEXUS-8036>

¹⁷² <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14622>

A host of important NPM repository issues and features have been resolved - users of NPM repositories are strongly encouraged to upgrade to this release.

Nexus Lifecycle (formerly CLM) Plugin Updates

Several enhancements have been made, including the ability to test the server connection and verify application access from the user interface. Log messages are improved when problems are encountered.

NuGet Download Feeds Task Now Disabled

As mentioned first in Nexus Repository Manager 2.10 release notes, the Download NuGet Feed Task is no longer needed. A [reminder was published](#)¹⁷³ May 11, 2015. In Nexus Repository Manager 2.11.3, any existing scheduled tasks are non-operable and should be explicitly removed.

Forgot Password feature removed

Due to identified performance issues that could lead to stability problems if abused ([NEXUS-8070](#)¹⁷⁴) and limited use, the forgot password feature has been removed.

General Improvements

Browse Remote, Transport

- [[NEXUS-8083](#)¹⁷⁵] Bug Connection leak in Browse Remote when content encoding is gzip performance

Build

- [[NEXUS-8343](#)¹⁷⁶] Improvement make it easier to find the nexus software license

CLM, UI

- [[NEXUS-8147](#)¹⁷⁷] Bug Cannot initially view CLM Component Info in first record searched

Database

- [[NEXUS-8224](#)¹⁷⁸] Task Update OrientDB from 2.0.2 to 2.0.4

Licensing

- [[NEXUS-8425](#)¹⁷⁹] Bug nexus pro log may report nexus as unlicensed on startup even when it is

Maven Repository

- [[NEXUS-8221](#)¹⁸⁰] Bug Rebuild Metadata creates incorrect md5 and sha1 for maven-metadata.xml

¹⁷³ <https://support.sonatype.com/entries/93774947-NuGet-Performance-Issue-Action-Recommended>

¹⁷⁴ <https://issues.sonatype.org/browse/NEXUS-8070>

¹⁷⁵ <https://issues.sonatype.org/browse/NEXUS-8083>

¹⁷⁶ <https://issues.sonatype.org/browse/NEXUS-8343>

¹⁷⁷ <https://issues.sonatype.org/browse/NEXUS-8147>

¹⁷⁸ <https://issues.sonatype.org/browse/NEXUS-8224>

¹⁷⁹ <https://issues.sonatype.org/browse/NEXUS-8425>

¹⁸⁰ <https://issues.sonatype.org/browse/NEXUS-8221>

- [NEXUS-8178¹⁸¹] Bug artifact attributes files can contain wrong checksum values

NPM

- [NEXUS-8043¹⁸²] Bug rebuild hosted npm metadata task metadata parsing errors
- [NEXUS-8062¹⁸³] Bug impossible to delete stale hosted npm repository metadata
- [NEXUS-8389¹⁸⁴] Bug npm plugin does not work with UNC paths
- [NEXUS-8568¹⁸⁵] Bug prevent OConcurrentModificationException when expiring not found cache and updating package metadata at the same time for a npm repository
- [NEXUS-8290¹⁸⁶] Bug npm proxy attempts network access when in blocked state, results in 500 response
- [NEXUS-8555¹⁸⁷] Bug not found cache should be expired for packages with implied references from updated package metadata
- [NEXUS-8567¹⁸⁸] Bug expire cache task on npm group repositories should not abort when there is a problem processing member repositories
- [NEXUS-8039¹⁸⁹] Improvement performance advice in logs when querying npm all resource
- [NEXUS-8625¹⁹⁰] Bug Allow fetching of tarballs from incomplete NPM packages
- [NEXUS-7806¹⁹¹] Improvement npm groups should merge versions of the same package in different members compatibility
- [NEXUS-8624¹⁹²] Bug Replace NPM package root when proxying (instead of merging the content)
- [NEXUS-8570¹⁹³] Improvement improve the experience when npm package files are requested before npm metadata

NuGet

- [NEXUS-8523¹⁹⁴] Improvement deprecate and disable the "download nuget feed" scheduled task

Proxy Repository

181 <https://issues.sonatype.org/browse/NEXUS-8178>

182 <https://issues.sonatype.org/browse/NEXUS-8043>

183 <https://issues.sonatype.org/browse/NEXUS-8062>

184 <https://issues.sonatype.org/browse/NEXUS-8389>

185 <https://issues.sonatype.org/browse/NEXUS-8568>

186 <https://issues.sonatype.org/browse/NEXUS-8290>

187 <https://issues.sonatype.org/browse/NEXUS-8555>

188 <https://issues.sonatype.org/browse/NEXUS-8567>

189 <https://issues.sonatype.org/browse/NEXUS-8039>

190 <https://issues.sonatype.org/browse/NEXUS-8625>

191 <https://issues.sonatype.org/browse/NEXUS-7806>

192 <https://issues.sonatype.org/browse/NEXUS-8624>

193 <https://issues.sonatype.org/browse/NEXUS-8570>

194 <https://issues.sonatype.org/browse/NEXUS-8523>

- [NEXUS-8080¹⁹⁵] Bug concurrent request paths cause ItemNotFoundException during population of not found cache

Repository

- [NEXUS-8226¹⁹⁶] Improvement Create a task to find and fix bad checksums affected by the extra link detection check
- [NEXUS-7654¹⁹⁷] Bug Invalid/missing checksums in proxy repositories are cached forever
- [NEXUS-8004¹⁹⁸] Bug "failed content integrity validation" message when remote returns 404
- [NEXUS-8700¹⁹⁹] Bug specially crafted proxy repository GET requests can delete already cached storage paths security
- [NEXUS-8608²⁰⁰] Improvement avoid extraneous file system access checking File.lastModified in local repository storage

Repository,UI

- [NEXUS-5904²⁰¹] Improvement Remove the mirrors tab from hosted repositories

RubyGems

- [NEXUS-8186²⁰²] Bug RubyGems repository - error fetching gem from internal gem server
- [NEXUS-8144²⁰³] Bug expire proxy cache does not force fetching a new specs file from the remote
- [NEXUS-8114²⁰⁴] Bug Rubygems index fails on Windows share

Scheduled Tasks

- [NEXUS-6048²⁰⁵] Improvement improve Remove Releases from Repository task performance performance
- [NEXUS-8261²⁰⁶] Improvement Add support to set base-url-holder value for scheduled tasks

Security

195 <https://issues.sonatype.org/browse/NEXUS-8080>

196 <https://issues.sonatype.org/browse/NEXUS-8226>

197 <https://issues.sonatype.org/browse/NEXUS-7654>

198 <https://issues.sonatype.org/browse/NEXUS-8004>

199 <https://issues.sonatype.org/browse/NEXUS-8700>

200 <https://issues.sonatype.org/browse/NEXUS-8608>

201 <https://issues.sonatype.org/browse/NEXUS-5904>

202 <https://issues.sonatype.org/browse/NEXUS-8186>

203 <https://issues.sonatype.org/browse/NEXUS-8144>

204 <https://issues.sonatype.org/browse/NEXUS-8114>

205 <https://issues.sonatype.org/browse/NEXUS-6048>

206 <https://issues.sonatype.org/browse/NEXUS-8261>

- [NEXUS-8070²⁰⁷] Bug forgot password feature performs badly with external realms compatibility performance

Staging

- [NEXUS-8556²⁰⁸] Bug staging.xml validation can orphan nexus.xml repositories during startup

Staging,Yum

- [NEXUS-8130²⁰⁹] Bug Regression: Yum enabled staging repositories can't be released if target release repository contains yum metadata

Support Tools

- [NEXUS-8076²¹⁰] Bug support zip generation fails if system has mounted clearcase volumes
- [NEXUS-8077²¹¹] Bug OFF log level for Loggers visible as TRACE in the UI

Yum

- [NEXUS-8195²¹²] Bug Deadlock between yum merge metadata task and yum generate metadata task performance
-

Repository Manager 2.11.2

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.11.2.

See the [complete release notes](#)²¹³ for all resolved issues.

Release History

2.11.2-06 - Mar. 16, 2015

Nexus Repository Manager 2.11.2-03 users should upgrade - see [our article for more information](#)²¹⁴.

- includes scheduled task Reconcile Repository Checksums that fixes bad checksums created by NEXUS-8221²¹⁵

2.11.2-04 - Mar. 6, 2015

²⁰⁷ <https://issues.sonatype.org/browse/NEXUS-8070>

²⁰⁸ <https://issues.sonatype.org/browse/NEXUS-8556>

²⁰⁹ <https://issues.sonatype.org/browse/NEXUS-8130>

²¹⁰ <https://issues.sonatype.org/browse/NEXUS-8076>

²¹¹ <https://issues.sonatype.org/browse/NEXUS-8077>

²¹² <https://issues.sonatype.org/browse/NEXUS-8195>

²¹³ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14525>

²¹⁴ <https://support.sonatype.com/hc/en-us/articles/213465008>

²¹⁵ <https://issues.sonatype.org/browse/NEXUS-8221>

- includes critical preventative fix for [NEXUS-8221](#)²¹⁶ - Bug metadata generation creates incorrect md5 / sha1

2.11.2-03 - Feb. 23, 2015

- initial 2.11.2 public release

New and Noteworthy

Session Cookie Name Change

To help avoid conflicts with other web applications, the session cookie name required by the Nexus Repository Manager user interface has changed from JSESSIONID to NXSESSIONID. The cookie name is [now configurable](#)²¹⁷ in case you need to revert this change.

Session Cookie Secure Attribute Set Dynamically

If Nexus detects that the inbound request originates over HTTPS, then Nexus Repository Manager now sets the [Secure flag](#)²¹⁸ on the session cookie. If you have problems with web browser sessions when a server other than Nexus Repository Manager handles the secure connection, then make sure your fronting server is sending Nexus the X-Forwarded-Proto: https header value. See our book for [reverse proxy configuration advice](#)(see page 0).

Attribute File Access Is Now Blocked By Default

Nexus Repository Manager now blocks HTTP access to paths which include the special storage directory .nexus/attributes. Customers should avoid relying on direct access of attributes files. Some customers may have relied on accessing these files over HTTP to work around rare problems. In cases where access to these files are still required, we have [an article which explains how to restore access](#)²¹⁹.

npm Repository Scheduled Tasks Added

Two new scheduled tasks have been added for npm repositories - Backup npm metadata database and Rebuild hosted npm metadata. We advise that users of Hosted npm Repositories consider scheduling the backup task.

Java 8 Official Support

Nexus Repository Manager has worked well with Java 8 since version 2.10. In preparation for the [end of Oracle public updates for Java 7](#)²²⁰, we have updated our complete build and testing infrastructure to ensure Java 8 remains a solid platform on which to run Nexus Repository Manager. [[NEXUS-7330](#)²²¹]

General Improvements

²¹⁶ <https://issues.sonatype.org/browse/NEXUS-8221>

²¹⁷ <https://support.sonatype.com/entries/87859437>

²¹⁸ <https://www.owasp.org/index.php/SecureFlag>

²¹⁹ <https://support.sonatype.com/entries/87891468-How-To-Allow-Remote-Access-To-nexus-attributes-Files>

²²⁰ https://www.java.com/en/download/faq/java_7.xml

²²¹ <https://issues.sonatype.org/browse/NEXUS-7330>

Maven Repository

- [NEXUS-7808²²²] Bug non-snapshot versions containing SNAPSHOT can bypass a release repository Deployment Policy

NPM

- [NEXUS-7974²²³] Task Update NPM plugin to use OrientDB 2.0
- [NEXUS-7835²²⁴] Improvement provide a scheduled task to rebuild the npm metadata from storage data for hosted repositories
- [NEXUS-8072²²⁵] Improvement provide a scheduled task to backup npm metadata

OBR

- [NEXUS-7873²²⁶] Bug org.jacoco:org.jacoco.report:0.6.2.201302030002 produces OBR metadata which cannot be parsed by felix 4.4.1

Outreach

- [NEXUS-7881²²⁷] Improvement allow nexus 2.x to load outreach content by version,edition and user

Proxy Repository

- [NEXUS-7915²²⁸] Improvement support proxying maven.oracle.com²²⁹

Repository

- [NEXUS-7933²³⁰] Bug Delete repository does not work if trash and repository directories are on different file systems
- [NEXUS-7850²³¹] Improvement Ban content which could be interpreted as a "link" to be uploaded or downloaded
- [NEXUS-7834²³²] Bug Nexus allows direct access to trash directory through content URL's. security
- [NEXUS-7903²³³] Bug resuming downloads for unsatisfiable Range should respond with 416 or 200 instead of 206

222 <https://issues.sonatype.org/browse/NEXUS-7808>

223 <https://issues.sonatype.org/browse/NEXUS-7974>

224 <https://issues.sonatype.org/browse/NEXUS-7835>

225 <https://issues.sonatype.org/browse/NEXUS-8072>

226 <https://issues.sonatype.org/browse/NEXUS-7873>

227 <https://issues.sonatype.org/browse/NEXUS-7881>

228 <https://issues.sonatype.org/browse/NEXUS-7915>

229 <http://maven.oracle.com/>

230 <https://issues.sonatype.org/browse/NEXUS-7933>

231 <https://issues.sonatype.org/browse/NEXUS-7850>

232 <https://issues.sonatype.org/browse/NEXUS-7834>

233 <https://issues.sonatype.org/browse/NEXUS-7903>

- [\[NEXUS-7650\]](https://issues.sonatype.org/browse/NEXUS-7650)²³⁴ Technical Debt Upgrade to Apache Tika 1.7 for better mime detection
- [\[NEXUS-8058\]](https://issues.sonatype.org/browse/NEXUS-8058)²³⁵ Improvement block access to .nexus/attributes files by default
- [\[NEXUS-7929\]](https://issues.sonatype.org/browse/NEXUS-7929)²³⁶ Bug maven site deployments with .. in paths fail

RubyGems

- [\[NEXUS-7927\]](https://issues.sonatype.org/browse/NEXUS-7927)²³⁷ Bug Deletion of ruby gems via REST fails on Windows

Search

- [\[NEXUS-6246\]](https://issues.sonatype.org/browse/NEXUS-6246)²³⁸ Bug Checksum search fails after repair index task is run

Security

- [\[NEXUS-7889\]](https://issues.sonatype.org/browse/NEXUS-7889)²³⁹ Bug RUT Auth does not work for /content URL's
- [\[NEXUS-7882\]](https://issues.sonatype.org/browse/NEXUS-7882)²⁴⁰ Bug /service/local/authentication/logout should ask the user-agent to delete the session cookie

Security, Transport

- [\[NEXUS-5830\]](https://issues.sonatype.org/browse/NEXUS-5830)²⁴¹ Bug /service/local/status resource creates http sessions
- [\[NEXUS-7880\]](https://issues.sonatype.org/browse/NEXUS-7880)²⁴² Improvement change the default Nexus session cookie name
- [\[NEXUS-7879\]](https://issues.sonatype.org/browse/NEXUS-7879)²⁴³ Improvement generate dynamic Secure parameterized cookies based on HttpServletRequest.isSecure()

Transport

- [\[NEXUS-7877\]](https://issues.sonatype.org/browse/NEXUS-7877)²⁴⁴ Improvement prevent nexus from sending rememberMe=deleteme cookie
- [\[NEXUS-7878\]](https://issues.sonatype.org/browse/NEXUS-7878)²⁴⁵ Improvement prevent restlet resources from sending duplicate Date and Server headers

UI

- [\[NEXUS-3540\]](https://issues.sonatype.org/browse/NEXUS-3540)²⁴⁶ Bug Copyright date in "Help/About" needs to be updated

234 <https://issues.sonatype.org/browse/NEXUS-7650>

235 <https://issues.sonatype.org/browse/NEXUS-8058>

236 <https://issues.sonatype.org/browse/NEXUS-7929>

237 <https://issues.sonatype.org/browse/NEXUS-7927>

238 <https://issues.sonatype.org/browse/NEXUS-6246>

239 <https://issues.sonatype.org/browse/NEXUS-7889>

240 <https://issues.sonatype.org/browse/NEXUS-7882>

241 <https://issues.sonatype.org/browse/NEXUS-5830>

242 <https://issues.sonatype.org/browse/NEXUS-7880>

243 <https://issues.sonatype.org/browse/NEXUS-7879>

244 <https://issues.sonatype.org/browse/NEXUS-7877>

245 <https://issues.sonatype.org/browse/NEXUS-7878>

246 <https://issues.sonatype.org/browse/NEXUS-3540>

Repository Manager 2.11.1

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.11.1.

See the [complete release notes](#)²⁴⁷ for all resolved issues.

Security Advisory: Directory Traversal

This release fixes a critical security issue. All Nexus Repository Manager instances should upgrade.

[Details about this vulnerability can be found here](#)²⁴⁸.

General Improvements

Analytics

- [\[NEXUS-7731\]](#)²⁴⁹ Bug limit size of analytics event zip files at creation and submission performance
- [\[NEXUS-7739\]](#)²⁵⁰ Improvement capture generation time in analytics event-zip header.json as reference

NPM

- [\[NEXUS-7837\]](#)²⁵¹ Bug ODIRECTMEMORYVIOLATIONEXCEPTION: Negative offset was provided 500 error requesting npm metadata

NuGet

- [\[NEXUS-7732\]](#)²⁵² Bug Expiring item cache in Nuget proxy repositories causes them to auto-block frequently
- [\[NEXUS-7693\]](#)²⁵³ Bug Inconsistency in handling of repository targets for NuGet security
- [\[NEXUS-7699\]](#)²⁵⁴ Bug downloading specific versions of NuGet packages via Visual Studio package manager console fails

OBR

- [\[NEXUS-7774\]](#)²⁵⁵ Bug deadlock trying to read .meta/obr.xml after running task to merge metadata performance

Security

²⁴⁷ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14424>

²⁴⁸ <https://support.sonatype.com/entries/84705937-CVE-2014-9389-Nexus-Security-Advisory-Directory-Traversal>

²⁴⁹ <https://issues.sonatype.org/browse/NEXUS-7731>

²⁵⁰ <https://issues.sonatype.org/browse/NEXUS-7739>

²⁵¹ <https://issues.sonatype.org/browse/NEXUS-7837>

²⁵² <https://issues.sonatype.org/browse/NEXUS-7732>

²⁵³ <https://issues.sonatype.org/browse/NEXUS-7693>

²⁵⁴ <https://issues.sonatype.org/browse/NEXUS-7699>

²⁵⁵ <https://issues.sonatype.org/browse/NEXUS-7774>

- [NEXUS-7696²⁵⁶] Bug "Logs (read)" privilege doesn't give access to /service/siesta/logging/log
- [NEXUS-7839²⁵⁷] Bug Security Vulnerability: Directory Traversal security

Staging

- [NEXUS-7779²⁵⁸] Bug NullPointerException in pom validator staging rule

Support Tools

- [NEXUS-7785²⁵⁹] Improvement request.log should be able to print the Nexus authenticated userid
- [NEXUS-7646²⁶⁰] Bug CLM server password is not removed from support tool zip configuration security

Transport

- [NEXUS-7800²⁶¹] Bug add configuration to set Secure flag on cookies security

Repository Manager 2.11

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.11.

See the [complete release notes](#)²⁶² for all resolved issues.

New and Noteworthy

Nexus OSS and Pro Distributions Now Include RubyGems Support

Native [RubyGems](#)²⁶³ support has been added for hosted, proxy and groups repositories. More information in the [documentation](#)(see page 469) ([NEXUS-7754](#)²⁶⁴)

System Feeds Performance Improvement

We've fixed a bug that could have allowed the files under the `timeline` directory to grow very large and impact Nexus performance. [See our article](#)²⁶⁵ for more information on how you could be impacted and the steps to take. ([NEXUS-7671](#)²⁶⁶)

Default Security Improved for HTTPS connections

256 <https://issues.sonatype.org/browse/NEXUS-7696>

257 <https://issues.sonatype.org/browse/NEXUS-7839>

258 <https://issues.sonatype.org/browse/NEXUS-7779>

259 <https://issues.sonatype.org/browse/NEXUS-7785>

260 <https://issues.sonatype.org/browse/NEXUS-7646>

261 <https://issues.sonatype.org/browse/NEXUS-7800>

262 <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14242>

263 <http://rubygems.org/>

264 <https://issues.sonatype.org/browse/NEXUS-7754>

265 <https://sonatype.zendesk.com/entries/103598793>

266 <https://issues.sonatype.org/browse/NEXUS-7671>

Given the recent exploits discovered surrounding certain SSL protocols, Nexus Repository Manager now ships with defaults that prevent the accidental use of older SSL protocols. Further, the outbound protocols and ciphersuites used by Nexus Repository Manager are now configurable should you wish to lock this down further. ([NEXUS-7594](#)²⁶⁷, [NEXUS-7659](#)²⁶⁸). We have an article covering the various options for configuring Nexus Repository Manager HTTPS protocols²⁶⁹ and cipher suites²⁷⁰.

YUM Repository Format Improvements

YUM users are encouraged to upgrade to this release. Nexus Repository Manager has performance improvements of our YUM repository format support. The changes include:

- createrepo version 0.9.9 and greater / mergerepo 0.1 and greater is now required
- optional sqlite database files are no longer generated for YUM metadata
- better reporting and validation of YUM configuration changes
- critical bug fixes for YUM proxy repositories

Known Issues

There has been a regression in the "pom validation" staging rule: [NEXUS-7779](#)²⁷¹

The "pom validation" staging rule is used to make sure pom files meet the standards required to be published to Maven Central. If you are using this rule you should avoid upgrading to 2.11.0. We will be releasing a new 2.11.x version soon which fixes this problem.

General Improvements

Database

- [[NEXUS-7563](#)²⁷²] Improvement h2 database locking mechanism changed to FS from SOCKET

Installer

- [[NEXUS-7625](#)²⁷³] Bug nexus pro trial installer dmg identity cannot be confirmed on OSX Yosemite

LDAP

- [[NEXUS-6881](#)²⁷⁴] Bug comma in group membership attribute value breaks static LDAP group mapping
- [[NEXUS-5840](#)²⁷⁵] Bug DN values containing "," (comma) can result in improperly escaped LDAP filters

NPM

²⁶⁷ <https://issues.sonatype.org/browse/NEXUS-7594>

²⁶⁸ <https://issues.sonatype.org/browse/NEXUS-7659>

²⁶⁹ <https://support.sonatype.com/entries/102005383-How-to-Configure-HTTPS-Protocols-Used-By-Nexus>

²⁷⁰ <https://support.sonatype.com/entries/104982986-How-to-Configure-HTTPS-Cipher-Suites-Used-By-Nexus>

²⁷¹ <https://issues.sonatype.org/browse/NEXUS-7779>

²⁷² <https://issues.sonatype.org/browse/NEXUS-7563>

²⁷³ <https://issues.sonatype.org/browse/NEXUS-7625>

²⁷⁴ <https://issues.sonatype.org/browse/NEXUS-6881>

²⁷⁵ <https://issues.sonatype.org/browse/NEXUS-5840>

- [NEXUS-7614²⁷⁶] Bug npm install cmd can trigger nexus NPE and 500 status when remote returns non-standard fields and stub attachments
- [NEXUS-7616²⁷⁷] Bug requesting metadata for uncached npm package metadata sends two requests to the remote
- [NEXUS-7609²⁷⁸] Bug npm attribute storage corruption can lead to http 500 responses
- [NEXUS-7486²⁷⁹] Bug configuring staging profile to release to npm hosted repo should not be allowed
- [NEXUS-6898²⁸⁰] Bug npm hosted repository should maintain "time" field on deploys

P2

- [NEXUS-6762²⁸¹] Bug Deadlock while retrieving artifact from p2 repository
- [NEXUS-7598²⁸²] Bug P2 related requests waiting for locks never return from Browse Storage

Proxy Repository

- [NEXUS-7628²⁸³] Bug deleting empty paths under storage does not expire NFC for child paths

Repository

- [NEXUS-7603²⁸⁴] Bug file content validation fails for application/x-msdownload jar files
- [NEXUS-6310²⁸⁵] Technical Debt Upgrade to Tika 1.6
- [NEXUS-7760²⁸⁶] Bug recursive trash directories such as ./nexus/trash/.nexus/trash can consume large amounts of disk

Repository,UI

- [NEXUS-7561²⁸⁷] Bug Show "Browse Storage", "Browse Remote", "Mirrors", <dependencyManagement/> in "Summary" tab based on repository type

RubyGems

- [NEXUS-7627²⁸⁸] Bug Nexus BUG in "rubygems-proxy" ItemNotFoundException during cache
- [NEXUS-7754²⁸⁹] New Feature include official rubygems repositories support with Nexus bundles

²⁷⁶ <https://issues.sonatype.org/browse/NEXUS-7614>

²⁷⁷ <https://issues.sonatype.org/browse/NEXUS-7616>

²⁷⁸ <https://issues.sonatype.org/browse/NEXUS-7609>

²⁷⁹ <https://issues.sonatype.org/browse/NEXUS-7486>

²⁸⁰ <https://issues.sonatype.org/browse/NEXUS-6898>

281 <https://issues.sonatype.org/browse/NEXUS-6762>282 <https://issues.sonatype.org/browse/NEXUS-7598>283 <https://issues.sonatype.org/browse/NEXUS-7628>284 <https://issues.sonatype.org/browse/NEXUS-7603>285 <https://issues.sonatype.org/browse/NEXUS-6310>286 <https://issues.sonatype.org/browse/NEXUS-7760>287 <https://issues.sonatype.org/browse/NEXUS-7561>288 <https://issues.sonatype.org/browse/NEXUS-7627>289 <https://issues.sonatype.org/browse/NEXUS-7754>

SSL

- [NEXUS-7652²⁹⁰] Bug SSL certificates added using load from server option only use direct socket connection

Security

- [NEXUS-7595²⁹¹] Improvement disable insecure SSL protocols by default in jetty HTTPS sample configuration

Support Tools

- [NEXUS-6900²⁹²] Bug Nexus OSS support bundle does not include ldap.xml file

System Feeds

- [NEXUS-7671²⁹³] Bug Purge Nexus Timeline task calculates wrong purge "window" days performance

Transport

- [NEXUS-7575²⁹⁴] Bug User-Agent header not sent for CONNECT to httpS remotes
- [NEXUS-7594²⁹⁵] Improvement allow configuring https.protocols and https.cipherSuites on Nexus outbound HTTP client connections
- [NEXUS-7659²⁹⁶] Improvement disable SSLv3 for outbound requests by default

User Token

- [NEXUS-6887²⁹⁷] Bug If all user tokens are cleared this should be logged at INFO

Yum

- [NEXUS-6680²⁹⁸] Improvement Add "full rebuild" option to generate yum scheduled task
- [NEXUS-6899²⁹⁹] Bug The yum versions REST resource is only updated at startup
- [NEXUS-6790³⁰⁰] Task Child group repository with only one yum enabled member breaks yum metadata merge

²⁹⁰ <https://issues.sonatype.org/browse/NEXUS-7652>

²⁹¹ <https://issues.sonatype.org/browse/NEXUS-7595>

²⁹² <https://issues.sonatype.org/browse/NEXUS-6900>

²⁹³ <https://issues.sonatype.org/browse/NEXUS-7671>

²⁹⁴ <https://issues.sonatype.org/browse/NEXUS-7575>

²⁹⁵ <https://issues.sonatype.org/browse/NEXUS-7594>

²⁹⁶ <https://issues.sonatype.org/browse/NEXUS-7659>

²⁹⁷ <https://issues.sonatype.org/browse/NEXUS-6887>

²⁹⁸ <https://issues.sonatype.org/browse/NEXUS-6680>

²⁹⁹ <https://issues.sonatype.org/browse/NEXUS-6899>

³⁰⁰ <https://issues.sonatype.org/browse/NEXUS-6790>

- [NEXUS-6801³⁰¹] Improvement prevent createrepo/mergerepo from creating sqlite rpm metadata performance
 - [NEXUS-6251³⁰²] Improvement If yum metadata generation fails the output of the createrepo/mergerepo command should always be logged
 - [NEXUS-6702³⁰³] Bug Yum metadata for proxy repositories should refer to the URL of the source Nexus instance
 - [NEXUS-7596³⁰⁴] Improvement programmatically enforce minimum requirements for yum configuration including debug messages
-

Repository Manager 2.10

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.10.

See the [complete release notes](#)³⁰⁵ for all resolved issues.

New and Noteworthy

NPM Registry Support

Nexus Repository Manager Professional and Nexus Repository Manager OSS now include official support for hosted, proxy and group repositories compatible with npm. See the [npm section](#)(see page 462) for more information.

Note: Nexus Repository Manager npm support requires an npm client version of 1.4 or above.

General Improvements

Build Tooling

- [NEXUS-6841³⁰⁶] Improvement Improvements to spice-zapper

Build Tooling, Staging

- [NEXUS-6845³⁰⁷] Improvement log full content url at INFO for created staging repositories
- [NEXUS-6757³⁰⁸] Bug nexus-staging:deploy-staged fails with NullPointerException: BUG: finalizeDeploy invoked before deployPerModule?

301 <https://issues.sonatype.org/browse/NEXUS-6801>

302 <https://issues.sonatype.org/browse/NEXUS-6251>

303 <https://issues.sonatype.org/browse/NEXUS-6702>

304 <https://issues.sonatype.org/browse/NEXUS-7596>

305 <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14220>

306 <https://issues.sonatype.org/browse/NEXUS-6841>

307 <https://issues.sonatype.org/browse/NEXUS-6845>

308 <https://issues.sonatype.org/browse/NEXUS-6757>

- [NEXUS-6728³⁰⁹] Bug staging build tools zapper client does not use pre-emptive auth (unlike Jersey based client)
- [NEXUS-6836³¹⁰] Bug maven staging plugin ArrayIndexOutOfBoundsException: -1 on release using Java 8

Maven Repository

- [NEXUS-6731³¹¹] Bug Artifact Upload with classifier-only artifacts doesn't create maven-metadata.xml at GA level

NPM,Repository

- [NEXUS-5852³¹²] New Feature Add Common JS Package Registry / node.js / NPM support

Proxy Repository

- [NEXUS-6838³¹³] Bug HTTP client Server Name Indication support broken

Staging

- [NEXUS-6818³¹⁴] Bug build promotion staging repository members view does not display members
- [NEXUS-6673³¹⁵] Improvement Staging repository listing log spam when repository is not found

System Feeds

- [NEXUS-6763³¹⁶] Bug broken files feed spam - prefixes.txt has no remote checksum in repository central

UI

- [NEXUS-6786³¹⁷] Improvement provide method to exclude specific User-Agent values from browser detection

Repository Manager 2.9.2

These notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.9.2.

309 <https://issues.sonatype.org/browse/NEXUS-6728>

310 <https://issues.sonatype.org/browse/NEXUS-6836>

311 <https://issues.sonatype.org/browse/NEXUS-6731>

312 <https://issues.sonatype.org/browse/NEXUS-5852>

313 <https://issues.sonatype.org/browse/NEXUS-6838>

314 <https://issues.sonatype.org/browse/NEXUS-6818>

315 <https://issues.sonatype.org/browse/NEXUS-6673>

316 <https://issues.sonatype.org/browse/NEXUS-6763>

317 <https://issues.sonatype.org/browse/NEXUS-6786>

See the [complete release notes](#)³¹⁸ for all resolved issues.

New and Noteworthy

NuGet Support Performance Improvements

- [NEXUS-6852³¹⁹, NEXUS-6853³²⁰] All users of Nexus Repository Manager Nuget plugin are encouraged to upgrade in order to take advantage of several performance improvements.

Default max heap size increased for Nexus Repository Manager OSS

- [NEXUS-6824³²¹] Due to new features entering Nexus Repository Manager OSS, we have increased the default JVM max heap size for the bundle distribution to match Nexus Repository Manager Professional (768MB)

General Improvements

Bootstrap

- [NEXUS-6824³²²] **Improvement** Increase default heap size for oss, keep in sync with pro

Installer

- [NEXUS-6873³²³] **Bug** trial bundle config includes procurement.xml
- [NEXUS-6872³²⁴] **Bug** trial bundle does not have central repo in public group
- [NEXUS-6874³²⁵] **Bug** trial bundle uses wrong default temp dir

NuGet

- [NEXUS-6852³²⁶] **Bug** Querying NuGet proxy with no \$top parameter causes excessive caching
- [NEXUS-6822³²⁷] **Bug** Improve sorting of NuGet results when no order is specified
- [NEXUS-6853³²⁸] **Bug** NuGet \$count queries can lead to excessive caching

Secure Central

³¹⁸ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14249>

³¹⁹ <https://issues.sonatype.org/browse/NEXUS-6852>

³²⁰ <https://issues.sonatype.org/browse/NEXUS-6853>

³²¹ <https://issues.sonatype.org/browse/NEXUS-6824>

³²² <https://issues.sonatype.org/browse/NEXUS-6824>

³²³ <https://issues.sonatype.org/browse/NEXUS-6873>

³²⁴ <https://issues.sonatype.org/browse/NEXUS-6872>

³²⁵ <https://issues.sonatype.org/browse/NEXUS-6874>

³²⁶ <https://issues.sonatype.org/browse/NEXUS-6852>

³²⁷ <https://issues.sonatype.org/browse/NEXUS-6822>

³²⁸ <https://issues.sonatype.org/browse/NEXUS-6853>

- [NEXUS-6865³²⁹] **Bug** do not add enabled secure central capability by default on installations without legacy secure central url

User Token

- [NEXUS-6848³³⁰] **Bug** Exception deleting user when User-token feature is not enabled
-

Repository Manager 2.9.1

These notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.9.1.

See the [complete release notes³³¹](#) for all resolved issues.

New and Noteworthy

Security Update

This release includes an important security update in the HTTP client library used by Nexus Repository Manager and the Maven and Ant tasks used with Nexus Repository Manager. We recommend all Nexus Repository Manager instances upgrade.

Maven users should upgrade [nexus-staging-maven-plugin](#) to version 1.6.3³³² and [nexus-m2settings-maven-plugin](#) to version 1.6.3³³³.

Ant users should upgrade [nexus-staging-ant-tasks](#) to version 1.6.2³³⁴.

General Improvements

Maven Repository

- [NEXUS-6731³³⁵] Bug Artifact Upload with classifier-only artifacts doesn't create maven-metadata.xml at GA level

Staging

- [NEXUS-6818³³⁶] Bug build promotion staging repository members view does not display members

Transport

329 <https://issues.sonatype.org/browse/NEXUS-6865>

330 <https://issues.sonatype.org/browse/NEXUS-6848>

331 <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14237>

332 <http://search.maven.org/#artifactdetails%7Corg.sonatype.plugins%7Cnexus-staging-maven-plugin%7C1.6.3%7Cmaven-plugin>

333 <http://search.maven.org/#artifactdetails%7Corg.sonatype.plugins%7Cnexus-m2settings-maven-plugin%7C1.6.3%7Cmaven-plugin>

334 <http://search.maven.org/#artifactdetails%7Corg.sonatype.nexus.ant%7Cnexus-staging-ant-tasks%7C1.6.2%7Cjar>

335 <https://issues.sonatype.org/browse/NEXUS-6731>

336 <https://issues.sonatype.org/browse/NEXUS-6818>

-
- [NEXUS-6780³³⁷] Bug Upgrade http client to 4.3.5 security

Repository Manager 2.9

These notes are a compilation of new features and significant bug fixes for Repository Manager 2.9.

See the [complete release notes](#)³³⁸ for all resolved issues.

New and Noteworthy

Default Repository URLs Have Changed

Sonatype has made the [much publicized change of making SSL access to the Central Repository free for everyone](#)³³⁹. Additionally, we have changed the default URLs for the Apache Snapshots and Codehaus Snapshots repositories to be https.

There is no automatic upgrade step which changes these URLs for you, but we encourage you to change your existing repository URLs manually [as described in the support article](#)³⁴⁰. [NEXUS-6737³⁴¹]

Nexus Repository Manager OSS Includes Support For NuGet Repositories

Sonatype now includes NuGet repository support in Nexus Repository Manager OSS. [Nuget support is covered in the documentation](#)(see page 444). [NEXUS-6738³⁴²]

Additional Upgrade Steps

During upgrade from previous Nexus Repository Manager Professional versions, Nexus Repository Manager will migrate the NuGet feed database to a new format. Therefore as standard practice, it is recommended that users back up this database under \$NEXUS_WORK/nuget before upgrading. This should be done while the server is not running. [NEXUS-6700³⁴³]

Note: This one time database migration may take considerable time for large NuGet databases.

If you have any "Download NuGet Feed" tasks scheduled to run in your Nexus Repository Manager instance Sonatype recommends you remove them, this task isn't needed in 2.9.

General Improvements

Analytics

- [NEXUS-6669³⁴⁴] Bug analytics does not record staging operations

³³⁷ <https://issues.sonatype.org/browse/NEXUS-6780>

³³⁸ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14123>

³³⁹ <http://blog.sonatype.com/2014/08/https-support-launching-now/>

³⁴⁰ <https://support.sonatype.com/entries/22527071-Configuring-Nexus-for-Secure-Access-to-Maven-Central>

³⁴¹ <https://issues.sonatype.org/browse/NEXUS-6737>

³⁴² <https://issues.sonatype.org/browse/NEXUS-6738>

³⁴³ <https://issues.sonatype.org/browse/NEXUS-6700>

³⁴⁴ <https://issues.sonatype.org/browse/NEXUS-6669>

- [NEXUS-6687³⁴⁵] Bug Analytics EventData.timestamp field not really timestamp

Bootstrap

- [NEXUS-6682³⁴⁶] Bug Wrong exit status in Java Service Wrapper sh script

Capabilities, Secure Central

- [NEXUS-6689³⁴⁷] Bug Exception thrown during secure central capability construction can put it into an invalid state

Configuration, LDAP

- [NEXUS-6645³⁴⁸] Bug Problem with authentication in Nexus with RutAuthentication plugin and LDAP combination

Configuration, Proxy Repository

- [NEXUS-6692³⁴⁹] Bug add more robust proxy repository URL validation

Crowd

- [NEXUS-6646³⁵⁰] Bug Crowd plugin that is not configured logs IllegalStateException when viewing security roles

LDAP

- [NEXUS-6652³⁵¹] Bug LDAP OSS to Pro upgrade bug, multiple configuration fields are not migrated
- [NEXUS-6664³⁵²] Bug upgrade from previously upgraded 2.8 OSS to Pro ldap configuration can fail subsequent upgrades

LDAP, Security

- [NEXUS-6479³⁵³] Bug align discrepancies between "user manager" and "realm" names

Licensing

- [NEXUS-6500³⁵⁴] Bug Unable to install a license after a non-trial license expires

Maven Repository, Secure Central

345 <https://issues.sonatype.org/browse/NEXUS-6687>

346 <https://issues.sonatype.org/browse/NEXUS-6682>

347 <https://issues.sonatype.org/browse/NEXUS-6689>

348 <https://issues.sonatype.org/browse/NEXUS-6645>

349 <https://issues.sonatype.org/browse/NEXUS-6692>

350 <https://issues.sonatype.org/browse/NEXUS-6646>

351 <https://issues.sonatype.org/browse/NEXUS-6652>

352 <https://issues.sonatype.org/browse/NEXUS-6664>

353 <https://issues.sonatype.org/browse/NEXUS-6479>

354 <https://issues.sonatype.org/browse/NEXUS-6500>

- [NEXUS-6737³⁵⁵] Improvement default central repository url changed to <https://repo1.maven.org/maven2/>

NuGet

- [NEXUS-6651³⁵⁶] Improvement allow direct request for NuGet artifact through proxy repository if artifact is not already cached in the local feed performance
- [NEXUS-6650³⁵⁷] Improvement Nuget: return 403 with reason instead of 404 when redirection fails through a proxy server
- [NEXUS-6700³⁵⁸] Improvement NuGet Database Migration
- [NEXUS-6738³⁵⁹] Improvement Include support for NuGet repositories in Nexus OSS

Proxy Repository

- [NEXUS-6622³⁶⁰] Bug Nexus should handle Content-Type which includes charset=binary better
- [NEXUS-6701³⁶¹] Bug Archiva repos are auto-blocked due to Last-Modified header

Proxy Repository,REST

- [NEXUS-6647³⁶²] Improvement ?describe should include estimate when cache will expire for not found artifacts

Repository

- [NEXUS-6653³⁶³] Improvement imrpove expire metadata cache performance performance
- [NEXUS-6537³⁶⁴] Task File deletion does a copy/delete to trash rather than a move performance

Search

- [NEXUS-6666³⁶⁵] Bug Download indexes task should not process out of service repositories performance

Search,Staging

- [NEXUS-6677³⁶⁶] Bug Artifacts from removed member are never removed from group repository published indexes

355 <https://issues.sonatype.org/browse/NEXUS-6737>

356 <https://issues.sonatype.org/browse/NEXUS-6651>

357 <https://issues.sonatype.org/browse/NEXUS-6650>

358 <https://issues.sonatype.org/browse/NEXUS-6700>

359 <https://issues.sonatype.org/browse/NEXUS-6738>

360 <https://issues.sonatype.org/browse/NEXUS-6622>

361 <https://issues.sonatype.org/browse/NEXUS-6701>

362 <https://issues.sonatype.org/browse/NEXUS-6647>

363 <https://issues.sonatype.org/browse/NEXUS-6653>

364 <https://issues.sonatype.org/browse/NEXUS-6537>

365 <https://issues.sonatype.org/browse/NEXUS-6666>

366 <https://issues.sonatype.org/browse/NEXUS-6677>

Smart Proxy

- [NEXUS-6071]³⁶⁷ Improvement Smart Proxy secure connector capability should validate fields

Staging

- [NEXUS-6448]³⁶⁸ Bug Releasing a staging repository doesn't take target repository deployment policy into account
- [NEXUS-6658]³⁶⁹ Improvement Add a mode to staging which allows explicit profile selection, and also enforces repository targets

Support Tools

- [NEXUS-6668]³⁷⁰ Improvement include all referenced jetty configuration files in support zip
- [NEXUS-6621]³⁷¹ Improvement include request.log in support bundle
- [NEXUS-6617]³⁷² Bug Support Bundle can include unprotected HTTP proxy server password security

Transport

- [NEXUS-6626]³⁷³ Task upgrade to HTTP client 4.3.4
-

Repository Manager 2.8.1

These notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.8.1.

See the [complete release notes](#)³⁷⁴ for all resolved issues.

New and Noteworthy

Temporary Directory Handled Consistently

It was possible that the temporary directory used by Nexus Repository Manager was indeterminate for some operations. The preferred default temporary directory was \${NEXUS_WORK}/tmp, but since that value cannot be reliably set by default before boot, Nexus Repository Manager now defaults the temporary directory used

³⁶⁷ <https://issues.sonatype.org/browse/NEXUS-6071>

³⁶⁸ <https://issues.sonatype.org/browse/NEXUS-6448>

³⁶⁹ <https://issues.sonatype.org/browse/NEXUS-6658>

³⁷⁰ <https://issues.sonatype.org/browse/NEXUS-6668>

³⁷¹ <https://issues.sonatype.org/browse/NEXUS-6621>

³⁷² <https://issues.sonatype.org/browse/NEXUS-6617>

³⁷³ <https://issues.sonatype.org/browse/NEXUS-6626>

³⁷⁴ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=14033>

as \${NEXUS_HOME}/tmp. This may impact the disk space requirements for some installations. See the article [discussing the temporary directory](#)³⁷⁵ for more information. [NEXUS-6595](#)³⁷⁶

Smart Proxy Performance Improvements

Working closely with our customers, we have identified some Smart Proxy performance issues in certain circumstances. Smart Proxy users should consider upgrading to benefit from these changes. [NEXUS-6570](#)³⁷⁷, [NEXUS-6600](#)³⁷⁸

Notable: Turn on strict URI matching in restlet

Nexus Repository Manager restlet now uses strict URI matching as the default. This may impact the functionality of some third party plugins. If you are using plugins not supplied by Sonatype you should test these against 2.8.1 before upgrading, it is possible (although unlikely) that REST endpoints in these plugins may not work correctly in 2.8.1. [NEXUS-6630](#)³⁷⁹

General Improvements

Bootstrap

- [\[NEXUS-6555\]](#)³⁸⁰ Bug SystemProperty plexus.nexus-work not working in war-Deployment
- [\[NEXUS-6352\]](#)³⁸¹ Bug explicitly set java.io.tmpdir not always respected and tmp dir not under nexus work
- [\[NEXUS-6595\]](#)³⁸² Bug Revert tmp dir handling, only use -Djava.io.tmpdir to set this value in wrapper.conf compatibility

Build Tooling, Staging

- [\[NEXUS-6538\]](#)³⁸³ Bug nexus-staging-maven-plugin: proxying to https host fails with ProxyInfo and BaseUrl protocols does not align!

CLM, Transport

- [\[NEXUS-6607\]](#)³⁸⁴ Bug CLM component details fails when going through authenticated http proxy

Configuration

³⁷⁵ <https://support.sonatype.com/entries/71444873-How-to-configure-the-Nexus-temporary-directory>

³⁷⁶ <https://issues.sonatype.org/browse/NEXUS-6595>

³⁷⁷ <https://issues.sonatype.org/browse/NEXUS-6570>

³⁷⁸ <https://issues.sonatype.org/browse/NEXUS-6600>

³⁷⁹ <https://issues.sonatype.org/browse/NEXUS-6630>

³⁸⁰ <https://issues.sonatype.org/browse/NEXUS-6555>

³⁸¹ <https://issues.sonatype.org/browse/NEXUS-6352>

³⁸² <https://issues.sonatype.org/browse/NEXUS-6595>

³⁸³ <https://issues.sonatype.org/browse/NEXUS-6538>

³⁸⁴ <https://issues.sonatype.org/browse/NEXUS-6607>

- [NEXUS-6545³⁸⁵] Bug request.log is rotated to NEXUS_HOME instead of NEXUS_WORK/logs compatibility
- [NEXUS-6553³⁸⁶] Improvement limit nexus.log time based log rolling to max history of 90 days instead of infinite compatibility

Licensing

- [NEXUS-6514³⁸⁷] Improvement Add commercial license fingerprint value to the System Information report

Maven Repository

- [NEXUS-6510³⁸⁸] Bug ERROR log message from M2Repository - LocalStorageException FileAlreadyExistsException does not include root cause throwable
- [NEXUS-6560³⁸⁹] Bug uncompressed archives with HTML file as an entry can be rejected by file content validation

Maven Repository, Smart Proxy

- [NEXUS-6600³⁹⁰] Bug Expire cache walker blocks subsequent NFC expirations performance

NuGet

- [NEXUS-6530³⁹¹] Improvement Archive browser doesn't work for NuGet .nupkg packages

OBR, Smart Proxy

- [NEXUS-6564³⁹²] Bug OBR virtual repository metadata update fails when triggered by smart proxy download immediately

Procurement

- [NEXUS-6562³⁹³] Bug Regression: File content validation still enabled for procurement, no way to disable
- [NEXUS-6520³⁹⁴] Improvement Remove procurement from trial eval guide

REST

³⁸⁵ <https://issues.sonatype.org/browse/NEXUS-6545>

³⁸⁶ <https://issues.sonatype.org/browse/NEXUS-6553>

³⁸⁷ <https://issues.sonatype.org/browse/NEXUS-6514>

³⁸⁸ <https://issues.sonatype.org/browse/NEXUS-6510>

³⁸⁹ <https://issues.sonatype.org/browse/NEXUS-6560>

³⁹⁰ <https://issues.sonatype.org/browse/NEXUS-6600>

³⁹¹ <https://issues.sonatype.org/browse/NEXUS-6530>

³⁹² <https://issues.sonatype.org/browse/NEXUS-6564>

³⁹³ <https://issues.sonatype.org/browse/NEXUS-6562>

³⁹⁴ <https://issues.sonatype.org/browse/NEXUS-6520>

- [NEXUS-6542³⁹⁵] Bug Maven model classes are missing from xstream whitelist configuration compatibility

REST/UI

- [NEXUS-6539³⁹⁶] Bug Forced Base URL value different from the incoming request URL can break UI / RESTLET based resources

Security

- [NEXUS-6630³⁹⁷] Improvement Turn on strict URI matching in restlet
- [NEXUS-6549³⁹⁸] Bug Browse Storage/Index can block access to folders or files that start with "content"
- [NEXUS-6554³⁹⁹] Bug XSS vulnerability in outreach plugin
- [NEXUS-6569⁴⁰⁰] Improvement Add X-Frame-Options header to avoid clickjacking

Smart Proxy

- [NEXUS-6570⁴⁰¹] Bug Smart Proxy download immediately option for checksum updates sends duplicate download requests for main artifact performance

Support Tools

- [NEXUS-6241⁴⁰²] Improvement Add end-user instructions for support ticket creation in Support Tools UI

Transport

- [NEXUS-6526⁴⁰³] Improvement add request context to org.eclipse.jetty.io.EofException to aid determining the root cause
- [NEXUS-6501⁴⁰⁴] Bug inbound request URL syntax validity should be checked and fail fast

Yum

- [NEXUS-6582⁴⁰⁵] Bug Yum Generate Metadata does not detect new rpms added on filesystem
- [NEXUS-6583⁴⁰⁶] Bug Yum Generate Metadata only allows a single RPM per Directory

³⁹⁵ <https://issues.sonatype.org/browse/NEXUS-6542>

³⁹⁶ <https://issues.sonatype.org/browse/NEXUS-6539>

³⁹⁷ <https://issues.sonatype.org/browse/NEXUS-6630>

³⁹⁸ <https://issues.sonatype.org/browse/NEXUS-6549>

³⁹⁹ <https://issues.sonatype.org/browse/NEXUS-6554>

⁴⁰⁰ <https://issues.sonatype.org/browse/NEXUS-6569>

⁴⁰¹ <https://issues.sonatype.org/browse/NEXUS-6570>

⁴⁰² <https://issues.sonatype.org/browse/NEXUS-6241>

⁴⁰³ <https://issues.sonatype.org/browse/NEXUS-6526>

⁴⁰⁴ <https://issues.sonatype.org/browse/NEXUS-6501>

⁴⁰⁵ <https://issues.sonatype.org/browse/NEXUS-6582>

⁴⁰⁶ <https://issues.sonatype.org/browse/NEXUS-6583>

Repository Manager 2.8.0

These release notes are a compilation of new features and significant bug fixes for Repository Manager 2.8.

See the [here](#)⁴⁰⁷ for all issues fixed in this release.

New and Noteworthy

Influence Nexus Repository Manager Product Development Using Analytics

As part of the process to help us make Nexus Repository Manager better, Administrators can optionally choose to send anonymous REST API usage data to Sonatype. This data will help us decide what features are most important to you and will influence product development for Nexus 3.0 and beyond. The data can be inspected and even exported for your own use as well.

To enable analytics on your instance go to "Administration/Analytics" in the Nexus Repository Manager UI.

Enhanced Sonatype CLM Integration

Nexus Repository Manager Professional now supports deep integration with Sonatype CLM ([IQ Server](#)⁴⁰⁸). Sonatype CLM users can see full component information containing popularity, license data, security vulnerabilities, and policy violations. This information can be compared against all other available versions of a give component:



Detailed information about particular component versions can now be viewed directly in Nexus Repository Manager:



Note: You'll need to upgrade your CLM server to version 1.10.2 or higher to use this new functionality. You can download the latest version [here](#)⁴⁰⁹.

Repository Health Check Improvements

- Simplified configuration of Repository Health Check
- Health check can now be enabled for all types of proxy repositories supported by Nexus (Maven, P2, NuGet, OBR, Yum, etc.)
- Improved UI in search results:



Bundled Jetty Configuration is Simpler and Extensible

Previously, Nexus only supported loading a single Jetty configuration file, typically at \${NEXUS_HOME}/conf/jetty.xml, to configure the builtin Jetty instance. Now Nexus Repository Manager can be launched with

⁴⁰⁷ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10001&version=13730>

⁴⁰⁸ <https://help.sonatype.com/display/NXIQ>

⁴⁰⁹ <https://help.sonatype.com/display/NXIQ/Download+and+Compatibility>

multiple Jetty configuration files as launcher parameters. This resembles the default configuration merging behaviour that Jetty users are used to. All files at \${NEXUS_HOME}/conf/jetty-*.xml can be used as is or customized with properties specified in NEXUS_HOME/conf/nexus.properties. [More Information](#)^{410. [NEXUS-6153](#)⁴¹¹}

Request Access Logging Enabled by Default

Nexus Repository Manager now ships with inbound request logging enabled by default, logging to a separate log file than the main Nexus Repository Manager log. Access logs have proved very useful for our customers to diagnose problems and understand load characteristics. While these logs will consume additional disk space, log rotation can help ensure a reasonable retention policy. [More information](#)^{412. [NEXUS-6472](#)⁴¹³}

Note: Upgrades From Nexus Repository Manager 1.x to Nexus 2.8 Require Additional Upgrade Step

Sonatype Nexus is undergoing some major enhancements this year. As a preparatory step, automatic configuration upgrades from Nexus Repository Manager 1.x series to Nexus Repository Manager 2.8 and newer is no longer supported. Direct upgrade of Nexus Repository Manager versions 2.0 to 2.7.x continue to be supported. Upgrades of 1.x versions must first upgrade to the latest 2.7.x version, then upgrade to Nexus Repository Manager 2.8 or newer. [NEXUS-6099](#)⁴¹⁴

Internet Explorer 8 Support is Deprecated

IE 8 works with Nexus Repository Manager 2.8 with only a few minor issues. However Nexus Repository Manager 3.0 will be using a new version of our UI toolkit which does not support IE8. Consequentially support for IE8 will be ending after the 2.8.x Nexus Repository Manager series is complete. [More information](#)^{415. [NEXUS-6330](#)⁴¹⁶}

General Fixes and Improvements

Bootstrap

- [\[NEXUS-6147\]](#)⁴¹⁷ Improvement application properties source should print at DEBUG only

Build

- [\[NEXUS-6112\]](#)⁴¹⁸ Task Upgrade to Sonatype/Sisu 2.5.0 (legacy runtime wrapper around Eclipse/Sisu 0.1.0) compatibility

Build Tooling, Staging

⁴¹⁰ <https://support.sonatype.com/entries/48408588-Customizing-Jetty-Using-Multiple-Configuration-Files>

⁴¹¹ <https://issues.sonatype.org/browse/NEXUS-6153>

⁴¹² <https://support.sonatype.com/entries/21902551>

⁴¹³ <https://issues.sonatype.org/browse/NEXUS-6472>

⁴¹⁴ <https://issues.sonatype.org/browse/NEXUS-6099>

⁴¹⁵ <https://support.sonatype.com/entries/22926682>

⁴¹⁶ <https://issues.sonatype.org/browse/NEXUS-6330>

⁴¹⁷ <https://issues.sonatype.org/browse/NEXUS-6147>

⁴¹⁸ <https://issues.sonatype.org/browse/NEXUS-6112>

- [\[NEXUS-6182\]](#)⁴¹⁹ Improvement Add parallel build support to nexus-maven-staging-plugin
- [\[NEXUS-6164\]](#)⁴²⁰ Improvement Add ability to disable SSL certificate checks to nexus maven plugins

Capabilities, Security

- [\[NEXUS-6269\]](#)⁴²¹ Bug UI: Capabilities Admin gets 403 response trying to read Capability Types

Configuration

- [\[NEXUS-6154\]](#)⁴²² Improvement add consistent log timestamps including timezone offset and ms resolution
- [\[NEXUS-6102\]](#)⁴²³ Bug Replace dead MimeUtil2 with Apache Tika
- [\[NEXUS-6153\]](#)⁴²⁴ Improvement allow inlining jetty.xml config files as nexus app parameters
- [\[NEXUS-6319\]](#)⁴²⁵ Bug Typo in error message: "instantianate"

Crowd, Security

- [\[NEXUS-6132\]](#)⁴²⁶ Bug nexus security diagnostic queries crowd realm even when it is not configured
- [\[NEXUS-6243\]](#)⁴²⁷ Bug cache already exists "enterprise-ldap" when searching for crowd user

Maven Repository

- [\[NEXUS-6298\]](#)⁴²⁸ Bug maven-metadata.xml file merged incorrectly

NuGet

- [\[NEXUS-6503\]](#)⁴²⁹ Improvement optimizations for large nuget repository databases with slow queries for latest version

P2

- [\[NEXUS-6311\]](#)⁴³⁰ Task Upgrade tycho dependencies in p2 for CLM compliance compatibility

Procurement, Routing

419 <https://issues.sonatype.org/browse/NEXUS-6182>
420 <https://issues.sonatype.org/browse/NEXUS-6164>
421 <https://issues.sonatype.org/browse/NEXUS-6269>
422 <https://issues.sonatype.org/browse/NEXUS-6154>
423 <https://issues.sonatype.org/browse/NEXUS-6102>
424 <https://issues.sonatype.org/browse/NEXUS-6153>
425 <https://issues.sonatype.org/browse/NEXUS-6319>
426 <https://issues.sonatype.org/browse/NEXUS-6132>
427 <https://issues.sonatype.org/browse/NEXUS-6243>
428 <https://issues.sonatype.org/browse/NEXUS-6298>
429 <https://issues.sonatype.org/browse/NEXUS-6503>
430 <https://issues.sonatype.org/browse/NEXUS-6311>

- [\[NEXUS-6485\]](#)⁴³¹ Improvement Prefix file update of procurement repository can cause nexus startup to take an extremely long time performance

Repository

- [\[NEXUS-6358\]](#)⁴³² Bug ?describe output no longer has "contained in repositories"

SSL

- [\[NEXUS-6307\]](#)⁴³³ Improvement Print message in log if high-strength JCE is installed

Security

- [\[NEXUS-6277\]](#)⁴³⁴ Bug Requests to hosted repositories slow down linearly as group repository membership increases

Staging

- [\[NEXUS-6306\]](#)⁴³⁵ Bug strip out invalid addressees out of staging emails before send attempt
- [\[NEXUS-6242\]](#)⁴³⁶ Bug nexus-staging-maven-plugin fails with IllegalArgumentException: XPP3 pull parser library not present. Specify another driver.

Support Tools

- [\[NEXUS-6276\]](#)⁴³⁷ Bug NullPointerException when switching to Log tab
- [\[NEXUS-6472\]](#)⁴³⁸ Improvement Enable inbound request access logging by default

System Feeds

- [\[NEXUS-6294\]](#)⁴³⁹ Bug timeline can leave index files in deleted state performance

Transport

- [\[NEXUS-6236\]](#)⁴⁴⁰ Improvement Upgrade HttpClient to 4.3.x
- [\[NEXUS-6221\]](#)⁴⁴¹ Bug add context to log message "The target server failed to respond"

User Token

431 <https://issues.sonatype.org/browse/NEXUS-6485>

432 <https://issues.sonatype.org/browse/NEXUS-6358>

433 <https://issues.sonatype.org/browse/NEXUS-6307>

434 <https://issues.sonatype.org/browse/NEXUS-6277>

435 <https://issues.sonatype.org/browse/NEXUS-6306>

436 <https://issues.sonatype.org/browse/NEXUS-6242>

437 <https://issues.sonatype.org/browse/NEXUS-6276>

438 <https://issues.sonatype.org/browse/NEXUS-6472>

439 <https://issues.sonatype.org/browse/NEXUS-6294>

440 <https://issues.sonatype.org/browse/NEXUS-6236>

441 <https://issues.sonatype.org/browse/NEXUS-6221>

- [NEXUS-6155⁴⁴²] Bug Print error in nexus-m2settings-maven-plugin 1.5.x if it is used with Nexus 2.6 or earlier

Miscellaneous

- [NEXUS-6271⁴⁴³] Bug File content validation fails with empty zip file
- [NEXUS-6491⁴⁴⁴] Bug Nexus should not dump stack traces to end users
- [NEXUS-5694⁴⁴⁵] Improvement Add support to detect/register metrics healthcheck components
- [NEXUS-6571⁴⁴⁶] Bug LinkPersister#isLinkContent is invoked for attributes performance
- [NEXUS-6572⁴⁴⁷] Bug Add new "breadth first" walker traversal type to improve walker performance per formance
- [NEXUS-6320⁴⁴⁸] Bug repository content index page links can reference incoming request host, port and path instead of forced base URL

Repository Manager 2.7.2

 This release of Nexus Repository Manager fixes a critical security issue (NEXUS-6315⁴⁴⁹). Details about this vulnerability can be found [here](#)⁴⁵⁰.

Bug Fixes

- NEXUS-6139⁴⁵¹ - Evict unused proxied items task moves items to trash
- NEXUS-6155⁴⁵² - Print error in nexus-m2settings-maven-plugin 1.5.x if it is used with Nexus 2.6 or earlier
- NEXUS-6182⁴⁵³ - parallel build support in nexus-staging-maven-plugin
- NEXUS-6164⁴⁵⁴ - allow disabling ssl certificate checks in nexus-staging-maven-plugin

⁴⁴² <https://issues.sonatype.org/browse/NEXUS-6155>

⁴⁴³ <https://issues.sonatype.org/browse/NEXUS-6271>

⁴⁴⁴ <https://issues.sonatype.org/browse/NEXUS-6491>

⁴⁴⁵ <https://issues.sonatype.org/browse/NEXUS-5694>

⁴⁴⁶ <https://issues.sonatype.org/browse/NEXUS-6571>

⁴⁴⁷ <https://issues.sonatype.org/browse/NEXUS-6572>

⁴⁴⁸ <https://issues.sonatype.org/browse/NEXUS-6320>

⁴⁴⁹ <https://issues.sonatype.org/browse/NEXUS-6315>

⁴⁵⁰ <https://support.sonatype.com/entries/42374566>

⁴⁵¹ <https://issues.sonatype.org/browse/NEXUS-6139>

⁴⁵² <https://issues.sonatype.org/browse/NEXUS-6155>

⁴⁵³ <https://issues.sonatype.org/browse/NEXUS-6182>

- [NEXUS-6213](https://issues.sonatype.org/browse/NEXUS-6213)⁴⁵⁵ - Add file content validation for site.xml
 - [NEXUS-6219](https://issues.sonatype.org/browse/NEXUS-6219)⁴⁵⁶ - rebuild metadata task rebuilds metadata on the same repository more than once during a single task run
 - [NEXUS-6220](https://issues.sonatype.org/browse/NEXUS-6220)⁴⁵⁷ - Repository health check fails when using an HTTP proxy server with NTLM authentication.
 - [NEXUS-6230](https://issues.sonatype.org/browse/NEXUS-6230)⁴⁵⁸ - Remove all unused snapshots fails with NPE in logs
 - [NEXUS-6232](https://issues.sonatype.org/browse/NEXUS-6232)⁴⁵⁹ - prevent concurrent execution of creterepo against the same data
 - [NEXUS-6234](https://issues.sonatype.org/browse/NEXUS-6234)⁴⁶⁰ - File content validation is enabled for procurement repositories, there is no way to disable it
 - [NEXUS-6244](https://issues.sonatype.org/browse/NEXUS-6244)⁴⁶¹ - Regression: Crowd plugin does not support nested group role mapping user privileges
 - [NEXUS-6248](https://issues.sonatype.org/browse/NEXUS-6248)⁴⁶² - Last-modified header wrong for archetype-catalog.xml of group repo
 - [NEXUS-6249](https://issues.sonatype.org/browse/NEXUS-6249)⁴⁶³ - Wrong checksums cached for maven unique snapshots (sha1 and md5)
 - [NEXUS-6250](https://issues.sonatype.org/browse/NEXUS-6250)⁴⁶⁴ - Not able to view remote internal (proxy) repository
 - [NEXUS-6253](https://issues.sonatype.org/browse/NEXUS-6253)⁴⁶⁵ - LDAP timeout is logged at DEBUG
 - [NEXUS-6258](https://issues.sonatype.org/browse/NEXUS-6258)⁴⁶⁶ - Path cache appears broken in customer configuration
 - [NEXUS-6259](https://issues.sonatype.org/browse/NEXUS-6259)⁴⁶⁷ - Staging yum metadata capability can prevent loading of staging repositories
 - [NEXUS-6315](https://issues.sonatype.org/browse/NEXUS-6315)⁴⁶⁸ - Security Vulnerability: REST API
-

Repository Manager 2.7.1

A critical security vulnerability ([CVE-2014-0792](https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2014-0792)⁴⁶⁹) has been discovered by Sonatype in Nexus Repository Manager requiring immediate action. This vulnerability has been fixed in the 2.7.1 release.

455 <https://issues.sonatype.org/browse/NEXUS-6213>

456 <https://issues.sonatype.org/browse/NEXUS-6219>

457 <https://issues.sonatype.org/browse/NEXUS-6220>

458 <https://issues.sonatype.org/browse/NEXUS-6230>

459 <https://issues.sonatype.org/browse/NEXUS-6232>

460 <https://issues.sonatype.org/browse/NEXUS-6234>

461 <https://issues.sonatype.org/browse/NEXUS-6244>

462 <https://issues.sonatype.org/browse/NEXUS-6248>

463 <https://issues.sonatype.org/browse/NEXUS-6249>

464 <https://issues.sonatype.org/browse/NEXUS-6250>

465 <https://issues.sonatype.org/browse/NEXUS-6253>

466 <https://issues.sonatype.org/browse/NEXUS-6258>

467 <https://issues.sonatype.org/browse/NEXUS-6259>

468 <https://issues.sonatype.org/browse/NEXUS-6315>

469 <http://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2014-0792>

A patch is also available which fixes this issue for all 2.x versions of Nexus Repository Manager. Information about this can be found in the [Nexus Security Vulnerability⁴⁷⁰](#) article.

Bug Fixes

- [NEXUS-6172⁴⁷¹](#) Indexing tasks can leave files present in (deleted) state until the next index read operation
 - [NEXUS-6176⁴⁷²](#) New describe page lost the group's not found reasoning.
 - [NEXUS-6185⁴⁷³](#) Timestamped M2 Snapshots should be consumable over M1 shadow
 - [NEXUS-6189⁴⁷⁴](#) Need a way to set session timeout duration in Nexus
 - [NEXUS-6205⁴⁷⁵](#) Update XStream
 - [NEXUS-6206⁴⁷⁶](#) Set userId in MDC on login, and unset on logout
-

Repository Manager 2.7.0-06

Bug Fixes

- [NEXUS-6168⁴⁷⁷](#) Nexus 2.7 breaks nexus-ruby-plugin
 - [NEXUS-6169⁴⁷⁸](#) Nexus 2.7 now returns 501 instead of 405 for MKCOL, possibly breaking some wagons
 - [NEXUS-6179⁴⁷⁹](#) Requesting a folder which does not exist in a proxy repository's local storage causes a file to be created in storage.
 - [NEXUS-6183⁴⁸⁰](#) remote.storage.outbound logger does not include timing information
-

Repository Manager 2.7.0-05

Bug Fixes

- [NEXUS-6150⁴⁸¹](#) Misleading message printed when IOException is thrown trying to lock nexus.lock file

⁴⁷⁰ <https://support.sonatype.com/entries/37828023>

⁴⁷¹ <https://issues.sonatype.org/browse/NEXUS-6172>

⁴⁷² <https://issues.sonatype.org/browse/NEXUS-6176>

⁴⁷³ <https://issues.sonatype.org/browse/NEXUS-6185>

⁴⁷⁴ <https://issues.sonatype.org/browse/NEXUS-6189>

⁴⁷⁵ <https://issues.sonatype.org/browse/NEXUS-6205>

⁴⁷⁶ <https://issues.sonatype.org/browse/NEXUS-6206>

⁴⁷⁷ <https://issues.sonatype.org/browse/NEXUS-6168>

⁴⁷⁸ <https://issues.sonatype.org/browse/NEXUS-6169>

⁴⁷⁹ <https://issues.sonatype.org/browse/NEXUS-6179>

⁴⁸⁰ <https://issues.sonatype.org/browse/NEXUS-6183>

⁴⁸¹ <https://issues.sonatype.org/browse/NEXUS-6150>

- [NEXUS-6151](#)⁴⁸² Nexus war edition will not start if work directory does not exist
-

Repository Manager 2.7.0-04

Bug Fixes

[NEXUS-6149](#)⁴⁸³ ContentServlet depends on the presence of client certificates when accessed via https

Repository Manager 2.7.0

These release notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.7.0.

See [here](#)⁴⁸⁴ for a full list of all issues fixed in the 2.7.0 release.

New and Noteworthy

All Shipping Plugins are Installed by Default

Previous versions of Nexus Repository Manager Professional shipped with some plugins which were not installed by default. These were located in "\$NEXUS_HOME/nexus/WEB-INF/optional-plugins", and installation required manually copying these over to the main plugin repository and restarting the server. In Nexus Repository Manager 2.7, all plugins are installed by default. The following plugins are affected:

- [Branding Plugin](#)(see page 0) - Installed by default, can now be enabled and configured via capability
- [Crowd Plugin](#)(see page 354) - Installed by default
- [Custom Metadata Plugin](#)(see page 0) - Installed by default, can now be enabled via capability
- [User Account Plugin](#)⁴⁸⁵ - No longer ships with Nexus Repository Manager
- Unpack Plugin* - Installed by default

⚠ The Unpack Plugin creates a special "content-compressed" REST endpoint which can be used to deploy zip files to a repository. The URL looks like this: <http://localhost:8081/nexus/service/local/repositories/releases/content-compressed>. The files in the zip will be unpacked and deployed individually to the repository.

New Atlassian Crowd Plugin

⁴⁸² <https://issues.sonatype.org/browse/NEXUS-6151>

⁴⁸³ <https://issues.sonatype.org/browse/NEXUS-6149>

⁴⁸⁴ <https://issues.sonatype.org/issues/?filter=13366>

⁴⁸⁵ <http://blog.sonatype.com/people/2009/11/nexus-as-open-source-infrastructure-user-sign-up/#.UoP5LY3Sa04>

We have completely rewritten the Atlassian Crowd Nexus Repository Manager plugin. It performs better, is more reliable and depends on current Crowd REST APIs under the hood. Upgrades of your previous crowd configuration should be handled seamlessly.

The plugin is already installed by default and configuration can be accessed via Security -> Crowd in the sidebar. Refer to the [Crowd documentation](#)(see page 354) for more information.

The plugin has been primarily tested with Crowd 2.5.5 and 2.6.5 at shipping time. Although the Crowd REST API used should work with Crowd versions as old as 2.1, users are encouraged to use this plugin with at least the tested versions of Crowd or newer. In particular, Atlassian Crowd releases earlier than 2.5.5 are known to have severe security vulnerabilities.

If you use a https URL to access your crowd server, you can now configure an *SSL: Crowd Capability* to explicitly manage the trust of the SSL certificate

New Support Tools

The old automatic problem reporting feature under "help/report problem" has been replaced with a new set of [support tools](#)(see page 0).

Nexus now has a *System Information* report to show detailed information about the configuration and runtime environment of the Nexus instance.

A new option to generate a Support ZIP which can be sent to Sonatype support has been added. This ZIP file is not encrypted so users can inspect the contents before providing it to Sonatype via a secure support site ticket at <https://support.sonatype.com>⁴⁸⁶.

New Logging UI

The [logging UI](#)(see page 0) has been completely rewritten, and now allows for setting log levels for individual java packages and classes through the UI. It also has a new "mark" facility which can be used to add markers in the log. These markers help delineate where a problem was reproduced.

Note: The previous *System Files* feature has been removed and replaced by the new log viewer and *Support Zip* feature.

Authentication via Remote User HTTP Header

Nexus now supports external pre-authentication of users. An HTTP header can be configured (such as REMOTE_USER) which contains a user ID which has already been authenticated by the external system. See the [documentation](#)(see page 0) for more information.

Legacy Startup Scripts Removed

The old startup scripts (located under \$NEXUS_HOME/bin/jsw/\$ARCH in the installation directory) have finally been removed. These have been deprecated since Nexus Repository Manager 2.0. Users should use the new startup scripts introduced in Nexus Repository Manager 2.0, located in \$NEXUS_HOME/bin (**NEXUS-**

⁴⁸⁶ <https://support.sonatype.com/>

[5781⁴⁸⁷](#)). The 'clickable' Windows batch files (*.nexus.bat) have remained, but the only use case for these are to be 'clicked' to perform a specific named action.

Work Directory is now Locked to Prevent Concurrent Access

The work directory is now locked to prevent simultaneous access by multiple Nexus Repository Manager instances. A sonatype-work/nexus/nexus.lock file is created containing the process id when Nexus Repository Manager is started, and deleted when Nexus Repository Manager is stopped ([NEXUS-5306⁴⁸⁸](#)).

No Longer Possible to Disable Security

Previous versions of Nexus Repository Manager had a setting which completely disabled security. This added unnecessary complexity to the system, and this has been removed. If someone really wants to run Nexus Repository Manager without security this can be done by giving the anonymous user the Administrator role.

Custom Metadata is now Enabled/Disabled via Capability

In previous versions of Nexus Repository Manager the Custom Metadata Plugin shipped in "\$NEXUS_HOME/nexus/WEB-INF/optional-plugins" because it can add additional overhead to large instances. It is now shipped in the main plugin repository. To enable it, go to "administration/capabilities" and add a new capability of type "Custom Metadata". If you were using it previously, you need to explicitly enable it after upgrade to keep using it. Note that this is a one time requirement, the setting will persist through future upgrades.

Plexus Components Deprecated

Components in Nexus Repository Manager have been converted to JSR-330 and use of Plexus components have been deprecated. Warnings will be logged on startup when Plexus components are detected. Custom plugins should be updated as support for use of Plexus components will be removed in future version of Nexus Repository Manager ([NEXUS-5755⁴⁸⁹](#)).

Deprecated Legacy API

Many legacy, unused, or soon to be removed API have been marked as deprecated. These will be removed in future versions of Nexus Repository Manager. Custom plugins should be updated to avoid usage of deprecated API.

Nexus Staging Maven Plugin Automatic Release

A new parameter has been added to the nexus-staging-maven-plugin, "releaseAfterClose". When this is set the plugin will automatically release a staging repository after closing it provided that all staging rules (including CLM scans) have passed ([NEXUS-5906⁴⁹⁰](#)).

Automatic Cleanup of old Build Promotion Repositories

⁴⁸⁷ <https://issues.sonatype.org/browse/NEXUS-5781>

⁴⁸⁸ <https://issues.sonatype.org/browse/NEXUS-5306>

⁴⁸⁹ <https://issues.sonatype.org/browse/NEXUS-5755>

⁴⁹⁰ <https://issues.sonatype.org/browse/NEXUS-5906>

The "Drop Inactive Staging Repositories" task has been enhanced to allow cleanup of build promotion repositories ([NXCM-5226](#)⁴⁹¹).

Enhanced UI for Tables

Most UI tables in Nexus Repository Manager can now support filtering of contents via UI search ([NXCM-4490](#)⁴⁹²)

Improved Capabilities UI

Numerous improvements have been made to the capabilities UI, including the ability to group capabilities by any column (particularly useful is grouping by "category"). Also, there is a new tabbed interface which cleanly separates Summary, Settings, Status, and About ([NEXUS-5940](#)).⁴⁹³

Nexus Repository Manager Branding Plugin Improvement

The [Nexus Repository Manager Branding Plugin](#)(see page 0) (which allows setting a custom banner in the UI) can now be configured via capabilities UI ([NEXUS-5891](#)⁴⁹⁴). To set a custom banner in Nexus 2.7 go to "Administration/Capabilities" and add in a "Branding" capability. Previous custom banners should be detected automatically on upgrade.

Mirrors Tab Removed from Proxy Repositories

The old "mirrors" feature has been removed from proxy repositories and previous settings will be ignored ([NE](#)
[XUS-5789](#)⁴⁹⁵). Proxy repositories that had this configured will now fetch all artifacts, poms, metadata and checksums from the remote proxy directly.

Groovy Integration

Groovy support has been moved into the nexus-groovy-plugin and can now be used to write Nexus plugins in Groovy ([NEXUS-5892](#)⁴⁹⁶). An example Nexus Repository Manager plugin written in groovy is [our new Support plugin](#)⁴⁹⁷.

Performance Improvements

We've measured significant performance improvements processing staging repositories and checking permissions in some configurations. ([NXCM-5448](#)⁴⁹⁸)

Significant Bug Fixes

Capabilities

⁴⁹¹ <https://issues.sonatype.org/browse/NXCM-5226>

⁴⁹² <https://issues.sonatype.org/browse/NXCM-4490>

⁴⁹³ <https://issues.sonatype.org/browse/NEXUS-5940>

⁴⁹⁴ <https://issues.sonatype.org/browse/NEXUS-5891>

⁴⁹⁵ <https://issues.sonatype.org/browse/NEXUS-5789>

⁴⁹⁶ <https://issues.sonatype.org/browse/NEXUS-5892>

⁴⁹⁷ <https://github.com/sonatype/nexus-oss/tree/nexus-2.7.x/plugins/internal/nexus-atlas-plugin>

⁴⁹⁸ <https://issues.sonatype.org/browse/NXCM-5448>

- [\[NEXUS-4697\]](#)⁴⁹⁹ - Add password text field
- [\[NEXUS-5406\]](#)⁵⁰⁰ - [capabilities] Dynamic source for selections for combos
- [\[NEXUS-5940\]](#)⁵⁰¹ - Rewrite Capabilities UI
- [\[NEXUS-5941\]](#)⁵⁰² - Add support for tagging to capabilities
- [\[NEXUS-6072\]](#)⁵⁰³ - Failure during capability load prevents the rest of capabilities to be loaded

CLM Integration

- [\[NEXUS-6060\]](#)⁵⁰⁴ - CLM App Management link of profile editor leads to wrong URL
- [\[NEXUS-6041\]](#)⁵⁰⁵ - Impossible to disable CLM from UI
- [\[NEXUS-5942\]](#)⁵⁰⁶ - Make CLM Application ID a dropdown which is populated from the CLM server
- [\[NEXUS-5946\]](#)⁵⁰⁷ - Remove CLM config in favor of a capability
- [\[NXCM-5402\]](#)⁵⁰⁸ - Nexus to CLM server https connections should be able to use Nexus SSL truststore

Crowd Integration

- [\[NXCM-5432\]](#)⁵⁰⁹ - modernize Nexus Atlassian Crowd Plugin
- [\[NXCM-5443\]](#)⁵¹⁰ - Allow crowd plugin to use nexus private truststore for SSL certs
- [\[NXCM-5499\]](#)⁵¹¹ - improve crowd configuration contextual help messages
- [\[NXCM-5501\]](#)⁵¹² - if crowd realm is configured and active, but login does not need it, crowd server is still contacted

LDAP

- [\[NEXUS-5998\]](#)⁵¹³ - Extremely inefficient mechanism used to retrieve LDAP users for notification
- [\[NEXUS-6068\]](#)⁵¹⁴ - Nexus problem reporting can reset ldap server bind passwords in memory to ***
- [\[NEXUS-6081\]](#)⁵¹⁵ - LDAP password are sent in clear text

499 <https://issues.sonatype.org/browse/NEXUS-4697>

500 <https://issues.sonatype.org/browse/NEXUS-5406>

501 <https://issues.sonatype.org/browse/NEXUS-5940>

502 <https://issues.sonatype.org/browse/NEXUS-5941>

503 <https://issues.sonatype.org/browse/NEXUS-6072>

504 <https://issues.sonatype.org/browse/NEXUS-6060>

505 <https://issues.sonatype.org/browse/NEXUS-6041>

506 <https://issues.sonatype.org/browse/NEXUS-5942>

507 <https://issues.sonatype.org/browse/NEXUS-5946>

508 <https://issues.sonatype.org/browse/NXCM-5402>

509 <https://issues.sonatype.org/browse/NXCM-5432>

510 <https://issues.sonatype.org/browse/NXCM-5443>

511 <https://issues.sonatype.org/browse/NXCM-5499>

512 <https://issues.sonatype.org/browse/NXCM-5501>

513 <https://issues.sonatype.org/browse/NEXUS-5998>

514 <https://issues.sonatype.org/browse/NEXUS-6068>

515 <https://issues.sonatype.org/browse/NEXUS-6081>

- [\[NEXUS-5870\]⁵¹⁶](https://issues.sonatype.org/browse/NEXUS-5870) - Provide a mechanism to allow additional LDAP environment variables to be set.
- [\[NEXUS-4062\]⁵¹⁷](https://issues.sonatype.org/browse/NEXUS-4062) - Automatically add the LDAP security realm when user saves LDAP settings

NuGet

- [\[NEXUS-6085\]⁵¹⁸](https://issues.sonatype.org/browse/NEXUS-6085) - duplicate Nuget Api key buttons possible
- [\[NXCM-5423\]⁵¹⁹](https://issues.sonatype.org/browse/NXCM-5423) - Download NuGet Feed task reports success even if it receives an invalid response from remote server
- [\[NXCM-5324\]⁵²⁰](https://issues.sonatype.org/browse/NXCM-5324) - Can't synchronize Nuget feed from nuget.org⁵²¹ if "fetch all versions" is checked.

P2/OBR

- [\[NEXUS-5930\]⁵²²](https://issues.sonatype.org/browse/NEXUS-5930) - Nexus OBR shadow makes Nexus deadlock prone, while reading/writing obr.xml
- [\[NEXUS-5995\]⁵²³](https://issues.sonatype.org/browse/NEXUS-5995) - P2 repository plugin generates incorrect content.xml data for features
- [\[NEXUS-5831\]⁵²⁴](https://issues.sonatype.org/browse/NEXUS-5831) - [p2] serve jarred repository metadata
- [\[NXCM-5431\]⁵²⁵](https://issues.sonatype.org/browse/NXCM-5431) - investigate httpclient 3.1 use in nexus-p2-bridge-plugin

Procurement

- [\[NEXUS-4945\]⁵²⁶](https://issues.sonatype.org/browse/NEXUS-4945) - Concurrent modification exception in procurement
- [\[NXCM-4752\]⁵²⁷](https://issues.sonatype.org/browse/NXCM-4752) - Artifact Procurement allows you to create repository cycles, results in stack overflow.
- [\[NXCM-5409\]⁵²⁸](https://issues.sonatype.org/browse/NXCM-5409) - Newly deployed artifacts can be blocked from procurement by automatic routing
- [\[NXCM-5515\]⁵²⁹](https://issues.sonatype.org/browse/NXCM-5515) - Procurement repository download fails if user does not have read privileges to source repo

SMTP

- [\[NEXUS-4997\]⁵³⁰](https://issues.sonatype.org/browse/NEXUS-4997) - SMTP config panel uses "SSL" and "TLS" incorrectly

516 <https://issues.sonatype.org/browse/NEXUS-5870>

517 <https://issues.sonatype.org/browse/NEXUS-4062>

518 <https://issues.sonatype.org/browse/NEXUS-6085>

519 <https://issues.sonatype.org/browse/NXCM-5423>

520 <https://issues.sonatype.org/browse/NXCM-5324>

521 <http://nuget.org/>

522 <https://issues.sonatype.org/browse/NEXUS-5930>

523 <https://issues.sonatype.org/browse/NEXUS-5995>

524 <https://issues.sonatype.org/browse/NEXUS-5831>

525 <https://issues.sonatype.org/browse/NXCM-5431>

526 <https://issues.sonatype.org/browse/NEXUS-4945>

527 <https://issues.sonatype.org/browse/NXCM-4752>

528 <https://issues.sonatype.org/browse/NXCM-5409>

529 <https://issues.sonatype.org/browse/NXCM-5515>

- [\[NEXUS-2911\]](#)⁵³¹ - Authentication error shows up as "400 bad request" during smtp validation.
- [\[NEXUS-5808\]](#)⁵³² - no indication at default log levels that email server configuration is broken

Repositories

- [\[NEXUS-5772\]](#)⁵³³ - File content validation broken on newer versions of Linux
- [\[NEXUS-5789\]](#)⁵³⁴ - Remove proxy repository Mirrors feature
- [\[NEXUS-5790\]](#)⁵³⁵ - Download speeds reduced in recent Nexus versions
- [\[NEXUS-5811\]](#)⁵³⁶ - Browse remote storage incorrectly handles forced remote base url , preventing remote browse UI tree from expanding
- [\[NEXUS-5838\]](#)⁵³⁷ - Repositories -> Browse Remote uses wrong URL on remote and gets HTTP/404
- [\[NEXUS-5877\]](#)⁵³⁸ - Repository pop up in list has duplicate entries
- [\[NEXUS-5944\]](#)⁵³⁹ - Repository is auto-blocked if "allow file browsing" is disabled on remote
- [\[NEXUS-4207\]](#)⁵⁴⁰ - make default value of Publish URL "True" when creating a group repository
- [\[NEXUS-4292\]](#)⁵⁴¹ - Download button's URL should be copy-able (into mails, jira comments, ...)
- [\[NEXUS-4737\]](#)⁵⁴² - Add extra columns to the repository targets view
- [\[NEXUS-5898\]](#)⁵⁴³ - Make connection request retry attempts work for connection reset exceptions
- [\[NXCM-5422\]](#)⁵⁴⁴ - Nexus Archive Browser Plugin does not work with .bar files
- [\[NXCM-4490\]](#)⁵⁴⁵ - Make repositories grid view filterable/searchable

Routing

- [\[NEXUS-5807\]](#)⁵⁴⁶ - Automatic routing fails for grails repo
- [\[NEXUS-6050\]](#)⁵⁴⁷ - Automatic routing warnings should include repository ID

Scheduled Tasks

-
- 531 <https://issues.sonatype.org/browse/NEXUS-2911>
532 <https://issues.sonatype.org/browse/NEXUS-5808>
533 <https://issues.sonatype.org/browse/NEXUS-5772>
534 <https://issues.sonatype.org/browse/NEXUS-5789>
535 <https://issues.sonatype.org/browse/NEXUS-5790>
536 <https://issues.sonatype.org/browse/NEXUS-5811>
537 <https://issues.sonatype.org/browse/NEXUS-5838>
538 <https://issues.sonatype.org/browse/NEXUS-5877>
539 <https://issues.sonatype.org/browse/NEXUS-5944>
540 <https://issues.sonatype.org/browse/NEXUS-4207>
541 <https://issues.sonatype.org/browse/NEXUS-4292>
542 <https://issues.sonatype.org/browse/NEXUS-4737>
543 <https://issues.sonatype.org/browse/NEXUS-5898>
544 <https://issues.sonatype.org/browse/NXCM-5422>
545 <https://issues.sonatype.org/browse/NXCM-4490>
546 <https://issues.sonatype.org/browse/NEXUS-5807>
547 <https://issues.sonatype.org/browse/NEXUS-6050>

- [\[NEXUS-4580\]^{548\]}](#) - Empty trash task should allow specifying repositories
- [\[NEXUS-5871\]^{549\]}](#) - Scheduled task drop down is not sorted
- [\[NEXUS-5797\]^{550\]}](#) - Scheduled task to remove old unreleased snapshots
- [\[NXCM-5226\]^{551\]}](#) - Add "include promoted repositories" option to staging repo cleanup task

Search/Index

- [\[NEXUS-5798\]^{552\]}](#) - Out of service repositories should not be included in search results
- [\[NEXUS-5814\]^{553\]}](#) - Nexus should not stop indexing if it encounters a jar file it cannot parse, but should report the jar location
- [\[NEXUS-5817\]^{554\]}](#) - indexing operations which require remote repo access do not always respect blocked repo status
- [\[NEXUS-5821\]^{555\]}](#) - Repositories view right-click menu Repair Index / Update Index items duplicated
- [\[NEXUS-5799\]⁵⁵⁶](#) - IndexCreators aren't ordered according to dependencies
- [\[NEXUS-5909\]⁵⁵⁷](#) - Move nexus-custom-metadata-plugin out of _optional-plugins_ to default installed plugins

Security

- [\[NEXUS-4219\]⁵⁵⁸](#) - nexus is silent when it does not have permissions to update security.xml
- [\[NEXUS-5826\]⁵⁵⁹](#) - Sort the repository drop down list in "add/repository target privilege" alphabetically (without separating group repos)
- [\[NEXUS-3119\]⁵⁶⁰](#) - Show status (active/disbaled) of user in the list of users (in the Users panel)
- [\[NEXUS-5490\]⁵⁶¹](#) - Add support for REMOTE_USER header
- [\[NEXUS-5899\]⁵⁶²](#) - Remove ability to disable security
- [\[NXCM-4543\]⁵⁶³](#) - Usertoken nameCode is leaking out into the UI

548 <https://issues.sonatype.org/browse/NEXUS-4580>

549 <https://issues.sonatype.org/browse/NEXUS-5871>

550 <https://issues.sonatype.org/browse/NEXUS-5797>

551 <https://issues.sonatype.org/browse/NXCM-5226>

552 <https://issues.sonatype.org/browse/NEXUS-5798>

553 <https://issues.sonatype.org/browse/NEXUS-5814>

554 <https://issues.sonatype.org/browse/NEXUS-5817>

555 <https://issues.sonatype.org/browse/NEXUS-5821>

556 <https://issues.sonatype.org/browse/NEXUS-5799>

557 <https://issues.sonatype.org/browse/NEXUS-5909>

558 <https://issues.sonatype.org/browse/NEXUS-4219>

559 <https://issues.sonatype.org/browse/NEXUS-5826>

560 <https://issues.sonatype.org/browse/NEXUS-3119>

561 <https://issues.sonatype.org/browse/NEXUS-5490>

562 <https://issues.sonatype.org/browse/NEXUS-5899>

563 <https://issues.sonatype.org/browse/NXCM-4543>

- [NXCM-5233^{564]} - Introduce property to enable/disable session timeout from UI

Smart Proxy

- [NEXUS-6069^{565]} - Smart Proxy: Connector capability cannot be created/updated if "Advertise" is not checked
- [NXCM-4759^{566]} - Remove groovy, replace with javascript optional broker configuration

Staging

- [NXCM-5448^{567]} - Extremely poor performance viewing staging repositories and checking permissions
- [NEXUS-5974^{568]} - Staging operation on multiple repositories does not abort properly on failure
- [NEXUS-6078^{569]} - race: DefaultFSLocalRepositoryStorage.getBaseDir Could not create baseDir during staging repository creation
- [NEXUS-5906^{570]} - Add "releaseAfterClose" option to the nexus-staging-maven-plugin
- [NXCM-3969^{571]} - Closing a staging repo fails when its repo group is missing with Server ERROR 500
- [NEXUS-6051^{572]} - Poor error handling in staging.xml validation
- [NXCM-5065^{573]} - vague user message on NullPointerException when nexus-staging-maven-plugin missing required parameters
- [NXCM-5306^{574]} - Staging repository dropped from build promotion profile still shows "promoted" as last activity
- [NXCM-5403^{575]} - nexus-staging-maven-plugin does not interact well with maven-site-plugin:attach-descriptor goal
- [NXCM-5412^{576]} - Add an rc-list goal to the nexus-staging-maven-plugin
- [NXCM-5415^{577]} - If staging UI upload fails because a matching profile cannot be found error message is confusing/misleading
- [NXCM-5427^{578]} - add "Demote" activity to staging repository that was demoted from a promotion group repository

564 <https://issues.sonatype.org/browse/NXCM-5233>

565 <https://issues.sonatype.org/browse/NEXUS-6069>

566 <https://issues.sonatype.org/browse/NXCM-4759>

567 <https://issues.sonatype.org/browse/NXCM-5448>

568 <https://issues.sonatype.org/browse/NEXUS-5974>

569 <https://issues.sonatype.org/browse/NEXUS-6078>

570 <https://issues.sonatype.org/browse/NEXUS-5906>

571 <https://issues.sonatype.org/browse/NXCM-3969>

572 <https://issues.sonatype.org/browse/NEXUS-6051>

573 <https://issues.sonatype.org/browse/NXCM-5065>

574 <https://issues.sonatype.org/browse/NXCM-5306>

575 <https://issues.sonatype.org/browse/NXCM-5403>

576 <https://issues.sonatype.org/browse/NXCM-5412>

577 <https://issues.sonatype.org/browse/NXCM-5415>

578 <https://issues.sonatype.org/browse/NXCM-5427>

- [\[NXCM-5516\]⁵⁷⁹](#) - Expose timeout configuration on nexus-staging-maven-plugin (and ant tasks)
- [\[NXCM-5451\]⁵⁸⁰](#) - staging/bundle_upload transitioning conflict during concurrent processing can cause 500 status Staging repository is already transitioning

Yum

- [\[NEXUS-5405\]⁵⁸¹](#) - Group Yum metadata not regenerated when a member proxy repository metadata changes
- [\[NEXUS-5806\]⁵⁸²](#) - Group level yum metadata is incorrect
- [\[NEXUS-5842\]⁵⁸³](#) - Yum Generate Metadata Task does not expose newly deployed RPMs after first metadata generation
- [\[NEXUS-5795\]⁵⁸⁴](#) - Cannot browse YUM repodata directory
- [\[NEXUS-5820\]⁵⁸⁵](#) - If base URL is set, but not forced, yum xml:base picks up URL of incoming deploy requests, not the base URL of server
- [\[NEXUS-5829\]⁵⁸⁶](#) - inconsistency on what type of repository you can run Yum: Generate Metadata against
- [\[NEXUS-5955\]⁵⁸⁷](#) - Automatic routing interferes with yum repo metadata
- [\[NEXUS-5956\]⁵⁸⁸](#) - Old yum metadata is never cleaned up from yum proxy repository.
- [\[NEXUS-5957\]⁵⁸⁹](#) - Yum proxy repository metadata is not refetched if request for it comes through a group repo
- [\[NEXUS-6057\]⁵⁹⁰](#) - Yum merge metadata capability cause Stack Overflow when repository is put Out of Service
- [\[NEXUS-5507\]⁵⁹¹](#) - Yum metadata support for staging repositories.
- [\[NEXUS-5794\]⁵⁹²](#) - Add support for specifying yum groups file

Misc.

- [\[NEXUS-5348\]⁵⁹³](#) - Purge timeline task should delete old files from 'persist'

579 <https://issues.sonatype.org/browse/NXCM-5516>

580 <https://issues.sonatype.org/browse/NXCM-5451>

581 <https://issues.sonatype.org/browse/NEXUS-5405>

582 <https://issues.sonatype.org/browse/NEXUS-5806>

583 <https://issues.sonatype.org/browse/NEXUS-5842>

584 <https://issues.sonatype.org/browse/NEXUS-5795>

585 <https://issues.sonatype.org/browse/NEXUS-5820>

586 <https://issues.sonatype.org/browse/NEXUS-5829>

587 <https://issues.sonatype.org/browse/NEXUS-5955>

588 <https://issues.sonatype.org/browse/NEXUS-5956>

589 <https://issues.sonatype.org/browse/NEXUS-5957>

590 <https://issues.sonatype.org/browse/NEXUS-6057>

591 <https://issues.sonatype.org/browse/NEXUS-5507>

592 <https://issues.sonatype.org/browse/NEXUS-5794>

593 <https://issues.sonatype.org/browse/NEXUS-5348>

- [NEXUS-5822⁵⁹⁴] - StackOverflowError when launching Nexus 2.6.0-05 on Java 8 b100+
- [NEXUS-5828⁵⁹⁵] - Nexus 2.6 breaks upgrade from Nexus 1.9.0 and 1.9.1
- [NEXUS-5963⁵⁹⁶] - System property http.proxyHost incompatible regular expressions, server wide
- [NEXUS-5999⁵⁹⁷] - PGP key server information configuration on settings page click links to configured URL
- [NEXUS-5306⁵⁹⁸] - Nexus should lock the work directory to prevent multiple processes using it
- [NEXUS-5584⁵⁹⁹] - Implement atomic writes for all files in the conf directory.
- [NEXUS-5755⁶⁰⁰] - Remove use of Plexus components in Nexus
- [NEXUS-5891⁶⁰¹] - Make branding plugin configurable via capabilities, remove from "optional" plugins
- [NEXUS-5781⁶⁰²] - remove deprecated platform specific wrapper 'nexus' scripts
- [NEXUS-5883⁶⁰³] - Add order column so that sorting can be restored to default order
- [NEXUS-5907⁶⁰⁴] - Remove nexus-user-account-plugin (ie. user sign up plugin)
- [NEXUS-5908⁶⁰⁵] - Move nexus-unpack-plugin out of _optional-plugins_ to default installed plugins
- [NEXUS-5981⁶⁰⁶] - Remove pgp.mit.edu⁶⁰⁷ from list of uses SKS Keyservers
- [NEXUS-5993⁶⁰⁸] - review File.mkdirs() usage, replace with Files.createDirectory(file.toPath()); to not hide IOExceptions
- [NEXUS-6014⁶⁰⁹] - Nexus should respect X-Forwarded headers by default
- [NEXUS-6063⁶¹⁰] - update Nexus and components to use httpclient 4.2.6 to pick up SSL and NTLM related fixes
- [NEXUS-5892⁶¹¹] - Add groovy provider plugin

594 <https://issues.sonatype.org/browse/NEXUS-5822>

595 <https://issues.sonatype.org/browse/NEXUS-5828>

596 <https://issues.sonatype.org/browse/NEXUS-5963>

597 <https://issues.sonatype.org/browse/NEXUS-5999>

598 <https://issues.sonatype.org/browse/NEXUS-5306>

599 <https://issues.sonatype.org/browse/NEXUS-5584>

600 <https://issues.sonatype.org/browse/NEXUS-5755>

601 <https://issues.sonatype.org/browse/NEXUS-5891>

602 <https://issues.sonatype.org/browse/NEXUS-5781>

603 <https://issues.sonatype.org/browse/NEXUS-5883>

604 <https://issues.sonatype.org/browse/NEXUS-5907>

605 <https://issues.sonatype.org/browse/NEXUS-5908>

606 <https://issues.sonatype.org/browse/NEXUS-5981>

607 <http://pgp.mit.edu/>

608 <https://issues.sonatype.org/browse/NEXUS-5993>

609 <https://issues.sonatype.org/browse/NEXUS-6014>

610 <https://issues.sonatype.org/browse/NEXUS-6063>

611 <https://issues.sonatype.org/browse/NEXUS-5892>

- [\[NEXUS-5989\]](https://issues.sonatype.org/browse/NEXUS-5989)⁶¹² - If "application server settings (optional) is not checked than administration/server page can't be saved.
 - [\[NXCM-5292\]](https://issues.sonatype.org/browse/NXCM-5292)⁶¹³ - IE9 binary license file upload fails
 - [\[NXCM-5404\]](https://issues.sonatype.org/browse/NXCM-5404)⁶¹⁴ - outreach bundle content outdated, links don't work, and/or provide duplicate material
 - [\[NXCM-5439\]](https://issues.sonatype.org/browse/NXCM-5439)⁶¹⁵ - installing valid license with later license validity dates than currently installed license does not update Nexus status
 - [\[NXCM-5518\]](https://issues.sonatype.org/browse/NXCM-5518)⁶¹⁶ - PGP server configuration UI is missing
-

Repository Manager 2.6.4

Bug Fixes

- [\[NEXUS-5996\]](https://issues.sonatype.org/browse/NEXUS-5996)⁶¹⁷ Staging operation on multiple repositories does not abort properly on failure
 - [\[NEXUS-5969\]](https://issues.sonatype.org/browse/NEXUS-5969)⁶¹⁸ Improve logging for signature validation failures
 - [\[NXCM-5451\]](https://issues.sonatype.org/browse/NXCM-5451)⁶¹⁹ Staging/bundle_upload transitioning conflict during concurrent processing can cause 500 status Staging repository is already transitioning
 - [\[NXCM-5518\]](https://issues.sonatype.org/browse/NXCM-5518)⁶²⁰ PGP server configuration UI is missing
-

Repository Manager 2.6.3

Bug Fixes

- [\[NEXUS-5790\]](https://issues.sonatype.org/browse/NEXUS-5790)⁶²¹ Download speeds reduced in recent Nexus versions
 - [\[NEXUS-5828\]](https://issues.sonatype.org/browse/NEXUS-5828)⁶²² - Nexus 2.6 breaks upgrade from Nexus 1.9.0 and 1.9.1
 - [\[NEXUS-5849\]](https://issues.sonatype.org/browse/NEXUS-5849)⁶²³ - Central prefix file is served through Artifactory, which results in non-central artifacts being blocked
-

612 <https://issues.sonatype.org/browse/NEXUS-5989>

613 <https://issues.sonatype.org/browse/NXCM-5292>

614 <https://issues.sonatype.org/browse/NXCM-5404>

615 <https://issues.sonatype.org/browse/NXCM-5439>

616 <https://issues.sonatype.org/browse/NXCM-5518>

617 <https://issues.sonatype.org/browse/NEXUS-5996>

618 <https://issues.sonatype.org/browse/NEXUS-5969>

619 <https://issues.sonatype.org/browse/NXCM-5451>

620 <https://issues.sonatype.org/browse/NXCM-5518>

621 <https://issues.sonatype.org/browse/NEXUS-5790>

622 <https://issues.sonatype.org/browse/NEXUS-5828>

623 <https://issues.sonatype.org/browse/NEXUS-5849>

Repository Manager 2.6.2

Bug Fixes

- [\[NEXUS-5836\]](#)⁶²⁴ - Browse index tree does not work (this affects the procurement tree also)
 - [\[NXCM-5481\]](#)⁶²⁵ - nexus-healthcheck-oss-plugin 2.6.0/2.6.1 UI quality column does not load on repositories tab
-

Repository Manager 2.6.1

Bug Fixes

- [\[NEXUS-5772\]](#)⁶²⁶ - File content validation broken on newer versions of Linux
- [\[NEXUS-5799\]](#)⁶²⁷ - IndexCreators aren't ordered according to dependencies
- [\[NEXUS-5806\]](#)⁶²⁸ - Group level yum metadata is incorrect
- [\[NEXUS-5807\]](#)⁶²⁹ - Automatic routing fails for grails repository
- [\[NEXUS-5814\]](#)⁶³⁰ - Nexus should not stop indexing if it encounters a jar file it cannot parse, but should report the jar location
- [\[NXCM-5406\]](#)⁶³¹ - nexus-maven-staging-plugin does not work with Maven 3.1.0
- [\[NXCM-5418\]](#)⁶³² - old official URL <https://nuget.org/api/v2/> not handled by Nexus due to 301 redirect, causing Download NuGet Feed to fail
- [\[NXCM-5424\]](#)⁶³³ - nexus-staging-maven-plugin fails with encrypted password
- [\[NXCM-5429\]](#)⁶³⁴ - Regression: staging repository owner privileges don't work
- [\[NXCM-5430\]](#)⁶³⁵ - age and popularity icons are missing for health check plugin
- [\[NXCM-5436\]](#)⁶³⁶ - regression: User-Agent Nexus-Client/unknown on staging repository summary tab using nexus-staging-maven-plugin 1.4.5-1.4.6

Improvements

-
- 624 <https://issues.sonatype.org/browse/NEXUS-5836>
 - 625 <https://issues.sonatype.org/browse/NXCM-5481>
 - 626 <https://issues.sonatype.org/browse/NEXUS-5772>
 - 627 <https://issues.sonatype.org/browse/NEXUS-5799>
 - 628 <https://issues.sonatype.org/browse/NEXUS-5806>
 - 629 <https://issues.sonatype.org/browse/NEXUS-5807>
 - 630 <https://issues.sonatype.org/browse/NEXUS-5814>
 - 631 <https://issues.sonatype.org/browse/NXCM-5406>
 - 632 <https://issues.sonatype.org/browse/NXCM-5418>
 - 633 <https://issues.sonatype.org/browse/NXCM-5424>
 - 634 <https://issues.sonatype.org/browse/NXCM-5429>
 - 635 <https://issues.sonatype.org/browse/NXCM-5430>
 - 636 <https://issues.sonatype.org/browse/NXCM-5436>

-
- [NXCM-5305⁶³⁷] - Add staging rules which can prevent a release or promotion action from completing
 - [NXCM-5409⁶³⁸] - Newly deployed artifacts can be blocked from procurement by automatic routing

Repository Manager 2.6.0

These release notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.6.0.

See [here](#)⁶³⁹ for a full list of all issues fixed in the 2.6.0 release.

New and Noteworthy

Support for Composite P2 Repositories

Nexus Repository Manager now supports composite style p2 group repositories. Using these will greatly increase performance and decrease heap space requirements. The old style group repositories have been deprecated, p2 users are encouraged to migrate.

Note that if you are using Eclipse 3.4 you will not be able to use the new group repositories, since that version of Eclipse does not support composite p2 repositories.

Support for Separate HTTPS and HTTP Proxy Servers

Support has been added for separate proxy servers for HTTP and HTTPS URL's.

Compatibility Notes

Java 6 Support EOL

Oracle's support for Java 6 [ended](#)⁶⁴⁰ in February 2013. Consequentially as of version 2.6 Nexus Repository Manager now requires a Java 7 JRE to run.

Per-Repository HTTP Proxy Settings Removed

The HTTP Proxy settings under repository configuration have been removed. Users should use the global HTTP Proxy settings under "administration/server" instead.

Old Startup Scripts are Deprecated

The old startup scripts under <nexus_root>/bin/jsw/<os>/<architecture> are deprecated, they will be removed in an upcoming release. Users should use the new startup scripts under <nexus_root>/bin/nexus instead.

Significant Bug Fixes

CLM

637 <https://issues.sonatype.org/browse/NXCM-5305>

638 <https://issues.sonatype.org/browse/NXCM-5409>

639 <https://issues.sonatype.org/issues/?filter=13262>

640 <http://www.oracle.com/technetwork/java/eol-135779.html>

- [NXCM-5314](#)⁶⁴¹ - CLM proxy configuration needs to take into account http VS https
- [NXCM-5349](#)⁶⁴² - Upgrade to latest CLM plugin

Licensing

- [NXCM-5291](#)⁶⁴³ - rare license validation race condition can trigger random 403, 404 errors accessing / content or 402 payment required accessing UI/REST
- [NXCM-5309](#)⁶⁴⁴ - Bad message from Nexus staging when the product is not licensed

NuGet

- [NXCM-5329](#)⁶⁴⁵ - /service/local/nuget/repo does not return 401 for group repos when user lacks privileges
- [NXCM-5419](#)⁶⁴⁶ - <http://nuget.org>⁶⁴⁷ responds with 301, needs to be replaced with www.nuget.org⁶⁴⁸

P2

- [NEXUS-5741](#)⁶⁴⁹ - content validation does not work on P2 repositories
- [NXCM-5392](#)⁶⁵⁰ - Old style p2 group which contains composite p2 group repo does not work
- [NXCM-5327](#)⁶⁵¹ - Allow p2 group repository implementation to use composite repositories

Repositories

- [NEXUS-2834](#)⁶⁵² - Maven metadata is not rebuilt when deleting items from the UI
- [NEXUS-4766](#)⁶⁵³ - Building wrong Maven metadata for a classifier with dots
- [NEXUS-5526](#)⁶⁵⁴ - Proxy-Repository: client certificate authentication does not work anymore
- [NEXUS-5690](#)⁶⁵⁵ - Remove per repository http proxy configuration
- [NEXUS-5704](#)⁶⁵⁶ - 500 Internal Server Error when "If-None-Match" in header
- [NEXUS-5744](#)⁶⁵⁷ - S3 detection misses to find out remote type in some cases

641 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5314>

642 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5349>

643 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5291>

644 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5309>

645 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5329>

646 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5419>

647 <http://nuget.org/>

648 <http://www.nuget.org/>

649 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5741>

650 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5392>

651 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5327>

652 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-2834>

653 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4766>

654 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5526>

655 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5690>

656 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5704>

657 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5744>

- [NXCM-5202](#)⁶⁵⁸ - secure central: persistent AuthTokenFetcherImpl - failed to fetch auth token
SSLPeerUnverifiedException: peer not authenticated even after explicitly trusting `secure.central.sonatype.com`⁶⁵⁹ certificate

Routing

- [NEXUS-5661](#)⁶⁶⁰ - Proxy repo prefix file does not include paths only available from local storage
- [NEXUS-5711](#)⁶⁶¹ - Auto routing periodic update is chatty about unsupported repositories
- [NEXUS-5734](#)⁶⁶² - Correct routing prefix file not generated for custom index

Scheduled Tasks

- [NEXUS-4546](#)⁶⁶³ - Snapshot remover does not remove deleted snapshot versions from g:a-level metadata files
- [NEXUS-5749](#)⁶⁶⁴ - Scheduled Tasks still disappears
- [NEXUS-5765](#)⁶⁶⁵ - NEXUS 2.5-04, strange error, probably during removing old snapshots
- [NEXUS-5766](#)⁶⁶⁶ - Snapshot remover stops processing on ItemNotFoundException
- [NEXUS-5773](#)⁶⁶⁷ - Heavy spam and possible slowdown in batch processing of item deletions
- [NEXUS-5778](#)⁶⁶⁸ - Very long time of remove snapshots in Nexus 2.5
- [NXCM-5401](#)⁶⁶⁹ - Purge Timeline Task Config corrupted on load/save

Search/Index

- [NEXUS-5747](#)⁶⁷⁰ - Support packaging "bundle" by default for search
- [NEXUS-5764](#)⁶⁷¹ - The packaging2extension-mapping.properties is only used for the Repair Index Job and not for regular indexing.
- [NEXUS-5784](#)⁶⁷² - NPE while fetching archetype catalog
- [NEXUS-5752](#)⁶⁷³ - Make NIO lucene indexes the default in Nexus

658 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5202>

659 <http://secure.central.sonatype.com/>

660 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5661>

661 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5711>

662 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5734>

663 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4546>

664 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5749>

665 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5765>

666 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5766>

667 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5773>

668 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5778>

669 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5401>

670 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5747>

671 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5764>

672 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5784>

673 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5752>

Security

- [NEXUS-5728](#)⁶⁷⁴ - Wrong use of EHCache for EnterpriseCacheSessionDAO
- [NEXUS-5736](#)⁶⁷⁵ - Unable to programmatically set Privilege ID

Staging

- [NXCM-4792](#)⁶⁷⁶ - nexus-staging-maven-plugin should warn if it detects it is run against a non-clean target folder
- [NXCM-5308](#)⁶⁷⁷ - Wrong staging rules run during build promotion
- [NXCM-5331](#)⁶⁷⁸ - Regression: Staging profile GAV selection does not work in multi-module build.
- [NXCM-5297](#)⁶⁷⁹ - nexus-staging:promote should print the build promotion repository id that gets created
- [NXCM-5338](#)⁶⁸⁰ - Improve logging in staging, log high level actions in REST/Jetty thread

Yum

- [NEXUS-5705](#)⁶⁸¹ - deleting a rpm artifact does not trigger Yum: Generated Metadata capability execution
- [NEXUS-5721](#)⁶⁸² - Files with RPM extension (upper case) are not processed
- [NEXUS-5740](#)⁶⁸³ - rpm artifacts in .nexus/trash can be processed by createrepo tool

Misc.

- [NEXUS-5742](#)⁶⁸⁴ - Problem reporting through authenticated http proxy does not work
- [NEXUS-5757](#)⁶⁸⁵ - Add tags to nexus-example-plugins for 2.4.0 and 2.5.0 releases
- [NEXUS-5763](#)⁶⁸⁶ - Rename the restlet plugin
- [NEXUS-5767](#)⁶⁸⁷ - metrics-logback-2.2.0.jar should be added to WEB-INF/lib in war file, like other logback jars
- [NEXUS-5780](#)⁶⁸⁸ - deprecate usage of platform specific wrapper scripts, remove in next release

⁶⁷⁴ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5728>

⁶⁷⁵ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5736>

⁶⁷⁶ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4792>

⁶⁷⁷ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5308>

⁶⁷⁸ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5331>

⁶⁷⁹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5297>

⁶⁸⁰ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5338>

⁶⁸¹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5705>

⁶⁸² <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5721>

⁶⁸³ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5740>

⁶⁸⁴ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5742>

⁶⁸⁵ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5757>

⁶⁸⁶ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5763>

⁶⁸⁷ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5767>

⁶⁸⁸ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5780>

- [NEXUS-5729](#)⁶⁸⁹ - Expose EHCache over JMX
 - [NEXUS-5731](#)⁶⁹⁰ - Remove support for Java 6 - require Java 7 to run Nexus
 - [NEXUS-5732](#)⁶⁹¹ - Remove httpclient 3
 - [NEXUS-5768](#)⁶⁹² - org.sonatype.nexus:nexus-oss-webapp is replaced by org.sonatype.nexus.assemblies:nexus-bundle-template
 - [NEXUS-5214](#)⁶⁹³ - I want to be able to specify separate default HTTP proxies for http and https
 - [NEXUS-5714](#)⁶⁹⁴ - Split /status resource, make it as originally intended
 - [NXCM-5346](#)⁶⁹⁵ - nexus-m2settings:download fails if password contains "!" character
 - [NXCM-5325](#)⁶⁹⁶ - Allow RHC to use SSL certificates from the Nexus private keystore
-

Repository Manager 2.5.1

The 2.5.1 release of Nexus Repository Manager Professional contains an updated version of the [CLM](#)⁶⁹⁷ integration plugin. There are no other changes/fixes in this release.

Repository Manager 2.5.0

These release notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.5.0.

See [here](#)⁶⁹⁸ for a full list of all issues fixed in the 2.5.0 release.

New and Noteworthy

Grace Period for "Remove if Released" in Snapshot Cleanup Task

You can now specify a period of days to for Nexus Repository Manager to wait before it removes all snapshots from a released GAV.

New Scheduled Task to Remove Old Releases

689 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5729>

690 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5731>

691 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5732>

692 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5768>

693 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5214>

694 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5714>

695 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5346>

696 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5325>

697 <http://www.sonatype.com/clm/overview>

698 <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=12952>

A new scheduled task has been added which allows cleanup of old releases. Please see our [blog post](#)⁶⁹⁹ about removing old releases for the intended use cases.

Removal of Per-Profile Staging Repository Limit

In prior releases of Nexus Repository Manager you could only have 1000 repositories associated with a given staging profile. This limit has been removed.

Override Local Storage Location of Staging Repositories

It is now possible to override the disk storage location used for staging repositories. See [NXCM-1221](#)⁷⁰⁰ for details.

Compatibility Notes

Java 6 Support is Deprecated

Java 6 reached [Official EOL](#)⁷⁰¹ on February 2013. Since it is no longer receiving updates we are deprecating support for running Nexus Repository Manager with Java 6 in the 2.5 release, and will be removing it in the upcoming 2.6 release.

Ping and Startup Timeouts Disabled in Java Service Wrapper

The Java Service Wrapper ping and start up timeouts have been disabled. These timeouts are used to automatically restart the server if it appears to be hung. Over time we've found that use of these timeouts have two significant flaws:

1. They often restart the server when it is not necessary
2. When they restart the server it results in the loss of valuable diagnostic information

If you want to re-enable these you can do so by editing <nexus_root>/bin/jsw/conf/wrapper.conf and setting the "wrapper.ping.timeout" and "wrapper.startup.timeout" to 390 and 300 seconds respectively.

Significant Bug Fixes

CLM

- [NXCM-5236](#)⁷⁰² The nexus-clm plugin should respect insight scanner 'timeToReport' value

Licensing

- [NXCM-5176](#)⁷⁰³ When nexus not running, and user submits license key, no message indicating what went wrong
- [NXCM-5181](#)⁷⁰⁴ Can't install new license into expired trial.

⁶⁹⁹ <https://support.sonatype.com/entries/20871791-Can-I-delete-releases-from-Nexus-after-they-have-been-published>

⁷⁰⁰ <https://issues.sonatype.org/browse/NXCM-1221>

⁷⁰¹ <http://www.oracle.com/technetwork/java/eol-135779.html>

⁷⁰² <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5236>

⁷⁰³ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5176>

- [NXCM-5183](#)⁷⁰⁵ Nexus instance with expired non-trial license shows "to get started log in with admin/admin123"
- [NXCM-5184](#)⁷⁰⁶ Sub-Optimal license installation experience for new nexus pro installs
- [NXCM-5185](#)⁷⁰⁷ header license expiry message missing space

LDAP

- [NXCM-5067](#)⁷⁰⁸ Enterprise LDAP may not be pooling LDAPS connections by default
- [NXCM-5165](#)⁷⁰⁹ LDAP Refresh button freezes Nexus UI

NuGet

- [NXCM-5131](#)⁷¹⁰ NuGet: expiration settings related to max age are editable but reset to zero when saved, item max age blanked

P2/OBR

- [NEXUS-5225](#)⁷¹¹ p2-bridge produces loads of temp folders
- [NXCM-4485](#)⁷¹² P2 bridge should create temporary directories under tmp/p2-bridge directory
- [NXCM-4660](#)⁷¹³ p2-bridge produces loads of temp folders
- [NXCM-5283](#)⁷¹⁴ OBR Proxy repository broken after core change

Repositories

- [NEXUS-2450](#)⁷¹⁵ Maven2 to Maven1 ejb artifacts are served from **/jars/ directory instead of **/ejbs/
- [NEXUS-4306](#)⁷¹⁶ metadata not updated when a release artifact is deleted
- [NEXUS-5511](#)⁷¹⁷ Extend Core to improve reasoning when ItemNotFoundEx is thrown
- [NEXUS-5662](#)⁷¹⁸ Log user ID in deleted artifacts message
- [NXCM-5187](#)⁷¹⁹ Browse Remote does not work when expired remote ssl certificate is added to Nexus truststore

705 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5183>

706 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5184>

707 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5185>

708 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5067>

709 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5165>

710 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5131>

711 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5225>

712 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4485>

713 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4660>

714 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5283>

715 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-2450>

716 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4306>

717 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5511>

718 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5662>

719 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5187>

- [NXCM-5192](#)⁷²⁰ NPE when creating a proxy repo
- [NEXUS-5663](#)⁷²¹ INFO org.sonatype.nexus.proxy.maven.routing.internal.ManagerImpl - Repository out of service messages need context
- [NEXUS-5673](#)⁷²² Shadow ItemNotFoundException when items deleted from master
- [NXCM-5219](#)⁷²³ Useless 'Repository out of service' log message

Routing

- [NEXUS-5621](#)⁷²⁴ Blocking routing rule omits "applied mappings"
- [NEXUS-5628](#)⁷²⁵ Automatic Routing prefixes.txt file does not contain Yum repository metadata
- [NEXUS-5698](#)⁷²⁶ S3 scraper fails to retrieve bucket list if response is truncated
- [NXCM-5188](#)⁷²⁷ Strict Checksum enforcement breaks Automatic Routing
- [NXCM-5222](#)⁷²⁸ prefix file discovery for secure central logs stack trace when missing auth token

Scheduled Tasks

- [NEXUS-3742](#)⁷²⁹ Grace period for remove if released snapshot cleanup
- [NEXUS-5607](#)⁷³⁰ Default values in snapshot removal task cause all snapshots to be deleted
- [NEXUS-5612](#)⁷³¹ Undesired interaction between RecreateMavenMetadataWalkerProcessor and DefaultFSPeer
- [NEXUS-5629](#)⁷³² Scheduled Tasks disappears
- [NXCM-4665](#)⁷³³ Scheduled Task to remove releases
- [NXCM-4979](#)⁷³⁴ Scheduled tasks disappearing
- [NEXUS-5682](#)⁷³⁵ Repeated log spam at DEBUG level attempting to delete checksum files while running Snapshot Removal Task

Search/Index

720 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5192>

721 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5663>

722 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5673>

723 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5219>

724 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5621>

725 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5628>

726 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5698>

727 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5188>

728 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5222>

729 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-3742>

730 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5607>

731 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5612>

732 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5629>

733 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4665>

734 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4979>

735 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5682>

- [NEXUS-4599](#)⁷³⁶ /service/local/lucene/search docs indicate wrong result type
- [NEXUS-5641](#)⁷³⁷ nexus ignores lucene.fsdirectory.type in some cases
- [NEXUS-5658](#)⁷³⁸ NEXUS-5641 timeline plugin does not honour lucene.fsdirectory.type property
- [NXCM-4867](#)⁷³⁹ IndexerManagerEventInspector - Could not maintain index
- [NXCM-5047](#)⁷⁴⁰ Custom metadata not updated for deleted artifacts

Secure Central

- [NXCM-4859](#)⁷⁴¹ Failed to fetch authtoken should not log stack trace

Security

- [NEXUS-267](#)⁷⁴² Enable sorting by column in the "security/users" table
- [NEXUS-5037](#)⁷⁴³ single quote symbol is accepted as user password but then does not work
- [NXCM-4361](#)⁷⁴⁴ Add salting to password hashing

Smart Proxy

- [NXCM-4761](#)⁷⁴⁵ Add error handler to cope with unexpected messages from non-compatible NX
- [NXCM-4958](#)⁷⁴⁶ Smart proxy preemptive fetch causes log spam when files deployed on remote don't match the release/snapshot repo policy

SSL

- [NXCM-5150](#)⁷⁴⁷ SSL:LDAP capability screen a bit unclear
- [NXCM-5163](#)⁷⁴⁸ "Load Certificate" buttons should not be enabled unless text field/area has content
- [NXCM-5146](#)⁷⁴⁹ Generic error message when smtp test fails due to untrusted cert

Staging/Build Promotion

- [NXCM-1221](#)⁷⁵⁰ Allow override of local storage for staging repositories.

736 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4599>

737 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5641>

738 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5658>

739 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4867>

740 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5047>

741 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4859>

742 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-267>

743 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5037>

744 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4361>

745 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4761>

746 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4958>

747 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5150>

748 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5163>

749 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5146>

- [NXCM-5122](#)⁷⁵¹ NXCM-4906 Summary view is not scrollable
- [NXCM-5138](#)⁷⁵² Canceling staging operation task while rule is walking results in "passed" rule
- [NXCM-5141](#)⁷⁵³ staging repository dates can display wrong timezone
- [NXCM-5153](#)⁷⁵⁴ Staging upload UI silently pushes into existing open directory
- [NXCM-5161](#)⁷⁵⁵ Staging upload over UI description is mandatory but unused
- [NXCM-5179](#)⁷⁵⁶ Get rid of arbitrary per profile 999 repository limit for staging profiles
- [NXCM-5189](#)⁷⁵⁷ Add support for plugins to contribute columns to staging repositories view
- [NXCM-5190](#)⁷⁵⁸ Add support for plugins to contribute fields to staging repository summary view
- [NXCM-5191](#)⁷⁵⁹ Add chiclet detail to staging summary and master grid column
- [NXCM-5194](#)⁷⁶⁰ nexus-staging-maven-plugin is not deploying maven-metadata.xml for maven-plugins
- [NXCM-5197](#)⁷⁶¹ Warnings in log when running the "drop inactive staging repositories" task.
- [NXCM-5198](#)⁷⁶² Cannot list staging repositories while "drop inactive staging repositories" task is running.
- [NXCM-5209](#)⁷⁶³ saving a staging profile with a target group that does not exist silently fails
- [NXCM-5210](#)⁷⁶⁴ hang performing staging and security operations
- [NXCM-5239](#)⁷⁶⁵ Addition of properties on staging repository DTO causing maven-plugin to fail (as well as older clients)
- [NXCM-5240](#)⁷⁶⁶ Addition of noSessionTimeout to /status causes staging maven-plugin to fail
- [NXCM-5302](#)⁷⁶⁷ Protect against staging.xml corruption

UI

- [NEXUS-5483](#)⁷⁶⁸ help icons are missing for many form fields

751 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5122>

752 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5138>

753 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5141>

754 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5153>

755 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5161>

756 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5179>

757 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5189>

758 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5190>

759 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5191>

760 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5194>

761 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5197>

762 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5198>

763 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5209>

764 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5210>

765 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5239>

766 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5240>

767 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5302>

768 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5483>

- [NEXUS-5580](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5580)⁷⁶⁹ Confusing SMTP validation UI
- [NEXUS-5596](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5596)⁷⁷⁰ IE 10 Compatibility
- [NEXUS-5597](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5597)⁷⁷¹ NEXUS-5596 dialog shadow rendering is not transparent
- [NEXUS-5598](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5598)⁷⁷² NEXUS-5596 element warnings in console
- [NEXUS-5599](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5599)⁷⁷³ Block using IE7 or IE7 compatibility from using nexus UI
- [NEXUS-5613](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5613)⁷⁷⁴ Capabilities grid should default to sort by type
- [NEXUS-5614](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5614)⁷⁷⁵ Failed capability icon is same as disabled
- [NEXUS-5615](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5615)⁷⁷⁶ User profile summary requires "Last Name" but default configuration "admin" last name is blank
- [NEXUS-5672](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5672)⁷⁷⁷ NEXUS-5389 Extract ExtJS3 UI as a plugin
- [NEXUS-5667](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5667)⁷⁷⁸ Upgrade to ExtJS 3.4.1.1
- [NEXUS-5710](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5710)⁷⁷⁹ CSS does not load on content index pages

Yum

- [NEXUS-5702](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5702)⁷⁸⁰ Yum: Generate Metadata capability does not automatically execute on rpm upload when a Yum: Generate Metadata scheduled task is present

Misc.

- [NEXUS-5420](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5420)⁷⁸¹ Nexus email notifications should include a link back to the server that sent them
- [NEXUS-5468](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5468)⁷⁸² http connection leak triggered by LocalStorageException
- [NEXUS-5585](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5585)⁷⁸³ Massive request if version check fails
- [NEXUS-5660](https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5660)⁷⁸⁴ `java.net`⁷⁸⁵.preferIPv4Stack=true should be set by default in case Java 7+ or JMX is used with Nexus

769 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5580>

770 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5596>

771 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5597>

772 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5598>

773 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5599>

774 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5613>

775 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5614>

776 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5615>

777 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5672>

778 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5667>

779 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5710>

780 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5702>

781 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5420>

782 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5468>

783 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5585>

784 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5660>

785 <http://java.net/>

-
- [NEXUS-5678](#)⁷⁸⁶ Disable ping timeout and startup timeout in wrapper.conf
 - [NEXUS-5712](#)⁷⁸⁷ change logging pattern layout to include the full thread name by default

Repository Manager 2.4

These release notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.4.0.

See [here](#)⁷⁸⁸ for a full list of all issues fixed in the 2.4.0 release.

Important: If you are making use of the Nexus Repository Manager Professional Staging/Build Promotion Suite read the compatibility notes below before upgrading to the 2.4.0 release.

New and Noteworthy

SSL Certificate Management

Previously, a Nexus Repository Manager which accessed remote servers that used SSL self-signed or client certificates required a Nexus Repository Manager administrator to manually install these certificates into a Java keystore/truststore using third-party command line tools. Detecting the cause of a connectivity problem in this case usually involved inspecting log files. This process was tedious and error prone.

Nexus Repository Manager 2.4 now provides a UI to manage SSL certificates for both repositories and LDAP servers. If access to a server is blocked due to an SSL certificate problem the UI will clearly show this. Using the new SSL certificate UI a Nexus Repository Manager administrator can inspect and approve the remote certificate, allowing Nexus Repository Manager to connect.

Automatic Routing

Nexus Professional's new [Automatic Routing \(see page 0\)](#) feature uses several new strategies to automatically detect the contents of remote proxy repositories so that it can avoid making unnecessary calls to their remotes. This results in a significant performance improvement for Nexus instances that contain multiple proxy repositories.

Staging: Improved Support for Long-running Operations

The staging repository UI and corresponding REST endpoints been reworked to provide feedback for close/promote/release operations that invoke long running staging rules.

Full documentation for the UI changes are available in the [documentation\(see page 0\)](#).

The [nexus-staging-maven-plugin](#)⁷⁸⁹ has also been updated to properly handle long running staging rules.

Staging: Scheduled Task to Remove Inactive Staging Repositories

⁷⁸⁶ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5678>

⁷⁸⁷ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5712>

⁷⁸⁸ <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=12952>

⁷⁸⁹ <https://github.com/sonatype/nexus-maven-plugins/tree/master/staging/maven-plugin>

A scheduled task has been added which can remove staging repositories which are in open, closed, or promoted states and have been inactive for a specified number of days. See the [Scheduled Task \(see page 0\)](#) documentation for more information.

New Nexus Maven Settings Plugin

The "settings-download" goal of the old nexus-maven-plugin has been replaced by a new Maven plugin, the [Nexus M2Settings Maven Plugin\(see page 433\)](#). This completes the deprecation of the old "nexus-maven-plugin".

Compatibility Notes

Nexus Plugin for Maven Retired

The [Nexus Plugin for Maven](#)⁷⁹⁰ has been deprecated for the past few releases. Due to changes in the staging REST API it no longer works with Nexus 2.4.0. Users must use the new [nexus-staging-maven-plugin](#)⁷⁹¹ and [nexus-m2settings-maven-plugin](#)⁷⁹² instead.

Nexus Maven Staging Plugin and Nexus Staging Ant Tasks

If you are using the [nexus-staging-maven-plugin](#)⁷⁹³ you will need to upgrade the version in your pom files to 1.4.4.

If you are using the [nexus-staging-ant-tasks](#)⁷⁹⁴ you will need to upgrade to version 1.4.

Staging REST API Changes

Scripts which directly call the staging REST API may require changes.

- close/promote/release/drop operations are now asynchronous. Drop operations, including nexus-staging:release with auto-drop enabled, are complete when the response code is 404. For other operations, a GET request to "/service/local/staging/repository/<repo-id>" that returns a 'transitioning' field value of false indicates the operation is complete.
- the staging repository 'closed' field has been renamed and repurposed to an 'updated' field - meaning the last time an operation was recorded against the staging repository.

New Privileges Required to Access Staging Repository UI

The following privileges are now needed for access to the staging repository UI:

- Staging: Rule Types (read)
- Staging: Rule Set (read)

These privileges have been added in to the built in 'UI:Staging Repositories" role in the 2.4 release.

Significant Bug Fixes

⁷⁹⁰<http://search.maven.org/#search%7Cgav%7C1%7Cg%3A%22org.sonatype.plugins%22%20AND%20a%3A%22nexus-maven-plugin%22>

⁷⁹¹ <https://github.com/sonatype/nexus-maven-plugins/tree/master/staging/maven-plugin>

⁷⁹² <https://github.com/sonatype/nexus-maven-plugins/tree/master/m2settings/maven-plugin>

⁷⁹³ <https://github.com/sonatype/nexus-maven-plugins/tree/master/staging/maven-plugin>

⁷⁹⁴ <https://github.com/sonatype/nexus-ant-tasks/tree/master/nexus-staging-ant-tasks>

LDAP

- [NEXUS-5478](#)⁷⁹⁵ - LDAP Group ID's which contain "&" do not work
- [NEXUS-5679](#)⁷⁹⁶ - LDAP connection leak
- [NXCM-4885](#)⁷⁹⁷ - Enterprise LDAP UI is broken
- [NXCM-4977](#)⁷⁹⁸ - Enterprise LDAP user cache is hard coded to 100, and no override is set in ehcache.xml
- [NXCM-4998](#)⁷⁹⁹ - Use user ID sent to nexus as LDAP cache key, not user ID retrieved from LDAP

Licensing

- [NXCM-4890](#)⁸⁰⁰ - UI does not show when license has expired

Maven Repositories

- [NEXUS-3398](#)⁸⁰¹ - Repository is blocked for config additions while downloading indexes
- [NEXUS-5418](#)⁸⁰² - Maven repositories handles sha1/md5 files "as one" with main file, but is not locking them
- [NEXUS-5481](#)⁸⁰³ - display the reason a remote repository is auto-blocked in the ui
- [NEXUS-5505](#)⁸⁰⁴ - Nexus attribute mechanism causing collisions with platform special files
- [NEXUS-5521](#)⁸⁰⁵ - Repository groups are sorted in reverse order
- [NEXUS-5525](#)⁸⁰⁶ - Custom packaging types do not show up in index after deployment
- [NEXUS-5539](#)⁸⁰⁷ - Refresh of Nexus Managed Repositories list clears list
- [NEXUS-5556](#)⁸⁰⁸ - Bookmarkable URLs no longer work in repository view
- [NEXUS-5606](#)⁸⁰⁹ - Deleting an artifact should delete it's md5 and sha1 too
- [NXCM-4968](#)⁸¹⁰ - Maven Dependency display broken
- [NXCM-4994](#)⁸¹¹ - Nexus managed repo disappears from list after deleting file

795 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5478>

796 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5679>

797 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4885>

798 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4977>

799 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4998>

800 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4890>

801 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-3398>

802 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5418>

803 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5481>

804 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5505>

805 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5521>

806 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5525>

807 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5539>

808 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5556>

809 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5606>

810 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4968>

811 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4994>

Procurement

- [NXCM-4861](#)⁸¹² - Could not acquire exclusive lock on repository procured in 60 seconds

Search/Index

- [NEXUS-5517](#)⁸¹³ - Latest fields are filled in only when "collapse" happens of search result
- [NEXUS-5542](#)⁸¹⁴ - Update index task fails if one of the processed repositories gets a SocketTimeoutException
- [NEXUS-5570](#)⁸¹⁵ - Uninitialized variable in LockingIndexingContext can cause NPE during search
- [NEXUS-5577](#)⁸¹⁶ - Update to maven indexer 5.1.1

Security

- [NEXUS-5520](#)⁸¹⁷ - Role management UI gets duplicated
- [NXCM-4941](#)⁸¹⁸ - Render problem for Access User Token in Chrome

Staging/Build Promotion

- [NXCM-4780](#)⁸¹⁹ - build promotion that takes long time and has rule failures does not display rule failures to ui
- [NXCM-4786](#)⁸²⁰ - staging repositories list does not always show promoted repositories
- [NXCM-4805](#)⁸²¹ - when error on nexus deploy due to bad url, print the url
- [NXCM-4900](#)⁸²² - Nexus should not allow a user to delete a staging profile that has repositories associated with it.
- [NXCM-4901](#)⁸²³ - Misleading "Missing MD5" message when staging checksum validation fails
- [NXCM-5025](#)⁸²⁴ - Staging release incorrectly fails with access denied exception
- [NXCM-5205](#)⁸²⁵ - Changing the repository target of a staging profile that has promoted repositories causes them to be dropped.
- [NXCM-5045](#)⁸²⁶ - Release fails if requestor e-mail address can't be found

812 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4861>

813 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5517>

814 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5542>

815 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5570>

816 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5577>

817 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5520>

818 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4941>

819 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4780>

820 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4786>

821 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4805>

822 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4900>

823 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4901>

824 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5025>

825 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5205>

826 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5045>

- [NXCM-5175](#)⁸²⁷ - If staging fails due to too many stages repository limit being hit no message is logged

Misc.

- [NXCM-4431](#)⁸²⁸ - Finalize deprecation of nexus-maven-plugin.
- [NEXUS-5506](#)⁸²⁹ - New REST API documentation is extremely difficult to navigate
- [NEXUS-5549](#)⁸³⁰ - Wrong NexusApplication log level
- [NEXUS-5480](#)⁸³¹ - Wrong Mount Points in API docs

Known Issues

- [NEXUS-5628](#)⁸³² - Automatic Routing prefixes.txt file does not contain Yum repository metadata

Repository Manager 2.3.1

Bug fixes in this release:

- [NEXUS-5491](#)⁸³³ - Entering username/password for proxy settings in a repository cause clearing of all values on save
- [NEXUS-5517](#)⁸³⁴ - Latest fields are filled in only when "collapse" happens on search result
- [NEXUS-5521](#)⁸³⁵ - Repository groups are sorted in reverse order

Repository Manager 2.3

These release notes are a compilation of new features and significant bug fixes for Repository Manager 2.3.

See [here](#)⁸³⁶ for a full list of all issues fixed in the 2.3 release.

New and Noteworthy

Support for Hosted and Group Yum Repositories

- Any hosted Maven 2 repository in Nexus Repository Manager can be configured to act as a Yum repository

827 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-5175>

828 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4431>

829 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5506>

830 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5549>

831 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5480>

832 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5628>

833 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5491>

834 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5517>

835 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5521>

836 <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=12653>

- Yum repositories are automatically updated if you upload/deploy/delete a new RPM into Nexus Repository Manager.
- Full group repository support so that you can logically group a set of Yum repositories behind a single URL.
- Use Yum group repositories as target of staging repositories

Revamped Search/Index

The search/index feature has been re-architected to address many long standing issue. Nexus Repository Manager search indexes are now faster, more reliable, and scales significantly better

Smart Proxy Enhancements

- Support for delete events
- Full support for staging drop/close/release (messages for individually affected artifacts, so preemptive fetch will work)

Improved solution for overriding/adding MIME Types

By default when Nexus Repository Manager downloads files into proxy repositories it validates that the downloaded file's contents match what is expected based on the file's MIME type.

This works well for most normal file types, but occasionally you may find that you need to make Nexus Repository Manager aware of new MIME types, or change one of the built in definitions.

Repository Manager 2.3 contains a new feature which allows you to do this. For information on how to use this feature see [here](#)⁸³⁷.

Plugin Compatibility Notice

A focus of the 2.3 release was updating the versions of libraries shipped with Nexus Repository Manager to pick up bug fixes, security fixes, and performance improvements. As a result there have been significant changes in versions of libraries shipped with Nexus Repository Manager 2.3, and also a few plugin API changes. If you have developed (or make use of) a Nexus plugin which is not distributed with Nexus Repository Manager you should validate that it works with the 2.3 release.

Miscellaneous Compatibility Notes

- Due to [NEXUS-5218](#)⁸³⁸ Nexus sets the "java.net.preferIPv4Stack=true" system property. If you need IPv6 support add "java.net.preferIPv4Stack=false" into the "<nexus_root>/conf/nexus.properties" file.
- The checksum Java applet has been removed [NEXUS-5361](#)⁸³⁹.

Significant Bug Fixes

Maven Repositories

⁸³⁷ <https://support.sonatype.com/entries/21730523>

⁸³⁸ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5218>

⁸³⁹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5361>

- [NEXUS-4864](#) □ 840 Nexus makes impossible to proxy Flex SWC artifacts
- [NEXUS-5197](#) □ 841 NPE in member change detection
- [NEXUS-5257](#) □ 842 Remote Browsing does not respect non-proxy hosts in http proxy settings
- [NEXUS-5258](#) □ 843 Newly added proxy repositories has rrs/provider field filled in
- [NEXUS-5382](#) □ 844 hostname with _ char in it breaks browse remote tab
- [NEXUS-5400](#) □ 845 Rebuild metadata task moves temporary upload files to the trash
- [NEXUS-5414](#) □ 846 Snapshot remover can be run against proxy repos, it removes snapshots and rewrites the cached metadata files

NuGet

- [NXCM-4745](#) □ 847 Protect against page cycles when proxying NuGet feeds
- [NXCM-4816](#) □ 848 NuGet gallery resource doesn't pick up base URL of server

Procurement

- [NXCM-4561](#) □ 849 Invalid configuration after deleting repo which is procurement source
- [NXCM-4798](#) □ 850 Procurement rules are not applied when procurement repository is in a group

Search/Index

- [NXCM-4714](#) □ 851 Maven indexer can prevent Nexus from shutting down cleanly
(Nexus83600SRepoReindexTaskIT)
- [NEXUS-5271](#) □ 852 Indexer leaves behind temp directories

Secure Central

- [NXCM-4781](#) □ 853 Retrieval of Secure Central authorization token fails through http proxy

Security

- [NXCM-4520](#) □ 854 Malicious staging rules can inject bad html

840 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4864>

841 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5197>

842 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5257>

843 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5258>

844 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5382>

845 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5400>

846 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5414>

847 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4745>

848 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4816>

849 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4561>

850 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4798>

851 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4714>

852 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5271>

853 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4781>

854 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4520>

Staging/Build Promotion

- [NEXUS-5396](#) ⁸⁵⁵ "411 Length Required" when using nexus-staging:close and other Nexus client operations with nginx
- [NXCM-4557](#) ⁸⁵⁶ Thread starvation in indexer/staging
- [NXCM-4570](#) ⁸⁵⁷ Exception on sending emails during promote/drop staging stops the flow
- [NXCM-4779](#) ⁸⁵⁸ deadlock in
org.sonatype.sisu.goodies.eventbus.internal.guava.SynchronizedEventHandler

Misc

- [NEXUS-3442](#) ⁸⁵⁹ Lots of "An exception occurred writing the response entity: null" in the log
- [NEXUS-3728](#) ⁸⁶⁰ Nexus (JSW) shell script improperly uses su command
- [NEXUS-4877](#) ⁸⁶¹ using a "&" symbol in the password field of nexus corrupts password for the user account
- [NEXUS-5169](#) ⁸⁶² Improved solution for adding/overriding MIME type mappings
- [NEXUS-5233](#) ⁸⁶³ Private Sun system property "sun.net"⁸⁶⁴.inetaddr.ttl" is used in wrapper.conf
- [NEXUS-5294](#) ⁸⁶⁵ Add visual clue that a user is read-only
- [NEXUS-5360](#) ⁸⁶⁶ Update to ExtJS3
- [NEXUS-5413](#) ⁸⁶⁷ RedirectToHttpsRule spams log with thousands of messages
- [NEXUS-5417](#) ⁸⁶⁸ capability plugin : RegexpFieldValidator inverse logic
- [NXCM-4530](#) ⁸⁶⁹ Fix logging of NoSuchRepositoryException
- [NXCM-4546](#) ⁸⁷⁰ Example jetty configurations need updating to match official jetty.xml

855 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5396>

856 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4557>

857 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4570>

858 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4779>

859 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-3442>

860 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-3728>

861 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4877>

862 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5169>

863 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5233>

864 <http://sun.net/>

865 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5294>

866 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5360>

867 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5413>

868 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5417>

869 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4530>

870 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4546>

Repository Manager 2.2.1

Bug fixes in this release:

- [NXCM-4781](#) □⁸⁷¹ - Retrieval of Secure Central authorization token fails through http proxy
-

Repository Manager 2.2

These release notes are a compilation of new features and significant bug fixes for Repository Manager 2.2

See [here](#) □⁸⁷² for a full list of all issues fixed in the 2.2 release.

New and Noteworthy

Secure Access to Maven Central

Sonatype is now offering secured SSL access to Maven Central. Providing SSL support for Central means that your components are no longer susceptible to man-in-the-middle attacks that could compromise the component. SSL also eliminates the potential for a hacker to gain visibility into your organization by tracking the components that you download for your development initiatives.

New installations of Nexus Repository Manager Professional will have secure access to central enabled by default. Upgrades to Nexus Repository Manager Professional 2.2 can be converted to use the new service by simply by changing the central URL to <https://secure.central.sonatype.com/maven2/>.

For information on obtaining this service for Nexus Open source or other repository managers visit the [Secure Access to Central](#) □⁸⁷³ site.

Note: This service requires that the JRE running your repository manager has unlimited strength JCE installed.

Note 2: We're seeing evidence that a few HTTP proxy servers may be rejecting the request Nexus Professional makes for the authorization token. If you are experiencing a problem accessing this service please file a ticket at <https://support.sonatype.com>(see page 31) and we will provide you with a token. We'll be fixing this issue soon.

Deferred Snapshot Deploy in Multi-Module Builds

The nexus-maven-staging-plugin has been enhanced to allow deferred deployment of snapshots from multi-module Maven builds. Deployed snapshots are held in a temporary location until all module builds have been completed successfully, and are deployed together. This enhancement gives transactional behavior to multi-module snapshot builds, either all modules are deployed or none are.

Hosted Site Repositories in Nexus Community Edition

⁸⁷¹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4781>

⁸⁷² <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=12384>

⁸⁷³ <http://www.sonatype.com/Products/Secure-Access-to-Central>

Nexus Community Edition now has support for hosted site repositories.

Significant Bug Fixes

Enterprise LDAP

- [NXCM-4524](#)⁸⁷⁴ Improve handling of intermittent LDAP failures
- [NXCM-4758](#)⁸⁷⁵ LDAP connection timeouts are not being cached

P2/OBR

- [NXCM-2795](#)⁸⁷⁶ OBR groups do not work properly if they contain more than one hosted repository
- [NXCM-4715](#)⁸⁷⁷ P2 mirrors does not work for composite repositories with only 1 member repository

Procurement

- [NXCM-4630](#)⁸⁷⁸ Procurement repository unusable while it is rebuilding rules

Smart Proxy

- [NXCM-4159](#)⁸⁷⁹ Preemptive fetch in smart proxy
- [NXCM-4529](#)⁸⁸⁰ Smart proxy connection doesn't pick up changes to remote URL in proxy repo configuration
- [NXCM-4626](#)⁸⁸¹ Smart Proxy Issue with Nuget Repos

Staging

- [NXCM-4447](#)⁸⁸² nexus-staging-maven-plugin deploy does not explain deploy failure context to Maven user
- [NXCM-4500](#)⁸⁸³ Staging rule set description doesn't handle multibyte characters properly
- [NXCM-4508](#)⁸⁸⁴ Wrong case displayed for staging repository name in user interface
- [NXCM-4550](#)⁸⁸⁵ staging promotion should fail with more specific error when a non-existent promotion profile is specified
- [NXCM-4567](#)⁸⁸⁶ NPE in nexus-staging when switching to direct deployUrl

874 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4524>

875 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4758>

876 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-2795>

877 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4715>

878 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4630>

879 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4159>

880 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4529>

881 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4626>

882 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4447>

883 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4500>

884 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4508>

885 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4550>

886 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4567>

- [NXCM-4580](#) ⁸⁸⁷ Staging repository reappeared after promotion.

User Token

- [NXCM-4731](#) ⁸⁸⁸ User Token link gives 404 dialog when clicked
- [NXCM-4742](#) ⁸⁸⁹ User Token UI won't load due to 404 error

Search/Index

- [NEXUS-3424](#) ⁸⁹⁰ Nexus prints stack trace to log when remote repo doesn't have an index.
- [NEXUS-5192](#) ⁸⁹¹ Improve efficiency of Nexus Index tree
- [NEXUS-5249](#) ⁸⁹² Update Indexes task stops processing on RemoteItemNotFoundException
- [NEXUS-5280](#) ⁸⁹³ DefaultIndexerManager make wrong use of ContextMemberProvider when working with groups

Repositories

- [NEXUS-4692](#) ⁸⁹⁴ Make HttpClient 4.1 the default transport in Nexus
- [NEXUS-5228](#) ⁸⁹⁵ Regression: Browse local storage tree gives 404 error message for maven-metadata.xml
- [NEXUS-5291](#) ⁸⁹⁶ RemoteRepository implementations performance: HC3x vs HC4x

Miscellaneous Fixes

- [NEXUS-5158](#) ⁸⁹⁷ When anonymous access is disabled just bring up the login dialog automatically, don't show a warning.
- [NEXUS-5184](#) ⁸⁹⁸ #include wrapper-override.conf directive should be removed since it is unreliable
- [NEXUS-5216](#) ⁸⁹⁹ Nexus Archetype plugin produces invalid catalog for non-searchable repos
- [NEXUS-5241](#) ⁹⁰⁰ Checksum and metadata deploys are being recorded in system feeds, causing them to grow very large

887 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4580>

888 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4731>

889 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4742>

890 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-3424>

891 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5192>

892 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5249>

893 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5280>

894 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4692>

895 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5228>

896 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5291>

897 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5158>

898 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5184>

899 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5216>

900 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5241>

-
- [NEXUS-5246](#) 901 Stop using 301 Redirection Permanent and switch to 307 Redirection Temporary instead in REST Resources
 - [NEXUS-5265](#) 902 remove artifactory bridge from nexus bundles
 - [NEXUS-5227](#) 903 PLEXUS_APPLICATION_PORT not utilized
-

Repository Manager 2.1.2

Significant bug fixes in this release:

- [NEXUS-5205](#) 904 - Nexus doesn't trim e-mail addresses anymore
 - [NEXUS-5219](#) 905 - Empty trash task fails
 - [NXCM-4502](#) 906 - Latest NuGet package explorer (3.0.2.0) doesn't work with Nexus.
 - [NXCM-4544](#) 907 - JS error when loading profile tab when auth required
 - [NXCM-4547](#) 908 - POST, GET staging maven plugin operations do not respect Maven configured proxy settings
 - [NXCM-4550](#) 909 - Staging promotion should fail with more specific error when a non-existent promotion profile is specified
 - [NXCM-4555](#) 910 - Usertoken queries status as soon as js loads
 - [NXCM-4582](#) 911 - NPE when proxying internal NuGet repo
-

Repository Manager 2.1.1

Bug fixes in this release:

- [NEXUS-5193](#) 912 - LDAP does not allow ldaps:// URLs
-

901 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5246>

902 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5265>

903 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5227>

904 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5205>

905 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5219>

906 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4502>

907 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4544>

908 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4547>

909 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4550>

910 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4555>

911 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4582>

912 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5193>

Repository Manager 2.1

These release notes are a compilation of new features and significant bug fixes for Sonatype Nexus Repository Manager 2.1.

See [here](#)⁹¹³ for a full list of all issues fixed in the 2.1 release.

New and Noteworthy

New Staging Suite

The Nexus Repository Manager Staging Suite has been completely revamped in Nexus Repository Manager 2.1.

Major new features include:

- Selection of staging profiles by ID from within the build
- Atomic Deploy - All artifacts from multi-module builds are uploaded together as a single entity only after everything has been successfully built
- Automatic closing of staging repository at the end of a build
- Tags can be added to staging repositories, these will be preserved on the staged artifacts in Nexus Repository Manager throughout their lifecycle.
- Local disk staging of artifacts to allow additional testing before they are uploaded to Nexus Repository Manager
- Support for staging from ANT builds, and a REST API which allows other staging clients to be easily built
- Automatically drop a staging repository if build fails
- Automatically promote a staging repository if build succeeds.

User Token Authentication

When using Apache Maven with Nexus Repository Manager, the user credentials for accessing Nexus Repository Manager have to be stored in clear text in the user's `settings.xml` file. Maven does have the ability to encrypt passwords in a user's `settings.xml`, but since the encryption is reversible it isn't truly secure. This lack of security is of particular concern when nexus is configured to use external authentication such as LDAP.

To solve this problem Nexus Repository Manager 2.1 introduces a two part token for the user, which can replace their regular credentials.

See the [book](#)⁹¹⁴ for more information about these new features.

Significant Bug Fixes

Maven Repositories

⁹¹³ <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=12155>

⁹¹⁴ <http://books.sonatype.com/nexus-book/reference/index.html>

- [NEXUS-4275](#) ⁹¹⁵ - If index download fails due to error then "download index" task should end in "broken" state.
- [NEXUS-4918](#) ⁹¹⁶ - Nexus is generating invalid maven-metadata.xml artifact GA level
- [NEXUS-4970](#) ⁹¹⁷ - Nexus Maven metadata merge operation should not throw errors on corrupt metadata
- [NEXUS-5023](#) ⁹¹⁸ - When downloading .ear or .war file, the browser thinks the extension is zip
- [NEXUS-5043](#) ⁹¹⁹ - the ~ character is not properly decoded when deployed using maven 3
- [NEXUS-5145](#) ⁹²⁰ - NPE when reusing same repository id for a proxy

NuGet Repositories

- [NXCM-3904](#) ⁹²¹ - Usability issue with NuGet: API keys are shown when key security realm has not been added.
- [NXCM-3964](#) ⁹²² - Add support for the new NuGet "FindPackagesById" data service

p2 Repositories

- [NXCM-3914](#) ⁹²³ - Newly created P2 proxies eagerly loading of remote repository's repository-metadata.xml files from mirrors can delay proxy metadata creation
- [NXCM-4053](#) ⁹²⁴ - UID deadlock when accessing p2 metadata
- [NXCM-4391](#) ⁹²⁵ - OOM is causing a deadlock in P2 Proxy Repository
- [NEXUS-5104](#) ⁹²⁶ - P2 plugin proxy repository does not obey "local only" flag in requests

Repositories (general)

- [NEXUS-4064](#) ⁹²⁷ - Turning off "publish url" for a repository causes most context menu items in repository view to disappear.
- [NEXUS-4855](#) ⁹²⁸ - Repository registry becomes a CPU hog when registrytry contains a lot of repositories, and does too much

915 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4275>

916 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4918>

917 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4970>

918 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5023>

919 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5043>

920 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5145>

921 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3904>

922 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3964>

923 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3914>

924 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4053>

925 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4391>

926 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5104>

927 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4064>

928 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4855>

- [NEXUS-4871](#) □⁹²⁹ - Attribute storage should discard empty attribute files
- [NEXUS-4878](#) □⁹³⁰ - When deleting repositories if there are dependencies you get an awful error message giving a bad request
- [NEXUS-4984](#) □⁹³¹ - Zero length checksum file causes artifact to be rejected when checksum policy is "Warn"
- [NEXUS-5109](#) □⁹³² - NFC is inherited by different repositories having same repoID

Scheduled Tasks

- [NEXUS-4465](#) □⁹³³ - Next run is wrong for scheduled tasks usingng advanced cron expression
- [NEXUS-4862](#) □⁹³⁴ - Snapshot remover shouldn't stop processing if it encounters a zero length file.

Security

- [NXCM-4274](#) □⁹³⁵ - Credential time outs
- [NEXUS-5040](#) □⁹³⁶ - Role cannot be edited if it contains a privilege contributed by a plugin which has been removed
- [NEXUS-5048](#) □⁹³⁷ - Multibyte characters are not handled correctly in user administration screen.
- [NEXUS-5064](#) □⁹³⁸ - LDAP connection pool doesn't work with SSL
- [NEXUS-5122](#) □⁹³⁹ - ConcurrentModificationException in security XmlRolePermissionResolver

Security Vulnerabilities

- [NXCM-4061](#) □⁹⁴⁰ - Investigate and resolve security vulnerabilities in Nexus 2.0.x branch identified by Insight scan
- [NXCM-4477](#) □⁹⁴¹ - Disable logging capability due to security vulnerability in XML external entity reference
- [NEXUS-5031](#) □⁹⁴² - Upgrade to latest Jetty 7.x to solve known denial of service security vulnerabilities

Smart Proxy

929 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4871>

930 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4878>

931 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4984>

932 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5109>

933 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4465>

934 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4862>

935 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4274>

936 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5040>

937 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5048>

938 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5064>

939 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5122>

940 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4061>

941 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4477>

942 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5031>

- [NXCM-3750](#)⁹⁴³ - Changes to group config are not propagated to subscribers
- [NXCM-3747](#)⁹⁴⁴ - Recursive events sent to subscriber for delete events
- [NXCM-3872](#)⁹⁴⁵ - Smart proxy broker database that is not accessible due to file permissions can prevent startup of nexus
- [NXCM-3795](#)⁹⁴⁶ - ConcurrentModificationException after reaching Broker memory limits
- [NXCM-4516](#)⁹⁴⁷ - Smart proxy expire cache isn't working.

Staging

- [NXCM-1269](#)⁹⁴⁸ - Can't see all failures in staging rules dialog (it needs a vertical scrollbar).
- [NXCM-2874](#)⁹⁴⁹ - Add a role to Nexus which includes all privileges needed to deploy/release/promote for a staging profile.
- [NXCM-3133](#)⁹⁵⁰ - only the staging bundle deployer or someone w/ a special preventivilege should be able do drop a staging bundle
- [NXCM-3526](#)⁹⁵¹ - staging repos table - sorting by date sorts literally
- [NXCM-3768](#)⁹⁵² - Staging release replaces metadata then rebuilds it
- [NXCM-4381](#)⁹⁵³ - Add deprecation logging message to old nexus-maven-plugin goals
- [NXCM-4476](#)⁹⁵⁴ - Staging descriptions that have multi-byte characters don't show up in e-mails.

Miscellaneous Fixes

- [NXCM-3876](#)⁹⁵⁵ - Maven Settings template ID has poor UI validation resulting in Server http 500 400 errors
- [NXCM-4191](#)⁹⁵⁶ - Custom metadata support for multiple n3 files
- [NXCM-4433](#)⁹⁵⁷ - Can't install binary license file using Chrome 20
- [NXCM-4475](#)⁹⁵⁸ - Runtime Exception starting Nexus 2.0.6

943 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3750>

944 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3747>

945 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3872>

946 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3795>

947 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4516>

948 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-1269>

949 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-2874>

950 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3133>

951 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3526>

952 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3768>

953 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4381>

954 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4476>

955 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3876>

956 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4191>

957 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4433>

958 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4475>

-
- [NEXUS-4863](#)⁹⁵⁹ - Nexus Plugin Manager matches plugin interdependencies by GA only on loaded plugins
 - [NEXUS-4905](#)⁹⁶⁰ - Files not ending in "pom" or "jar" don't show up in "newly cached files" system feed
 - [NEXUS-5018](#)⁹⁶¹ - Project generated from nexus plugin archetype doesn't compile
 - [NEXUS-5185](#)⁹⁶² - Add context menu to main tabs so that they can be mass-closed
-

Repository Manager 2.0.6

Bug fixes in this release:

- [NXCM-4372](#)⁹⁶³ - Nexus running in '/' breaks licensing redirection
 - [NXCM-4374](#)⁹⁶⁴ - "upload a license file" link doesn't work in IE9
 - [NEXUS-5096](#)⁹⁶⁵ - Security should cache created WildcardPermission objects, not recreating them over and over again
 - [NEXUS-5099](#)⁹⁶⁶ - Memory leak in attributes upgrader when running against virtual M1 -> M2 repo
-

Repository Manager 2.0.5

New and Noteworthy

This release has added support to streamline the initial Nexus Repository Manager experience for new users. Please visit the [Nexus Evaluation Guide](#)⁹⁶⁷ site for more information.

Significant Bug Fixes

General Improvements

- [NXCM-4111](#)⁹⁶⁸ - Regression: When metadata expires for p2 proxy repository the metadata is always downloaded and processed again
 - [NXCM-4112](#)⁹⁶⁹ - MimeDetector is not picking up NuGet specific mime-types.properties
-

959 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4863>

960 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-4905>

961 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5018>

962 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5185>

963 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4372>

964 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4374>

965 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5096>

966 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5099>

967 <http://links.sonatype.com/products/nexus/pro-eval/eval-guide.html>

968 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4111>

- [NXCM-4164](#)⁹⁷⁰ - Regression: Crowd security realm is picking up global http proxy settings
- [NXCM-4175](#)⁹⁷¹ - Poor performance for requests coming into procurement repository
- [NXCM-4226](#)⁹⁷² - NuGet FindPackagesById service generates incorrect 'next' query links

Security

- [NEXUS-5049](#)⁹⁷³ - Anonymous disabled, but still can log in

A full list of all issues fixed in Nexus Repository Manager Professional 2.0.5 can be found [here](#)⁹⁷⁴.

Repository Manager 2.0.4-1

Bug fixes in this release:

- [NEXUS-5035](#)⁹⁷⁵ Regression: Performance degradation when sending error responses
-

Repository Manager 2.0.4

New and Noteworthy

This release has added additional links to documentation and support resources including links to the Sonatype Knowledge Base in an effort to add more paths for users to take advantage of relevant documentation.

Significant Bug Fixes

General Improvements

- [NXCM-4047](#)⁹⁷⁶ - NuGet version column should sort by numeric grouping rather than the default
- [NXCM-4084](#)⁹⁷⁷ - Add Insight security and license information to artifact search results

Security

- [NEXUS-5032](#)⁹⁷⁸ - XSS vulnerability in /artifact/maven/resolve REST endpoint
-

⁹⁷⁰ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4164>

⁹⁷¹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4175>

⁹⁷² <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4226>

⁹⁷³ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5049>

⁹⁷⁴ <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=11856>

⁹⁷⁵ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5035>

⁹⁷⁶ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4047>

⁹⁷⁷ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-4084>

⁹⁷⁸ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5032>

- [NEXUS-50321](#)⁹⁷⁹ - Upgrade to latest Jetty 7.x to solve known denial of service security vulnerabilities

A full list of all issues fixed in Nexus Professional 2.0.4 can be found [here](#)⁹⁸⁰.

Repository Manager 2.0.3

Bug fixes in this release:

- [NXCM-3972](#)⁹⁸¹ - Modify NuGet REST endpoint so it checks read privilege instead of view privilege
 - [NXCM-3963](#)⁹⁸² - Deadlock in p2 group repository
 - [NXCM-3952](#)⁹⁸³ - NuGet database lock-file may stay around after shutdown if the computer's IP address changes while Nexus is running
-

Repository Manager 2.0.2

Bug fixes in this release:

- [NXCM-3938](#)⁹⁸⁴ - Newly published "p2.index" file is causing proxies of [eclipse.org](#)⁹⁸⁵ update site to fail.
 - [NXCM-3946](#)⁹⁸⁶ - Wrong URL is returned from "/service/local/ldap/servers" REST resource.
 - [NXCM-3947](#)⁹⁸⁷ - NuGet plugin does not return expected 401 when anonymous user with no read privileges accesses the gallery
-

Repository Manager 2.0.1

Bug fixes in this release:

- [NXCM-3917](#)⁹⁸⁸ - NuGet tab does not need to fetch the repository configuration
-

979 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NEXUS-5032%5C1>

980 <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=11750>

981 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3972>

982 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3963>

983 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3952>

984 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3938>

985 <http://eclipse.org/>

986 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3946>

987 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3947>

- [NXCM-3916](#)⁹⁸⁹ - P2 proxy repository fails to connect to remote if HTTP proxy server is configured.
 - [NXCM-3910](#)⁹⁹⁰ - window title should match more closely to product title
 - [NXCM-3871](#)⁹⁹¹ - Admin user mapped in through LDAP group mapping cannot log in after license has expired.
 - [NXCM-3004](#)⁹⁹² - Mirrors fail to download properly for Indigo update site
-

Repository Manager 2.0

These release notes are a compilation of new features, system requirements, and significant bug fixes specific to Repository Manager.

See the [Sonatype Nexus OSS Release Notes](#)⁹⁹³ for the corresponding changes in the base product.

A full list of all issues fixed in Nexus Repository Manager Professional 2.0 can be found [here](#)⁹⁹⁴.

Nexus Repository Manager Professional can be downloaded through the [Repository Manager Download page](#)(see page 125).

Important Upgrade Notes

Important: Please read over the release notes carefully and refer to the instructions on [Upgrading Nexus](#)⁹⁹⁵. The upgrade process has changed notably.

Memory Requirements

Nexus Repository Manager 2.0 requires more JVM heap memory than previous versions by default. The JVM Perm Gen settings have been increased to 192MB to allow for this. This is primarily due to the newly added Smart Proxy and NuGet features. If you do not plan to use enable these features, Nexus Repository Manager's memory requirements will be reduced.

- [NXCM-3880](#)⁹⁹⁶ - Bump perm gen space in wrapper to 192Mb

New and Noteworthy

NuGet Support

⁹⁸⁹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3916>

⁹⁹⁰ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3910>

⁹⁹¹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3871>

⁹⁹² <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3004>

⁹⁹³ <https://docs.sonatype.com/display/SPRTNXOSS/Sonatype+Nexus+Release+Notes>

⁹⁹⁴ <https://issues.sonatype.org/secure/ReleaseNote.jspa?projectId=10060&version=11252>

⁹⁹⁵ <https://sonatype.zendesk.com/entries/23031188-How-do-I-upgrade-Nexus->

⁹⁹⁶ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=Nexus%3ANXCM-3880>

With the recent creation of the [NuGet](#)⁹⁹⁷ project a package management solution for .NET developers has become available. Similar to Maven dependency management for Java developers, NuGet makes it easy to add, remove and update libraries and tools in Visual Studio projects that use the .NET Framework.

Starting with version 2.0 Repository Manager has full support for NuGet Repositories, including hosted, proxy, virtual, and group repositories.

Related User Stories:

- [NXCM-3482](#)⁹⁹⁸ - Investigate support for NuGet repositories
- [NXCM-3537](#)⁹⁹⁹ - Enhancements to basic NuGet support

Nexus Smart Proxy

Nexus Repository Manager Professional 2.0 includes a distributed eventing mechanism called Smart Proxy.

Smart Proxy is built on a secure and reliable messaging layer that enables Nexus repositories to communicate event information (e.g. a new artifact has been uploaded). This reliable delivery of event information and the resulting awareness by subscribing Nexus instances enables customers to build out deployment topologies that can achieve higher levels of availability and resiliency.

This means a number of geographically distributed Nexus instances are now able to operate as a more cohesive repository network. This cohesion will expand as we continue to add other services that leverage the new awareness the messaging and eventing fabric provide.

For more information how this important new feature can improve your Nexus Repository Manager topology, refer to the [documentation](#)(see page 324).

Related User Story: [NXCM-3485](#)¹⁰⁰⁰ - As a user I need a proxy repository which works properly running against remotes that have frequent updates

Insight Repository Health Check Plugin (Pro)

Repository Health Check is a feature of Nexus that facilitates data used for [Sonatype Insight](#)¹⁰⁰¹. Sonatype Insight is a separate product that consists of tools to monitor and manage license, quality and security data about artifacts used in your software development life cycle.

Repository Health Check provides access to a subset of the available data in Sonatype Insight right in your Nexus server. This service provides information about artifacts Nexus has downloaded from Maven Central, including license information, security vulnerability data and other statistics.

User Interface Improvements

A fresh look consistent with other Sonatype products.

⁹⁹⁷ <http://nuget.org/>

⁹⁹⁸ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3482>

⁹⁹⁹ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3537>

¹⁰⁰⁰ <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3485>

¹⁰⁰¹ <http://sonatype.com/Products/Sonatype-Insight>

See [Sonatype Nexus OSS 2.0 Release Notes](#)¹⁰⁰² for a summary of additional changes affecting the user interface.

Significant Bug Fixes

This list contains other significant new features and bug fixes in Nexus 2.1. See [here](#)¹⁰⁰³ a complete list of all issues fixed in Nexus 2.1.

General Improvements

- [NXCM-2928](#)¹⁰⁰⁴ - Noise on update sites in Nexus logs
- [NXCM-3616](#)¹⁰⁰⁵ - nexus-p2-plugin prints a ton of log on nexus startup
- [NXCM-3627](#)¹⁰⁰⁶ - Procurement repository auto-blocks if "remote" throws an access denied exception
- [NXCM-3643](#)¹⁰⁰⁷ - Change name of "Maven Central" proxy to "Central"
- [NXCM-3690](#)¹⁰⁰⁸ - Remove the google code proxy repository from the default configuration
- [NXCM-3737](#)¹⁰⁰⁹ - Left navigation menu cleanup
- [NXCM-3503](#)¹⁰¹⁰ - The way custom metadata indexes are laid out in "indexer-pro" directory can cause collisions.
- [NXCM-3666](#)¹⁰¹¹ - Change log level of
org.apache.shiro.web.filter.authc.BasicHttpAuthenticationFilter to INFO
- [NXCM-3676](#)¹⁰¹² - Provide option (via system property) to prevent staging deploy from failing if a user doesn't have access to a profile in the list.

Security

- [NXCM-2974](#)¹⁰¹³ - Nexus doesn't seem to handle entities in ldap username correctly
- [NXCM-3025](#)¹⁰¹⁴ - Authentication caching is not working for crowd security realm.
- [NXCM-3645](#)¹⁰¹⁵ - Anonymous user can access unexposed repositories in Nexus

1002 <https://docs.sonatype.com/display/SPRTNXOSS/Sonatype+Nexus+Release+Notes>

1003 <https://issues.sonatype.org/secure/IssueNavigator.jspa?mode=hide&requestId=12155>

1004 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-2928>

1005 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3616>

1006 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3627>

1007 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3643>

1008 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3690>

1009 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3737>

1010 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3503>

1011 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3666>

1012 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3676>

1013 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-2974>

1014 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3025>

- [NXCM-3647](#) ¹⁰¹⁶ - Regression: Security Flaw: Reflected XSS on the Resolve Page in Nexus (AVT 27069)
- [NXCM-3600](#) ¹⁰¹⁷ - Anonymous user can delete artifacts from open staging repositories.

Performance and Robustness

- [NXCM-3514](#) ¹⁰¹⁸ - Concurrent modification exception in staging.
- [NXCM-2976](#) ¹⁰¹⁹ - Dropping a staging repository can cause an unrelated deploy to fail due to concurrent modification exception.
- [NXCM-3477](#) ¹⁰²⁰ - Corrupt license access database causes server to fail startup
- [NXCM-3011](#) ¹⁰²¹ - Use batch inserts for License report DB to improve performance
- [NXCM-3492](#) ¹⁰²² - Proxy Attribute storage is slow and unreliable.
- [NXCM-3732](#) ¹⁰²³ - License access file causes excessive CPU usage on RSO

P2 and OBR plugins

- [NXCM-3606](#) ¹⁰²⁴ - Switch to OSS versions of the OBR and P2 nexus plugins
- [NXCM-3465](#) ¹⁰²⁵ - Use the open source version of the OBR plugin in pro
- [NXCM-3516](#) ¹⁰²⁶ - Use the open source versions of the P2 plugins in pro
- [NXCM-2947](#) ¹⁰²⁷ - P2 proxy repository which goes through ISA http proxy fails
- [NXCM-3339](#) ¹⁰²⁸ - Allow p2 repository group still working even if one repo is not available
- [NXCM-3608](#) ¹⁰²⁹ - Need a upgrade path from Nexus PRO 1.9.x to Nexus PRO 1.10/2.0 (OBR + P2)

System Requirements

1016 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3647>

1017 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3600>

1018 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3514>

1019 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-2976>

1020 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3477>

1021 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3011>

1022 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3492>

1023 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3732>

1024 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3606>

1025 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3465>

1026 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3516>

1027 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-2947>

1028 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3339>

1029 <https://issues.sonatype.org/secure/QuickSearch.jspa?searchString=NXCM-3608>

Supported Versions

Sonatype fully supports versions of Nexus Professional for one year after their release date. Older releases are supported on a best effort basis and the release dates of these versions [are listed in our download archives](#)(see page 127).

Host Operating System

Any Windows, Linux, or Macintosh operating system that can run a supported Sun/Oracle Java version will work. Other operating systems may work, but they are not tested by Sonatype. See [here](#)¹⁰³⁰ for the list of Oracle certified operating systems.

The most widely used operating system for Nexus is Linux and therefore customers should consider it the best tested platform.

Note: Some customers are running on AIX, HP/UX and Solaris successfully, but these systems are not internally tested. When possible, Sonatype Support will make an attempt to provide support for these systems. However you may still be required to reproduce issues on a standard Linux distribution.

Dedicated Operating System User Account

 Unless you are testing the repository manager or running it only for personal use, a Nexus Repository Manager user account specific to the operating system is strongly recommended for running.

The Nexus Repository Manger process user is typically named **nexus** and **must be able to create a valid shell**.

 As a security precaution, **do not run Nexus as the root user**.

Adequate File Handles

The Nexus Repository Manager process may want to consume more file handles than the default value allowed by your operating system.

¹⁰³⁰ <http://www.oracle.com/technetwork/java/javase/certconfig-2095354.html>

We recommend [increasing the available file handles](#)¹⁰³¹ for Nexus preemptively to avoid potential errors at runtime.

Java

Sonatype Nexus is a Java server application that requires specific versions to operate.

| Nexus Version | Supported Sun/Oracle JRE version |
|-----------------|--|
| 1.9 and earlier | 5 or 6 |
| 2.0-2.5 | 6 or 7 |
| 2.6.x | 7u45+ only 8+ will not work |
| 2.7.x-2.9.x | 7u45+ 8+ may work but is not thoroughly tested |
| 2.10.x-2.11.1 | 7u45+, 8u25+ |
| 2.11.2-2.13.0 | 8u31+ strongly recommended 7u79+ no further public updates as of April 2015 ¹⁰³² |
| 2.14.0-2.14.10 | The most recent version of Java 8 available. Java 7 is not tested and problems using Java 7 will not be addressed. <i>On August 2, 2018 public announcements were made¹⁰³³ strongly recommending avoiding older java versions.</i> |
| 2.14.11+ | The most recent version of Java 8 available. <i>This version and after will no longer boot on Java 7.</i> |

We strongly suggest using the latest compatible release version of Java available from Oracle.


¹⁰³ <https://support.sonatype.com/hc/en-us/articles/213465218-The-nexus-log-file-is-full-of-too-many-open-files-exceptions-how-can-I-fix-this->

¹⁰³² https://www.java.com/en/download/faq/java_7.xml

¹⁰³³ <https://blog.sonatype.com/time-to-upgrade-nexus-repository-2-to-java-8>

How do I check what version of Java is currently being used by Nexus Repository Manager?

1. Sign-in to the Nexus Repository Manager UI using a user assigned the **Administrator** role.
2. In the left sidebar, navigate to **Administration** → **Support Tools**. The **System Information** tab should be displayed by default.
3. Under the SYSTEM-PROPERTIES section, search the page for "java.home" and "java.version"

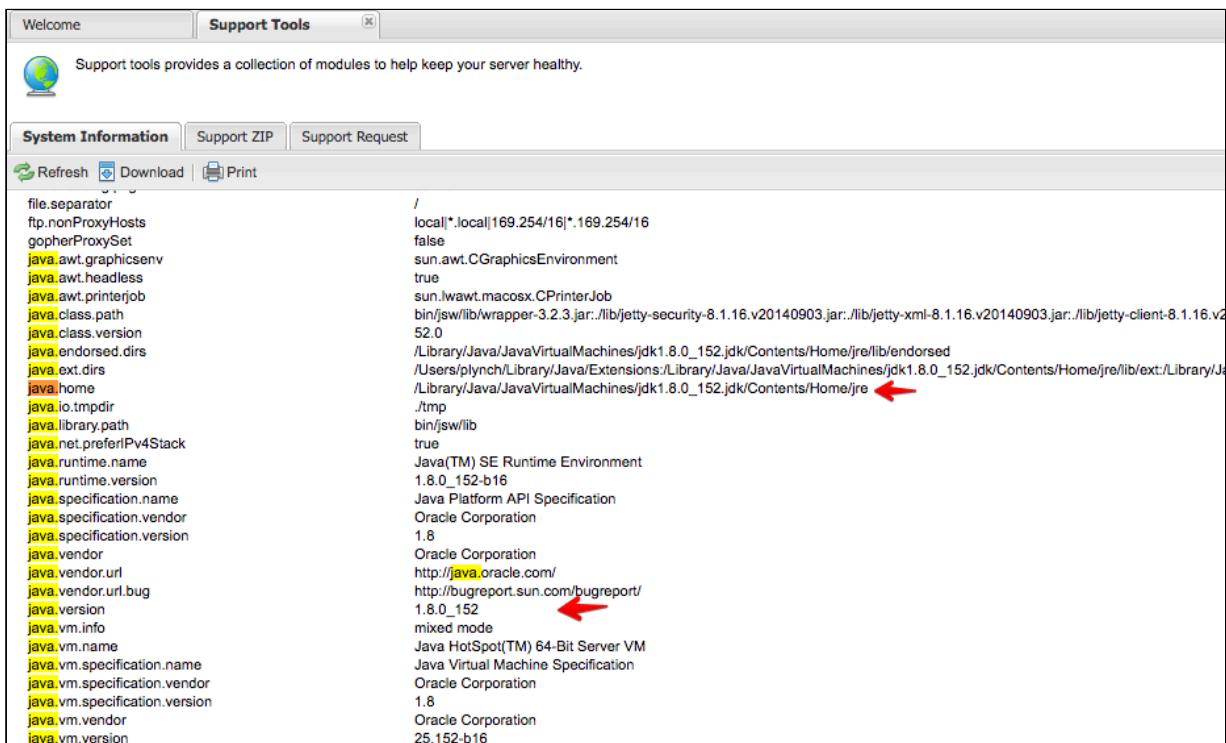


| Property | Value |
|-------------------------------|--|
| file.separator | / |
| ftp.nonProxyHosts | local *.local 169.254/16 *.169.254/16 |
| gopherProxySet | false |
| java.awt.graphicsenv | sun.awt.CGraphicsEnvironment |
| java.awt.headless | true |
| java.awt.printerjob | sun.lwawt.macosx.CPrinterJob |
| java.class.path | bin/jsw/lib/wrapper-3.2.3.jar.:lib/jetty-security-8.1.16.v20140903.jar.:lib/jetty-xml-8.1.16.v20140903.jar.:lib/jetty-client-8.1.16.v2 |
| java.class.version | 52.0 |
| java.endorsed.dirs | /Library/Java/JavaVirtualMachines/jdk1.8.0_152.jdk/Contents/Home/jre/lib/endorsed |
| java.ext.dirs | /Users/plynch/Library/Java/Extensions:/Library/Java/JavaVirtualMachines/jdk1.8.0_152.jdk/Contents/Home/jre/lib/ext:/Library/J |
| java.home | /Library/Java/JavaVirtualMachines/jdk1.8.0_152.jdk/Contents/Home/jre  |
| java.io.tmpdir | ./tmp |
| java.library.path | bin/jsw/lib |
| java.net.preferIPv4Stack | true |
| java.runtime.name | Java(TM) SE Runtime Environment |
| java.runtime.version | 1.8.0_152-b16 |
| java.specification.name | Java Platform API Specification |
| java.specification.vendor | Oracle Corporation |
| java.specification.version | 1.8 |
| java.vendor | Oracle Corporation |
| java.vendor.url | http://java.oracle.com/ |
| java.vendor.url_bug | http://bugreport.sun.com/bugreport/ |
| java.version | 1.8.0_152  |
| java.vm.info | mixed mode |
| java.vm.name | Java HotSpot(TM) 64-Bit Server VM |
| java.vm.specification.name | Java Virtual Machine Specification |
| java.vm.specification.vendor | Oracle Corporation |
| java.vm.specification.version | 1.8 |
| java.vm.vendor | Oracle Corporation |
| java.vm.version | 25.152-b16 |

How do I change the version of Java used to run Nexus Repository Manager?

By default Nexus will pick up whatever **java/java.exe** executable is on the \$PATH/%PATH% environment variable of the operating system user account owning the repository manager process. In some cases it may be desirable to not rely on using the version in the PATH variable. The exact java executable to use can also be set explicitly.

1. First determine the current directory where your runtime installation files reside.
 - a. Sign-in to the Nexus Repository Manager UI using a user assigned the **Administrator** role.
 - b. In the left sidebar, navigate to **Administration** → **Support Tools**. The **System Information** tab should be displayed by default.

- c. Under the NEXUS-CONFIGURATION section, locate the installDirectory value. This is your <AppDir>¹⁰³⁴.

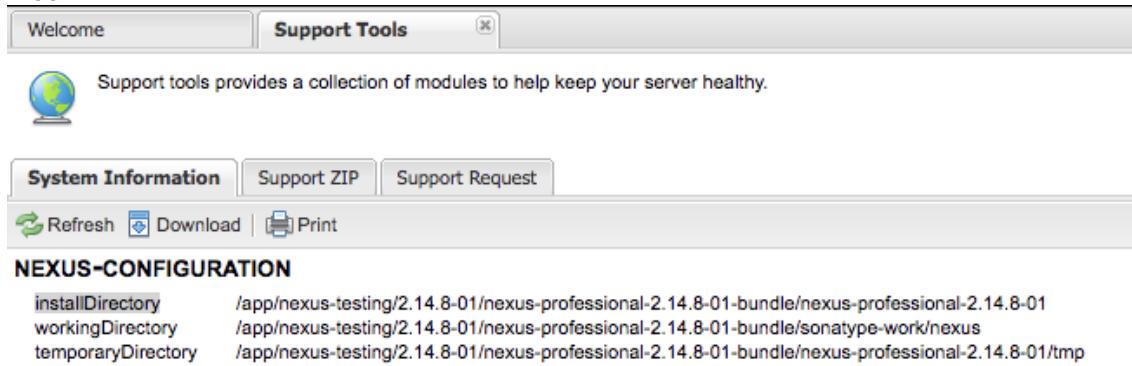

The screenshot shows the 'Support Tools' interface with the 'System Information' tab selected. It displays the following configuration details:

| Setting | Value |
|--------------------|---|
| installDirectory | /app/nexus-testing/2.14.8-01/nexus-professional-2.14.8-01-bundle/nexus-professional-2.14.8-01 |
| workingDirectory | /app/nexus-testing/2.14.8-01/nexus-professional-2.14.8-01-bundle/sonatype-work/nexus |
| temporaryDirectory | /app/nexus-testing/2.14.8-01/nexus-professional-2.14.8-01-bundle/nexus-professional-2.14.8-01/tmp |

2. Second, edit a properties file under that path to set the java executable:

- Locate the <AppDir>¹⁰³⁵/bin/jsw/conf/wrapper.conf file.
- Edit wrapper.conf with a text editor. Locate these lines:

```
# Set the JVM executable
# (modify this to absolute path if you need a Java that is not on the OS path)
wrapper.java.command=java
```

- Change the value of the property to the *absolute path to your new java executable*. **The value is a file path to an executable, not a directory**. Windows file paths should use forward slashes and not backslashes.

```
# Set the JVM executable
# (modify this to absolute path if you need a Java that is not on the OS path)
wrapper.java.command=/Library/Java/JavaVirtualMachines/jdk1.8.0_152.jdk/Contents/Home/bin/
java
```

3. Restart repository manager for the process to launch with the new java executable.

1034^{https://support.sonatype.com/hc/en-us/articles/213464308-Understanding-Nexus-Repository-Manager-2-Basic-Directories#AppDir}

1035^{https://support.sonatype.com/hc/en-us/articles/213464308-Understanding-Nexus-Repository-Manager-2-Basic-Directories#AppDir}

Java Vendors Other Than Oracle

OpenJDK has been known to work in most cases, but we do not actively test it. Additionally, GCJ will not work and is not supported.

IBM JDK can be used on systems that do not have a Sun/Oracle JRE available, but our support of this is done on a best effort basis. There are [known issues¹⁰³⁶](#) with IBM [Server Name Indication \(SNI\)¹⁰³⁷](#) support which can cause some proxy repositories to SSL based remotes not work correctly.

Java Cryptography Extension (JCE)

Java Cryptography Extension (JCE) is required by some Nexus features. This includes Secure Central and Smart Proxy.

 If you see `java.security.InvalidKeyException: Illegal key size` in your log is an indicator that Nexus requires the JCE.

It is the user's responsibility to verify that installing JCE is permissible under local regulations. Installing it allows [stronger encryption algorithms¹⁰³⁸](#) to be used.

Obtain JCE from your JVM vendor:

[Oracle Java Cryptography Extension \(JCE\) Download¹⁰³⁹](#)

CPU

Nexus Repository Manager performance is primarily bounded by IO (disk and network) rather than CPU. So any reasonably modern 2-4 core CPU will generally be sufficient for normal use.

¹⁰³⁶ <https://issues.sonatype.org/browse/NEXUS-9600>

¹⁰³⁷ https://en.wikipedia.org/wiki/Server_Name_Indication

¹⁰³⁸ <http://docs.oracle.com/javase/7/docs/technotes/guides/security/SunProviders.html#importlimits>

¹⁰³⁹ <http://www.oracle.com/technetwork/java/javase/downloads/index.html>

Memory

The default JRE max heap size of Nexus Professional is 768Mb, and the codebase of Nexus Repository Manager will consume approximately another 1GB. So factoring in operating system overhead you will need at least 4GB of RAM, assuming no other large applications are running on the machine.

For very large Nexus Repository Manager instances you will need to bump up the maximum heap space. If you do this you should increase RAM on the system accordingly.

Disk

Sonatype Nexus, installed, consumes less than 100MB. The bulk of disk space will be held by your deployed and proxied artifacts, as well as any search indexes. This is highly installation specific.

For a detailed discussion of disk space, see [this article](#)¹⁰⁴⁰.

You should note that downloading some search indexes, like [Maven Central](#)¹⁰⁴¹, can consume several GB of disk.

There are [strategies to manage the disk space](#)¹⁰⁴² consumed by Nexus Repository Manager.

We have some [optimization suggestions to use at your discretion](#)¹⁰⁴³. We recommend to avoid using NFS for the repository manager search index and storage locations, especially in large installations, as this will impact performance. Also consider the `noatime` option for your [work directory](#)(see page 205) mounts and limit the symbolic links used as this will cause increased overhead whenever the repository manager needs to resolve an absolute file path.

Web Browser

Our general policy is to support the most recent modern browser version for your supported OS at time of Nexus release date. This table is updated for the most recent Nexus release.

| Vendor | Versions |
|---------------|--|
| Google Chrome | latest at Nexus release |
| Firefox | latest and ESR at Nexus release |
| Safari | on OSX only , latest at Nexus release |
| Opera | untested and not supported |

¹⁰⁴⁰ <http://blog.sonatype.com/people/2012/01/sizing-nexus-how-much-space-do-you-need/>

¹⁰⁴¹ <http://search.maven.org>

¹⁰⁴² <https://support.sonatype.com/hc/en-us/articles/213465138-How-can-I-configure-Nexus-to-reduce-disk-space->

¹⁰⁴³ <https://support.sonatype.com/hc/en-us/articles/213465258-Optimizing-Nexus-Disk-IO-Performance>

| Vendor | Versions |
|-------------------|---|
| Internet Explorer | 9, 10, 11 Check this article for known issues ¹⁰⁴⁴ . |

Download

(i) Looking for [Nexus Repository Manager 3 Downloads](#)¹⁰⁴⁵?

There are two distributions of the Nexus Repository Manager 2: [Nexus Repository Manager OSS](#)¹⁰⁴⁶ and [Nexus Repository Manager Pro](#)¹⁰⁴⁷.

| New Installation? | Upgrading? |
|---|---|
| <ul style="list-style-type: none">System Requirements(see page 118)Install Guide(see page 182)Deployment Guidelines¹⁰⁴⁸Release Notes(see page 19) | <ul style="list-style-type: none">Nexus Repository Manager OSS Upgrade Guide¹⁰⁴⁹Nexus Repository Manager PRO Upgrade Guide¹⁰⁵⁰Upgrading From Nexus Repository Manager Trial¹⁰⁵¹Upgrade Compatibility Guide¹⁰⁵² |

Nexus Repository Manager 2 Pro

Nexus Repository Manager 2 Pro is a distribution with features that are relevant to large enterprises and organizations which require complex procurement and staging workflows in addition to more advanced LDAP integration, Atlassian Crowd support, and other development infrastructure.

Note: If unlicensed, an evaluation license can be requested using the user interface.

¹⁰⁴⁴ <https://support.sonatype.com/hc/en-us/articles/213464618-Sonatype-Nexus-Internet-Explorer-Compatibility>

¹⁰⁴⁵ <https://help.sonatype.com/display/NXRM3/Download>

¹⁰⁴⁶ <https://www.sonatype.com/nexus-repository-oss>

¹⁰⁴⁷ <https://www.sonatype.com/nexus-repository-sonatype>

¹⁰⁴⁸ <http://www.sonatype.org/nexus/downloads/the-nexus-professional-deployment-guidelines/>

¹⁰⁴⁹ <https://sonatype.zendesk.com/entries/23031188-How-do-I-upgrade-Nexus->

¹⁰⁵⁰ <https://sonatype.zendesk.com/entries/20685512-How-do-I-upgrade-Nexus-Professional>

¹⁰⁵¹ <https://sonatype.zendesk.com/entries/98695703-Upgrade-From-Nexus-Pro-Trial-to-Nexus-Professional-Full>

¹⁰⁵² <https://sonatype.zendesk.com/entries/21701998>

| Operating System | Pro Download Links |
|------------------|--|
| Linux/Mac | nexus-professional-bundle-latest.tar.gz ¹⁰⁵³ (ASC ¹⁰⁵⁴ , MD5 ¹⁰⁵⁵ , SHA1 ¹⁰⁵⁶) |
| Windows | nexus-professional-bundle-latest.zip ¹⁰⁵⁷ (ASC ¹⁰⁵⁸ , MD5 ¹⁰⁵⁹ , SHA1 ¹⁰⁶⁰) |

Older Pro versions (not recommended)

See [Nexus Repository Manager Pro 2.x Archived Versions](#)(see page 127) page for older Pro versions if you need. We recommend the latest!

Nexus Repository Manager Trial Edition Installer

The Nexus Repository Manager Trial Edition includes platform specific installers and a [limited set of features](#)¹⁰⁶¹ **for evaluation, non-production use on a desktop computer.**

Fill out the form to get started with the latest [Nexus Repository Manager Trial Installer](#)¹⁰⁶².

Nexus Repository Manager 2 OSS

Nexus Repository Manager 2 OSS is a repository manager which can be freely used and is distributed under the Eclipse Public License (EPL Version 1).

| Operating System | OSS Download Links |
|------------------|---|
| Linux/Mac | nexus-latest-bundle.tar.gz ¹⁰⁶³ (ASC ¹⁰⁶⁴ , MD5 ¹⁰⁶⁵ , SHA1 ¹⁰⁶⁶) |

1053 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.tar.gz>
1054 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.tar.gz.asc>
1055 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.tar.gz.md5>
1056 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.tar.gz.sha1>
1057 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.zip>
1058 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.zip.asc>
1059 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.zip.md5>
1060 <https://download.sonatype.com/nexus/nexus-professional-bundle-latest.zip.sha1>
1061 <https://sonatype.zendesk.com/entries/27807808>
1062 <https://www.sonatype.com/download-nexus-repository-trial>
1063 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.tar.gz>
1064 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.tar.gz.asc>
1065 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.tar.gz.md5>
1066 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.tar.gz.sha1>

| Operating System | OSS Download Links |
|------------------|---|
| Windows | nexus-latest-bundle.zip ¹⁰⁶⁷ (ASC ¹⁰⁶⁸ , MD5 ¹⁰⁶⁹ , SHA1 ¹⁰⁷⁰) |

Older OSS versions (not recommended)

See [Nexus Repository Manager OSS 2.x Archived Versions](#)(see page 147) page for older OSS versions if you need. We recommend the latest!

Download Archives - Repository Manager 2

This page contains links to archived versions of the commercial Sonatype Nexus Repository Manager, formerly known as *Nexus Professional*. A valid license is required to make use of all features.

Looking for [Nexus Repository Manager OSS Archives](#)(see page 147)?

Nexus Repository Manager 2.14.16

2020-01-17

- [nexus-professional-2.14.16-01-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz)¹⁰⁷¹ - [MD5](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz.asc)¹⁰⁷², [SHA1](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz.md5)¹⁰⁷³, [ASC](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz.sha1)¹⁰⁷⁴
- [nexus-professional-2.14.16-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip)¹⁰⁷⁵ - [MD5](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip.md5)¹⁰⁷⁶, [SHA1](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip.sha1)¹⁰⁷⁷, [ASC](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip.asc)¹⁰⁷⁸

Nexus Repository Manager 2.14.15

2019-10-15

1067 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.zip>
1068 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.zip.asc>
1069 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.zip.md5>
1070 <https://download.sonatype.com/nexus/oss/nexus-latest-bundle.zip.sha1>
1071 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz>
1072 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz.md5>
1073 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz.sha1>
1074 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.tar.gz.asc>
1075 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip>
1076 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip.md5>
1077 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip.sha1>
1078 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.16-01-bundle.zip.asc>

- [nexus-professional-2.14.15-01-bundle.tar.gz](#)¹⁰⁷⁹ - MD5¹⁰⁸⁰, SHA1¹⁰⁸¹, ASC¹⁰⁸²
- [nexus-professional-2.14.15-01-bundle.zip](#)¹⁰⁸³ - MD5¹⁰⁸⁴, SHA1¹⁰⁸⁵, ASC¹⁰⁸⁶

Nexus Repository Manager 2.14.14

2019-08-09

- [nexus-professional-2.14.14-01-bundle.tar.gz](#)¹⁰⁸⁷ - MD5¹⁰⁸⁸, SHA1¹⁰⁸⁹, ASC¹⁰⁹⁰
- [nexus-professional-2.14.14-01-bundle.zip](#)¹⁰⁹¹ - MD5¹⁰⁹², SHA1¹⁰⁹³, ASC¹⁰⁹⁴

Nexus Repository Manager 2.14.13

2019-04-24

- [nexus-professional-2.14.13-01-bundle.tar.gz](#)¹⁰⁹⁵ - MD5¹⁰⁹⁶, SHA1¹⁰⁹⁷, ASC¹⁰⁹⁸
- [nexus-professional-2.14.13-01-bundle.zip](#)¹⁰⁹⁹ - MD5¹¹⁰⁰, SHA1¹¹⁰¹, ASC¹¹⁰²

1079 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.tar.gz>
1080 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.tar.gz.md5>
1081 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.tar.gz.sha1>
1082 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.tar.gz.asc>
1083 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.zip>
1084 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.zip.md5>
1085 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.zip.sha1>
1086 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.15-01-bundle.zip.asc>
1087 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.tar.gz>
1088 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.tar.gz.md5>
1089 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.tar.gz.sha1>
1090 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.tar.gz.asc>
1091 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.zip>
1092 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.zip.md5>
1093 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.zip.sha1>
1094 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.14-01-bundle.zip.asc>
1095 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.tar.gz>
1096 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.tar.gz.md5>
1097 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.tar.gz.sha1>
1098 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.tar.gz.asc>
1099 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.zip>
1100 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.zip.md5>
1101 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.zip.sha1>
1102 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.13-01-bundle.zip.asc>

Nexus Repository Manager 2.14.12

2019-03-11

- [nexus-professional-2.14.12-02-bundle.tar.gz](#)¹¹⁰³ - MD5¹¹⁰⁴, SHA1¹¹⁰⁵, ASC¹¹⁰⁶
- [nexus-professional-2.14.12-02-bundle.zip](#)¹¹⁰⁷ - MD5¹¹⁰⁸, SHA1¹¹⁰⁹, ASC¹¹¹⁰

Nexus Repository Manager 2.14.11

2018-11-21

- [nexus-professional-2.14.11-01-bundle.tar.gz](#)¹¹¹¹ - MD5¹¹¹², SHA1¹¹¹³, ASC¹¹¹⁴
- [nexus-professional-2.14.11-01-bundle.zip](#)¹¹¹⁵ - MD5¹¹¹⁶, SHA1¹¹¹⁷, ASC¹¹¹⁸

Nexus Repository Manager 2.14.10

2018-09-12

- [nexus-professional-2.14.10-01-bundle.tar.gz](#)¹¹¹⁹ - MD5¹¹²⁰, SHA1¹¹²¹, ASC¹¹²²

1103 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.tar.gz>
1104 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.tar.gz.md5>
1105 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.tar.gz.sha1>
1106 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.tar.gz.asc>
1107 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.zip>
1108 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.zip.md5>
1109 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.zip.sha1>
1110 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.12-02-bundle.zip.asc>
1111 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.tar.gz>
1112 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.tar.gz.md5>
1113 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.tar.gz.sha1>
1114 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.tar.gz.asc>
1115 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.zip>
1116 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.zip.md5>
1117 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.zip.sha1>
1118 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.11-01-bundle.zip.asc>
1119 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.tar.gz>
1120 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.tar.gz.md5>
1121 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.tar.gz.sha1>
1122 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.tar.gz.asc>

- [nexus-professional-2.14.10-01-bundle.zip¹¹²³](#) - MD5¹¹²⁴, SHA1¹¹²⁵, ASC¹¹²⁶

Nexus Repository Manager 2.14.9

2018-06-27

- [nexus-professional-2.14.9-01-bundle.tar.gz¹¹²⁷](#) - MD5¹¹²⁸, SHA1¹¹²⁹, ASC¹¹³⁰
- [nexus-professional-2.14.9-01-bundle.zip¹¹³¹](#) - MD5¹¹³², SHA1¹¹³³, ASC¹¹³⁴

Nexus Repository Manager 2.14.8

2018-02-28

- [nexus-professional-2.14.8-01-bundle.tar.gz¹¹³⁵](#) - MD5¹¹³⁶, SHA1¹¹³⁷, ASC¹¹³⁸
- [nexus-professional-2.14.8-01-bundle.zip¹¹³⁹](#) - MD5¹¹⁴⁰, SHA1¹¹⁴¹, ASC¹¹⁴²

Nexus Repository Manager 2.14.7

2018-02-12

1123 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.zip>
1124 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.zip.md5>
1125 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.zip.sha1>
1126 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.10-01-bundle.zip.asc>
1127 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.tar.gz>
1128 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.tar.gz.md5>
1129 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.tar.gz.sha1>
1130 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.tar.gz.asc>
1131 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.zip>
1132 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.zip.md5>
1133 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.zip.sha1>
1134 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.9-01-bundle.zip.asc>
1135 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.tar.gz>
1136 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.tar.gz.md5>
1137 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.tar.gz.sha1>
1138 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.tar.gz.asc>
1139 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.zip>
1140 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.zip.md5>
1141 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.zip.sha1>
1142 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.8-01-bundle.zip.asc>

- [nexus-professional-2.14.7-01-bundle.tar.gz](#)¹¹⁴³ - MD5¹¹⁴⁴, SHA1¹¹⁴⁵, ASC¹¹⁴⁶
- [nexus-professional-2.14.7-01-bundle.zip](#)¹¹⁴⁷ - MD5¹¹⁴⁸, SHA1¹¹⁴⁹, ASC¹¹⁵⁰

Nexus Repository Manager 2.14.6

2018-01-29

- [nexus-professional-2.14.6-02-bundle.tar.gz](#)¹¹⁵¹ - MD5¹¹⁵², SHA1¹¹⁵³, ASC¹¹⁵⁴
- [nexus-professional-2.14.6-02-bundle.zip](#)¹¹⁵⁵ - MD5¹¹⁵⁶, SHA1¹¹⁵⁷, ASC¹¹⁵⁸

Nexus Repository Manager 2.14.5

2017-07-25

- [nexus-professional-2.14.5-02-bundle.tar.gz](#)¹¹⁵⁹ - MD5¹¹⁶⁰, SHA1¹¹⁶¹, ASC¹¹⁶²
- [nexus-professional-2.14.5-02-bundle.zip](#)¹¹⁶³ - MD5¹¹⁶⁴, SHA1¹¹⁶⁵, ASC¹¹⁶⁶

1143 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.tar.gz>
1144 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.tar.gz.md5>
1145 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.tar.gz.sha1>
1146 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.tar.gz.asc>
1147 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.zip>
1148 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.zip.md5>
1149 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.zip.sha1>
1150 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.7-01-bundle.zip.asc>
1151 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.tar.gz>
1152 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.tar.gz.md5>
1153 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.tar.gz.sha1>
1154 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.tar.gz.asc>
1155 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.zip>
1156 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.zip.md5>
1157 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.zip.sha1>
1158 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.6-02-bundle.zip.asc>
1159 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.tar.gz>
1160 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.tar.gz.md5>
1161 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.tar.gz.sha1>
1162 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.tar.gz.asc>
1163 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.zip>
1164 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.zip.md5>
1165 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.zip.sha1>
1166 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.5-02-bundle.zip.asc>

Nexus Repository Manager 2.14.4

2017-04-06

- [nexus-professional-2.14.4-02-bundle.tar.gz](#)¹¹⁶⁷ - MD5¹¹⁶⁸, SHA1¹¹⁶⁹, ASC¹¹⁷⁰
- [nexus-professional-2.14.4-02-bundle.zip](#)¹¹⁷¹ - MD5¹¹⁷², SHA1¹¹⁷³, ASC¹¹⁷⁴

Nexus Repository Manager 2.14.3

2017-02-05

- [nexus-professional-2.14.3-02-bundle.tar.gz](#)¹¹⁷⁵ - MD5¹¹⁷⁶, SHA1¹¹⁷⁷, ASC¹¹⁷⁸
- [nexus-professional-2.14.3-02-bundle.zip](#)¹¹⁷⁹ - MD5¹¹⁸⁰, SHA1¹¹⁸¹, ASC¹¹⁸²

Nexus Repository Manager 2.14.2

2016-12-18

- [nexus-professional-2.14.2-01-bundle.tar.gz](#)¹¹⁸³ - MD5¹¹⁸⁴, SHA1¹¹⁸⁵, ASC¹¹⁸⁶

1167 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.tar.gz>

1168 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.tar.gz.md5>

1169 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.tar.gz.sha1>

1170 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.tar.gz.asc>

1171 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.zip>

1172 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.zip.md5>

1173 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.zip.sha1>

1174 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.4-02-bundle.zip.asc>

1175 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.tar.gz>

1176 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.tar.gz.md5>

1177 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.tar.gz.sha1>

1178 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.tar.gz.asc>

1179 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.zip>

1180 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.zip.md5>

1181 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.zip.sha1>

1182 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.3-02-bundle.zip.asc>

1183 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.tar.gz>

1184 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.tar.gz.md5>

1185 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.tar.gz.sha1>

1186 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.tar.gz.asc>

- [nexus-professional-2.14.2-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.zip)¹¹⁸⁷ - MD5¹¹⁸⁸, SHA1¹¹⁸⁹, ASC¹¹⁹⁰

Nexus Repository Manager 2.14.1

2016-10-31

- [nexus-professional-2.14.1-01-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.tar.gz)¹¹⁹¹ - MD5¹¹⁹², SHA1¹¹⁹³, ASC¹¹⁹⁴
- [nexus-professional-2.14.1-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.zip)¹¹⁹⁵ - MD5¹¹⁹⁶, SHA1¹¹⁹⁷, ASC¹¹⁹⁸

Nexus Repository Manager 2.14.0

2016-09-16

- [nexus-professional-2.14.0-01-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.tar.gz)¹¹⁹⁹ - MD5¹²⁰⁰, SHA1¹²⁰¹, ASC¹²⁰²
- [nexus-professional-2.14.0-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.zip)¹²⁰³ - MD5¹²⁰⁴, SHA1¹²⁰⁵, ASC¹²⁰⁶

Nexus Repository Manager 2.13.0

2015-12-23

1187 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.zip>
1188 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.zip.md5>
1189 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.zip.sha1>
1190 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.2-01-bundle.zip.asc>
1191 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.tar.gz>
1192 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.tar.gz.md5>
1193 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.tar.gz.sha1>
1194 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.tar.gz.asc>
1195 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.zip>
1196 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.zip.md5>
1197 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.zip.sha1>
1198 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.1-01-bundle.zip.asc>
1199 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.tar.gz>
1200 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.tar.gz.md5>
1201 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.tar.gz.sha1>
1202 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.tar.gz.asc>
1203 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.zip>
1204 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.zip.md5>
1205 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.zip.sha1>
1206 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.14.0-01-bundle.zip.asc>

- [nexus-professional-2.13.0-01-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.tar.gz)¹²⁰⁷ - MD5¹²⁰⁸, SHA1¹²⁰⁹, ASC¹²¹⁰
- [nexus-professional-2.13.0-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.zip)¹²¹¹ - MD5¹²¹², SHA1¹²¹³, ASC¹²¹⁴

Nexus Repository Manager 2.12.1

2015-12-23

- [nexus-professional-2.12.1-01-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.tar.gz)¹²¹⁵ - MD5¹²¹⁶, SHA1¹²¹⁷, ASC¹²¹⁸
- [nexus-professional-2.12.1-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.zip)¹²¹⁹ - MD5¹²²⁰, SHA1¹²²¹, ASC¹²²²

Nexus Repository Manager 2.12.0

2015-12-23

- [nexus-professional-2.12.0-01-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.tar.gz)¹²²³ - MD5¹²²⁴, SHA1¹²²⁵, ASC¹²²⁶
- [nexus-professional-2.12.0-01-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.zip)¹²²⁷ - MD5¹²²⁸, SHA1¹²²⁹, ASC¹²³⁰

1207 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.tar.gz>
1208 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.tar.gz.md5>
1209 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.tar.gz.sha1>
1210 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.tar.gz.asc>
1211 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.zip>
1212 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.zip.md5>
1213 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.zip.sha1>
1214 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.13.0-01-bundle.zip.asc>
1215 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.tar.gz>
1216 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.tar.gz.md5>
1217 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.tar.gz.sha1>
1218 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.tar.gz.asc>
1219 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.zip>
1220 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.zip.md5>
1221 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.zip.sha1>
1222 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.1-01-bundle.zip.asc>
1223 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.tar.gz>
1224 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.tar.gz.md5>
1225 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.tar.gz.sha1>
1226 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.tar.gz.asc>
1227 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.zip>
1228 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.zip.md5>
1229 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.zip.sha1>
1230 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.12.0-01-bundle.zip.asc>

Nexus Professional 2.11.4

2015-07-15

- [nexus-professional-2.11.4-01-bundle.tar.gz](#)¹²³¹ - MD5¹²³², SHA1¹²³³, ASC¹²³⁴
- [nexus-professional-2.11.4-01-bundle.zip](#)¹²³⁵ - MD5¹²³⁶, SHA1¹²³⁷, ASC¹²³⁸

Nexus Professional 2.11.3

2015-05-26

- [nexus-professional-2.11.3-01-bundle.tar.gz](#)¹²³⁹ - MD5¹²⁴⁰, SHA1¹²⁴¹, ASC¹²⁴²
- [nexus-professional-2.11.3-01-bundle.zip](#)¹²⁴³ - MD5¹²⁴⁴, SHA1¹²⁴⁵, ASC¹²⁴⁶

Nexus Professional 2.11.2

2015-03-16

- [nexus-professional-2.11.2-06-bundle.tar.gz](#)¹²⁴⁷ - MD5¹²⁴⁸, SHA1¹²⁴⁹, ASC¹²⁵⁰

1231 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.tar.gz>
1232 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.tar.gz.md5>
1233 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.tar.gz.sha1>
1234 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.tar.gz.asc>
1235 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.zip>
1236 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.zip.md5>
1237 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.zip.sha1>
1238 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.4-01-bundle.zip.asc>
1239 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.tar.gz>
1240 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.tar.gz.md5>
1241 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.tar.gz.sha1>
1242 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.tar.gz.asc>
1243 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.zip>
1244 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.zip.md5>
1245 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.zip.sha1>
1246 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.3-01-bundle.zip.asc>
1247 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.tar.gz>
1248 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.tar.gz.md5>
1249 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.tar.gz.sha1>
1250 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.tar.gz.asc>

- [nexus-professional-2.11.2-06-bundle.zip](#)¹²⁵¹ - MD5¹²⁵², SHA1¹²⁵³, ASC¹²⁵⁴

2015-03-06

- [nexus-professional-2.11.2-04-bundle.tar.gz](#)¹²⁵⁵ - MD5¹²⁵⁶, SHA1¹²⁵⁷, ASC¹²⁵⁸
- [nexus-professional-2.11.2-04-bundle.zip](#)¹²⁵⁹ - MD5¹²⁶⁰, SHA1¹²⁶¹, ASC¹²⁶²

Nexus Professional 2.11.1

2014-12-19

- [nexus-professional-2.11.1-01-bundle.tar.gz](#)¹²⁶³ - MD5¹²⁶⁴, SHA1¹²⁶⁵, ASC¹²⁶⁶
- [nexus-professional-2.11.1-01-bundle.zip](#)¹²⁶⁷ - MD5¹²⁶⁸, SHA1¹²⁶⁹, ASC¹²⁷⁰

Nexus Professional 2.11.0

2014-12-01

- [nexus-professional-2.11.0-02-bundle.tar.gz](#)¹²⁷¹ - MD5¹²⁷², SHA1¹²⁷³, ASC¹²⁷⁴

1251 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.zip>

1252 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.zip.md5>

1253 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.zip.sha1>

1254 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-06-bundle.zip.asc>

1255 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.tar.gz>

1256 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.tar.gz.md5>

1257 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.tar.gz.sha1>

1258 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.tar.gz.asc>

1259 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.zip>

1260 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.zip.md5>

1261 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.zip.sha1>

1262 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.2-04-bundle.zip.asc>

1263 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.tar.gz>

1264 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.tar.gz.md5>

1265 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.tar.gz.sha1>

1266 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.tar.gz.asc>

1267 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.zip>

1268 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.zip.md5>

1269 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.zip.sha1>

1270 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.1-01-bundle.zip.asc>

1271 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.tar.gz>

1272 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.tar.gz.md5>

1273 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.tar.gz.sha1>

1274 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.tar.gz.asc>

- [nexus-professional-2.11.0-02-bundle.zip](#)¹²⁷⁵ - MD5¹²⁷⁶, SHA1¹²⁷⁷, ASC¹²⁷⁸

Nexus Professional 2.10.0

2014-10-06

- [nexus-professional-2.10.0-02-bundle.tar.gz](#)¹²⁷⁹ - MD5¹²⁸⁰, SHA1¹²⁸¹, ASC¹²⁸²
- [nexus-professional-2.10.0-02-bundle.zip](#)¹²⁸³ - MD5¹²⁸⁴, SHA1¹²⁸⁵, ASC¹²⁸⁶

Nexus Repository Manager 2.9.2

2014-09-25

- [nexus-professional-2.9.2-01-bundle.tar.gz](#)¹²⁸⁷ - MD5¹²⁸⁸, SHA1¹²⁸⁹, ASC¹²⁹⁰
- [nexus-professional-2.9.2-01-bundle.zip](#)¹²⁹¹ - MD5¹²⁹², SHA1¹²⁹³, ASC¹²⁹⁴

Nexus Repository Manager 2.9.1

2014-09-04

-
- 1275 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.zip>
1276 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.zip.md5>
1277 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.zip.sha1>
1278 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.11.0-02-bundle.zip.asc>
1279 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.tar.gz>
1280 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.tar.gz.md5>
1281 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.tar.gz.sha1>
1282 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.tar.gz.asc>
1283 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.zip>
1284 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.zip.md5>
1285 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.zip.sha1>
1286 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.10.0-02-bundle.zip.asc>
1287 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.tar.gz>
1288 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.tar.gz.md5>
1289 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.tar.gz.sha1>
1290 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.tar.gz.asc>
1291 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.zip>
1292 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.zip.md5>
1293 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.zip.sha1>
1294 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.2-01-bundle.zip.asc>

- [nexus-professional-2.9.1-02-bundle.tar.gz](#)¹²⁹⁵ - MD5¹²⁹⁶, SHA1¹²⁹⁷, ASC¹²⁹⁸
- [nexus-professional-2.9.1-02-bundle.zip](#)¹²⁹⁹ - MD5¹³⁰⁰, SHA1¹³⁰¹, ASC¹³⁰²

Nexus Repository Manager 2.9.0

2014-08-13

- [nexus-professional-2.9.0-04-bundle.tar.gz](#)¹³⁰³ - MD5¹³⁰⁴, SHA1¹³⁰⁵, ASC¹³⁰⁶
- [nexus-professional-2.9.0-04-bundle.zip](#)¹³⁰⁷ - MD5¹³⁰⁸, SHA1¹³⁰⁹, ASC¹³¹⁰

Nexus Repository Manager 2.8.1

2014-06-09

- [nexus-professional-2.8.1-01-bundle.tar.gz](#)¹³¹¹ - MD5¹³¹², SHA1¹³¹³, ASC¹³¹⁴
- [nexus-professional-2.8.1-01-bundle.zip](#)¹³¹⁵ - MD5¹³¹⁶, SHA1¹³¹⁷, ASC¹³¹⁸

1295 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.tar.gz>
1296 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.tar.gz.md5>
1297 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.tar.gz.sha1>
1298 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.tar.gz.asc>
1299 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.zip>
1300 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.zip.md5>
1301 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.zip.sha1>
1302 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.1-02-bundle.zip.asc>
1303 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.tar.gz>
1304 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.tar.gz.md5>
1305 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.tar.gz.sha1>
1306 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.tar.gz.asc>
1307 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.zip>
1308 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.zip.md5>
1309 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.zip.sha1>
1310 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.9.0-04-bundle.zip.asc>
1311 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.tar.gz>
1312 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.tar.gz.md5>
1313 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.tar.gz.sha1>
1314 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.tar.gz.asc>
1315 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.zip>
1316 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.zip.md5>
1317 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.zip.sha1>
1318 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.1-01-bundle.zip.asc>

Nexus Repository Manager 2.8.0

2014-04-09

- [nexus-professional-2.8.0-05-bundle.tar.gz](#)¹³¹⁹ - MD5¹³²⁰, SHA1¹³²¹, ASC¹³²²
- [nexus-professional-2.8.0-05-bundle.zip](#)¹³²³ - MD5¹³²⁴, SHA1¹³²⁵, ASC¹³²⁶

Nexus Repository Manager 2.7.2

2014-02-21

- [nexus-professional-2.7.2-03-bundle.tar.gz](#)¹³²⁷ - MD5¹³²⁸, SHA1¹³²⁹, ASC¹³³⁰
- [nexus-professional-2.7.2-03-bundle.zip](#)¹³³¹ - MD5¹³³², SHA1¹³³³, ASC¹³³⁴

Nexus Repository Manager 2.7.1

2014-01-09

- [nexus-professional-2.7.1-01-bundle.tar.gz](#)¹³³⁵ - MD5¹³³⁶, SHA1¹³³⁷, ASC¹³³⁸

1319 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.tar.gz>
1320 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.tar.gz.md5>
1321 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.tar.gz.sha1>
1322 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.tar.gz.asc>
1323 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.zip>
1324 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.zip.md5>
1325 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.zip.sha1>
1326 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.8.0-05-bundle.zip.asc>
1327 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.tar.gz>
1328 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.tar.gz.md5>
1329 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.tar.gz.sha1>
1330 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.tar.gz.asc>
1331 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.zip>
1332 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.zip.md5>
1333 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.zip.sha1>
1334 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.2-03-bundle.zip.asc>
1335 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.tar.gz>
1336 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.tar.gz.md5>
1337 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.tar.gz.sha1>
1338 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.tar.gz.asc>

- [nexus-professional-2.7.1-01-bundle.zip](#)¹³³⁹ - MD5¹³⁴⁰, SHA1¹³⁴¹, ASC¹³⁴²

Nexus Repository Manager 2.7.0

2013-11-26

- [nexus-professional-2.7.0-06-bundle.tar.gz](#)¹³⁴³ - MD5¹³⁴⁴, SHA1¹³⁴⁵, ASC¹³⁴⁶
- [nexus-professional-2.7.0-06-bundle.zip](#)¹³⁴⁷ - MD5¹³⁴⁸, SHA1¹³⁴⁹, ASC¹³⁵⁰

2013-11-26

- [nexus-professional-2.7.0-05-bundle.tar.gz](#)¹³⁵¹ - MD5¹³⁵², SHA1¹³⁵³, ASC¹³⁵⁴
- [nexus-professional-2.7.0-05-bundle.zip](#)¹³⁵⁵ - MD5¹³⁵⁶, SHA1¹³⁵⁷, ASC¹³⁵⁸

2013-11-26

- [nexus-professional-2.7.0-04-bundle.tar.gz](#)¹³⁵⁹ - MD5¹³⁶⁰, SHA1¹³⁶¹, ASC¹³⁶²

1339 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.zip>
1340 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.zip.md5>
1341 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.zip.sha1>
1342 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.1-01-bundle.zip.asc>
1343 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.tar.gz>
1344 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.tar.gz.md5>
1345 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.tar.gz.sha1>
1346 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.tar.gz.asc>
1347 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.zip>
1348 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.zip.md5>
1349 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.zip.sha1>
1350 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-06-bundle.zip.asc>
1351 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.tar.gz>
1352 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.tar.gz.md5>
1353 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.tar.gz.sha1>
1354 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.tar.gz.asc>
1355 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.zip>
1356 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.zip.md5>
1357 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.zip.sha1>
1358 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-05-bundle.zip.asc>
1359 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.tar.gz>
1360 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.tar.gz.md5>
1361 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.tar.gz.sha1>
1362 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.tar.gz.asc>

- [nexus-professional-2.7.0-04-bundle.zip](#)¹³⁶³ - MD5¹³⁶⁴, SHA1¹³⁶⁵, ASC¹³⁶⁶

2013-11-26

- [nexus-professional-2.7.0-03-bundle.tar.gz](#)¹³⁶⁷ - MD5¹³⁶⁸, SHA1¹³⁶⁹, ASC¹³⁷⁰
- [nexus-professional-2.7.0-03-bundle.zip](#)¹³⁷¹ - MD5¹³⁷², SHA1¹³⁷³, ASC¹³⁷⁴

Nexus Repository Manager 2.6.4

2013-10-17

- [nexus-professional-2.6.4-02-bundle.tar.gz](#)¹³⁷⁵ - MD5¹³⁷⁶, SHA1¹³⁷⁷, ASC¹³⁷⁸
- [nexus-professional-2.6.4-02-bundle.zip](#)¹³⁷⁹ - MD5¹³⁸⁰, SHA1¹³⁸¹, ASC¹³⁸²

Nexus Repository Manager 2.6.3

2013-09-16

- [nexus-professional-2.6.3-01-bundle.tar.gz](#)¹³⁸³ - MD5¹³⁸⁴, SHA1¹³⁸⁵, ASC¹³⁸⁶

1363 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.zip>

1364 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.zip.md5>

1365 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.zip.sha1>

1366 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-04-bundle.zip.asc>

1367 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.tar.gz>

1368 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.tar.gz.md5>

1369 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.tar.gz.sha1>

1370 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.tar.gz.asc>

1371 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.zip>

1372 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.zip.md5>

1373 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.zip.sha1>

1374 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.7.0-03-bundle.zip.asc>

1375 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.tar.gz>

1376 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.tar.gz.md5>

1377 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.tar.gz.sha1>

1378 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.tar.gz.asc>

1379 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.zip>

1380 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.zip.md5>

1381 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.zip.sha1>

1382 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.4-02-bundle.zip.asc>

1383 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.tar.gz>

1384 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.tar.gz.md5>

1385 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.tar.gz.sha1>

1386 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.tar.gz.asc>

- [nexus-professional-2.6.3-01-bundle.zip](#)¹³⁸⁷ - MD5¹³⁸⁸, SHA1¹³⁸⁹, ASC¹³⁹⁰

Nexus Repository Manager 2.6.2

2013-08-22

- [nexus-professional-2.6.2-01-bundle.tar.gz](#)¹³⁹¹ - MD5¹³⁹², SHA1¹³⁹³, ASC¹³⁹⁴
- [nexus-professional-2.6.2-01-bundle.zip](#)¹³⁹⁵ - MD5¹³⁹⁶, SHA1¹³⁹⁷, ASC¹³⁹⁸

Nexus Repository Manager 2.6.1

2013-08-14

- [nexus-professional-2.6.1-02-bundle.tar.gz](#)¹³⁹⁹ - MD5¹⁴⁰⁰, SHA1¹⁴⁰¹, ASC¹⁴⁰²
- [nexus-professional-2.6.1-02-bundle.zip](#)¹⁴⁰³ - MD5¹⁴⁰⁴, SHA1¹⁴⁰⁵, ASC¹⁴⁰⁶

Nexus Repository Manager 2.6.0

2013-07-24

-
- 1387 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.zip>
1388 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.zip.md5>
1389 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.zip.sha1>
1390 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.3-01-bundle.zip.asc>
1391 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.tar.gz>
1392 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.tar.gz.md5>
1393 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.tar.gz.sha1>
1394 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.tar.gz.asc>
1395 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.zip>
1396 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.zip.md5>
1397 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.zip.sha1>
1398 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.2-01-bundle.zip.asc>
1399 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.tar.gz>
1400 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.tar.gz.md5>
1401 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.tar.gz.sha1>
1402 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.tar.gz.asc>
1403 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.zip>
1404 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.zip.md5>
1405 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.zip.sha1>
1406 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.1-02-bundle.zip.asc>

- [nexus-professional-2.6.0-05-bundle.tar.gz](#)¹⁴⁰⁷ - MD5¹⁴⁰⁸, SHA1¹⁴⁰⁹, ASC¹⁴¹⁰
- [nexus-professional-2.6.0-05-bundle.zip](#)¹⁴¹¹ - MD5¹⁴¹², SHA1¹⁴¹³, ASC¹⁴¹⁴

Nexus Repository Manager 2.5.1

2013-07-02

- [nexus-professional-2.5.1-01-bundle.tar.gz](#)¹⁴¹⁵ - MD5¹⁴¹⁶, SHA1¹⁴¹⁷, ASC¹⁴¹⁸
- [nexus-professional-2.5.1-01-bundle.zip](#)¹⁴¹⁹ - MD5¹⁴²⁰, SHA1¹⁴²¹, ASC¹⁴²²

Nexus Repository Manager 2.5.0

2013-06-03

- [nexus-professional-2.5.0-04-bundle.tar.gz](#)¹⁴²³ - MD5¹⁴²⁴, SHA1¹⁴²⁵, ASC¹⁴²⁶
- [nexus-professional-2.5.0-04-bundle.zip](#)¹⁴²⁷ - MD5¹⁴²⁸, SHA1¹⁴²⁹, ASC¹⁴³⁰

1407 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.tar.gz>
1408 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.tar.gz.md5>
1409 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.tar.gz.sha1>
1410 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.tar.gz.asc>
1411 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.zip>
1412 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.zip.md5>
1413 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.zip.sha1>
1414 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.6.0-05-bundle.zip.asc>
1415 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.tar.gz>
1416 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.tar.gz.md5>
1417 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.tar.gz.sha1>
1418 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.tar.gz.asc>
1419 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.zip>
1420 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.zip.md5>
1421 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.zip.sha1>
1422 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.1-01-bundle.zip.asc>
1423 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.tar.gz>
1424 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.tar.gz.md5>
1425 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.tar.gz.sha1>
1426 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.tar.gz.asc>
1427 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.zip>
1428 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.zip.md5>
1429 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.zip.sha1>
1430 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.5.0-04-bundle.zip.asc>

Nexus Repository Manager 2.4.0

2013-04-22

- [nexus-professional-2.4.0-09-bundle.tar.gz](#)¹⁴³¹ - MD5¹⁴³², SHA1¹⁴³³, ASC¹⁴³⁴
- [nexus-professional-2.4.0-09-bundle.zip](#)¹⁴³⁵ - MD5¹⁴³⁶, SHA1¹⁴³⁷, ASC¹⁴³⁸

Nexus Repository Manager 2.3.1

2013-02-12

- [nexus-professional-2.3.1-01-bundle.tar.gz](#)¹⁴³⁹ - MD5¹⁴⁴⁰, SHA1¹⁴⁴¹, ASC¹⁴⁴²
- [nexus-professional-2.3.1-01-bundle.zip](#)¹⁴⁴³ - MD5¹⁴⁴⁴, SHA1¹⁴⁴⁵, ASC¹⁴⁴⁶

Nexus Repository Manager 2.3.0

2013-01-04

- [nexus-professional-2.3.0-04-bundle.tar.gz](#)¹⁴⁴⁷ - MD5¹⁴⁴⁸, SHA1¹⁴⁴⁹, ASC¹⁴⁵⁰

1431 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.tar.gz>
1432 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.tar.gz.md5>
1433 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.tar.gz.sha1>
1434 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.tar.gz.asc>
1435 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.zip>
1436 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.zip.md5>
1437 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.zip.sha1>
1438 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.4.0-09-bundle.zip.asc>
1439 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.tar.gz>
1440 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.tar.gz.md5>
1441 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.tar.gz.sha1>
1442 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.tar.gz.asc>
1443 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.zip>
1444 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.zip.md5>
1445 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.zip.sha1>
1446 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.1-01-bundle.zip.asc>
1447 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.tar.gz>
1448 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.tar.gz.md5>
1449 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.tar.gz.sha1>
1450 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.tar.gz.asc>

- [nexus-professional-2.3.0-04-bundle.zip¹⁴⁵¹](#) - MD5¹⁴⁵², SHA1¹⁴⁵³, ASC¹⁴⁵⁴

Nexus Repository Manager 2.2.1

2012-10-30

- [nexus-professional-2.2.1-bundle.tar.gz¹⁴⁵⁵](#) - MD5¹⁴⁵⁶, SHA1¹⁴⁵⁷, ASC¹⁴⁵⁸
- [nexus-professional-2.2.1-bundle.zip¹⁴⁵⁹](#) - MD5¹⁴⁶⁰, SHA1¹⁴⁶¹, ASC¹⁴⁶²

Nexus Repository Manager 2.2

2012-10-25

- [nexus-professional-2.2-01-bundle.tar.gz¹⁴⁶³](#) - MD5¹⁴⁶⁴, SHA1¹⁴⁶⁵, ASC¹⁴⁶⁶
- [nexus-professional-2.2-01-bundle.zip¹⁴⁶⁷](#) - MD5¹⁴⁶⁸, SHA1¹⁴⁶⁹, ASC¹⁴⁷⁰

Nexus Professional 2.1.2

2012-08-20

-
- 1451 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.zip>
1452 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.zip.md5>
1453 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.zip.sha1>
1454 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.3.0-04-bundle.zip.asc>
1455 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.tar.gz>
1456 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.tar.gz.md5>
1457 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.tar.gz.sha1>
1458 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.tar.gz.asc>
1459 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.zip>
1460 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.zip.md5>
1461 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.zip.sha1>
1462 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2.1-bundle.zip.asc>
1463 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.tar.gz>
1464 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.tar.gz.md5>
1465 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.tar.gz.sha1>
1466 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.tar.gz.asc>
1467 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.zip>
1468 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.zip.md5>
1469 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.zip.sha1>
1470 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.2-01-bundle.zip.asc>

- [nexus-professional-2.1.2-bundle.tar.gz](#)¹⁴⁷¹ - MD5¹⁴⁷², SHA1¹⁴⁷³, ASC¹⁴⁷⁴
- [nexus-professional-2.1.2-bundle.zip](#)¹⁴⁷⁵ - MD5¹⁴⁷⁶, SHA1¹⁴⁷⁷, ASC¹⁴⁷⁸

Nexus Professional 2.1.1

2012-08-07

- [nexus-professional-2.1.1-bundle.tar.gz](#)¹⁴⁷⁹ - MD5¹⁴⁸⁰, SHA1¹⁴⁸¹, ASC¹⁴⁸²
- [nexus-professional-2.1.1-bundle.zip](#)¹⁴⁸³ - MD5¹⁴⁸⁴, SHA1¹⁴⁸⁵, ASC¹⁴⁸⁶

Nexus Professional 2.1

2012-08-07

- [nexus-professional-2.1-bundle.tar.gz](#)¹⁴⁸⁷ - MD5¹⁴⁸⁸, SHA1¹⁴⁸⁹, ASC¹⁴⁹⁰
- [nexus-professional-2.1-bundle.zip](#)¹⁴⁹¹ - MD5¹⁴⁹², SHA1¹⁴⁹³, ASC¹⁴⁹⁴

1471 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.tar.gz>

1472 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.tar.gz.md5>

1473 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.tar.gz.sha1>

1474 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.tar.gz.asc>

1475 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.zip>

1476 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.zip.md5>

1477 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.zip.sha1>

1478 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.2-bundle.zip.asc>

1479 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.tar.gz>

1480 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.tar.gz.md5>

1481 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.tar.gz.sha1>

1482 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.tar.gz.asc>

1483 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.zip>

1484 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.zip.md5>

1485 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.zip.sha1>

1486 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1.1-bundle.zip.asc>

1487 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.tar.gz>

1488 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.tar.gz.md5>

1489 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.tar.gz.sha1>

1490 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.tar.gz.asc>

1491 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.zip>

1492 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.zip.md5>

1493 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.zip.sha1>

1494 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.1-bundle.zip.asc>

Nexus Professional 2.0.6

2012-06-25

- [nexus-professional-2.0.6-bundle.tar.gz](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.tar.gz)¹⁴⁹⁵ - MD5¹⁴⁹⁶, SHA1¹⁴⁹⁷, ASC¹⁴⁹⁸
- [nexus-professional-2.0.6-bundle.zip](https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.zip)¹⁴⁹⁹ - MD5¹⁵⁰⁰, SHA1¹⁵⁰¹, ASC¹⁵⁰²

Download Archives - Repository Manager OSS

This page contains links to archived versions of the Sonatype Nexus Repository Manager OSS, previously known as *Nexus OSS*.

Looking for our commercially licensed [Nexus Repository Manager Archives](#)(see page 127)?

Nexus Repository Manager OSS 2.14.16

2020-01-17

- [nexus-2.14.16-01-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.tar.gz)¹⁵⁰³ - MD5¹⁵⁰⁴, SHA1¹⁵⁰⁵, ASC¹⁵⁰⁶
- [nexus-2.14.16-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.zip)¹⁵⁰⁷ - MD5¹⁵⁰⁸, SHA1¹⁵⁰⁹, ASC¹⁵¹⁰

Nexus Repository Manager OSS 2.14.15

2019-10-15

1495 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.tar.gz>
1496 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.tar.gz.md5>
1497 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.tar.gz.sha1>
1498 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.tar.gz.asc>
1499 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.zip>
1500 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.zip.md5>
1501 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.zip.sha1>
1502 <https://download.sonatype.com/nexus/professional-bundle/nexus-professional-2.0.6-bundle.zip.asc>
1503 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.tar.gz>
1504 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.tar.gz.md5>
1505 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.tar.gz.sha1>
1506 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.tar.gz.asc>
1507 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.zip>
1508 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.zip.md5>
1509 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.zip.sha1>
1510 <https://download.sonatype.com/nexus/oss/nexus-2.14.16-01-bundle.zip.asc>

- [nexus-2.14.15-01-bundle.tar.gz](#)¹⁵¹¹ - MD5¹⁵¹², SHA1¹⁵¹³, ASC¹⁵¹⁴
- [nexus-2.14.15-01-bundle.zip](#)¹⁵¹⁵ - MD5¹⁵¹⁶, SHA1¹⁵¹⁷, ASC¹⁵¹⁸

Nexus Repository Manager OSS 2.14.14

2019-08-09

- [nexus-2.14.14-01-bundle.tar.gz](#)¹⁵¹⁹ - MD5¹⁵²⁰, SHA1¹⁵²¹, ASC¹⁵²²
- [nexus-2.14.14-01-bundle.zip](#)¹⁵²³ - MD5¹⁵²⁴, SHA1¹⁵²⁵, ASC¹⁵²⁶

Nexus Repository Manager OSS 2.14.13

2019-04-24

- [nexus-2.14.13-01-bundle.tar.gz](#)¹⁵²⁷ - MD5¹⁵²⁸, SHA1¹⁵²⁹, ASC¹⁵³⁰
- [nexus-2.14.13-01-bundle.zip](#)¹⁵³¹ - MD5¹⁵³², SHA1¹⁵³³, ASC¹⁵³⁴

1511 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.tar.gz>
1512 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.tar.gz.md5>
1513 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.tar.gz.sha1>
1514 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.tar.gz.asc>
1515 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.zip>
1516 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.zip.md5>
1517 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.zip.sha1>
1518 <https://download.sonatype.com/nexus/oss/nexus-2.14.15-01-bundle.zip.asc>
1519 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.tar.gz>
1520 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.tar.gz.md5>
1521 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.tar.gz.sha1>
1522 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.tar.gz.asc>
1523 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.zip>
1524 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.zip.md5>
1525 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.zip.sha1>
1526 <https://download.sonatype.com/nexus/oss/nexus-2.14.14-01-bundle.zip.asc>
1527 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.tar.gz>
1528 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.tar.gz.md5>
1529 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.tar.gz.sha1>
1530 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.tar.gz.asc>
1531 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.zip>
1532 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.zip.md5>
1533 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.zip.sha1>
1534 <https://download.sonatype.com/nexus/oss/nexus-2.14.13-01-bundle.zip.asc>

Nexus Repository Manager OSS 2.14.12

2019-03-11

- [nexus-2.14.12-02-bundle.tar.gz](#)¹⁵³⁵ - MD5¹⁵³⁶, SHA1¹⁵³⁷, ASC¹⁵³⁸
- [nexus-2.14.12-02-bundle.zip](#)¹⁵³⁹ - MD5¹⁵⁴⁰, SHA1¹⁵⁴¹, ASC¹⁵⁴²

Nexus Repository Manager OSS 2.14.11

2018-11-21

- [nexus-2.14.11-01-bundle.tar.gz](#)¹⁵⁴³ - MD5¹⁵⁴⁴, SHA1¹⁵⁴⁵, ASC¹⁵⁴⁶
- [nexus-2.14.11-01-bundle.zip](#)¹⁵⁴⁷ - MD5¹⁵⁴⁸, SHA1¹⁵⁴⁹, ASC¹⁵⁵⁰

Nexus Repository Manager OSS 2.14.10

2018-09-12

- [nexus-2.14.10-01-bundle.tar.gz](#)¹⁵⁵¹ - MD5¹⁵⁵², SHA1¹⁵⁵³, ASC¹⁵⁵⁴

1535 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.tar.gz>
1536 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.tar.gz.md5>
1537 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.tar.gz.sha1>
1538 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.tar.gz.asc>
1539 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.zip>
1540 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.zip.md5>
1541 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.zip.sha1>
1542 <https://download.sonatype.com/nexus/oss/nexus-2.14.12-02-bundle.zip.asc>
1543 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.tar.gz>
1544 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.tar.gz.md5>
1545 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.tar.gz.sha1>
1546 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.tar.gz.asc>
1547 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.zip>
1548 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.zip.md5>
1549 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.zip.sha1>
1550 <https://download.sonatype.com/nexus/oss/nexus-2.14.11-01-bundle.zip.asc>
1551 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.tar.gz>
1552 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.tar.gz.md5>
1553 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.tar.gz.sha1>
1554 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.tar.gz.asc>

- [nexus-2.14.10-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.zip)¹⁵⁵⁵ - MD5¹⁵⁵⁶, SHA1¹⁵⁵⁷, ASC¹⁵⁵⁸

Nexus Repository Manager OSS 2.14.9

2018-06-27

- [nexus-2.14.9-01-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.tar.gz)¹⁵⁵⁹ - MD5¹⁵⁶⁰, SHA1¹⁵⁶¹, ASC¹⁵⁶²
- [nexus-2.14.9-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.zip)¹⁵⁶³ - MD5¹⁵⁶⁴, SHA1¹⁵⁶⁵, ASC¹⁵⁶⁶

Nexus Repository Manager OSS 2.14.8

2018-02-28

- [nexus-2.14.8-01-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.tar.gz)¹⁵⁶⁷ - MD5¹⁵⁶⁸, SHA1¹⁵⁶⁹, ASC¹⁵⁷⁰
- [nexus-2.14.8-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.zip)¹⁵⁷¹ - MD5¹⁵⁷², SHA1¹⁵⁷³, ASC¹⁵⁷⁴

Nexus Repository Manager OSS 2.14.7

2018-02-12

1555 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.zip>
1556 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.zip.md5>
1557 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.zip.sha1>
1558 <https://download.sonatype.com/nexus/oss/nexus-2.14.10-01-bundle.zip.asc>
1559 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.tar.gz>
1560 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.tar.gz.md5>
1561 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.tar.gz.sha1>
1562 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.tar.gz.asc>
1563 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.zip>
1564 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.zip.md5>
1565 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.zip.sha1>
1566 <https://download.sonatype.com/nexus/oss/nexus-2.14.9-01-bundle.zip.asc>
1567 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.tar.gz>
1568 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.tar.gz.md5>
1569 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.tar.gz.sha1>
1570 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.tar.gz.asc>
1571 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.zip>
1572 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.zip.md5>
1573 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.zip.sha1>
1574 <https://download.sonatype.com/nexus/oss/nexus-2.14.8-01-bundle.zip.asc>

- [nexus-2.14.7-01-bundle.tar.gz](#)¹⁵⁷⁵ - MD5¹⁵⁷⁶, SHA1¹⁵⁷⁷, ASC¹⁵⁷⁸
- [nexus-2.14.7-01-bundle.zip](#)¹⁵⁷⁹ - MD5¹⁵⁸⁰, SHA1¹⁵⁸¹, ASC¹⁵⁸²

Nexus Repository Manager OSS 2.14.6

2018-01-29

- [nexus-2.14.6-02-bundle.tar.gz](#)¹⁵⁸³ - MD5¹⁵⁸⁴, SHA1¹⁵⁸⁵, ASC¹⁵⁸⁶
- [nexus-2.14.6-02-bundle.zip](#)¹⁵⁸⁷ - MD5¹⁵⁸⁸, SHA1¹⁵⁸⁹, ASC¹⁵⁹⁰

Nexus Repository Manager OSS 2.14.5

2017-07-25

- [nexus-2.14.5-02-bundle.tar.gz](#)¹⁵⁹¹ - MD5¹⁵⁹², SHA1¹⁵⁹³, ASC¹⁵⁹⁴
- [nexus-2.14.5-02-bundle.zip](#)¹⁵⁹⁵ - MD5¹⁵⁹⁶, SHA1¹⁵⁹⁷, ASC¹⁵⁹⁸

1575 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.tar.gz>
1576 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.tar.gz.md5>
1577 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.tar.gz.sha1>
1578 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.tar.gz.asc>
1579 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.zip>
1580 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.zip.md5>
1581 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.zip.sha1>
1582 <https://download.sonatype.com/nexus/oss/nexus-2.14.7-01-bundle.zip.asc>
1583 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.tar.gz>
1584 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.tar.gz.md5>
1585 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.tar.gz.sha1>
1586 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.tar.gz.asc>
1587 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.zip>
1588 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.zip.md5>
1589 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.zip.sha1>
1590 <https://download.sonatype.com/nexus/oss/nexus-2.14.6-02-bundle.zip.asc>
1591 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.tar.gz>
1592 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.tar.gz.md5>
1593 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.tar.gz.sha1>
1594 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.tar.gz.asc>
1595 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.zip>
1596 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.zip.md5>
1597 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.zip.sha1>
1598 <https://download.sonatype.com/nexus/oss/nexus-2.14.5-02-bundle.zip.asc>

Nexus Repository Manager OSS 2.14.4

2017-06-04

- [nexus-2.14.4-03-bundle.tar.gz](#)¹⁵⁹⁹ - MD5¹⁶⁰⁰, SHA1¹⁶⁰¹, ASC¹⁶⁰²
- [nexus-2.14.4-03-bundle.zip](#)¹⁶⁰³ - MD5¹⁶⁰⁴, SHA1¹⁶⁰⁵, ASC¹⁶⁰⁶

Nexus Repository Manager OSS 2.14.3

2017-02-05

- [nexus-2.14.3-02-bundle.tar.gz](#)¹⁶⁰⁷ - MD5¹⁶⁰⁸, SHA1¹⁶⁰⁹, ASC¹⁶¹⁰
- [nexus-2.14.3-02-bundle.zip](#)¹⁶¹¹ - MD5¹⁶¹², SHA1¹⁶¹³, ASC¹⁶¹⁴

Nexus Repository Manager OSS 2.14.2

2016-12-18

- [nexus-2.14.2-01-bundle.tar.gz](#)¹⁶¹⁵ - MD5¹⁶¹⁶, SHA1¹⁶¹⁷, ASC¹⁶¹⁸

1599 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.tar.gz>
1600 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.tar.gz.md5>
1601 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.tar.gz.sha1>
1602 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.tar.gz.asc>
1603 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.zip>
1604 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.zip.md5>
1605 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.zip.sha1>
1606 <https://download.sonatype.com/nexus/oss/nexus-2.14.4-03-bundle.zip.asc>
1607 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.tar.gz>
1608 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.tar.gz.md5>
1609 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.tar.gz.sha1>
1610 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.tar.gz.asc>
1611 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.zip>
1612 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.zip.md5>
1613 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.zip.sha1>
1614 <https://download.sonatype.com/nexus/oss/nexus-2.14.3-02-bundle.zip.asc>
1615 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.tar.gz>
1616 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.tar.gz.md5>
1617 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.tar.gz.sha1>
1618 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.tar.gz.asc>

- [nexus-2.14.2-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.zip)¹⁶¹⁹ - MD5¹⁶²⁰, SHA1¹⁶²¹, ASC¹⁶²²

Nexus Repository Manager OSS 2.14.1

2016-10-31

- [nexus-2.14.1-01-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.tar.gz)¹⁶²³ - MD5¹⁶²⁴, SHA1¹⁶²⁵, ASC¹⁶²⁶
- [nexus-2.14.1-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.zip)¹⁶²⁷ - MD5¹⁶²⁸, SHA1¹⁶²⁹, ASC¹⁶³⁰

Nexus Repository Manager OSS 2.14.0

2016-09-16

- [nexus-2.14.0-01-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.tar.gz)¹⁶³¹ - MD5¹⁶³², SHA1¹⁶³³, ASC¹⁶³⁴
- [nexus-2.14.0-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.zip)¹⁶³⁵ - MD5¹⁶³⁶, SHA1¹⁶³⁷, ASC¹⁶³⁸

Nexus Repository Manager OSS 2.13.0

2016-03-11

-
- 1619 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.zip>
1620 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.zip.md5>
1621 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.zip.sha1>
1622 <https://download.sonatype.com/nexus/oss/nexus-2.14.2-01-bundle.zip.asc>
1623 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.tar.gz>
1624 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.tar.gz.md5>
1625 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.tar.gz.sha1>
1626 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.tar.gz.asc>
1627 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.zip>
1628 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.zip.md5>
1629 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.zip.sha1>
1630 <https://download.sonatype.com/nexus/oss/nexus-2.14.1-01-bundle.zip.asc>
1631 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.tar.gz>
1632 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.tar.gz.md5>
1633 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.tar.gz.sha1>
1634 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.tar.gz.asc>
1635 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.zip>
1636 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.zip.md5>
1637 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.zip.sha1>
1638 <https://download.sonatype.com/nexus/oss/nexus-2.14.0-01-bundle.zip.asc>

- [nexus-2.13.0-01-bundle.tar.gz](#)¹⁶³⁹ - MD5¹⁶⁴⁰, SHA1¹⁶⁴¹, ASC¹⁶⁴²
- [nexus-2.13.0-01-bundle.zip](#)¹⁶⁴³ - MD5¹⁶⁴⁴, SHA1¹⁶⁴⁵, ASC¹⁶⁴⁶

Nexus Repository Manager OSS 2.12.1

2016-03-11

- [nexus-2.12.1-01-bundle.tar.gz](#)¹⁶⁴⁷ - MD5¹⁶⁴⁸, SHA1¹⁶⁴⁹, ASC¹⁶⁵⁰
- [nexus-2.12.1-01-bundle.zip](#)¹⁶⁵¹ - MD5¹⁶⁵², SHA1¹⁶⁵³, ASC¹⁶⁵⁴

Nexus OSS 2.12.0

2015-12-13

- [nexus-2.12.0-01-bundle.tar.gz](#)¹⁶⁵⁵ - MD5¹⁶⁵⁶, SHA1¹⁶⁵⁷, ASC¹⁶⁵⁸
- [nexus-2.12.0-01-bundle.zip](#)¹⁶⁵⁹ - MD5¹⁶⁶⁰, SHA1¹⁶⁶¹, ASC¹⁶⁶²

1639 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.tar.gz>
1640 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.tar.gz.md5>
1641 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.tar.gz.sha1>
1642 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.tar.gz.asc>
1643 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.zip>
1644 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.zip.md5>
1645 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.zip.sha1>
1646 <https://download.sonatype.com/nexus/oss/nexus-2.13.0-01-bundle.zip.asc>
1647 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.tar.gz>
1648 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.tar.gz.md5>
1649 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.tar.gz.sha1>
1650 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.tar.gz.asc>
1651 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.zip>
1652 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.zip.md5>
1653 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.zip.sha1>
1654 <https://download.sonatype.com/nexus/oss/nexus-2.12.1-01-bundle.zip.asc>
1655 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.tar.gz>
1656 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.tar.gz.md5>
1657 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.tar.gz.sha1>
1658 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.tar.gz.asc>
1659 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.zip>
1660 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.zip.md5>
1661 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.zip.sha1>
1662 <https://download.sonatype.com/nexus/oss/nexus-2.12.0-01-bundle.zip.asc>

Nexus OSS 2.11.4

2015-07-15

- [nexus-2.11.4-01-bundle.tar.gz](#)¹⁶⁶³ - MD5¹⁶⁶⁴, SHA1¹⁶⁶⁵, ASC¹⁶⁶⁶
- [nexus-2.11.4-01-bundle.zip](#)¹⁶⁶⁷ - MD5¹⁶⁶⁸, SHA1¹⁶⁶⁹, ASC¹⁶⁷⁰

Nexus OSS 2.11.3

2015-05-26

- [nexus-2.11.3-01-bundle.tar.gz](#)¹⁶⁷¹ - MD5¹⁶⁷², SHA1¹⁶⁷³, ASC¹⁶⁷⁴
- [nexus-2.11.3-01-bundle.zip](#)¹⁶⁷⁵ - MD5¹⁶⁷⁶, SHA1¹⁶⁷⁷, ASC¹⁶⁷⁸

Nexus OSS 2.11.2

2015-03-16

- [nexus-2.11.2-06-bundle.tar.gz](#)¹⁶⁷⁹ - MD5¹⁶⁸⁰, SHA1¹⁶⁸¹, ASC¹⁶⁸²

1663 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.tar.gz>
1664 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.tar.gz.md5>
1665 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.tar.gz.sha1>
1666 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.tar.gz.asc>
1667 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.zip>
1668 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.zip.md5>
1669 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.zip.sha1>
1670 <https://download.sonatype.com/nexus/oss/nexus-2.11.4-01-bundle.zip.asc>
1671 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.tar.gz>
1672 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.tar.gz.md5>
1673 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.tar.gz.sha1>
1674 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.tar.gz.asc>
1675 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.zip>
1676 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.zip.md5>
1677 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.zip.sha1>
1678 <https://download.sonatype.com/nexus/oss/nexus-2.11.3-01-bundle.zip.asc>
1679 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.tar.gz>
1680 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.tar.gz.md5>
1681 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.tar.gz.sha1>
1682 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.tar.gz.asc>

- [nexus-2.11.2-06-bundle.zip](#)¹⁶⁸³ - MD5¹⁶⁸⁴, SHA1¹⁶⁸⁵, ASC¹⁶⁸⁶

2015-03-06

- [nexus-2.11.2-04-bundle.tar.gz](#)¹⁶⁸⁷ - MD5¹⁶⁸⁸, SHA1¹⁶⁸⁹, ASC¹⁶⁹⁰
- [nexus-2.11.2-04-bundle.zip](#)¹⁶⁹¹ - MD5¹⁶⁹², SHA1¹⁶⁹³, ASC¹⁶⁹⁴

Nexus OSS 2.11.1

2014-12-19

- [nexus-2.11.1-01-bundle.tar.gz](#)¹⁶⁹⁵ - MD5¹⁶⁹⁶, SHA1¹⁶⁹⁷, ASC¹⁶⁹⁸
- [nexus-2.11.1-01-bundle.zip](#)¹⁶⁹⁹ - MD5¹⁷⁰⁰, SHA1¹⁷⁰¹, ASC¹⁷⁰²

Nexus OSS 2.11.0

2014-12-01

- [nexus-2.11.0-02-bundle.tar.gz](#)¹⁷⁰³ - MD5¹⁷⁰⁴, SHA1¹⁷⁰⁵, ASC¹⁷⁰⁶

1683 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.zip>
1684 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.zip.md5>
1685 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.zip.sha1>
1686 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-06-bundle.zip.asc>
1687 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.tar.gz>
1688 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.tar.gz.md5>
1689 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.tar.gz.sha1>
1690 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.tar.gz.asc>
1691 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.zip>
1692 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.zip.md5>
1693 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.zip.sha1>
1694 <https://download.sonatype.com/nexus/oss/nexus-2.11.2-04-bundle.zip.asc>
1695 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.tar.gz>
1696 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.tar.gz.md5>
1697 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.tar.gz.sha1>
1698 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.tar.gz.asc>
1699 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.zip>
1700 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.zip.md5>
1701 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.zip.sha1>
1702 <https://download.sonatype.com/nexus/oss/nexus-2.11.1-01-bundle.zip.asc>
1703 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.tar.gz>
1704 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.tar.gz.md5>
1705 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.tar.gz.sha1>
1706 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.tar.gz.asc>

- [nexus-2.11.0-02-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.zip)¹⁷⁰⁷ - MD5¹⁷⁰⁸, SHA1¹⁷⁰⁹, ASC¹⁷¹⁰

Nexus OSS 2.10.0

2014-10-06

- [nexus-2.10.0-02-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.tar.gz)¹⁷¹¹ - MD5¹⁷¹², SHA1¹⁷¹³, ASC¹⁷¹⁴
- [nexus-2.10.0-02-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.zip)¹⁷¹⁵ - MD5¹⁷¹⁶, SHA1¹⁷¹⁷, ASC¹⁷¹⁸

Nexus OSS 2.9.2

2014-09-25

- [nexus-2.9.2-01-bundle.tar.gz](https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.tar.gz)¹⁷¹⁹ - MD5¹⁷²⁰, SHA1¹⁷²¹, ASC¹⁷²²
- [nexus-2.9.2-01-bundle.zip](https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.zip)¹⁷²³ - MD5¹⁷²⁴, SHA1¹⁷²⁵, ASC¹⁷²⁶

Nexus OSS 2.9.1

2014-09-04

-
- 1707 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.zip>
1708 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.zip.md5>
1709 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.zip.sha1>
1710 <https://download.sonatype.com/nexus/oss/nexus-2.11.0-02-bundle.zip.asc>
1711 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.tar.gz>
1712 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.tar.gz.md5>
1713 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.tar.gz.sha1>
1714 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.tar.gz.asc>
1715 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.zip>
1716 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.zip.md5>
1717 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.zip.sha1>
1718 <https://download.sonatype.com/nexus/oss/nexus-2.10.0-02-bundle.zip.asc>
1719 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.tar.gz>
1720 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.tar.gz.md5>
1721 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.tar.gz.sha1>
1722 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.tar.gz.asc>
1723 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.zip>
1724 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.zip.md5>
1725 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.zip.sha1>
1726 <https://download.sonatype.com/nexus/oss/nexus-2.9.2-01-bundle.zip.asc>

- [nexus-2.9.1-02-bundle.tar.gz](#)¹⁷²⁷ - MD5¹⁷²⁸, SHA1¹⁷²⁹, ASC¹⁷³⁰
- [nexus-2.9.1-02-bundle.zip](#)¹⁷³¹ - MD5¹⁷³², SHA1¹⁷³³, ASC¹⁷³⁴

Nexus OSS 2.9.0

2014-08-13

- [nexus-2.9.0-04-bundle.tar.gz](#)¹⁷³⁵ - MD5¹⁷³⁶, SHA1¹⁷³⁷, ASC¹⁷³⁸
- [nexus-2.9.0-04-bundle.zip](#)¹⁷³⁹ - MD5¹⁷⁴⁰, SHA1¹⁷⁴¹, ASC¹⁷⁴²

Nexus OSS 2.8.1

2014-06-09

- [nexus-2.8.1-01-bundle.tar.gz](#)¹⁷⁴³ - MD5¹⁷⁴⁴, SHA1¹⁷⁴⁵, ASC¹⁷⁴⁶
- [nexus-2.8.1-01-bundle.zip](#)¹⁷⁴⁷ - MD5¹⁷⁴⁸, SHA1¹⁷⁴⁹, ASC¹⁷⁵⁰

1727 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.tar.gz>
1728 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.tar.gz.md5>
1729 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.tar.gz.sha1>
1730 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.tar.gz.asc>
1731 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.zip>
1732 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.zip.md5>
1733 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.zip.sha1>
1734 <https://download.sonatype.com/nexus/oss/nexus-2.9.1-02-bundle.zip.asc>
1735 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.tar.gz>
1736 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.tar.gz.md5>
1737 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.tar.gz.sha1>
1738 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.tar.gz.asc>
1739 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.zip>
1740 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.zip.md5>
1741 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.zip.sha1>
1742 <https://download.sonatype.com/nexus/oss/nexus-2.9.0-04-bundle.zip.asc>
1743 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.tar.gz>
1744 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.tar.gz.md5>
1745 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.tar.gz.sha1>
1746 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.tar.gz.asc>
1747 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.zip>
1748 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.zip.md5>
1749 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.zip.sha1>
1750 <https://download.sonatype.com/nexus/oss/nexus-2.8.1-01-bundle.zip.asc>

Nexus OSS 2.8.0

2014-04-09

- [nexus-2.8.0-05-bundle.tar.gz](#)¹⁷⁵¹ - MD5¹⁷⁵², SHA1¹⁷⁵³, ASC¹⁷⁵⁴
- [nexus-2.8.0-05-bundle.zip](#)¹⁷⁵⁵ - MD5¹⁷⁵⁶, SHA1¹⁷⁵⁷, ASC¹⁷⁵⁸

Nexus OSS 2.7.2

2014-02-21

- [nexus-2.7.2-03-bundle.tar.gz](#)¹⁷⁵⁹ - MD5¹⁷⁶⁰, SHA1¹⁷⁶¹, ASC¹⁷⁶²
- [nexus-2.7.2-03-bundle.zip](#)¹⁷⁶³ - MD5¹⁷⁶⁴, SHA1¹⁷⁶⁵, ASC¹⁷⁶⁶

Nexus OSS 2.7.1

2014-01-09

- [nexus-2.7.1-01-bundle.tar.gz](#)¹⁷⁶⁷ - MD5¹⁷⁶⁸, SHA1¹⁷⁶⁹, ASC¹⁷⁷⁰

1751 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.tar.gz>
1752 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.tar.gz.md5>
1753 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.tar.gz.sha1>
1754 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.tar.gz.asc>
1755 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.zip>
1756 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.zip.md5>
1757 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.zip.sha1>
1758 <https://download.sonatype.com/nexus/oss/nexus-2.8.0-05-bundle.zip.asc>
1759 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.tar.gz>
1760 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.tar.gz.md5>
1761 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.tar.gz.sha1>
1762 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.tar.gz.asc>
1763 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.zip>
1764 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.zip.md5>
1765 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.zip.sha1>
1766 <https://download.sonatype.com/nexus/oss/nexus-2.7.2-03-bundle.zip.asc>
1767 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.tar.gz>
1768 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.tar.gz.md5>
1769 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.tar.gz.sha1>
1770 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.tar.gz.asc>

- [nexus-2.7.1-01-bundle.zip¹⁷⁷¹](#) - MD5¹⁷⁷², SHA1¹⁷⁷³, ASC¹⁷⁷⁴

Nexus OSS 2.7.0

2013-11-26

- [nexus-2.7.0-06-bundle.tar.gz¹⁷⁷⁵](#) - MD5¹⁷⁷⁶, SHA1¹⁷⁷⁷, ASC¹⁷⁷⁸
- [nexus-2.7.0-06-bundle.zip¹⁷⁷⁹](#) - MD5¹⁷⁸⁰, SHA1¹⁷⁸¹, ASC¹⁷⁸²

2013-11-26

- [nexus-2.7.0-05-bundle.tar.gz¹⁷⁸³](#) - MD5¹⁷⁸⁴, SHA1¹⁷⁸⁵, ASC¹⁷⁸⁶
- [nexus-2.7.0-05-bundle.zip¹⁷⁸⁷](#) - MD5¹⁷⁸⁸, SHA1¹⁷⁸⁹, ASC¹⁷⁹⁰

2013-11-26

- [nexus-2.7.0-04-bundle.tar.gz¹⁷⁹¹](#) - MD5¹⁷⁹², SHA1¹⁷⁹³, ASC¹⁷⁹⁴

1771 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.zip>
1772 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.zip.md5>
1773 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.zip.sha1>
1774 <https://download.sonatype.com/nexus/oss/nexus-2.7.1-01-bundle.zip.asc>
1775 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.tar.gz>
1776 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.tar.gz.md5>
1777 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.tar.gz.sha1>
1778 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.tar.gz.asc>
1779 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.zip>
1780 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.zip.md5>
1781 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.zip.sha1>
1782 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-06-bundle.zip.asc>
1783 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.tar.gz>
1784 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.tar.gz.md5>
1785 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.tar.gz.sha1>
1786 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.tar.gz.asc>
1787 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.zip>
1788 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.zip.md5>
1789 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.zip.sha1>
1790 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-05-bundle.zip.asc>
1791 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.tar.gz>
1792 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.tar.gz.md5>
1793 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.tar.gz.sha1>
1794 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.tar.gz.asc>

- [nexus-2.7.0-04-bundle.zip¹⁷⁹⁵](#) - MD5¹⁷⁹⁶, SHA1¹⁷⁹⁷, ASC¹⁷⁹⁸

2013-11-26

- [nexus-2.7.0-03-bundle.tar.gz¹⁷⁹⁹](#) - MD5¹⁸⁰⁰, SHA1¹⁸⁰¹, ASC¹⁸⁰²
- [nexus-2.7.0-03-bundle.zip¹⁸⁰³](#) - MD5¹⁸⁰⁴, SHA1¹⁸⁰⁵, ASC¹⁸⁰⁶

Nexus OSS 2.6.4

2013-10-17

- [nexus-2.6.4-02-bundle.tar.gz¹⁸⁰⁷](#) - MD5¹⁸⁰⁸, SHA1¹⁸⁰⁹, ASC¹⁸¹⁰
- [nexus-2.6.4-02-bundle.zip¹⁸¹¹](#) - MD5¹⁸¹², SHA1¹⁸¹³, ASC¹⁸¹⁴

Nexus OSS 2.6.3

2013-09-16

- [nexus-2.6.3-01-bundle.tar.gz¹⁸¹⁵](#) - MD5¹⁸¹⁶, SHA1¹⁸¹⁷, ASC¹⁸¹⁸

1795 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.zip>
1796 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.zip.md5>
1797 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.zip.sha1>
1798 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-04-bundle.zip.asc>
1799 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.tar.gz>
1800 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.tar.gz.md5>
1801 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.tar.gz.sha1>
1802 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.tar.gz.asc>
1803 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.zip>
1804 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.zip.md5>
1805 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.zip.sha1>
1806 <https://download.sonatype.com/nexus/oss/nexus-2.7.0-03-bundle.zip.asc>
1807 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.tar.gz>
1808 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.tar.gz.md5>
1809 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.tar.gz.sha1>
1810 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.tar.gz.asc>
1811 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.zip>
1812 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.zip.md5>
1813 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.zip.sha1>
1814 <https://download.sonatype.com/nexus/oss/nexus-2.6.4-02-bundle.zip.asc>
1815 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.tar.gz>
1816 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.tar.gz.md5>
1817 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.tar.gz.sha1>
1818 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.tar.gz.asc>

- [nexus-2.6.3-01-bundle.zip¹⁸¹⁹](#) - MD5¹⁸²⁰, SHA1¹⁸²¹, ASC¹⁸²²

Nexus OSS 2.6.2

2013-08-22

- [nexus-2.6.2-01-bundle.tar.gz¹⁸²³](#) - MD5¹⁸²⁴, SHA1¹⁸²⁵, ASC¹⁸²⁶
- [nexus-2.6.2-01-bundle.zip¹⁸²⁷](#) - MD5¹⁸²⁸, SHA1¹⁸²⁹, ASC¹⁸³⁰

Nexus OSS 2.6.1

2013-08-14

- [nexus-2.6.1-02-bundle.tar.gz¹⁸³¹](#) - MD5¹⁸³², SHA1¹⁸³³, ASC¹⁸³⁴
- [nexus-2.6.1-02-bundle.zip¹⁸³⁵](#) - MD5¹⁸³⁶, SHA1¹⁸³⁷, ASC¹⁸³⁸

Nexus OSS 2.6.0

2013-07-24

-
- 1819 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.zip>
1820 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.zip.md5>
1821 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.zip.sha1>
1822 <https://download.sonatype.com/nexus/oss/nexus-2.6.3-01-bundle.zip.asc>
1823 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.tar.gz>
1824 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.tar.gz.md5>
1825 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.tar.gz.sha1>
1826 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.tar.gz.asc>
1827 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.zip>
1828 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.zip.md5>
1829 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.zip.sha1>
1830 <https://download.sonatype.com/nexus/oss/nexus-2.6.2-01-bundle.zip.asc>
1831 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.tar.gz>
1832 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.tar.gz.md5>
1833 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.tar.gz.sha1>
1834 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.tar.gz.asc>
1835 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.zip>
1836 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.zip.md5>
1837 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.zip.sha1>
1838 <https://download.sonatype.com/nexus/oss/nexus-2.6.1-02-bundle.zip.asc>

- [nexus-2.6.0-05-bundle.tar.gz](#)¹⁸³⁹ - MD5¹⁸⁴⁰, SHA1¹⁸⁴¹, ASC¹⁸⁴²
- [nexus-2.6.0-05-bundle.zip](#)¹⁸⁴³ - MD5¹⁸⁴⁴, SHA1¹⁸⁴⁵, ASC¹⁸⁴⁶

Nexus OSS 2.5.1

2013-07-02

- [nexus-2.5.1-01-bundle.tar.gz](#)¹⁸⁴⁷ - MD5¹⁸⁴⁸, SHA1¹⁸⁴⁹, ASC¹⁸⁵⁰
- [nexus-2.5.1-01-bundle.zip](#)¹⁸⁵¹ - MD5¹⁸⁵², SHA1¹⁸⁵³, ASC¹⁸⁵⁴

Nexus OSS 2.5.0

2013-06-03

- [nexus-2.5.0-04-bundle.tar.gz](#)¹⁸⁵⁵ - MD5¹⁸⁵⁶, SHA1¹⁸⁵⁷, ASC¹⁸⁵⁸
- [nexus-2.5.0-04-bundle.zip](#)¹⁸⁵⁹ - MD5¹⁸⁶⁰, SHA1¹⁸⁶¹, ASC¹⁸⁶²

1839 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.tar.gz>
1840 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.tar.gz.md5>
1841 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.tar.gz.sha1>
1842 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.tar.gz.asc>
1843 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.zip>
1844 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.zip.md5>
1845 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.zip.sha1>
1846 <https://download.sonatype.com/nexus/oss/nexus-2.6.0-05-bundle.zip.asc>
1847 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.tar.gz>
1848 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.tar.gz.md5>
1849 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.tar.gz.sha1>
1850 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.tar.gz.asc>
1851 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.zip>
1852 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.zip.md5>
1853 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.zip.sha1>
1854 <https://download.sonatype.com/nexus/oss/nexus-2.5.1-01-bundle.zip.asc>
1855 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.tar.gz>
1856 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.tar.gz.md5>
1857 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.tar.gz.sha1>
1858 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.tar.gz.asc>
1859 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.zip>
1860 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.zip.md5>
1861 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.zip.sha1>
1862 <https://download.sonatype.com/nexus/oss/nexus-2.5.0-04-bundle.zip.asc>

Nexus OSS 2.4.0

2013-04-22

- [nexus-2.4.0-09-bundle.tar.gz](#)¹⁸⁶³ - MD5¹⁸⁶⁴, SHA1¹⁸⁶⁵, ASC¹⁸⁶⁶
- [nexus-2.4.0-09-bundle.zip](#)¹⁸⁶⁷ - MD5¹⁸⁶⁸, SHA1¹⁸⁶⁹, ASC¹⁸⁷⁰

Nexus OSS 2.3.1

2013-02-12

- [nexus-2.3.1-01-bundle.tar.gz](#)¹⁸⁷¹ - MD5¹⁸⁷², SHA1¹⁸⁷³, ASC¹⁸⁷⁴
- [nexus-2.3.1-01-bundle.zip](#)¹⁸⁷⁵ - MD5¹⁸⁷⁶, SHA1¹⁸⁷⁷, ASC¹⁸⁷⁸

Nexus OSS 2.3.0

2013-01-04

- [nexus-2.3.0-04-bundle.tar.gz](#)¹⁸⁷⁹ - MD5¹⁸⁸⁰, SHA1¹⁸⁸¹, ASC¹⁸⁸²

1863 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.tar.gz>
1864 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.tar.gz.md5>
1865 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.tar.gz.sha1>
1866 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.tar.gz.asc>
1867 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.zip>
1868 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.zip.md5>
1869 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.zip.sha1>
1870 <https://download.sonatype.com/nexus/oss/nexus-2.4.0-09-bundle.zip.asc>
1871 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.tar.gz>
1872 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.tar.gz.md5>
1873 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.tar.gz.sha1>
1874 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.tar.gz.asc>
1875 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.zip>
1876 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.zip.md5>
1877 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.zip.sha1>
1878 <https://download.sonatype.com/nexus/oss/nexus-2.3.1-01-bundle.zip.asc>
1879 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.tar.gz>
1880 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.tar.gz.md5>
1881 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.tar.gz.sha1>
1882 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.tar.gz.asc>

- [nexus-2.3.0-04-bundle.zip¹⁸⁸³](#) - MD5¹⁸⁸⁴, SHA1¹⁸⁸⁵, ASC¹⁸⁸⁶

Nexus OSS 2.2.1

2012-10-30

- [nexus-2.2.1-bundle.tar.gz¹⁸⁸⁷](#) - MD5¹⁸⁸⁸, SHA1¹⁸⁸⁹, ASC¹⁸⁹⁰
- [nexus-2.2.1-bundle.zip¹⁸⁹¹](#) - MD5¹⁸⁹², SHA1¹⁸⁹³, ASC¹⁸⁹⁴

Nexus OSS 2.2

2012-10-25

- [nexus-2.2-01-bundle.tar.gz¹⁸⁹⁵](#) - MD5¹⁸⁹⁶, SHA1¹⁸⁹⁷, ASC¹⁸⁹⁸
- [nexus-2.2-01-bundle.zip¹⁸⁹⁹](#) - MD5¹⁹⁰⁰, SHA1¹⁹⁰¹, ASC¹⁹⁰²

Nexus OSS 2.1.2

2012-08-20

-
- 1883 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.zip>
1884 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.zip.md5>
1885 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.zip.sha1>
1886 <https://download.sonatype.com/nexus/oss/nexus-2.3.0-04-bundle.zip.asc>
1887 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.tar.gz>
1888 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.tar.gz.md5>
1889 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.tar.gz.sha1>
1890 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.tar.gz.asc>
1891 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.zip>
1892 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.zip.md5>
1893 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.zip.sha1>
1894 <https://download.sonatype.com/nexus/oss/nexus-2.2.1-bundle.zip.asc>
1895 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.tar.gz>
1896 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.tar.gz.md5>
1897 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.tar.gz.sha1>
1898 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.tar.gz.asc>
1899 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.zip>
1900 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.zip.md5>
1901 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.zip.sha1>
1902 <https://download.sonatype.com/nexus/oss/nexus-2.2-01-bundle.zip.asc>

- [nexus-2.1.2-bundle.tar.gz](#)¹⁹⁰³ - MD5¹⁹⁰⁴, SHA1¹⁹⁰⁵, ASC¹⁹⁰⁶
- [nexus-2.1.2-bundle.zip](#)¹⁹⁰⁷ - MD5¹⁹⁰⁸, SHA1¹⁹⁰⁹, ASC¹⁹¹⁰

Nexus OSS 2.1.1

2012-08-07

- [nexus-2.1.1-bundle.tar.gz](#)¹⁹¹¹ - MD5¹⁹¹², SHA1¹⁹¹³, ASC¹⁹¹⁴
- [nexus-2.1.1-bundle.zip](#)¹⁹¹⁵ - MD5¹⁹¹⁶, SHA1¹⁹¹⁷, ASC¹⁹¹⁸

Nexus OSS 2.1

2012-08-07

- [nexus-2.1-bundle.tar.gz](#)¹⁹¹⁹ - MD5¹⁹²⁰, SHA1¹⁹²¹, ASC¹⁹²²
- [nexus-2.1-bundle.zip](#)¹⁹²³ - MD5¹⁹²⁴, SHA1¹⁹²⁵, ASC¹⁹²⁶

1903 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.tar.gz>
1904 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.tar.gz.md5>
1905 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.tar.gz.sha1>
1906 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.tar.gz.asc>
1907 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.zip>
1908 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.zip.md5>
1909 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.zip.sha1>
1910 <https://download.sonatype.com/nexus/oss/nexus-2.1.2-bundle.zip.asc>
1911 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.tar.gz>
1912 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.tar.gz.md5>
1913 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.tar.gz.sha1>
1914 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.tar.gz.asc>
1915 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.zip>
1916 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.zip.md5>
1917 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.zip.sha1>
1918 <https://download.sonatype.com/nexus/oss/nexus-2.1.1-bundle.zip.asc>
1919 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.tar.gz>
1920 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.tar.gz.md5>
1921 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.tar.gz.sha1>
1922 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.tar.gz.asc>
1923 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.zip>
1924 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.zip.md5>
1925 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.zip.sha1>
1926 <https://download.sonatype.com/nexus/oss/nexus-2.1-bundle.zip.asc>

Nexus OSS 2.0.6

2012-06-25

- [nexus-2.0.6-bundle.tar.gz](#)¹⁹²⁷ - [MD5](#)¹⁹²⁸, [SHA1](#)¹⁹²⁹, [ASC](#)¹⁹³⁰
- [nexus-2.0.6-bundle.zip](#)¹⁹³¹ - [MD5](#)¹⁹³², [SHA1](#)¹⁹³³, [ASC](#)¹⁹³⁴

Nexus OSS 2.0.5

2012-06-04

- [nexus-2.0.5-bundle.tar.gz](#)¹⁹³⁵ - [MD5](#)¹⁹³⁶, [SHA1](#)¹⁹³⁷, [ASC](#)¹⁹³⁸
- [nexus-2.0.5-bundle.zip](#)¹⁹³⁹ - [MD5](#)¹⁹⁴⁰, [SHA1](#)¹⁹⁴¹, [ASC](#)¹⁹⁴²

Nexus OSS 2.0.4

2012-04-25

- [nexus-2.0.4-bundle.tar.gz](#)¹⁹⁴³ - [MD5](#)¹⁹⁴⁴, [SHA1](#)¹⁹⁴⁵, [ASC](#)¹⁹⁴⁶

1927 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.tar.gz>
1928 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.tar.gz.md5>
1929 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.tar.gz.sha1>
1930 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.tar.gz.asc>
1931 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.zip>
1932 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.zip.md5>
1933 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.zip.sha1>
1934 <https://download.sonatype.com/nexus/oss/nexus-2.0.6-bundle.zip.asc>
1935 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.tar.gz>
1936 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.tar.gz.md5>
1937 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.tar.gz.sha1>
1938 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.tar.gz.asc>
1939 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.zip>
1940 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.zip.md5>
1941 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.zip.sha1>
1942 <https://download.sonatype.com/nexus/oss/nexus-2.0.5-bundle.zip.asc>
1943 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.tar.gz>
1944 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.tar.gz.md5>
1945 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.tar.gz.sha1>
1946 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.tar.gz.asc>

- [nexus-2.0.4-bundle.zip¹⁹⁴⁷](#) - MD5¹⁹⁴⁸, SHA1¹⁹⁴⁹, ASC¹⁹⁵⁰

Nexus OSS 2.0.3

2012-03-28

- [nexus-2.0.3-bundle.tar.gz¹⁹⁵¹](#) - MD5¹⁹⁵², SHA1¹⁹⁵³, ASC¹⁹⁵⁴
- [nexus-2.0.3-bundle.zip¹⁹⁵⁵](#) - MD5¹⁹⁵⁶, SHA1¹⁹⁵⁷, ASC¹⁹⁵⁸

Nexus OSS 2.0.2

2012-03-12

- [nexus-2.0.2-bundle.tar.gz¹⁹⁵⁹](#) - MD5¹⁹⁶⁰, SHA1¹⁹⁶¹, ASC¹⁹⁶²
- [nexus-2.0.2-bundle.zip¹⁹⁶³](#) - MD5¹⁹⁶⁴, SHA1¹⁹⁶⁵, ASC¹⁹⁶⁶

Nexus OSS 2.0.1

2012-03-01

-
- 1947 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.zip>
1948 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.zip.md5>
1949 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.zip.sha1>
1950 <https://download.sonatype.com/nexus/oss/nexus-2.0.4-bundle.zip.asc>
1951 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.tar.gz>
1952 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.tar.gz.md5>
1953 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.tar.gz.sha1>
1954 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.tar.gz.asc>
1955 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.zip>
1956 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.zip.md5>
1957 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.zip.sha1>
1958 <https://download.sonatype.com/nexus/oss/nexus-2.0.3-bundle.zip.asc>
1959 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.tar.gz>
1960 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.tar.gz.md5>
1961 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.tar.gz.sha1>
1962 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.tar.gz.asc>
1963 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.zip>
1964 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.zip.md5>
1965 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.zip.sha1>
1966 <https://download.sonatype.com/nexus/oss/nexus-2.0.2-bundle.zip.asc>

- [nexus-2.0.1-bundle.tar.gz](#)¹⁹⁶⁷ - MD5¹⁹⁶⁸, SHA1¹⁹⁶⁹, ASC¹⁹⁷⁰
- [nexus-2.0.1-bundle.zip](#)¹⁹⁷¹ - MD5¹⁹⁷², SHA1¹⁹⁷³, ASC¹⁹⁷⁴

Nexus OSS 2.0

2012-02-15

- [nexus-2.0-bundle.tar.gz](#)¹⁹⁷⁵ - MD5¹⁹⁷⁶, SHA1¹⁹⁷⁷, ASC¹⁹⁷⁸
- [nexus-2.0-bundle.zip](#)¹⁹⁷⁹ - MD5¹⁹⁸⁰, SHA1¹⁹⁸¹, ASC¹⁹⁸²

Nexus OSS 1.9.2.4

2011-12-22

- [nexus-oss-webapp-1.9.2.4-bundle.tar.gz](#)¹⁹⁸³ - MD5¹⁹⁸⁴, SHA1¹⁹⁸⁵, ASC¹⁹⁸⁶
- [nexus-oss-webapp-1.9.2.4-bundle.zip](#)¹⁹⁸⁷ - MD5¹⁹⁸⁸, SHA1¹⁹⁸⁹, ASC¹⁹⁹⁰

1967 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.tar.gz>
1968 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.tar.gz.md5>
1969 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.tar.gz.sha1>
1970 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.tar.gz.asc>
1971 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.zip>
1972 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.zip.md5>
1973 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.zip.sha1>
1974 <https://download.sonatype.com/nexus/oss/nexus-2.0.1-bundle.zip.asc>
1975 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.tar.gz>
1976 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.tar.gz.md5>
1977 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.tar.gz.sha1>
1978 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.tar.gz.asc>
1979 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.zip>
1980 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.zip.md5>
1981 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.zip.sha1>
1982 <https://download.sonatype.com/nexus/oss/nexus-2.0-bundle.zip.asc>
1983 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.tar.gz>
1984 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.tar.gz.md5>
1985 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.tar.gz.sha1>
1986 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.tar.gz.asc>
1987 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.zip>
1988 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.zip.md5>
1989 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.zip.sha1>
1990 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.4-bundle.zip.asc>

Nexus OSS 1.9.2.3

2011-09-26

- [nexus-oss-webapp-1.9.2.3-bundle.tar.gz](#)¹⁹⁹¹ - MD5¹⁹⁹², SHA1¹⁹⁹³, ASC¹⁹⁹⁴
- [nexus-oss-webapp-1.9.2.3-bundle.zip](#)¹⁹⁹⁵ - MD5¹⁹⁹⁶, SHA1¹⁹⁹⁷, ASC¹⁹⁹⁸

Nexus OSS 1.9.2.2

2011-08-22

- [nexus-oss-webapp-1.9.2.2-bundle.tar.gz](#)¹⁹⁹⁹ - MD5²⁰⁰⁰, SHA1²⁰⁰¹, ASC²⁰⁰²
- [nexus-oss-webapp-1.9.2.2-bundle.zip](#)²⁰⁰³ - MD5²⁰⁰⁴, SHA1²⁰⁰⁵, ASC²⁰⁰⁶

Nexus OSS 1.9.2

2011-07-08

- [nexus-oss-webapp-1.9.2-bundle.tar.gz](#)²⁰⁰⁷ - MD5²⁰⁰⁸, SHA1²⁰⁰⁹, ASC²⁰¹⁰

1991 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.tar.gz>
1992 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.tar.gz.md5>
1993 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.tar.gz.sha1>
1994 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.tar.gz.asc>
1995 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.zip>
1996 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.zip.md5>
1997 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.zip.sha1>
1998 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.3-bundle.zip.asc>
1999 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.tar.gz>
2000 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.tar.gz.md5>
2001 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.tar.gz.sha1>
2002 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.tar.gz.asc>
2003 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.zip>
2004 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.zip.md5>
2005 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.zip.sha1>
2006 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2.2-bundle.zip.asc>
2007 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.tar.gz>
2008 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.tar.gz.md5>
2009 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.tar.gz.sha1>
2010 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.tar.gz.asc>

- [nexus-oss-webapp-1.9.2-bundle.zip](#)^{2011 - MD5²⁰¹², SHA1²⁰¹³, ASC²⁰¹⁴}

Nexus OSS 1.9.1.1

2011-04-28

- [nexus-oss-webapp-1.9.1.1-bundle.tar.gz](#)^{2015 - MD5²⁰¹⁶, SHA1²⁰¹⁷, ASC²⁰¹⁸}
- [nexus-oss-webapp-1.9.1.1-bundle.zip](#)^{2019 - MD5²⁰²⁰, SHA1²⁰²¹, ASC²⁰²²}

Nexus OSS 1.9.1

2011-04-13

- [nexus-oss-webapp-1.9.1-bundle.tar.gz](#)^{2023 - MD5²⁰²⁴, SHA1²⁰²⁵, ASC²⁰²⁶}
- [nexus-oss-webapp-1.9.1-bundle.zip](#)^{2027 - MD5²⁰²⁸, SHA1²⁰²⁹, ASC²⁰³⁰}

Nexus OSS 1.9.0.2

2011-03-14

-
- 2011 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.zip>
2012 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.zip.md5>
2013 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.zip.sha1>
2014 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.2-bundle.zip.asc>
2015 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.tar.gz>
2016 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.tar.gz.md5>
2017 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.tar.gz.sha1>
2018 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.tar.gz.asc>
2019 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.zip>
2020 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.zip.md5>
2021 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.zip.sha1>
2022 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1.1-bundle.zip.asc>
2023 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.tar.gz>
2024 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.tar.gz.md5>
2025 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.tar.gz.sha1>
2026 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.tar.gz.asc>
2027 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.zip>
2028 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.zip.md5>
2029 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.zip.sha1>
2030 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.1-bundle.zip.asc>

- [nexus-oss-webapp-1.9.0.2-bundle.tar.gz](#)²⁰³¹ - MD5²⁰³², SHA1²⁰³³, ASC²⁰³⁴
- [nexus-oss-webapp-1.9.0.2-bundle.zip](#)²⁰³⁵ - MD5²⁰³⁶, SHA1²⁰³⁷, ASC²⁰³⁸

Nexus OSS 1.9.0.1

2011-02-25

- [nexus-oss-webapp-1.9.0.1-bundle.tar.gz](#)²⁰³⁹ - MD5²⁰⁴⁰, SHA1²⁰⁴¹, ASC²⁰⁴²
- [nexus-oss-webapp-1.9.0.1-bundle.zip](#)²⁰⁴³ - MD5²⁰⁴⁴, SHA1²⁰⁴⁵, ASC²⁰⁴⁶

Nexus OSS 1.9

2011-02-10

- [nexus-oss-webapp-1.9-bundle.tar.gz](#)²⁰⁴⁷ - MD5²⁰⁴⁸, SHA1²⁰⁴⁹, ASC²⁰⁵⁰
- [nexus-oss-webapp-1.9-bundle.zip](#)²⁰⁵¹ - MD5²⁰⁵², SHA1²⁰⁵³, ASC²⁰⁵⁴

2031 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.tar.gz>
2032 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.tar.gz.md5>
2033 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.tar.gz.sha1>
2034 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.tar.gz.asc>
2035 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.zip>
2036 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.zip.md5>
2037 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.zip.sha1>
2038 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.2-bundle.zip.asc>
2039 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.tar.gz>
2040 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.tar.gz.md5>
2041 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.tar.gz.sha1>
2042 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.tar.gz.asc>
2043 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.zip>
2044 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.zip.md5>
2045 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.zip.sha1>
2046 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9.0.1-bundle.zip.asc>
2047 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.tar.gz>
2048 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.tar.gz.md5>
2049 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.tar.gz.sha1>
2050 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.tar.gz.asc>
2051 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.zip>
2052 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.zip.md5>
2053 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.zip.sha1>
2054 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.9-bundle.zip.asc>

Nexus OSS 1.8.0.1

2010-11-19

- [nexus-oss-webapp-1.8.0.1-bundle.tar.gz](#)²⁰⁵⁵ - MD5²⁰⁵⁶, SHA1²⁰⁵⁷, ASC²⁰⁵⁸
- [nexus-oss-webapp-1.8.0.1-bundle.zip](#)²⁰⁵⁹ - MD5²⁰⁶⁰, SHA1²⁰⁶¹, ASC²⁰⁶²

Nexus OSS 1.7.2

2010-08-16

- [nexus-oss-webapp-1.7.2-bundle.tar.gz](#)²⁰⁶³ - MD5²⁰⁶⁴, SHA1²⁰⁶⁵, ASC²⁰⁶⁶
- [nexus-oss-webapp-1.7.2-bundle.zip](#)²⁰⁶⁷ - MD5²⁰⁶⁸, SHA1²⁰⁶⁹, ASC²⁰⁷⁰

Nexus OSS 1.7.1

2010-07-08

- [nexus-oss-webapp-1.7.1-bundle.tar.gz](#)²⁰⁷¹ - MD5²⁰⁷², SHA1²⁰⁷³, ASC²⁰⁷⁴

2055 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.tar.gz>
2056 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.tar.gz.md5>
2057 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.tar.gz.sha1>
2058 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.tar.gz.asc>
2059 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.zip>
2060 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.zip.md5>
2061 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.zip.sha1>
2062 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.8.0.1-bundle.zip.asc>
2063 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.tar.gz>
2064 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.tar.gz.md5>
2065 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.tar.gz.sha1>
2066 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.tar.gz.asc>
2067 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.zip>
2068 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.zip.md5>
2069 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.zip.sha1>
2070 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.2-bundle.zip.asc>
2071 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.tar.gz>
2072 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.tar.gz.md5>
2073 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.tar.gz.sha1>
2074 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.tar.gz.asc>

- [nexus-oss-webapp-1.7.1-bundle.zip²⁰⁷⁵](#) - MD5²⁰⁷⁶, SHA1²⁰⁷⁷, ASC²⁰⁷⁸

Nexus OSS 1.7.0

2010-06-16

- [nexus-oss-webapp-1.7.0-bundle.tar.gz²⁰⁷⁹](#) - MD5²⁰⁸⁰, SHA1²⁰⁸¹, ASC²⁰⁸²
- [nexus-oss-webapp-1.7.0-bundle.zip²⁰⁸³](#) - MD5²⁰⁸⁴, SHA1²⁰⁸⁵, ASC²⁰⁸⁶

Nexus OSS 1.6.0

2010-04-19

- [nexus-oss-webapp-1.6.0-bundle.tar.gz²⁰⁸⁷](#) - MD5²⁰⁸⁸, SHA1²⁰⁸⁹, ASC²⁰⁹⁰
- [nexus-oss-webapp-1.6.0-bundle.zip²⁰⁹¹](#) - MD5²⁰⁹², SHA1²⁰⁹³, ASC²⁰⁹⁴

Concepts

Using the Nexus Repository Manager as well as the tools for software supply chain automation using the Nexus IQ Server and associated tools of the Nexus platform requires an understanding of a few concepts and terms like *Component*, *Repository*, *Repository Format* and others. This section provides you with all the

2075 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.zip>

2076 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.zip.md5>

2077 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.zip.sha1>

2078 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.1-bundle.zip.asc>

2079 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.tar.gz>

2080 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.tar.gz.md5>

2081 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.tar.gz.sha1>

2082 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.tar.gz.asc>

2083 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.zip>

2084 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.zip.md5>

2085 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.zip.sha1>

2086 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.7.0-bundle.zip.asc>

2087 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.tar.gz>

2088 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.tar.gz.md5>

2089 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.tar.gz.sha1>

2090 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.tar.gz.asc>

2091 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.zip>

2092 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.zip.md5>

2093 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.zip.sha1>

2094 <https://download.sonatype.com/nexus/oss/nexus-oss-webapp-1.6.0-bundle.zip.asc>

necessary background and knowledge as well as an idea of a progression in your usage of the tools from the Nexus platform.

Topics in this section:

- [The Basics - Components, Repositories and Repository Formats](#)(see page 175)
- [An Example - Maven Repository Format](#)(see page 176)
- [Repository Management](#)(see page 180)
- [Software Supply Chain Automation](#)(see page 181)

The Basics - Components, Repositories and Repository Formats

The Nexus platform with Nexus Repository Manager Pro, Nexus Repository Manager OSS and Nexus IQ Server is all about working with components and repositories.

So what are components? A component is a resource like a library or a framework that is used as part of your software application at run-time, integration or unit test execution time or required as part of your build process. It could be an entire application or a static resource like an image.

Typically these components are archives of a large variety of files including:

- Java byte code in class files
- C object files
- text files e.g. properties files, XML files, JavaScript code, HTML, CSS
- binary files such as images, PDF files, sound and music files

The archives are using numerous formats such as:

- Java JAR, WAR, EAR formats
- plain ZIP or .tar.gz files
- Other package formats such as NuGet packages, Ruby gems, NPM packages
- Executable formats such as .exe or .sh files, Android APK files and various installer formats

Components can be composed of multiple, nested components themselves. For example, consider a Java web application packaged as a WAR component. It contains a number of JAR components and a number of JavaScript libraries. All of these are standalone components in other contexts and happen to be included as part of the WAR component.

Components provide all the building blocks and features that allow a development team to create powerful applications by assembling them and adding their own business related components to create a full-fledged, powerful application.

In different tool-chains components are called artifacts, packages, bundles, archives, and other terms. The concept and idea remains the same and component is used as the independent, generic term.

Components in Repositories. A wide variety of components exists and more are continuously created by the open source community as well as proprietary vendors. There are libraries and frameworks written in various languages on different platforms that are used for application development every day. It has become a default pattern to build applications by combining the features of multiple components with your own custom components containing your application code to create an application for a specific domain.

In order to ease the consumption and usage of components, they are aggregated into collections of components. These are called repositories and are typically available on the internet as a service. On different platforms terms such as registry and others are used for the same concept.

Examples for such repositories are:

- the Central Repository, also known as Maven Central
- the NuGet Gallery
- RubyGems.org²⁰⁹⁵
- npmjs.org²⁰⁹⁶

Components in these repositories are accessed by numerous tools including:

- package managers like npm, nuget or gem,
- build tools such as Maven, Gradle, rake and grunt
- IDE's such as Eclipse and IntelliJ

Repositories have Formats. The different repositories use different technologies to store and expose the components in them to client tools. This defines a repository format and as such is closely related to the tools interacting with the repository.

For example, the Maven repository format relies on a specific directory structure defined by the identifiers of the components and a number of XML formatted files for metadata. Component interaction is performed via plain HTTP commands and some additional custom interaction with the XML files.

Other repository formats use databases for storage and REST API interactions, or different directory structures with format specific files for the metadata.

An Example - Maven Repository Format

Maven developers are familiar with the concept of a repository, since repositories are used by default. The primary type of a binary component in a Maven format repository is a JAR file containing Java byte-code. This is due to the Java background of Maven and the fact that the default component type is a JAR. Practically however, there is no limit to what type of component can be stored in a Maven repository. For example, you can easily deploy WAR or EAR files, source archives, Flash libraries and applications, Android archives or applications, or Ruby libraries to a Maven repository.

²⁰⁹⁵ <http://RubyGems.org>

²⁰⁹⁶ <http://npmjs.org>

Every software component is described by an XML document called a Project Object Model (POM). A POM contains information that describes a project and lists a project's dependencies – the binary software components, by which a given component depends upon for successful compilation or execution.

When Maven downloads a component like a dependency or a plugin from a repository, it also downloads that component's POM. Given a component's POM, Maven can then download any other components that are required by that component.

Maven and other tools, such as Ivy or Gradle, which interact with a Maven repository to search for binary software components, model the projects they manage and retrieve software components on-demand from a repository.

The Central Repository. When you download and install Maven without any customization, it retrieves components from the Central Repository. It serves millions of Maven users every single day. It is the default, built-in repository using the Maven repository format and is managed by Sonatype. Statistics about the size of the Central Repository are available at <http://search.maven.org/#stats>.

The Central Repository is the largest repository for Java-based components. It can be easily used from other build tools as well. You can look at the Central Repository as an example of how Maven repositories operate and how they are assembled. Here are some of the properties of release repositories such as the Central Repository:

Component Metadata

All software components added to the Central Repository require proper metadata, including a POM, for each component that describes the component itself and any dependencies that software component might have.

Release Stability

Once published to the Central Repository, a component and the metadata describing that component never change. This property of a release repository like the Central Repository guarantees that projects that depend on releases will be repeatable and stable over time. While new software components are being published every day, once a component is assigned a release number on the Central Repository, there is a strict policy against modifying the contents of a software component after a release.

Component Security

The Central Repository contains cryptographic hashes and PGP signatures that can be used to verify the authenticity and integrity of software components served and supports connections in a secure manner via HTTPS.

Performance

The Central Repository is exposed to the users globally via a high performance content delivery network of servers.

In addition to the Central Repository, there are a number of major organizations, such as Red Hat, Oracle and the Apache Software foundation, which maintain separate, additional repositories. Best practice to facilitate

these available repositories is to install Nexus Repository Manager OSS or Nexus Repository Manager Pro and use it to proxy and cache the contents on your own network.

Component Coordinates and the Repository Format. Component coordinates create a unique identifier for a component. Maven coordinates use the following values: groupId, artifactId, version, and packaging. This set of coordinates is often referred to as a **GAV** coordinate, which is short for **Group, Artifact, Version** coordinate. The GAV coordinate standard is the foundation for Maven's ability to manage dependencies. Four elements of this coordinate system are described below:

groupId

A group identifier groups a set of components into a logical group. Groups are often designed to reflect the organization under which a particular software component is being produced. For example, software components being produced by the Maven project at the Apache Software Foundation are available under the groupId `org.apache.maven`.

artifactId

An artifactId is an identifier for a software component and should be a descriptive name. The combination of groupId and artifactId must be unique for a specific project.

version

The version of a project ideally follows the established convention of semantic versioning. For example, if your simple-library component has a major release version of 1, a minor release version of 2, and point release version of 3, your version would be 1.2.3. Versions can also have alphanumeric qualifiers which are often used to denote release status. An example of such a qualifier would be a version like "1.2.3-BETA" where BETA signals a stage of testing meaningful to consumers of a software component.

packaging

Maven was initially created to handle JAR files, but a Maven repository is completely agnostic about the type of component it is managing. Packaging can be anything that describes any binary software format including zip, nar, war, ear, sar, aar and others.

Tools designed to interact Maven repositories translate component coordinates into a URL which corresponds to a location in a Maven repository. If a tool such as Maven is looking for version 1.2.0 of the commons-lang JAR in the group `org.apache.commons`, this request is translated into:

```
<repoURL>/org/apache/commons/commons-lang/1.2.0/commons-lang-1.2.0.jar
```

Maven also downloads the corresponding POM for commons-lang 1.2.0 from:

```
<repoURL>/org/apache/commons/commons-lang/1.2.0/commons-lang-1.2.0.pom
```

This POM may contain references to other components, which are then retrieved from the same repository using the same URL patterns.

Release and Snapshot Repositories. A Maven repository stores two types of components: releases and snapshots. Release repositories are for stable, static release components. Snapshot repositories are frequently updated repositories that store binary software components from projects under constant development.

While it is possible to create a repository which serves both release and snapshot components, repositories are usually segmented into release or snapshot repositories serving different consumers and maintaining different standards and procedures for deploying components. Much like the difference between a production network and a staging network, a release repository is considered a production network and a snapshot repository is more like a development or a testing network. While there is a higher level of procedure and ceremony associated with deploying to a release repository, snapshot components can be deployed and changed frequently without regard for stability and repeatability concerns.

The two types of components managed by a repository manager are:

Release

A release component is a component which was created by a specific, versioned release. For example, consider the 1.2.0 release of the commons-lang library stored in the Central Repository. This release component commons-lang-1.2.0.jar and the associated POM commons-lang-1.2.0.pom are static objects which will never change in the Central Repository. Released components are considered to be solid, stable, and perpetual in order to guarantee that builds which depend upon them are repeatable over time. The released JAR component is associated with a PGP signature, an MD5 and SHA checksum which can be used to verify both the authenticity and integrity of the binary software component.

Snapshot

Snapshot components are components generated during the development of a software project. A Snapshot component has both a version number, such as 1.3.0 or 1.3, and a timestamp in its name. For example, a snapshot component for commons-lang 1.3.0 might have the name commons-lang-1.3.0-20090314.182342-1.jar. The associated POM, MD5 and SHA hashes would also have similar names. To facilitate collaboration during the development of software components, Maven and other clients that know how to consume snapshot components from a repository also know how to interrogate the metadata associated with a Snapshot component to retrieve the latest version of a Snapshot dependency from a repository.

A project under active development produces snapshot components that change over time. A release is comprised of components which will remain unchanged over time.

Looking at the Maven repository format and associated concepts and ideas allowed you grasp some of the details and intricacies involved with different tools and repository formats, that will help you appreciate the need for repository management.

Repository Management

The proliferation of different repository formats and tools accessing them as well as the emergence of more publicly available repositories has triggered the need to manage access and usage of these repositories and the components they contain.

In addition, hosting your own private repositories for internal components has proven to be a very efficient methodology to exchange components during all phases of the software development life cycle. It is considered a best practice at this stage.

The task of managing all the repositories your development teams interact with can be supported by the use of a dedicated server application – a repository manager. Put simply, a repository manager provides two core features:

- the ability to proxy a remote repository and cache components saving both bandwidth and time required to retrieve a software component from a remote repository repeatedly
- the ability to host a repository providing an organization with a deployment target for internal software components

Just as Source Code Management (SCM) tools are designed to manage source code, repository managers have been designed to manage and track external dependencies and components generated by your build.

Repository managers are an essential part of any enterprise or open-source software development effort and they enable greater collaboration between developers and wider distribution of software by facilitating the exchange and usage of binary components.

Once you start to rely on repositories, you'll realize how easy it is to add a dependency on an open source software library available in a public repository, and you might start to wonder how you can provide a similar level of convenience for your own developers. When you install a repository manager, you are bringing the power of a repository like the Central Repository into your organization. You can use it to proxy the Central Repositories and other repositories, and host your own repositories for internal and external use.

Capabilities of a Repository Manager. In addition to these two core features, a repository manager can support the following use cases:

- allows you to manage binary software components through the software development life-cycle
- search and catalogue software components
- control component releases with rules and add automated notifications
- integrate with external security systems, such as LDAP or Atlassian Crowd
- manage component metadata
- control access to components and repositories
- display component dependencies
- browse component archive contents

Advantages of Using a Repository Manager. Using a repository manager provides a number of benefits including:

- improved software build performance due to faster component download off the local repository manager
- reduced bandwidth usage due to component caching
- higher predictability and scalability due to limited dependency on external repositories
- increased understanding of component usage due to centralized storage of all used components
- simplified developer configuration due to central access configuration to remote repositories and components on the repository manager
- unified method to provide components to consumers reducing complexity overheads
- improved collaboration due the simplified exchange of binary components

Software Supply Chain Automation

Once you adopt a repository manager as a central point of storage and exchange for all component usage, the next step is to expand its use in your efforts to automate and manage the software supply chain throughout your software development life-cycle.

Modern software development practices have shifted dramatically from large efforts of writing new code to the usage of components to assemble applications. This approach limits the amount of code authorship to the business-specific aspects of your software.

A large number of open source components in the form of libraries, reusable widgets or whole applications, application servers and others are now available featuring very high levels of quality and feature sets that could not be implemented as a side effect of your business application development. For example, creating a new web application framework and business workflow system just to create a website with a publishing workflow would be extremely inefficient.

Development starts with the selection of suitable components for your projects based on comprehensive information about the components and their characteristics e.g., in terms of licenses used or known security vulnerabilities available in Nexus Repository Manager Pro. Besides focusing on being a repository manager it includes features, such as the display of security vulnerabilities as well as license analysis results within search results and the Repository Health Check reports for a proxy repository.

Software supply chain automation progresses through your daily development efforts, your continuous integration builds and your release processes all the way to your applications deployed in production environments at your clients or your own infrastructure. Nexus IQ Server provides a number of tools to improve your component usage in your software supply chain allowing you to automate your processes to ensure high quality output, while increasing your development speed towards continuous deployment procedures. These include:

- integration with common development environments like the Eclipse IDE
- plugins for continuous integration servers such as Jenkins, Hudson or Eclipse
- visualizations in quality assurance tools like SonarQube
- command line tools for custom integrations
- notifications to monitor component flows

Nexus IQ Server enables you to ensure the integrity of the modern software supply chain, amplifying the benefits of modern development facilitating component usage, while reducing associated risks.

Installing and Running

 **Available in Nexus Repository OSS and Nexus Repository Pro**

Before installing and running Nexus Repository Manager, please [Download\(see page 125\)](#) the latest version and review the [System Requirements\(see page 118\)](#).

Topics in this section:

- [Downloading\(see page 182\)](#)
- [Installing\(see page 183\)](#)
- [Upgrading\(see page 185\)](#)
- [Running\(see page 185\)](#)
- [Post-Install Checklist\(see page 190\)](#)
- [Configuring Nexus Repository Manager as a Service\(see page 192\)](#)
- [Running Behind a Reverse Proxy\(see page 195\)](#)
- [Installing a Nexus Repository Manager Pro License\(see page 202\)](#)
- [Directories\(see page 204\)](#)
- [Monitoring\(see page 209\)](#)

Downloading

There are two distributions of the Nexus Repository Manager: [Nexus Repository Manager OSS²⁰⁹⁷](#) and [Nexus Repository Manager Pro²⁰⁹⁸](#). Nexus Repository Manager OSS is a fully-featured repository manager which can be freely used, customized, and distributed under the Eclipse Public License (EPL Version 1). Nexus Repository Manager Pro is a distribution with features that are relevant to large enterprises and organizations which require complex procurement and staging workflows in addition to more advanced LDAP integration, Atlassian Crowd support, and other development infrastructure.

²⁰⁹⁷ <https://www.sonatype.com/nexus-repository-oss>

²⁰⁹⁸ <https://www.sonatype.com/nexus-repository-sonatype>

Downloading Nexus Repository Manager OSS

To download the latest Nexus Repository Manager OSS distribution, go to [Sonatype's OSS download page](#)²⁰⁹⁹ and choose the compressed bundle file that suits your need from the *Nexus Repository Manager OSS 2.x* section. A download will begin to the latest version.

Older versions can be found [here](#)(see page 127) if needed.

Downloading Nexus Repository Manager Pro

Nexus Repository Manager Pro can be downloaded as zip or tar.gz archive from the [download page](#)(see page 125).

 Use the [Nexus Repository Manager Pro trial version](#)²¹⁰⁰ for an evaluation.

Installing

The following instructions are for installing Nexus Repository Manager OSS or Nexus Repository Manager Pro as a stand-alone server. Nexus Repository Manager Pro and Nexus Repository Manager OSS are bundled with a Jetty instance that listens to all configured IP addresses on a host (0.0.0.0) and runs on port 8081 by default.

Installing the repository is straightforward. Unpack the web application archive in a directory. If you are installing the repository manager on a local workstation to give it a test run, you can install it in your home directory or wherever you like. Nexus Repository Manager Pro and Nexus Repository Manager OSS do not have any hard coded directories. It will run from any directory. If you downloaded the ZIP use:

```
$ unzip nexus-2.14.5-02-bundle.zip
```

And, if you download the GZip'd TAR archive, run:

```
$ tar xvzf nexus-2.14.5-02-bundle.tar.gz
```

For Nexus Repository Manager Pro the equivalent commands would be:

2099 <https://www.sonatype.com/download-oss-sonatype>

2100 <https://www.sonatype.com/download-nexus-repository-trial>

```
$ unzip nexus-professional-2.14.5-02-bundle.zip  
$ tar xvzf nexus-professional-2.14.5-02-bundle.tar.gz
```

⚠ There are some known incompatibilities with the version of the tar command provided by Solaris and the GZip TAR format. If you are installing Nexus Repository Manager on Solaris, you must use the GNU tar application, or you will end up with corrupted files.

⚠ If you are installing the repository manager on a server, you might want to use a directory other than your home directory. On a Unix machine, this book assumes that it is installed in /usr/local/nexus-2.14.4-03 with a symbolic link /usr/local/nexus to the nexus directory. Using a generic symbolic link nexus to a specific version is a common practice which makes it easier to upgrade when a newer version is made available.

```
$ sudo cp nexus-2.14.4-03-bundle.tar.gz /usr/local  
$ cd /usr/local  
$ sudo tar xvzf nexus-2.14.4-03-bundle.tar.gz  
$ sudo ln -s nexus-2.14.4-03 nexus
```

Although it isn't required to run, you may want to set an environment variable NEXUS_HOME in your environment that points to the installation directory. This documentation may refer to this location as \$NEXUS_HOME.

⚠ On Windows you should install the repository manager outside Program Files to avoid problems with Windows file registry virtualization. If you plan to run the repository manager as a specific user you could install into the AppData\Local directory of that users home directory. Otherwise simply go with e.g., C:\nexus or something similar.

The installation directory nexus-2.14.4-03 or nexus-professional-2.14.4-03 has a sibling directory named sonatype-work. This directory contains all of the repository and configuration data and is stored outside of the installation directory to make it easier to upgrade to a newer version.

By default, this directory is always a sibling to the installation directory. If you installed the repository manager in the /usr/local directory it would also contain a sonatype-work subdirectory with a nested nexus directory containing all of the content and configuration. The location of the sonatype-work directory can be customized by altering the nexus-work property in \$NEXUS_HOME/conf/nexus.properties.

Upgrading

Since the repository manager separates its configuration and data storage from the application, it is easy to upgrade an existing installation.

To upgrade the repository manager, unpack the archive in the directory that contains the existing installation. Once the archive is unpacked, the new application directory should be a sibling to your existing `sonatype-work`/ directory.

If you have defined a symbolic link for the version of the repository manager to use, stop the server and change that to point at the new application directory. When you start the new instance it will read the existing repository configuration from the `sonatype-work` directory. Depending on the version you upgrade from and to, some maintenance tasks like rebuilding the internal indices can be necessary. Please refer to any upgrade notes of the new release for more information. In addition, a review of the release notes can be very useful to get a better understanding of potential additional steps required.

If you are using any additional plugins supplied by Sonatype, the new version you downloaded will contain a newer version of the plugin. Be sure to copy the new version from the `optional-plugins` folder to the `plugin-repository` folder, as documented in [Managing Plugins](#)(see page 493), and restart the repository manager.

Externally supplied plugins are updated by simply replacing the folder with the plugin with the new version.

Upgrading the repository manager works for nearly all update ranges. All 2.x versions can directly upgrade to the latest version. All 1.x version can upgrade to 2.7.x maximum. If you need to upgrade from 1.x to a newer version, you need to perform an intermediate upgrade step to a 2.x version.

 The same upgrade process can be used to change from Nexus Repository Manager OSS to Nexus Repository Manager Pro.

Running

When you start the repository manager, you are starting a web server on the default port `0.0.0.0:8081`. It runs within a servlet container called Eclipse Jetty, and it is started with a native service wrapper called the Tanuki Java Service Wrapper. This service wrapper can be configured to run the repository manager as a Windows service or a Unix daemon. Nexus Repository Manager Pro and Nexus Repository Manager OSS ship with generic startup scripts for Unix-like platforms called `nexus` and for Windows platforms called `nexus.bat` in the `$NEXUS_HOME/bin` folder. To start the repository manager on a Unix-like platform like Linux, MacOSX or Solaris use:

```
cd /usr/local/nexus  
./bin/nexus console
```

Similarly, starting on Windows can be done with the `nexus.bat` file. Starting the repository manager with the `console` command will leave it running in the current shell and display the log output.

On Unix systems, you can start the repository manager detached from the starting shell with the `start` command even when not yet installed as a service.

```
./bin/nexus start
```


When executed you should see a feedback message and then you can follow the startup process viewing the log file `logs/wrapper.log` changes.

```
Starting Nexus Repository Manager...  
Started Nexus Repository Manager.  
$ tail -f logs/wrapper.log
```

At this point, the repository manager will be running and listening on all IP addresses (0.0.0.0) that are configured for the current host on port 8081. To use the user interface, fire up a web browser and type in the URL `http://localhost:8081/nexus`. You should see the user interface as displayed in *Figure 3.5, “Application Window”*.

While we use `localhost` throughout this book, you may need to use the IP Loopback Address of `127.0.0.1`, the IP address or the DNS hostname assigned to the machine running the repository manager.

If using Nexus Repository Manager Pro, you are first presented with a form that allows you to request a trial activation. This page displayed in *Figure 3.1, “Trial Activation Form”* contains a link to the license activation screen in *Figure 3.2, “License Activation”*.

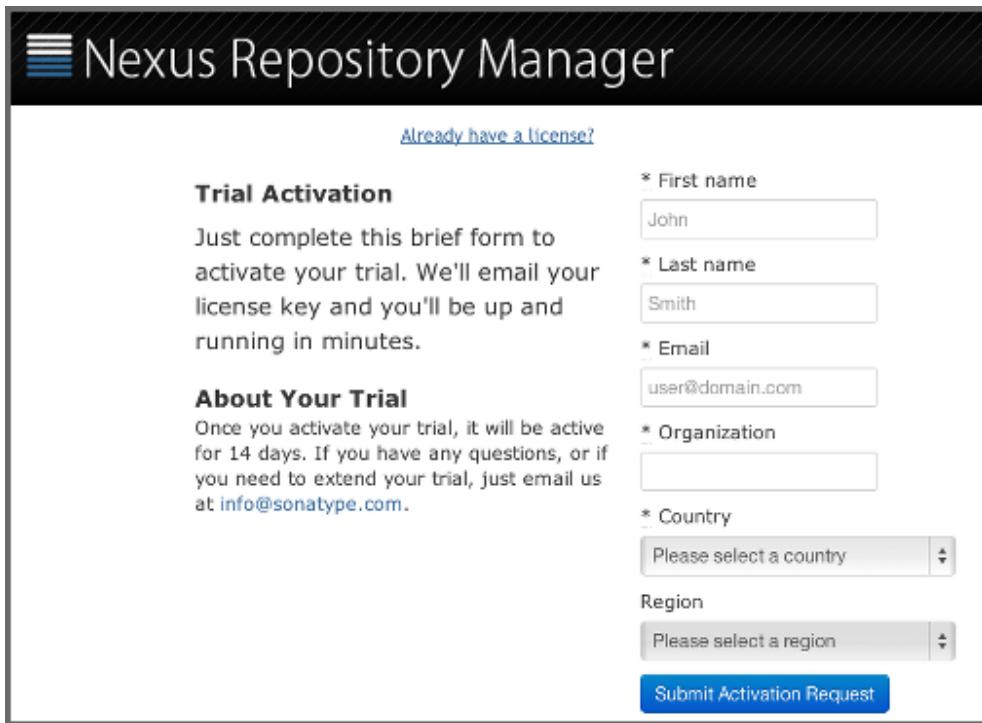


The screenshot shows the 'Trial Activation' form. At the top right is a link 'Already have a license?'. Below it, the section 'Trial Activation' contains the text: 'Just complete this brief form to activate your trial. We'll email your license key and you'll be up and running in minutes.' To the right of this text are several input fields: 'First name' (John), 'Last name' (Smith), 'Email' (user@domain.com), 'Organization' (empty), 'Country' (dropdown menu 'Please select a country'), and 'Region' (dropdown menu 'Please select a region'). At the bottom right is a blue 'Submit Activation Request' button.

Figure 3.1. Trial Activation Form

After submitting the form for your trial activation, you will receive a license key via email that you can use in the license activation screen to activate Nexus Repository Manager Pro.

If you already have a license key or license file, you can use the same screen to upload the file and register your license. Alternatively, you could use the *Already have a license?* link from the page shown in *Figure 3.1, "Trial Activation Form"*.

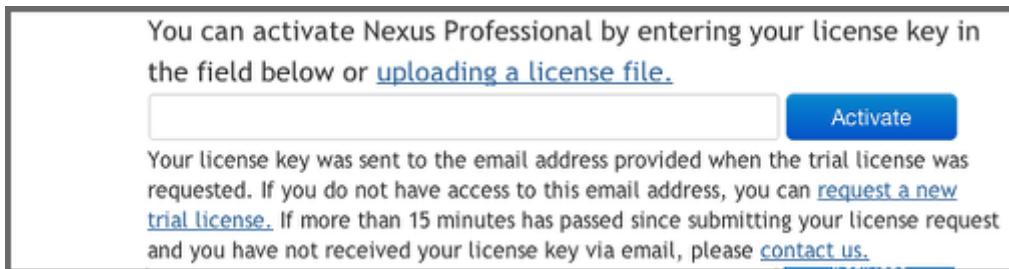

The screenshot shows the 'License Activation' screen. It features a text box containing the instruction: 'You can activate Nexus Professional by entering your license key in the field below or [uploading a license file](#)'. Below this is a large input field for the license key and a blue 'Activate' button. A message at the bottom states: 'Your license key was sent to the email address provided when the trial license was requested. If you do not have access to this email address, you can [request a new trial license](#). If more than 15 minutes has passed since submitting your license request and you have not received your license key via email, please [contact us](#)'.

Figure 3.2. License Activation

Once you have agreed to the End User License Agreement you will be directed to the Nexus Repository Manager Pro Welcome screen displayed in *Figure 3.3, "Nexus Repository Manager Pro Welcome Screen"*.

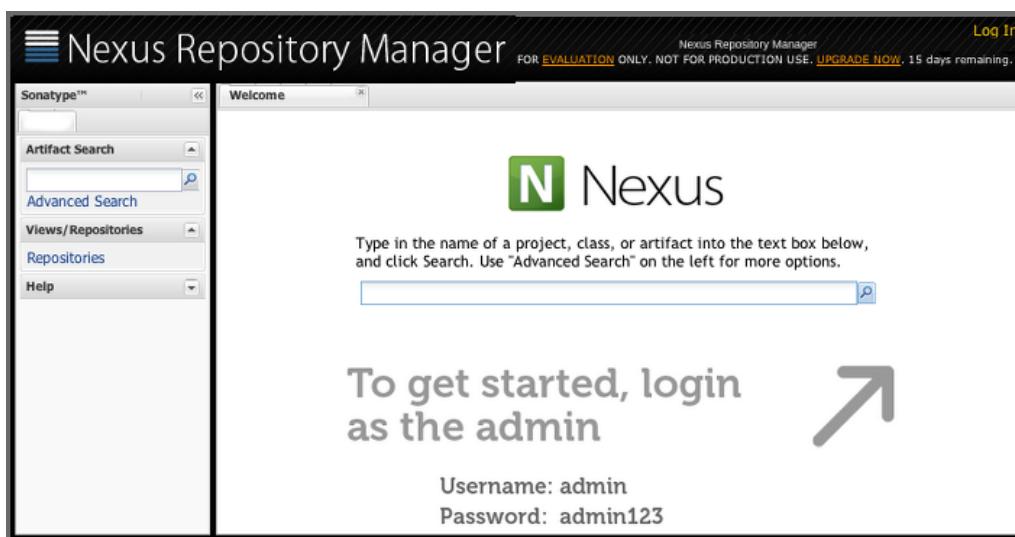


Figure 3.3. Nexus Repository Manager Pro Welcome Screen

Click on the Log In link in the upper right-hand corner of the web page, and you should see the login dialog displayed in *Figure 3.4, “Log In Dialog (default login/password is admin/admin123)”*.

- ⓘ The default administrator username and password combination is admin and admin123 .

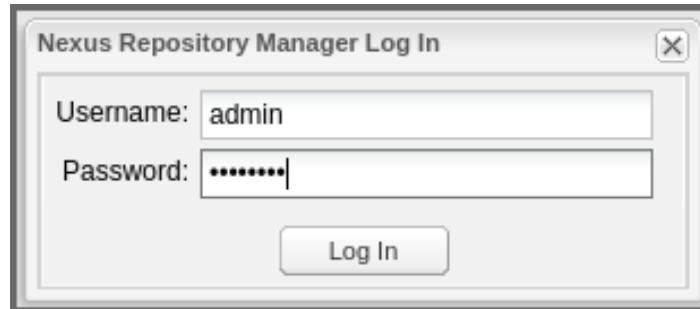


Figure 3.4. Log In Dialog (default login/password is admin/admin123)

When you are logged into your evaluation version of Nexus Repository Manager Pro, you will see some helpful links to the Nexus Repository Manager Pro Evaluation Guide, Sample Projects and the Knowledge base below the search input on the Welcome screen.

With a full license for Nexus Repository Manager Pro these links will be removed and you will get the application window displayed in *Figure 3.5, “Application Window”*.

Nexus Repository Manager OSS will not need to be activated with a license key and will display a number of links to resources and support on the Welcome screen to logged in users.

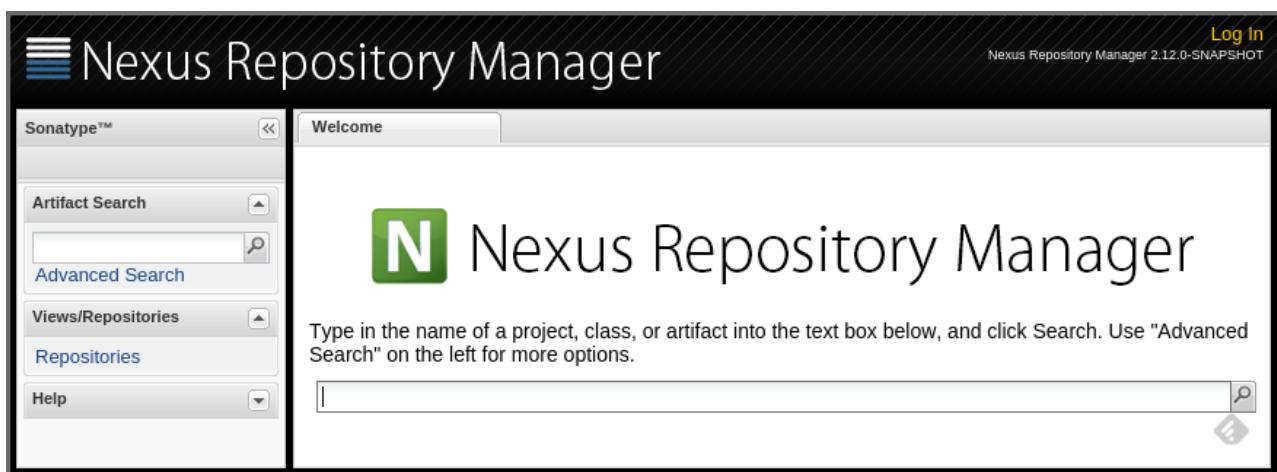


Figure 3.5. Application Window

The files from Java Service Wrapper (JSW) used for the start up process can be found in \$NEXUS_HOME/bin/jsw and are separated into generic files like the wrapper.conf configuration file in conf and a number of libraries in lib. An optional wrapper.conf include allows you to place further configuration optionally in \$NEXUS_HOME/conf/wrapper-override.conf .

The platform-specific directories are available for backwards compatibility with older versions only and should not be used. A full list of directories follows:

```
$ cd /usr/local/nexus/bin/jsw
$ ls -1
conf
lib
license
linux-ppc-64
linux-x86-32
linux-x86-64
macosx-universal-32
macosx-universal-64
solaris-sparc-32
solaris-sparc-64
solaris-x86-32
windows-x86-32
windows-x86-64
```

The wrapper.conf file is the central configuration file for the startup of the Jetty servlet container running the repository manager on a Java virtual machine and therefore includes configuration for things such as the java command to use, Java memory configuration, logging configuration and other settings documented in the configuration file.

Typical modifications include adapting the maximum memory size to your server hardware and usage requirements e.g. 2000 MB up from the default 768 and other JVM related configurations.

```
wrapper.java.maxmemory=2000
```

You can configure JSW to use a specific Java installation and not just the Java command found on the PATH by setting JAVA_HOME in the wrapper.conf file and using it for the startup command.

```
set.JAVA_HOME=/opt/jdk1.8.0_40/  
wrapper.java.command=%JAVA_HOME%/bin/java
```

A typical use case is using a custom installation of the Oracle JDK instead of OpenJDK that is preinstalled as part of the Linux distribution.

Additional configuration in the wrapper.conf file includes activation of further Jetty configuration file for monitoring the repository manager via JMX or using HTTPS.

- ⓘ The startup script nexus supports the common service commands start, stop, restart, status, console and dump.

Post-Install Checklist

Nexus Repository Manager Pro and Nexus Repository Manager OSS ship with some default passwords and settings for repository indexing that need to be changed for your installation to be useful (and secure). After installing and running the repository manager, you need to make sure that you complete the following tasks:

Step 1: Change the Administrative Password and Email Address

The administrative password defaults to *admin123*. The first thing you should do to your new installation is change this password. To change the administrative password, login as admin with the password *admin123*, and click on Change Password under the Security menu in the left-hand side of the browser window. For more detailed instructions, see [Working with Your User Profile](#)(see page 265).

Step 2: Configure the SMTP Settings

The repository manager can send username and password recovery emails. To enable this feature, you will need to configure a SMTP Host and Port as well as any necessary authentication parameters that the repository manager needs to connect to the mail server. To configure the SMTP settings, follow the instructions in [SMTP Settings](#)(see page 267).

Step 3: Configure Default HTTP and HTTPS Proxy Settings

In many deployments the internet, and therefore any remote repositories that the repository manager needs to proxy, can only be reached via a HTTP or HTTPS proxy server internal to the deployment company. In these cases the connection details to that proxy server need to be configured, as documented in [Default HTTP and HTTPS Proxy Settings](#)(see page 271) in order for the repository manager to be able to proxy remote repositories at all.

Step 4: Enable Remote Index Downloads

Nexus Repository Manager Pro and Nexus Repository Manager OSS ship with two important proxy repositories for the Maven Central repository and the Apache Snapshot repository. Each of these repositories contains thousands (or tens of thousands) of components and it would be impractical to download the entire contents of each. To that end, most repositories maintain an index which catalogues the entire contents and provides for fast and efficient searching. The repository manager uses these remote indexes to search for components, but we've disabled the index download as a default setting. To download remote indexes:

1. Click on *Repositories* under the *Views/Repositories* menu in the left-hand side of the browser window.
2. Select each of the proxy repositories and change *Download Remote Indexes* to true in the Configuration tab. You'll need to do this for each of the repositories. For more details on configuration see [the repository section of our documentation](#)(see page 276).

This will trigger the repository manager to re-index these repositories, during which the remote index files will be downloaded. It might take a few minutes to download the entire index but once you have it you'll be able to search the entire contents of the Maven repository.

Once you've enabled remote index downloads, you still will not be able to browse the complete contents of a remote repository. Downloading the remote index allows you to search for components in a repository, but until you download those components from the remote repository they will not show in the repository tree when you are browsing a repository. When browsing a repository, you will only be shown components which have been downloaded from the remote repository.

Step 5: Change the Deployment Password

The deployment user's password defaults to *deployment123*. Change this password to make sure that only authorized developers can deploy components to your installation. To change the deployment password, log in as an administrator. Click on *Security* to expand the security menu. When the menu appears, click on *Users*. A list of users will appear. At that point, right-click on the user named *Deployment* and select *Set Password*.

Step 6: If Necessary, Set the LANG Environment Variable

If your repository manager needs to store configuration and data using an international character set, you should set the LANG environment variable. The Java Runtime will adapt to the value of the LANG environment variable and ensure that configuration data is saved using the appropriate character type. If you are starting the repository manager as a service, place this environment variable in the startup script found in /etc/init.d/nexus.

Step 7: Configure Routes

A route defines patterns used to define and identify the repositories in which the components are searched for. Typically, internal components are not available in the Central Repository or any other external, public repository. A route, as documented in [Managing Routing\(see page 288\)](#), should be configured so that any requests for internal components do not leak to external repositories.

Configuring Nexus Repository Manager as a Service

When installing Nexus Repository Manager Pro or Nexus Repository Manager OSS for production usage you should configure it to run as a service, so it starts back up after server reboots. It is good practice to run that service or daemon as a specific user that has only the required access rights. The following sections provide instructions for configuring the repository manager as a service or daemon on various operating systems.

Running as a Service on Linux

You can configure the repository manager to start automatically by copying the nexus script to the /etc/init.d directory. On a Linux system perform the following operations as the root user:

1. Create a nexus user with sufficient access rights to run the service
2. Copy \$NEXUS_HOME/bin/nexus to /etc/init.d/nexus
3. Make the /etc/init.d/nexus script executable and owned by the root user -

```
chmod 755 /etc/init.d/nexus  
chown root /etc/init.d/nexus
```

4. Edit this script changing the following variables:
 - a. Change NEXUS_HOME to the absolute folder location (e.g., NEXUS_HOME="/usr/local/nexus")
 - b. Set the RUN_AS_USER to nexus or any other user with restricted rights that you want to use to run the service. You should not be running the repository manager as root.
 - c. Change PIDDIR to a directory where this user has read/write permissions. In most Linux distributions, /var/run is only writable by root. The property you need to add to customize

the PID file location is `wrapper.pidfile`. For more information about this property and how it would be configured in `wrapper.conf`, see: <http://wrapper.tanukisoftware.com/doc/english/properties.html>.

5. Change the owner and group of the directories used by the repository manager, including `nexus-work` configured in `nexus.properties` defaulting to `sonatype-work/nexus`, to the `nexus` user that will run the application.
6. If Java is not on the default path for the user running the repository manager, add a `JAVA_HOME` variable which points to your local Java installation and add a `$JAVA_HOME/bin` to the PATH.

 We recommend to avoid running the repository manager as the root user or a similar privileged user, as this practice poses serious security risks to the host operating system unnecessarily. Instead we suggest to follow system administration best practice and use a service specific user with the minimum required access rights only.

Run as a Service on Red Hat, Fedora, and CentOS

This script has the appropriate `chkconfig` directives, so all you need to do is to add the repository manager as a service is run the following commands:

```
$ cd /etc/init.d  
$ chkconfig --add nexus  
$ chkconfig --levels 345 nexus on  
$ service nexus start  
Starting Nexus Repository Manager Pro...  
$ tail -f /usr/local/nexus/logs/wrapper.log
```

The second command adds `nexus` as a service to be started and stopped with the `service` command.

`chkconfig` manages the symbolic links in `/etc/rc[0-6].d` which control the services to be started and stopped when the operating system restarts or transitions between run-levels. The third command adds `nexus` to run-levels 3, 4, and 5. The `service` command starts the repository manager, and the last command tails the `wrapper.log` to verify that it has been started successfully. If the repository manager has started successfully, you should see a message notifying you that it is listening for HTTP.

Runs as a Service on Ubuntu and Debian

The process for setting up the repository manager as a service on Ubuntu differs slightly from the process used on a Red Hat variant. Instead of running `chkconfig`, you should run the following sequence of commands once you've configured the startup script in `/etc/init.d`.

```
$ cd /etc/init.d  
$ update-rc.d nexus defaults  
$ service nexus start  
Starting Nexus Repository Manager Pro...  
$ tail -f /usr/local/nexus/logs/wrapper.log
```

Running as a Service on Mac OS X

The standard way to run a service on Mac OS X is by using launchd, which uses plist files for configuration. An example plist file for the repository manager installed in /opt is shown in this sample com.sonatype.nexus.plist file:

```
<!DOCTYPE plist PUBLIC "-//Apple//DTD PLIST 1.0//EN"  
"http://www.apple.com/DTDs/PropertyList-1.0.dtd">  
<plist version="1.0">  
<dict>  
    <key>Label</key>  
    <string>com.sonatype.nexus</string>  
    <key>ProgramArguments</key>  
    <array>  
        <string>/opt/nexus/bin/nexus</string>  
        <string>start</string>  
    </array>  
    <key>RunAtLoad</key>  
    <true/>  
</dict>  
</plist>
```

After saving the file as com.sonatype.nexus.plist in /Library/LaunchDaemons/ you have to change the ownership and access rights:

```
sudo chown root:wheel /Library/LaunchDaemons/com.sonatype.nexus.plist  
sudo chmod 644 /Library/LaunchDaemons/com.sonatype.nexus.plist
```

- ✓ Consider setting up a different user to run the repository manager and adapt permissions and the RUN_AS_USER setting in the nexus startup script.

With this setup the repository managers, starts as a service at boot time. To manually start it after the configuration you can use:

```
sudo launchctl load /Library/LaunchDaemons/com.sonatype.nexus.plist
```

Running as a Service on Windows

The startup script for the repository manager on Windows platforms is `bin/nexus.bat`. Besides the standard commands for starting and stopping the service, it has the additional commands `install` and `uninstall`. Running these commands with elevated privileges will set up the service for you or remove it as desired. Once installed as a service with the `install` command, the batch file can be used to start and stop the service. In addition, the service will be available in the usual Windows service management console as a service named `nexus`.

Running Behind a Reverse Proxy

Why Use a Reverse Proxy

Nexus Repository Manager is a sophisticated server application with a web-application user interface, answering HTTP requests using the high-performance servlet container [Eclipse Jetty](#)²¹⁰¹. Organizations are sometimes required to run applications like Nexus Repository Manager Pro or Nexus Repository Manager OSS behind a [reverse proxy](#)²¹⁰². Reasoning can include:

- security and auditing concerns
- network administrator familiarity
- organizational policy
- disparate application consolidation
- virtual hosting
- exposing applications on restricted ports
- SSL termination

We provide some general guidance on how to configure common reverse proxy servers to work with Nexus Repository Manager Pro and Nexus Repository Manager OSS. Always consult your reverse proxy administrator to ensure your configuration is secure.

Repository Manager Configuration

There are two main settings within repository manager which can affect how reverse proxies interact with it.

²¹⁰¹ <http://www.eclipse.org/jetty/>

²¹⁰² https://en.wikipedia.org/wiki/Reverse_proxy

Webapp Context Path

The repository manager webapp context path is `/nexus` by default. This means every URL path used to access the repository manager must begin with `/nexus`.

In cases where the repository manager needs to be accessed at a different base path, through your reverse proxy or directly, you must change the default path by editing a property value.

For example, to expose the repository manager in the root context (`/`) instead of `/nexus/`:

1. Edit `$NEXUS_HOME/conf/nexus.properties`. Change `nexus-webapp-context-path=/nexus` to `nexus-webapp-context-path=/`
2. Restart the repository manager and verify that it is available on `http://localhost:8081/` and no longer available at `http://localhost:8081/nexus/`.
3. Emails triggered by your repository manager may include absolute links back to the originating server. As a matter of courtesy, set the *Base URL* as shown in *Figure 6.4, “Administration Application Server Settings”* under *Application Server Settings* to the URL that will be externally available to your users e.g. `http://repo.example.com/`.

Do Not Force Base URL

-  Do not enable the *Figure 6.4, “Administration Application Server Settings”* Force Base URL unless explicitly advised by Sonatype - enabling this will most likely cause your repository manager to not work properly through a reverse proxy.

The *Administration → Server → Application Server Settings* configuration to *Force Base URL* feature. The original use case for forcing base URL is no longer valid.

When enabled, the incoming request host and base path is ignored and the repository manager acts like it is being accessed at the value of base URL.

Example Reverse Proxy Configuration

Reverse Proxy On Restricted Ports

Scenario: You need to expose the repository manager on restricted port 80. The repository manager should not be run with the root user. Instead run your reverse proxy on the restricted port 80 and the repository manager on the default port 8081. End users will access the repository manager using the virtual host URL `http://www.example.com/nexus` instead of `http://localhost:8081/nexus`.

Ensure your external host name (in this example: `www.example.com`) routes to your reverse proxy server.

Apache httpd

```
ProxyRequests Off
ProxyPreserveHost On

<VirtualHost *:80>
    ServerName www.example.com
    ServerAdmin admin@example.com
    ProxyPass /nexus http://localhost:8081/nexus
    ProxyPassReverse /nexus http://localhost:8081/nexus
    ErrorLog logs/www.example.com/nexus/error.log
    CustomLog logs/www.example.com/nexus/access.log common
</VirtualHost>
```

nginx

```
http {

    proxy_send_timeout 120;
    proxy_read_timeout 300;
    proxy_buffering off;
    keepalive_timeout 5 5;
    tcp_nodelay on;

    server {
        listen *:80;
        server_name www.example.com;

        # allow large uploads of files - refer to nginx documentation
        client_max_body_size 1G;

        # optimize downloading files larger than 1G - refer to nginx doc before adjusting
        #proxy_max_temp_file_size 2G;

        location /nexus {
            proxy_pass http://localhost:8081/nexus;
            proxy_set_header Host $host;
            proxy_set_header X-Real-IP $remote_addr;
            proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        }
    }
}
```

Reverse Proxy Virtual Host at Base Path

Scenario: You need to expose the repository manager using a custom host name of `repo.example.com` on a restricted port at a base path of slash (/).

Ensure your external host name (`repo.example.com`) routes to your reverse proxy server and edit the webapp path to be slash (/).

Apache httpd

```
ProxyRequests Off
ProxyPreserveHost On

<VirtualHost *:80>
    ServerName repo.example.com
    ServerAdmin admin@example.com
    ProxyPass / http://localhost:8081/
    ProxyPassReverse / http://localhost:8081/
    ErrorLog logs/repo.example.com/nexus/error.log
    CustomLog logs/repo.example.com/nexus/access.log common
</VirtualHost>
```

nginx

```
http {

    proxy_send_timeout 120;
    proxy_read_timeout 300;
    proxy_buffering off;
    keepalive_timeout 5 5;
    tcp_nodelay on;

    server {
        listen *:80;
        server_name repo.example.com;

        # allow large uploads of files - refer to nginx documentation
        client_max_body_size 1G;

        # optimize downloading files larger than 1G - refer to nginx doc before adjusting
        #proxy_max_temp_file_size 2G;

        location / {
            proxy_pass http://localhost:8081/;
            proxy_set_header Host $host;
            proxy_set_header X-Real-IP $remote_addr;
            proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        }
    }
}
```

Reverse Proxy SSL Termination at Base Path

Scenario: Your organization has standardized on a reverse proxy to handle SSL certificates and termination. The reverse proxy virtual host will accept HTTPS requests on the standard port 443 and serve content from the repository manager running on the default non-restricted HTTP port 8081 transparently to end users.

Ensure your external host name (repo.example.com) routes to your reverse proxy server and edit the webapp path to be slash (/).

To test your configuration, we offer a [quick reference on how to generate self-signed SSL certificates²¹⁰³](#) for reverse proxy servers.

Apache httpd

Ensure Apache httpd is loading mod_ssl and mod_headers.

²¹⁰³ <https://support.sonatype.com/entries/95353268-SSL-Self-Signed-Certificate-Guide>

```
Listen 443

ProxyRequests Off
ProxyPreserveHost On

<VirtualHost *:443>
    SSLEngine on

    SSLCertificateFile "example.pem"
    SSLCertificateKeyFile "example.key"

    ServerName repo.example.com
    ServerAdmin admin@example.com
    ProxyPass / http://localhost:8081/
    ProxyPassReverse / http://localhost:8081/
    RequestHeader set X-Forwarded-Proto "https"

    ErrorLog logs/repo.example.com/nexus/error.log
    CustomLog logs/repo.example.com/nexus/access.log common
</VirtualHost>
```

nginx

Make sure nginx is compiled using the `--with-http_ssl_module` option.

```
http {  
  
    proxy_send_timeout 120;  
    proxy_read_timeout 300;  
    proxy_buffering off;  
    keepalive_timeout 5 5;  
    tcp_nodelay on;  
  
    server {  
        listen *:443;  
        server_name repo.example.com;  
  
        # allow large uploads of files - refer to nginx documentation  
        client_max_body_size 1G;  
  
        # optimize downloading files larger than 1G - refer to nginx doc before adjusting  
        #proxy_max_temp_file_size 2G;  
  
        ssl on;  
        ssl_certificate example.pem;  
        ssl_certificate_key example.key;  
  
        location / {  
            proxy_pass http://localhost:8081/;  
            proxy_set_header Host $host;  
            proxy_set_header X-Real-IP $remote_addr;  
            proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
            proxy_set_header X-Forwarded-Proto "https";  
        }  
    }  
}
```

⚠ Reverse proxy configuration is going to vary and can get complex. Always consult the specific reverse proxy product documentation. [Apache httpd](#)²¹⁰⁴ (`mod_proxy`, `mod_ssl`), [nginx](#)²¹⁰⁵ (`ngx_http_proxy_module`, `ssl compatibility`)

²¹⁰⁴ <http://httpd.apache.org/>

²¹⁰⁵ <https://nginx.org/en/>

Installing a Nexus Repository Manager Pro License

Installing a Nexus Repository Manager Pro License

Available in Nexus Repository Pro only

When starting a Nexus Repository Manager Pro trial installation you can upload your license file as described in [Running \(see page 185\)](#) on the license screen visible in *Figure 3.2, “License Activation”*.

If you are currently using an evaluation license or need to replace your current license with a new one, click on *Licensing* in the *Administration* menu. This will bring up the panel shown in *Figure 3.6, “Nexus Repository Manager Pro Licensing Panel”*. To upload your Nexus Repository Manager Pro license, click on *Browse...*, select the file, and click on *Upload*.

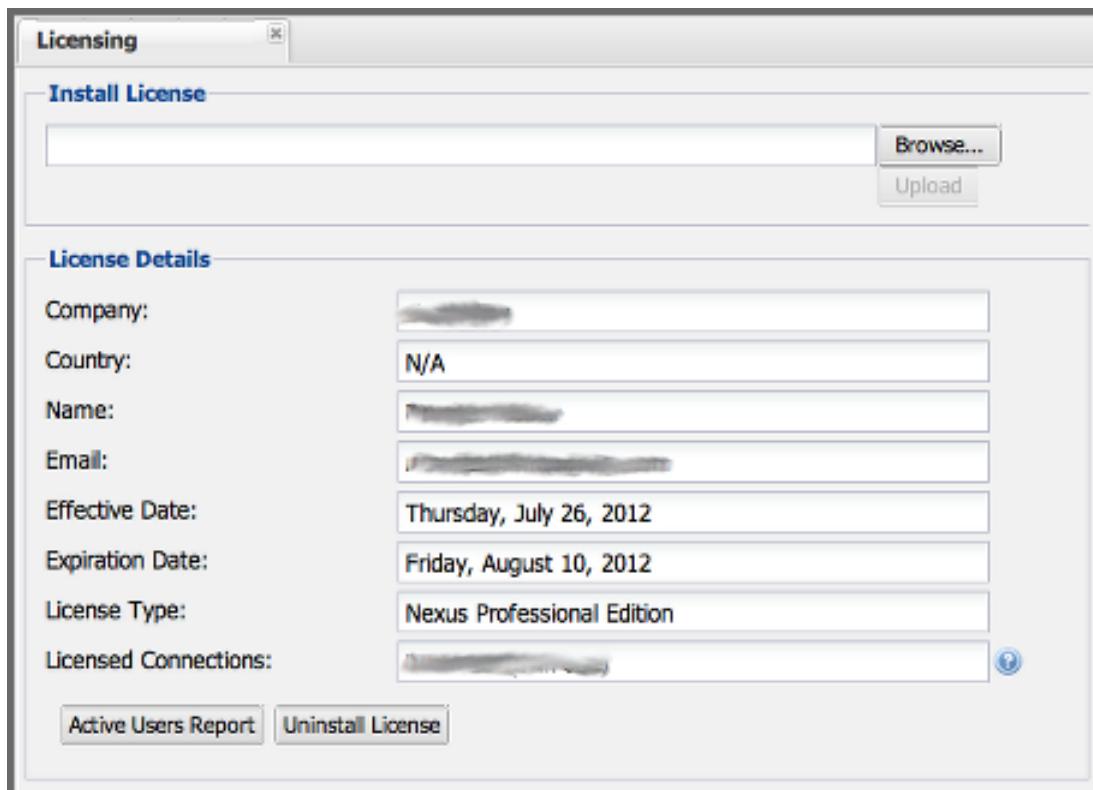


Figure 3.6. Nexus Repository Manager Pro Licensing Panel

Once you have selected a license and uploaded it to the repository manager, Nexus Repository Manager Pro will display a dialog box with the Nexus Repository Manager Pro End User License Agreement as shown in *Figure 3.7, “Nexus Repository Manager Pro End User License Agreement”*. If you agree with the terms and conditions, click on “I Agree”.

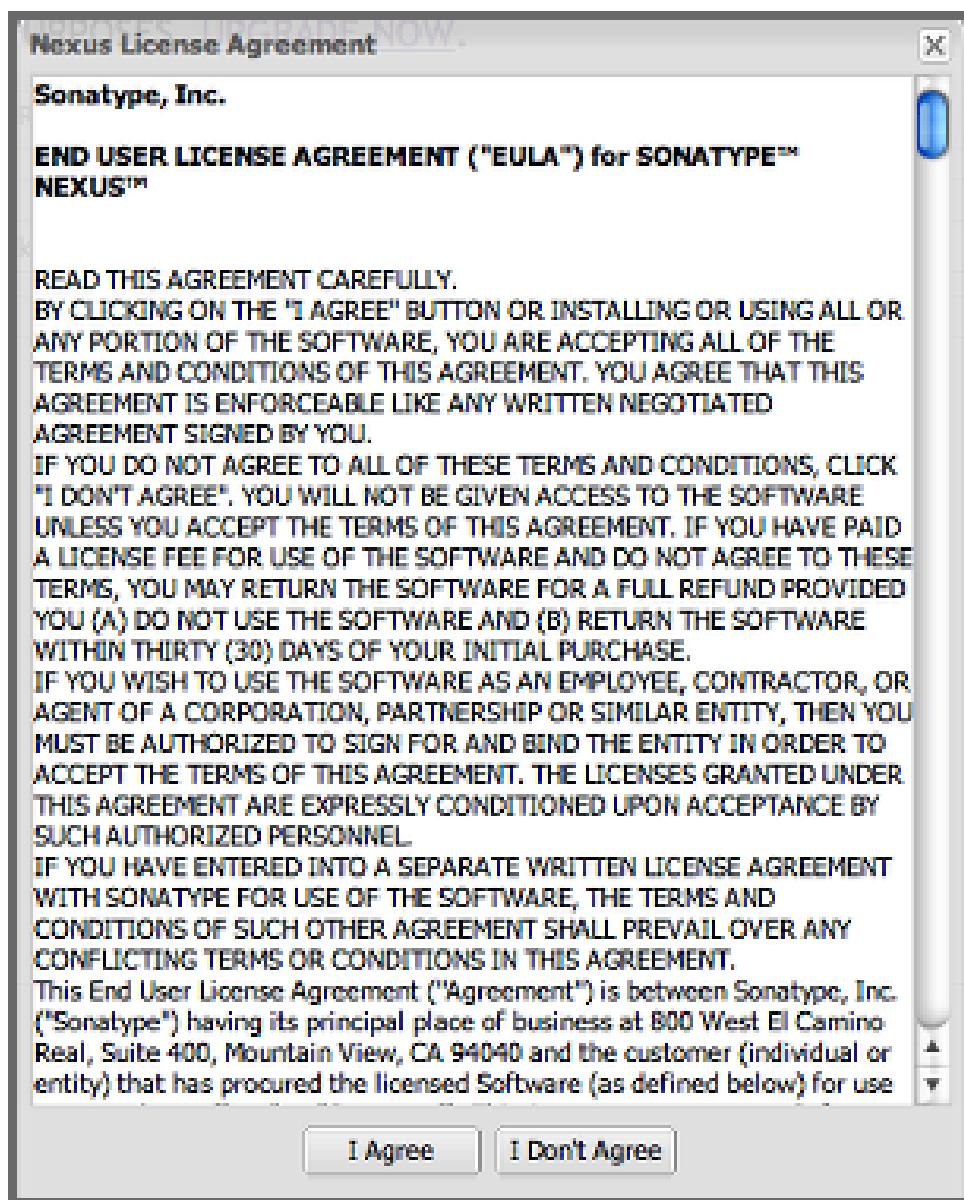


Figure 3.7. Nexus Repository Manager Pro End User License Agreement

Once you have agreed to the terms and conditions contained in the End User License Agreement, Nexus Repository Manager Pro will then display a dialog box confirming the installation of a Nexus Repository Manager Pro license, as shown in *Figure 3.8, "License Upload Finished Dialog"*.

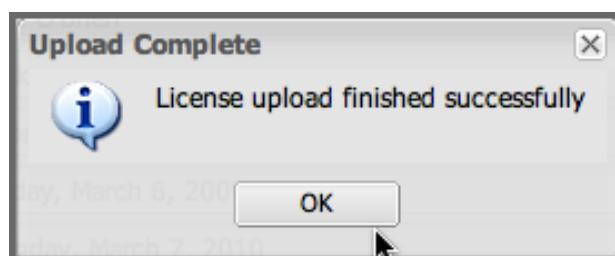


Figure 3.8. License Upload Finished Dialog

If you need to remove your Nexus Repository Manager Pro license, you can click on the “*Uninstall License*” button at the bottom of the Licensing Panel. Clicking on this button will show the dialog in *Figure 3.9, “Uninstall License Confirmation Dialog”*, for confirming that you want to uninstall a license.

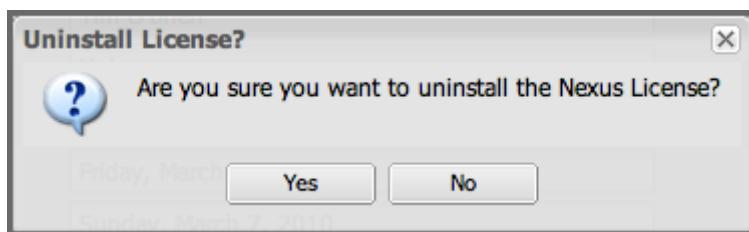


Figure 3.9. Uninstall License Confirmation Dialog

Clicking Yes in this dialog box will uninstall the license from Nexus Repository Manager Pro and display another dialog which confirms that the license has been successfully uninstalled.

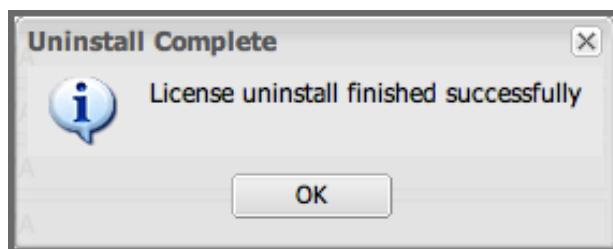


Figure 3.10. License Uninstall Completed Dialog

Clicking on the *Active Users Report* button shows a list of IP numbers that connected to the repository manager in the last 7 days.

License Expiration

When a Nexus Repository Manager Pro license expires, the user interface will have all functionality disabled except for the ability to install a new license file.

Directories

The following sections describe the various directories that are a part of any Nexus Repository Manager Pro and Nexus Repository Manager OSS installation. When you install Nexus Repository Manager OSS or Nexus Repository Manager Pro, you are creating two directories: a directory containing the runtime and application often symlinked as `nexus` and a directory containing your own configuration and data - `sonatype-work/nexus`. When you upgrade to a newer version of Nexus Repository Manager, you replace the application directory and retain all of your own custom configuration and repository data in `sonatype-work/`.

Sonatype Work Directory

The Sonatype Work directory `sonatype-work/nexus/` is created as a sibling to the nexus application directory, and the location of this directory can be configured via the `nexus.properties` file which is described in [Configuration Directory](#)(see page 208).

The Sonatype Work directory `sonatype-work/nexus/` contains a number of subdirectories. Depending on the plugins installed and used, some directories may or may be not present in your installation:

access/

This directory contains a log of all IP addresses accessing the repository manager. The data can be viewed by clicking on *Active Users Report* in the *Administration - Licensing* tab in the user interface.

aether-local-repository/ or maven2-local-repository

This holds temporary files created when running Maven dependency queries in the user interface

backup/

If you have configured a scheduled job to back up configuration, this directory is going to contain a number of ZIP archives that contain snapshots of the configuration. Each ZIP file contains the contents of the `conf/` directory. (Automated backups are a feature of Nexus Repository Manager Pro.)

broker/

The broker directory and its subdirectories contains the storage backend for the Smart Proxy messaging component

conf/

This directory contains the configuration. Settings that define the list of repositories, the logging configuration, the staging and procurement configuration, and the security settings are all captured in this directory.

conf/keystore/

Contains the automatically generated key used to identify this repository manager for Smart Proxy usage

db/

Contains the database storing the User Token information, if that feature is enabled

error-report-bundles/

Used to contain the bundled archives of data assembled for problem reporting. Since this feature has been removed this folder can be safely deleted.

felix-cache/

This directory holds the cache for the OSGi framework Apache Felix, which is used for the repository manager plugin architecture

health-check/

Holds cached reports from the Repository Health Check plugin

indexer/ and indexer-pro/

Contains an index for all repositories and repository groups managed by repository manager. An index is a Lucene index which is the standard for indexing and searching a Maven repository. The repository manager maintains a local index for all repositories, and can also download an index from remote repositories.

logs/

The `nexus.log` file that contains information about a running instance of the repository manager. This directory also contains archived copies of log files. Log files are rotated every day. To reclaim disk space, you can delete old log files from the logs directory.

nuget/

Contains the database supporting queries against NuGet repositories used for .NET package support

p2/

If you are using the P2 repository management features of Nexus Repository Manager Pro, this directory contains a local cache of P2 repository components

plugin-repository/

This directory contains any additionally installed plugins from third parties as documented in [Managing Plugins](#)(see page 493)

proxy/

Stores data about the files contained in a remote repository. Each proxy repository has a subdirectory in the `proxy/attributes/` directory and every file that the repository manager has interacted with in the remote repository has an XML file that captures the last requested time stamp, the remote URL for a particular file, the length of the file, the digests for a particular file, and others. If you need to backup the local cached contents of a proxy repository, you should also back up the contents of the proxy repository's directory under `proxy/attributes/`.

storage/

Stores components and metadata repositories. Each repository is a subdirectory that contains the components in a repository. If the repository is a proxy repository, the storage directory will contain locally cached components from the remote repository. If the repository is a hosted repository, the storage directory will contain all components in the repository. If you need to back-up the contents of a repository, you should back up the contents of the storage directory.

support/

The support zip archive documented in [Support Tools](#)(see page 264) is created and stored in this folder

template-store/

Contains the Maven settings template files documented in detail in [Managing Maven Settings\(see page 429\)](#)

timeline/

Contains an index that the repository manager uses to store events and other information to support internal operations. The user interface exposes this data with the system feeds.

tmp/

Folder used for temporary storage

trash/

If you have configured scheduled jobs to remove snapshot components or to delete other information from repositories, the deleted data will be stored in this directory. To empty this trash folder, view a list of repositories, and then click on the Trash icon in the user interface.

The `conf/` directory contains a number of files which allow for configuration and customization of the repository manager. All of the files contained in this directory are altered by the administrative user interface. While you can change the configuration settings contained in these files with a text editor, Sonatype recommends that you modify the contents of these files using the administrative user interface. Depending on your version of the repository manager and the installed plugins, the complete list of files may differ slightly.

broker.groovy

A groovy script for configuring low-level properties for Smart Proxy

capabilities.xml

Further Smart Proxy backend configuration

healthcheck.properties

Configuration for the Repository Health Check

logback.properties, logback.xml , and logback-*.xml

Contains logging configuration. If you need to customize the detail of log messages, the frequency of log file rotation, or if you want to connect your own custom logging appenders, you should edit the `logback-nexus.xml` configuration file as desired. If you find `log4j.properties` files as well, you can safely remove them since they are remnants from an old version and are not used anymore.

lvo-plugin.xml

Contains configuration for the latest version plugin. This XML file contains the location of the properties file that the repository manager queries to check for a newer version.

nexus.xml

The bulk of the configuration is contained in this file. This file maintains a list of repositories and all server-wide configuration like the SMTP settings, security realms, repository groups, targets, path mappings and others.

pgp.xml

Contains PGP key server configuration

nexus-obr-plugin.properties

Contains configuration for the Nexus OSGi Bundle repository plugin in Nexus Repository Manager Pro

procurement.xml

Contains configuration for the procurement plugin in Nexus Repository Manager Pro

security-configuration.xml

Contains global security configuration

security.xml

Contains security configuration about users and roles

staging.xml

Contains configuration for the Nexus Staging Plugin in Nexus Repository Manager Pro

Configuration Directory

After installing the repository manager and creating the nexus symlink as described earlier, your nexus folder contains a conf directory, different than the one discussed above in sonatype-work. The nexus conf directory contains configuration for the Jetty servlet container. You will only need to modify the files in this directory if you are customizing the configuration of Jetty servlet container or the behavior of the scripts that start the repository manager.

The files and folders contained in this directory are:

nexus.properties

This file contains configuration variables which control the behavior of the repository manager and the Jetty servlet container. If you are customizing the port and host that the repository manager listens to, you change the application-port and application-host properties defined in this file. If you want to customize the location of the sonatype-work directory, you modify the value of the nexus-work property in this configuration file. Changing nexus-webapp-context-path allows you to configure the server context path where repository manager lives.

jetty.xml and jetty-*.xml

Configuration files for the Eclipse Jetty servlet container running the repository manager. Jetty users are used to providing a list of jetty XML config files which are merged to form the final configuration. As

an advanced configuration option, the repository manager supports this merging concept in its launcher code as of version 2.8.

You can specify additional jetty XML configuration files to load to form the final configuration. For the standard distribution bundle, these files can be specified using special properties located in `NEXUS_HOME/bin/jsw/conf/wrapper.conf`.

```
wrapper.app.parameter.1=../conf/jetty.xml  
wrapper.app.parameter.2=../conf/jetty-requestlog.xml  
# add more indexed app parameters...
```

Any of the files located at `NEXUS_HOME/conf/jetty-*.xml` can be specified as part of the `wrapper.app.parameter.n` property, where `n` is the next highest number not already used. The [Java Service Wrapper](#)²¹⁰⁶ documentation contains more information about this property. This setup allows for a simple method to add configuration for https, JMX and others by adjusting a few properties.

- ! Versions of Nexus Repository Manager Pro and Nexus Repository Manager OSS prior to 2.8 loaded all of the Jetty configuration from one `jetty.xml` file, typically found at `NEXUS_HOME/conf/jetty.xml` and required modifications to this file for configuration changes. Examples were available in `NEXUS_HOME/conf/examples`. These files cannot be used in version 2.8 or higher, as they were intended to be standalone files that could not be merged into other files.

Monitoring

Overview

When your repository manager instance is [installed](#)(see page 183) and [running](#)(see page 185), you need to ensure that it stays that way. Typically this is done on a number of levels and each organization and system administration team has its own preferences and tools.

In general you can monitor:

- hardware values like CPU, memory and diskspace utilization
- operating system level values like processes running
- Java Virtual Machine specific values
- application specific value

For the hardware and operating system values, a large number of dedicated tools exist. Many of these tools can be configured to work with application-specific logs and other events. The following section discusses

²¹⁰⁶ <http://wrapper.tanukisoftware.com/doc/english/prop-app-parameter-n.html>

some of the available information in the repository manager. It can potentially be integrated into the usage of the more generic tools for monitoring, log capturing and analysis.

A host of information from the operating system, the Java Virtual Machine and the application itself is available via the Support Tools, which allow you to inspect the value directly in the user interface.

General Logging

The repository manager logs events in the `sonatype-work/nexus/logs/nexus.log` file. In addition a dedicated user interface to configure and inspect the log is available. Further information about this interface can be found in [Logging](#)(see page 0).

Request Access Logging

Logging all access requests to the repository manager allows you to gain a good understanding of the usage in your organization and the sources of these requests.

For example, you will be able to tell if the main load is due to a CI server cluster or from your developers, based on the IP numbers of the requests. You can also see the spread of requests and load across different time zones. Also available for review are the URLs, API calls and features that are used in the repository manager.

Requests access logging is enabled by default in version 2.8 or higher and uses a performant and flexible LogBack implementation with built-in log rotation already configured for 90 days of log file retention. The log is written to the file `sonatype-work/nexus/logs/request.log` and contains all requests and the username for authenticated requests.

The configuration is located in `NEXUS_HOME/conf/logback-access.xml` and can be changed to suit your requirements. If you change the file, a restart of the repository manager is required for these changes to take effect.

If you do not want to run access logging, you can disable it by commenting out the line in `bin/jsw/conf/wrapper.conf`.

```
wrapper.app.parameter.2=conf/jetty-requestlog.xml
```

- ❗ Older versions of Nexus Repository Manager Pro and Nexus Repository Manager OSS require different customization of the Jetty configuration files. Instructions for these customizations can be found on the support site.

Using Java Management Extension (JMX)

JMX is a common tool for managing and monitoring Java applications with client software like the free VisualVM and many others available. It can be performed locally on the server as well as remotely.

The repository manager can be configured to support JMX by adding:

```
wrapper.app.parameter.3=../conf/jetty-jmx.xml
```

to the list of `wrapper.app` parameters in `NEXUS_HOME/bin/jsw/conf/wrapper.conf` and set the parameters `jmx-host` and `jmx-port` in `NEXUS_HOME/conf/nexus.properties`.

```
jmx-host=192.168.10.12  
jmx-port=1099
```

`jmx-host` is the host name, or commonly the IP address, to remotely monitor the application using JMX from another host and `jmx-port` is the network port used for the connection. It is important to ensure that the port is not blocked by any network setup, when connecting remotely. The value of 1099 is the default port used for JMX, but any other available port can be used as well.

 Versions older than 2.8 require different procedures, depending on the specific version.

Once the repository manager is restarted with JMX enabled you can inspect the running JVM in detail. *Figure 3.11, “Overview of Nexus Repository Manager Monitored via JMX in VisualVM”* and *Figure 3.12, “CPU, Memory and Other Visualizations of Nexus Repository Manager Monitored via JMX in VisualVM”* show some example screenshots of VisualVM connected to a repository manager instance running on localhost.

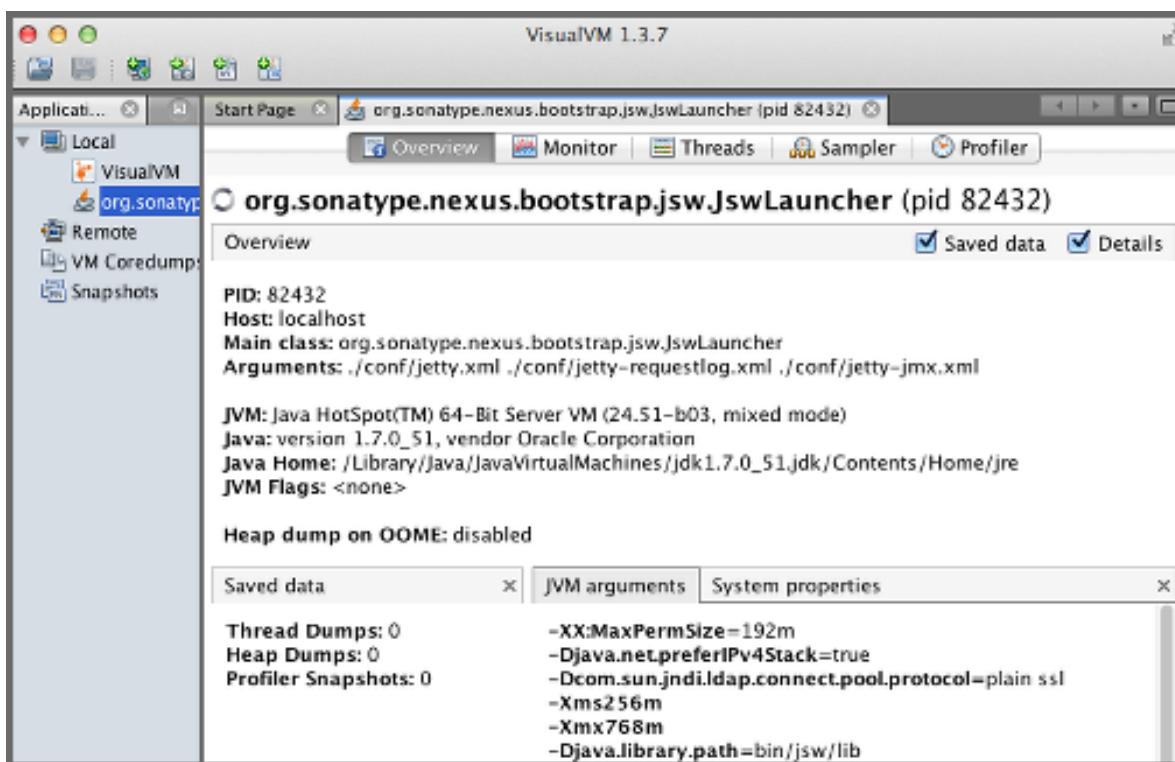


Figure 3.11. Overview of Nexus Repository Manager Monitored via JMX in VisualVM

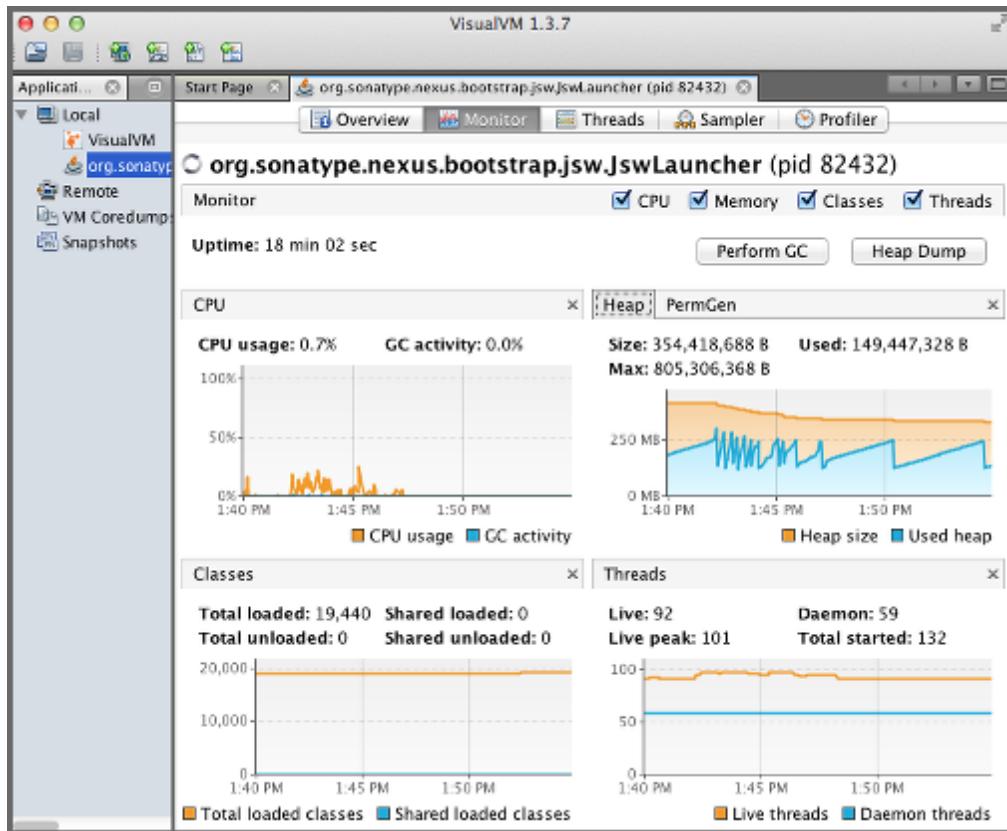


Figure 3.12. CPU, Memory and Other Visualizations of Nexus Repository Manager Monitored via JMX in VisualVM

Depending on the tool used to connect, a number of monitoring, analysis and troubleshooting actions can be performed. Please refer to the documentation about your specific tool for more information.

Analytics


The analytics integration of Nexus Repository Manager allows you to gather a good understanding of your usage, since it enables the collection of event data in the repository manager. It collects non-sensitive information about how you are using the repository manager. It is useful to you from a compatibility perspective, since it gathers answers to questions such as what features are most important, where are users having difficulties, and what integrations/APIs are actively in use.

The collected information is limited to the use of the user interface and the REST API, the primary interaction points between your environment and the repository manager. Only the user interface navigation flows and REST endpoints being called are recorded. None of the request specific data (e.g., credentials or otherwise sensitive information) is ever captured.

You can enable the event logging in the *Settings* section of the *Analytics* tab available via *Analytics* menu item in the *Administration* menu in the left side navigation. Select the checkbox beside *Enable analytics event collection* and press the *Save* button.

You can choose to provide this data automatically to Sonatype by selecting the checkbox beside *Enable automatic analytics event submission*. It enables Sonatype to tailor the ongoing development of the product. Alternatively, you can submit the data manually or just use the gathered data for your own analysis only.

Once enabled all events logged can be inspected in the *Events* tab in the *Analytics* section displayed in *Figure 3.13, "List of Events in the Analytics Tab"*.

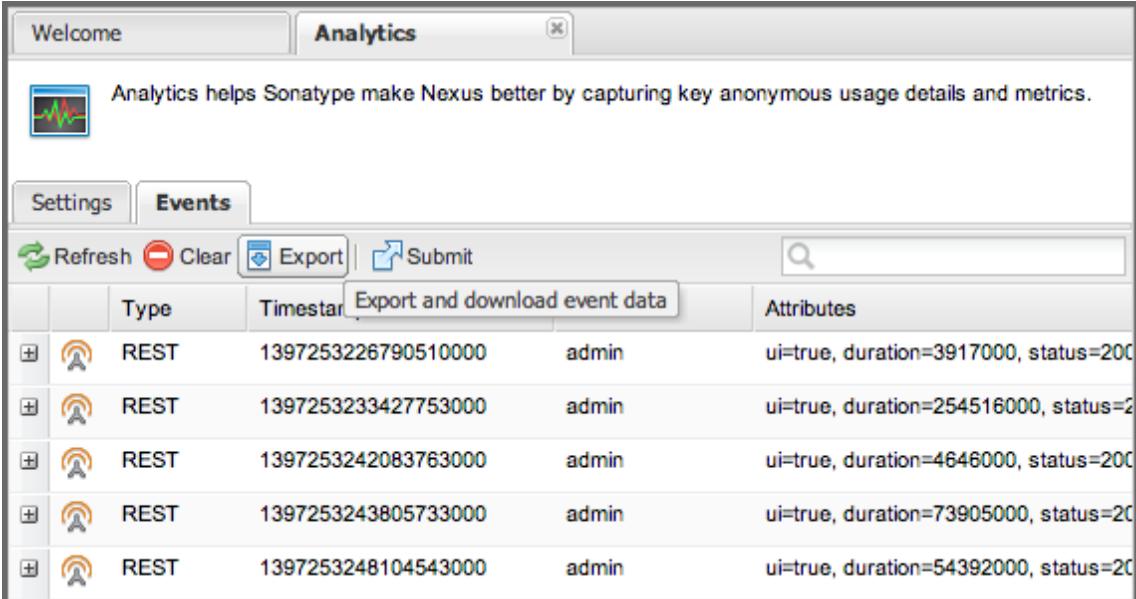

| | Type | Timestamp | Export and download event data | Attributes |
|-----|------|---------------------|--------------------------------|---|
| [+] | REST | 1397253226790510000 | admin | ui=true, duration=3917000, status=200 |
| [+] | REST | 1397253233427753000 | admin | ui=true, duration=254516000, status=200 |
| [+] | REST | 1397253242083763000 | admin | ui=true, duration=4646000, status=200 |
| [+] | REST | 1397253243805733000 | admin | ui=true, duration=73905000, status=200 |
| [+] | REST | 1397253248104543000 | admin | ui=true, duration=54392000, status=200 |

Figure 3.13. List of Events in the Analytics Tab

The list of events shows the *Type* and the *Timestamp* of the event as well as the *User* that triggered it and any *Attributes*. Each row has a **+** symbol in the first column that allows you to expand the row vertically. Each attribute will be expanded into a separate line allowing you to inspect all the information that is potentially submitted to Sonatype. The *User* value is replaced by a salted hash so that no username information is transmitted. The *Anonymization Salt* is automatically randomly generated by the repository manager and can optionally be configured in the *Analytics: Collection* capability manually. This administration area can additionally be used to change the random identifier for the repository manager instance.

-  More information about capabilities can be found in [Accessing and Configuring Capabilities](#)(see page 301).

If you desire to further inspect the data that is potentially submitted, you can select to download the file containing the JSON files in a zip archive by clicking the *Export* button above the events list and downloading the file. The *Submit* button can be used to manually submit the events to Sonatype.

When you select to automatically submit the analytics data, a scheduled task, named *Automatically submit analytics events*, is automatically created. This task is preconfigured to run at 1:00 AM every day. If desired the recurrence can be changed in the scheduled tasks administration area documented in [Managing Scheduled Tasks](#)(see page 293).

⚠ Sonatype values your input greatly and hopes you will activate the analytics feature and the automatic submission to allow us to ensure ongoing development is well aligned with your needs. In addition, we appreciate any further direct contact and feedback in person and look forward to hearing from you.

Maven and Other Build Tools

i Available in Nexus Repository OSS and Nexus Repository Pro

Historically Nexus Repository Manager started as a repository manager supporting the Maven repository format and it continues to include excellent support for users of Apache Maven, Apache Ant/Ivy, Eclipse Aether, Gradle and others.

This section explains the default configuration included in Nexus Repository Manager Pro and Nexus Repository Manager OSS, instructions for creating further Maven repositories as well as searching and browsing the repositories. Build tool configuration for Apache Maven, Apache Ant, Gradle and others tools follow. The configuration examples take advantage of the repository manager merging many repositories and exposing them via a repository group.

Topics in this section:

- [Apache Maven](#)(see page 216)
- [Adding Repositories for Missing Dependencies](#)(see page 217)
- [Adding a New Repository](#)(see page 217)
- [Adding a Repository to a Group](#)(see page 219)
- [Apache Ant and Apache Ivy](#)(see page 221)
- [Apache Ant and Eclipse Aether](#)(see page 222)
- [Gradle](#)(see page 223)
- [Leiningen](#)(see page 225)
- [SBT](#)(see page 227)
- [Jenkins](#)(see page 227)

Apache Maven

To use Nexus Repository Manager Pro and Nexus Repository Manager OSS with Apache Maven, configure Maven to check the repository manager instead of the default, built-in connection to the Central Repository.

To do this, you add a mirror configuration and override the default configuration for the central repository in your `~/.m2/settings.xml` as shown:

Configuring Maven to Use a Single Repository Group

```
<settings>
  <mirrors>
    <mirror>
      <!--This sends everything else to /public -->
      <id>nexus</id>
      <mirrorOf>*</mirrorOf>
      <url>http://localhost:8081/nexus/content/groups/public</url>
    </mirror>
  </mirrors>
  <profiles>
    <profile>
      <id>nexus</id>
      <!--Enable snapshots for the built in central repo to direct -->
      <!--all requests to nexus via the mirror -->
      <repositories>
        <repository>
          <id>central</id>
          <url>http://central</url>
          <releases><enabled>true</enabled></releases>
          <snapshots><enabled>true</enabled></snapshots>
        </repository>
      </repositories>
      <pluginRepositories>
        <pluginRepository>
          <id>central</id>
          <url>http://central</url>
          <releases><enabled>true</enabled></releases>
          <snapshots><enabled>true</enabled></snapshots>
        </pluginRepository>
      </pluginRepositories>
    </profile>
  </profiles>
  <activeProfiles>
    <!--make the profile active all the time -->
    <activeProfile>nexus</activeProfile>
  </activeProfiles>
</settings>
```

In this example, a single profile called `nexus` is defined. It configures a `repository` and a `pluginRepository` with the id `central` that overrides the same repositories in the super pom. The super pom is internal to every Apache Maven install and establishes default values. These overrides are important since they change the

repositories by enabling snapshots and replacing the URL with a bogus URL. This URL is overridden by the `mirror` setting in the same `settings.xml` file to point to the URL of your single repository group. This repository group can, therefore, contain release as well as snapshot components and Maven will pick them up.

The `mirrorOf` pattern of `*` causes any repository request to be redirected to this mirror and to your single repository group, which in the example is the public group.

It is possible to use other patterns in the `mirrorOf` field. A possible valuable setting is to use `external:*`. This matches all repositories except those using `localhost` or file based repositories. This is used in conjunction with a repository manager when you want to exclude redirecting repositories that are defined for integration testing. The integration test runs for Apache Maven itself require this setting.

More documentation about mirror settings can be found in the [mini guide on the Maven web site](#)²¹⁰⁷.

As a last configuration the `nexus` profile is listed as an active profile in the `activeProfiles` element.

Adding Repositories for Missing Dependencies

If you've configured your Maven `settings.xml` or other build tool configuration to use the public repository group as a mirror for all repositories, you might encounter projects that are unable to retrieve components from your local repository manager installation.

This usually happens because you are trying to build a project that has defined a custom set of repositories and snapshot repositories or relies on the content of other publicly available repositories in its configuration. When you encounter such a project all you have to do is add this repository to your repository manager as a new proxy repository and then add the new proxy repository to the public group.

The advantage of this approach is that no configuration change on the build tool side is necessary at all.

Adding a New Repository

To add a repository, log in as an administrator, and click on the `Repositories` link in the left-hand navigation menu in the `Views/Rewpositories` section.

Clicking on this link should bring up a window that lists all the configured repositories as displayed in *Figure 4.1, “Creating a New Proxy Repository”*. You'll then want to create a new proxy repository. To do this, click on the `Add` button that is directly above the list of repositories. From the resultant options, since you are creating a proxy repository, click on `Proxy Repository`.

²¹⁰⁷ <http://maven.apache.org/guides/mini/guide-mirror-settings.html>


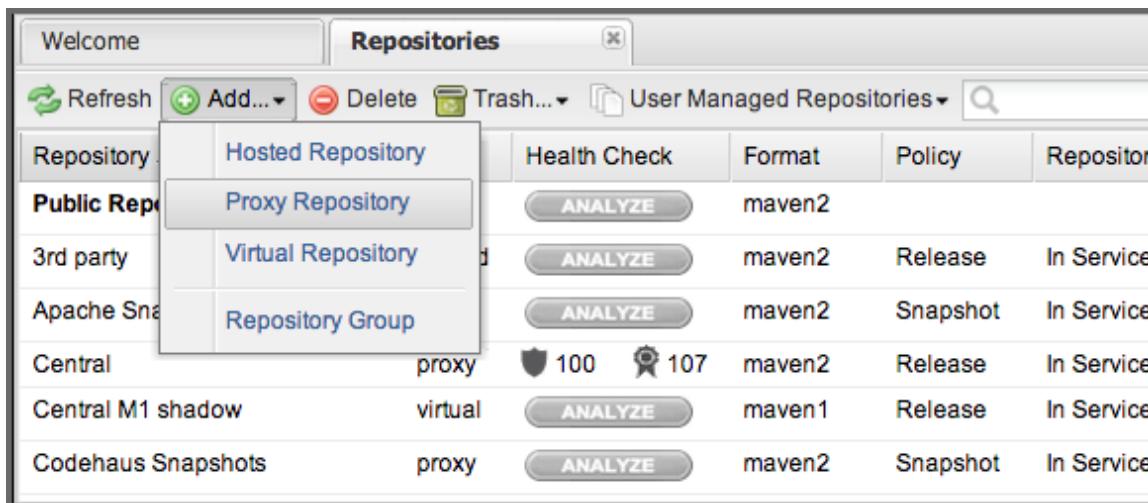


Figure 4.1. Creating a New Proxy Repository

Once you do this, you will see a screen resembling *Figure 4.2, “Configuring a Proxy Repository”*. Populate the required fields *Repository ID* and *Repository Name*. The *Repository ID* will be part of the URL used to access the repository, so it is recommended to avoid characters that could cause problems there or on the filesystem storage. It is best to stick with lowercase alphanumerics. Set the *Repository Policy* to *Release*, and the *Remote Storage Location* to the public URL of the repository you want to proxy.

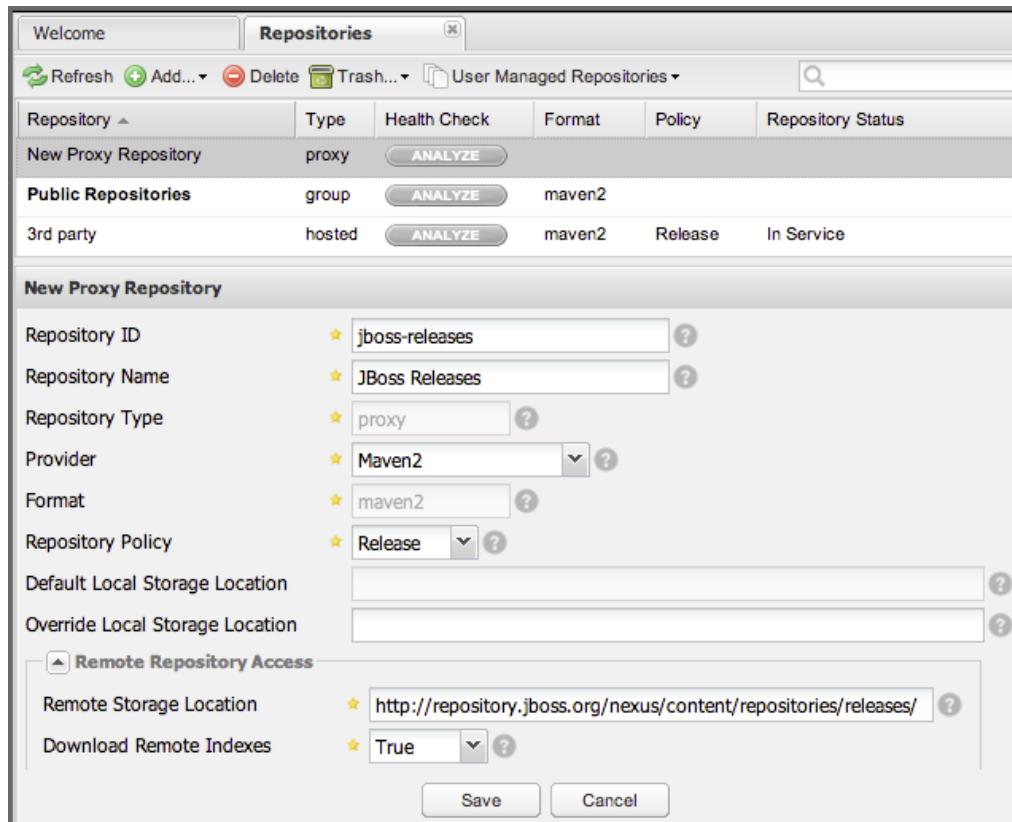

| Repository | Type | Health Check | Format | Policy | Repository Status |
|----------------------|--------|--------------|--------|---------|-------------------|
| New Proxy Repository | proxy | ANALYZE | maven2 | | |
| Public Repositories | group | ANALYZE | maven2 | | |
| 3rd party | hosted | ANALYZE | maven2 | Release | In Service |

New Proxy Repository

| | |
|---------------------------------|--|
| Repository ID | jboss-releases |
| Repository Name | JBoss Releases |
| Repository Type | proxy |
| Provider | Maven2 |
| Format | maven2 |
| Repository Policy | Release |
| Default Local Storage Location | |
| Override Local Storage Location | |
| Remote Repository Access | |
| Remote Storage Location | http://repository.jboss.org/nexus/content/repositories/releases/ |
| Download Remote Indexes | True |

Once you've filled out this screen, click on the Save button. The repository manager is now configured to proxy the repository. If the remote repository contains snapshots as well as release components, you will

need to repeat the process creating a second proxy repository and setting the *Repository Policy* to *Snapshots*.

Adding a Repository to a Group

After [Adding a New Repository](#)(see page 217), you will need to add the new repositories to the Public Repositories repository group. To do this, click on the *Repositories* link in the left-hand main menu in the *Views/Repositories* section. The repository manager lists Groups and Repositories in the same list. Clicking on the *Public Repositories* group, you should see a *Configuration* tab in the lower half of the user interface.

-  If you click on a repository or a group in the *Repositories* list and you do not see the *Configuration* tab, this is because your user account does not have administrative privileges. To perform the configuration tasks outlined in this section, you will need to be logged in as a user with administrative privileges.

Clicking on the *Configuration* tab will bring up a screen which looks like *Figure 4.3, "Adding New Repositories to a Repository Group"*.

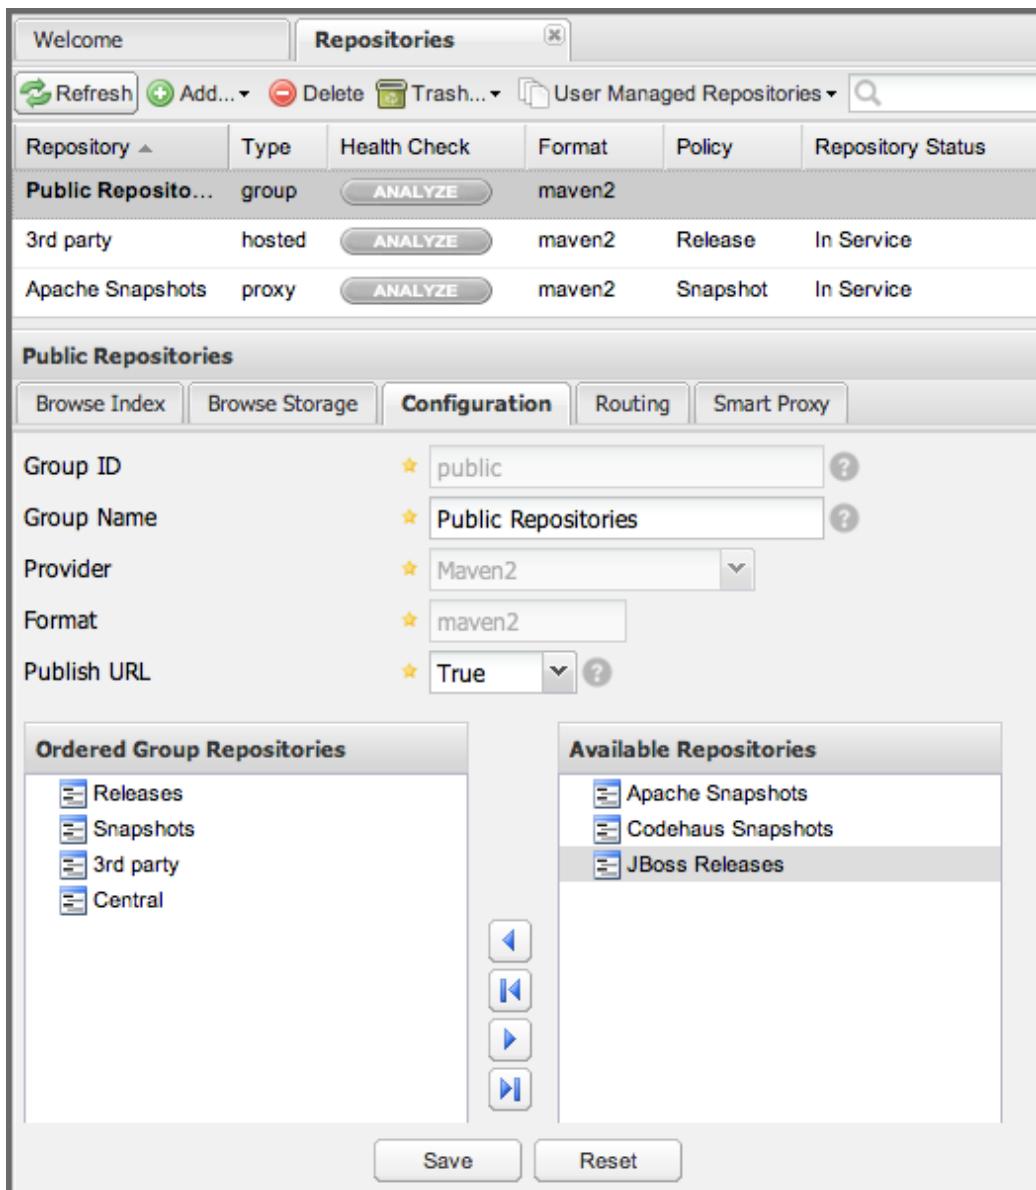


Figure 4.3. Adding New Repositories to a Repository Group

To add the new repository to the public group, find the repository in the *Available Repositories* list on the right, click on the repository you want to add and drag it to the left to the *Ordered Group Repositories* list. Once the repository is in the *Ordered Group Repositories* list you can click and drag the repository within that list to alter the order in which a repository will be searched for a matching component.

⚠ The repository manager user interface makes use of the Javascript widget library [ExtJS](#)²¹⁰⁸. ExtJS provides for a number of UI widgets that allow for rich interaction like the drag-drop UI for adding repositories to a group and reordering the contents of a group.

In the last few sections, you learned how to add a new custom repositories to a build in order to download components that are not available in the Central Repository.

If you were not using a repository manager, you would have added these repositories to the repository element of your project's POM, or you would have asked all of your developers to modify `~/.m2/settings.xml` to reference two new repositories. Instead, you used the repository manager to add the two repositories to the public group. If all of the developers are configured to point to the public repository group, you can freely swap in new repositories without asking your developers to change local configuration, and you've gained a certain amount of control over which repositories are made available to your development team. In addition the performance of the component resolving across multiple repositories will be handled by repository manager and therefore be much faster than client side resolution done by Maven each time.

Apache Ant and Apache Ivy

[Apache Ivy](#)²¹⁰⁹ is a dependency manager often used in Apache Ant builds. It supports the Maven repository format and can be configured to download dependencies that can be declared in the `ivy.xml` file. This configuration can be contained in the `ivysettings.xml`. A minimal example for resolving dependencies from a repository manager running on localhost is shown:

Minimal Apache Ivy Settings

```
<ivysettings>
  <settings defaultResolver="nexus"/>
  <property name="nexus-public"
            value="http://localhost:8081/nexus/content/groups/public"/>
  <resolvers>
    <ibiblio name="nexus" m2compatible="true" root="${nexus-public}"/>
  </resolvers>
</ivysettings>
```

These minimal settings allow the `ivy:retrieve` task to download the declared dependencies.

To deploy build outputs to a repository with the `ivy:publish` task, user credentials and the URL of the target repository have to be added to `ivysettings.xml` and the `makepom` and `publish` tasks have to be configured and invoked.

²¹⁰⁸ <http://extjs.com/>

²¹⁰⁹ <http://ant.apache.org/ivy/>

Full example projects can be found in the `ant-ivy` folder of the [documentation examples project](#)²¹¹⁰. A full build of the `simple-project`, including downloading the declared dependencies and uploading the build output to the repository manager can be invoked with:

```
cd ant-ivy/simple-project  
ant deploy
```

Apache Ant and Eclipse Aether

[Eclipse Aether](#)²¹¹¹ is the dependency management component used in Apache Maven 3+. The project provides Ant tasks that can be configured to download dependencies that can be declared in `pom.xml` file or in the Ant build file directly.

This configuration can be contained in your Ant `build.xml` or a separate file that is imported. A minimal example for resolving dependencies from a repository manager running on localhost is shown:

Minimal Setup for Aether Ant Tasks

```
<project xmlns:aether="antlib:org.eclipse.aether.ant" ....>  
  <taskdef uri="antlib:org.eclipse.aether.ant"  
    resource="org/eclipse/aether/ant/antlib.xml">  
    <classpath>  
      <fileset dir="${aether.basedir}"  
        includes="aether-ant-tasks-*.jar" />  
    </classpath>  
  </taskdef>  
  <aether:mirror id="mirror"  
    url="http://localhost:8081/nexus/content/groups/public/"  
    mirrorOf="*"/>  
  ...  
</project>
```

These minimal settings allow the `aether:resolve` task to download the declared dependencies.

To deploy build outputs to a repository with the `aether:deploy` task, user authentication and details about the target repositories have to be added.

Full example projects can be found in the `ant-aether` folder of the [documentation examples project](#)²¹¹². A full build of the `simple-project`, including downloading the declared dependencies and uploading the build output to the repository manager can be invoked with

²¹¹⁰ <https://github.com/sonatype/nexus-book-examples>

²¹¹¹ <http://www.eclipse.org/aether>

²¹¹² <https://github.com/sonatype/nexus-book-examples>

```
cd ant-aether/simple-project  
ant deploy
```

Gradle

Gradle²¹¹³ has a built in dependency management component that supports the Maven repository format. In order to configure a Gradle project to resolve dependencies declared in build.gradle file, a maven repository as shown in **Minimal Gradle Setup** has to be declared.

Minimal Gradle Setup

```
repositories {  
    maven {  
        url "http://localhost:8081/repository/maven-public/"  
    }  
}
```

These minimal settings allow Gradle to download the declared dependencies.

The above setup is specific to each project. Alternatively an init.gradle file placed e.g., in ~/.gradle can establish the repository as the source for dependencies in all projects. A simple implementation could look like:

```
allprojects {  
    ext.RepoConfigurator = {  
        maven {  
            url = uri('http://localhost:8081/nexus/content/groups/public')  
        }  
        buildscript.repositories RepoConfigurator  
        repositories RepoConfigurator
```

Other setup could be an expansion of the following example allowing file system based repositories:

²¹¹³ <http://www.gradle.org/>

```
/**  
 * init.gradle file for development using the Nexus Repository Manager as proxy repository  
 *  
 * @author Manfred Moser <manfred@simpligility.com>  
 */  
  
apply plugin:NexusRepositoryPlugin  
  
class NexusRepositoryPlugin implements Plugin<Gradle> {  
  
    final static String LOG_PREFIX = "init.gradle/NexusRepositoryPlugin:"  
  
    final Closure NexusConfig = {  
        maven {  
            name = 'standard-nexus'  
            url = 'http://localhost:8081/nexus/content/groups/public'  
        }  
        // if required you can add further repositories or groups here  
        // and they will be left intact if the name starts with standard-  
        // although it is better to just add those repositories in Nexus  
        // and expose them via the public group  
    }  
  
    final Closure RepoHandler = {  
        all { ArtifactRepository repo ->  
            if (repo.name.toString().startsWith("standard-") ) {  
                println "$LOG_PREFIX $repo.name at $repo.url activated as repository."  
            } else {  
                if (repo instanceof MavenArtifactRepository) {  
                    remove repo  
                    println "$LOG_PREFIX $repo.name at $repo.url removed."  
                } else {  
                    println "$LOG_PREFIX $repo.name kept (not a Maven repository)."  
                }  
            }  
        }  
    }  
  
    void apply(Gradle gradle) {  
        // Override all project specified Maven repos with standard  
        // defined in here  
        gradle.allprojects{ project ->  
            println "$LOG_PREFIX Reconfiguring repositories."  
            project.repositories RepoHandler  
            project.buildscript.repositories RepoHandler  
  
            project.repositories NexusConfig  
            project.buildscript.repositories NexusConfig  
        }  
    }  
}
```

Gradle init scripts can be much more powerful and customized and are explained with more examples in the [official Gradle documentation](#)²¹¹⁴.

To deploy build outputs to a repository with the `uploadArchives` task, user authentication can be declared in e.g., `gradle.properties`:

```
nexusUrl=http://localhost:8081/nexus  
nexusUsername=admin  
nexusPassword=admin123
```

and then used in the `uploadArchives` task with a `mavenDeployer` configuration from the Maven plugin:

```
uploadArchives {  
    repositories {  
        mavenDeployer {  
            repository(  
                url: "${nexusUrl}/content/repositories/releases" ) {  
                    authentication(userName: nexusUsername, password: nexusPassword)  
                }  
            snapshotRepository(  
                url: "${nexusUrl}/content/repositories/snapshots" ) {  
                    authentication(userName: nexusUsername, password: nexusPassword)  
                }  
        }  
    }  
}
```

Full example projects can be found in the `gradle` folder of the [documentation book examples](#)²¹¹⁵. A full build of the `simple-project`, including downloading the declared dependencies and uploading the build output to the repository manager can be invoked with

```
cd gradle/simple-project  
gradle upload
```

Leiningen

[Leiningen](#)²¹¹⁶ has a built in dependency management component and defaults to the Maven repository format. As a build tool it is mostly used for projects using the [Clojure](#)²¹¹⁷ language. Many libraries useful for these projects are published to the Clojars repository.

²¹¹⁴ http://gradle.org/docs/current/userguide/init_scripts.html

²¹¹⁵ <https://github.com/sonatype/nexus-book-examples>

²¹¹⁶ <http://leinigen.org/>

²¹¹⁷ <http://clojure.org/>

If you want use Nexus with Leiningen, first create two new *Maven2* proxy repositories in Nexus with the remote URL <http://clojars.org/repo/>. One of these should have the *Release Policy* set to *Release* and the other should have it set to *Snapshot*. Then add both to your *Maven 2* public group.

In order to configure a Leinigen project to resolve dependencies declared in the `project.clj` file, a `mirrors` section overriding the built in `central` and `clojars` repositories as shown in **Minimal Leiningen Configuration** has to be declared.

Minimal Leiningen Configuration

```
:mirrors {  
  "central" {  
    :name "Nexus"  
    :url "http://localhost:8081/nexus/content/groups/public"  
    :repo-manager true  
  }  
  #clojars {  
    :name "Nexus"  
    :url "http://localhost:8081/nexus/content/groups/public"  
    :repo-manager true}  
}
```

These minimal settings allow Leiningen to download the declared dependencies.

To deploy build outputs to a Nexus repository with the `deploy` command, the target repositories have to be add to `project.clj` as `deploy-repositories`. This avoids Leiningen checking for dependencies in these repositories, which is not necessary, since they are already part of the `Nexus` `public` repository group used in `mirrors`.

```
:deploy-repositories [  
  ["snapshots"  
   "http://localhost:8081/nexus/content/repositories/snapshots"]  
  ["releases"  
   "http://localhost:8081/nexus/content/repositories/releases"]  
]
```

User credentials can be declared in `~/.lein/credentials.clj.gpg` or will be prompted for.

Further documentation can be found on the [Leiningen website](http://leinigen.org/)²¹¹⁸.

²¹¹⁸ <http://leinigen.org/>

SBT

sbt²¹¹⁹ has a built in dependency management component and defaults to the Maven repository format. In order to configure a sbt project to resolve dependencies declared in build.sbt file, a resolver, as shown in **SBT Resolvers Configuration** has to be declared.

SBT Resolvers Configuration

```
resolvers += "Nexus" at "http://localhost:8081/nexus/content/groups/public"
```

These minimal settings allow sbt to download the declared dependencies.

To deploy build outputs to a repository with the publish task, user credentials can be declared in the build.sbt file:

```
redentials += Credentials("Sonatype Nexus Repository Manager", "nexus.scala-tools.org", "admin", "admin123")
```

 The credentials string should never change, as third-party clients depend on it

And then used in the publishTo configuration:

```
publishTo <=> version { v: String =>
  val nexus = "http://localhost:8081/nexus/"
  if (v.trim.endsWith("SNAPSHOT"))
    Some("snapshots" at nexus + "content/repositories/snapshots")
  else
    Some("releases" at nexus + "content/repositories/releases")
```

Further documentation can be found in the [sbt documentation on publishing](#)²¹²⁰.

Jenkins

Jenkins²¹²¹ is a powerful and widely used open source continuous integration server providing development teams with a reliable way to monitor changes in source control and trigger a variety of builds.

²¹¹⁹ <http://www.scala-sbt.org/>

²¹²⁰ <http://www.scala-sbt.org/release/docs/Publishing.html>

²¹²¹ <http://jenkins-ci.org/>

Installation

Nexus Repository Manager for Jenkins is distributed as a Hudson plugin package (.hpi file) and is available for [download from Sonatype Support](#)²¹²².

To install Nexus Repository Manager for Jenkins, perform the following steps:

1. Login to Jenkins as an administrator
2. Select Manage Jenkins from the Dashboard's left-navigation menu
3. Select Manage Plugins from the list of configuration options
4. Click the Advanced tab on the Plugin Manager screen
5. In the Upload Plugin section, click Choose File , open the .hpi file, and then click *Upload*



The screenshot shows the 'Upload Plugin' section of the Jenkins Manage Plugins screen. It includes a descriptive text, a file input field with the path 'File: /Choose File/ nexus-jenkins-plugin-1.1.0-05.hpi', and a blue 'Upload' button.

Figure 4.4. Nexus Repository Manager for Jenkins Upload

Global Configuration

Use the following instructions to configure Jenkins to connect to Nexus Repository Manager:

1. Select *Manage Jenkins* from the Dashboard's left-navigation menu
2. Select *Configure System* from the list of configuration options
3. In the Sonatype Nexus section, click the *Add Nexus Repository Manager Server* dropdown menu and then select *Nexus Repository Manager 2.x Server*. Enter the following:
 - a. **Display Name** : Name of the server you want shown when selecting Nexus Repository Manager instances for build jobs.
 - b. **Server ID** : A unique ID used to reference Nexus Repository Manager in Build Pipeline scripts. It should be alphanumeric without spaces.
 - c. **Server URL** : Location of your Nexus Repository Manager server.
 - d. **Credentials** : Select the Add button to enter your Nexus Repository Manager username and password using the Jenkins Provider Credentials: Jenkins modal window. Once added, select your Nexus Repository Manager username and password from the Credentials dropdown list.
4. Click the *Test Connection* button
5. After a successful connection to Nexus Repository Manager, click the *Save* button

²¹²² <http://download.sonatype.com/nexus/ci/latest.hpi>

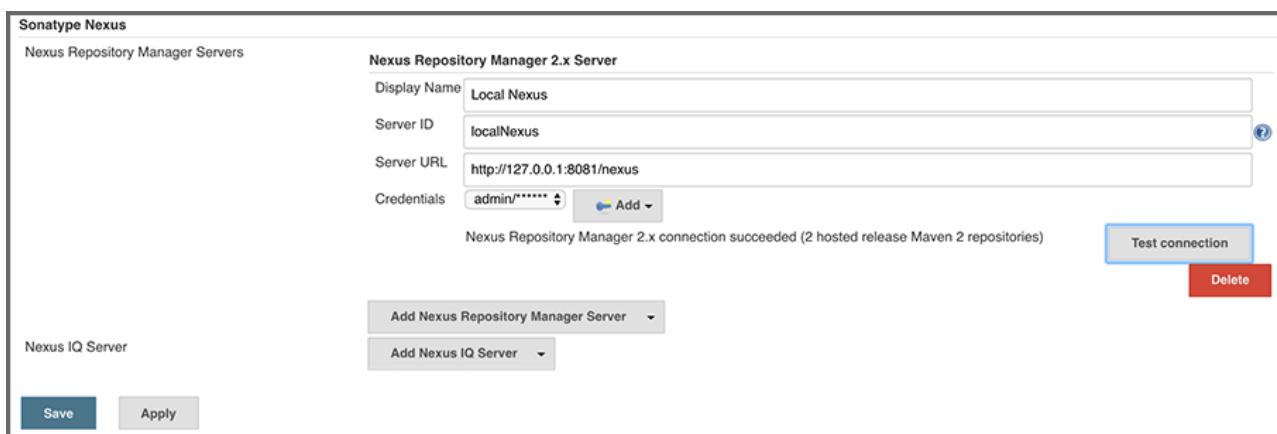


Figure 4.5. Nexus Repository Manager for Jenkins Global Configuration

Tool Configuration (Optional)

⚠ Nexus Repository Manager for Jenkins can upload artifacts to a Maven repository without a Maven installation, however the examples provided in this section use Maven to build in a project. A Maven installation must be configured in Jenkins for these examples to work.

To configure a Maven installation:

1. Select Manage Jenkins from the left-navigation menu
2. Select Global Tool Configuration from the list of configuration options
3. In the Maven section, click the Maven Installations... button
4. Configure a Maven installation. An example configuration is shown in *Figure 4.6, “Nexus Jenkins Tool Configuration”*:



Figure 4.6. Nexus Jenkins Tool Configuration

Job Configuration

After a completed installation and global configuration of Jenkins, you are ready to configure a build-step invocation as part of a specific job.

Freestyle Build Step Configuration

The freestyle build job is a flexible and configurable option, and can be used for any type of project.

1. To start, create a freestyle project by clicking the New Item link on the Jenkins Dashboard. Give the project a name and click OK to continue with the configuration.
2. In the *Build* section of the configuration screen, click the Add Build Step dropdown button and then select *Nexus Repository Manager Publisher*. Enter the following parameters:
 - a. **Nexus Instance:** Select the display name set in global configuration.
 - b. **Nexus Repository:** Select a repository that has release repository policy and allows for artifact uploads.
 - c. **Packages:** Select packages to publish to Nexus Repository Manager during your freestyle build. For this example, use the *Add Package* dropdown to select a *Maven Package*.

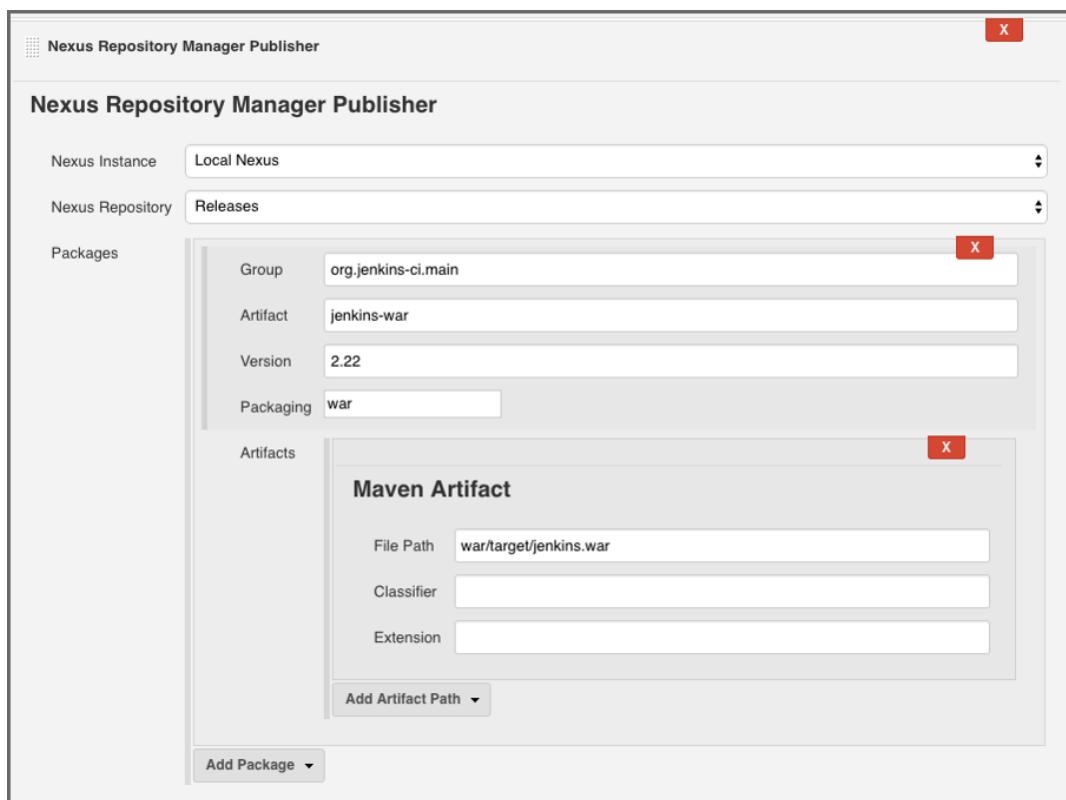


Figure 4.7. Nexus Jenkins Plugin Freestyle Build Configuration

3. Complete your freestyle build as desired and click Save.
4. Launch a build for your project. When the build completes, you will see output similar to *Figure 4.8, “Nexus Jenkins Plugin Freestyle Build Output”*:

```
[INFO] -----
[INFO] Reactor Summary:
[INFO]
[INFO] Jenkins main module ..... SUCCESS [ 2.034 s]
[INFO] Jenkins cli ..... SUCCESS [ 15.133 s]
[INFO] Jenkins core ..... SUCCESS [02:00 min]
[INFO] Jenkins war ..... SUCCESS [01:53 min]
[INFO] Tests for Jenkins core ..... SUCCESS [ 24.860 s]
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 04:37 min
[INFO] Finished at: 2016-09-13T10:05:01-07:00
[INFO] Final Memory: 104M/877M
[INFO] -----
Uploading Maven asset with groupId: org.jenkins-ci.main artifactId: jenkins-war version: 2.22 To repository: releases
Successfully Uploaded Maven Assets
Finished: SUCCESS
```

Figure 4.8. Nexus Jenkins Plugin Freestyle Build Output

In Nexus Repository Manager, any artifact selected in Packages will be available in the selected repository. In *Figure 4.9, “Jenkins war in Release Repo”*, the Jenkins war is now available in the *Releases* repository:

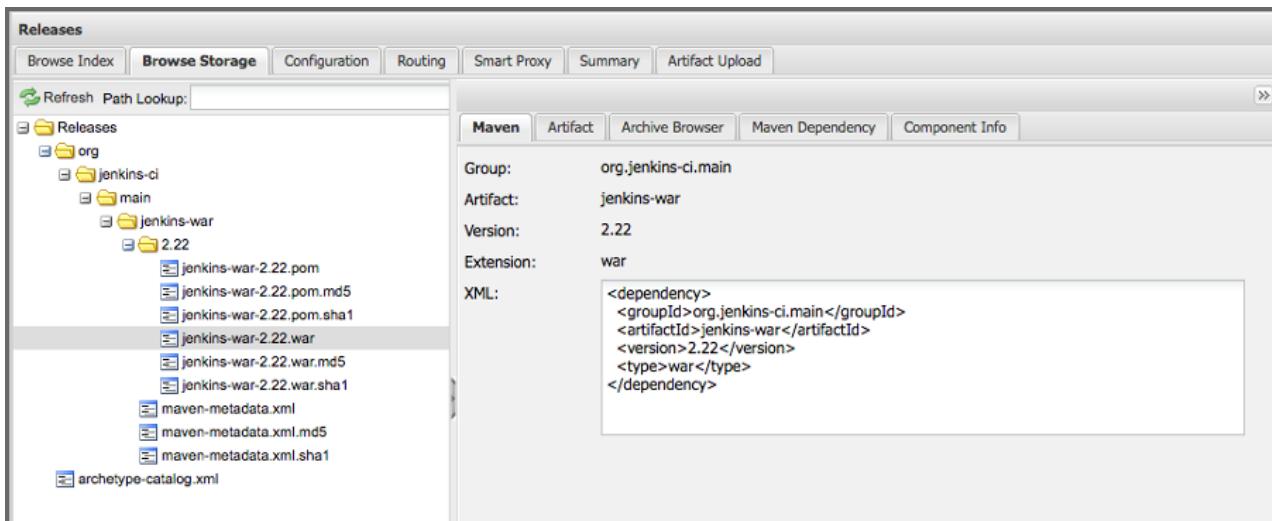


Figure 4.9. Jenkins war in Release Repo

Pipeline Build Step Configuration

⚠ Pipeline jobs allow you to configure the job via a Groovy script. The script is editable in the *Pipeline* section. In this example we will use the sample *Github + Maven* script.

Pipeline builds allow for precise control and configuration over your build process.

1. To start, create a pipeline project by clicking the New Item link on the Jenkins Dashboard. Give the project a name and click OK to continue with the configuration.
2. In the Pipeline section of the configuration screen, click the try sample *Pipeline* dropdown, and then select *Github + Maven*.

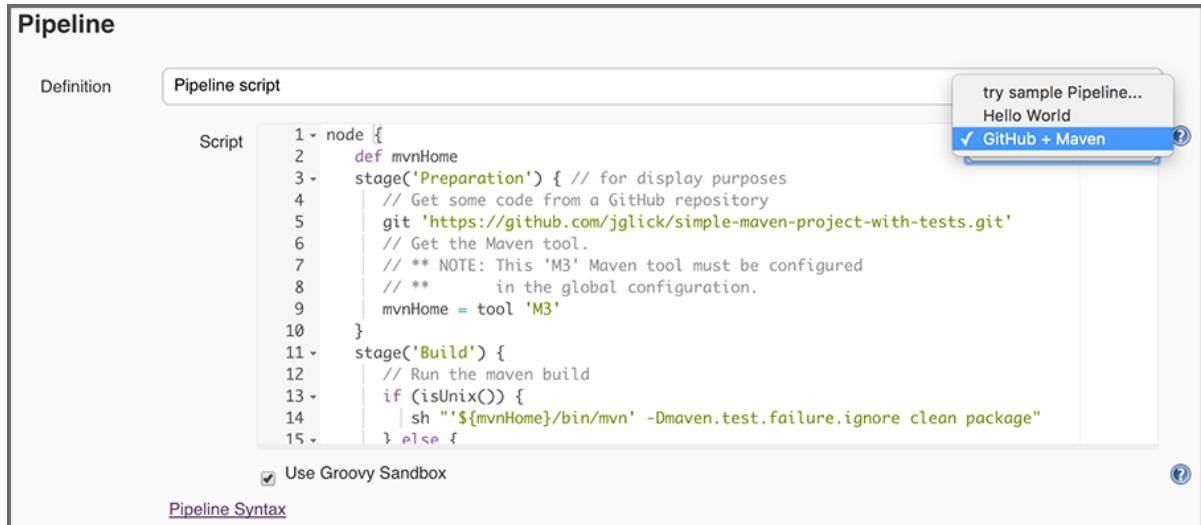


Figure 4.10. Sample Pipeline

3. Below the Results stage, add a new placeholder Nexus Repository Manager Publish stage to the build pipeline script.

```

stage('Publish') {
}

```

i The Nexus Repository Manager Publisher build step should occur after the build so the binaries are available for upload. For best reporting during the build process, the publish step should exist in its own stage below the Results stage.

4. Click the Pipeline Syntax link located below the Script textbox.
5. In the Steps section of the Snippet Generator window, select the following:
 - Sample Step:** Select NexusPublisher: Nexus Repository Manager Publisher .
 - Nexus Instance:** Select the display name set in global configuration .
 - Nexus Repository:** Select a repository that has release repository policy and allows for artifact uploads.'
 - Packages :** Select packages to publish to Nexus Repository Manager during your pipeline build. For this example, use the Add Package dropdown to select a Maven Package.

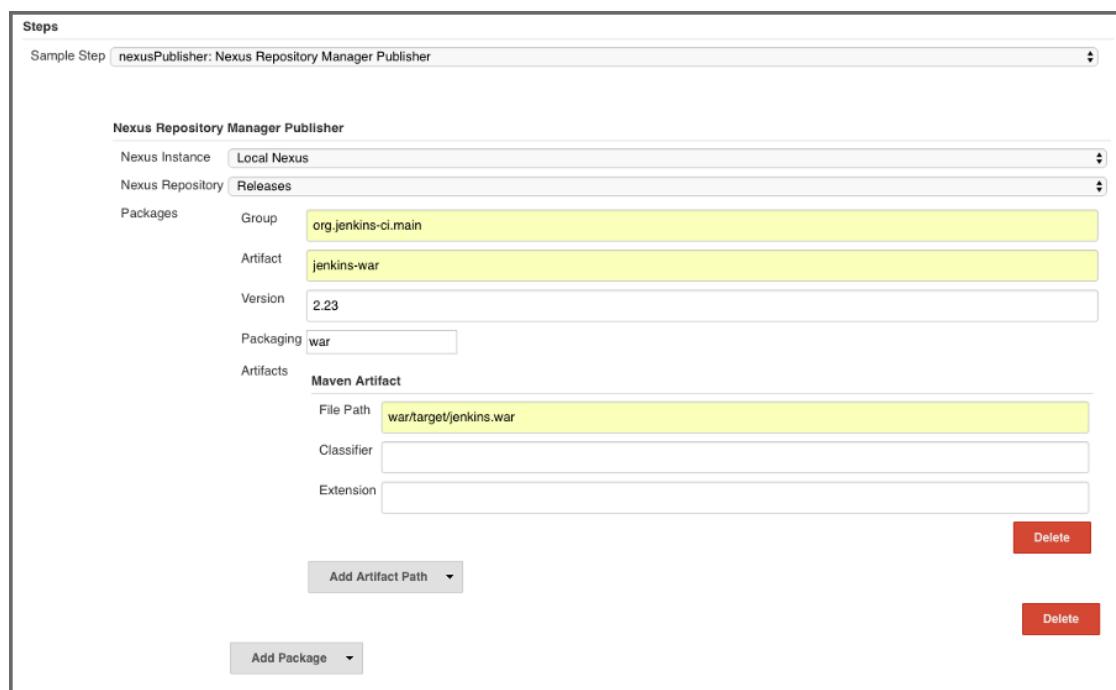


Figure 4.11. Pipeline Sample Script

- Click the Generate Pipeline Script button. An example pipeline script is shown below:

```
nexusPublisher nexusInstanceId: 'localNexus', nexusRepositoryId: 'releases', packages: [[${class: 'MavenPackage', mavenAssetList: [[classifier: '', extension: '', filePath: 'war/target/jenkins.war']], mavenCoordinate: [artifactId: 'jenkins-war', groupId: 'org.jenkins-ci.main', packaging: 'war', version: '2.23']]}}
```

- Copy the generated script and paste it into the previously added publish stage of your pipeline script.
- Complete your pipeline build as desired and click Save.
- Launch a build for your project.

In Nexus Repository Manager, any artifact selected in *Packages* will be available in the selected repository. Same as "Figure 4.9, "Jenkins war in Release Repo" from the [Freestyle Build Step Configuration](#)(see page 230) section, the Jenkins war is now available in the *Releases* repository.

Using the User Interface

 **Available in Nexus Repository OSS and Nexus Repository Pro**

Introduction

Nexus Repository Manager Pro and Nexus Repository Manager OSS provide anonymous access for users who only need to search repositories, browse repositories and peruse the system feeds. This anonymous access level changes the navigation menu and some of the options available when you right-click on a repository. This read-only access displays the user interface shown in *Figure 5.1, “User Interface for Anonymous Users”*.

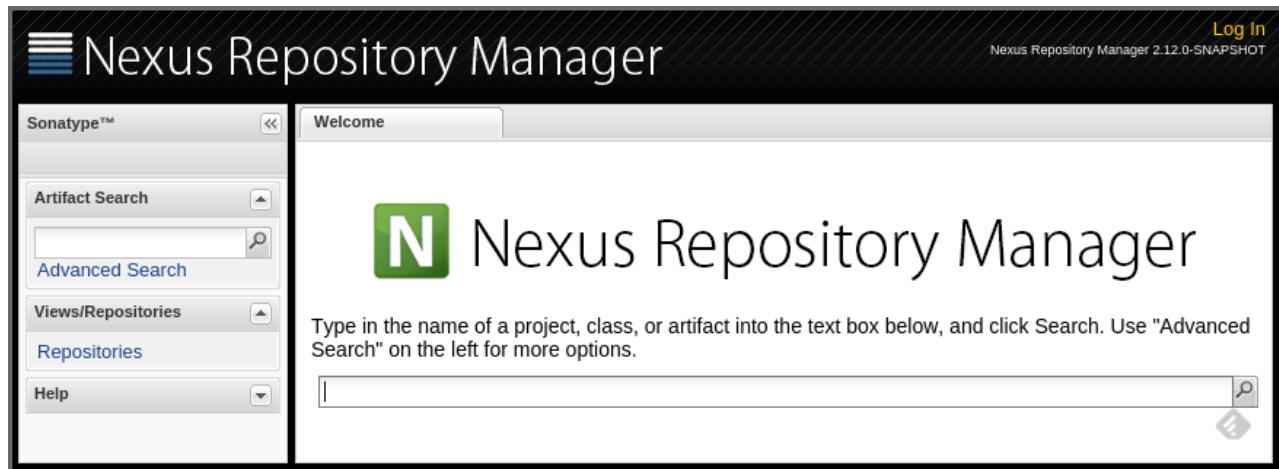


Figure 5.1. User Interface for Anonymous Users

The user interface is used with a web browser and works best with modern browsers. Older versions such as Microsoft Internet Explorer 7 or earlier are not supported and actively blocked from using the user interface to avoid an unsatisfactory user experience. Internet Explorer 8 works up to Nexus Repository Manager 2.8 and is not supported for newer releases.

The user interface is separated into a number of different sections.

Header

The top of the page contains the header and on the right-hand side the *Log In* button, which is replaced with a drop-down to log out, as well as navigate to the users profile, on log in. The header displays the version of Nexus Repository Manager and potentially the availability of a newer version.


Main Menu

The left-hand side of the application features the main menu with a number of submenus. The panel itself can be horizontally collapsed and expanded with the button in the top right-hand corner of the panel. Each submenu can be vertically collapsed and expanded with the button beside the title for each submenu. Depending on the access rights for the current user, different submenus and menu items are displayed.

Main Panel

The main panel of the application to the right of the main menu can host different tabs for different selections on the submenus in the navigation. Each tab can be closed individually and selected as the active tab.

Figure 5.2, “Typical Example User Interface with Repository List and Details” shows a typical user interface appearance with multiple tabs in the main panel. The activated panel *Repositories* shows a list of repositories with the current selection highlighted. The panels underneath the list show details for the selected list item.

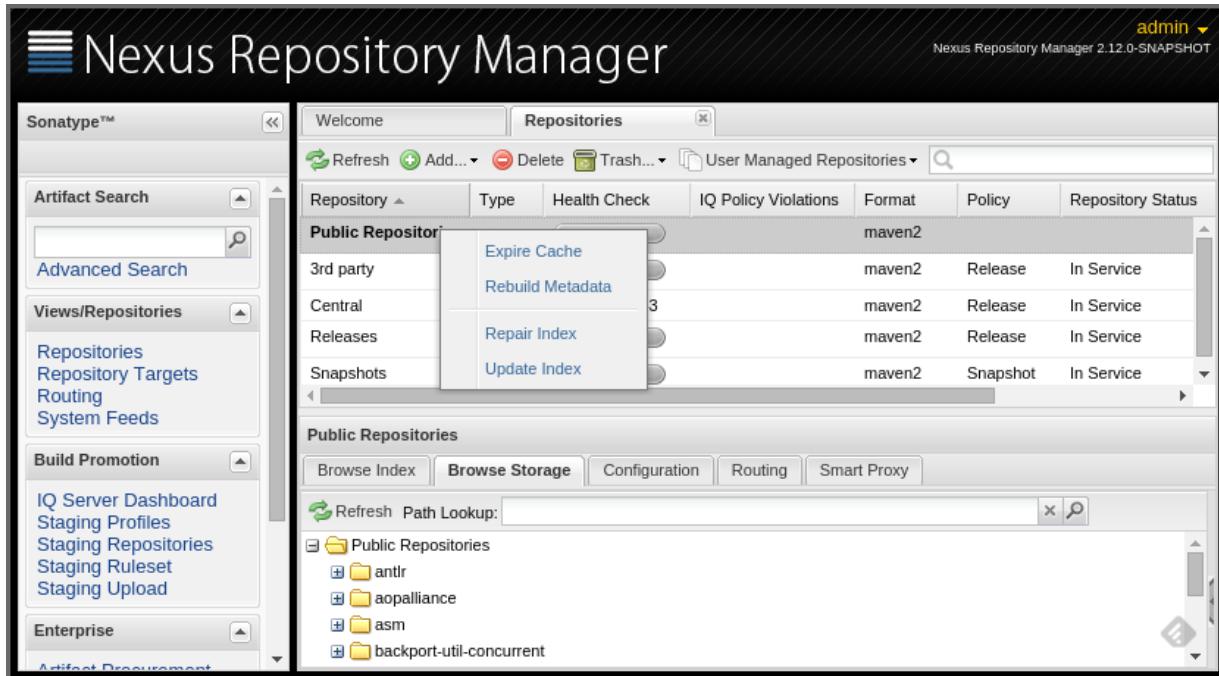


| Repository | Type | Health Check | IQ Policy Violations | Format | Policy | Repository Status |
|------------|------|--------------|----------------------|--------|----------|-------------------|
| 3rd party | | | | maven2 | Release | In Service |
| Central | | | | maven2 | Release | In Service |
| Releases | | | | maven2 | Release | In Service |
| Snapshots | | | | maven2 | Snapshot | In Service |

Figure 5.2. Typical Example User Interface with Repository List and Details

The list header features buttons for various operations as well as an input box that allows you to filter the list by any terms used in any column. *Figure 5.3, “Filtering the Repository List to Display Only Snapshot Repositories”* shows an example use case where a user typed “snap” in the filter box and the list of repositories only shows snapshot repositories. This filtering works for all columns in a list and can be used in most list displays. For example, you can use it to filter the users list to find disabled users, filter the routing list, the roles list and many more.

The column headers in most lists can be clicked to invoke a sorting of the list by the respective column.

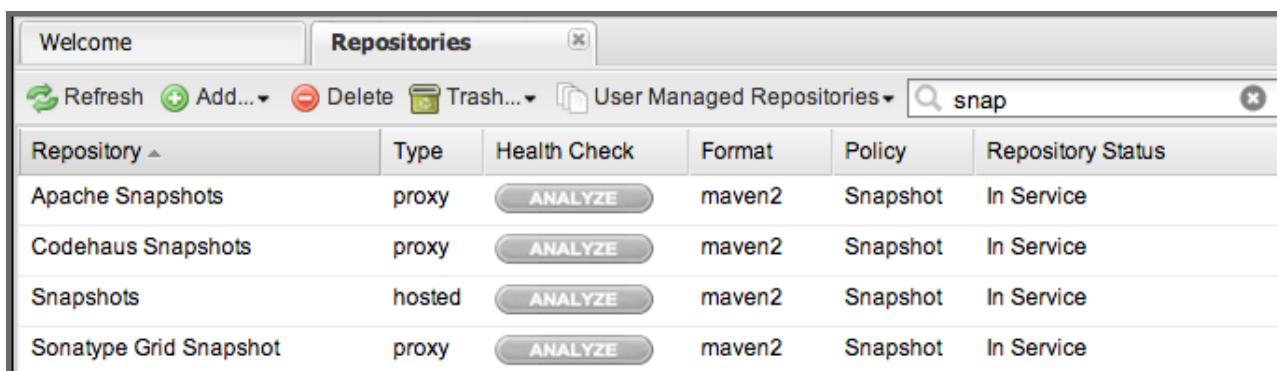

| Repository | Type | Health Check | Format | Policy | Repository Status |
|------------------------|--------|--------------------------|--------|----------|-------------------|
| Apache Snapshots | proxy | <button>ANALYZE</button> | maven2 | Snapshot | In Service |
| Codehaus Snapshots | proxy | <button>ANALYZE</button> | maven2 | Snapshot | In Service |
| Snapshots | hosted | <button>ANALYZE</button> | maven2 | Snapshot | In Service |
| Sonatype Grid Snapshot | proxy | <button>ANALYZE</button> | maven2 | Snapshot | In Service |

Figure 5.3. Filtering the Repository List to Display Only Snapshot Repositories

- ⓘ A right mouse button click on list items exposes a context sensitive menu of operations in some lists.

Topics in this section:

- [Browsing Repositories](#)(see page 236)
- [Viewing the Artifact Information](#)(see page 239)
- [Viewing Maven Information](#)(see page 239)
- [View and Editing Artifact Metadata](#)(see page 240)
- [Using the Archive Browser](#)(see page 243)
- [Inspecting the Component Dependencies](#)(see page 244)
- [Viewing Component Security and License Information](#)(see page 245)
- [Browsing Groups](#)(see page 249)
- [Searching for Components](#)(see page 251)
- [Uploading Components](#)(see page 261)
- [Browsing System Feeds](#)(see page 262)
- [Support Tools](#)(see page 264)

Browsing Repositories

One of the most straightforward uses of the repository manager is to browse the structure of a repository. If you click on the *Repositories* menu item in the *Views/Repositories* menu, you should see the following display. The top half of *Figure 5.4, “Browsing a Repository Storage”* shows you a list of groups and repositories along with the type of the repository and the repository status. To browse the components that are stored in a local repository manager, click on the *Browse Storage* tab for a repository as shown in *Figure 5.4, “Browsing a Repository Storage”*.


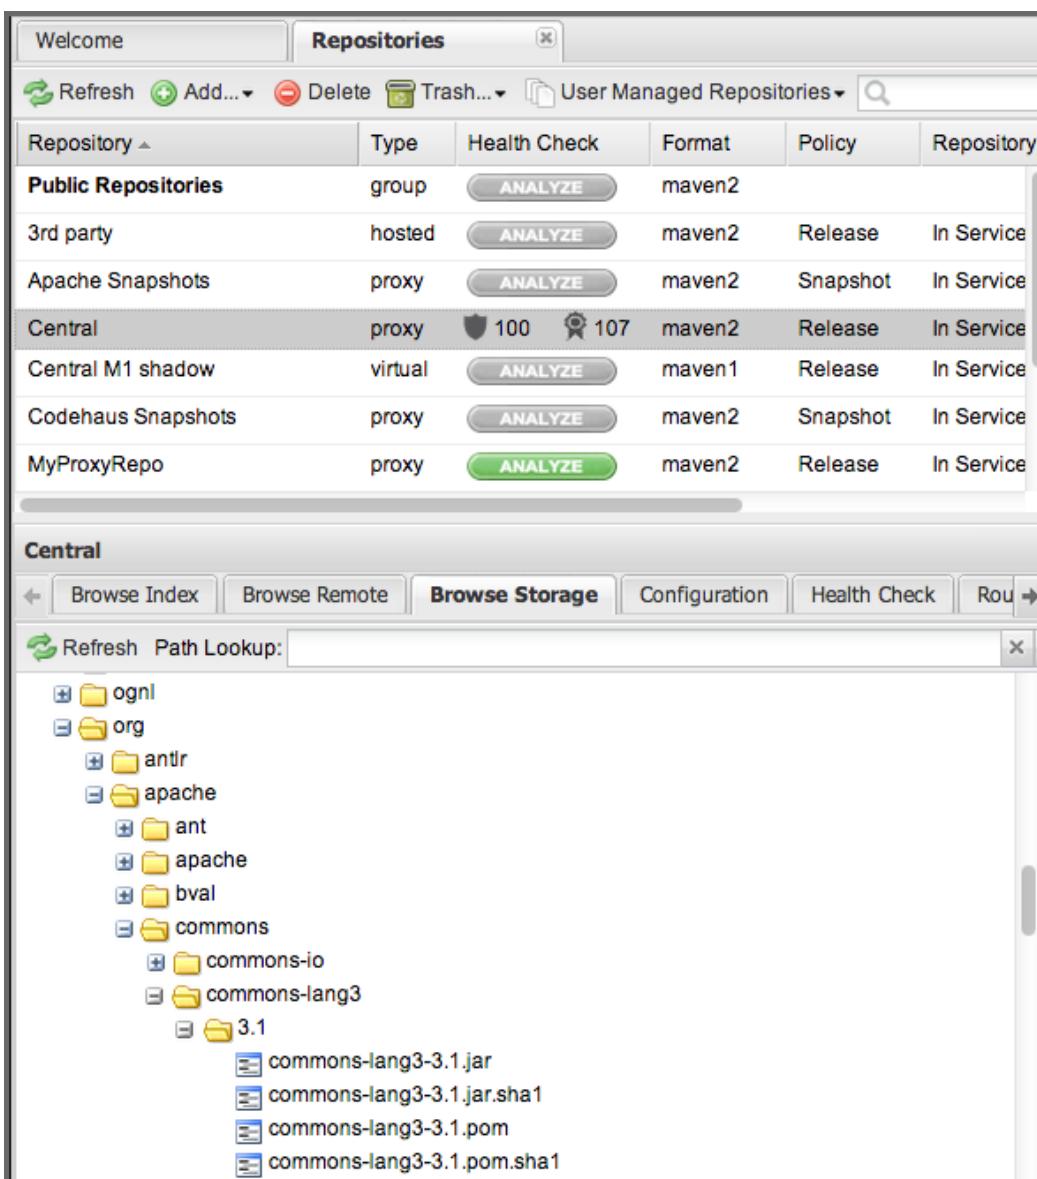


Figure 5.4. Browsing a Repository Storage

When you are browsing a repository, you can right-click on any file and download it directly to your browser. This allows you to retrieve specific components manually or examine a POM file in the browser. In addition, components as well as directories can be deleted using right-click.

⚠ When browsing a remote repository you might notice that the tree doesn't contain all of the components in a repository. When you browse a proxy repository, the repository manager is displaying the components that have been cached locally from the remote repository. If you don't see a component you expected to see in the repository manager, it only means that it has yet to cache the component locally. If you have enabled remote repository index downloads, it will return search results that may include components not yet downloaded from the remote repository. *Figure 5.4, "Browsing a Repository Storage",* is just an example, and you may or may not have the example component available in your repository manager.

A proxy repository acts as a local cache for a remote repository, in addition to downloading and caching components locally, the repository manager will also download an index of all the components stored in a particular repository. When searching or browsing for components, it is often more useful to search and browse the repository index. To view the repository index, click on the *Browse Index* tab for a particular repository to load the interface shown in *Figure 5.5, "Browsing a Repository Index"*.

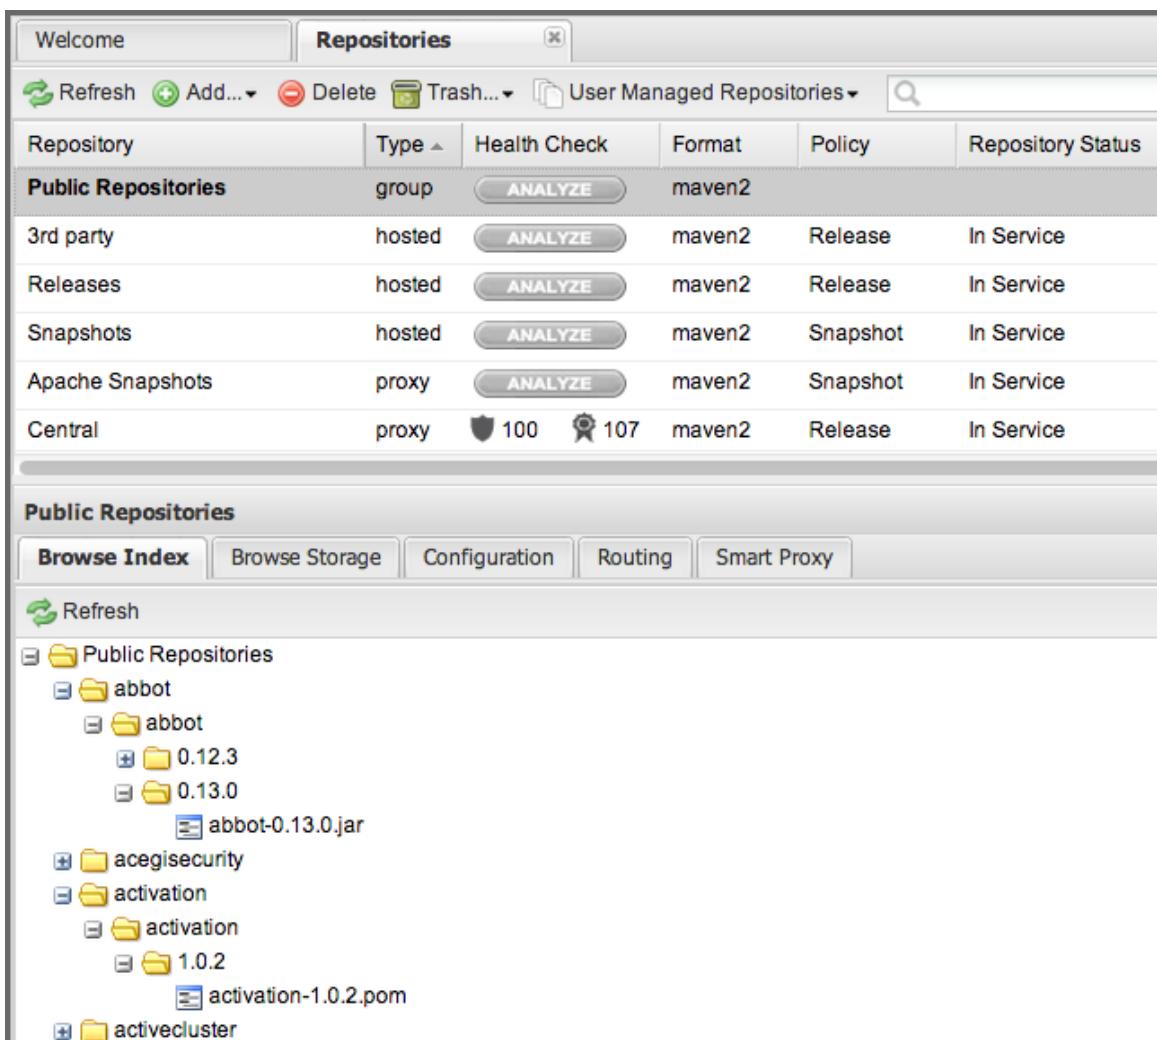

The screenshot shows the Nexus Repository Manager interface. The top navigation bar includes 'Welcome' and 'Repositories'. Below the navigation is a toolbar with 'Refresh', 'Add...', 'Delete', 'Trash...', 'User Managed Repositories', and a search icon. A table lists repositories:

| Repository | Type | Health Check | Format | Policy | Repository Status |
|---------------------|--------|----------------|--------|----------|-------------------|
| Public Repositories | group | ANALYZE | maven2 | | |
| 3rd party | hosted | ANALYZE | maven2 | Release | In Service |
| Releases | hosted | ANALYZE | maven2 | Release | In Service |
| Snapshots | hosted | ANALYZE | maven2 | Snapshot | In Service |
| Apache Snapshots | proxy | ANALYZE | maven2 | Snapshot | In Service |
| Central | proxy | 100 | 107 | maven2 | Release |


The 'Public Repositories' section is expanded, showing a tree view of components:

- Public Repositories
 - abbot
 - 0.12.3
 - 0.13.0
 - abbot-0.13.0.jar
 - acegisecurity
 - activation
 - 1.0.2
 - activation-1.0.2.pom
 - activecluster

Figure 5.5. Browsing a Repository Index

Viewing the Artifact Information

Once you located an archive in the repository index or storage or via a search the right-hand panel will at minimum show the Artifact information tab as visible in *Figure 5.6, “Viewing the Artifact Information”*. Besides showing details like the *Repository Path*, *Size*, *Checksums*, location of the component and other details, you are able to download and delete the component with the respective buttons.

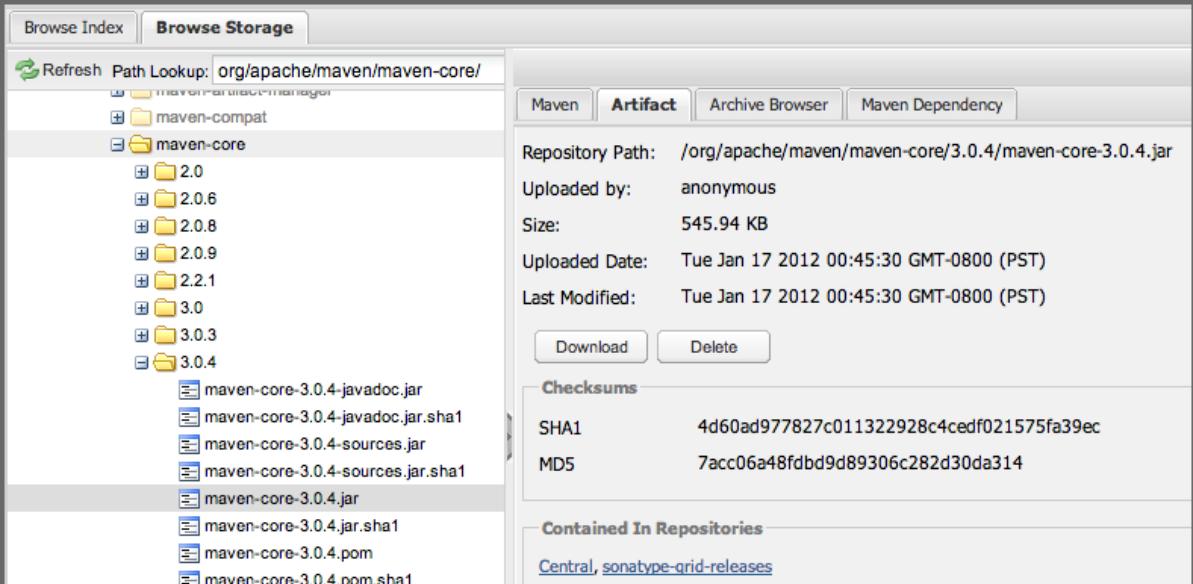

The screenshot shows the Nexus Repository Manager interface. On the left, there's a tree view of repository contents under 'Path Lookup: org/apache/maven/maven-core/'. The tree includes nodes for 'maven-compat', 'maven-core' (with subfolders 2.0, 2.0.6, 2.0.8, 2.0.9, 2.2.1, 3.0, 3.0.3, 3.0.4), and specific files like 'maven-core-3.0.4-javadoc.jar', 'maven-core-3.0.4-javadoc.jar.sha1', 'maven-core-3.0.4-sources.jar', 'maven-core-3.0.4-sources.jar.sha1', 'maven-core-3.0.4.jar', 'maven-core-3.0.4.jar.sha1', 'maven-core-3.0.4.pom', and 'maven-core-3.0.4.pom.sha1'. On the right, the 'Artifact' tab is selected in a tab bar. Below it, detailed information is displayed:

| | |
|------------------|---|
| Repository Path: | /org/apache/maven/maven-core/3.0.4/maven-core-3.0.4.jar |
| Uploaded by: | anonymous |
| Size: | 545.94 KB |
| Uploaded Date: | Tue Jan 17 2012 00:45:30 GMT-0800 (PST) |
| Last Modified: | Tue Jan 17 2012 00:45:30 GMT-0800 (PST) |

Below this are 'Download' and 'Delete' buttons. A 'Checksums' section lists SHA1 and MD5 values. At the bottom, it says 'Contained In Repositories' with 'Central, sonatype-grid-releases' listed.

Figure 5.6. Viewing the Artifact Information

Viewing Maven Information

If the component you are examining is a Maven-related component like a pom file or a jar, you will see the Maven information tab in the right-hand panels. As visible in *Figure 5.7, “Viewing the Maven Information”*, the GAV parameters are displayed above an XML snippet identifying the component that you can just cut and paste into a Maven pom.xml file.

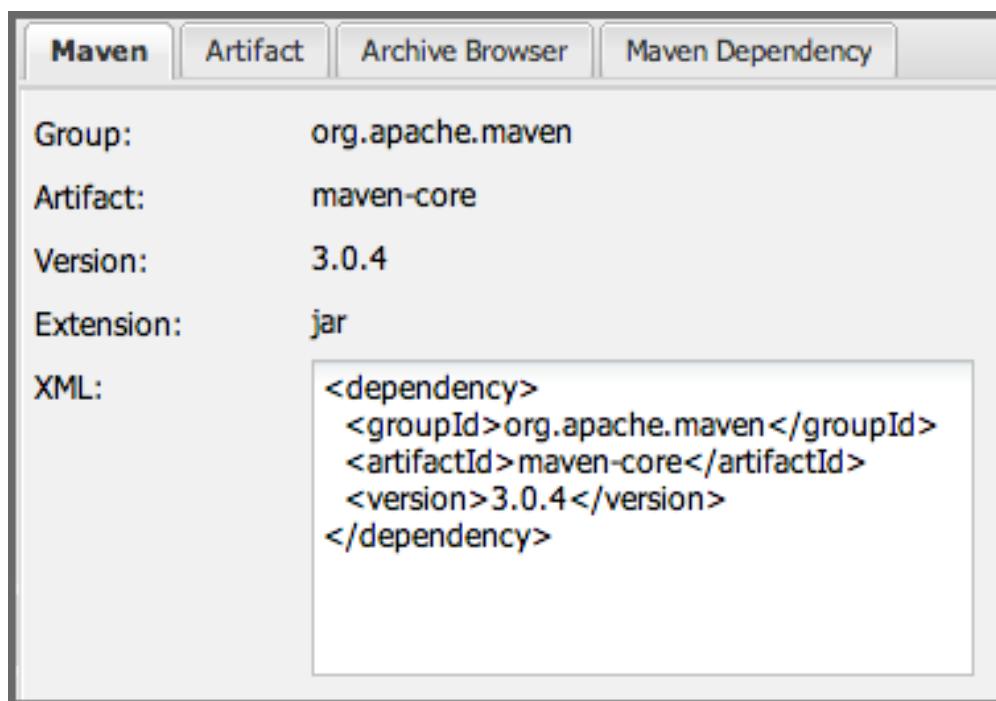


Figure 5.7. Viewing the Maven Information

View and Editing Artifact Metadata


Available in Nexus Repository Pro only

Support for custom metadata for components in Maven 2 repositories is part of Nexus Repository Manager Pro. You can view, edit, and search for additional metadata associated to any component in your repositories.

The features for custom metadata usage need to be activated by adding and enabling the *Custom Metadata* capability as described in [Accessing and Configuring Capabilities](#)(see page 0).

Prior to Nexus Repository Manager Pro 2.7 custom metadata support was an optional plugin that needed to be installed, following the instructions in [Managing Plugins](#)(see page 493). The directory containing the plugin code is called nexus-custom-metadata-plugin-X.Y.Z. Install the plugin

Security privileges allow you to define "read only" as well as "write" access for custom metadata as well as grant or disallow access. When viewing a specific component from browsing repository storage or a repository index or from a search, the *Artifact Metadata* tab displays the interface shown in *Figure 5.8*, "Viewing Artifact Metadata".

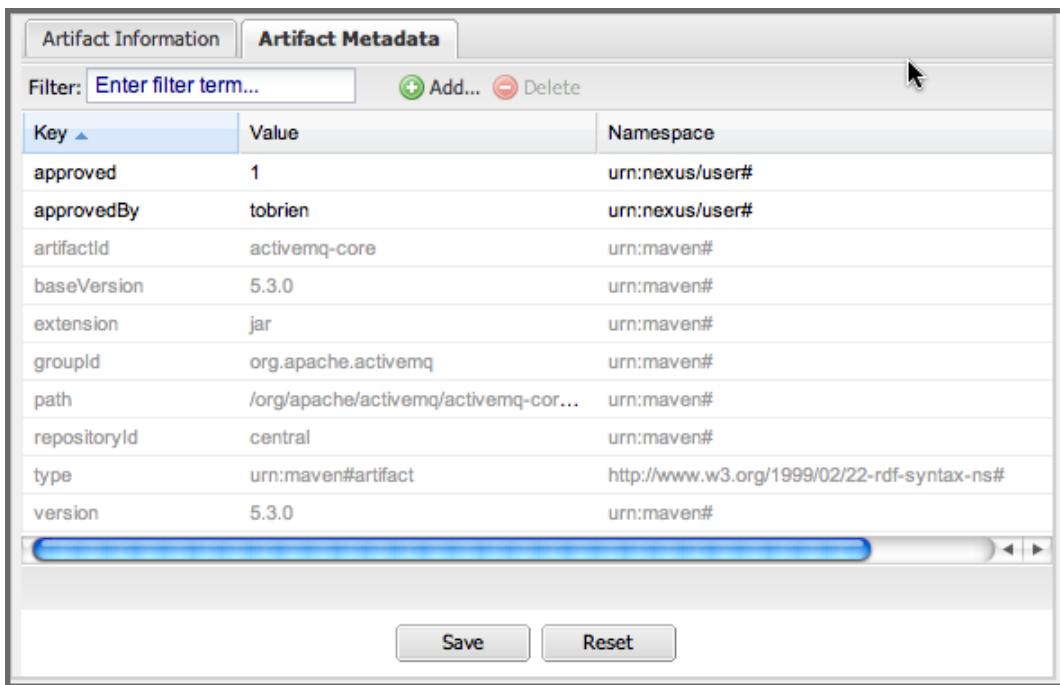

The screenshot shows the 'Artifact Metadata' tab of the Nexus Repository Manager 2 interface. The table displays the following metadata entries:

| Key | Value | Namespace |
|--------------|--------------------------------------|---|
| approved | 1 | urn:nexus/user# |
| approvedBy | tobrien | urn:nexus/user# |
| artifactId | activemq-core | urn:maven# |
| baseVersion | 5.3.0 | urn:maven# |
| extension | jar | urn:maven# |
| groupId | org.apache.activemq | urn:maven# |
| path | /org/apache/activemq/activemq-cor... | urn:maven# |
| repositoryId | central | urn:maven# |
| type | urn:maven#artifact | http://www.w3.org/1999/02/22-rdf-syntax-ns# |
| version | 5.3.0 | urn:maven# |

At the bottom of the table is a horizontal scrollbar. Below the table are two buttons: 'Save' and 'Reset'.

Figure 5.8. Viewing Artifact Metadata

Artifact metadata consists of a key, a value, and a namespace. Existing metadata from a component's POM is given a `urn:maven` namespace and custom attributes are stored under the `urn:nexus/user` namespace.

To add a custom attribute, click on a component, and select the *Artifact Metadata* tab. Click *Add...* there and a new row will be inserted into the list of attributes. Supply a *Key* and a *Value* and click *Save* to update the component's metadata. *Figure 5.9, “Editing Artifact Metadata”* shows the *Artifact Metadata* panel with two custom attributes: `approvedBy` and `approved`.

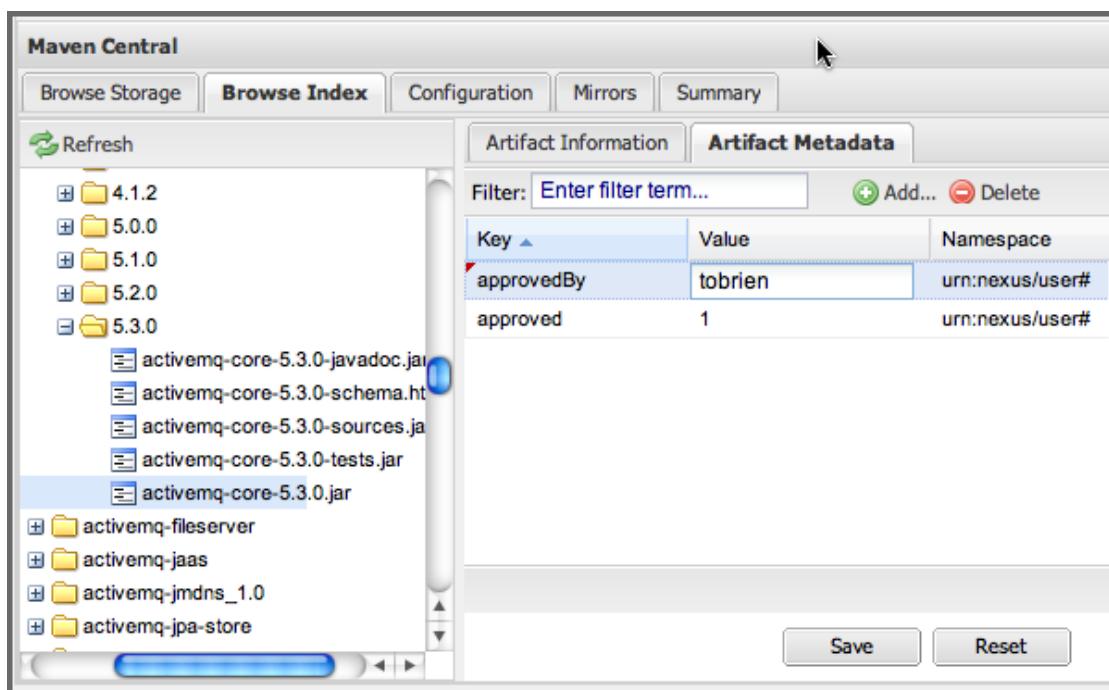


Figure 5.9. Editing Artifact Metadata

You can upload custom metadata data using an xml file. The file will be processed as component metadata if it meets the following criteria:

- file extension is .n3 or .xml
- the component classifier is metadata

Here are example contents of a metadata file which adds additional custom metadata to a component with GAV of test:project:1.0 and packaging of jar:

```
<urn:maven/component#test:project:1.0::jar>
<urn:mycustomspace#repositoryId> "releases" ;
<urn:mycustomspace#mavenVersion> "2.2.1" ;
<urn:mycustomspace#releaseManager> "myusername" ;
<urn:mycustomspace#codeCoverage> ".99" .
```

A file with the above metadata content and a name of `metadata.n3` can e.g., be attached as an additional project output component with the build helper maven plugin.

```
<plugin>
  <groupId>org.codehaus.mojo</groupId>
  <artifactId>build-helper-maven-plugin</artifactId>
  <version>1.7</version>
  <executions>
    <execution>
      <id>attach-components</id>
      <phase>package</phase>
      <goals>
        <goal>attach-component</goal>
      </goals>
      <configuration>
        <artifacts>
          <artifact>
            <file>metadata.n3</file>
            <type>n3</type>
            <classifier>metadata</classifier>
          </artifact>
        </artifacts>
      </configuration>
    </execution>
  </executions>
</plugin>
```

The metadata in the file is consumed by the custom metadata plugin and becomes available in the user interface for inspection and search. By default this metadata available for read operations only. If the repository deployment policy allows redeploys, the custom metadata can be changed.

Using the Archive Browser

Available in Nexus Repository Pro only

For binary components like jar files the repository manager displays an Archive Browser panel, as visible in *Figure 5.10, “Using the Archive Browser”*, that allows you to view the contents of the archive. Clicking on individual files in the browser will download them and potentially display them in your browser. This can be useful for quickly checking out the contents of an archive without manually downloading and extracting it.

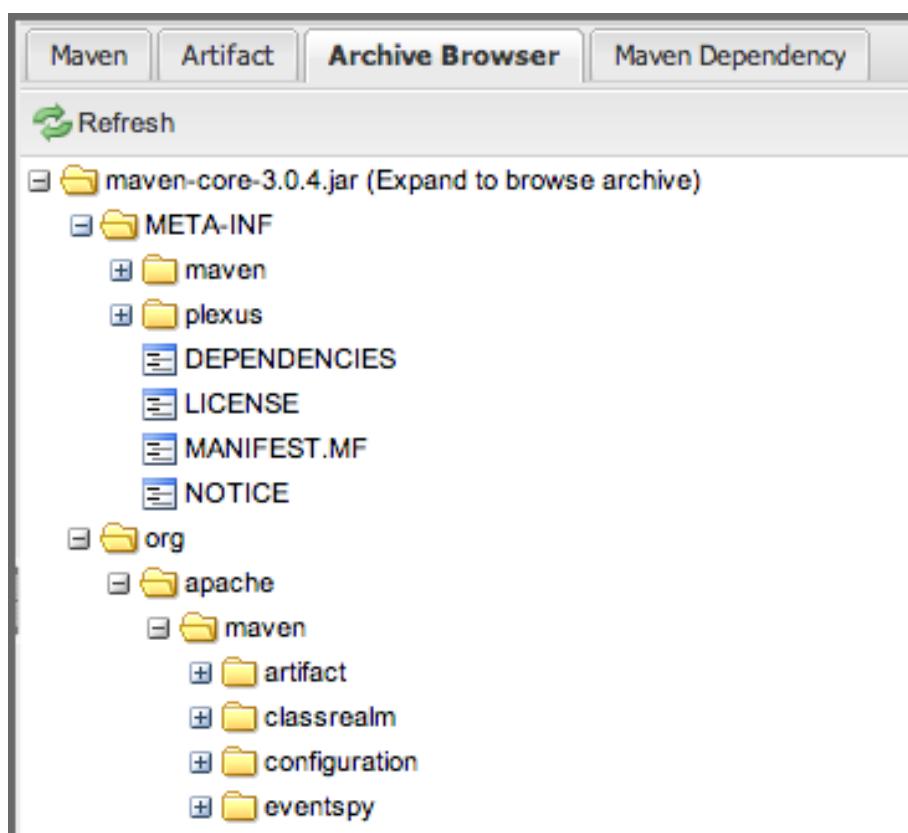


Figure 5.10. Using the Archive Browser

Inspecting the Component Dependencies

Available in Nexus Repository Pro only

Nexus Repository Manager Pro provides you with the ability to browse a component's dependencies. Using the component metadata found in a component's POM, the repository manager will scan a repository or a repository group and attempt to resolve and display a component's dependencies. To view a component's dependencies, browse the repository storage or the repository index, select a component (or a component's POM), and then click on the *Maven Dependency* tab.

On the *Maven Dependency* tab, you will see the following form elements:

Repository

When resolving a component's dependencies, the repository manager will query an existing repository or repository group. In many cases it will make sense to select the same repository group you are referencing in your Maven settings. If you encounter any problems during the dependency resolution, you need to make sure that you are referencing a repository or a group that contains these dependencies.

Mode

An component's dependencies can be listed as either a tree or a list. When dependencies are displayed in a tree, you can inspect direct dependencies and transitive dependencies. This can come in handy if you are assessing a component, based on the dependencies it is going to pull into your project's build. When you list dependencies as a list, the repository manager is going to perform the same process used by Maven to collapse a tree of dependencies into a list of dependencies using rules to merge and override dependency versions if there are any overlaps or conflicts.

Once you have selected a repository to resolve against and a mode to display a component's dependencies, click on the *Resolve* button in the tab header. Clicking on this button will start the process of resolving dependencies, depending on the number of components already cached, this process can take anywhere from a few seconds to a minute. Once the resolution process is finished, you should see the component's dependencies, as shown in *Figure 5.11, "View a Component's Dependencies"*.

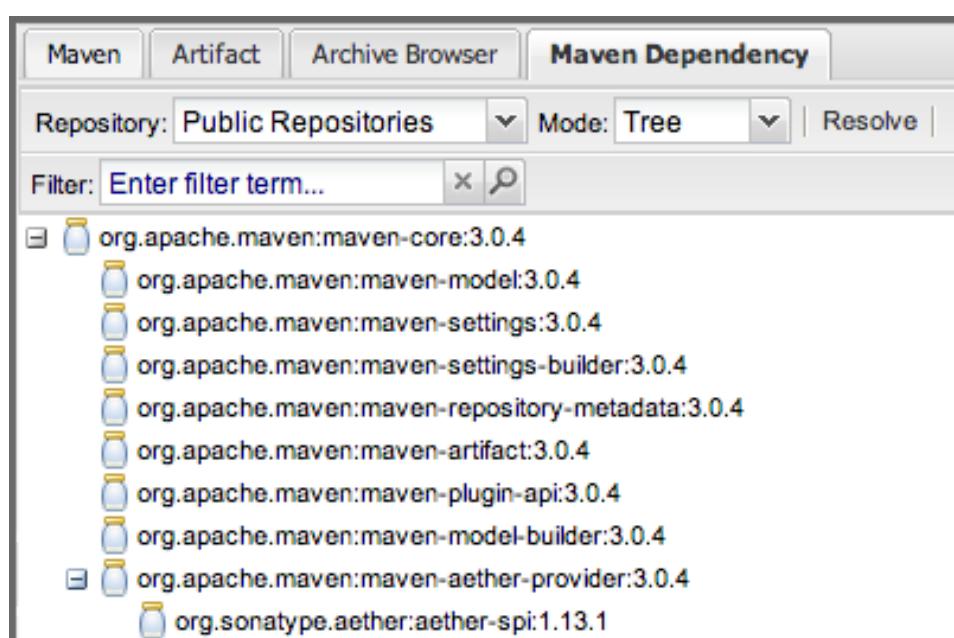


Figure 5.11. View a Component's Dependencies

Once you have resolved a component's dependencies, you can use the *Filter* text input to search for particular component dependencies. If you double-click on a row in the tree or list of dependencies, you can navigate to other components within the user interface.

Viewing Component Security and License Information

Available in Nexus Repository Pro only


One of the added features of Nexus Repository Manager Pro is the usage of the curated and up to date information from the Sonatype Data Services. This data contains security and license information about components and is accessible for a whole repository in the Repository Health Check feature.

The *Component Info* tab displays the security and license information available for a specific component. It

is available in browsing or search results, once a you have selected a component in the search results list or repository tree view. An example search for Jetty, with the *Component Info* tab visible, is displayed in *Figure 5.12, “Component Info Displaying Security Vulnerabilities for an Old Version of Jetty”*. It displays the results from the *License Analysis* and any found *Security Issues*.

The *License Analysis* reveals a medium threat triggered by the fact that Non-Standard license headers were found in the source code as visible in the *Observed License(s) in Source* column. The license found in the pom.xml file associated to the project only documented Apache-2.0 or EPL-1.0 as the *Declared License(s)*.

The *Declared License* details the license information found in POM file or other meta data. The *Observed Licenses in Source* lists all the licenses found in the actual source code of the library in the form of file headers and license files. This data is based on source code scanning performed and provided by the Sonatype Data Services.

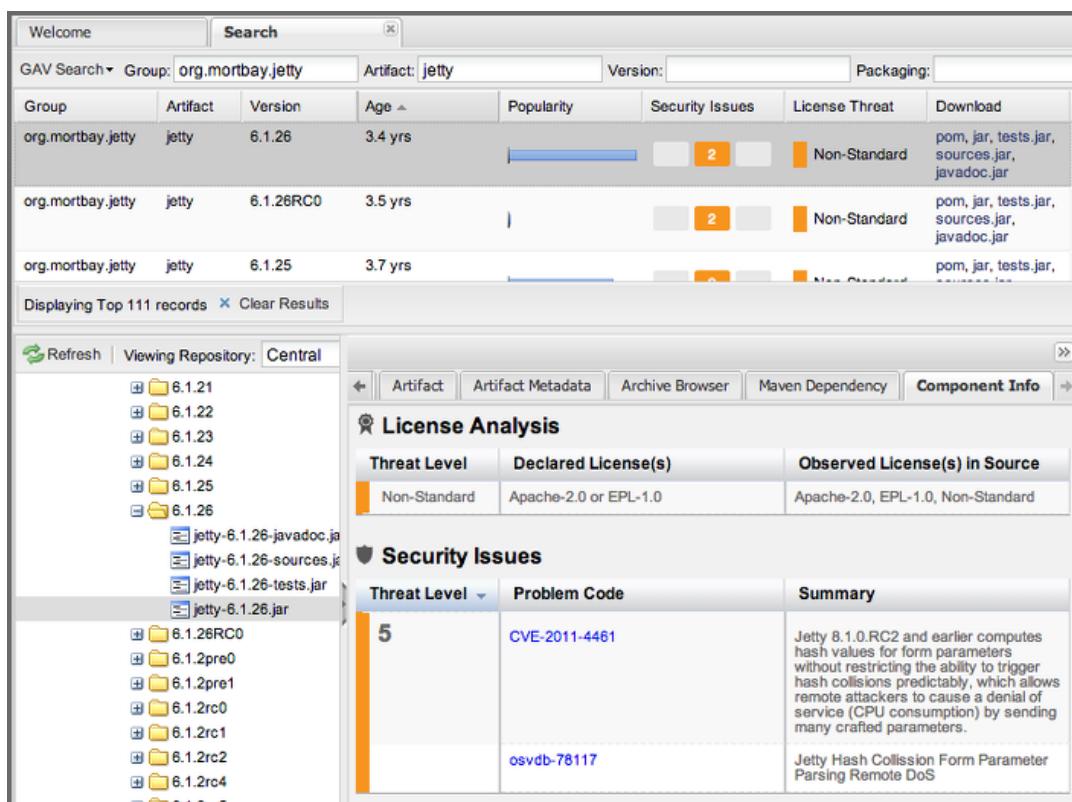

The screenshot shows the Nexus Repository Manager 2 interface. At the top, there is a search bar with 'Group: org.mortbay.jetty', 'Artifact: jetty', and 'Version:'. Below the search bar is a table listing artifacts:

| Group | Artifact | Version | Age | Popularity | Security Issues | License Threat | Download |
|-------------------|----------|-----------|---------|---------------------------------|-----------------|----------------|---|
| org.mortbay.jetty | jetty | 6.1.26 | 3.4 yrs | <div style="width: 80%;"></div> | 2 | Non-Standard | pom, jar, tests.jar, sources.jar, javadoc.jar |
| org.mortbay.jetty | jetty | 6.1.26RC0 | 3.5 yrs | <div style="width: 50%;"></div> | 2 | Non-Standard | pom, jar, tests.jar, sources.jar, javadoc.jar |
| org.mortbay.jetty | jetty | 6.1.25 | 3.7 yrs | <div style="width: 70%;"></div> | 1 | Non-Standard | pom, jar, tests.jar, |

Below the table, it says 'Displaying Top 111 records' and 'Clear Results'. To the right, there is a sidebar with a tree view of artifact versions:

- 6.1.21
- 6.1.22
- 6.1.23
- 6.1.24
- 6.1.25
- 6.1.26
 - jetty-6.1.26-javadoc.jar
 - jetty-6.1.26-sources.jar
 - jetty-6.1.26-tests.jar
 - jetty-6.1.26.jar
- 6.1.26RC0
- 6.1.2pre0
- 6.1.2pre1
- 6.1.2rc0
- 6.1.2rc1
- 6.1.2rc2
- 6.1.2rc4
- 6.1.2r5

The main content area has tabs: Artifact, Artifact Metadata, Archive Browser, Maven Dependency, and Component Info. The Component Info tab is active, showing:

License Analysis


| Threat Level | Declared License(s) | Observed License(s) in Source |
|--------------|-----------------------|-----------------------------------|
| Non-Standard | Apache-2.0 or EPL-1.0 | Apache-2.0, EPL-1.0, Non-Standard |

Security Issues

| Threat Level | Problem Code | Summary |
|--------------|---------------|---|
| 5 | CVE-2011-4461 | Jetty 8.1.0.RC2 and earlier computes hash values for form parameters without restricting the ability to trigger hash collisions predictably, which allows remote attackers to cause a denial of service (CPU consumption) by sending many crafted parameters. |
| | osvdb-78117 | Jetty Hash Collision Form Parameter Parsing Remote DoS |

Figure 5.12. Component Info Displaying Security Vulnerabilities for an Old Version of Jetty

The *Security Issues* section displays two issues with *Threat Level* values 5. The *Summary* column contains a small summary description of the security issue. The *Problem Code* column contains the codes, which link to the respective entries in the Common Vulnerabilities and Exposures (CVE) list displayed in *Figure 5.13, “Common Vulnerabilities and Exposures CVE Entry for a Jetty Security Issue”*.

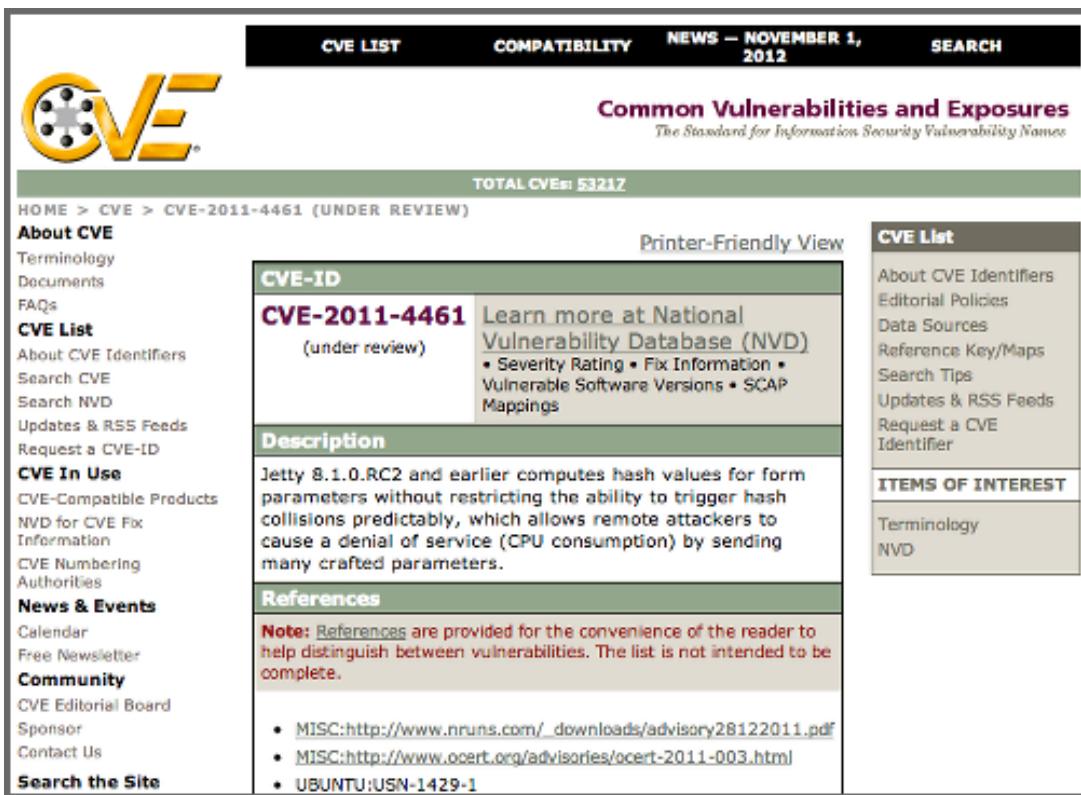

The screenshot shows the CVE homepage with a sidebar on the left containing links for Terminology, Documents, FAQs, CVE List, CVE In Use, News & Events, Community, and Search the Site. The main content area displays the details for CVE-2011-4461, which is marked as "under review". The entry includes a brief description of the vulnerability in Jetty, a note about references, and a list of three URLs. A sidebar on the right provides links to the CVE List and Items of Interest.

Figure 5.13. Common Vulnerabilities and Exposures CVE Entry for a Jetty Security Issue

Understanding the Difference, Nexus Repository Manager Pro and Nexus IQ Server integration. In this section, we've talked about the various ways component data is being used, at least at an introductory level. However, understanding the differences between the Sonatype Data Services usage in Nexus Repository Manager Pro and Nexus IQ Server may still be a little unclear. Rather you are likely asking, "What do I get with an integration of Nexus Repository Manager Pro and Nexus IQ Server?"

Policy Management

Your organization likely has a process for determining which components can be included in your applications. This could be as simple as limiting the age of the component, or more complex, like prohibiting components with a certain type of licenses or security issue.

Whatever the case, the process is supported by rules. Nexus IQ Server Policy management is a way to create those rules, and then track and evaluate your application. Any time a rule is broken, that's considered a policy violation. Violations can then warn, or even prevent a release.

Here's an example of the Nexus IQ Server features for Staging:

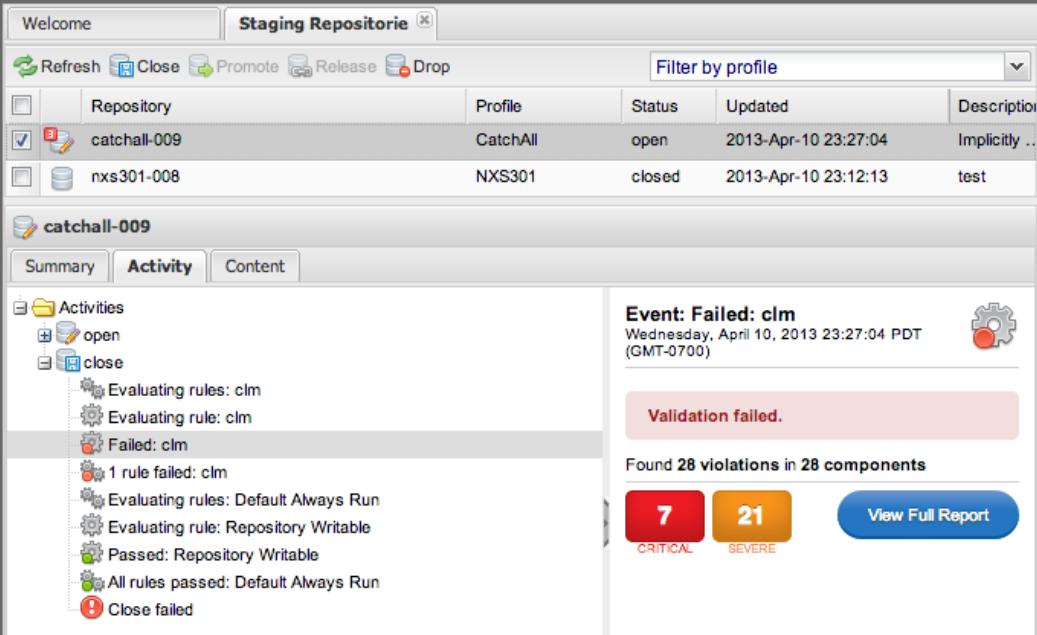


Figure 5.14. Staging Repository Activity with a Nexus IQ Server Evaluation Failure and Details

Component Information Panel

The Component Information Panel, or CIP, provides everything you need to know about a component. Looking at the image below, you'll notice two sections. On the left, details about the specific component are provided. On the right, the graph provides information about the highest policy threat and popularity for each version. You can even click on each individual version in the graph, which will then display on the left.

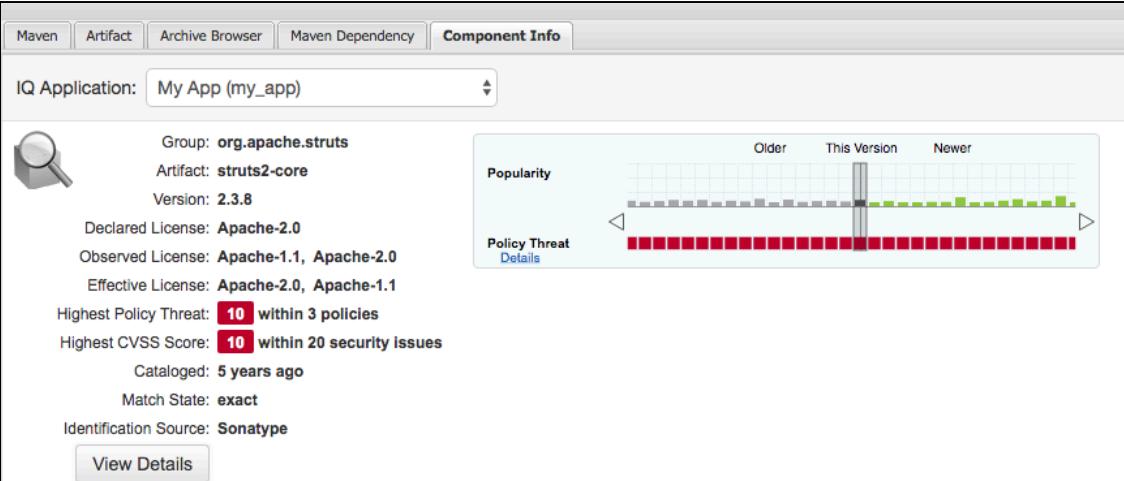


Figure 5.15. Component Information Panel Example

⚠ The CIP is then expanded with the *View Details* button which shows exactly what security or license issues were encountered, as well as any policy violations.

Audit and Quarantine

The Audit and Quarantine features use Nexus IQ policy management to protect your development environment from serving risky, unwanted components. You can enable these features to identify, prevent and release such components that may compromise a proxy repository.

See our [Nexus IQ Server documentation](#)(see page 0) to learn about releasing components from quarantine and other features.

Browsing Groups

The repository manager contains ordered groups of repositories that allow you to expose a series of repositories through a single URL. More often than not, an organization is going to point Maven at the default repository group `Public Repositories`. Most endusers of the repository manager are not going to know what components are being served from what specific repository, and they are going to want to be able to browse the public repository group.

To support this use case, the repository manager allows you to browse the contents of a repository group as if it were a single merged repository with a tree structure. *Figure 5.16, “Browsing a Repository Group”*, shows the browsing storage interface for a repository group. There is no difference to the user experience of browsing a repository group vs. browsing a repository.

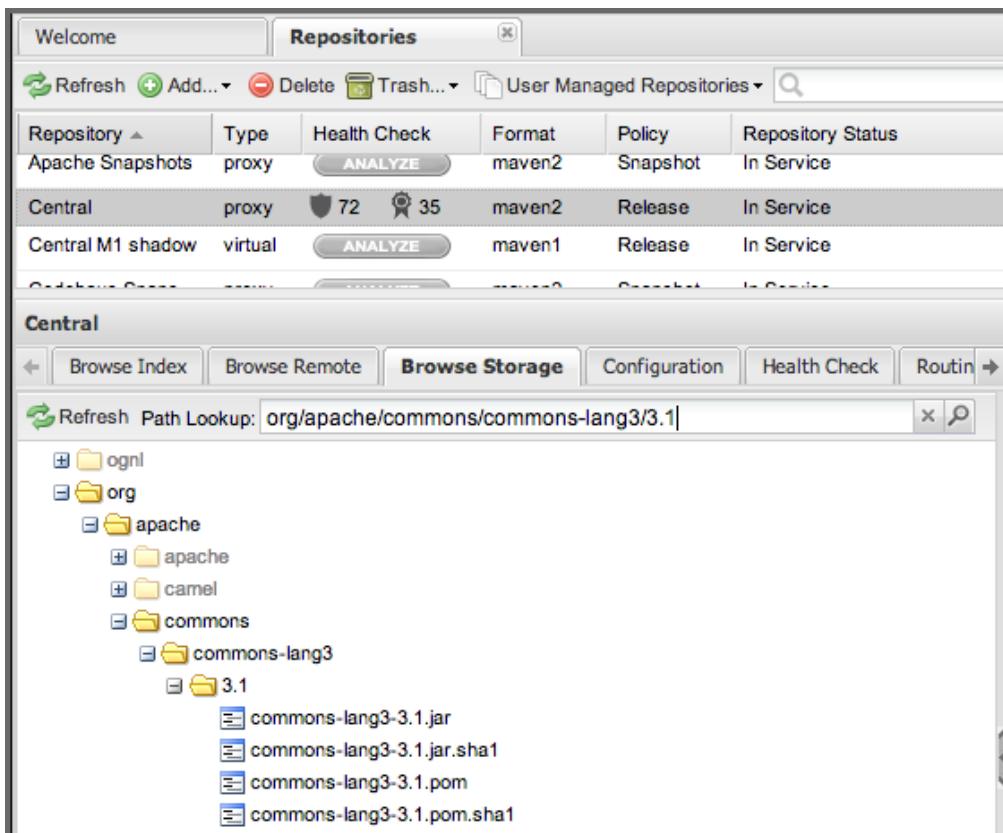


Figure 5.16. Browsing a Repository Group

When browsing a repository group's storage, you are browsing the underlying storage for all of the repositories in a group. If a repository group contains proxy repositories, the *Browse Storage* tab will show all of the components in the group that have been downloaded from the remote repositories. To browse and search all components available in a group, click on the *Browse Index* tab to load the interface shown in *Figure 5.17, “Browsing a Repository Group Index”*.


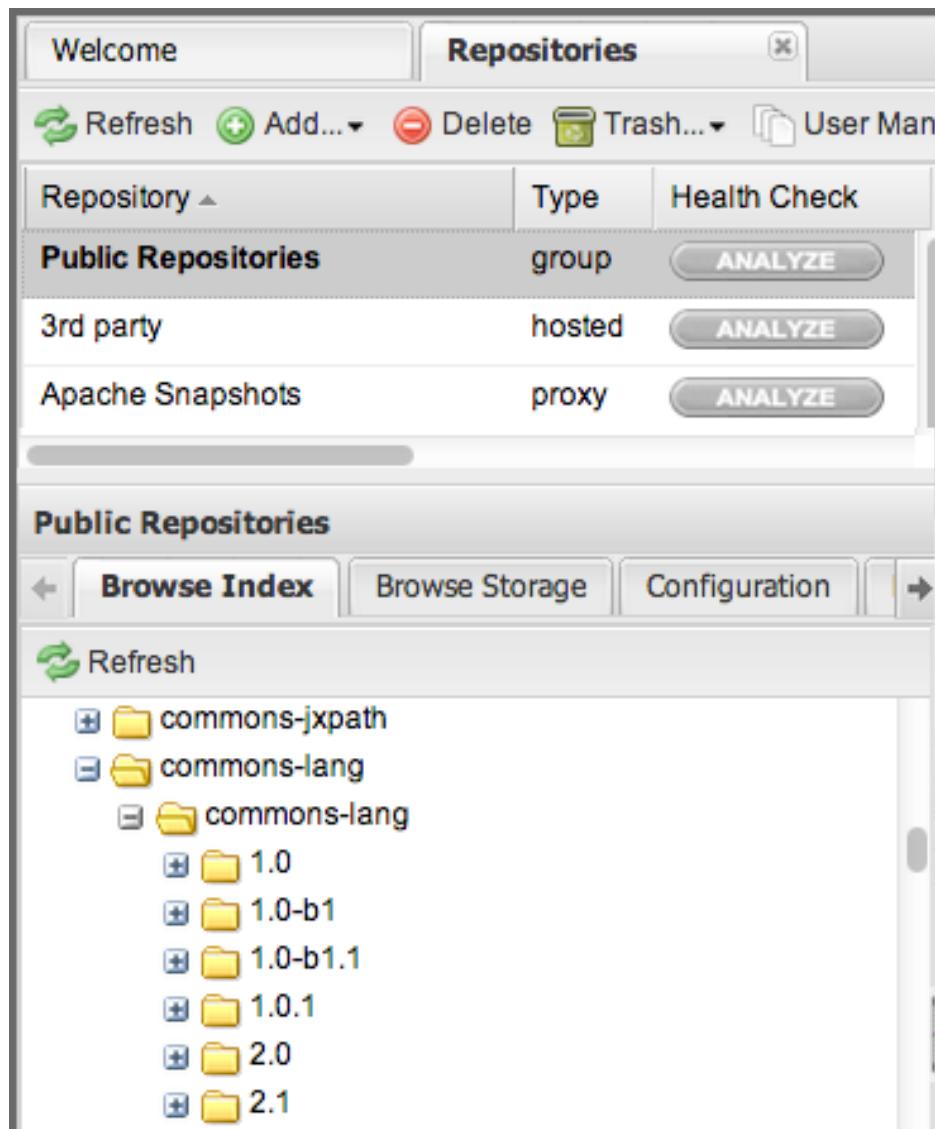


Figure 5.17. Browsing a Repository Group Index

Searching for Components

Search Overview

In the left-hand navigation area, there is an Artifact Search text field next to a magnifying glass. To search for a component by *groupId* or *artifactId*, type in some text and click the magnifying glass. Typing in the search term *junit* and clicking the magnifying glass should yield a search result similar to Figure 5.18, "Results of an Artifact Search for 'junit'".

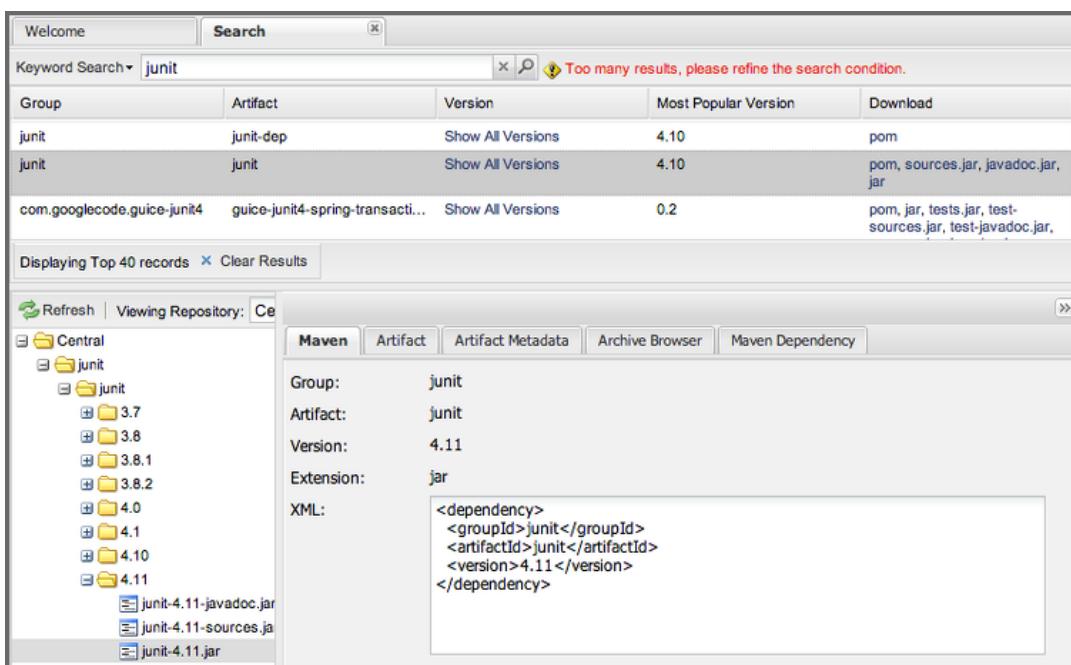

The screenshot shows the Nexus Repository Manager interface. At the top, there is a search bar with the query 'junit'. Below the search bar is a table with columns: Group, Artifact, Version, Most Popular Version, and Download. The table contains three rows:

| Group | Artifact | Version | Most Popular Version | Download |
|-----------------------------|----------------------------------|-------------------|----------------------|--|
| junit | junit-dep | Show All Versions | 4.10 | pom |
| junit | junit | Show All Versions | 4.10 | pom, sources.jar, javadoc.jar, jar |
| com.googlecode.guice-junit4 | guice-junit4-spring-transacti... | Show All Versions | 0.2 | pom, jar, tests.jar, test-sources.jar, test-javadoc.jar, |

Below the table, it says 'Displaying Top 40 records' and 'Clear Results'. On the left, there is a tree view of the Central repository structure under 'Viewing Repository: Central'. Under 'junit', versions 3.7, 3.8, 3.8.1, 3.8.2, 4.0, 4.1, 4.10, and 4.11 are listed. Under 4.11, 'junit-4.11-javadoc.jar', 'junit-4.11-sources.jar', and 'junit-4.11.jar' are shown. On the right, there is a panel titled 'Maven' with tabs for Maven, Artifact, Artifact Metadata, Archive Browser, and Maven Dependency. The Maven tab is selected. It displays the following details:

- Group: junit
- Artifact: junit
- Version: 4.11
- Extension: jar
- XML:

```
<dependency>
<groupId>junit</groupId>
<artifactId>junit</artifactId>
<version>4.11</version>
</dependency>
```

Figure 5.18. Results of an Artifact Search for 'junit'


The *groupId* in the *Group* column and the *artifactId* in the *Artifact* column identify each row in the search results table. Each row represents an aggregation of all components in this Group and Artifact coordinate.

The *Version* column displays a link to *Show All Versions*, which triggers a search for the specific group and artifact.

The *Most Popular Version* column displays the version that has the most downloads by all users accessing the Central Repository. This data can help with the selection of an appropriate version to use for a particular component.

The *Download* column displays direct links to all the components available for the latest version. A typical list of downloadable components would include the Java archive jar, the Maven pom.xml file pom, a Javadoc archive javadoc.jar and a Sourcecode archive sources.jar, but other download options are also added if more components are available. Click on the link to download an component.

Each of the columns in the search results table can be used to sort the table in Ascending or Descending order. In addition, you can choose to add and remove columns with the sort and column drop-down options visible in *Figure 5.19, "Sort and Column Options in the Search Results Table"*.

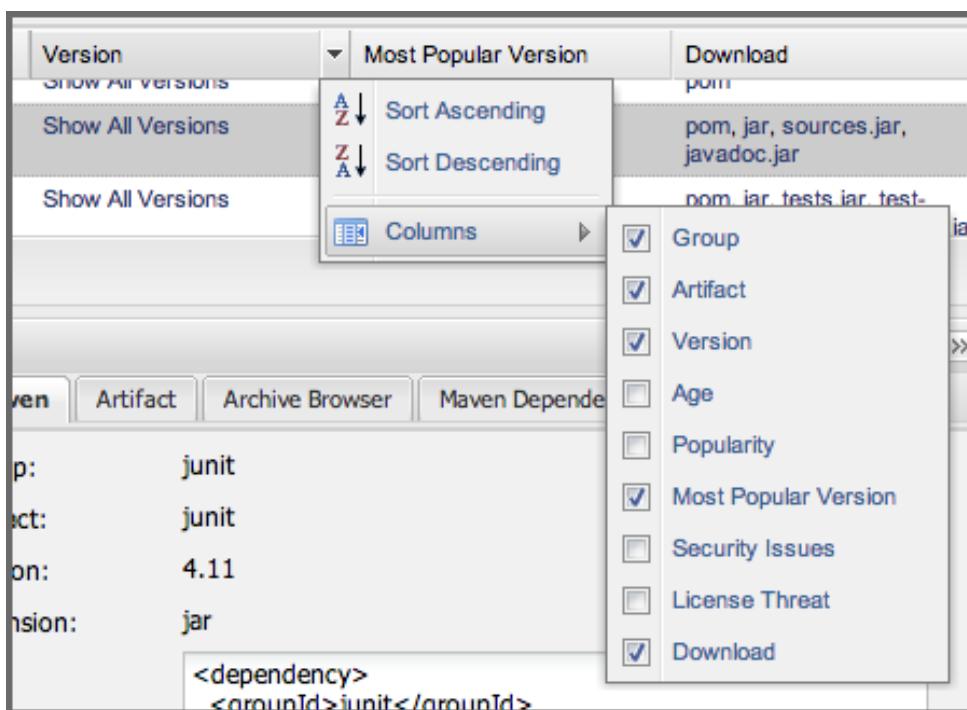

The screenshot shows a search results table for the artifact 'junit'. The table has columns for Version, Most Popular Version, and Download. A context menu is open over the 'Version' column header, showing 'Sort Ascending' and 'Sort Descending' options. To the right of the table is a 'Columns' dropdown menu with several checkboxes. The checked items are: Group, Artifact, Version, Most Popular Version, and Download. Other items like Age, Popularity, Security Issues, and License Threat are also listed but not checked.

| Version | Most Popular Version | Download |
|-----------------------------------|---|--|
| Show All Versions | Sort Ascending Sort Descending | pom pom, jar, sources.jar, javadoc.jar pom, jar, tests.jar, test-jar |
| Show All Versions | Columns | <input checked="" type="checkbox"/> Group <input checked="" type="checkbox"/> Artifact <input checked="" type="checkbox"/> Version <input type="checkbox"/> Age <input type="checkbox"/> Popularity <input checked="" type="checkbox"/> Most Popular Version <input type="checkbox"/> Security Issues <input type="checkbox"/> License Threat <input checked="" type="checkbox"/> Download |

Below the table, there is a dependency XML snippet:

```

<dependency>
  <groupId>junit</groupId>
</dependency>

```


Figure 5.19. Sort and Column Options in the Search Results Table

The repository browser interface below the search results table will displays the component selected in the list in the repository structure with the same information panels available documented in [Browsing Repositories](#)(see page 0). An component could be present in more than one repository. If this is the case, click on the value next to *Viewing Repository* to switch between multiple matching repositories.

- ❗ Let me guess? You installed Nexus Repository Manager, ran to the search box, typed in the name of a group or a component, pressed search and saw absolutely nothing. No results. The repository manager isn't going to retrieve the remote repository indexes by default. You need to activate downloading of remote indexes for the three default proxy repositories. Without these indexes, the repository manager has nothing to search. Find instructions for activating index downloads in [Managing Repositories](#)(see page 0).

Advanced Search

Clicking on the (Show All Versions) link in the Version column visible in *Figure 5.18, “Results of an Artifact Search for ‘junit’”* will initiate an Advanced Search by the groupId and artifactId of the row and result in a view similar to *Figure 5.20, “Advanced Search Results for a GAV Search Activated by the Show All Versions Link”*.

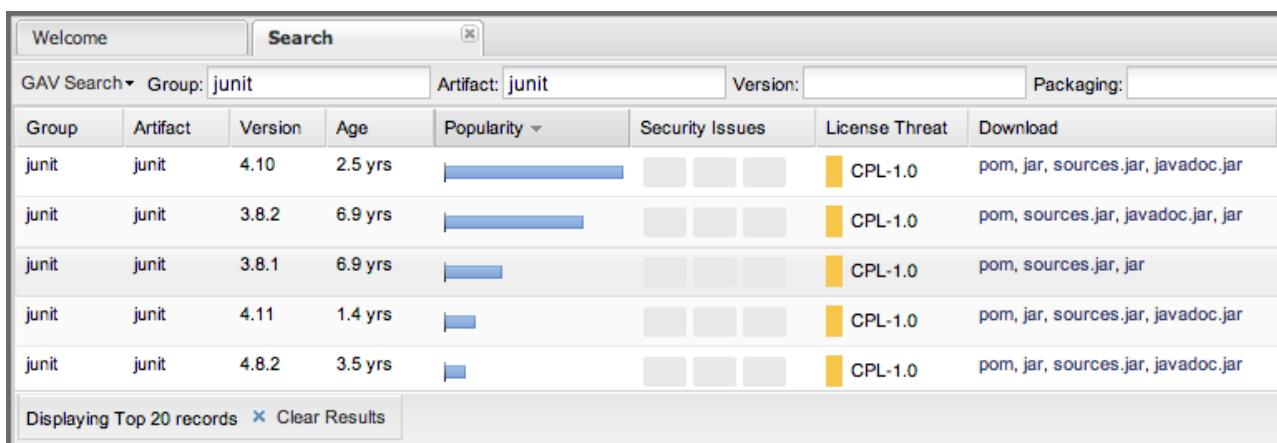

| Welcome | | Search | | | | | | | |
|--------------|----------|--------------|-----------------|--|--|--|--|---|--|
| GAV Search ▾ | | Group: junit | Artifact: junit | Version: | Packaging: | | | | |
| Group | Artifact | Version | Age | Popularity | Security Issues | License Threat | Download | | |
| junit | junit | 4.10 | 2.5 yrs | <div style="width: 80%; background-color: #4f81bd;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | CPL-1.0 pom, jar, sources.jar, javadoc.jar | |
| junit | junit | 3.8.2 | 6.9 yrs | <div style="width: 60%; background-color: #4f81bd;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | CPL-1.0 pom, sources.jar, javadoc.jar, jar | |
| junit | junit | 3.8.1 | 6.9 yrs | <div style="width: 40%; background-color: #4f81bd;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | CPL-1.0 pom, sources.jar, jar | |
| junit | junit | 4.11 | 1.4 yrs | <div style="width: 10%; background-color: #4f81bd;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | CPL-1.0 pom, jar, sources.jar, javadoc.jar | |
| junit | junit | 4.8.2 | 3.5 yrs | <div style="width: 5%; background-color: #4f81bd;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | <div style="width: 20%; background-color: #cccccc;"></div> | CPL-1.0 pom, jar, sources.jar, javadoc.jar | |

Displaying Top 20 records [X](#) Clear Results

Figure 5.20. Advanced Search Results for a GAV Search Activated by the Show All Versions Link

The header for the Advanced Search contains a selector for the type of search and one or more text input fields to define a search and a button to run a new search with the specified parameters.

The search results table contains one row per *Group* (`groupId`), *Artifact* (`artifactId`), and *Version* (`version`).

In addition, the *Age* column displays the age of the components being available on the Central Repository. Since most components are published to the Central Repository when released, this age gives you a good indication of the actual time since the release of the component.

The *Popularity* column shows a relative popularity as compared to the other results in the search table. This can give you a good idea on the adoption rate of a new release. For example, if a newer version has a high age value but a low popularity compared to an older version, you might want to check the upstream project and see if there is any issues stopping other users from upgrading that might affect you as well. Another reason could be that the new version does not provide significant improvements to warrant an upgrade for most users.

The *Security Issues* column shows the number of known security issues for the specific component.

The *License Threat* column shows a colored square with blue indicating no license threat and yellow, orange and red indicating increased license threats. More information about both indicators can be seen in the *Component Info* panel below the list of components for the specific component.

The *Download* column provides download links for all the available components.

The following advanced searches are available:

Keyword Search

Identical to the Artifact Search in the left-hand navigation, this search will look for the specified strings in the `groupId` and `artifactId`.

Classname Search

Rather than looking at the coordinates of a component in the repository, the Classname Search will look at the contents of the components and look for Java classes with the specified name. For

example, try a search for a classname of Pair to see how many library authors saw a need to implement such a class, saving you from potentially implementing yet another version.

GAV Search

The GAV search allows a search using the Maven coordinates of a component. These are Group (groupId), Artifact (artifactId), Version (version), Packaging (packaging), and Classifier (classifier). At a minimum you need to specify a group, component or version in your search. An example search would be with a component guice and a classifier no_aop or a group of org.glassfish.main.admingui and a packaging war. The default packaging is jar, with other values as used in the Maven packaging like ear, war, maven-plugin, pom, and ejb.

Checksum Search

Sometimes it is necessary to determine the version of a jar component in order to migrate to a qualified version. When attempting this and neither the filename nor the contents of the manifest file in the jar contain any useful information about the exact version of the jar, you can use Checksum Search to identify the component. Create a sha1 checksum, e.g., with the sha1sum command available on Linux or fciv on Windows, and use the created string in a checksum search. This will return one result, which will provide you with the GAV coordinates to replace the jar file with a dependency declaration.

Metadata Search

Search for components with specific metadata properties is documented in [Searching Artifact Metadata](#)(see page 255).

- ⓘ The checksum search can be a huge timesaver when migrating a legacy build system, where the used libraries are checked into the version control system as binary components with no version information available.

Searching Artifact Metadata

Available in Nexus Repository Pro only

To search for components with specific metadata, click on the Advanced Search link directly below the search field in the Artifact Search submenu of the main menu. This opens the Search panel and allows you to select *Metadata Search* in the search type drop-down as shown in *Figure 5.21, “Searching Artifact Metadata”*.


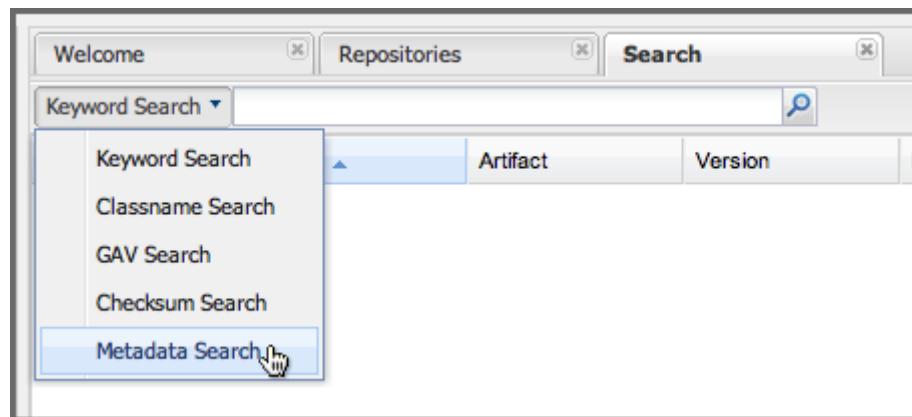


Figure 5.21. Searching Artifact Metadata

Once you select the metadata search you will see two search fields and an operator drop-down. The two search fields are the key and value of the metadata for which you are searching. The operator drop-down can be set to *Equals*, *Matches*, *Key Defined*, or *Not Equal*. *Equals* and *Not Equals* compare the value for a specific key. *Matches* allows the usage of * to allow any characters. E.g., looking for tr* would match true but also match tree. The *Key Defined* operator will ignore any value provided and return all components with the supplied key.

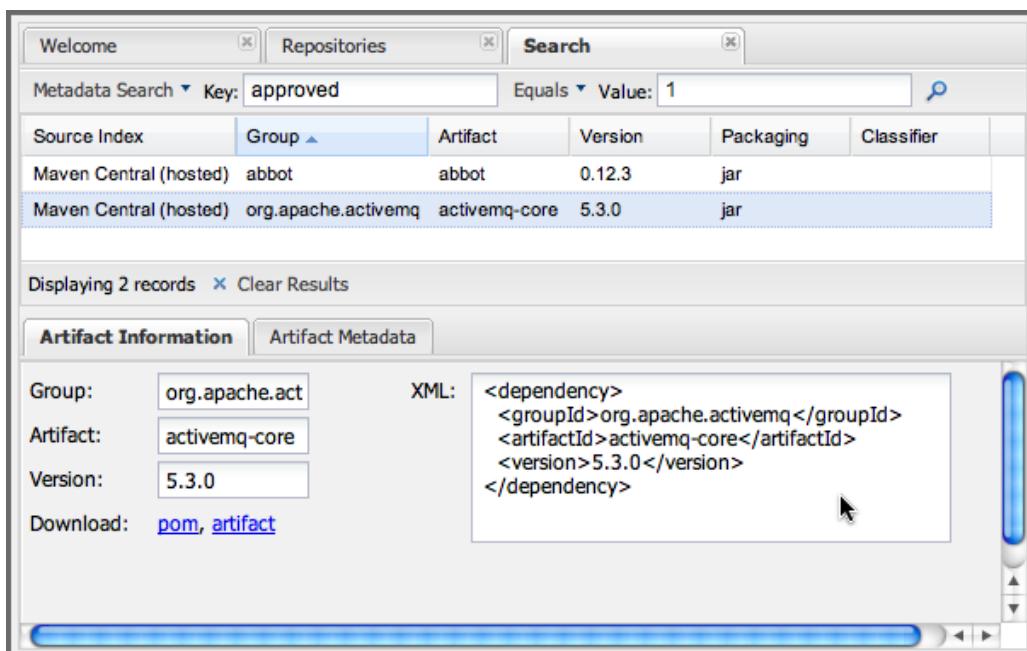

| Source Index | Group | Artifact | Version | Packaging | Classifier |
|------------------------|---------------------|---------------|---------|-----------|------------|
| Maven Central (hosted) | abbot | abbot | 0.12.3 | jar | |
| Maven Central (hosted) | org.apache.activemq | activemq-core | 5.3.0 | jar | |

Displaying 2 records [Clear Results](#)

Artifact Information **Artifact Metadata**

Group: XML: <dependency><groupId>org.apache.activemq</groupId><artifactId>activemq-core</artifactId><version>5.3.0</version></dependency>


Artifact: [View XML](#)

Version: [View POM](#)

Download: [pom](#), [artifact](#)

Figure 5.22. Metadata Search Results for Custom Metadata

Once you locate a matching component in the results list, click on the component and then select the *Artifact Metadata* tab to examine an components metadata as shown in *Figure 5.23, “Metadata Search Results for Custom Metadata”*.

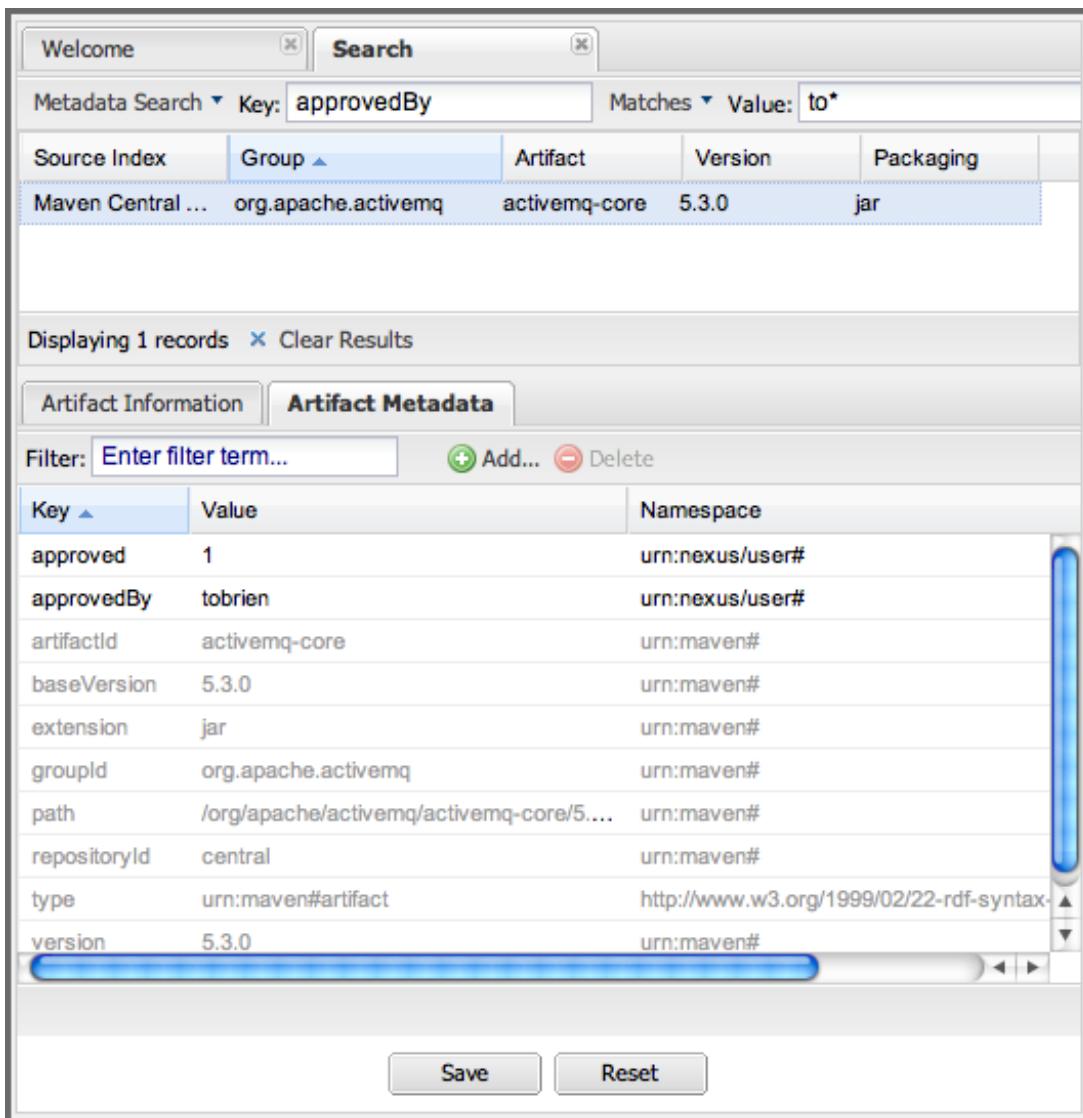

The screenshot shows the Nexus Repository Manager 2 interface. At the top, there are two tabs: "Welcome" and "Search". The "Search" tab is active, displaying a search bar with "Metadata Search" dropdown, "Key: approvedBy", "Matches" dropdown, and "Value: to*". Below the search bar is a table header with columns: "Source Index", "Group ▲", "Artifact", "Version", and "Packaging". A single row is selected in the table, showing "Maven Central ...", "org.apache.activemq", "activemq-core", "5.3.0", and "jar".

Below the table, a message says "Displaying 1 records" and "Clear Results". There are two tabs: "Artifact Information" and "Artifact Metadata", with "Artifact Metadata" being the active tab. It contains a "Filter: Enter filter term..." input field, a "Add..." button, and a "Delete" button. A table lists custom metadata with columns: "Key ▲", "Value", and "Namespace". The data includes:

| Key | Value | Namespace |
|--------------|--|---|
| approved | 1 | urn:nexus:user# |
| approvedBy | tobrien | urn:nexus:user# |
| artifactId | activemq-core | urn:maven# |
| baseVersion | 5.3.0 | urn:maven# |
| extension | jar | urn:maven# |
| groupId | org.apache.activemq | urn:maven# |
| path | /org/apache/activemq/activemq-core/5.... | urn:maven# |
| repositoryId | central | urn:maven# |
| type | urn:maven#artifact | http://www.w3.org/1999/02/22-rdf-syntax-ns#type |
| version | 5.3.0 | urn:maven# |

At the bottom of the screen are "Save" and "Reset" buttons.

Figure 5.23. Metadata Search Results for Custom Metadata

Search Example: Analyzing a Security Vulnerability


Available in Nexus Repository Pro only

The following example details how you can analyze security issues of a component and determine a solution with the help of information available in the repository manager.

You noticed the component with the Group `org.springframework`, the Artifact `spring-beans` and Version `2.5.4`. Upon further inspection of your software build and the components used, you can confirm that this component is indeed part of your shipping software. You might have discovered the need to investigate this initially by performing a repository health check or an external resource such as a security mailing list.

ⓘ Nexus IQ Server for CI(see page 0) can help you with the detection of license and security issues during continuous integration builds. Sonatype App Health Check allows you to analyze already assembled application archives.

A GAV search for the component, as documented in [SearchingforComponents\(see page 0\)](#), allows you to inspect the Component Info tab for the component displayed in *Figure 5.24, “GAV Search Results for org.springframework:spring-beans and Component Info Tab for Version 2.5.4”*.

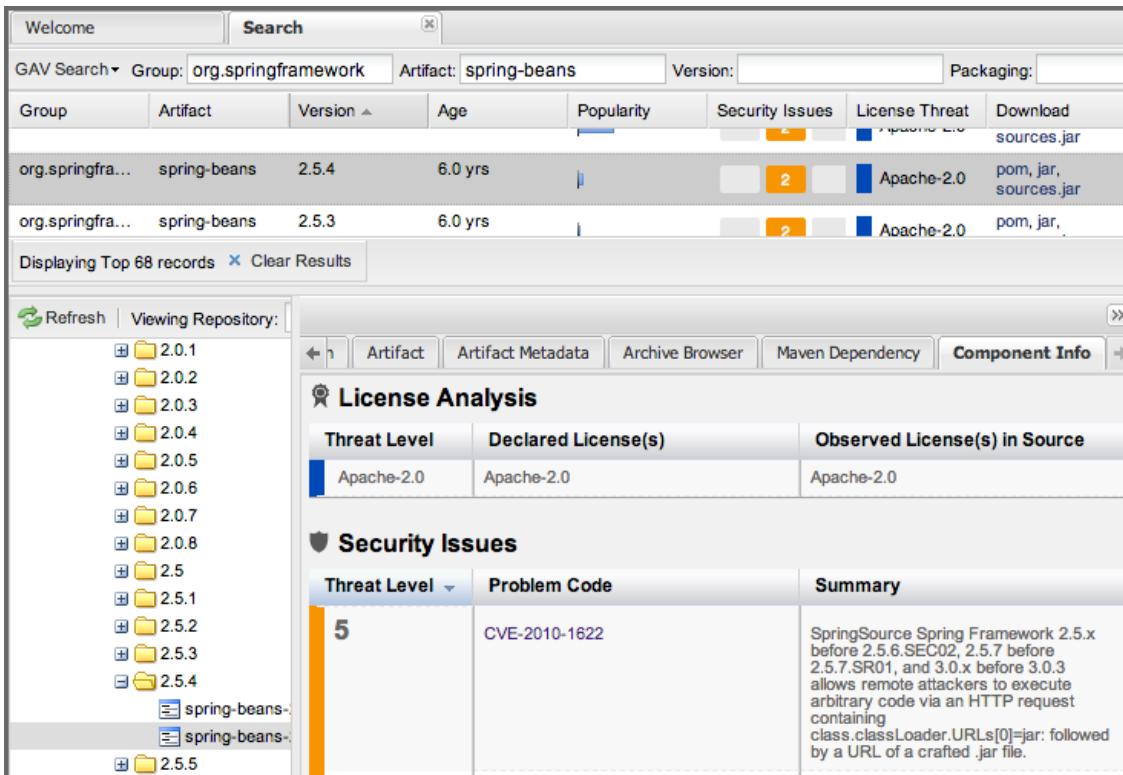


The screenshot shows the Nexus Repository Manager interface. On the left, there's a sidebar with a tree view of repository versions from 2.0.1 to 2.5.5. The '2.5.4' node is expanded, showing two entries for 'spring-beans'. The main search results table lists these two entries. The first entry is for version 2.5.4, which is highlighted. The second entry is for version 2.5.3. Both entries show an age of 6.0 yrs, a popularity score of 4, and 2 security issues. The threat level for both is Apache-2.0. The packaging listed is 'pom, jar, sources.jar'. Below the table, it says 'Displaying Top 68 records'.

The right side of the interface shows the 'Component Info' tab for the selected 'spring-beans' entry. It has two sections: 'License Analysis' and 'Security Issues'.

- License Analysis:** Shows Threat Level (Apache-2.0), Declared License(s) (Apache-2.0), and Observed License(s) in Source (Apache-2.0).
- Security Issues:** Shows Threat Level (5), Problem Code (CVE-2010-1622), and a detailed summary: "SpringSource Spring Framework 2.5.x before 2.5.6.SEC02, 2.5.7 before 2.5.7.SR01, and 3.0.x before 3.0.3 allows remote attackers to execute arbitrary code via an HTTP request containing class.classLoader.URLs[0]=jar: followed by a URL of a crafted .jar file."

Figure 5.24. GAV Search Results for `org.springframework:spring-beans` and Component Info Tab for Version 2.5.4

For example, after reading the summary and inspecting the entries for the security issues in the security databases linked in the *Problem Code* column, you decide that these issues affect your software and a fix is required. In order to determine your next steps you search for all versions of the `spring-beans` component. As a result you receive the list of all versions available partially displayed in *Figure 5.25, “Viewing Multiple Versions of `org.springframework:spring-beans:x`”*. The *Security* column in the search results list displays the count of two security issues for the version 2.5.4 of the library.

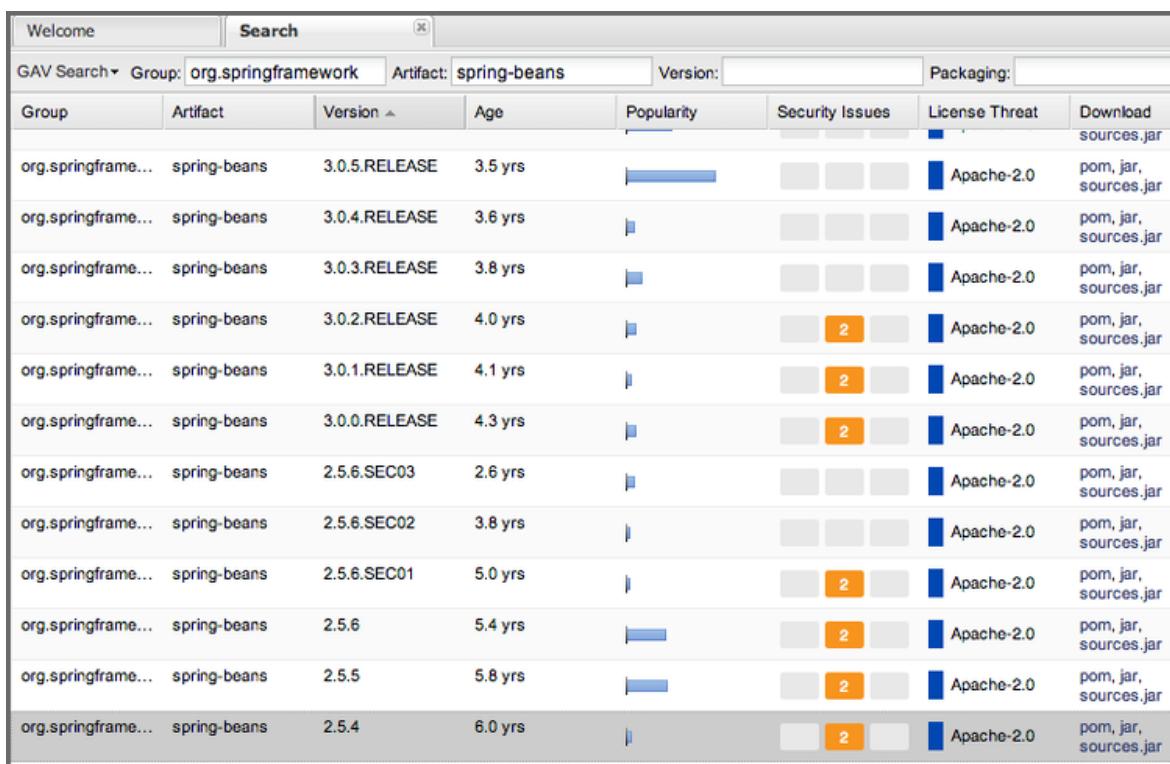

| Group | Artifact | Version | Age | Popularity | Security Issues | License Threat | Download sources.jar |
|---------------------|--------------|---------------|---------|------------------------------------|---|----------------|-----------------------|
| org.springframework | spring-beans | 3.0.5.RELEASE | 3.5 yrs | <div style="width: 80%;">80%</div> | <div style="width: 20%; background-color: #cccccc;"></div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 3.0.4.RELEASE | 3.6 yrs | <div style="width: 70%;">70%</div> | <div style="width: 30%; background-color: #cccccc;"></div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 3.0.3.RELEASE | 3.8 yrs | <div style="width: 60%;">60%</div> | <div style="width: 40%; background-color: #cccccc;"></div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 3.0.2.RELEASE | 4.0 yrs | <div style="width: 50%;">50%</div> | <div style="width: 50%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 3.0.1.RELEASE | 4.1 yrs | <div style="width: 40%;">40%</div> | <div style="width: 60%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 3.0.0.RELEASE | 4.3 yrs | <div style="width: 30%;">30%</div> | <div style="width: 70%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 2.5.6.SEC03 | 2.6 yrs | <div style="width: 20%;">20%</div> | <div style="width: 80%; background-color: #cccccc;"></div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 2.5.6.SEC02 | 3.8 yrs | <div style="width: 10%;">10%</div> | <div style="width: 90%; background-color: #cccccc;"></div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 2.5.6.SEC01 | 5.0 yrs | <div style="width: 5%;">5%</div> | <div style="width: 95%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 2.5.6 | 5.4 yrs | <div style="width: 10%;">10%</div> | <div style="width: 90%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 2.5.5 | 5.8 yrs | <div style="width: 15%;">15%</div> | <div style="width: 85%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |
| org.springframework | spring-beans | 2.5.4 | 6.0 yrs | <div style="width: 5%;">5%</div> | <div style="width: 95%; background-color: #ff8c00;">2</div> | Apache-2.0 | pom, jar, sources.jar |

Figure 5.25. Viewing Multiple Versions of org.springframework:spring-beans:x

Looking at the *Security Issues* column in the results allows you to determine that with the upgrade of the library to version 2.5.6.SEC02 the count of security issues drops to zero. The same applies to version 2.5.6.SEC03, which appears to be the latest version of the 2.x version of the component. In addition, the table shows that early versions of the 3.x releases were affected by security issues as well.

With these results, you decide that an immediate update to version 2.5.6.SEC03 will be required as your next step. In the longer term an update to a newer version of the 3.x or even 4.x releases will follow.

The necessary steps to upgrade depend on your usage of the `spring-beans` library. A direct usage of the library will allow you to upgrade it directly. In most cases, this will require an upgrade of other SpringFramework libraries. If you are indirectly using `spring-beans` as a transitive dependency, you will need to figure out how to upgrade either the dependency causing the inclusion or override the version used.


The detailed measures depend on the build system used, but in all cases you now have the information at your hands detailing why you should upgrade and what to what version to upgrade to. Nexus IQ Server offers tools for these migration efforts as well as various ways to monitor your development for security, license, and other issues.

Search Example: Resolving a License Issue

Available in Nexus Repository Pro only

The following example details how you can analyze a license issue of a component found in your repository health check and determine a solution with the help of information available in the repository manager. The same need for investigation might have been triggered by external means such as a need to do a legal review of all components as part of your release components and the requirement to manage a comprehensive bill of materials.

Your repository health check detail report indicated that Hibernate 3.2.7.ga²¹²³ might have issues due to its *Threat Level* declared as Non-Standard. Looking at your software components you found that you are indeed using this version of Hibernate. Searching for the component in the repository manager provides you with the search results list and the *Component Info* tab for the specific version displayed in Figure 5.26, “Viewing License Analysis Results for Hibernate”.

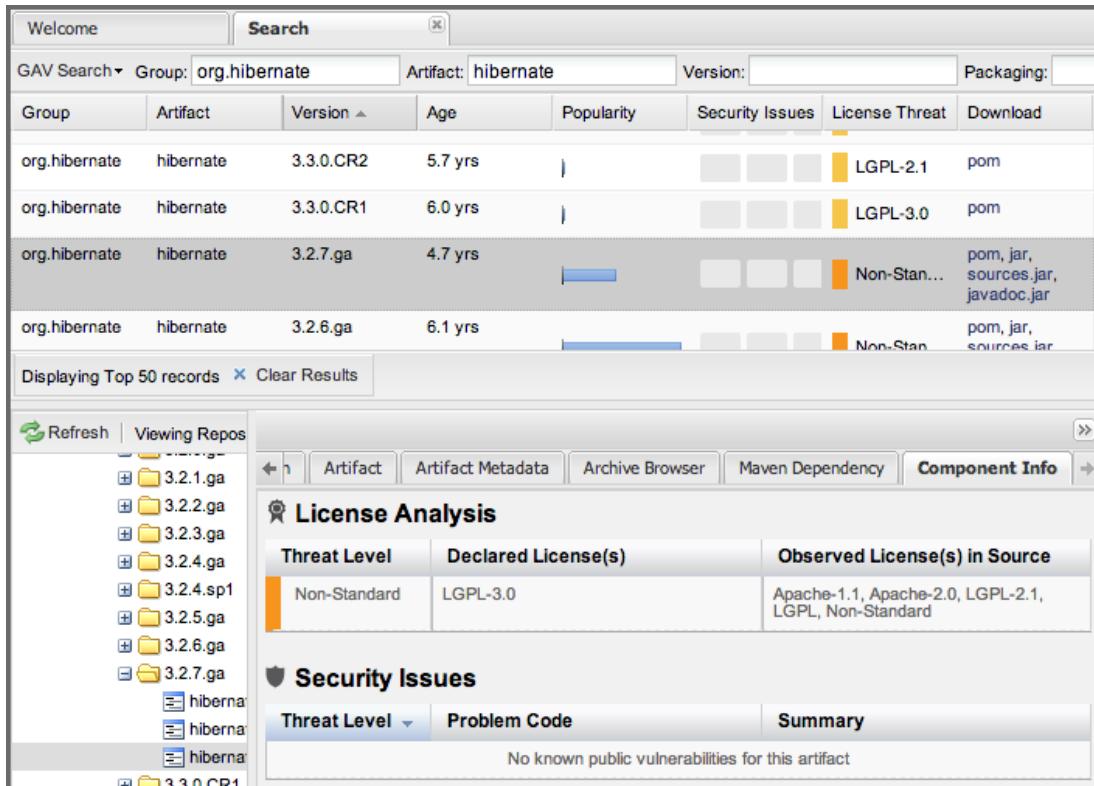

The screenshot shows the Nexus Repository Manager interface. The top navigation bar includes 'Welcome', 'Search' (selected), 'GAV Search', 'Group: org.hibernate', 'Artifact: hibernate', 'Version: ', and 'Packaging:'. Below this is a search results table:

| Group | Artifact | Version | Age | Popularity | Security Issues | License Threat | Download |
|---------------|-----------|-----------|---------|------------|---|---|--|
| org.hibernate | hibernate | 3.3.0.CR2 | 5.7 yrs | | | | LGPL-2.1 pom |
| org.hibernate | hibernate | 3.3.0.CR1 | 6.0 yrs | | | | LGPL-3.0 pom |
| org.hibernate | hibernate | 3.2.7.ga | 4.7 yrs | | | | Non-Stan... pom, jar, sources.jar, javadoc.jar |
| org.hibernate | hibernate | 3.2.6.ga | 6.1 yrs | | | | Non-Stan... pom, jar, sources.jar |

Below the table are buttons for 'Displaying Top 50 records' and 'Clear Results'. The bottom section shows the 'Component Info' tab for the selected version 3.2.7.ga. It displays 'License Analysis' and 'Security Issues' sections. In the 'License Analysis' section, it shows Threat Level (Non-Standard), Declared License(s) (LGPL-3.0), and Observed License(s) in Source (Apache-1.1, Apache-2.0, LGPL-2.1, LGPL, Non-Standard). The 'Security Issues' section shows Threat Level, Problem Code, and Summary (No known public vulnerabilities for this artifact).

Figure 5.26. Viewing License Analysis Results for Hibernate

The *Component Info* tab displays the declared license of Hibernate is the LGPL-3.0 license. Contrary to that, the licenses observed in the source code include Apache-1.1, Apache-2.0, LGPL-2.1, LGPL and Non-Standard.

Looking at newer versions of Hibernate you find that the observed license in the source code changed to Not-Provided. Given this change you can conclude that the license headers in the individual source code files were removed or otherwise altered and the declared license was modified to LGPL-2.1.

2123 <http://3.2.7.ga>

With this information in hand you determine that you will need to contact your lawyers to figure out if you are okay to upgrade to a newer version of Hibernate to remedy the uncertainty of the license. In addition, you will need to decide if the LGPL-2.0 is compatible with the distribution mechanism of your software and approved by your lawyers.

Uploading Components

When your build makes use of proprietary or custom dependencies that are not available from public repositories, you will often need to find a way to make them available to developers in a custom Maven repository. Nexus Repository Manager Pro and Nexus Repository Manager OSS ship with a preconfigured third-party repository that was designed to hold third-party dependencies that are used in your builds. To upload components to a repository, select a hosted repository in the *Repositories* panel and then click on the *Artifact Upload* tab, which will display the tab shown in *Figure 5.27, “Component Upload Tab”*.

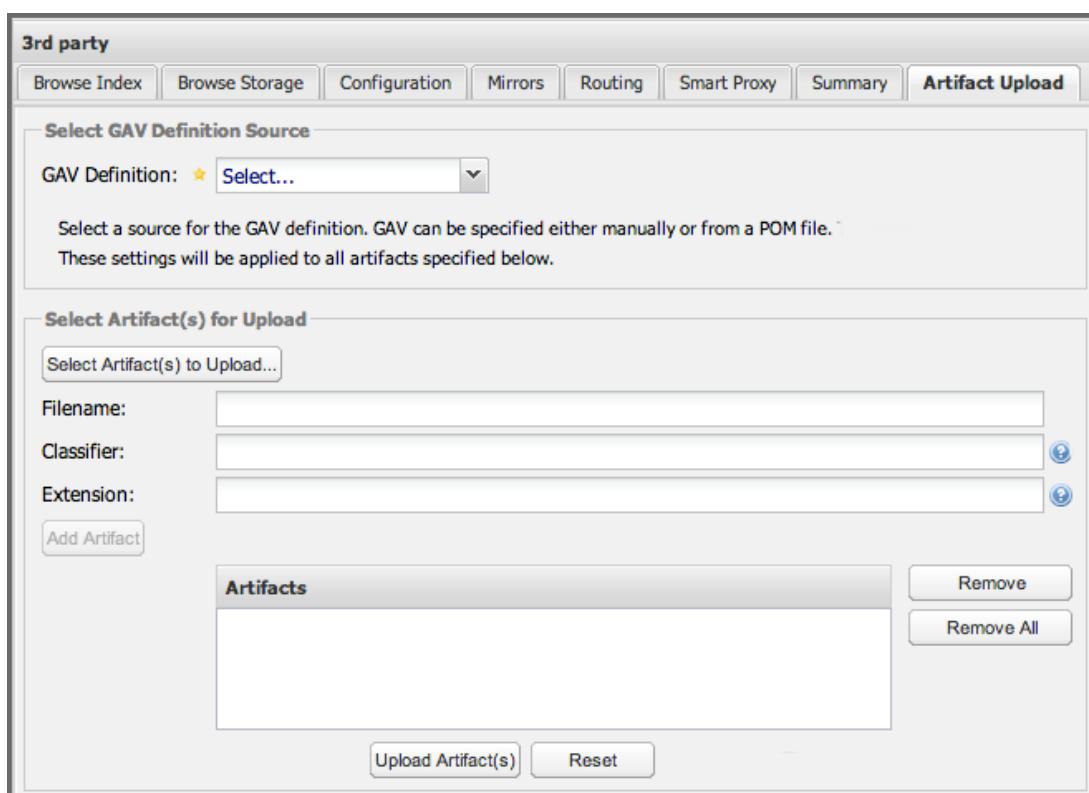


Figure 5.27. Component Upload Tab

To upload a component, click on *Select Artifact(s) to Upload...*, and select one or more components from the filesystem to upload. Once you have selected a component, you can modify the classifier and the extension before clicking on the *Add Artifact* button. Then you can then configure the source of the *Group*, *Artifact*, *Version* (*GAV*) parameters.

If the component you are uploading is a jar file that was created by Maven it will already have POM information embedded in it. If you are uploading a jar from a vendor you will likely need to set the group identifier, component identifier, and version manually. To do this, select *GAV Parameters* from the *GAV*

Definition drop-down at the top of this form. This will expose a set of form fields which will let you set the *Group*, *Artifact*, *Version* and *Packaging* of the components being uploaded. *Packaging* can be selected from the list or provided by typing the value into the input box.


If you would prefer to set the group, component, and version from a POM file associated with the uploaded component, select *From POM in the GAV Definition* drop-down. This will expose a button labeled *Select POM to Upload*. Once a POM file has been selected for upload, the name of the POM file will be displayed in the form field below this button.

- ⓘ Uploading a POM file allows you to add further details like dependencies to the file, which improves the quality of the upload by enabling transitive dependency management.

The *Artifact Upload* panel supports multiple components with the same group, component, and version identifiers. For example, if you need to upload multiple components with different classifiers, you may do so by clicking on *Select Artifact(s) for Upload* and *Add Artifact* multiple times. A common use case for this upload is to upload the pom and jar file as well as the javadoc and sources jar files file for a component.

Browsing System Feeds

Nexus Repository Manager provides feeds that expose system events. You can browse these feeds by clicking on *System Feeds* under the *Views.Repositories* menu, which will show the panel in *Figure 5.28, “Browsing System Feeds”*. You can use this simple interface to browse the most recent reports of component deployments, cached components, broken components, storage changes and other events that have occurred in the repository manager.

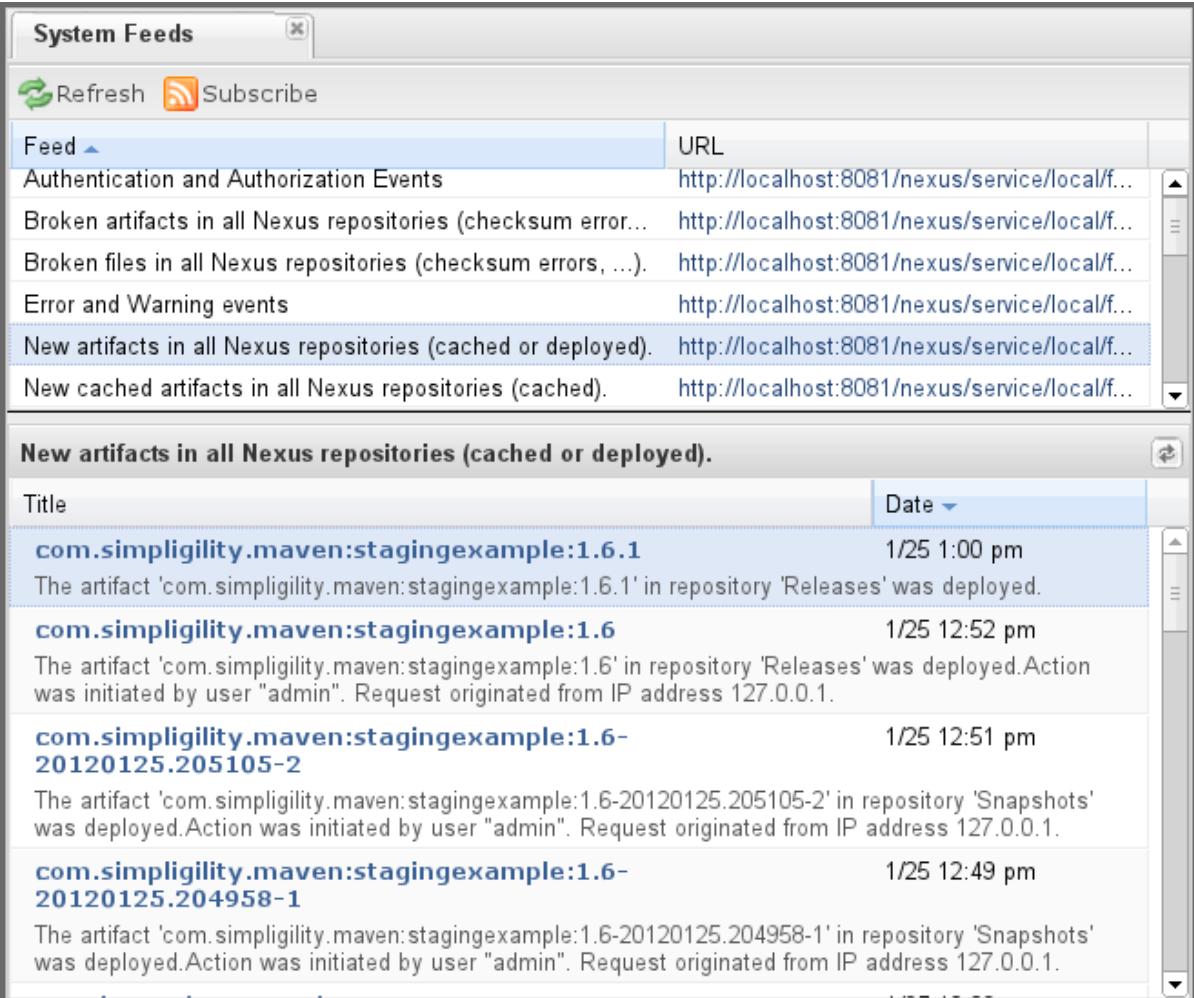

| Feed | URL |
|--|---|
| Authentication and Authorization Events | http://localhost:8081/nexus/service/local/f... |
| Broken artifacts in all Nexus repositories (checksum error...) | http://localhost:8081/nexus/service/local/f... |
| Broken files in all Nexus repositories (checksum errors, ...) | http://localhost:8081/nexus/service/local/f... |
| Error and Warning events | http://localhost:8081/nexus/service/local/f... |
| New artifacts in all Nexus repositories (cached or deployed). | http://localhost:8081/nexus/service/local/f... |
| New cached artifacts in all Nexus repositories (cached). | http://localhost:8081/nexus/service/local/f... |

New artifacts in all Nexus repositories (cached or deployed).

| Title | Date |
|--|---------------|
| com.simpligility.maven:stagingexample:1.6.1 | 1/25 1:00 pm |
| The artifact 'com.simpligility.maven:stagingexample:1.6.1' in repository 'Releases' was deployed. | |
| com.simpligility.maven:stagingexample:1.6 | 1/25 12:52 pm |
| The artifact 'com.simpligility.maven:stagingexample:1.6' in repository 'Releases' was deployed. Action was initiated by user "admin". Request originated from IP address 127.0.0.1. | |
| com.simpligility.maven:stagingexample:1.6-20120125.205105-2 | 1/25 12:51 pm |
| The artifact 'com.simpligility.maven:stagingexample:1.6-20120125.205105-2' in repository 'Snapshots' was deployed. Action was initiated by user "admin". Request originated from IP address 127.0.0.1. | |
| com.simpligility.maven:stagingexample:1.6-20120125.204958-1 | 1/25 12:49 pm |
| The artifact 'com.simpligility.maven:stagingexample:1.6-20120125.204958-1' in repository 'Snapshots' was deployed. Action was initiated by user "admin". Request originated from IP address 127.0.0.1. | |

Figure 5.28. Browsing System Feeds

These feeds can come in handy if you are working at a large organization with multiple development teams deploying to the same repository manager. In such an arrangement, all developers in an organization can subscribe to the RSS feeds for New Deployed Artifacts as a way to ensure that everyone is aware when a new release has been pushed to a repository. Exposing these system events as RSS feeds also opens the door to other, more creative uses of this information, such as connecting the repository manager to external, automated testing systems.

To access the RSS feeds for a specific feed, select the feed in the *System Feeds* view panel and then click on the *Subscribe* button. This will then load the RSS feed in your browser and you can subscribe to the feed in your favorite RSS.

There are a number of system feeds available in the *System Feeds* view and each has a URL that resembles the following URL:

<http://localhost:8081/nexus/service/local/feeds/recentlyChangedFiles>

The URLs can be amended with the parameters from and count to specify the dataset viewed. For example:

```
http://localhost:8081/nexus/service/local/feeds/recentlyDeployedArtifacts?count=100
```

Where recentChanges would be replaced with the identifier of the feed you were attempting to read.

Available system feeds include:

- Authentication and Authorization Events
- Broken components in all repositories
- Broken files in all repositories
- Error and Warning events
- New components in all repositories
- New cached components in all repositories
- New cached files in all repositories
- New cached release components in all repositories
- New deployed components in all repositories
- New deployed files in all repositories
- New deployed release components in all repositories
- New files in all repositories
- New release components in all repositories
- Recent component storage changes in all repositories
- Recent file storage changes in all repositories
- Recent release component storage changes in all repositories
- Repository Status Changes in Nexus Repository Manager
- System changes in Nexus Repository Manager

Support Tools

Support Tools provides a collection of useful information for monitoring and analyzing your Nexus Repository Manager installation. You can access the Support Tools in the *Administration* submenu of the main menu.

System Information

The System Information tab displays a large number of configuration details related to:

Nexus

details about the versions of Nexus Repository Manager and the installed plugins, install and work directory location, application host and port and a number of other properties

Java Virtual Machine

all system properties, like `java.runtime.name`²¹²⁴ and `os.name`²¹²⁵, as recognized by the JVM running the repository manager

Operating System

including environment variables like `JAVA_HOME` or `PATH` as well as details about the runtime in terms of processor, memory and threads, network connectors and storage file stores

You can copy a subsection of the text from the panel, use the *Download* button to get a text file or use the *Print* button to produce a document.

Support Zip


The Support ZIP tab allows you to create a zip archive file that you can submit to Sonatype support via email or a support ticket. The checkboxes in *Contents* and *Options* allow you to control the content of the archive.

You can include *System Information* as available in the System Information tab, a *Thread Dump* of the JVM currently running the repository manager, your general *Configuration* as well as your *Security Configuration*, the logs and a *Metrics* file with network and request-related information.

The options allow you to limit the size of the included files as well as the overall file size. Pressing the *Create* button will gather all files and create the archive in `sonatype-work/nexus/support` and open a dialog to download the file to your workstation.

Working with Your User Profile

As a logged-in user, you can click on your user name in the top right-hand corner of the user interface to expose a drop-down with an option to *Logout* as well as to access your user *Profile*. Once you have selected to display your profile, you will get access to the *Summary* section of the *Profile* tab as displayed in *Figure 5.29, “Summary Section of the Profile Tab”*.

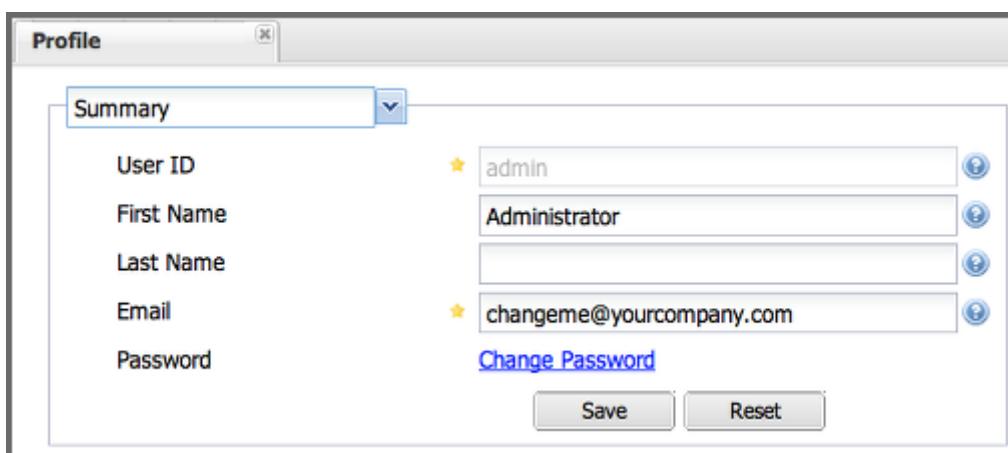

²¹²⁴ <http://java.runtime.name>

²¹²⁵ <http://os.name>

Figure 5.29. Summary Section of the Profile Tab

The *Summary* section allows you to edit your *First Name*, *Last Name* and *Email* directly in the form.

Changing Your Password

In addition to changing your name and email, the user profile allows you to change your password by clicking on the Change Password text. The dialog displayed in *Figure 5.30, “Changing Your Password”* will be displayed and allow you to supply your current password, and choose a new password. When you click on Change Password, your password will be changed.

**Figure 5.30. Changing Your Password**

The password change feature only works with the built-in XML Realm security realm. If you are using a different security realm like LDAP or Crowd, this option will not be visible.

Additional User Profile Tabs

The *Profile* tab can be used by other plugins and features to change or access user specific data and functionality. One such use case is the *User Token* access documented in [Security Setup with User Tokens](#)(see page 0).

Configuration

 Many of the configuration screens shown in this section are only available to administrative users. Nexus Repository Manager allows the admin user to customize the list of repositories, create repository groups, customize server settings, and create routes or "rules" that Maven will use to include or exclude components from a repository.

Topics in this section:

- [Customizing Server Configuration\(see page 267\)](#)
- [Managing Repositories\(see page 274\)](#)
- [Managing Repository Groups\(see page 286\)](#)
- [Managing Routing\(see page 288\)](#)
- [Managing Scheduled Tasks\(see page 293\)](#)
- [Accessing and Configuring Capabilities\(see page 301\)](#)
- [Customizing the User Interface with Branding\(see page 303\)](#)
- [Configuring Outreach Content in Welcome Tab\(see page 303\)](#)
- [Network Configuration\(see page 304\)](#)
- [Logging\(see page 304\)](#)
- [Plugins and the REST API\(see page 306\)](#)
- [Managing Security\(see page 308\)](#)
- [Managing Roles\(see page 313\)](#)
- [Managing Users\(see page 316\)](#)
- [Security Setup with User Tokens\(see page 318\)](#)
- [Authentication via Remote User Token\(see page 323\)](#)

Customizing Server Configuration

Available in Nexus Repository OSS and Nexus Repository Pro

You can access global configuration by clicking on *Server* under *Administration* in the left-hand main menu. The server configuration screens' subsections are documented in the following sections.

SMTP Settings

Nexus Repository Manager sends email to users who need to recover user names and passwords, notifications for staging and a number of other uses. In order for these notifications to work, configure the SMTP server settings in this dialog.

You can configure the *Hostname* and *Port* of the SMTP server to use as well as *Username* and *Password*. The *Connection* configuration allows you to configure Nexus Repository Manager to use plain or secure SMTP to connect to the server or to use STARTTLS for the connection, which would upgrade the initially established, plain connection to be encrypted. In all cases you will need to ensure that the correct port is used.

The *System Email* parameter defines the email address used in the `From:` header of an email sent by the repository manager. Typically, this would be configured as a "Do-Not-Reply" email address or a mailbox or mailing list monitored by the administrators of the server.

Once you have configured the parameters you can use the *Test SMTP settings* button to confirm the configured parameters and the successful connection to the server. You will be asked to provide an email address that should receive a test email message. Successful sending will be confirmed in another pop up message.

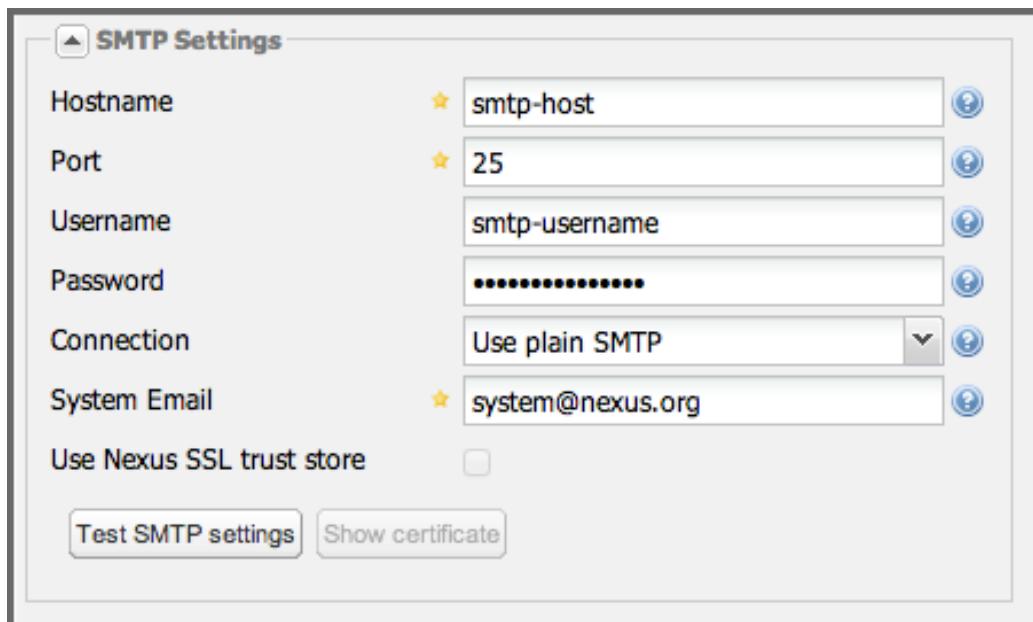


Figure 6.1. Administration SMTP Settings

HTTP Request Settings

The HTTP Request Settings allow you to configure the identifier that the repository manager uses when it is making an HTTP request. You may want to change this if it needs to use an HTTP Proxy and the Proxy will only work if the User Agent is set to a specific value.

You can also add extra parameters to place on a GET request to a remote repository. You could use this to add identifying information to requests.

The amount of time the repository manager will wait for a request to succeed when interacting with an external, remote repository can be configured with the *Request Timeout* and *Request Retry Attempts* settings.

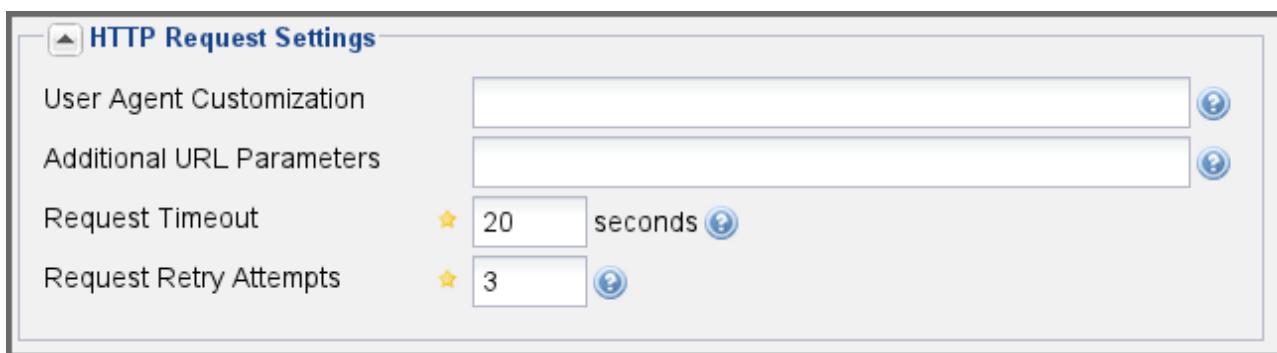


Figure 6.2. Administration HTTP Request Settings

Security Settings

The security settings displayed in *Figure 6.3, "Administration Security Settings"* allow you to activate and prioritize security realms by adding them to the *Selected Realms* list on the left and placing them higher or lower on the list.

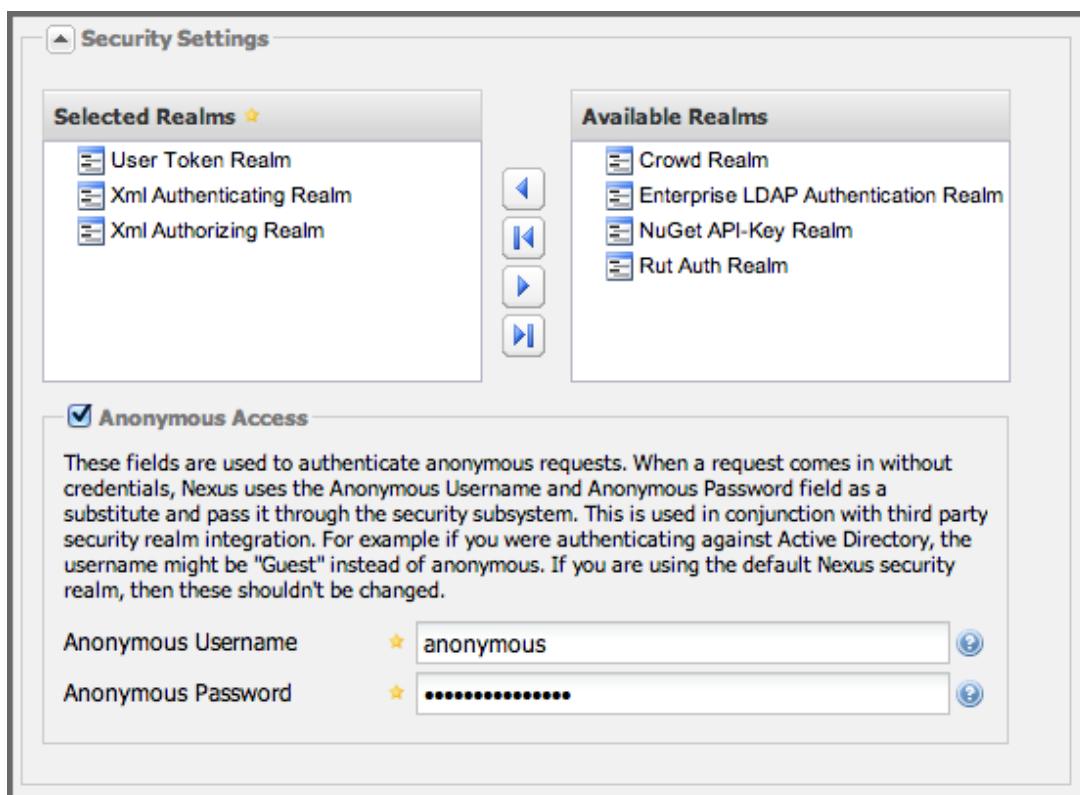


Figure 6.3. Administration Security Settings

Effectively, this configuration determines what authentication realm is used to grant a user access and the order the realms are used.

Xml Authenticating and Xml Authorizing Realm

These identify the internal storage of the repository manager. It is using XML files for storing the security details.

(Enterprise) LDAP Authentication Realm

This realm identifies external storage in an LDAP system with details documented in [LDAP Integration](#)(see page 333)

Crowd Realm

This realm identifies external storage in an Atlassian Crowd system with details documented in [Atlassian n Crowd Support](#)(see page 354)

Rut Auth Realm

This realm is external authentication in any system with the user authorization passed to the repository manager in a HTTP header field with details documented in [Authentication via Remote User Token](#)(see page 323)


The User Token Realm is required for user token support documented in [Security Setup with User Tokens](#)(see page 318) and the NuGet API-Key Realm is needed for NuGet support documented in [.NET Package Repositories with NuGet](#)(see page 444).

In addition, you can enable or disable anonymous access and set the username and password for anonymous access. The anonymous username and password are used to integrate with other realms that may need a special username for anonymous access. In other words, the username and password here are what we attempt to authorize when someone makes an anonymous request. You would change the anonymous username to guest if you wanted to integrate the repository manager with Microsoft's Active Directory.

Application Server Settings

You can change the Base URL for your repository manager installation, which is used when generating links in emails and RSS feeds. For example, the Nexus Repository Manager Pro instance for Sonatype development is at <https://repository.sonatype.org>, and it makes use of this *Base URL* field to ensure that links in emails and RSS feeds point back to the correct public URL. Internally Nexus Repository Manager Pro is running on a different port and context than the public port 80 and root context.

- ! Do not enable Force Base URL unless explicitly advised by Sonatype - enabling this will most likely cause your repository manager to not work properly through a reverse proxy. The original use case for forcing base URL is no longer valid.

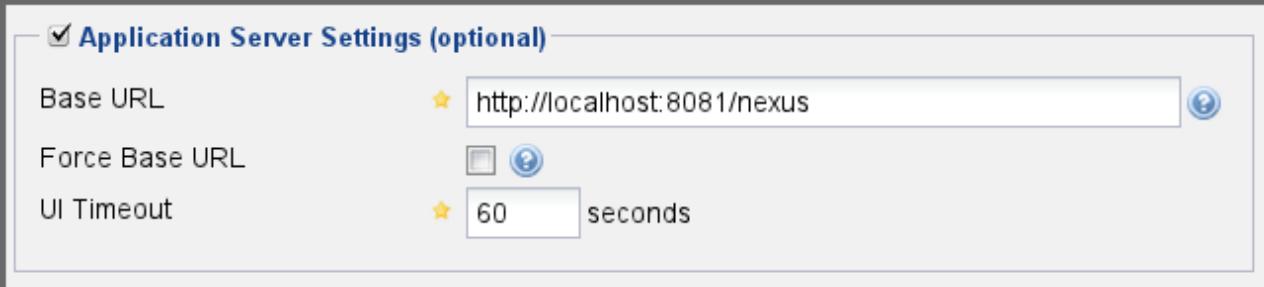

The screenshot shows the 'Application Server Settings (optional)' section. It includes fields for 'Base URL' (set to 'http://localhost:8081/nexus'), 'Force Base URL' (unchecked), and 'UI Timeout' (set to '60 seconds'). A yellow star icon is present next to each field.

Figure 6.4. Administration Application Server Settings

These settings are especially important if the repository manager is proxied by an external proxy server using a different protocol like HTTPS rather than plain HTTP known to it or a different hostname like [repository.somecompany.com](#)²¹²⁶ instead of an IP number only.

Default HTTP and HTTPS Proxy Settings

If your repository manager instance needs to reach public repositories like the Central Repository via a proxy server, you can configure the connection to a proxy server for HTTP and a potentially a different for HTTPS connection. If you do not configure a proxy for HTTPS, the HTTP proxy server settings will be used.

You can specify Proxy Host and Proxy Port and, optionally, the authentication details for username, password, NT LAN Host and NT LAN Manager Domain. In addition, you can configure a number of hosts that can be reached directly and do not need to go through the proxy in the *Non Proxy Host* setting. *Figure 6.5, “Administration Default HTTP Proxy Settings”* shows the *Default HTTP Proxy Settings* administration interface. The HTTPS configuration interface looks the same and is found below the HTTP configuration.

²¹²⁶ <http://repository.somecompany.com>

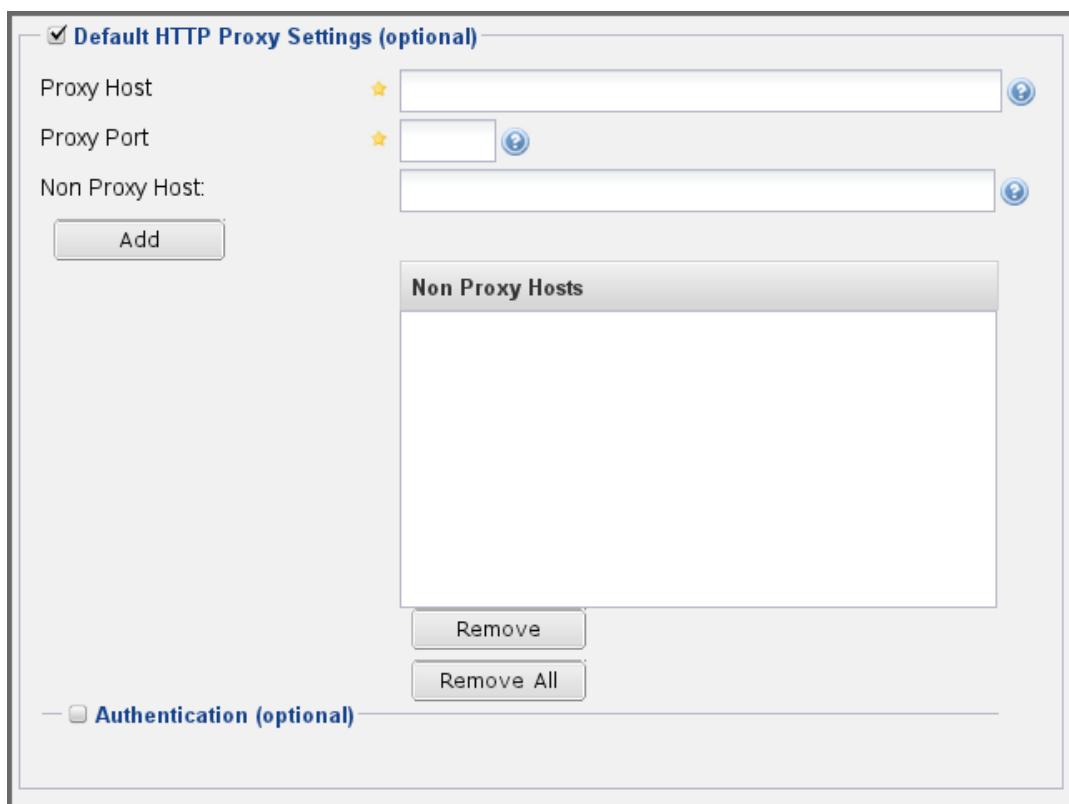


Figure 6.5. Administration Default HTTP Proxy Settings

- ⓘ This is a critical initial step for many Enterprise deployments of a repository manager, since these environments are typically secured via a HTTP/HTTPS proxy server for all outgoing internet traffic.

System Notification Settings

When you proxy remote repositories that are not available all the time, the repository manager will automatically block and unblock them during downtimes. The *System Notification Settings* allows you define *Email Addresses* and roles for users that should receive notifications messages for these blocking and unblocking events.

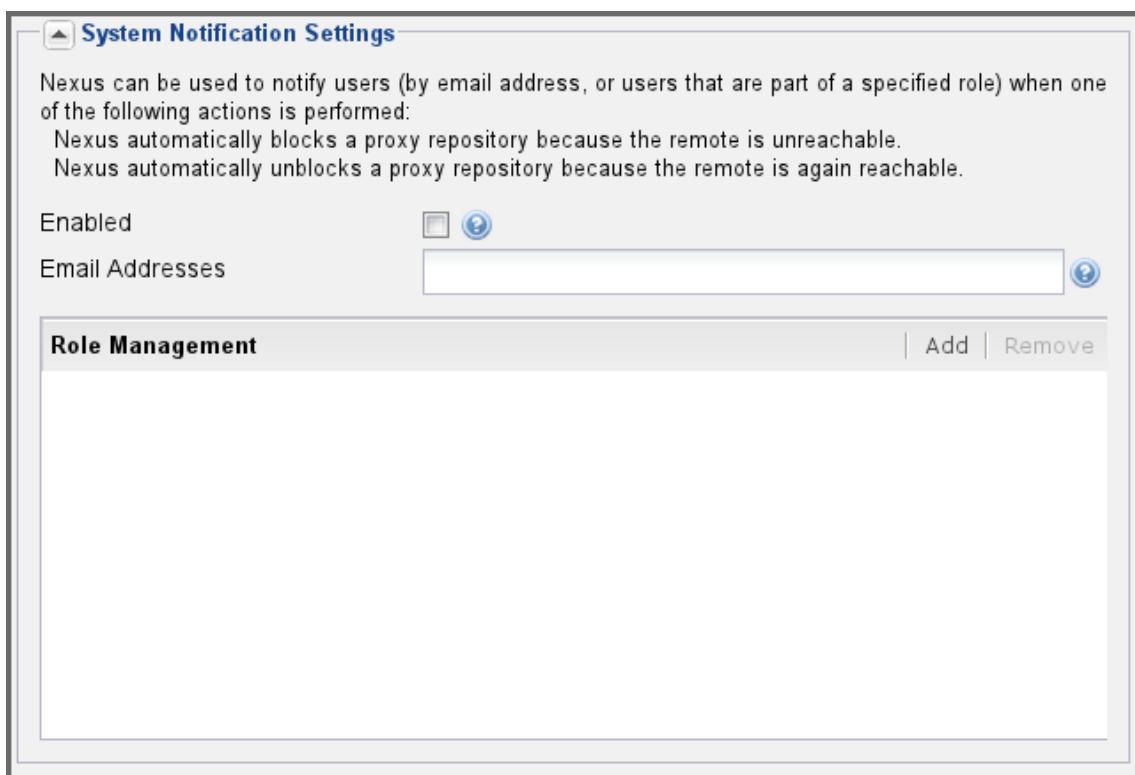


Figure 6.6. Administration System Notification Settings

PGP Key Server Information

Nexus Repository Manager uses a PGP Key Server to retrieve PGP keys when validating component signatures. To add a new key server, enter the URL in the *Key Server URL* field and click on the *Add* button. To remove a key server, click on the URL you wish to remove from the list and click on the *Remove* button. Key servers are consulted in the order that they are listed in the *Key Server URLs* list. To reorder your key servers, click and drag a URL in the *Key Server URLs* list.



Figure 6.7. Administration PGP Key Server Information

New Version Availability

Nexus Repository Manager can notify you about the availability of new versions via the user interface. To enable this feature, check the *Enable* checkbox in the *New Version Availability* section of the server settings as shown in *Figure 6.8, "Administration New Version Availability"*.



Figure 6.8. Administration New Version Availability

Managing Repositories

To manage repositories, log in as the administrative user and click on *Repositories* in the *Views/Repositories* menu in the left-hand main menu.

Nexus Repository Manager provides for three different kinds of repositories: Proxy repositories, Hosted repositories and Virtual repositories.

Proxy Repository

A *Proxy Repository* is a proxy of a remote repository. By default, Nexus Repository Manager ships with the following configured proxy repositories:

Apache Snapshots

This repository contains snapshot releases from the Apache Software Foundation

Central

This is the Central Repository containing release components. Formerly known as Maven Central, it is the default built-in repository for Apache Maven and directly supported in other build tools like Gradle, SBT or Ant/Ivy. Nexus Repository Manager connects to the Central Repository via HTTPS using the URL <https://repo1.maven.org/maven2/>.

Hosted Repository

A Hosted Repository is a repository that is hosted by the repository manager. Nexus Repository Manager ships with the following configured hosted repositories:

3rd Party

This hosted repository can be used for third-party dependencies not available in the public Maven repositories. Examples of these dependencies could be commercial, proprietary libraries such as an Oracle JDBC driver that may be referenced by your organization.

Releases

This hosted repository is where your organization can publish internal Maven releases

Snapshots

This hosted repository is where your organization can publish internal Maven snapshots


Virtual Repository

A Virtual Repository serves as an adaptor to and from different types of repositories. Currently, Nexus Repository Manager Pro supports conversion to and from Maven 1 repositories and Maven 2 repositories. In addition, you can expose any repository format as a NuGet or OBR repository. For example, a Maven 2 repository can contain OSGi Bundles, which can be exposed as a OSGi Bundle repository with the virtual repository Provider set to OBR. By default it ships with a Central M1 shadow repository that exposes the Central repository in Maven 1 format.

Configuring Repositories

The *Repositories* window displayed in *Figure 6.9, “Repository Configuration Screen for a Proxy Repository”* allows you to create and delete different repositories with the *Add* and *Delete* buttons, as well as update repositories. Use the *Refresh* button to update the displayed list of repositories and repository groups. The *Trash* button allows you to empty the trash folder into which deleted components are copied, when any delete operations are performed from the user interface.

By default, the list of repositories displays the repositories configured and managed by the administrator. The drop down on the right of the *Trash* button allows you to switch the list of repositories and view the repositories managed by the repository manager. There are staging repositories as documented in [Staging Releases](#)(see page 380) or procurement repositories as documented in [Procurement Suite](#)(see page 366).

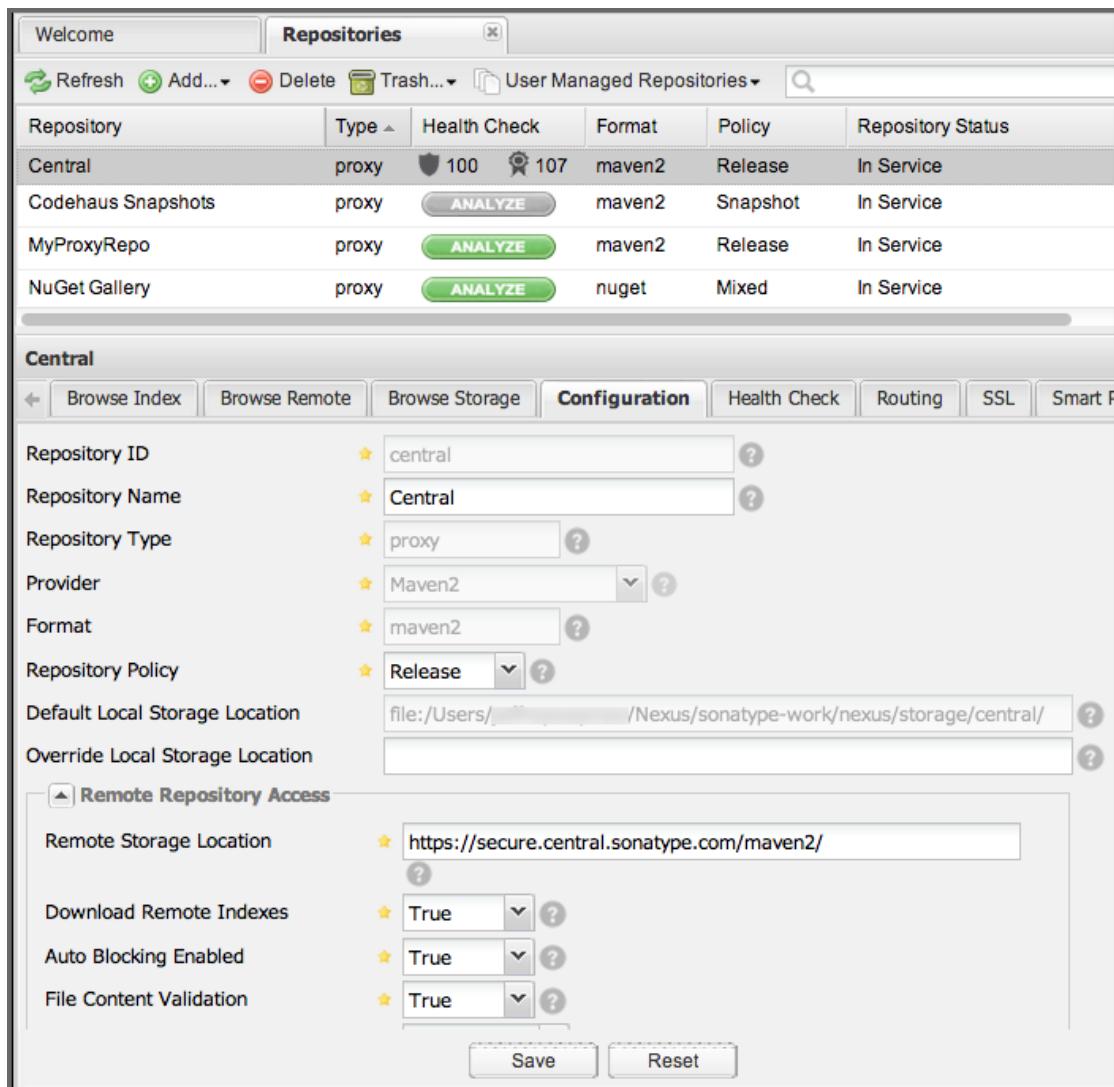

The screenshot shows the 'Repositories' screen of the Nexus Repository Manager 2. At the top, there is a toolbar with 'Refresh', 'Add...', 'Delete', 'Trash...', 'User Managed Repositories', and a search bar. Below the toolbar is a table listing four repositories:

| Repository | Type | Health Check | Format | Policy | Repository Status |
|--------------------|-------|--|--------|----------|-------------------|
| Central | proxy | shield icon 100 award icon 107 | maven2 | Release | In Service |
| Codehaus Snapshots | proxy | ANALYZE | maven2 | Snapshot | In Service |
| MyProxyRepo | proxy | ANALYZE | maven2 | Release | In Service |
| NuGet Gallery | proxy | ANALYZE | nuget | Mixed | In Service |

Below the table, the configuration for the 'Central' repository is shown. The 'Configuration' tab is selected. The configuration fields are:

- Repository ID: central
- Repository Name: Central
- Repository Type: proxy
- Provider: Maven2
- Format: maven2
- Repository Policy: Release
- Default Local Storage Location: file:/Users/.../Nexus/sonatype-work/nexus/storage/central/
- Override Local Storage Location: (empty)
- Remote Repository Access:
 - Remote Storage Location: https://secure.central.sonatype.com/maven2/
 - Download Remote Indexes: True
 - Auto Blocking Enabled: True
 - File Content Validation: True

At the bottom of the configuration panel are 'Save' and 'Reset' buttons.

Figure 6.9. Repository Configuration Screen for a Proxy Repository

The list of repositories visible in *Figure 6.9, “Repository Configuration Screen for a Proxy Repository”* allows you to access more details for each repository by selecting a specific row which displays some information for each repository in the following columns:

Repository

the name of the repository with repository groups displayed in bold

Type

the type of the repository with values of proxy, hosted or virtual for repositories or group for a repository group

Health Check

the result counts for a repository health check

Format

the format used for the storage in the repository with values such as *maven2, nuget, site*

Policy

the deployment policy that applies to this repository. A policy applies only to Maven 1 and Maven 2 formatted repositories and allows usage of a Snapshot or a Release policy.

Repository Status

the status of the repository as well as further information about the status. For example, information about SSL certification problems or the status of the remote repository even for a currently disabled proxy repository

Repository Path

the direct URL path that exposes the repository via HTTP access and potentially allows access and directory browsing outside of the user interface

Clicking on a column header allows you to sort the list in ascending or descending order based on the column data.

If you right-click on a row, you can trigger a number of actions on the current repository, depending on the repository type. Actions include:

Expire Cache

expire the cache of hosted or a proxy repository or a repository group

Rebuild Metadata

rebuild the metadata of a hosted Maven 2 repository

Block Proxy / Allow Proxy


toggle between allowing or blocking the remote repository configured in a proxy repository

Put Out Of Service / Put in Service

enable or disable the repository service to allow changing the availability of all components in it

Repair Index / Update Index

repair or update the index of a hosted or proxy repository or a repository group

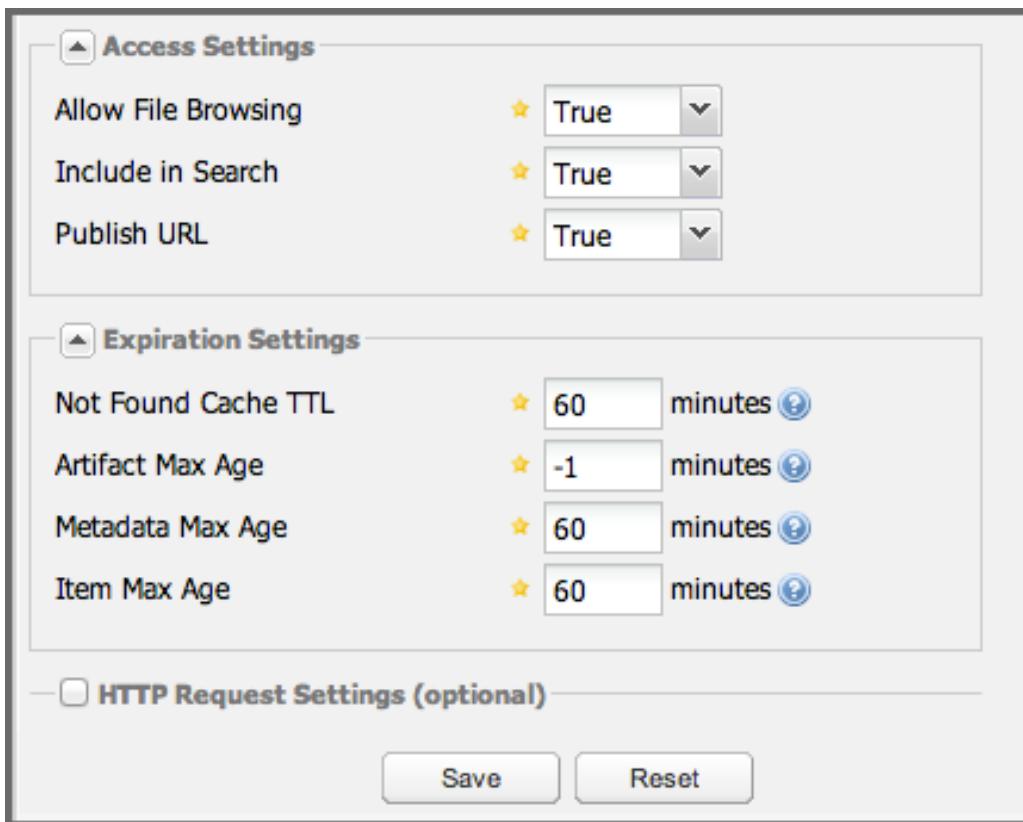

The screenshot shows the configuration interface for a proxy repository. It includes three main sections:

- Access Settings:** Contains three settings: "Allow File Browsing" (True), "Include in Search" (True), and "Publish URL" (True).
- Expiration Settings:** Contains four settings:
 - "Not Found Cache TTL": 60 minutes
 - "Artifact Max Age": -1 minutes
 - "Metadata Max Age": 60 minutes
 - "Item Max Age": 60 minutes
- HTTP Request Settings (optional):** Contains two buttons: "Save" and "Reset".

Figure 6.10. Additional Configuration for a Proxy Repository

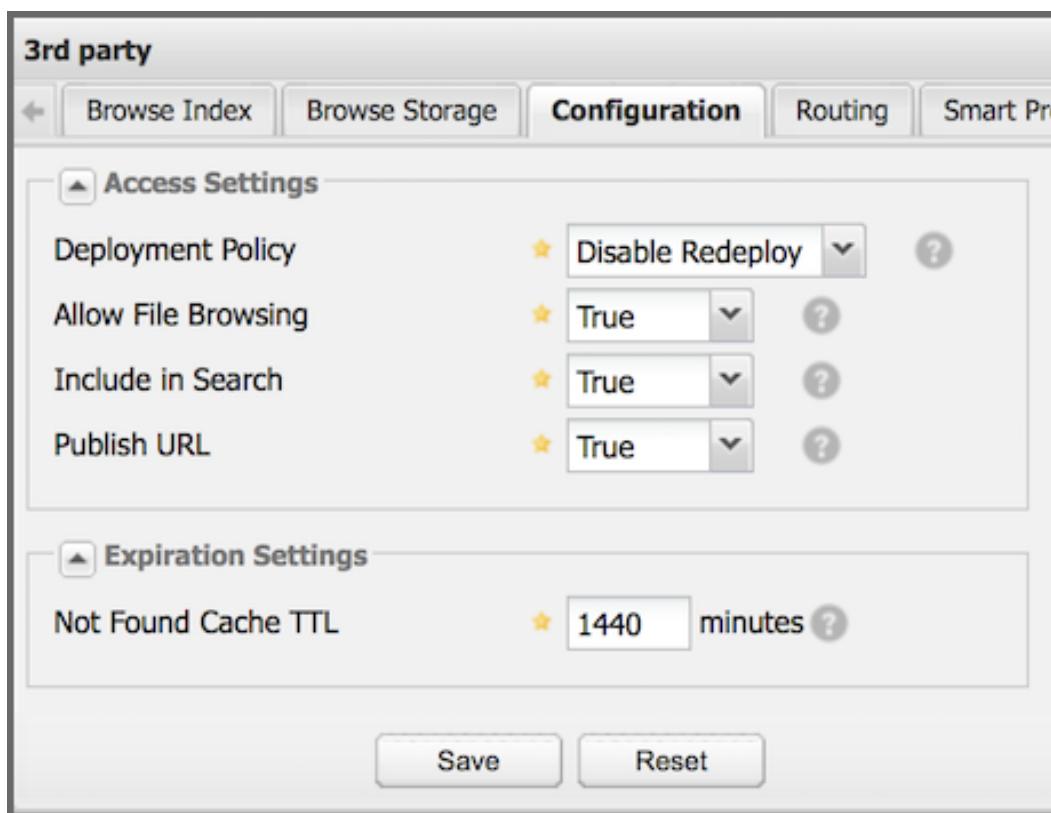


Figure 6.11. Repository Configuration Access Settings for a Hosted Repository

The bottom of *Figure 6.9, “Repository Configuration Screen for a Proxy Repository”* and *Figure 6.10, “Additional Configuration for a Proxy Repository”* combined show the repository configuration screen for a proxy repository in the repository manager. From this screen, you can manage the settings for proxying an external repository as follows:

Repository ID

The repository ID is the identifier that will be used in the URL. For example, the proxy repository for the Central Repository has an ID of central, this means that Maven and other tools can access the repository directly at <http://localhost:8081/nexus/content/repositories/central>. The Repository ID must be unique in a given repository manager installation and is required.

Repository Name

The display name for a repository which is required

Repository Type

The type of repository (proxy, hosted, or virtual). You can't change the type of a repository as it is selected when you create a repository.

Provider (and Format)

Provider (and Format) define in what format the repository manager exposes the repository to external tools. The Format is auto-generated by the selection made in the Provider field and is not editable on its

own. Nexus Repository Manager OSS includes support for Maven 1, Maven 2, npm, NuGet, Rubygems and Site repositories. Nexus Repository Manager Pro adds support for OBR as well as P2 and P2 Update Site proxies.

Repository Policy

If a proxy repository has a policy of release, then it will only access released versions from the remote repository. If a proxy repository has a policy of snapshot, it will only download snapshots from the remote repository.

Default Storage Location

Not editable, shown for reference. This is the default storage location for the local cached contents of the repository.

Override Storage Location

You can choose to override the storage location for a specific repository. You would do this if you were concerned about storage and wanted to put the contents of a specific repository (such as central) in a different location.

Remote Repository Access

This section configures proxy repositories and how the repository manager interacts with the remote repository, that is being proxied.

Remote Storage Location

The Remote Storage Location needs to be configured with the URL of the remote repository that needs to be proxied. When selecting the URL to proxy, it is beneficial to avoid proxying remote repository groups. Proxying repository groups prevents some performance optimization in terms of accessing and retrieving the content of the remote repository. If you require components from the group that are found in different hosted repositories on the remote repository server it is better to create multiple proxy repositories that proxy the different hosted repositories from the remote server on your repository manager instead of simply proxying the group.

Download Remote Indexes

Downloading the index of a remote repository can be configured with this setting. If enabled, the repository manager will download the index, if it exists, and use that for its searches as well as serve that up to any clients that ask for the index (like m2eclipse). The default for new proxy repositories is enabled, but all of the default repositories included have this option disabled. To change this setting for one of the proxy repositories that ships with the repository manager, change the option, save the repository, and then re-index the repository. Once this is done, component search will return every component available.

Auto Blocking Enabled

If *Auto Blocking Enabled* is set to *True*, the repository manager will automatically block a proxy repository if the remote repository becomes unavailable. While a proxy repository is blocked, components will still be served to clients from a local cache, but the repository manager will not

attempt to locate a component in a remote repository. The repository manager will periodically retest the remote repository and unblock the repository once it becomes available.

File Content Validation

If set to *True*, the repository manager will perform a lightweight check on the content of downloaded files. This will prevent what the repository manager believes to be invalid content to be stored and proxied by the repository manager for that format. For example, in cases where the remote repository (or some proxy between the repository manager and the remote repository) returns a HTML page instead of the requested file.

Checksum Policy

Sets the checksum policy for a remote repository. This option is set to *Warn* by default. The possible values of this setting are:

- Ignore - Ignore the checksums entirely
- Warn - Print a warning in the log if a checksum is not correct
- StrictIfExists - Refuse to cache a component if the calculated checksum is inconsistent with a checksum in the repository. Only perform this check if the checksum file is present.
- Strict - Refuse to cache a component if the calculated checksum is inconsistent or if there is no checksum for a component

Authentication

This section allows you to set a Username, Password, NT LAN Host, and NT Lan Manager Domain for a remote repository.

Access Settings

This section allows for the detailed configuration of access to a repository.

Deployment Policy

This setting controls how a Hosted repository allows or disallows component deployment. If this policy is set to *Read Only*, no deployment is allowed. If this policy is set to *Disable Redeploy*, a client can only deploy a particular component once and any attempt to redeploy an component will result in an error. If this policy is set to *Allow Redeploy*, clients can deploy components to this repository and overwrite the same component in subsequent deployments. This option is visible for hosted repositories as shown in Figure 6.11, “Repository Configuration Access Settings for a Hosted Repository”.

Allow File Browsing

When set to *True*, users can browse the contents of the repository with a web browser

Include in Search

When set to *True*, this repository is included when you perform a search in the repository manager. If this setting is *False*, the contents of the repository are excluded from a search.

Publish URL

If this property is set to *False*, the repository will not be published on a URL, and you will not be able to access this repository remotely. You would set this configuration property to *False* if you want to prevent clients from connecting to this repository directly.

Expiration Settings

The repository manager maintains a local cache of components and metadata, you can configure expiration parameters for a proxy repository. The expiration settings are:

Not Found Cache TTL

If the repository manager fails to locate a component, it will cache this result for a given number of minutes. In other words, if the repository manager can't find a component in a remote repository, it will not perform repeated attempts to resolve this component until the *Not Found Cache TTL* time has been exceeded. The default for this setting is 1440 minutes (or 24 hours).

Artifact Max Age

Tells the repository manager what that maximum age of a component is, before it retrieves a new version from the remote repository. The default for this setting is -1 for a repository with a release policy and 1440 for a repository with snapshot policy.

Metadata Max Age

The repository manager retrieves metadata from the remote repository. It will only retrieve updates to metadata after the Metadata Max Age has been exceeded. The default value for this setting is 1440 minutes (or 24 hours).

Item Max Age

Some items in a repository may be neither a component identified by the Maven GAV coordinates or metadata for such components. This cache value determines the maximum age for these items before updates are retrieved.

HTTP Request Settings

In the *HTTP Request Settings* you can change the properties of the HTTP request to the remote repository. You can also configure the User Agent of the request, add parameters to a request, and set the timeout and retry behavior. The HTTP request configured is the request made from the repository manager to the remote repository being proxied.

Beyond these configurations in the user interface, Nexus Repository Manager supports the usage of cookies for remote repositories authentication. Together with the feature to enable circular redirects, this enables proxying repositories like the Oracle Maven repository. The following configuration can be added to `nexus.properties` and allows a functioning proxy repository to the URL <https://maven.oracle.com>.

```
# Comma separated list of hostnames that needs to accept circular redirections
nexus.remoteStorage.enableCircularRedirectsForHosts=maven.oracle.com
# Comma separated list of hostnames that benefit from using cookies
nexus.remoteStorage.useCookiesForHosts=maven.oracle.com
```

Viewing the Summary Panel for a Repository


The Summary panel can be loaded by selecting a hosted, proxy or virtual repository and then clicking on the *Summary* tab. The *Summary* tab of a hosted repository, as shown in *Figure 6.12, “Repository Summary Panel for a Hosted Repository”*, displays the distributionManagement settings that can be used to configure Maven to publish components to the hosted repository.

The screenshot shows the Nexus Repository Manager 2 interface. In the top navigation bar, the 'Repositories' tab is selected. Below the toolbar, there is a table listing three repositories: 'NuGet Releases', 'Releases', and 'Snapshots'. Each row shows the repository name, type (hosted), status (ANALYZE), format (nuget/maven2), and policy (Mixed/Release/Snapshot). The 'Releases' repository is currently selected. The main content area displays the 'Releases' summary tab, which includes details about the repository ID, name, type, policy, format, and groups it belongs to. At the bottom of this section, the XML configuration for distribution management is shown:

```
<distributionManagement>
<repository>
  <id>releases</id>
  <url>http://localhost:8081/nexus/content/repositories/releases</url>
</repository>
</distributionManagement>
```

Figure 6.12. Repository Summary Panel for a Hosted Repository

The *Summary* panel for a proxy repository, as shown in *Figure 6.13, “Repository Summary Panel for a Proxy Repository”*, contains all of the repository identifiers and configuration as well as a list of groups in which the repository is contained.

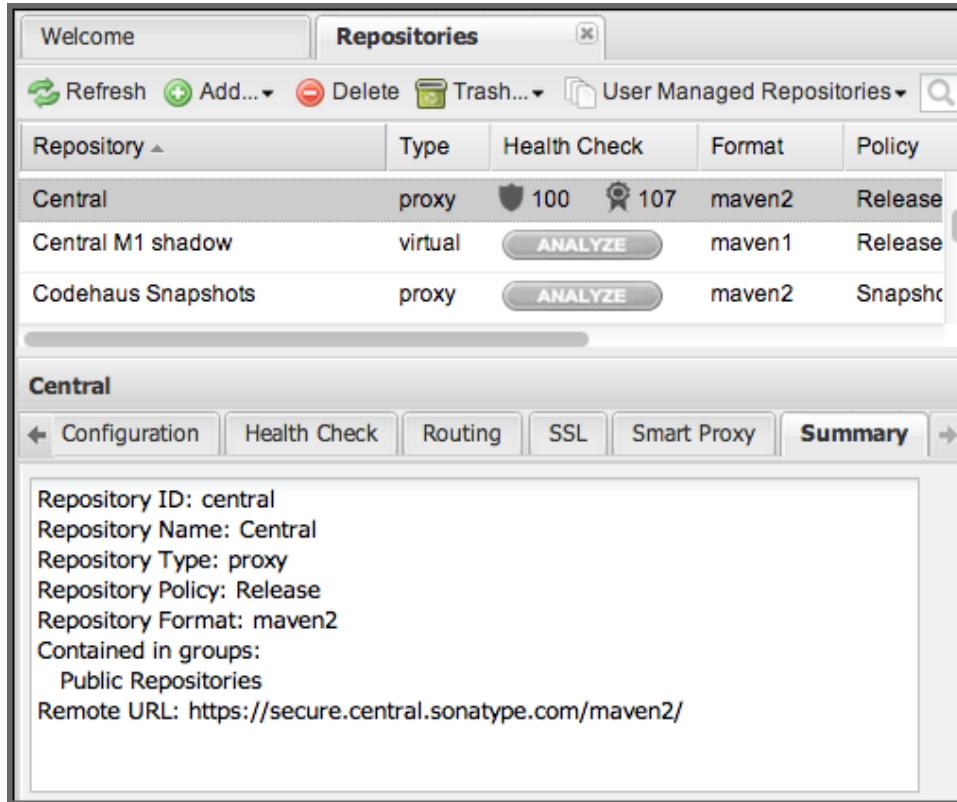

The screenshot shows the Nexus Repository Manager 2 interface. The top navigation bar has tabs for 'Welcome' and 'Repositories'. The 'Repositories' tab is active, showing a list of repositories. The list includes:

| Repository | Type | Health Check | Format | Policy |
|--------------------|---------|----------------|--------|-----------|
| Central | proxy | 100 / 107 | maven2 | Release |
| Central M1 shadow | virtual | ANALYZE | maven1 | Release |
| Codehaus Snapshots | proxy | ANALYZE | maven2 | Snapshots |

Below the list, the 'Central' repository is selected. The 'Summary' tab is active in the navigation bar. The summary information is displayed in a box:

- Repository ID: central
- Repository Name: Central
- Repository Type: proxy
- Repository Policy: Release
- Repository Format: maven2
- Contained in groups:
 - Public Repositories
- Remote URL: <https://secure.central.sonatype.com/maven2/>

Figure 6.13. Repository Summary Panel for a Proxy Repository

The *Summary* panel for a virtual repository, as shown in *Figure 6.14, “Repository Summary Panel for a Virtual Repository”*, displays repository identifiers and configuration as well as the groups in which the repository is contained.

The screenshot shows the Nexus Repository Manager 2 interface. At the top, there's a navigation bar with tabs for 'Welcome' and 'Repositories'. Below the navigation bar is a toolbar with icons for Refresh, Add, Delete, Trash, and User Managed Repositories, along with a search bar.

The main area displays a table of repositories:

| Repository | Type | Health Check | Format | Policy |
|--------------------|---------|----------------------|--------|-----------|
| Central | proxy | 100 | maven2 | Release |
| Central M1 shadow | virtual | ANALYZE | maven1 | Release |
| Codehaus Snapshots | proxy | ANALYZE | maven2 | Snapshots |

Below the table, a specific repository is selected: 'Central M1 shadow'. A detailed summary panel is displayed for this repository:

Central M1 shadow

Repository ID: central-m1
Repository Name: Central M1 shadow
Repository Type: virtual
Repository Policy: Release
Repository Format: maven1
Contained in groups:

Figure 6.14. Repository Summary Panel for a Virtual Repository

Auto Block/Unblock of Remote Repositories

What happens when the repository manager is unable to reach a remote repository? If you've defined a proxy repository and the remote repository is unavailable, the repository manager will now automatically block the remote repository. Once a repository has been auto-blocked, the repository manager will then periodically retest the remote repository and unblock the repository once it becomes available. You can control this behavior by changing the *Auto Blocking Enabled* setting under the *Remote Repository Access* section of the proxy repository configuration as shown in the following figure to *True*:

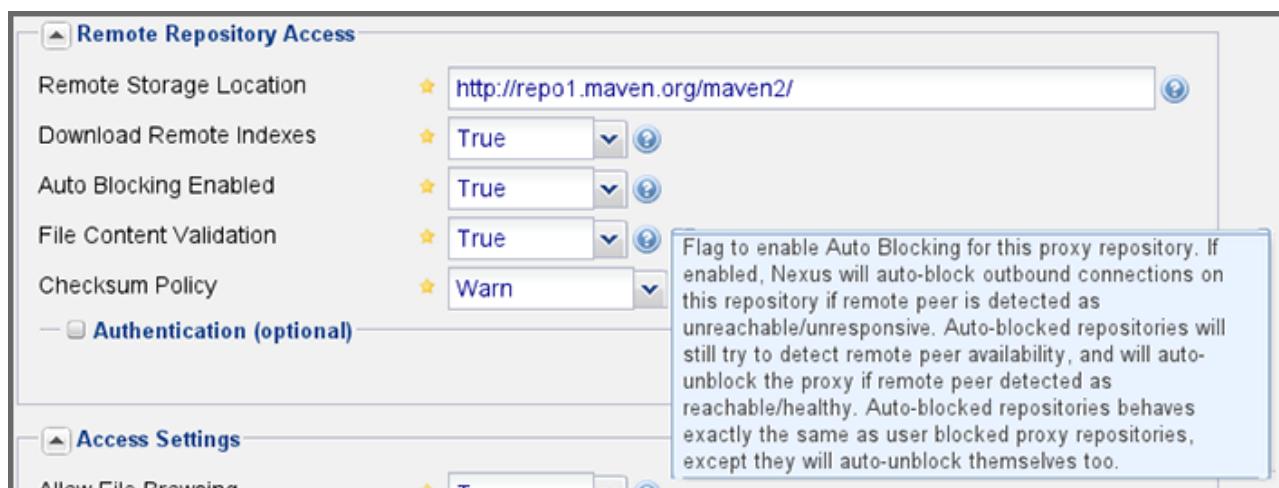


Figure 6.15. Configuring Remote Repository Auto Block/Unblock

Managing Repository Groups

Repository groups are a powerful feature of Nexus Repository Manager. They allow you to combine multiple repositories and other repository groups of the same repository format in a single repository group. This single group and the associated URL can then be used as a single access point to all components in a specific format sourced from a number of repositories.

This eases the configuration for the users and at the same time allows the administrators to add more repositories and therefore components without requiring changes on the client computers.

Use the left-hand panel *Repositories* menu item in the *Views/Repositories* menu to access the repositories and groups management interface.

To create a new repository group, press the Add button above the repository list and select *Repository Group*. In the configuration tab provide a *Group ID* and *Group Name*. The *Group ID* will be part of the URL to the repository group and should therefore use a limited set of characters and not contain spaces. Ideally use only lowercase letters and numbers and characters like -.

The selection of the *Provider* determines the repository *Format* and therefore the list of *Available Repositories* automatically. To add repositories to the repository group, drag them to the *Ordered Group Repositories* or use the arrows between the two lists.

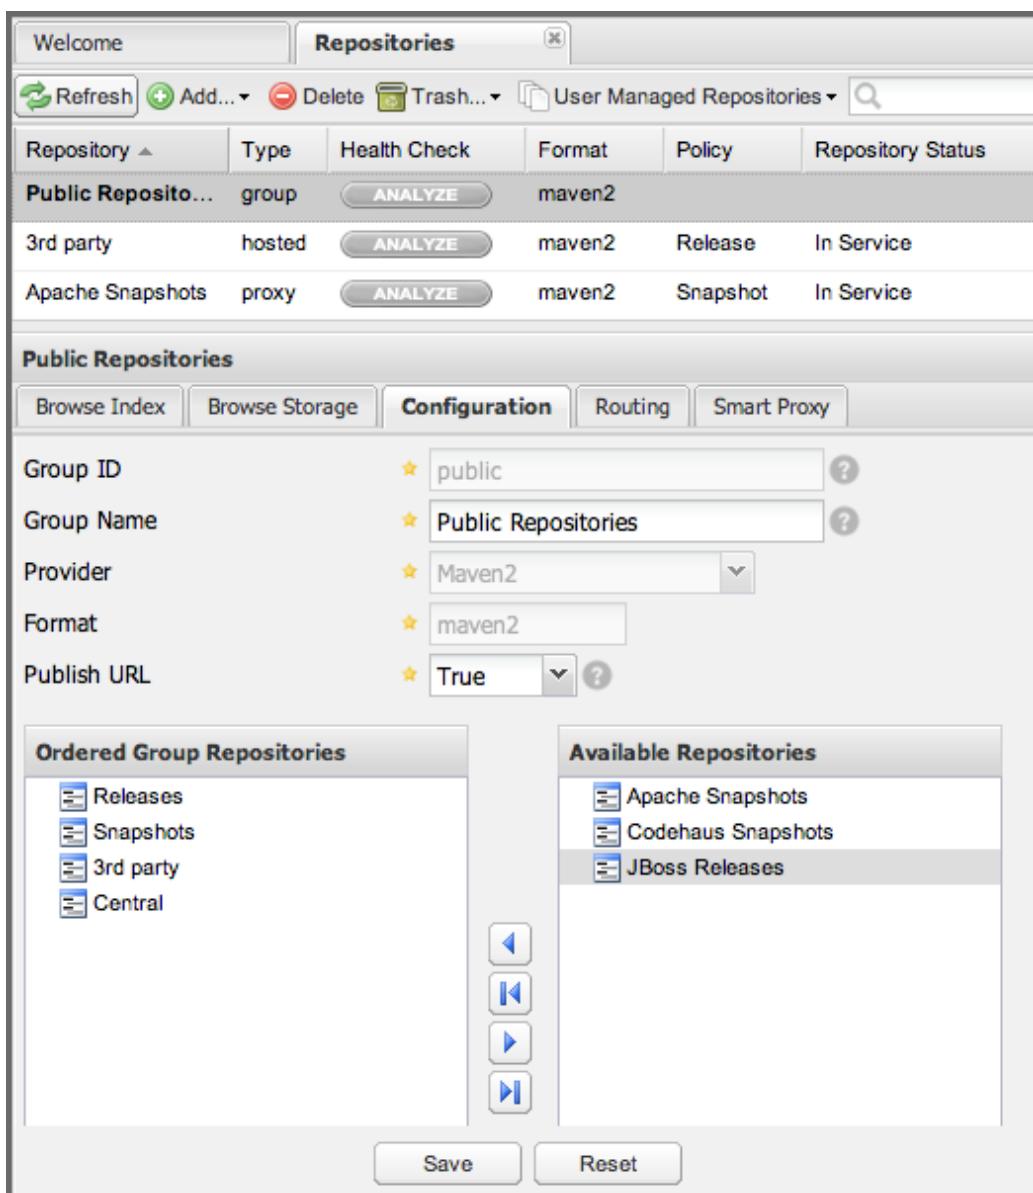


Figure 6.16. Group Configuration Screen

Note that the order of the repositories listed in *Ordered Group Repositories* is important. When the repository manager searches for a component in a group, it will return the first match. To reorder a repository in this list, click and drag the repositories and groups in the *Ordered Group Repositories* selection list.

The order of repositories or other groups in a group can be used to influence the effective metadata that will be retrieved from a repository group. We recommend placing hosted repositories higher in the list than proxy repositories within the list. For proxy repositories the repository manager needs to periodically check the remote for updates, which will incur more overhead than a hosted repository lookup.

We also recommend placing repositories with a higher probability of matching the majority of components higher in this list. If most of your components are going to be retrieved from the Central Repository, putting Central higher in this list than a smaller, more focused repository is going to be better for performance, as

the repository manager is not going to interrogate the smaller remote repository for as many missing components.

Once a repository group is configured it can be used from the client as discussed in, e.g. [Apache Maven\(see page 216\)](#), [Configuring npm\(see page 467\)](#), [Using Gem Repositories\(see page 474\)](#) or [Accessing Packages in Repositories and Groups\(see page 459\)](#), and further repositories can be added easily.

Nexus Repository Manager ships with one group: `public`. The *Public Repositories* group uses the Maven2 repository format and combines the important external Central Repository with the hosted repositories *3rd Party, Releases* and *Snapshots*.

In [Apache Maven\(see page 216\)](#), we configure Maven via the `settings.xml` to look for components in the `public` group managed by the repository manager. *Figure 6.16, “Group Configuration Screen”* shows the group configuration screen in the user interface. In this figure you can see the contents of the *Public Repositories* group.

Managing Routing

Routing can be considered the internal activities the repository manager performs in order to determine where to look for a specific component in a repository. The routing information has an impact on the performance of component retrieval as well as determining the availability of components.

A large portion of the performance gains achievable with correct and optimized routing information is configured by the repository manager itself with automatic routing, documented in [Automatic Routing\(see page 288\)](#). Fine grained control and further customizations in terms of access provision can be achieved with some manual routing configuration documented in [Manual Routing Configuration\(see page 290\)](#).


Automatic Routing

Automatic routing is handled on a per repository basis. You can access the configuration and further details in the *Routing* tab after selecting a repository in the list accessible via the *Repositories* item in the *Views/Repositories* left-hand menu.

The routing information consists of the top two levels of the directory structure of the repository and is stored in a `prefixes.txt` file. It allows the repository manager to automatically route only component requests with the corresponding `groupId` values to a repository, as found in the text file. This, in turn, avoids unnecessary index or even remote repository access and therefore greatly improves performance.

The repository manager generates the `prefixes.txt` file for a hosted repository and makes it available for remote downloads. Each deployment of a new component will trigger an update of the file for the hosted repository as well as the prefix files for any repository groups that contain the hosted repository. You can access it in the *Routing* tab of a hosted repository as displayed in *Figure 6.17, “Automatic Routing for a Hosted Repository”* by clicking on the *Show prefix file* link on the right. In addition, the *Publishing* section


shows the *Status* of the routing information, a *Message* with further details, and the date and time of the last update in the *Published On* field.

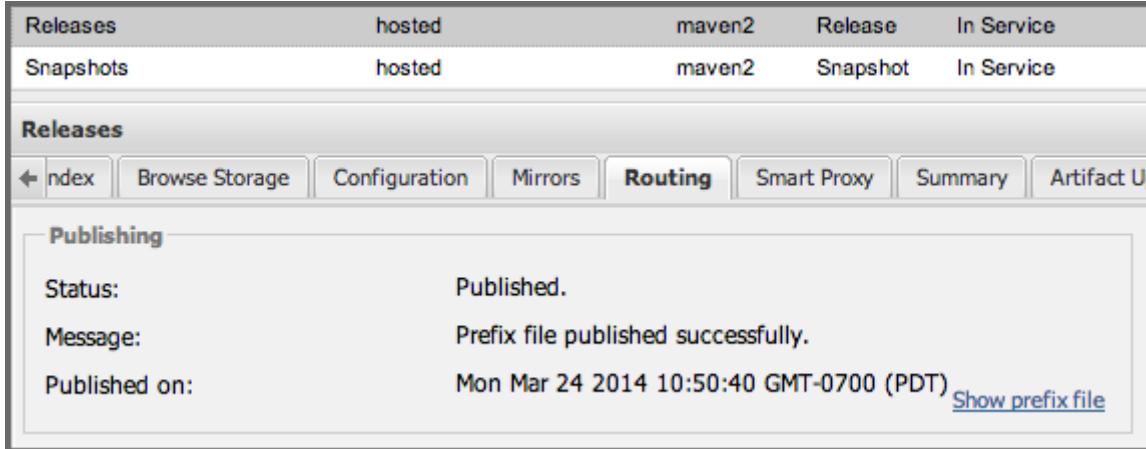

The screenshot shows the 'Routing' tab for a hosted repository. The top navigation bar includes 'Index', 'Browse Storage', 'Configuration', 'Mirrors', 'Routing' (which is selected), 'Smart Proxy', 'Summary', and 'Artifact Uploader'. Below the navigation is a table with two rows: 'Releases' and 'Snapshots', both listed as 'hosted' under 'maven2' and 'Release' status, with 'In Service' checked. A 'Releases' section follows, containing tabs for 'Publishing' and 'Discovery'. Under 'Publishing', the status is 'Published.', the message is 'Prefix file published successfully.', and the published date is 'Mon Mar 24 2014 10:50:40 GMT-0700 (PDT)'. A link 'Show prefix file' is present. The 'Discovery' section is collapsed.

Figure 6.17. Automatic Routing for a Hosted Repository

The *Routing* tab for a proxy repository displayed in *Figure 6.18, “Automatic Routing for a Proxy Repository”* contains the *Discovery* section. It displays the *Status* and a more detailed *Message* about the prefix file access. The *Last run* field displays the date and time of the last execution of the prefix file discovery. Such an execution can be triggered by pressing the *Update now* button. Otherwise, the *Update Interval* allows you to configure a new discovery every one, two, three, six, nine or twelve hours or on a daily or weekly basis.

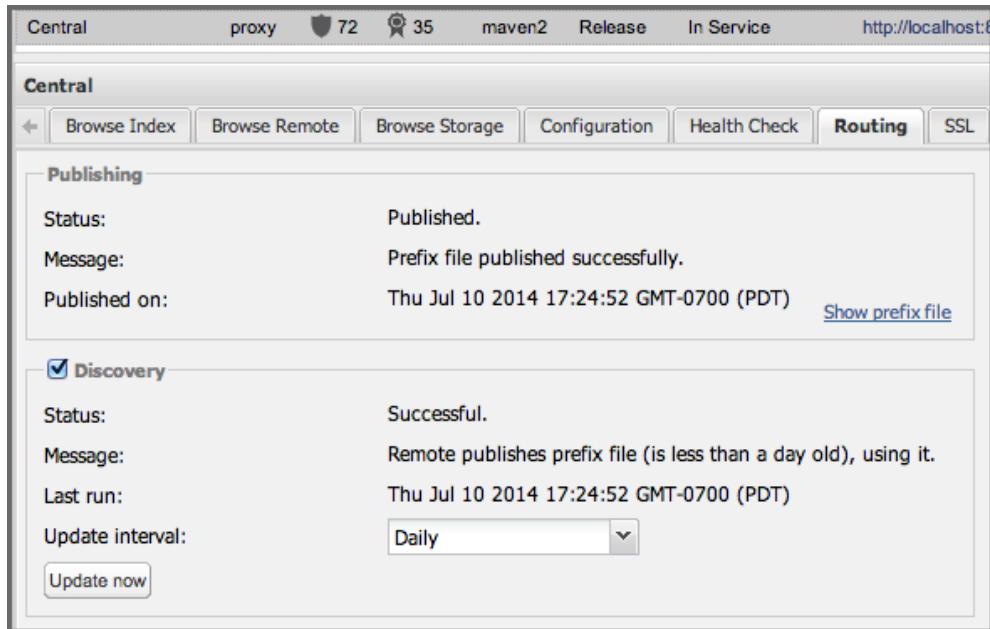

The screenshot shows the 'Routing' tab for a proxy repository. The top navigation bar includes 'Central', 'proxy', '72', '35', 'maven2', 'Release', 'In Service', and 'http://localhost:8081'. Below the navigation is a table with three rows: 'Central', 'proxy', and 'maven2', all listed as 'Release' status, with 'In Service' checked. A 'Central' section follows, containing tabs for 'Publishing' and 'Discovery'. Under 'Publishing', the status is 'Published.', the message is 'Prefix file published successfully.', and the published date is 'Thu Jul 10 2014 17:24:52 GMT-0700 (PDT)'. A link 'Show prefix file' is present. The 'Discovery' section is expanded, showing a checked checkbox 'Discovery', status 'Successful.', message 'Remote publishes prefix file (is less than a day old), using it.', last run date 'Thu Jul 10 2014 17:24:52 GMT-0700 (PDT)', and a dropdown menu for 'Update interval' set to 'Daily'. A 'Update now' button is also visible.

Figure 6.18. Automatic Routing for a Proxy Repository

For a proxy repository, the prefix file is either downloaded from the remote repository or generation is attempted by scraping the HTML directory listing of the remote repository. If a prefix file is published by the remote it is always used. The scraping strategy only used in cases where the repository manager can be sure

the remote directory listing contains all available artifacts. For example, if the remote is hosted repository on a Nexus Repository Manager, or a well known format such as a Subversion based repository then the directory listing will be used if no prefix file is available.

The generation of the prefix file in all the repository managers deployments proxying each other greatly improves performance for all repository manager instances. It lowers network traffic and load on the servers, since failing requests and serving the respective HTTP error pages for a component that is not found is avoided for each component. Instead, the regularly light weight download of the prefix file establishes a good high-level knowledge of components available.

Automatic Routing is configured automatically brings significant performance benefits to all Nexus Repository Manager Pro and Nexus Repository Manager OSS instances proxying each other in a network and on the wider internet. It does not need to be changed apart from tweaking the update interval. To exercise even finer control than provided by Automatic Routing use Routing as documented in [Manual Routing Configuration](#)(see page 290).

Manual Routing Configuration

Routes are like filters you can apply to groups in terms of security access and general component retrieval, and can reduce the number of repositories within a group accessed in order to retrieve an component. The administration interface for routes can be accessed via the *Routing* menu item in the *View/Repositories* menu in the left-hand navigation panel.

Routes allow you to configure the repository manager to include or exclude specific repository content paths from a particular component search when the repository manager is trying to locate a component in a repository group. There are a number of different scenarios in which you might configure a route.

The most commonly configured scenario is when you want to make sure that you are retrieving components in a particular group ID from a particular repository. This is especially useful when you want your own organization's components from the hosted Release and Snapshot repositories only.

Routes are applicable when you are trying to resolve a component from a repository group. Using routes allows you to modify the repositories the repository manager consults when it tries to resolve a component from a group of repositories.

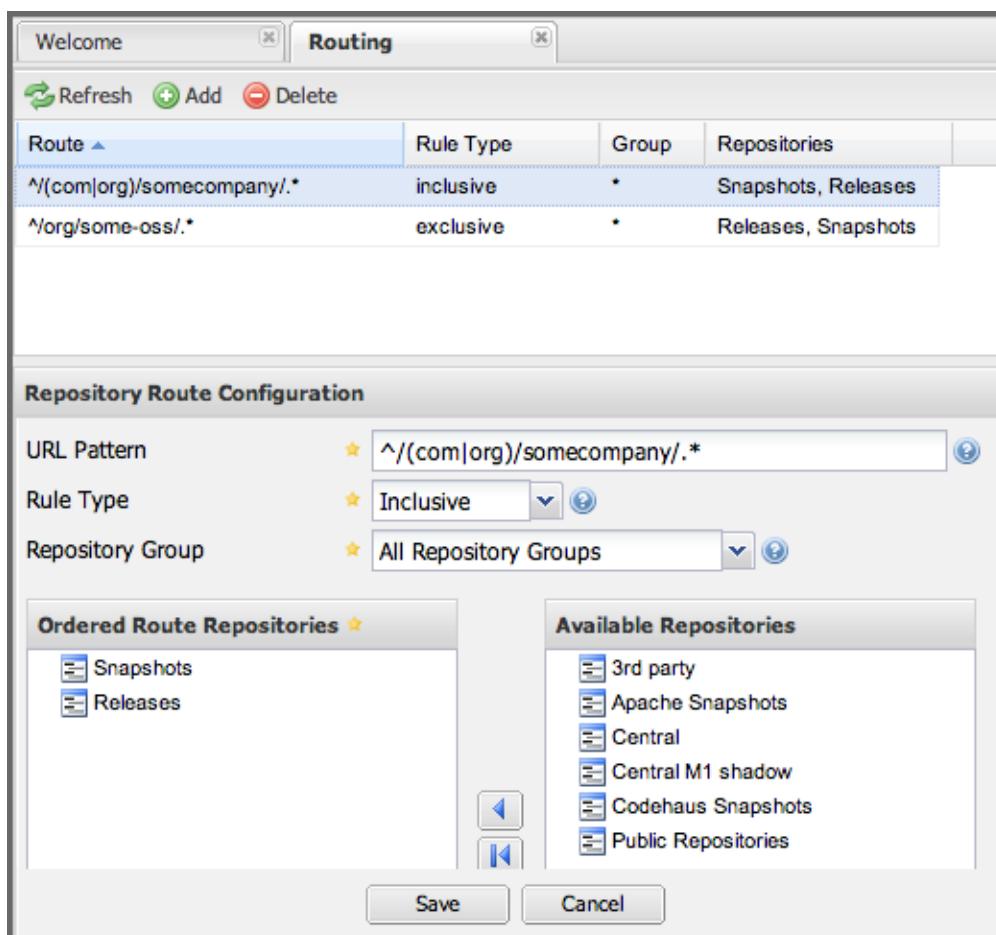


Figure 6.19. Routing Configuration Screen

Figure 6.19, “Routing Configuration Screen” shows the Routing configuration screen. Clicking on a route will bring up a screen that will allow you to configure the properties of a route. The configuration options available for a route are:

URL Pattern

The repository manager uses the URL Pattern will use to match a request. If the regular expression in this pattern is matched, the repository manager will either include or exclude the listed repositories from a particular component query. In Figure 6.19, “Routing Configuration Screen” the two patterns are:

`^(com|org)/somecompany/*`

This pattern would match all paths that start with either `/com/somecompany/` or `/org/somecompany/`. The expression in the parenthesis matches either com or org, and the `.*` matches zero or more characters. You would use a route like this to match your own organization’s components and map these requests to the hosted Releases and Snapshots repositories.

`^/org/some-oss/*`

This pattern is used in an exclusive route. It matches every path that starts with `/org/some-oss/`. This particular exclusive route excludes the local hosted Releases and Snapshots directory for all

components that match this path. When the repository manager tries to resolve components that match this path, it will exclude the Releases and Snapshots repositories.

A further example:

```
(?!/org/some-oss/.*)/*
```

Using this pattern in an exclusive route allows you to exclude everything, except the "org/some-oss" project(s). It uses a special negative matching regular expression.

Rule Type

Rule Type can be either inclusive, exclusive or blocking. An inclusive rule type defines the set of repositories that should be searched for components when the URL pattern has been matched. An exclusive rule type defines repositories which should not be searched for a particular component. A blocking rule will completely remove accessibility to the components under the specific pattern in a specified repository group.

Ordered Route Repositories

The repository manager searches an ordered list of repositories to locate a particular component. This order only affects the order of routes used and not the order of the repositories searched. That order is set by the order of the repositories in the group repository's configuration.

In *Figure 6.19, “Routing Configuration Screen”* you can see the two dummy routes that are configured as default routes. The first route is an inclusive route, and it is provided as an example of a custom route an organization might use to make sure that internally generated components are resolved from the Releases and Snapshots repositories only. If your organization's group IDs all start with com.somecompany, and if you deploy internally generated components to the Releases and Snapshots repositories, this Route will make sure that the repository manager doesn't waste time trying to resolve these components from public repositories like the Central Repository or the Apache Snapshots repository.

The second dummy route is an exclusive route. This route excludes the Releases and Snapshots repositories when the request path contains /org/some-oss. This example might make more sense if we replaced some-oss with apache or codehaus. If the pattern was /org/apache, this rule is telling the repository manager to exclude the internal Releases and Snapshots repositories when it is trying to resolve these dependencies. In other words, don't bother looking for an Apache dependency in your organization's internal repositories.

- ⓘ Exclusive rules will positively impact performance, since the number of repositories that qualify for locating the component, and therefore the search effort, is reduced.

What if there is a conflict between two routes? The repository manager will process inclusive routes before it will process the exclusive routes. Remember that routes only affect the repository managers resolution of components when it is searching a group. When it starts to resolve a component from a repository group, it will start with the list of repositories in a group. If there are matching inclusive routes, the repository manager will then take the intersection of the repositories in the group and the repositories in the inclusive route. The

order as defined in the group will not be affected by the inclusive route. The repository manager will then take the result of applying the inclusive route and apply the exclusive route to that list of repositories. The resulting list is then searched for a matching component.

One straightforward use of routes is to create a route that excludes the Central Repository from all searches for your own organization's hosted components. If you are deploying your own components to the repository manager under a groupId of `org.mycompany`, and if you are not deploying these components to a public repository, you can create a rule that tells the repository manager not to interrogate Central for your own organization's components. This will improve performance because the repository manager will not need to communicate with a remote repository when it serves your own organization's components. In addition to the performance benefits, excluding the Central Repository from searches for your own components will reduce needless queries to the public repositories.

- ⓘ This practice of defining an inclusive route for your internal components to only hit internal repositories is a crucial best practice of implementing a secure component management in your organization and a recommended step for initial configuration of the repository manager. Without this configuration, requests for internal components will be broadcast to all configured external proxy repositories. This could lead to an information leak where e.g. your internet traffic reveals that your organization works on a component with the component coordinates of `com.example.website:secret-feature:1.0`.

In addition to defining inclusive and exclusive routes, you can define blocking routes. A blocking route can be created by creating a route with no repositories in the ordered list of repositories. It allows you to completely block access to components with the specified pattern(s) from the group. As such, blocking routes are a simplified, coarse-grained access control.


- ⚠ Check out [Procurement Suite](#)(see page 366) for fine-grained control of component availability and use blocking routes sparingly.

To summarize, there are creative possibilities with routes that the designers of Nexus Repository Manager Pro may not have anticipated, but we advise you to proceed with caution if you start relying on conflicting or overlapping routes. Use routes sparingly, and use coarse URL patterns. Remember that routes are only applied to groups and are not used when a component is requested from a specific repository.

Managing Scheduled Tasks

The repository manager allows you to schedule tasks that will be applied to all repositories or to specific repositories on a configurable schedule. Use the *Scheduled Tasks* menu item in the *Administration* menu to

access the screen, shown in *Figure 6.20, “Managing Scheduled Tasks”*, that allows you to manage your Scheduled Tasks.

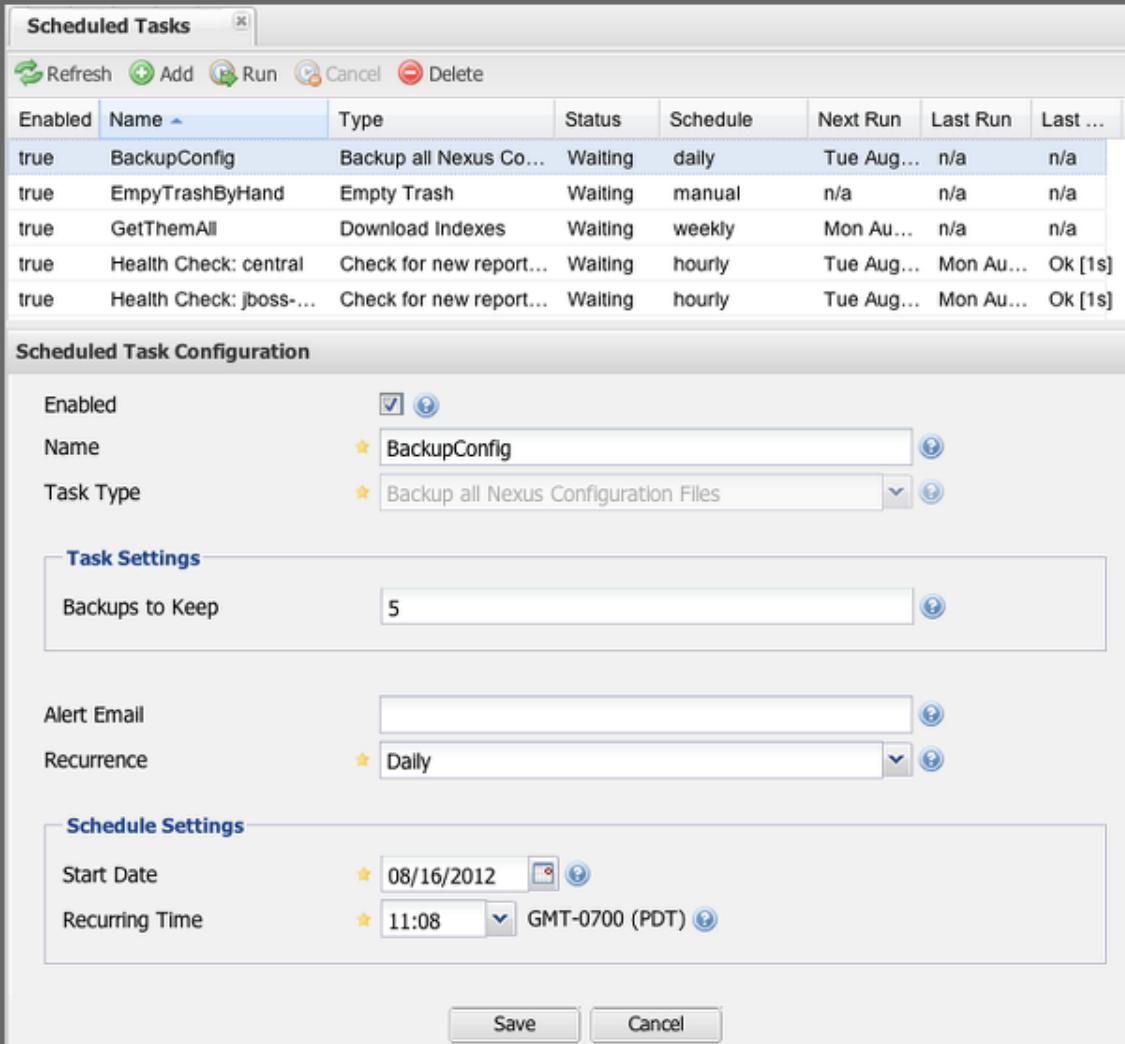

| Enabled | Name | Type | Status | Schedule | Next Run | Last Run | Last ... |
|---------|-------------------------|-------------------------|---------|----------|------------|-----------|----------|
| true | BackupConfig | Backup all Nexus Co... | Waiting | daily | Tue Aug... | n/a | n/a |
| true | EmptyTrashByHand | Empty Trash | Waiting | manual | n/a | n/a | n/a |
| true | GetThemAll | Download Indexes | Waiting | weekly | Mon Au... | n/a | n/a |
| true | Health Check: central | Check for new report... | Waiting | hourly | Tue Aug... | Mon Au... | Ok [1s] |
| true | Health Check: jboss-... | Check for new report... | Waiting | hourly | Tue Aug... | Mon Au... | Ok [1s] |

Scheduled Task Configuration

Enabled

Name

Task Type

Task Settings

Backups to Keep

Alert Email

Recurrence

Schedule Settings

Start Date

Recurring Time GMT-0700 (PDT)

Figure 6.20. Managing Scheduled Tasks

The list interface allows you to *Add* new tasks and *Run*, *Cancel* and *Delete* existing tasks as well as *Refresh* the list with respective buttons above the list.

When creating or updating a scheduled task, you can configure the following properties:

Enabled

Enable or disable a specific task

Name

Provide a name to identify the task in the user interface and log files

Task Type

Specify the type of action the scheduled task executes. The list of available task types is documented in more detail below.

Task Settings

Configure the task settings specific to the selected task type. Tasks affecting a repository have a setting called Repository/Group that allows you to let the task affect all repositories and groups or only a specific one.

Alert Email

Configure a notification email for task execution failures. If a scheduled task fails a notification email containing the task identifier and name as well as the stack trace of the failure will be sent to the configured email recipient.

Recurrence

Configure the schedule for the task executions. Available choices are *Manual*, *Once*, *Hourly*, *Daily*, *Weekly*, *Monthly* and *Advanced*. All choices provide a custom user interface for scheduling the specific recurrence. Weekly scheduling requires at least one day of the week to be selected. The *Advanced* setting allows you to provide a CRON expression to configure more complex schedules.

The following kinds of scheduled task types are available:

Backup All Configuration Files

This scheduled task will archive the contents of the `sonatype-work/nexus/conf` directory. Once a backup has been run, the contents of the backup will be available in `sonatype-work/nexus/backup` in a series of ZIP archives that use a timestamp in the filename. This task is a feature of Nexus Repository Manager Pro.

Backup npm metadata database

A backup archive of the npm metadata database is created in the `sonatype-work/nexus/backup/npm` with a date and time stamp in the filename. This backup is intended to be used for disaster recovery in case the npm metadata database got corrupted.

Delete npm metadata

This task allows you to completely delete the npm metadata of a npm repository and should be only run manually upon advice from Sonatype support

Download Indexes

This scheduled task causes the repository manager to download indexes from remote repositories for proxied repositories. The Download Remote Indexes configuration also needs to be enabled on the proxy repository.

Download NuGet Feed

This task allowed you to download the feed for a NuGet proxy repository. It should not be used any longer, since it has negative impacts on the performance of your Nexus Repository Manager Pro or Nexus Repository Manager OSS as well as [Nuget.org](https://www.nuget.org)²¹²⁷. With Nexus Repository Manager 2.11.3+ it

has been changed to perform no operation at all to avoid this problem. It is safe to remove any executions of this task.

Drop Inactive Staging Repositories

Staging repositories can be dropped by user interaction or automated systems using the Nexus Staging Maven Plugin or Ant Task or a REST API call. Heavy users of the repository manager staging features observe that some staging and build promotion repositories are inevitably left behind. This scheduled task can be used to drop all these repositories. You can configure the duration of inactivity to include the days after the repositories are dropped as well as the status of the repositories. Any change of the staging repository like a state change from open to closed to promoted or released as well other changes to the repository meta data like a description update are counted as an activity. You can configure to *Scan open repositories*, *Scan closed repositories*, *Scan promoted repositories* and *Scan released repositories* for inactivity and therefore potentially drop them with this task. This will allow you to avoid accumulating a large number of stale staging repositories.

Empty Trash

The Evict and Purge actions do not delete data from the repository manager working directory. They simply move data to be cleared or evicted to a trash directory under the work directory. This task deletes the data in this trash directory older than the number of days specified in the task setting *Purge items older than (days)*.

Evict Unused Proxied Items From Repository Caches

This scheduled task tells the repository manager to delete all proxied items that haven't been "used" (referenced or retrieved by a client) in a number of days as specified in *Evict items older than (days)*. This can be a good job to run if you are trying to conserve storage space and do not need all of the components in the future e.g., to reproduce old builds without renewed retrieval. This is particularly useful for a personal repository manager deployment with a large change rate of components combined with limited disk space.

Expire Repository Caches

Repositories have several caches to improve performance. This task expires the caches causing the repository manager to recheck the remote repository for a proxy repository or the file system for a hosted repository. You can configure the repository or group to be affected with the task setting *Repository/Group*. Additionally you can provide a Repository Path to configure the content that should be expired.

Mirror Eclipse Update Site

The P2 plugin allows you to mirror Eclipse update sites. This task can be used to force updates of repositories that went out of sync.

Optimize Repository Index

To speed up searches in the repository manager, this task tells the internal search engine to optimize its index files. This has no affect on the indexes published by the repository manager. Typically, this task does not have to run more than once a week.

Publish Indexes

Just as Maven downloads an index from a remote repository, the repository manager can publish an index in the same format. This will make it easier for people using m2eclipse or Nexus Repository Manager to interact with your repositories.

Purge Nexus Timeline

The repository manager maintains a lot of data that relates to the interaction between itself, proxied remote repositories and clients. While this information can be important for purposes of auditing, it can also take up storage space. Using this scheduled task you can tell the repository manager to periodically purge this information. The setting *Purge Items older than (days)* controls the age of the data to be deleted.

Purge Orphaned API Keys

This scheduled tasks will delete old, unused API keys generated and used by various plugins. For example, it should be scheduled when using the User Token feature or NuGet repositories. It will purge orphaned API keys e.g., after users reset their token and should be scheduled to run regularly, specifically when internal security policies for password resets and you are using an external security provider like LDAP with this requirement for resets to access the repository manager.

Rebuild Maven Metadata Files

This task will rebuild the maven-metadata.xml files with the correct information and will also validate the checksums (.mh5/.sha1) for all files in the specified Repository/Group. Typically this task is run manually to repair a corrupted repository.

Rebuild NuGet Feed

If you are using NuGet, pushing your components into a NuGet hosted repository and are proxying that repository to other users, this task can be used to rebuild the feed.

Rebuild P2 metadata and Rebuild P2 repository

These tasks can be used to rebuild the metadata or the full repository with a P2 format. You can specify a Repository/Group or a Repository Path to determine which content to affect.

Rebuild hosted npm metadata

The npm metadata for a hosted repository can be rebuilt based on the components found in the storage of a hosted repository. The task can serve as a recovery tool in cases where the npm metadata database got corrupted or the component storage was created manually or via some external process like e.g. an rsync copying.

Reconcile Repository Checksums

This task was used to repair checksums and should only be used upon specific advise from Sonatype support.

Remove Releases From Repository

In many use cases of a repository manager, it is necessary to keep release components for long periods of time or forever. This can be necessary for reproducibility reasons, in order to ensure users have access to old versions or even just for audit or legal reasons. However, in other use cases, there is no value in keeping old release components. One example would be a when using a continuous delivery approach onto a single deployment platform with no roll back support. In other cases, it could also be impractical due to the mere number and size of the release components.

This scheduled task allows you to trigger the deletion of release components, supporting these use cases taking care of meta data updates, and removing the need to manually delete the components or use an external system to trigger the deletion.

To configure the task, you specify the repository where release components are to be deleted as well as the number of component versions to keep for a specific groupId and artifactId coordinate. The task generates a list of all versions of a component for each groupId and artifactId coordinate combination and sorts it according to the version number. The ordering is derived by parsing the version string and supports [semantic versioning](#)²¹²⁸ with additional semantics for specific classifiers. Further details can be found in the documentation for the implementing class [GenericVersionScheme](#)²¹²⁹.

Optionally, the Repository Target parameter can be used to narrow down the content of the repository that is analyzed, to determine if any deletion should occur. Choosing All (Maven2) is suitable to cause all Maven 2-formatted repositories to be analysed. If you want to only target a specific groupId and artifactId combination or a number of them you can create a suitable repository target as documented in Section 6.14, “Managing Repository Targets” and use it in the configuration of the scheduled task.

Remove Snapshots from Repository

Often, you will want to remove snapshots from a snapshot repository to preserve storage space. This task supports this deletion for time stamped snapshots as created by Maven 3.x in a deployment repository. Note that configuring and running this job is not enough to reclaim disk space.

You will also need to configure a scheduled job to empty the trash folder. Files are not deleted by the Remove Snapshots job. They are only moved into the trash folder. When you create a scheduled task to remove snapshots, you can specify the Repository/Group to affect as well as:

Minimum snapshot count

This configuration option allows you to specify a minimum number of snapshots to preserve per component. For example, if you configured this option with a value of 2, the repository manager will always preserve at least two snapshot components. A value of -1 indicates that all snapshots should be preserved.

²¹²⁸ <http://semver.org/>

²¹²⁹ <http://sonatype.github.io/sonatype-aether/apidocs/org/sonatype/aether/util/version/GenericVersionScheme.html>

Snapshot retention (days)

This configuration option allows you to specify the number of days to retain snapshot components. For example, if you want to make sure that you are always keeping the last three day's worth of snapshot components, configure this option with a value of 3. The minimum count overrides this setting.

Remove if released

If enabled and a released component with the same GAV coordinates is detected all snapshots will be removed.

Grace period after release (days)

This parameter allows you to specify a number of days before released snapshots are purged. If a release associated to a snapshot has an updated timestamp and falls within the set grace period, it will not be purged. This setting will give the respective project that references the snapshot dependency time to upgrade to the release component or the next snapshot version.

Delete immediately

If you want to have components deleted directly rather than moved to the trash, you can enable this setting.

When doing regular deployments to a snapshot repository via a CI server, this task should be configured to run regularly.

Remove Unused Snapshots From Repository

This task allows you to have SNAPSHOT versions deleted from a Maven repository after they have not been requested for a specified number of days

Repair Repositories Index

In certain cases it might be required to remove the internal index as well as the published ones of a repository. This task does that and then rebuilds the internal index by first trying to download remote indexes (if a proxy repository), then scanning the local storage and updating the internal index accordingly. Lastly, the index is published for the repository as well. There should be no need to schedule this task. But when upgrading the repository manager, the upgrade instructions may sometimes include a manual step of executing this task.

Rubygems: Purge Broken Files on Proxy

This task allows you to delete the broken metadata of a proxy gem repository

Rubygems: Rebuild Hosted Index Files

This task can be used to get the metadata file for a hosted gem repository recreated based on the actual components found in the repository

Rubygems: Synchronize Proxied Index File

This task can be used to force an update of the metadata in a Gem proxy repository and cause it to be synchronized with the metadata in the remote repository

Synchronize Shadow Repository

This service synchronizes a shadow (or virtual) repository with its master repository. This task is only needed when external changes affected a source repository of a virtual repository you are using.

Update Repositories Index

If files are deployed directly to a repository's local storage (not deployed through the user interface or client tools), you will need to instruct the repository manager to update its index. When executing this task, the repository manager will update its index by first downloading remote indexes (if a proxy repository) and then scan the local storage to index the new files. Lastly, the index is published for the repository as well. Normally, there should be no need to schedule this task. One possible exception would be if files are deployed directly to the local storage regularly.

Yum: Generate Metadata

The metadata for a yum repository is created and maintained by the [createrepo](#)²¹³⁰ tool. This scheduled task allows you to run it for a specific repository and optionally configure the output directory.

Beyond these tasks any plugin can provide additional scheduled tasks, which will appear in the drop-down once you have installed the plugin.

The Evict and Purge actions do not delete data from the repository manager working directory. They simply move data to be cleared or evicted to a trash directory under the work directory. If you want to reclaim disk space, you need to clear the Trash on the Browse Repositories screen. If something goes wrong with a evict or clear service, you can move the data back to the appropriate storage location from the trash. You can also schedule the *Empty Trash* service to clear this directory on a periodic basis.

- ✓ In order to keep the heap usage in check it is recommended that you schedule an "optimize indexes" task to run weekly. A number of other maintenance tasks should also be scheduled for production deployments.

Setting up scheduled tasks adapted to your usage of the repository manager is an important first step. Go through the list of task types and consider your usage patterns of the repository manager. Also update your scheduled tasks when changing your usage. E.g., if you start to regularly deploy snapshots by introducing continuous integration server builds with deployment.

²¹³⁰ <http://createrepo.baseurl.org/>

Accessing and Configuring Capabilities

Capabilities are features of the repository manager and plugins that can be configured by a user in the generic administration view accessible in the left-hand navigation menu *Administration* under *Capabilities*.

- ❗ In many cases you will not need to configure anything in *Capabilities* unless explicitly instructed to do so by the Sonatype support team. Execute any capability changes with caution, potentially backing up your configuration before proceeding.

Nexus Repository Manager ships with a number of capabilities preinstalled and allows you to enable/disable them. An example capability is *Outreach Management* displayed in *Figure 6.21, “Capabilities Management Interface with the Outreach Management Details Visible”*. The capabilities management interface supports adding new capabilities by pressing the *New* button, copying a selected capability from the list by pressing the *Duplicate* button and deleting a selected capability with the *Delete* button. Pressing the *Refresh* button updates the list of capabilities. The list of capabilities can be filtered with the search input box in the header of the list and sorted by the different columns by pressing a column header. The list uses the following columns:

Status

The status column does not have a title. Enabled capabilities have a green checkmark added on top of a blue icon. If an enabled capability is not fully operational the icon displays a warning sign on top of the blue icon and the entire row is surrounded with a red border; you can find out further information in a warning message below the list of the capabilities and above the individual tabs. Disabled capabilities use a greyed out icon.

Type

The *Type* column provides the specific type of a capability in the list

Category

The *Category* is optional and details the wider context the capability belongs to

Repository


The *Repository* value is optional and references the repository for which the specific capability is configured

Description

The *Description* column contains further descriptive information about the capability

Notes

The *Notes* column can contain user created notes about the capability

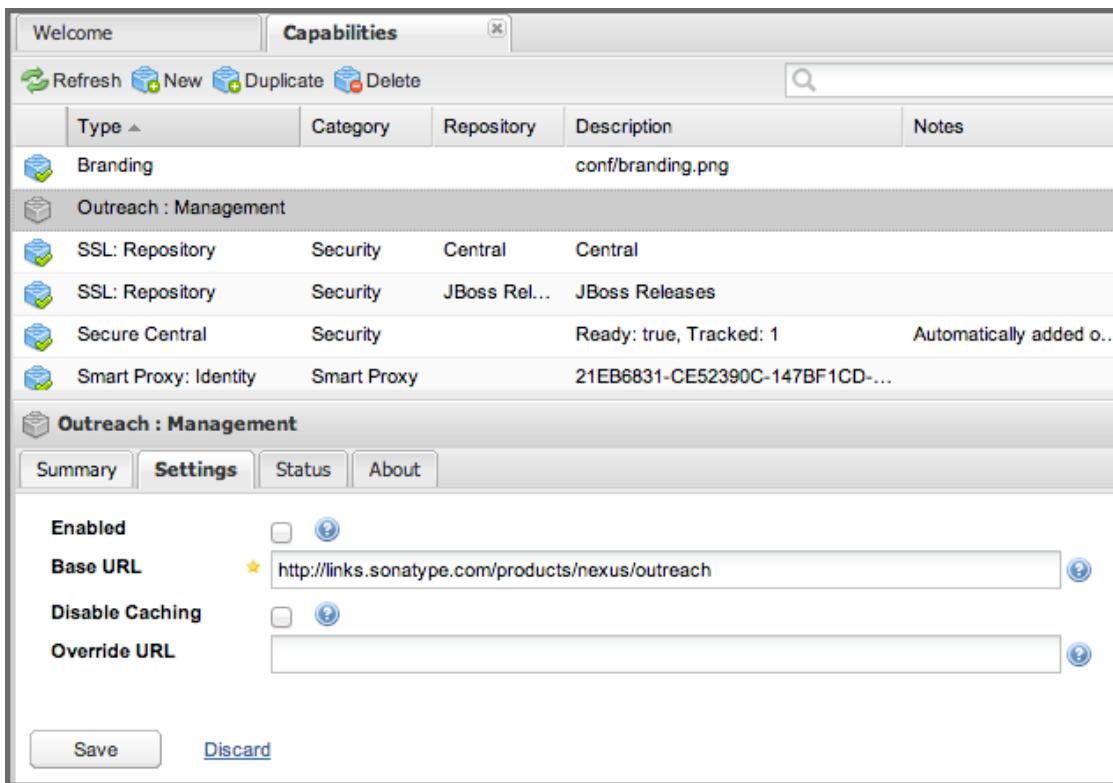

The screenshot shows the 'Capabilities' management screen in the Nexus Repository Manager 2. A specific capability, 'Outreach : Management', is selected in the list. Below the list, there are tabs for 'Summary', 'Settings', 'Status', and 'About'. The 'Settings' tab is active, displaying configuration options for the selected capability. These options include:

- Enabled:** A checkbox with a help icon.
- Base URL:** An input field containing 'http://links.sonatype.com/products/nexus/outreach' with a yellow star icon and a help icon.
- Disable Caching:** A checkbox with a help icon.
- Override URL:** An input field with a help icon.

At the bottom of the 'Settings' tab, there are 'Save' and 'Discard' buttons.

Figure 6.21. Capabilities Management Interface with the Outreach Management Details Visible

Every capability can be inspected and configured by selecting it in the list and using the tabs underneath the list.

The *Summary* tab displays the *Type* of the capability as well as optionally the *Description*, the *Category* and the *Repository*. The *Notes* field can be used to provide a descriptive text about the capability or any other notes related to it and can be persisted by pressing the *Save* button. The *Discard* link can be used to reset any changes in the tab.

The *Settings* tab allows you to activate or deactivate the capability with the *Enabled* checkbox. Below this checkbox, each capability type has specific additional configuration parameters available. Mousing over the help icon beside the input field or checkbox reveals further information about the specific parameter. Once you have completed the configuration, press the *Save* button. The *Discard* link can be used to reset any changes in the tab.

The *Status* tab displays a text message that details the status of the capability and any potential problems with the configuration. Depending on the capability, the reasons can vary widely. For example, the Secure Central capability requires the repository manager to run on a JVM with specific security features. If the JVM is not suitable, an error message with further details is displayed in the *Status* column.

The *About* tab displays a descriptive text about the purpose of the capability.

Creating a new capability by pressing the *New* button will display a new form allowing you to configure the capability in a dialog. The *Type* drop-down allows you to decide what capability to create, and a selection changes the rest of the available information and configuration in the dialog. You can configure if the

capability should be enabled with the *Enabled* checkbox. Once you have completed the configuration, press *Add* and the capability will be saved and appear in the list.

Many of the built-in capabilities and plugins can be configured in the *Capabilities* administration section but also in other more user friendly, targeted user interface sections, e.g., the user token feature administrated by using the interface available via the *User Token* menu item in the *Security* left-hand menu as well as by editing the user token capability. Other capabilities are internal to repository manager functionality and sometimes managed automatically by the responsible plugin. Some optional configuration like the branding plugin is only done in the capabilities administration. The branding plugin allows the customization of the icon in the top left-hand corner of the user interface header and is described in [Customizing the User Interface with Branding](#)(see page 303).

Customizing the User Interface with Branding

Available in Nexus Repository Pro only

The branding plugin is part of Nexus Repository Manager Pro and allows you to customize your repository manager instance by replacing the default Nexus Repository Manager Pro logo in the top left-hand corner of the header with an image of your choice.

You can configure it by adding the *Branding* capability as documented in [Accessing and Configuring Capabilities](#)(see page 301) and enabling it. By default, the branding plugin will look for the new logo in a file called branding.png in your data directory's conf folder. By default, the location is therefore sonatype-work/nexus/conf/branding.png. The new logo needs to be a PNG image. To blend in well in the UI, it is recommended that it is of 60 pixels height and has a transparent background.

If it fails to find a new logo, the plugin will fall back to using the default logo.

Prior to Nexus Repository Manager Pro 2.7, the branding plugin was an optional plugin and needed to be installed following the documentation in [Managing Plugins](#)(see page 493). In this case you needed to add a branding.image.path property to the nexus.properties file in \$NEXUS_HOME/conf/:

```
branding.image.path=/data/images/nexus_logo.png
```

Configuring Outreach Content in Welcome Tab

The Outreach Plugin is installed and enabled by default in Nexus Repository Manager. It allocates space underneath the search feature on the *Welcome* tab for linking to further documentation and support resources. This data is retrieved from Sonatype servers.

In a case where this outgoing traffic from your repository manager instance or the resulting documentation and links are not desired, the plugin can be disabled. The plugin can be disabled in the settings for the *Outreach:Management* capability as documented in [Accessing and Configuring Capabilities](#)(see page 301).

You can safely remove the plugin as well without any other negative side effects. To do so, simply remove the `nexus-outreach-plugin-X.Y.Z` folder in `$NEXUS_HOME/nexus/WEB-INF/plugin-repository/` and restart your repository manager instance.

Network Configuration

By default, the repository manager listens on port 8081. You can change this port, by changing the value in the `$NEXUS_HOME/conf/nexus.properties` file shown in *Contents of conf/nexus.properties*. To change the port, stop the repository manager, change the value of `application-port` in this file, and then restart it. Once you do this, you should see a log statement in `$NEXUS_HOME/logs/wrapper.log` telling you that the repository manager is listening on the altered port.


Contents of conf/nexus.properties

```
# Sonatype Nexus
# =====
# This is the most basic configuration of Nexus.

# Jetty section
application-port=8081
application-host=0.0.0.0
nexus-webapp=${bundleBasedir}/nexus
nexus-webapp-context-path=/nexus
# Nexus section
nexus-work=${bundleBasedir}/../sonatype-work/nexus
runtime=${bundleBasedir}/nexus/WEB-INF
```

Logging

You can configure the level of logging for the repository manager and all plugins as well as inspect the current log using the user interface. Access the *Logging* panel by clicking on the *Logging* menu item in the *Administration* submenu in the main menu. Clicking on this link will display the panel shown in *Figure 6.22, “The Logging Panel with the Loggers Configuration”*.

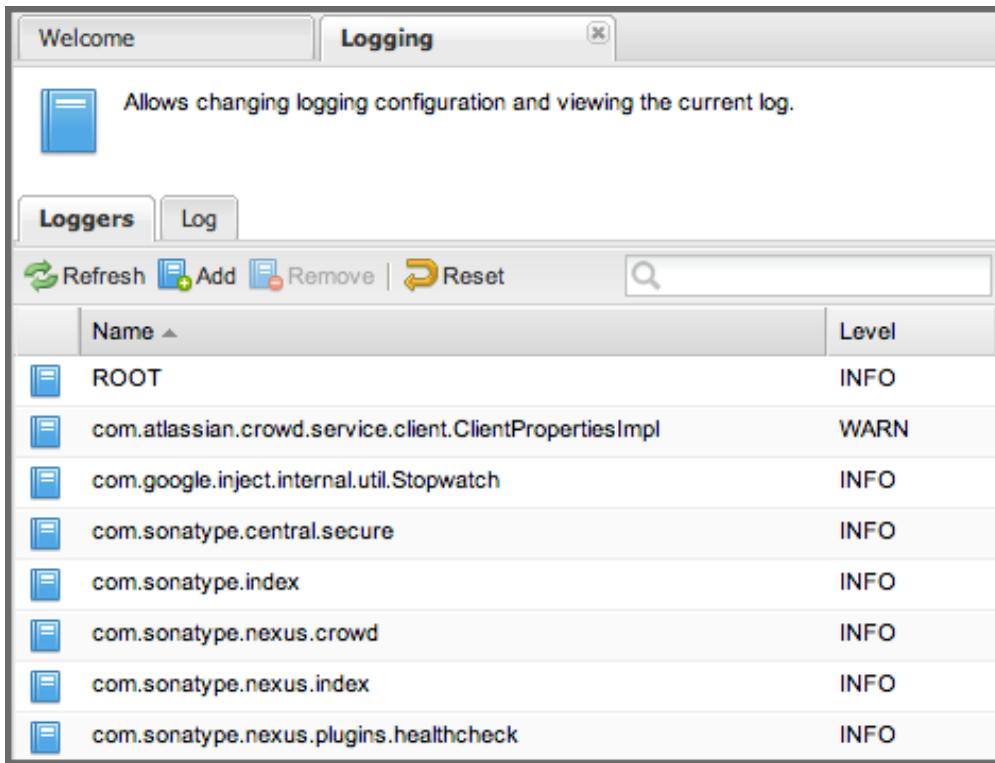

| Name | Level |
|---|-------|
| ROOT | INFO |
| com.atlassian.crowd.service.client.ClientPropertiesImpl | WARN |
| com.google.inject.internal.util.Stopwatch | INFO |
| com.sonatype.central.secure | INFO |
| com.sonatype.index | INFO |
| com.sonatype.nexus.crowd | INFO |
| com.sonatype.nexus.index | INFO |
| com.sonatype.nexus.plugins.healthcheck | INFO |

Figure 6.22. The Logging Panel with the Loggers Configuration

The *Loggers* tab in the panel allows you to configure the preconfigured loggers as well as add and remove loggers. You can modify the log level for a configured logger by clicking on the *Level* value e.g., *INFO*. It will change into a drop-down of the valid levels including *OFF*, *DEFAULT*, *INFO* and others.

If you select a row in the list of loggers, you can delete the highlighted logger by pressing the *Remove* button above the list. The *Add* button beside it can be used to create new loggers in a dialog. You will need to know the logger you want to configure. Depending on your needs you can inspect the source of Nexus Repository Manager OSS and the plugins as well as the source of your own plugins to determine the related loggers or contact Sonatype support for detailed help. In addition, it is important to keep in mind that some loggers will change between repository manager and plugin versions used.

The *Reset* button allows you to remove all your custom loggers and get back to the setup shipped with the repository manager.

The loggers configured in the user interface are persisted into `sonatype-work/nexus/conf/logback-overrides.xml` and override any logging levels configured in the main log file `logback-nexus.xml` as well as the other `logback-*` files. If you need to edit a logging level in those files, we suggest to edit the overrides file. This will give you access to edit the configuration in the user interface at a later stage and also ensure that the values you configure take precedence.

The *ROOT* logger level controls how verbose the logging is in general. If set to *DEBUG*, logging will be very verbose printing all log messages including debugging statements. If set to *ERROR*, logging will be far less verbose, only printing out a log statement if the system encounters an error. *INFO* represents an intermediate amount of logging.

⚠ When configuring logging, keep in mind that heavy logging can have a significant performance impact on an application and any changes in the user interface trigger the change to the logging immediately.

In Nexus Repository Manager releases prior to 2.7, logging configuration needed to be done by editing the `logback-nexus.xml` file found in `sonatype-work/nexus/conf`.

Once logging is configured as desired, you can inspect the impact of your configuration on the *Log* tab. It allows you to copy the log from the server to your machine by pressing the *Download* button.

The *Mark* button allows you to add a custom text string into the log, so that you can create a reference point in the log file for an analysis of the file. It will insert the text you entered surrounded by * symbols as visible in *Figure 6.23, “Viewing the Log with a Mark”*.

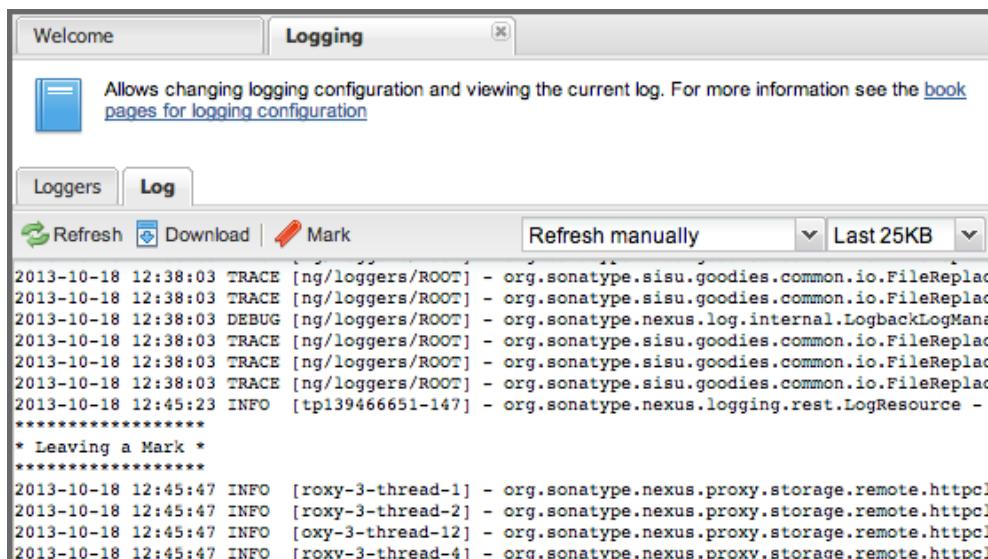


Figure 6.23. Viewing the Log with a Mark


The *Refresh* button on the left triggers an immediate update of the log. The refresh drop-down on the right can be used to trigger updates of the log in regular time intervals or manually. The size drop-down beside it allows you to control the size of the log snippet displayed in the user interface.

Plugins and the REST API

As documented in [Managing Plugins](#)(see page 493), Nexus Repository Manager is built as a collection of plugins supported by a core architecture and additional plugins can be installed.

You can use the *Plugin Console* to list all installed plugins and browse REST services made available by the installed plugins. To open the *Plugin Console*, click on the *Plugin Console* link in the *Administration* menu in the left-hand main menu.

Once you open the *Plugin Console*, you will see a list of plugins installed in your repository manager installation. Clicking on a plugin in this list will display information about the plugin including name, version, status, a description, SCM information about the plugin and the URL of the plugin's project web site and links to the plugin documentation.

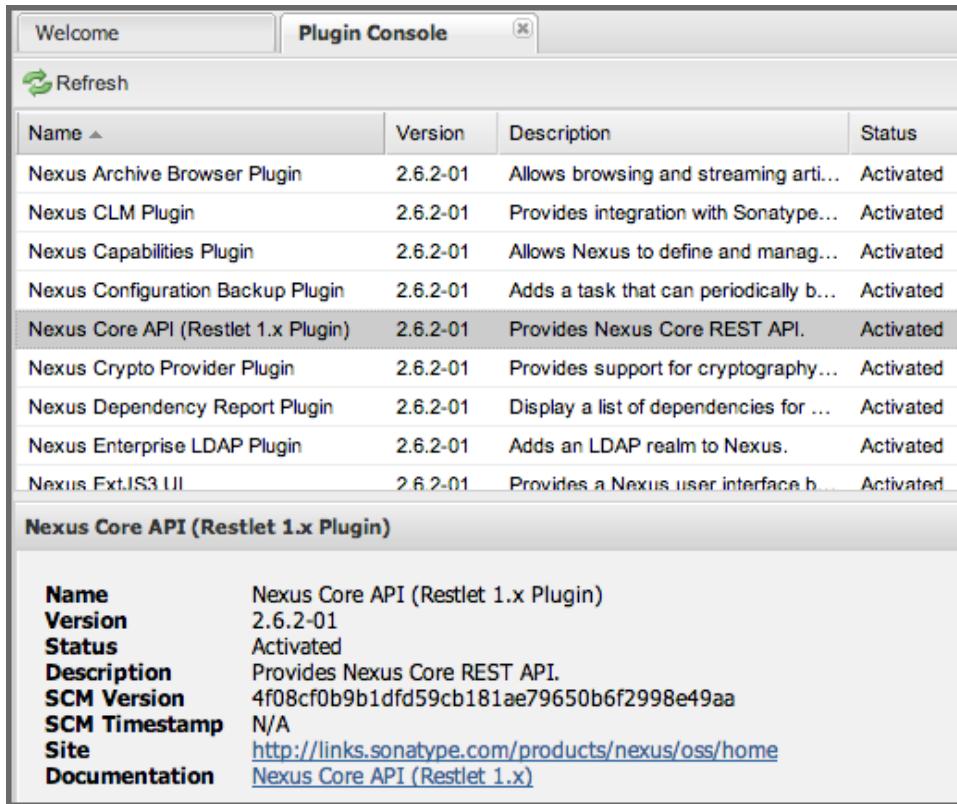

The screenshot shows the 'Plugin Console' interface. At the top, there is a toolbar with a 'Refresh' button. Below the toolbar is a table listing nine plugins:


| Name | Version | Description | Status |
|--|----------|--|-----------|
| Nexus Archive Browser Plugin | 2.6.2-01 | Allows browsing and streaming arti... | Activated |
| Nexus CLM Plugin | 2.6.2-01 | Provides integration with Sonatype... | Activated |
| Nexus Capabilities Plugin | 2.6.2-01 | Allows Nexus to define and manag... | Activated |
| Nexus Configuration Backup Plugin | 2.6.2-01 | Adds a task that can periodically b... | Activated |
| Nexus Core API (Restlet 1.x) Plugin | 2.6.2-01 | Provides Nexus Core REST API. | Activated |
| Nexus Crypto Provider Plugin | 2.6.2-01 | Provides support for cryptography... | Activated |
| Nexus Dependency Report Plugin | 2.6.2-01 | Display a list of dependencies for ... | Activated |
| Nexus Enterprise LDAP Plugin | 2.6.2-01 | Adds an LDAP realm to Nexus. | Activated |
| Nexus ExtJS UI | 2.6.2-01 | Provides a Nexus user interface.b... | Activated |

Below the table, a section titled 'Nexus Core API (Restlet 1.x) Plugin' displays detailed information for that specific plugin:

| | |
|----------------------|---|
| Name | Nexus Core API (Restlet 1.x) Plugin |
| Version | 2.6.2-01 |
| Status | Activated |
| Description | Provides Nexus Core REST API. |
| SCM Version | 4f08cf0b9b1dfd59cb181ae79650b6f2998e49aa |
| SCM Timestamp | N/A |
| Site | http://links.sonatype.com/products/nexus/oss/home |
| Documentation | Nexus Core API (Restlet 1.x) |

Figure 6.24. Plugin Console

All the functionality in the user interface is accessing the REST API's provided by the different plugins. An example for the plugin documentation is the main documentation for the core Nexus API linked off the Nexus Restlet 1.x Plugin from *Figure 6.24, "Plugin Console"* and displayed in *Figure 6.25, "Documentation Website for the Core REST API"*:

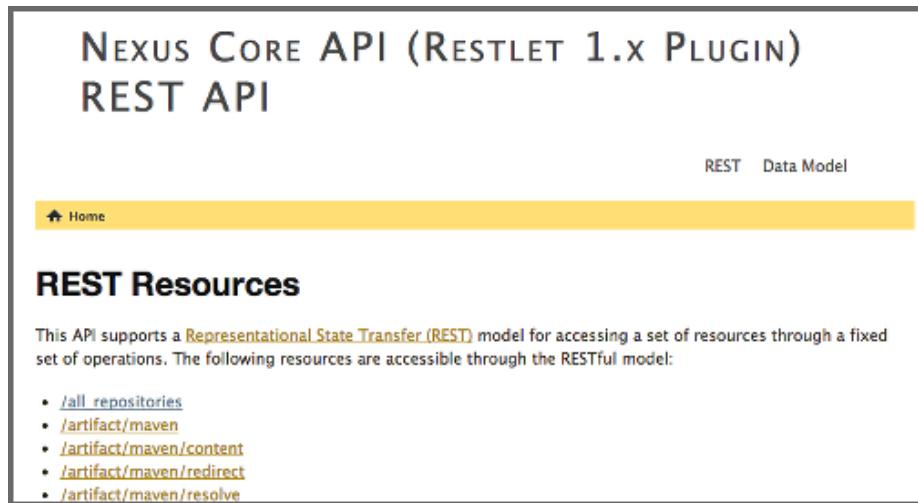

The screenshot shows the "REST API" section of the Nexus Core API documentation. At the top, there's a navigation bar with "Home" and tabs for "REST" and "Data Model". Below the navigation, the title "REST Resources" is displayed. A note below the title states: "This API supports a [Representational State Transfer \(REST\)](#) model for accessing a set of resources through a fixed set of operations. The following resources are accessible through the RESTful model:" followed by a bulleted list of URLs.

- [/all/repositories](#)
- [/artifact/maven](#)
- [/artifact/maven/content](#)
- [/artifact/maven/redirect](#)
- [/artifact/maven/resolve](#)

Figure 6.25. Documentation Website for the Core REST API

You can use the REST API to integrate the repository manager with your external systems. If your external integration uses Java, or is otherwise JVM based, then you can use the Nexus Repository Manager client using the dependency from *Nexus Client Core Dependency for Maven Projects* with the version corresponding to your repository manager version.

Nexus Client Core Dependency for Maven Projects

```
<dependency>
    <groupId>org.sonatype.nexus</groupId>
    <artifactId>nexus-client-core</artifactId>
    <version>2.12.1-01</version>
</dependency>
```

Examples of using the client library can be found in the [Nexus Maven Plugins](#)²¹³¹ or the [Nexus Ant Tasks](#)²¹³².

The REST API can be invoked from many other programming and scripting languages. A simple example of using the curl command in a shell script is displayed in *A curl Invocation Loading the List of Users from the repository manager*.

A curl Invocation Loading the List of Users from the repository manager

```
curl -X GET -u admin:admin123 http://localhost:8081/nexus/service/local/users
```

Managing Security

²¹³¹ <https://github.com/sonatype/nexus-maven-plugins>

²¹³² <https://github.com/sonatype/nexus-ant-tasks>

Nexus Repository Manager uses a role-based access control (RBAC) system that gives administrators very fine-grained control over who can read from a repository (or a subset of repositories), who can administer the server and who can deploy to repositories. The security model in the repository manager is also so flexible as to allow you to specify that only certain users or roles can deploy and manage components in a specific repository under a specific groupId or asset class. The default configuration of Nexus Repository Manager ships with four roles and four users with a standard set of permissions that will make sense for most users. As your security requirements evolve, you'll likely need to customize security settings to create protected repositories for multiple departments or development groups. Nexus Repository Manager provides a security model which can adapt to any scenario. The security configuration is done via menu items in the Security submenu in the left-hand main menu.

The RBAC system is designed around the following four security concepts:

Privileges

Privileges are rights to read, update, create, or manage resources and perform operations. The repository manager ships with a set of core privileges that cannot be modified, and you can create new privileges to allow for fine-grained targeting of role and user permissions for specific repositories.

Targets

Privileges are usually associated with resources or targets. A target can be a specific repository or a set of repositories grouped in something called a repository target. A target can also be a subset of a repository or a specific set of assets within a repository e.g. all javadoc archives only. Using a target you can for example also apply a specific privilege to a single groupId and all components using it.

Roles

Collections of privileges can be grouped into roles to make it easier to define collections of privileges common to certain classes of users. For example, deployment users will all have similar sets of permissions. Instead of assigning individual privileges to individual users, you use roles to make it easier to manage users with similar sets of privileges. A role has one or more privileges and/or one or more roles.

Users

Users can be assigned roles and will model the individuals who will be logging into the repository manager and reading, deploying or managing repositories.

Managing Privileges


You can access the configuration of privileges via the *Privileges* menu item in the *Security* submenu in the left-hand main menu.

The repository manager has three types of privileges:

- application privileges - covers actions a user can execute in the user interface
- repository target privileges - governs the level of access a user has to a particular repository or repository target

- repository view privileges - controls whether a user can view a repository

Behind the scenes, a privilege is related to a single REST operation and method like create, update, delete, read.

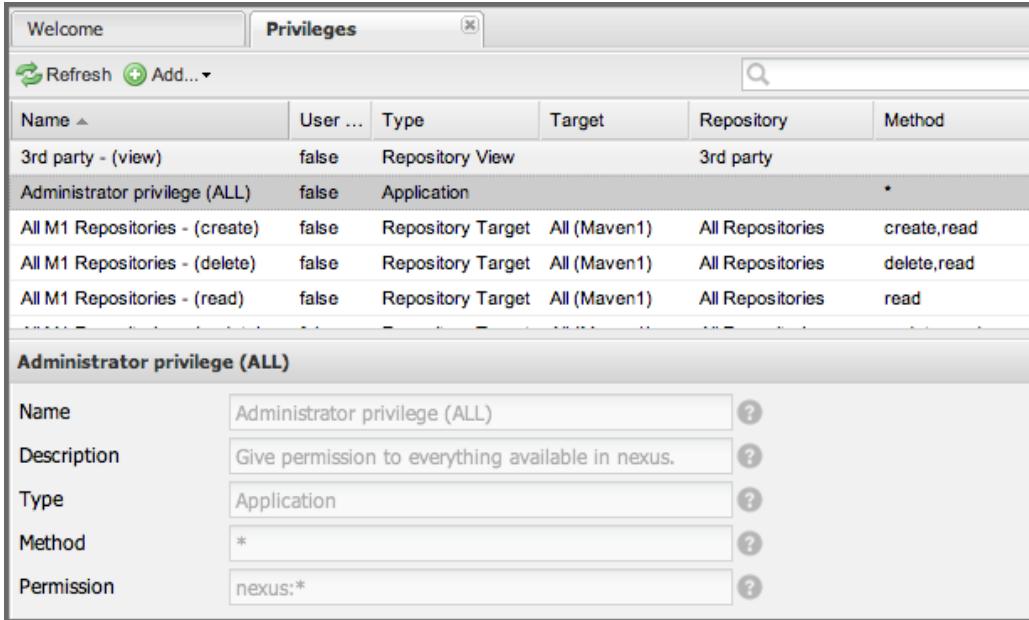


| Name | User ... | Type | Target | Repository | Method |
|--------------------------------|----------|-------------------|--------------|------------------|-------------|
| 3rd party - (view) | false | Repository View | | 3rd party | |
| Administrator privilege (ALL) | false | Application | | * | |
| All M1 Repositories - (create) | false | Repository Target | All (Maven1) | All Repositories | create,read |
| All M1 Repositories - (delete) | false | Repository Target | All (Maven1) | All Repositories | delete,read |
| All M1 Repositories - (read) | false | Repository Target | All (Maven1) | All Repositories | read |

Administrator privilege (ALL)

| | |
|-------------|---|
| Name | Administrator privilege (ALL) |
| Description | Give permission to everything available in nexus. |
| Type | Application |
| Method | * |
| Permission | nexus:* |

Figure 6.26. Managing Security Privileges

To create a new privilege, click on the *Add...* button in the *Privileges* panel and choose *Repository Target Privilege*. Creating a privilege will load the *New Repository Target Privilege* form shown in Figure 6.27, “*Creating a New Repository Target Privilege*”. This form takes a privilege name, a privilege description, the repository to target, and a repository target.

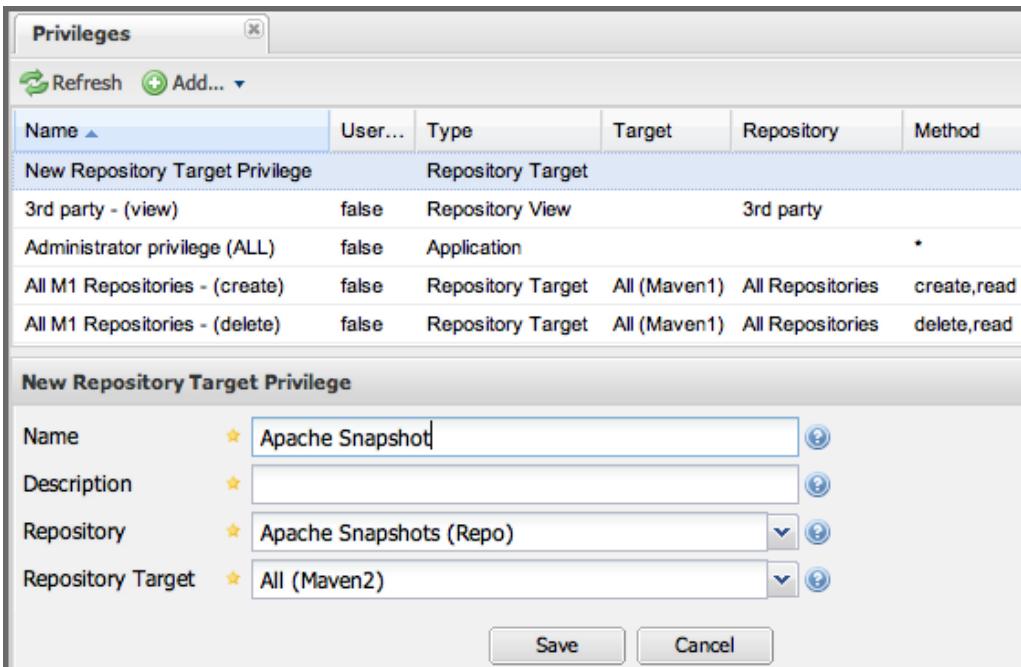

| Name | User... | Type | Target | Repository | Method |
|---------------------------------|---------|-------------------|--------------|------------------|-------------|
| New Repository Target Privilege | | Repository Target | | | |
| 3rd party - (view) | false | Repository View | | 3rd party | |
| Administrator privilege (ALL) | false | Application | | * | |
| All M1 Repositories - (create) | false | Repository Target | All (Maven1) | All Repositories | create,read |
| All M1 Repositories - (delete) | false | Repository Target | All (Maven1) | All Repositories | delete,read |

New Repository Target Privilege

| | |
|-------------------|-------------------------|
| Name | Apache Snapshot |
| Description | |
| Repository | Apache Snapshots (Repo) |
| Repository Target | All (Maven2) |

Save Cancel

Figure 6.27. Creating a New Repository Target Privilege

Once you create a new privilege, it will create four underlying privileges: create, delete, read and update. The four privileges created by the form in *Figure 6.27, “Creating a New Repository Target Privilege”* are shown in *Figure 6.28, “Create, Delete, Read, and Update Privileges Created”*.


| Privileges | | | | | | |
|----------------------------|---------|-------------------|--------------|-----------------|-------------|--|
| Name | User... | Type | Target | Repository | Method | |
| Apache Snapshot - (create) | true | Repository Target | All (Maven2) | Apache Snaps... | create,read | |
| Apache Snapshot - (delete) | true | Repository Target | All (Maven2) | Apache Snaps... | delete,read | |
| Apache Snapshot - (read) | true | Repository Target | All (Maven2) | Apache Snaps... | read | |
| Apache Snapshot - (update) | true | Repository Target | All (Maven2) | Apache Snaps... | update,read | |

| API-Key Access | |
|----------------|--|
| Name | API-Key Access |
| Description | Give permission to use an API-Key to access the server |
| Type | Application |
| Method | * |
| Permission | apikey:access |

Figure 6.28. Create, Delete, Read, and Update Privileges Created

Managing Repository Targets

A Repository Target is a set of regular expressions to match on the path of components in a repository (in the same way as the routing rules work). Nexus Repository Manager is preconfigured with a number of repository targets and allows you to create additional ones. Access the management interface visible in *Figure 6.29, “Managing Repository Targets”* via the *Repository Targets* menu item in the left-hand *Views/Repositories* sub-menu.

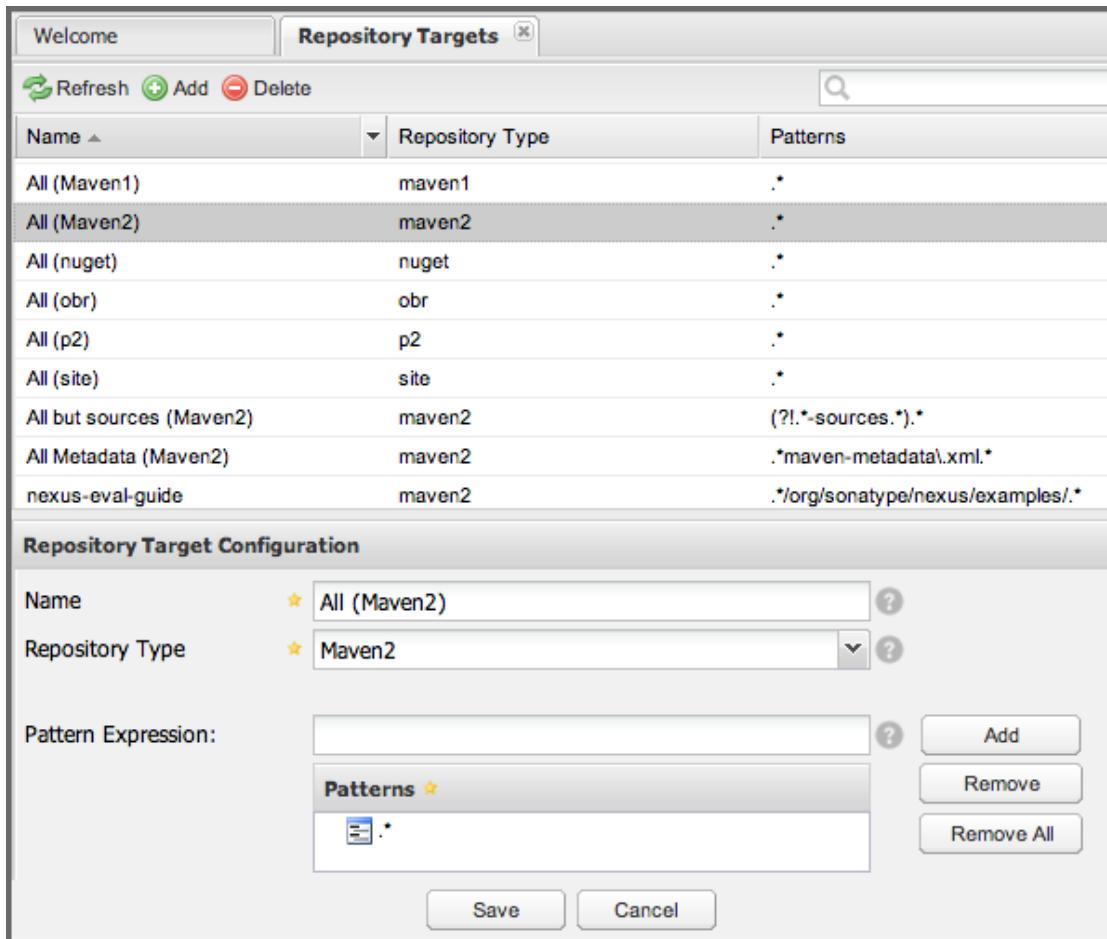

| Name | Repository Type | Patterns |
|--------------------------|-----------------|----------------------------------|
| All (Maven1) | maven1 | .* |
| All (Maven2) | maven2 | .* |
| All (nuget) | nuget | .* |
| All (obr) | obr | .* |
| All (p2) | p2 | .* |
| All (site) | site | .* |
| All but sources (Maven2) | maven2 | (?!.*-sources.*).* |
| All Metadata (Maven2) | maven2 | .*maven-metadata.xml.* |
| nexus-eval-guide | maven2 | .*org/sonatype/nexus/examples/.* |

Repository Target Configuration

Name: All (Maven2)

Repository Type: Maven2

Pattern Expression:

Patterns: .*

Buttons: Save, Cancel, Add, Remove, Remove All


Figure 6.29. Managing Repository Targets

Repository targets allow you to define, for example, a target called Apache Maven with a pattern of `^/org/apache/maven/.*`. This would match all components with a groupId of `org.apache.maven` and any components within nested groupIds like `org.apache.maven.plugins`.

A pattern that would capture more components like all components with any part of the path containing `maven` could be `.*maven.*`.

The regular expressions can also be used to exclude components as visible with the pattern `(?!.*-sources.*).*` in *Figure 6.30, “Excluding Source Components from a Repository Targets”* where components with the qualifier `-sources` are excluded. The syntax used for the expressions is the [Java syntax](#)²¹³³, that is similar but not identical to the Perl syntax.

²¹³³ <http://docs.oracle.com/javase/tutorial/essential/regex/>

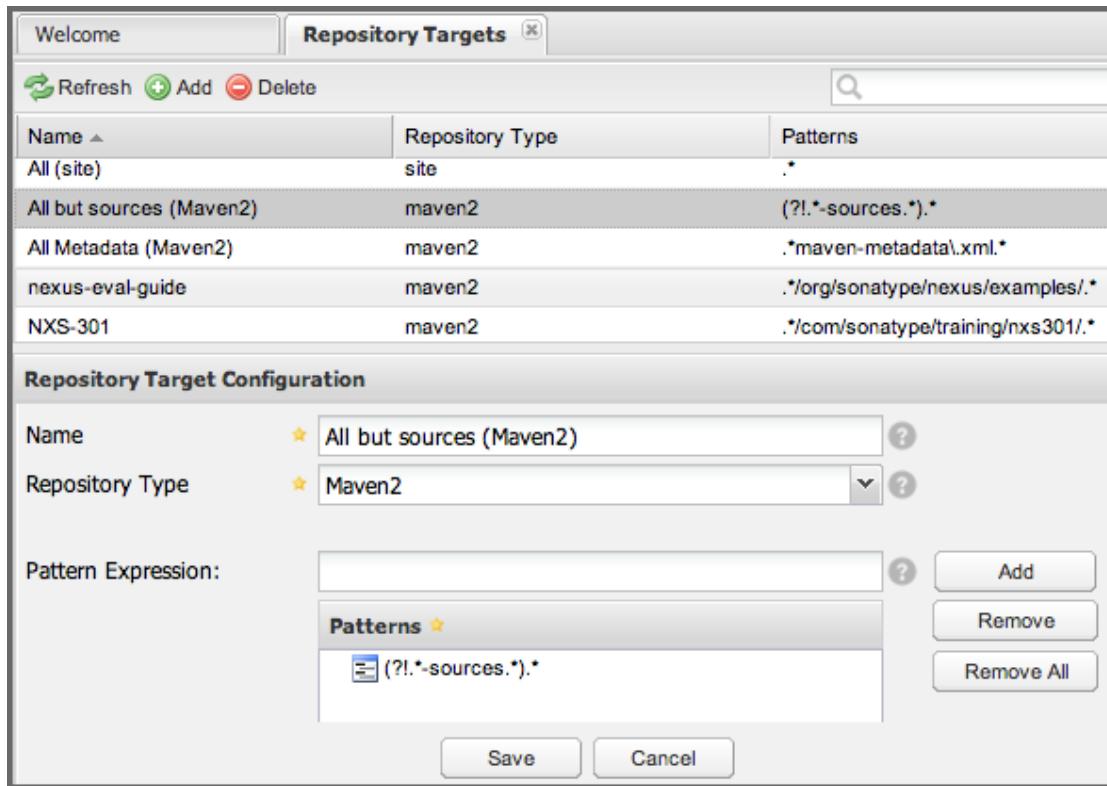

| Name | Repository Type | Patterns |
|--------------------------|-----------------|-----------------------------------|
| All (site) | site | .* |
| All but sources (Maven2) | maven2 | (?!.*-sources.*).* |
| All Metadata (Maven2) | maven2 | .*maven-metadata.xml.* |
| nexus-eval-guide | maven2 | .*/org/sonatype/nexus/examples/.* |
| NXS-301 | maven2 | .*com/sonatype/training/nxs301/.* |

Repository Target Configuration

Name: All but sources (Maven2)

Repository Type: Maven2

Pattern Expression:

Patterns:

- (?!.*-sources.*).*

Buttons: Save, Cancel, Add, Remove, Remove All

Figure 6.30. Excluding Source Components from a Repository Targets


By combining multiple patterns in a repository target, you can establish a fine-grained control of components included and excluded.

Once you have created a repository target, you can utilize it as part of your security setup. You can add a new privilege that relates to the target and controls the CRUD (Create, Read, Update and Delete) operations for artifacts matching that path. The privilege can even span multiple repositories. With this setup you can delegate all control of components in `org.apache.maven` to a "Maven" team. In this way, you don't need to create separate repositories for each logical division of your components.

Repository targets are also be used for matching components for implicit capture in the Staging Suite as documented in [Staging Releases](#)(see page 380).

Managing Roles


Nexus Repository Manager ships with a large number of roles predefined including *Nexus Administrator Role*, *Nexus Anonymous Role*, *Nexus Developer Role*, and *Nexus Deployment Role*. Click on the *Roles* menu item under *Security* in the main menu to show the list of roles shown in *Figure 6.31, "Viewing the List of Defined Roles"*.

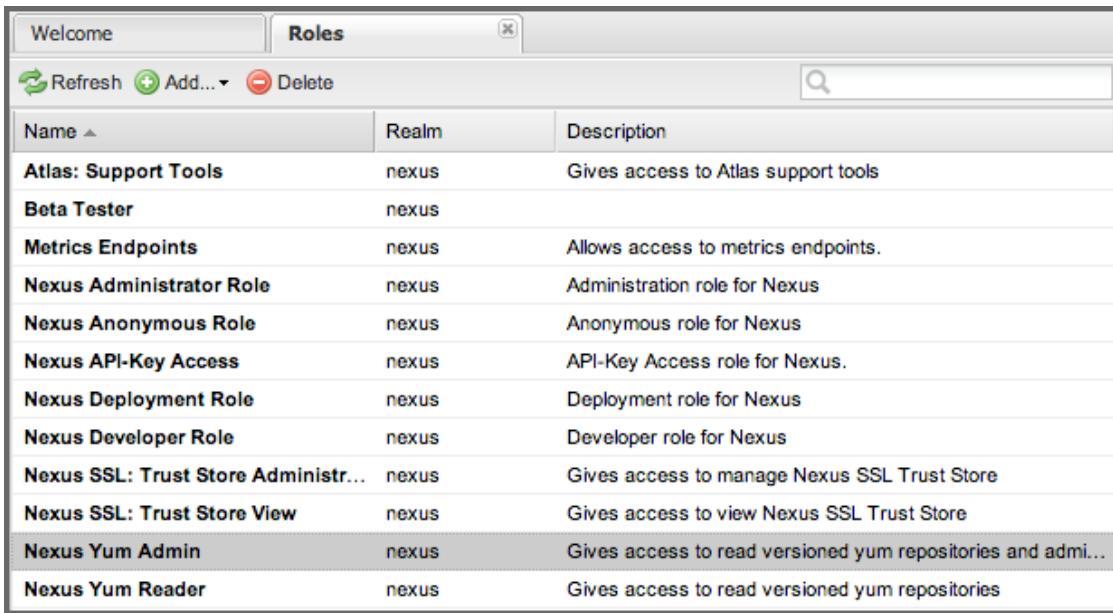

| Name | Realm | Description |
|-------------------------------------|-------|--|
| Atlas: Support Tools | nexus | Gives access to Atlas support tools |
| Beta Tester | nexus | |
| Metrics Endpoints | nexus | Allows access to metrics endpoints. |
| Nexus Administrator Role | nexus | Administration role for Nexus |
| Nexus Anonymous Role | nexus | Anonymous role for Nexus |
| Nexus API-Key Access | nexus | API-Key Access role for Nexus. |
| Nexus Deployment Role | nexus | Deployment role for Nexus |
| Nexus Developer Role | nexus | Developer role for Nexus |
| Nexus SSL: Trust Store Administr... | nexus | Gives access to manage Nexus SSL Trust Store |
| Nexus SSL: Trust Store View | nexus | Gives access to view Nexus SSL Trust Store |
| Nexus Yum Admin | nexus | Gives access to read versioned yum repositories and adm... |
| Nexus Yum Reader | nexus | Gives access to read versioned yum repositories |

Figure 6.31. Viewing the List of Defined Roles

To create a new role, click on the *Add...* button, select *Nexus Role* and fill out the *New Nexus Role* form shown in *Figure 6.32, “Creating a New Nexus Role”*.

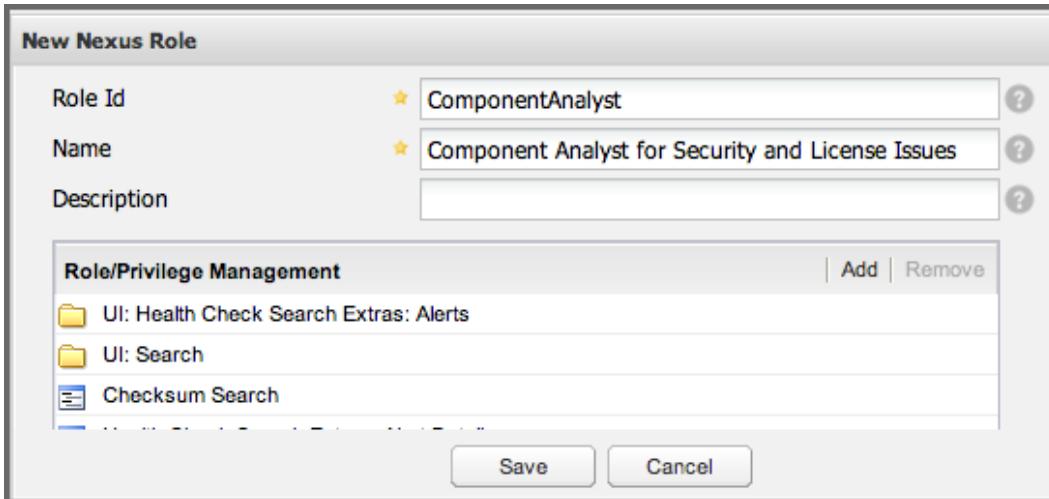

New Nexus Role

| | |
|-------------|---|
| Role Id | ComponentAnalyst |
| Name | Component Analyst for Security and License Issues |
| Description | |

Role/Privilege Management

- UI: Health Check Search Extras: Alerts
- UI: Search
- Checksum Search

Save Cancel

Figure 6.32. Creating a New Nexus Role

When creating a new role, you will need to supply a *Role ID*, a *Name* and a *Description*. Roles are comprised of other roles and individual privileges. To assign a role or privilege to a role, click on *Add* button under *Role/ Privilege Management* to access the *Add Roles and Privileges* dialog displayed in *Figure 6.33, “The Dialog to Add Roles and Privileges”*. It allows you to filter the paged displayed of all the available roles and privileges with a filter text as well as narrowing the search to roles or privileges only. Using the filter and the paging you will be able to find the desired role or privilege quickly.

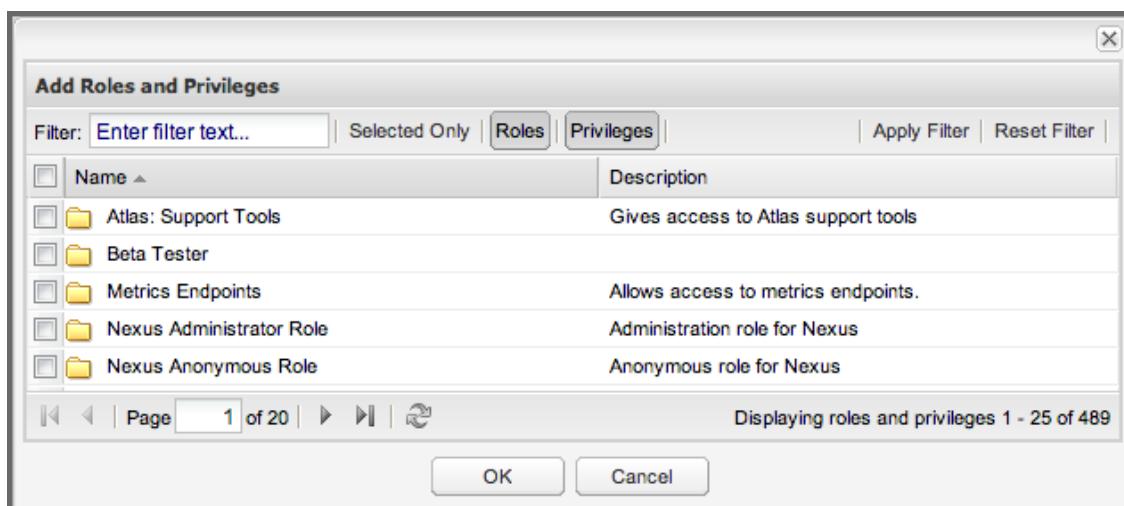


Figure 6.33. The Dialog to Add Roles and Privileges

The built-in roles are managed by Nexus and cannot be edited or deleted. The role configuration section below the list is visible but disabled for these roles.

A role is comprised of other roles and individual privileges. To view the component parts of a role, select the role in the Roles list and then choose the *Role Tree* tab as shown in *Figure 6.34, “Viewing a Role Tree”*.

Figure 6.34. Viewing a Role Tree

- With the Repository Targets, you have fine-grained control over every action in the system. For example, you could make a target that includes everything except sources (`.*(?!sources)\.*`) and assign that to one role while giving yet another role access to everything. Using these different access roles e.g., you can host your public and private components in a single repository without giving up control of your private components.

Managing Users

Nexus Repository Manager Pro and Nexus Repository Manager OSS ships with three users: *admin*, *anonymous*, and *deployment*. The *admin* user has all privileges, the anonymous user has read-only privileges, and the deployment user can both read and deploy to repositories. If you need to create users with a more focused set of permissions, you can click on *Users* under *Security* in the left-hand main menu. Once you see the list of users, you can click on a user to edit that specific user's *First Name*, *Last Name* and *Email*. Editing a users Status allows you to activate or disable a user altogether. You can also assign or revoke specific roles for a particular user.

The screenshot shows the 'Users' section of the Nexus Repository Manager 2 interface. At the top, there is a toolbar with buttons for Refresh, Add..., Delete, and search. Below the toolbar is a table listing four users:

| User ID | Realm | First Name | Last Name | Email | Status | Roles |
|------------|---------|------------|----------------|---------------------------|--------|-----------------------------------|
| deployment | default | Deployment | User | changeme1@yourcompany.com | Active | Repo: All Repositories (Full C... |
| admin | default | GENERIC | ADMIN | nexus-admins@example.com | Active | Repo: All Repositories (Full C... |
| manfred | default | Manfred | Moser | manfred@sonatype.com | Active | Repo: All Repositories (Full C... |
| anonymous | default | Nexus | Anonymous User | changeme2@yourcompany.com | Active | Nexus Anonymous Role, Rep... |

Below the table, the 'admin' user is selected, and their details are displayed in a form:

| | |
|------------|--------------------------|
| User ID | admin |
| First Name | GENERIC |
| Last Name | ADMIN |
| Email | nexus-admins@example.com |
| Status | Active |

At the bottom of the user details, there is a 'Role Management' section containing two roles: 'Nexus Administrator Role' and 'Repo: All Repositories (Full Control)'. There are 'Add' and 'Remove' buttons next to the list of roles.

Figure 6.35. Managing Users

Clicking the Add button in the Role Management section will bring up the list of available roles in a pop-up window visible in Figure 6.36, "Adding Roles to a User". It allows you filter and search for roles and add one or multiple roles to the user.

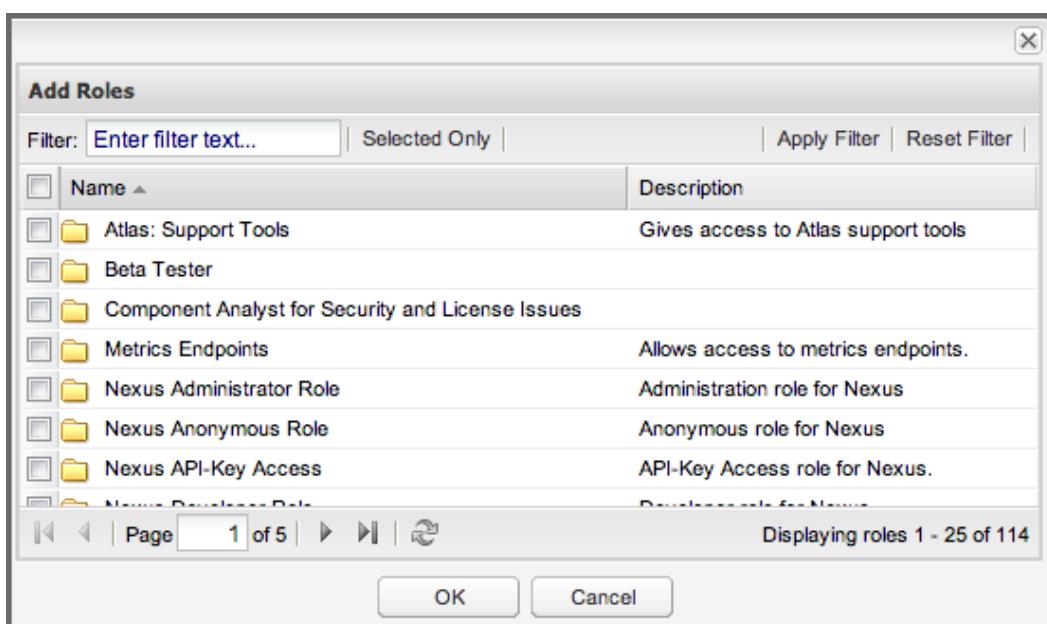


Figure 6.36. Adding Roles to a User

A user can be assigned one or more roles that in turn can include references to other roles or to individual privileges. To view a tree of assigned roles and privileges, select the *Role Tree* for a particular user as shown in Figure 6.37, “User Role Tree”.


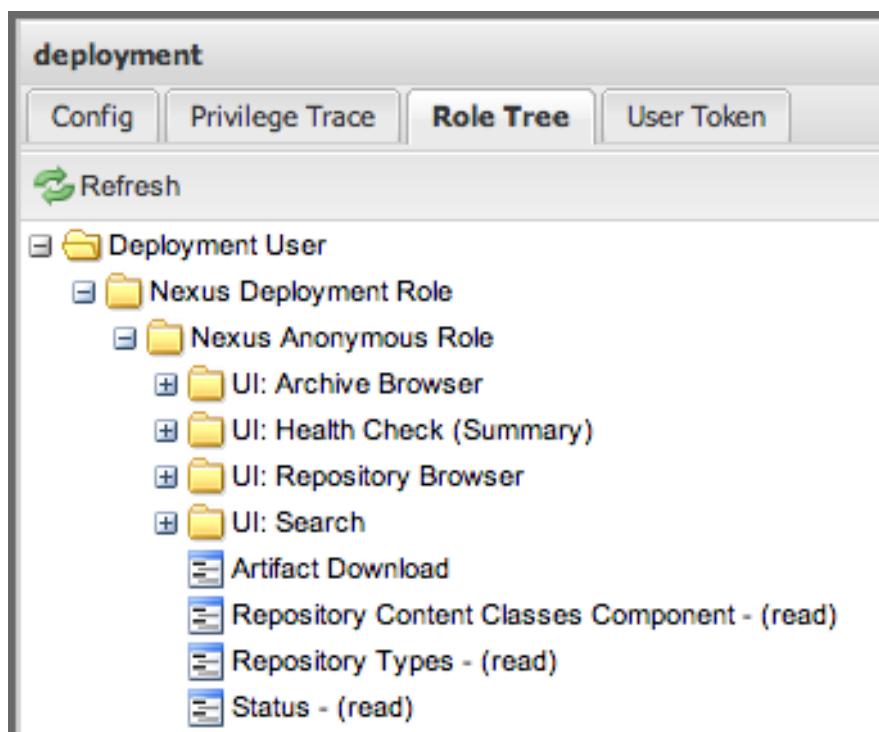


Figure 6.37. User Role Tree

If you need to find out exactly how a particular user has been granted a particular privilege, you can use the Privilege Trace panel as shown in *Figure 6.38, “User Privilege Trace”*. The *Privilege Trace* panel lists all of the privileges that have been granted to a particular user in the *Privileges* section. Clicking on a privilege loads a tree of roles that grant that particular privilege to a user. If a user has been assigned a specific privilege by more than one Role or Privilege assignment, you will be able to see this reflected in the *Role Containment* list.

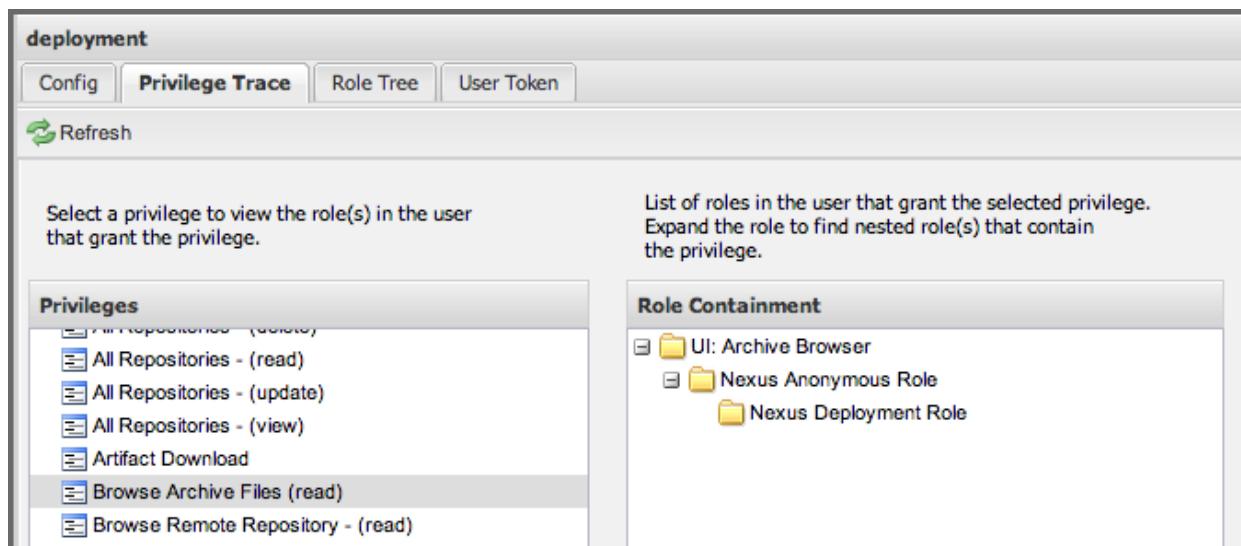

The screenshot shows the 'Privilege Trace' tab selected in the top navigation bar. On the left, a list of privileges is displayed, with 'Browse Archive Files (read)' currently selected. On the right, a 'Role Containment' tree is shown, indicating the roles that grant the selected privilege. The tree structure is as follows:

- UI: Archive Browser
 - Nexus Anonymous Role
 - Nexus Deployment Role

Figure 6.38. User Privilege Trace

Additional plugins can contribute further panels for the security configuration of a user. An example of an additional panel is the User Token panel, added by the User Token feature of Nexus Repository Manager Pro as documented in [Security Setup with User Tokens](#)(see page 318).

Security Setup with User Tokens

Available in Nexus Repository Pro only

Introduction

When using Apache Maven with Nexus Repository Manager, the user credentials for accessing the repository manager have to be stored in clear text in the user's `settings.xml` file. Maven has the ability to encrypt passwords in `settings.xml`, but the need for it to be reversible in order to be used limits its security. In addition, the general setup and use is cumbersome, and the potential need for regular changes due to strong security requirements e.g., with regular required password changes triggers the need for a simpler and more secure solution.

Other build systems use similar approaches and can benefit from the usage of User Token as well.

The User Token feature of Nexus Repository Manager Pro fills that need for Apache Maven as well as other build systems and users. It introduces a two-part token for the user, replacing the username and password with a user code and a pass code that allows no way of recovering the username and password from the

user code and pass code values; yet can be used for authentication with the repository manager from the command line via Maven as well as in the UI.

This is especially useful for scenarios where single sign-on solutions like LDAP are used for authentication against the repository manager and other systems and the plain text username and password cannot be stored in the `settings.xml` following security policies. In this scenario the generated user tokens can be used instead.

User token usage is integrated in the Maven settings template feature of Nexus Repository Manager Pro documented in [Managing Maven Settings](#)(see page 429) to further simplify its use.

Enabling and Resetting User Tokens

The user token-based authentication can be activated by an administrator or user with the role `usertoken-admin` or `usertoken-all` by accessing the User Token item in the Security submenu on the left-hand main menu.

Once user token is Enabled by activating the checkbox in the administration tab displayed in *Figure 6.39, “User Token Administration Tab Panel”* and pressing Save, the feature is activated and the additional section to Reset All User Tokens becomes available.

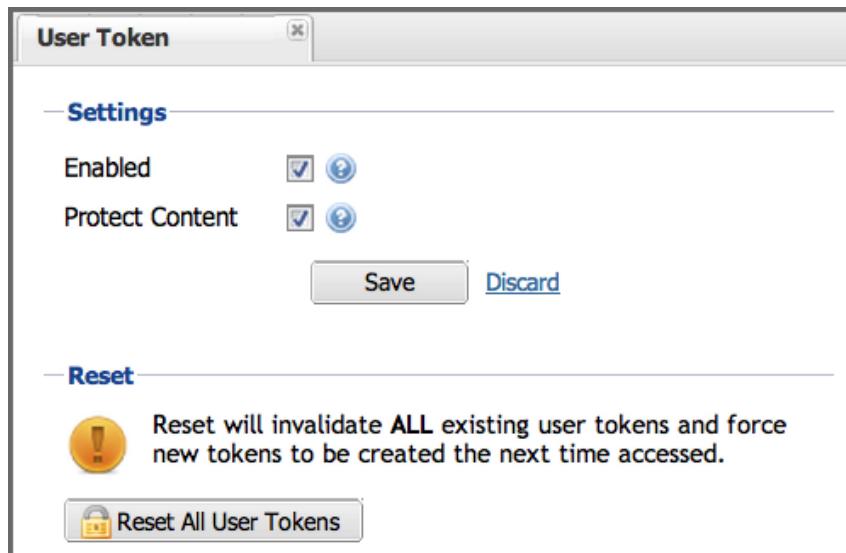


Figure 6.39. User Token Administration Tab Panel

Selecting the Protect Content feature configures the repository manager to require a user token for any access to the content URLs that includes all repositories and groups. This affects read access as well as write access e.g., for deployments from a build execution or a manual upload.

Activating User Token as a feature automatically adds the *User Token Realm* as a *Selected Realm* in the *Security Settings* section as displayed in *Figure 6.40, “Selected Realms Server Security Settings with User Token Realm activated”* and available in the *Server* section of the left-hand *Administration* menu. If desired, you can reorder the security realms used, although the default settings with the *User Token Realm* as a first realm is generally the desired setup. This realm is not removed when the User Token feature is disabled;

however, it will cleanly pass through to the next realm and with the realm remaining any order changes stay persisted in case the feature is reactivated at a later stage.


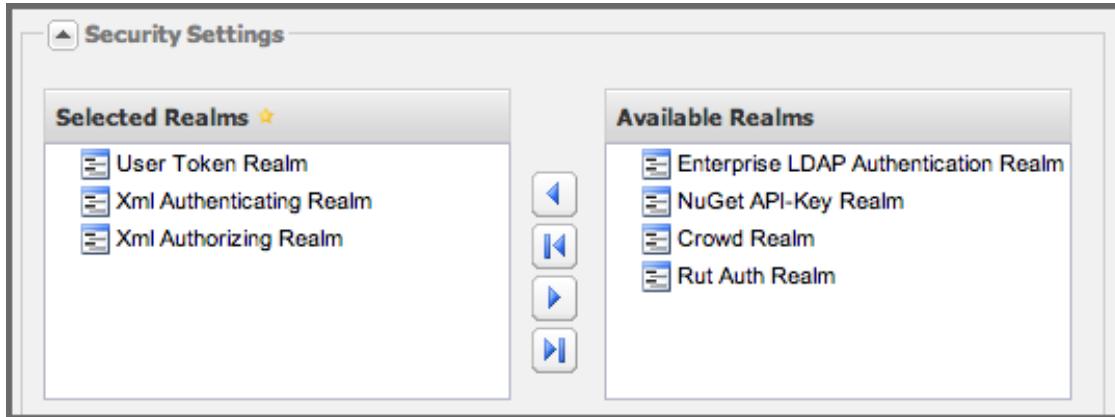


Figure 6.40. Selected Realms Server Security Settings with User Token Realm activated

Besides resetting all user tokens, an administrator can reset the token of an individual user by selecting the *User Token* tab in the *Users* administration from the *Security* menu in the left-hand navigation displayed in *Figure 6.41, "User Token Reset for Specific User in Security Users Administration"*. The password requested for this action to proceed is the password for the currently logged in administrator resetting the token(s).

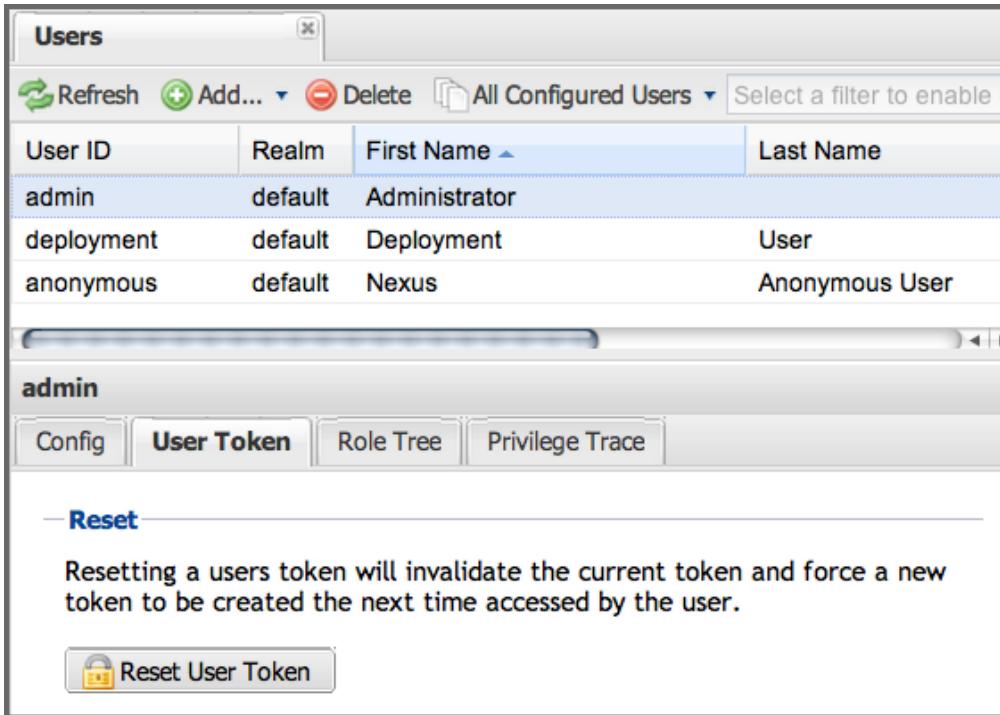

The screenshot shows the 'Users' administration page. The top navigation bar includes 'Refresh', 'Add...', 'Delete', 'All Configured Users', and a filter dropdown. The main table displays three users: 'admin' (Realm: default, First Name: Administrator), 'deployment' (Realm: default, First Name: Deployment, Last Name: User), and 'anonymous' (Realm: default, First Name: Nexus, Last Name: Anonymous User). Below the table, the 'admin' user is selected. The bottom navigation bar shows tabs: 'Config', 'User Token' (which is active and highlighted in blue), 'Role Tree', and 'Privilege Trace'. A 'Reset' section contains a warning message: 'Resetting a users token will invalidate the current token and force a new token to be created the next time accessed by the user.' followed by a 'Reset User Token' button.

Figure 6.41. User Token Reset for Specific User in Security Users Administration

- ❗ Resetting user tokens forces the users to update the `settings.xml` with the newly created tokens and potentially breaks any command line builds using the tokens until this change is carried out. This specifically also applies to continuous integration servers using user tokens or any other automated build executions.

Accessing and Using Your User Tokens

With user token enabled, any user can access his/her individual tokens via their *Profile* panel. To access the panel, select *Profile* when clicking on the user name in the top right-hand corner of the user interface. Then select *User Token* in the drop-down to get access to the *User Token* screen in the *Profile* panel displayed in *Figure 6.42, “User Token Panel for the Logged in Users in the Profile Section”*.

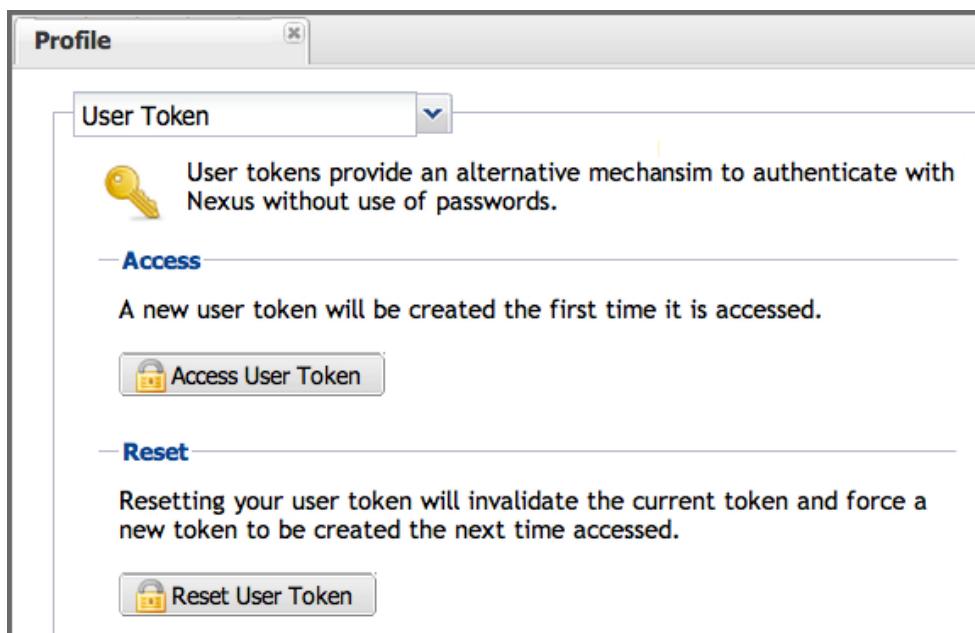


Figure 6.42. User Token Panel for the Logged in Users in the Profile Section

In order to be able to see this *User Token* panel the user has to have the `usertoken-basic` role or the `usertoken:current` privilege. To access or reset the token you have to press the respective button in the panel and then provide your username and password in the dialog.

Resetting the token will show and automatically hide a dialog with a success message and accessing the token will show the dialog displayed in *Figure 6.43, “Accessing the User Token Information”*.

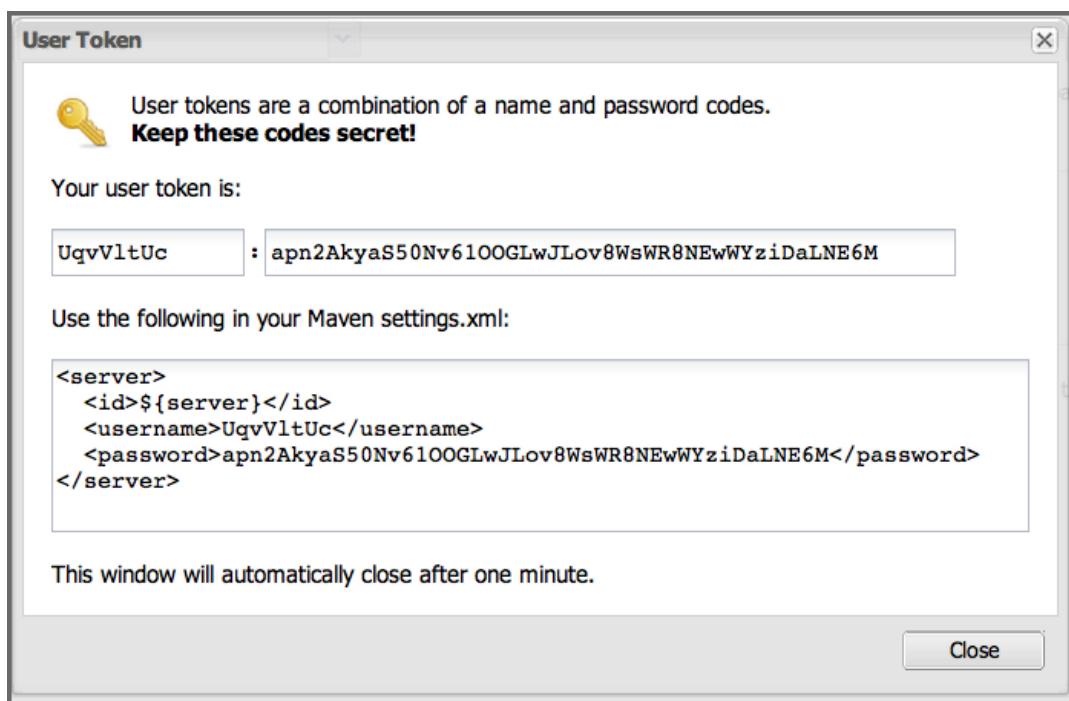


Figure 6.43. Accessing the User Token Information

The User Token dialog displays the user code and pass code tokens in separate fields in the top level section as well as a server section ready to be used in a Maven `settings.xml` file. When using the server section you simply have to replace the `${server}` placeholder with the repository id that references your repository manager you want to authenticate against with the user token. The dialog will close automatically after one minute or can be closed with the *Close* button.

The user code and pass code values can be used as replacements for username and password in the login dialog. It is also possible to use the original username and the pass code to log in to the user interface.

With content protection enabled, command line access to the repository manager will require the tokens to be supplied. Access to e.g., the releases repository via:

```
curl -v --user admin:admin http://localhost:9081/content/repositories/releases/
```

has to be replaced with the usage of user code and pass code separated by colon in the curl command line like this:

```
curl -v --user HdeHuL4x:Y7ZH6ixZFd0VwNpRhaOV+phBISmipsfwVxPRUH1gkv09 http://localhost:9081/content/repositories/releases/
```

User token values can be accessed as part of the Maven settings template feature automating updates as documented in [Managing Maven Settings](#)(see page 429).

⚠ The user tokens are created at first access whether that is by using the user interface or the Nexus Maven Plugin.

Configuring User Token Behavior

The user token feature is preconfigured with built-in parameters and no external configuration file is created by default. It is however possible to customize some behavior by creating a file `sonatype-work/nexus/conf/usertoken.properties`.

The following properties can be configured:

usertoken.userTokenServiceImpl.allowLookupByUserName

This parameter controls if username lookup is allowed when using a pass code. The default is set to true. If set to false, user code and pass code have to be used to authenticate, otherwise username and pass code is also possible. This would be the more secure setting.

usertoken.userTokenServiceImpl.restrictByUserAgent

With this value set to true (the default), any access to the repository manager content with content protection enabled will only be allowed to browser-based access even without credentials. Other tools like curl or wget or other command-line tools will be blocked. With the more secure setting of false , any access without correct codes will be disallowed.

The usertoken. prefix is optional when the properties are loaded from the `usertoken.properties` file.

Authentication via Remote User Token

Available in Nexus Repository OSS and Nexus Repository Pro

Nexus Repository Manager allows integration with external security systems that can pass along authentication of a user via the REMOTE_USER HTTP header field - Remote User Token Rut authentication. There are either web-based container or server-level authentication systems like Shibboleth. In many cases, this is achieved via a server like [Apache HTTPD](#)²¹³⁴ or [nginx](#)²¹³⁵ proxying the repository manager. These servers can in turn defer to other authentication storage systems e.g., via the [Kerberos](#)²¹³⁶ network authentication protocol. These systems and setups can be described as Central Authentication Systems CAS or Single Sign On SSO.

²¹³⁴ <http://httpd.apache.org/>

²¹³⁵ <http://nginx.org/>

²¹³⁶ <http://web.mit.edu/kerberos/>

From the users perspective, he/she is required to login into the environment in a central login page that then propagates the login status via HTTP headers. The repository manager simply receives the fact that a specific user is logged in by receiving the username in a HTTP header field.

The HTTP header integration can be activated by adding and enabling the Rut Auth capability as documented in [Accessing and Configuring Capabilities](#)(see page 301) and setting the HTTP Header name to the header populated by your security system. Typically, this value is REMOTE_USER but any arbitrary value can be set. An enabled capability automatically causes the *Rut Auth Realm* to be added to the *Selected Realms* in the *Security Settings* described in [Security Settings](#)(see page 318).

When an external system passes a value through the header, authentication will be granted and the value will be used as the user name for configured authorization scheme. For example, on a default repository manager installation with the Xml authorization scheme enabled, a value of deployment would grant the user the access rights in the user interface as the deployment user.

A seamless integration can be set up for users if the external security system is exposed via LDAP and configured in the repository manager as LDAP authorization realm combined with external role mappings and in parallel the sign-on is integrated with the operating system sign-on for the user.

Smart Proxy

 Available in Nexus Repository Pro only

Introduction

Default is Polling

Typically an organization runs a single Nexus Repository Manager Pro instance to proxy external components as well as host internally produced components. When a build is running against this instance, it will look for any new components in the proxied remote repositories. This adds additional network traffic that in many cases will just be a response from the remote server indicating that there are no changes.

This polling approach is fine for smaller deployments. It will not result in immediately updated components as soon as they become available upstream. In distributed teams with multiple Nexus Repository Manager Pro instances, this delay can result in build failures and delays. The only way you are going to achieve that everything is up to date is by setting expiration times to zero and constantly polling.

Smart Proxy Introduces Publish-Subscribe

Increasingly, Nexus Repository Manager Pro is used in globally distributed teams or used by projects that span multiple organizations. In many cases, it is advisable for each physical location to host its own Nexus Repository Manager Pro instance. This local instance hosts its own components and proxies the other servers.

An example deployment scenario is displayed in *Figure 7.6, “Deployment Scenario for a Smart Proxy Use Case”*. Using the traditional polling approach, specifically when used with snapshot repositories, can result in significant traffic and a performance hit for all involved servers.

The *Smart Proxy* feature replaces this constant polling approach with a Publish/Subscribe-based messaging approach between repository manager instances sharing a mutual trust. Once a component is published to a repository a message is sent to all subscribing in the smart proxy message queue that details the availability of new component. The subscribers are therefore immediately aware of any new deployment and can provide these components without having to poll the publishing server.

The result is a significantly improved performance due to nearly immediate availability of upstream component information directly in the downstream repository manager instances.

Topics in this section:

- [Enabling Smart Proxy Publishing](#)(see page 325)
- [Repository Specific Smart Proxy Configuration](#)(see page 329)
- [Smart Proxy Security and Messages](#)(see page 330)
- [Example Setup](#)(see page 331)
- [Advanced Configuration](#)(see page 332)

Enabling Smart Proxy Publishing

In order to enable the smart proxy feature on your Nexus Repository Manager Pro instance, you need to navigate to the *Smart Proxy* configuration screen. It is available in the left-hand navigation in the *Enterprise* section. Selecting *Smart Proxy* will show you the configuration screen displayed in *Figure 7.1, “Global Configuration for Smart Proxy”*.

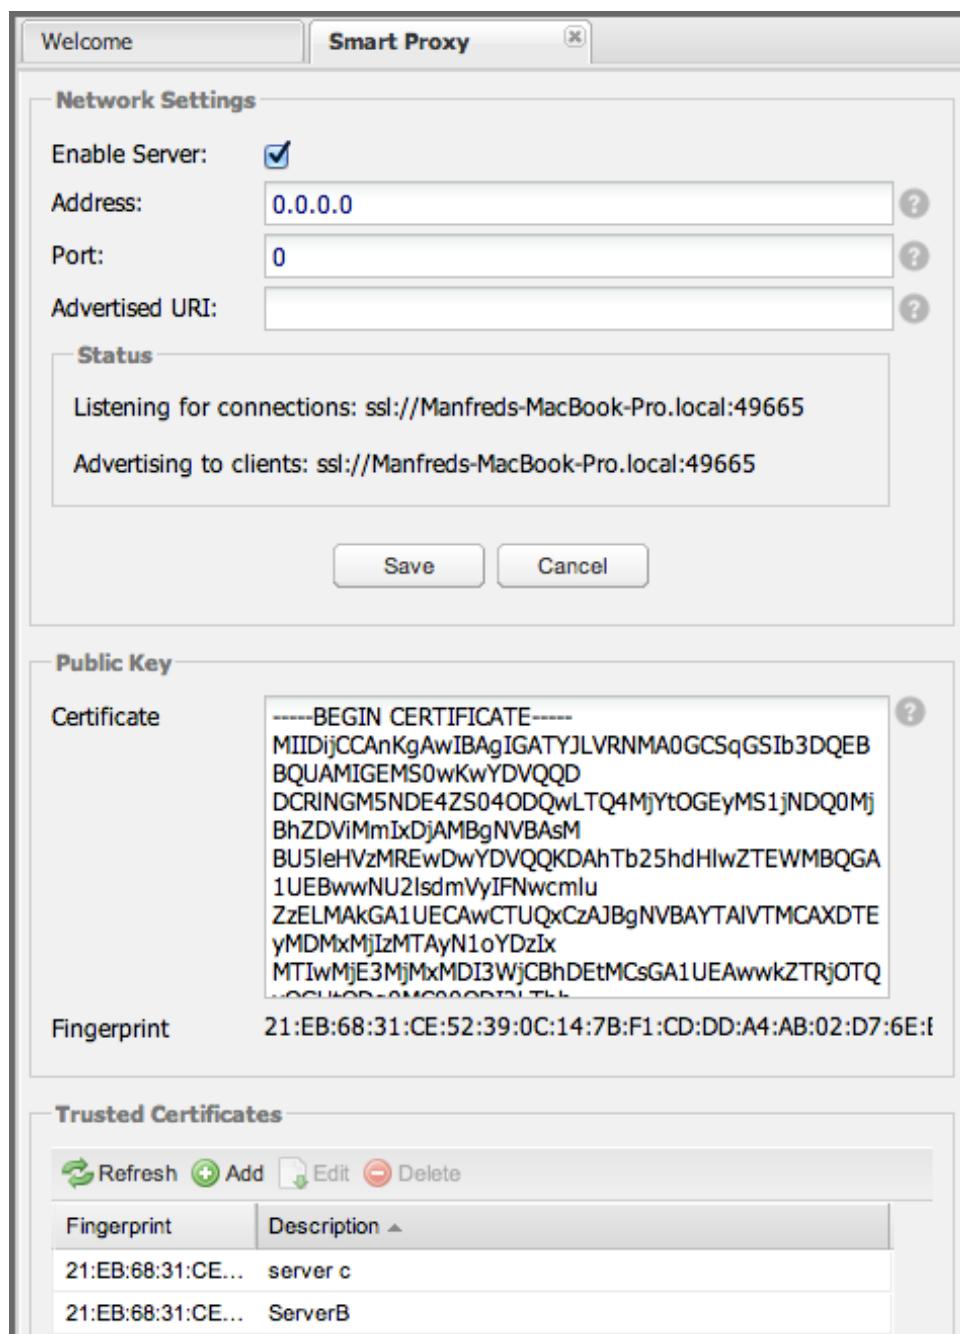


Figure 7.1. Global Configuration for Smart Proxy

The *Network Settings* section allows you to enable the smart proxy server with a checkbox. This will need to be enabled on all servers that publish events in the smart proxy network, while servers that act only as subscribers can leave this option unchecked.

In addition, you can configure the address and port where the publishing server will be available. The default address of 0.0.0.0 will cause the proxy to listen on all addresses. The default port number of 0 will trigger usage of a random available port number for connection listening. If a random port is used, it will be chosen when the server (re)starts.

With the *Advertised URI* field it is possible to configure a specific address to be broadcasted by the proxy to the subscribing smart proxy clients enabling, e.g., usage of a publicly available fully qualified hostname, including the domain or also just the usage of an externally reachable IP number.

- ⓘ It is important to configure the ports in the repository manager and any firewall between the servers to allow the direct socket connection between the servers and to avoid using random ports.

The *Status* field below the form will show the current status of the smart proxy including the full address and port.

The *Public Key* field displays the key identifying this server instance. It is automatically populated with the certificate associated with the public/private key pair that is generated when the server is first run.

- ⓘ The key is stored in `sonatype-work/nexus/conf/keystore/private.ks` and identifies this server. If you copy the `sonatype-work` folder from one server to another as part of an upgrade or a move from testing to staging or production you will need to ensure that keys are not identical between multiple servers. To get a new key generated, simply remove the keystore file and restart the repository manager.

Establishing Trust

The servers publishing as well as subscribing to events identify themselves with their public key. This key has to be registered with the other servers in the *Trusted Certificates* section of the *Smart Proxy* configuration screen.

To configure two repository managers as trusted smart proxies, you copy the public key from the certificate of the other server in the *Trusted Certificates* configuration section by adding a new trusted certificate with a meaningful description as displayed in *Figure 7.2, “Copying a Certificate”* and *Figure 7.3, “Adding a Trusted Certificate”*.

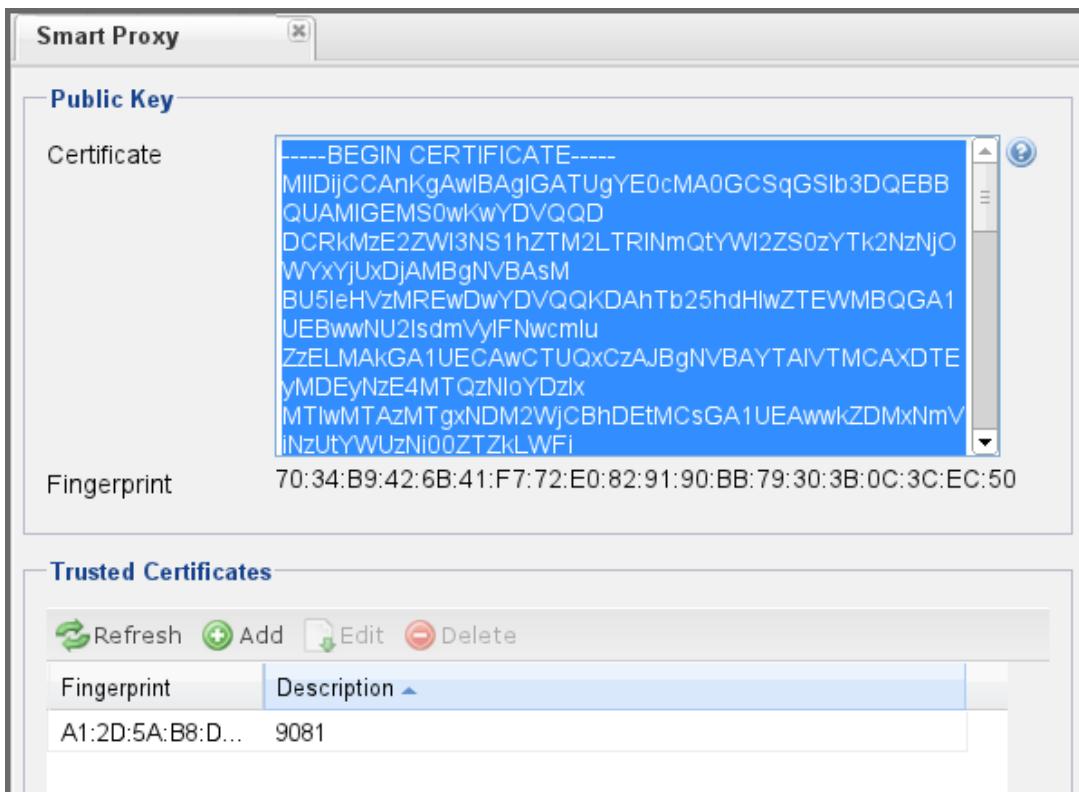


Figure 7.2. Copying a Certificate

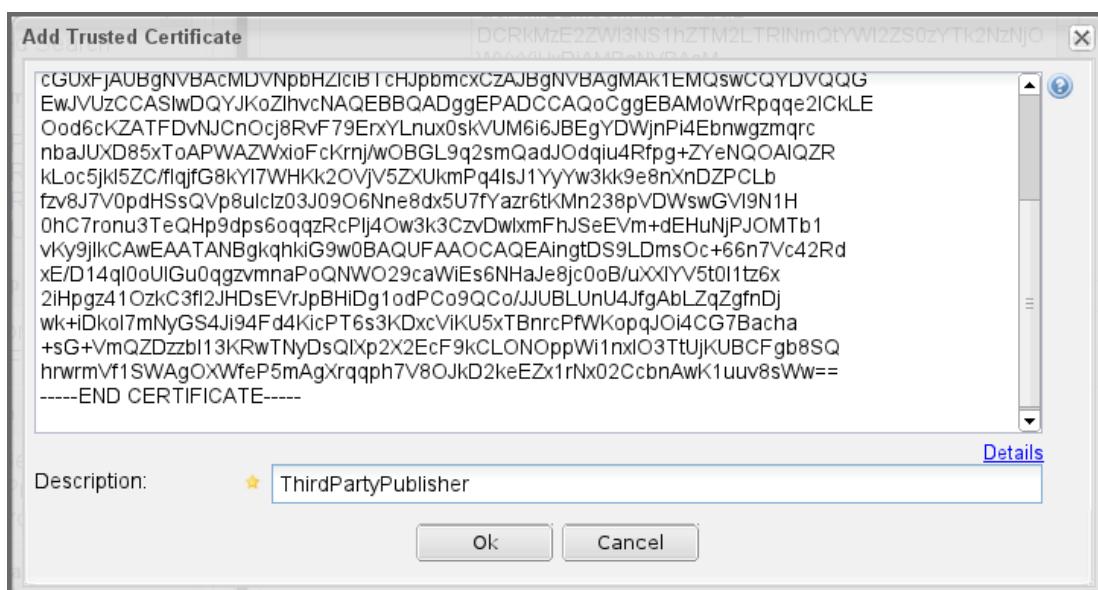



Figure 7.3. Adding a Trusted Certificate

All of the key generation and certificates related to the trust management is handled by the repository manager itself. No external configuration or usage of external keys is necessary.

Repository Specific Smart Proxy Configuration

Once Smart Proxy has been configured and enabled as described in [Enabling Smart Proxy Publishing\(see page 325\)](#), you have to configure which repositories contents should be proxied more efficiently between the servers. This is done in the *Repositories* administration interface in a separate configuration tab titled *Smart Proxy*, which allows you to configure repository-specific details as compared to server wide details described above.

On the publishing repository manager you have to enable smart proxy on the desired hosted, virtual or proxy repositories in the repository configuration. This is accomplished by selecting the *Publish Updates* checkbox in the *Publish* section of the *Smart Proxy* configuration for a specific repository as displayed in *Figure 7.4, “Smart Proxy Settings for a Hosted Repository”* and pressing Save.

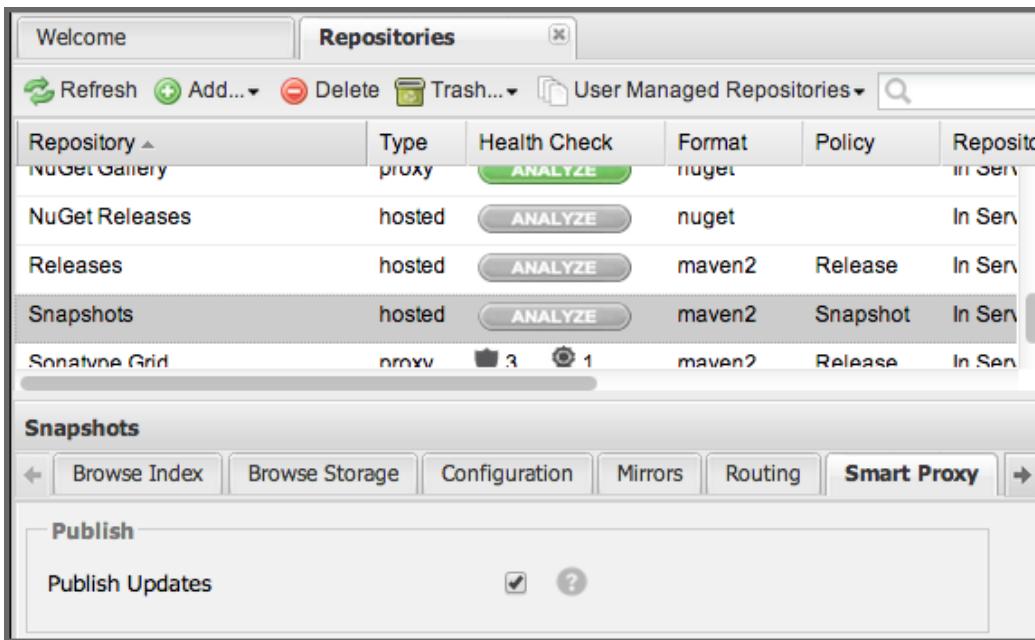

The screenshot shows the 'Repositories' section of the Nexus Repository Manager 2 interface. The 'Smart Proxy' tab is selected. A table lists repositories with their type, health check status (ANALYZE), format, policy, and status. The 'NuGet Releases' repository is selected, showing its specific configuration. In the 'Publish' section, the 'Publish Updates' checkbox is checked.

| Repository | Type | Health Check | Format | Policy | Status |
|----------------|--------|--------------|--------|----------|---------|
| NuGet Gallery | proxy | ANALYZE | nuget | In Serv | |
| NuGet Releases | hosted | ANALYZE | nuget | In Serv | |
| Releases | hosted | ANALYZE | maven2 | Release | In Serv |
| Snapshots | hosted | ANALYZE | maven2 | Snapshot | In Serv |
| Sonatype Grid | proxy | 3 | 1 | maven2 | Release |

Figure 7.4. Smart Proxy Settings for a Hosted Repository

On the repository manager subscribing to the publishing server you have to create a new proxy repository to expose the proxied components. The smart proxy configuration for this repository displayed in *Figure 7.5, “Smart Proxy Settings for a Proxy Repository”* and allows you to activate the *Receive Updates* checkbox in the *Subscribe* configuration section. With a working trust established between the publishing and subscribing servers the *Smart Proxy* configuration of the proxy repository on the subscribing repository manager will display connection status.

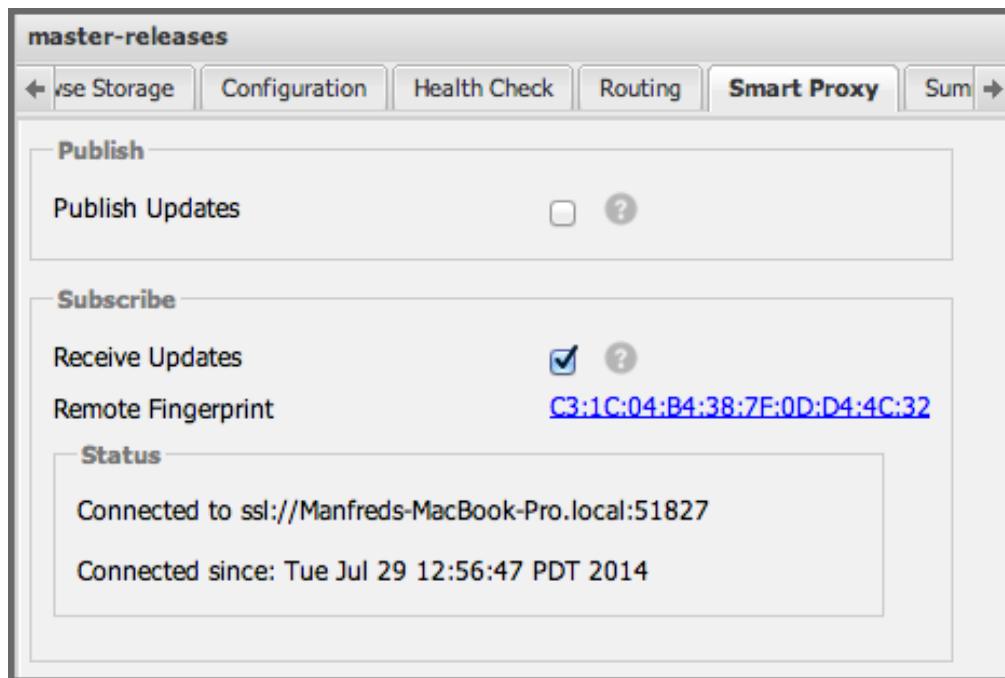


Figure 7.5. Smart Proxy Settings for a Proxy Repository

Smart Proxy Security and Messages

Smart Proxy messages are started with an initial handshake via HTTP or HTTPS. The protocol chosen is determined by the URL defined in the proxy repository configuration in the *Remote Storage Location*. For increased security we suggest to use HTTPS, even for internal repository URLs. This handshake allows the two servers to exchange their keys and confirm that they are configured with a valid trust relationship to communicate. After a successful handshake, messages are sent in the middleware layer and are all sent via SSL encrypted messages.

The following events are broadcasted via Smart Proxy:

- a new component has been deployed
- a component has been deleted
- a component has been changed
- repository cache or a part of it has been cleared
- Smart Proxy publishing has been disabled

On the recipient side this will cause the changes to be applied, mimicking what happened on the publisher. If Smart Proxy is disabled the subscription will be stopped.

Example Setup

The deployment scenario displayed in *Figure 7.6, “Deployment Scenario for a Smart Proxy Use Case”* is a typical use case for Smart Proxy. Component development is spread out across four distributed teams located in New York, London, Bangalore and San Jose. Each of the teams has a repository manager instance deployed in their local network to provide the best performance for each developer team and any locally running continuous integration server and other integrations.

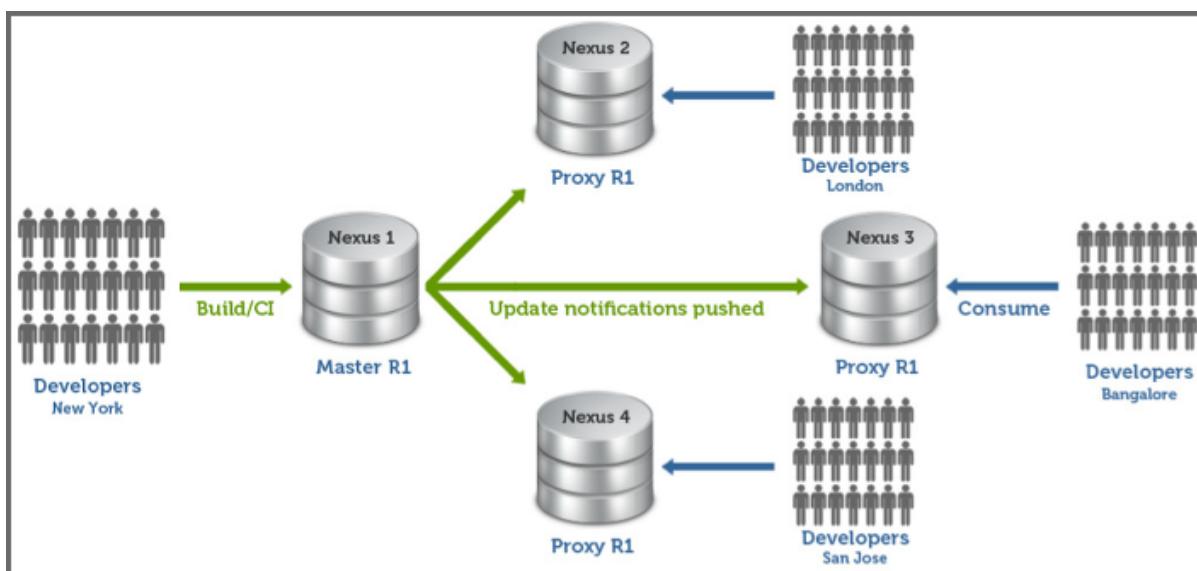


Figure 7.6. Deployment Scenario for a Smart Proxy Use Case

When the development team in New York does a commit to their component build, a continuous integration server deploys a new component snapshot version to the *Nexus 1* instance.

With smart proxy enabled, this deployment is immediately followed by notifications, sent to the trusted smart proxy subscribers in *Nexus 2*, *Nexus 3*, and *Nexus 4*. These are collocated with the developers in London, Bangalore, and San Jose and can be configured to immediately fetch the new components available. At a minimum they will know about the availability of new component versions without the need to poll *Nexus 1* repeatedly, therefore, keeping performance high for everyone.

When a user of *Nexus 2*, *3* or *4* build a component that depends on a snapshot version of the component from *Nexus 1*, smart proxy guarantees that the latest version published to *Nexus 1* is used.

To configure smart proxy between these servers for the snapshots repository you have to:

1. add the public key of *Nexus 1* as trusted certificate to *Nexus 2*, *3*, and *4*
2. add the public keys of *Nexus 2*, *3* and *4* as trusted certificate to *Nexus 1*
3. enable smart proxy publishing on the snapshot repository on *Nexus 1*
4. set up new proxy repositories to proxy the *Nexus 1* snapshot repository on *Nexus 2*, *3* and *4*
5. enable smart proxy subscription on the new proxy repositories
6. optionally enable prefetching of components

7. add the new proxy repositories to the public group on *Nexus 2, 3, and 4*

With this setup, any snapshot deployment from the New York team on *Nexus 1* is immediately available to the development team in London, Bangalore, and San Jose.

Advanced Configuration

Typically smart proxy is configured in the dedicated user interfaces provided and described in earlier sections. More fine grained and advanced configuration is exposed in the capabilities administration documented in [Accessing and Configuring Capabilities](#)(see page 301).

Specifically the following capabilities for the core smart proxy features are automatically created and maintained:

Smart Proxy: Identity

Provides the unique identity for the repository manager

Smart Proxy: Messaging

Provides the core messaging facilities for smart proxy

Smart Proxy: Trust

Configures a trust relationship with a remote node

Smart Proxy: Secure Connector

Secures the connection using identity and trust

In addition you can find one smart proxy capability for each repository configured to be publish or subscribe updates with Smart Proxy.

Smart Proxy: Publish

Configures publishing updates to a specific repository via smart proxy

Smart Proxy: Subscribe

Configures subscribing to updates for a specific proxy repository. This capability exposes the additional setting *Delete* in the *Settings* tab. If deletion is enabled, any component deletions in the publishing repository is also carried out in the subscribing repositories. The *Preemptive Fetch* flag allows you to enable a download of components to the susbscribing proxy repository prior to any component requests received by it. The default behaviour with preemptive fetch disabled only publishes the fact that new components are available from the publishing repository.

- ⓘ A series of videos demonstrating [Smart Proxy](#)²¹³⁷ is available on the Nexus community site.

²¹³⁷ <http://www.sonatype.org/nexus/members-only/video-gallery-2/free-training-nexus-professional-and-smart-proxy/>

LDAP Integration

Nexus Repository Manager OSS has a Lightweight Directory Access Protocol (LDAP) Authentication realm which provides the repository manager with the capability to authenticate users against an LDAP server. In addition to handling authentication, the repository manager can be configured to map roles to LDAP user groups. If a user is a member of a LDAP group that matches the ID of a role, the repository manager grants that user the matching role. In addition to this highly configurable user and group mapping capability, the repository manager can augment LDAP group membership with specific user-role mapping.

In addition to the basic LDAP support from Nexus Repository Manager OSS, Nexus Repository Manager Pro offers LDAP support features for enterprise LDAP deployments. These include the ability to cache authentication information, support for multiple LDAP servers and backup mirrors, the ability to test user logins, support for common user/group mapping templates and the ability to support more than one schema across multiple servers.

 **Available in Nexus Repository OSS and Nexus Repository Pro**

Topics in this section:

- [Enabling the LDAP Authentication Realm](#)(see page 333)
- [Configuring LDAP Integration](#)(see page 334)
- [User and Group Mapping](#)(see page 336)
- [Enterprise LDAP Support](#)(see page 349)

Enabling the LDAP Authentication Realm

In order to use LDAP authentication in the repository manager, you will need to add the LDAP Authentication Realm to the *Selected Realms* in the *Security* section of the *Server configuration* panel. To load the *Server configuration* panel, click on the *Server* link under *Administration* in the main menu. Once you have the *Server configuration* panel loaded, select *Enterprise LDAP Authentication Realm* (or *OSS LDAP Authentication Realm*) in the *Available Realms* list under the *Security Settings* section and click the *Add* button (or left arrow) as shown in *Figure 8.1, “Adding the LDAP Authentication Realm to Available Realms”* and ensure that the LDAP realm is located below the XML realms in the list. This is necessary, so that the repository manager can be used by anonymous, admin and other users configured in the XML realms even with LDAP authentication offline or unavailable. Any user account not found in the XML realms, will be passed through to LDAP authentication.

Next, click on the *Save* button at the bottom of the *Server configuration* panel to have the change applied.

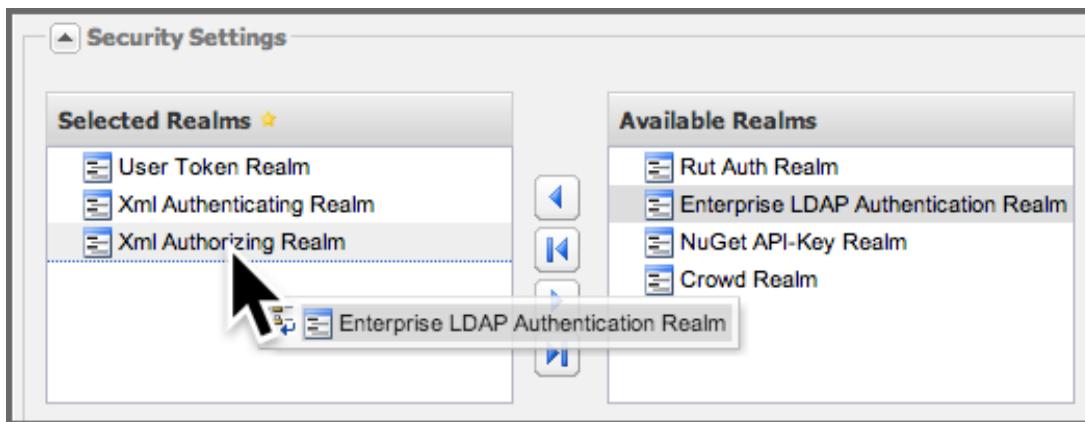


Figure 8.1, Adding the LDAP Authentication Realm to Available Realms

Configuring LDAP Integration

To configure LDAP integration, click on the *Enterprise LDAP* menu item in Nexus Repository Manager Pro or the *LDAP Configuration* menu item in Nexus Repository Manager OSS in the *Security* menu in the left-hand main menu.

Clicking on the *Enterprise LDAP/LDAP Configuration* menu item will load the *LDAP Configuration* panel. The following sections outline the configuration options available in the *LDAP Configuration* panel.

Connection and Authentication

Figure 8.2, “A Simple LDAP Connection and Authentication Setup” shows a simplified LDAP configuration for the repository manager configured to connect to an LDAP server running on `localhost` port 10389 using the search base of `ou=system`. On a more standard installation, you would likely not want to use Simple Authentication as it sends the password in clear text over the network, and you would also use a search base that corresponds to your organization’s top-level domain components such as `dc=sonatype,dc=com`.

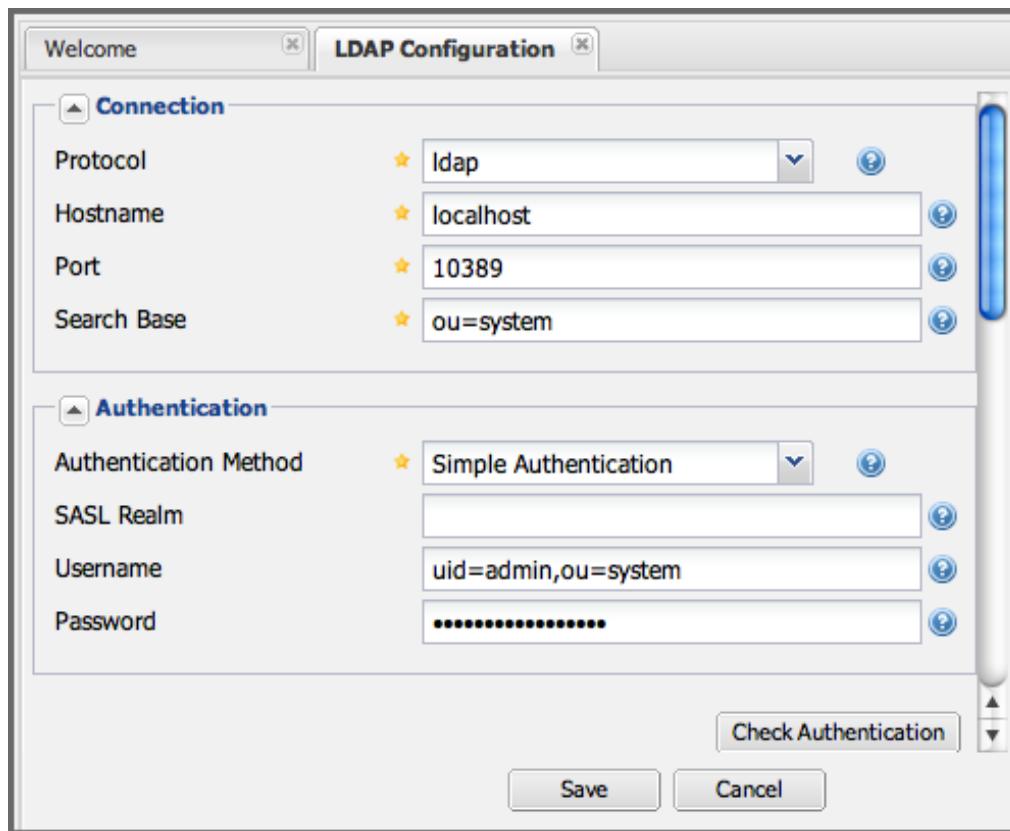


Figure 8.2. A Simple LDAP Connection and Authentication Setup

The following parameters can be configured in the *Connection* and *Authentication* sections of the *LDAP Configuration* panel.

Protocol

Valid values in this drop-down are `ldap` and `ldaps` that correspond to the Lightweight Directory Access Protocol and the Lightweight Directory Access Protocol over SSL

Hostname

The hostname or IP address of the LDAP

Port

The port on which the LDAP server is listening. Port 389 is the default port for the `ldap` protocol, and port 636 is the default port for the `ldaps`.

Search Base

The search base is the Distinguished Name (DN) to be appended to the LDAP query. The search base usually corresponds to the domain name of an organization. For example, the search base on the Sonatype LDAP server could be `dc=sonatype,dc=com`.

Authentication Method

The repository manager provides four distinct authentication methods to be used when connecting to the LDAP Server:

Simple Authentication

Simple authentication is not recommended for production deployments not using the secure ldap s protocol as it sends a clear-text password over the network

Anonymous Authentication

Used when the repository manager only needs read-only access to non protected entries and attributes when binding to the LDAP

Digest-MD5

This is an improvement on the CRAM-MD5 authentication method. For more information, see <http://www.ietf.org/rfc/rfc2831.txt>

CRAM-MD5

The Challenge-Response Authentication Method (CRAM) is based on the HMAC-MD5 MAC algorithm. In this authentication method, the server sends a challenge string to the client. The client responds with a username followed by a Hex digest that the server compares to an expected value. For more information, see <RFC 2195>²¹³⁸.

For a full discussion of LDAP authentication approaches, see <http://www.ietf.org/rfc/rfc2829.txt> and <http://www.ietf.org/rfc/rfc2251.txt>.

SASL Realm

The Simple Authentication and Security Layer (SASL) realm used to connect. It is only available if the authentication method is *Digest-MD5* or *CRAM-MD5*.

Username

Username of an LDAP user with which to connect (or bind). This is a Distinguished Name of a user who has read access to all users and groups.

Password

Password for an administrative LDAP user

User and Group Mapping

User Element Mapping

The *LDAP Configuration* panel in Nexus Repository Manager OSS contains sections to manage *User Element Mapping* and *Group Element Mapping* in the *User and Group Settings* tab. These configuration sections are

²¹³⁸ <http://www.ietf.org/rfc/rfc2195.txt>

located in a separate panel called *User and Group Settings* in Nexus Repository Manager Pro. This panel provided a *User & Group Templates* drop-down displayed in *Figure 8.3, “User and Group Templates Selection Drop Down”* that will adjust the rest of the user interface based on your template selection.

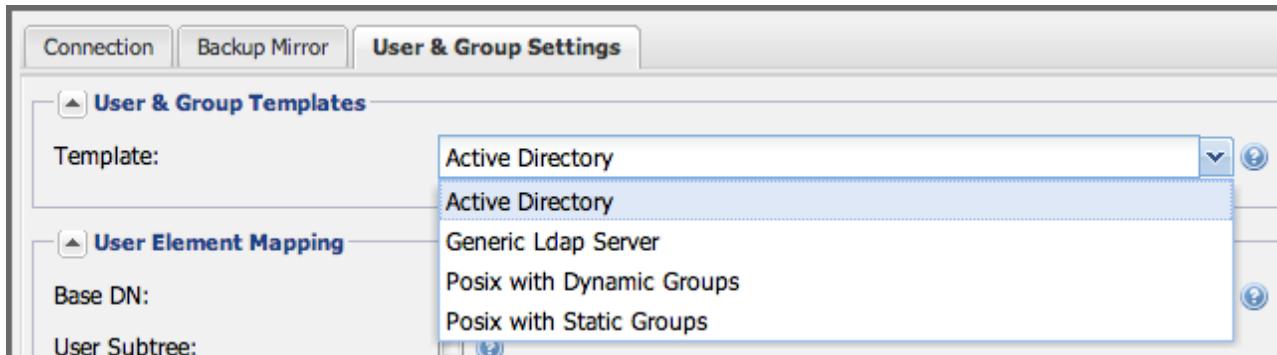


Figure 8.3. User and Group Templates Selection Drop Down

The User Element Mapping displayed in *Figure 8.4, “User Element Mapping”* has been pre-populated by the Active Directory selection in the template drop-down and needs to be configured as required by your LDAP server. The available fields are:

Base DN

Corresponds to the *Base DN* containing user entries. This DN is going to be relative to the Search Base, specified in *Figure 8.2, “A Simple LDAP Connection and Authentication Setup”*. For example, if your users are all contained in `ou=users,dc=sonatype,dc=com` and you specified a Search Base of `dc=sonatype,dc=com`, you would use a value of `ou=users`.

User Subtree

Values are *True* if there is a tree below the Base DN that can contain user entries and *False* if all users are contained within the specified Base DN. For example, if all users are in `ou=users,dc=sonatype,dc=com` this field should be *False*. If users can appear in organizational units within organizational units such as `ou=development,ou=users,dc=sonatype,dc=com`, this field should be *True*.

Object Class

This value defaults to `inetOrgPerson` which is a standard object class defined in [RFC 2798](#)²¹³⁹. This Object Class (`inetOrgPerson`) contains standard fields such as `mail`, `uid`. Other possible values are `posixAccount` or a custom class.

User ID Attribute

This is the attribute of the Object class that supplies the User ID. The repository manager uses this attribute as the User ID.

Real Name Attribute

²¹³⁹ <http://www.faqs.org/rfcs/rfc2798.html>


This is the attribute of the Object class that supplies the real name of the user. The repository manager uses this attribute when it needs to display the real name of a user.

E-Mail Attribute

This is the attribute of the Object class that supplies the email address of the user. The repository manager uses this attribute when it needs to send an email to a user.

Password Attribute

This control is only available in Nexus Repository Manager OSS and replaced by the Use Password Attribute section from *Figure 8.5, “Password Attribute”* in Nexus Repository Manager Pro. It can be used to configure the Object class, which supplies the password ("userPassword").

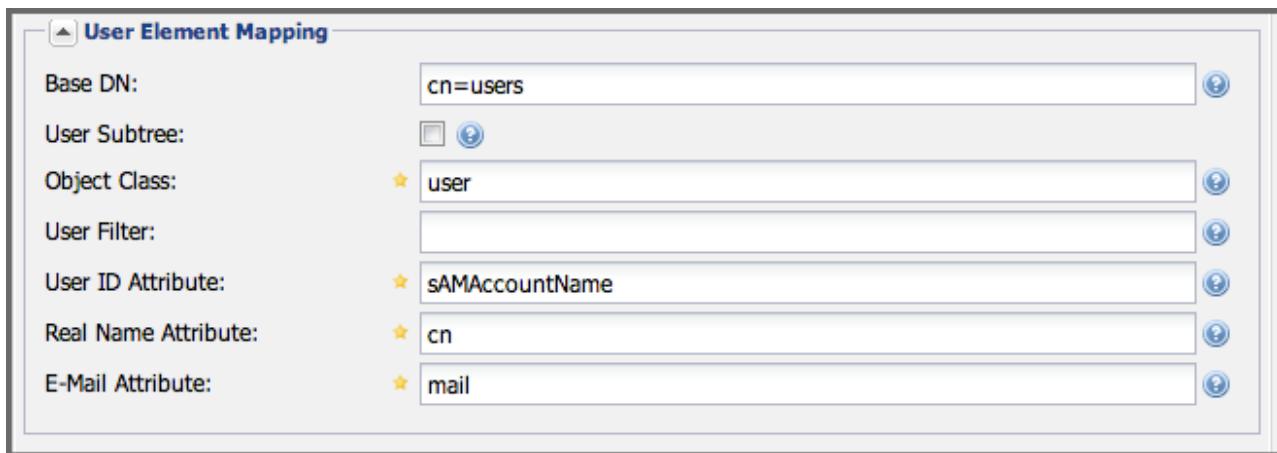

The screenshot shows the 'User Element Mapping' configuration page. It includes fields for Base DN (cn=users), User Subtree (checkbox), Object Class (user), User Filter (empty), User ID Attribute (sAMAccountName), Real Name Attribute (cn), and E-Mail Attribute (mail). Each field has a help icon (blue question mark) to its right.

Figure 8.4. User Element Mapping


Once the checkbox for *Use Password Attribute* has been selected, the interface from *Figure 8.5, “Password Attribute”* allows you to configure the optional attribute. When not configured authentication will occur as a bind to the LDAP server. Otherwise this is the attribute of the Object class that supplies the password of the user. The repository manager uses this attribute when it is authenticating a user against an LDAP server.



The screenshot shows the 'Password Attribute' configuration page. It features a checked checkbox for 'Use Password Attribute' and a dropdown menu labeled 'Password Attribute' containing a single option (star icon).

Figure 8.5. Password Attribute

The Group Type drop-down displayed in *Figure 8.6, “Dynamic Group Element Mapping”* and *Figure 8.7, “Static Group Element Mapping”* determines which fields are available in the user interface. Groups are generally one of two types in LDAP systems - static or dynamic. A static group contains a list of users. A dynamic group is a list of groups to which user belongs. In LDAP a static group would be captured in an entry with an Object class groupOfUniqueNames that contains one or more uniqueMember attributes. In a dynamic group configuration, each user entry in LDAP contains an attribute that lists group membership.

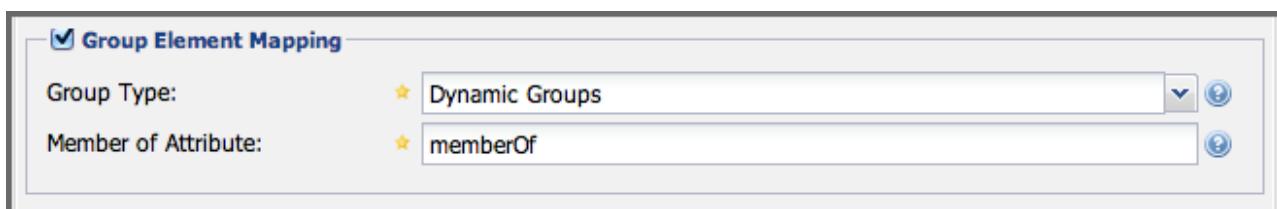


Group Element Mapping

Group Type: ★ Dynamic Groups

Member of Attribute: ★ memberOf

Figure 8.6. Dynamic Group Element Mapping

Dynamic groups are configured via the *Member of Attribute* parameter. The repository manager inspects this attribute of the user entry to get a list of groups of which the user is a member. In this configuration, a user entry would have an attribute that would contain the name of a group, such as *memberOf*.

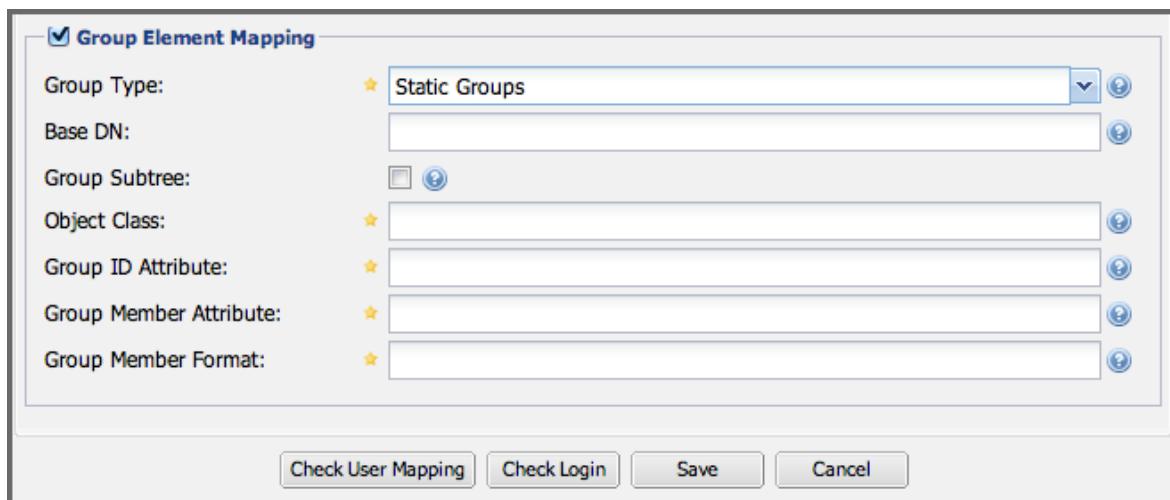

Group Element Mapping

Group Type: ★ Static Groups

Base DN:

Group Subtree:

Object Class:

Group ID Attribute:

Group Member Attribute:

Group Member Format:

Buttons: Check User Mapping, Check Login, Save, Cancel

Figure 8.7. Static Group Element Mapping

Static groups are configured with the following parameters:

Base DN

This field is similar to the Base DN field described for User Element Mapping. If your groups were defined under `ou=groups,dc=sonatype,dc=com`, this field would have a value of `ou=groups`.

Group Subtree

This field is similar to the User Subtree field described for User Element Mapping. If all groups are defined under the entry defined in *Base DN*, this field should be *false*. If a group can be defined in a tree of organizational units under the *Base DN*, then the field should be *true*.

Object Class

This value defaults to `groupOfUniqueNames` which is a standard object class defined in [RFC 4519](#)²¹⁴⁰. This default (`groupOfUniqueNames`) is simply a collection of references to unique entries in an LDAP directory and can be used to associate user entries with a group. Other possible values are `posixGroup` or a custom class.

²¹⁴⁰ <http://www.faqs.org/rfcs/rfc4519.html>

Group ID Attribute

Specifies the attribute of the Object class that specifies the *Group ID*. If the value of this field corresponds to the ID of a role, members of this group will have the corresponding privileges. Defaults to `cn`.

Group Member Attribute

Specifies the attribute of the Object class which specifies a member of a group. A `groupOfUniqueName` has multiple `uniqueMember` attributes for each member of a group. Defaults to `uniqueMember`.

Group Member Format

This field captures the format of the *Group Member Attribute* and is used by the repository manager to extract a username from this attribute. For example, if the *Group Member Attribute* has the format `uid=brian,ou=users,dc=sonatype,dc=com`, then the *Group Member Format* would be `uid=$username,ou=users,dc=sonatype,dc=com`. If the *Group Member Attribute* had the format `brian`, then the *Group Member Format* would be `$username`.

If your installation does not use Static Groups, you can configure LDAP Integration to refer to an attribute on the User entry to derive group membership. To do this, select *Dynamic Groups* in the *Group Type* field in *Group Element Mapping*.

Once you have configured the *User & Group Settings* you can check the correctness of your user mapping by pressing the *Check User Mapping* button visible in *Figure 8.7, “Static Group Element Mapping”*.

Nexus Repository Manager Pro offers a button *Check Login* to check an individual users login and can be used as documented in [Testing a User Login](#)(see page 0).

Press the *Save* button after successful configuration.

Mapping Users and Groups with Active Directory

When mapping users and groups to an Active Directory installation, try the common configuration values listed in *Table 8.2, “User Element Mapping Configuration for Active Directory”* and *Table 8.3, “Group Element Mapping Configuration for Active Directory”*.

Table 8.1. Connection and Authentication Configuration for Active Directory

| Configuration Element | Configuration Value |
|-----------------------|-------------------------------------|
| Protocol | ldap |
| Hostname | Hostname of Active Directory Server |
| Port | 389 (or port of AD server) |

| Configuration Element | Configuration Value |
|-----------------------|---|
| Search Base | DC=yourcompany,DC=com (customize for your organization) |
| Authentication | Simple Authentication |
| Username | CN=Administrator,CN=Users,DC=yourcompany,DC=com |

Table 8.2. User Element Mapping Configuration for Active Directory

| Configuration Element | Configuration Value |
|-----------------------|---------------------|
| Base DN | cn=users |
| User Subtree | false |
| Object Class | user |
| User ID Attribute | sAMAccountName |
| Real Name Attribute | cn |
| E-Mail Attribute | mail |
| Password Attribute | (Not Used) |

Table 8.3. Group Element Mapping Configuration for Active Directory

| Configuration Element | Configuration Value |
|-----------------------|---------------------|
| Group Type | Dynamic Groups |
| Member Of Attribute | memberOf |

- ❗ You should connect to the Active Directory through port 3268 if you have a multi-domain distributed Active Directory forest. Connecting directly to port 389 might lead to errors. Port 3268 exposes Global Catalog Server that exposes the distributed data. The SSL equivalent connection port is 3269.

Mapping Users and Groups with posixAccount

When mapping users and groups to LDAP entries of type posixAccount, try the common configuration values listed in *Table 8.4, “User Element Mapping Configuration for posixAccount”* and *Table 8.5, “Group Element Mapping Configuration for posixGroup”*.

Table 8.4. User Element Mapping Configuration for posixAccount

| Configuration Element | Configuration Value |
|-----------------------|---------------------|
| Base DN | (Not Standard) |
| User Subtree | false |
| Object Class | posixAccount |
| User ID Attribute | sAMAccountName |
| Real Name Attribute | uid |
| E-Mail Attribute | mail |
| Password Attribute | (Not Used) |

Table 8.5. Group Element Mapping Configuration for posixGroup

| Configuration Element | Configuration Value |
|------------------------|---------------------|
| Group Type | Static Groups |
| Base DN | (Not Standard) |
| Group Subtree | false |
| Object Class | posixGroup |
| Group ID Attribute | cn |
| Group Member Attribute | memberUid |
| Group Member Format | |

Mapping Roles to LDAP Users

Once *User & Group Mapping* has been configured, you can start verifying how LDAP users and groups are mapped to roles. If a user is a member of an LDAP group that has a Group ID corresponding to the ID of a role, that user is granted the appropriate permissions in the repository manager.

For example, if the LDAP user entry in `uid=brian,ou=users,dc=sonatype,dc=com` is a member of a `groupOfUniqueNames` attribute value of `admin`, when this user logs into the repository manager, he/she will

be granted the administrator role if the *Group Element Mapping* is configured properly. To verify the *User Element Mapping* and *Group Element Mapping*, click on *Check User Mapping* in the LDAP Configuration panel directly below the *Group Element Mapping* section; *Figure 8.8, “Checking the User and Group Mapping in LDAP Configuration”* shows the results of this check.

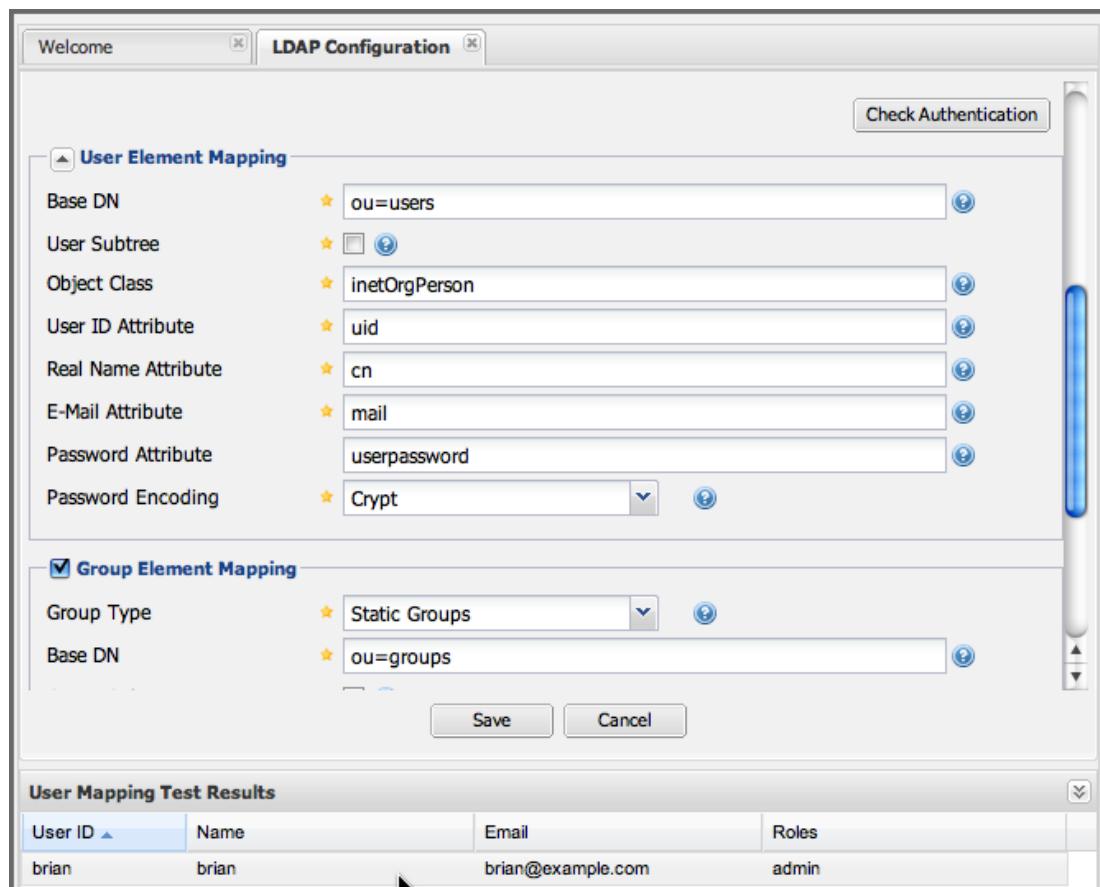


Figure 8.8. Checking the User and Group Mapping in LDAP Configuration

In *Figure 8.8, “Checking the User and Group Mapping in LDAP Configuration”*, LDAP Integration locates a user with a User ID of "brian" who is a member of the "admin" group. When "brian" logs in, he will have all of the rights that the admin role has.


Mapping Internal Roles for External Users

If you are unable to map all of the roles to LDAP groups, you can always augment the role information by adding a specific user-role mapping for an external LDAP user in the repository manager. In other words, if you need to make sure that a specific user in LDAP gets a specific role and you don't want to model this as a group membership, you can add a role mapping for an external user in the repository manager.

The repository manager keeps track of this association independent of your LDAP server. It continues to delegate authentication to the LDAP server for this user. The repository manager will continue to map the user to roles based on the group element mapping you have configured, but it will also add any roles

specified in the *User* panel. You are augmenting the role information that the repository manager gathers from the group element mapping.

Once the user and group mapping has been configured, click on the *Users* link under *Security* in the main menu. The *Users* tab contains all of the configured users for this repository manager instance as shown in *Figure 8.9, “Viewing All Configured Users”*. A configured user is a user in a repository manager realm or an External User that has an explicit mapping to a role. In *Figure 8.9, “Viewing All Configured Users”*, you can see the three default users in the default realm plus the *brian* user from LDAP. The *brian* user appears because this user has been mapped to an internal role.

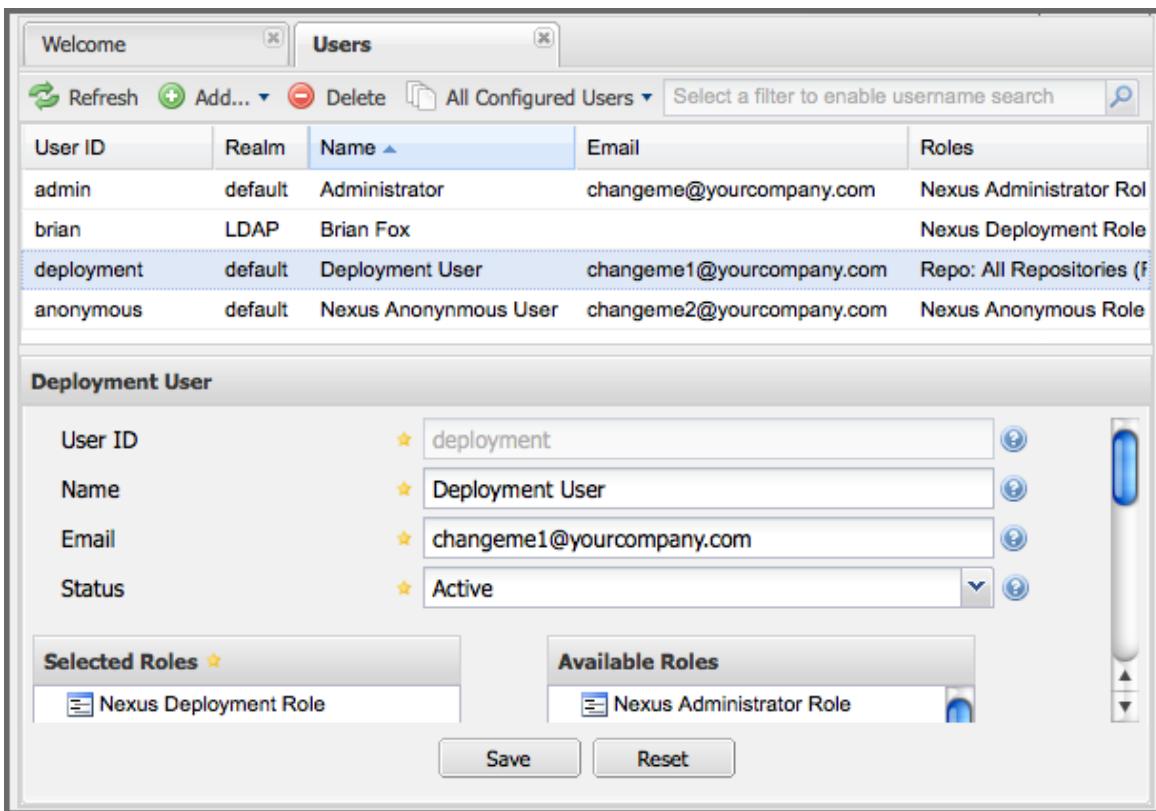


The screenshot shows the 'Users' management interface in Nexus Repository Manager 2. At the top, there's a toolbar with 'Refresh', 'Add...', 'Delete', and a dropdown for 'All Configured Users'. Below the toolbar is a search bar labeled 'Select a filter to enable username search' with a magnifying glass icon. The main area is a table listing users:

| User ID | Realm | Name | Email | Roles |
|------------|---------|----------------------|---------------------------|----------------------------|
| admin | default | Administrator | changeme@yourcompany.com | Nexus Administrator Role |
| brian | LDAP | Brian Fox | | Nexus Deployment Role |
| deployment | default | Deployment User | changeme1@yourcompany.com | Repo: All Repositories (f) |
| anonymous | default | Nexus Anonymous User | changeme2@yourcompany.com | Nexus Anonymous Role |

Below the table, a 'Deployment User' configuration dialog is open. It contains fields for User ID (set to 'deployment'), Name ('Deployment User'), Email ('changeme1@yourcompany.com'), and Status ('Active'). There are two tabs at the bottom: 'Selected Roles' containing 'Nexus Deployment Role' and 'Available Roles' containing 'Nexus Administrator Role'. At the very bottom are 'Save' and 'Reset' buttons.

Figure 8.9. Viewing All Configured Users

The list of users in *Figure 8.9, “Viewing All Configured Users”* is a combination of all of the users in the default realm and all of the External Users with role mappings. To explore these two sets of users, click on the *All Configured Users* drop-down and choose *Default Realm Users*. Once you select this, click in the search field and press Enter. Searching with a blank string in the *Users* panel will return all of the users of the selected type. In *Figure 8.10, “All Default Realm Users”* you see a dialog containing all three default users from the default realm.

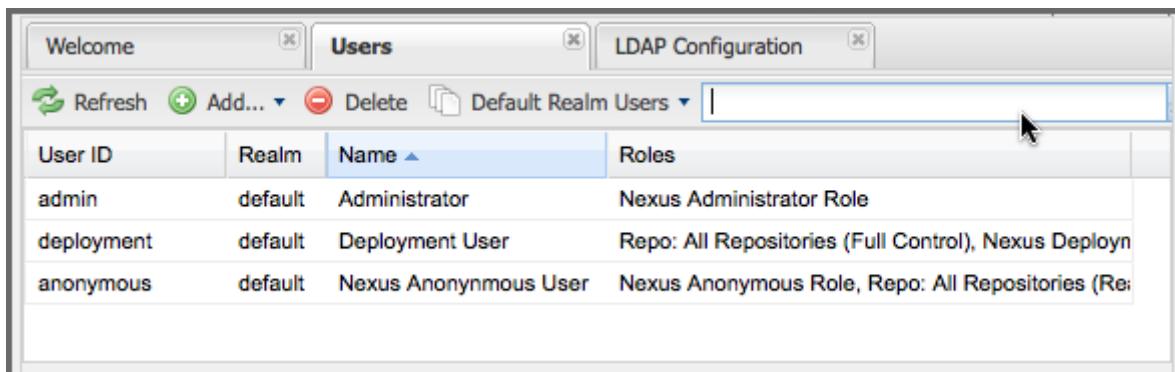


The screenshot shows the 'Users' tab in the Nexus Repository Manager 2 interface. A search bar at the top right contains an empty search term. Below it is a table with columns: User ID, Realm, Name, and Roles. The data in the table is as follows:

| User ID | Realm | Name | Roles |
|------------|---------|----------------------|--|
| admin | default | Administrator | Nexus Administrator Role |
| deployment | default | Deployment User | Repo: All Repositories (Full Control), Nexus Deployn |
| anonymous | default | Nexus Anonymous User | Nexus Anonymous Role, Repo: All Repositories (Re |

Figure 8.10. All Default Realm Users

If you wanted to see a list of all LDAP users, select LDAP from the All Configured Users drop-down shown in *Figure 8.9, “Viewing All Configured Users”* and click on the search button (magnifying glass) with an empty search field. Clicking search with an empty search field will return all of the LDAP users as shown in *Figure 8.11, “All LDAP Users”*.

- ⚠** Note that the user `tobrien` does not show up in the *All Configured Users* list. This is by design. The repository manager is only going to show you information about users with external role mappings. If an organization has an LDAP directory with thousands of developers, the repository manager doesn't need to retain any configuration information for users that don't have custom role mappings.

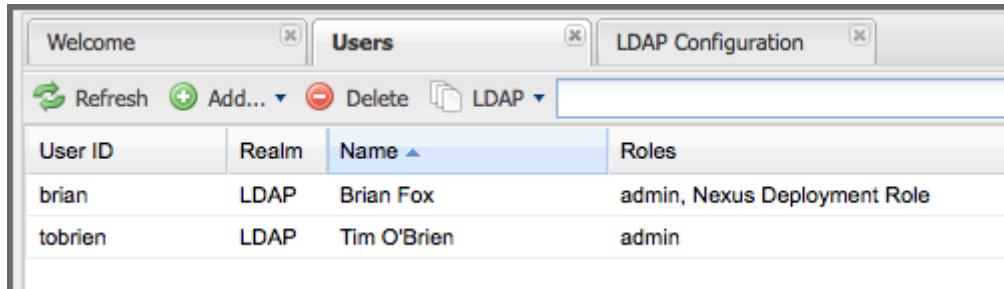

The screenshot shows the 'Users' tab in the Nexus Repository Manager 2 interface. The search bar at the top right contains the text "LDAP". Below it is a table with columns: User ID, Realm, Name, and Roles. The data in the table is as follows:

| User ID | Realm | Name | Roles |
|---------|-------|-------------|------------------------------|
| brian | LDAP | Brian Fox | admin, Nexus Deployment Role |
| tobrien | LDAP | Tim O'Brien | admin |

Figure 8.11. All LDAP Users

To add a mapping for an external LDAP user, you would click on the *All Configured Users* drop-down and select *LDAP*. Once you've selected *LDAP*, type in the user ID you are searching for and click the search button (magnifying glass icon to right of the search field). In *Figure 8.12, “Search LDAP Users”*, a search for "brian" yields one user from the LDAP server.

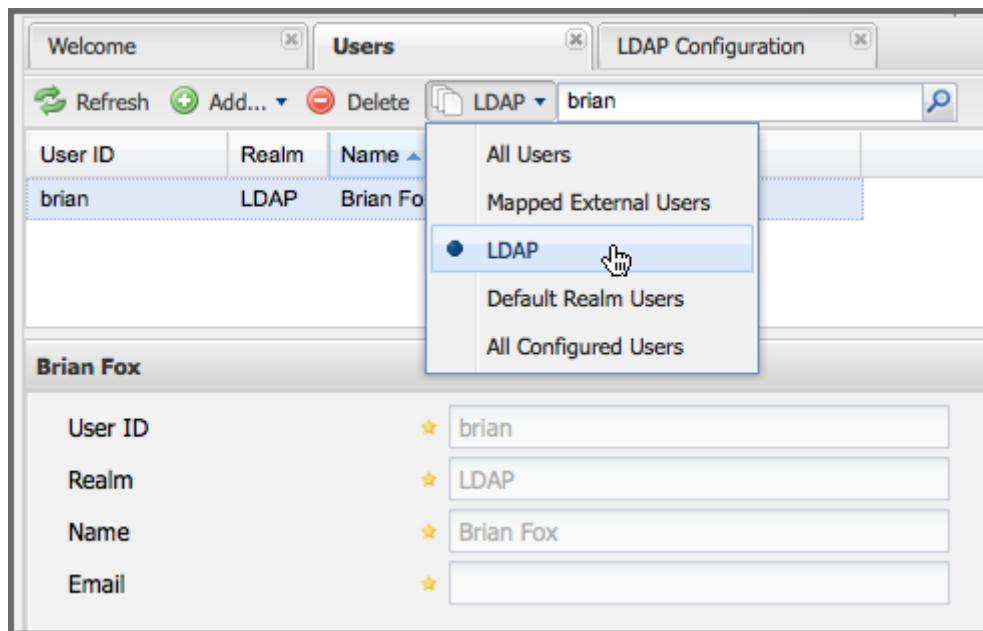


Figure 8.12. Search LDAP Users

To add a role mapping for the external user *brian* shown in *Figure 8.12, "Search LDAP Users"*, click on the user in the results table and drag a role from Available Roles to Selected Roles as shown in *Figure 8.13, "Mapping the Deployment Role to an External User"*. In this case, the user "*brian*" is mapped to the Administrative group by virtue of his membership in an "admin" group in the LDAP server. In this use case, an administrator would like to grant Brian the Deployment Role without having to create a LDAP group for this role and modifying his group memberships in LDAP.

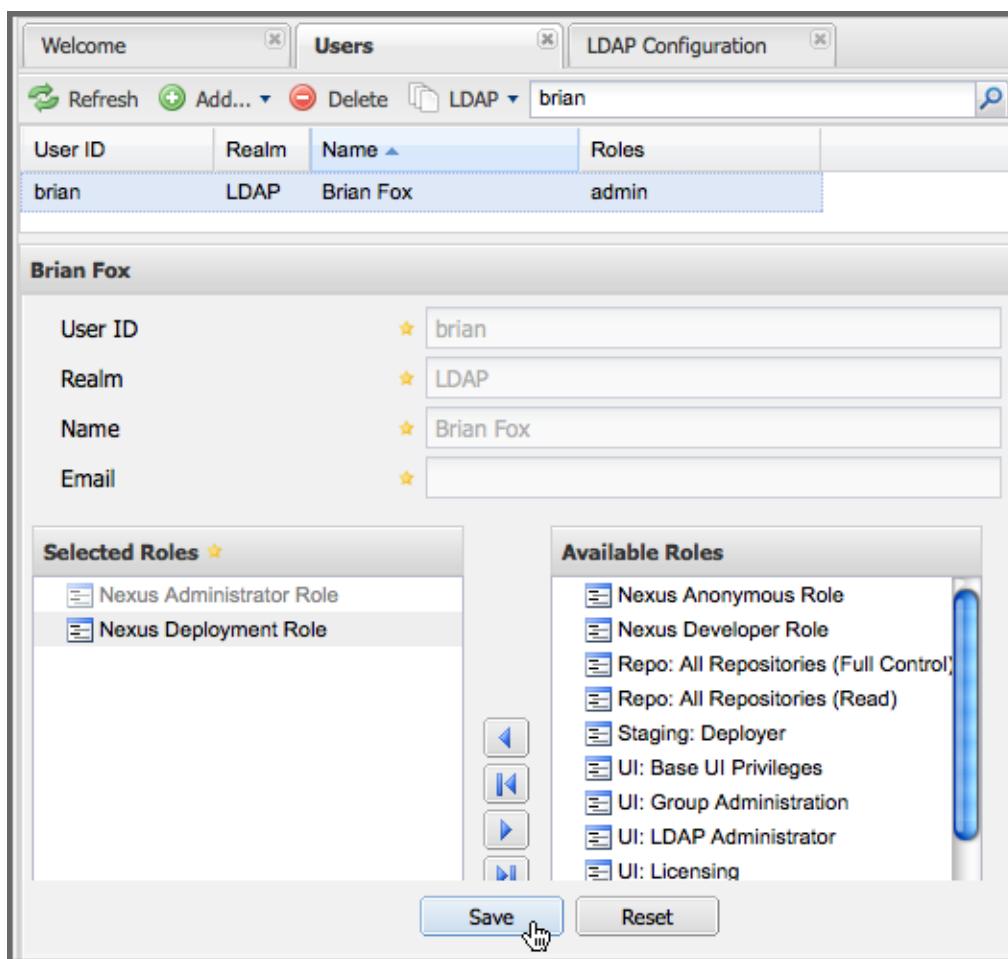


Figure 8.13. Mapping the Deployment Role to an External User

The end result of this operation is to augment the Group-Role mapping that is provided by the LDAP integration. You can use LDAP groups to manage coarse-grained permissions to grant people administrative privileges and developer roles, and if you need to perform more targeted privilege assignments in the repository manager you can map LDAP users to roles with the techniques shown in this section.

Mapping External Roles to Repository Manager Roles

Nexus Repository Manager OSS and Nexus Repository Manager Pro make it very straightforward to map an external role to an internal role. This is something you would do, if you want to grant every member of an externally managed group (such as an LDAP group) a certain privilege in the repository manager. For example, assume that you have a group in LDAP named `svn` and you want to make sure that everyone in the `svn` group has administrative privileges. To do this, you would click on the `Add..` drop-down in the Roles panel as shown in *Figure 8.14, “Selecting External Role Mapping in the Role Management Panel”*. This drop-down can be found in the Roles management panel which is opened by clicking on `Roles` in the `Security` menu.

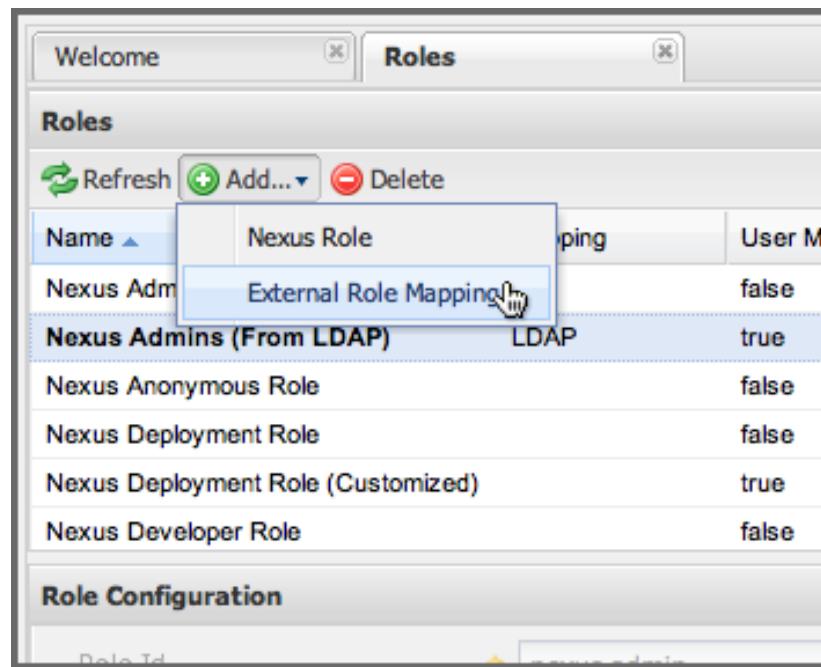


Figure 8.14. Selecting External Role Mapping in the Role Management Panel

Selecting *External Role Mapping* under *Add...* will show you a dialog containing a drop-down of *External Realms*. Selecting an external realm such as *LDAP* will then bring up a list of roles managed by that external realm. The dialog shown in *Figure 8.15, “Selecting an Externally Managed Role to Map to an Internal Role”* shows the external realm *LDAP* selected and the role "svn" being selected to map to a role.

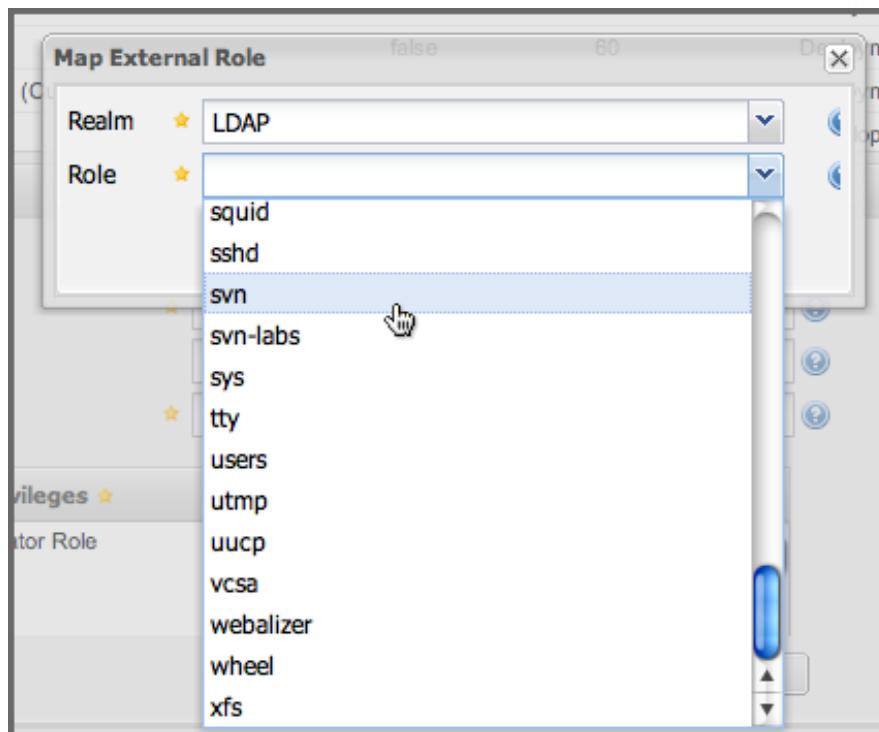


Figure 8.15. Selecting an Externally Managed Role to Map to an Internal Role

Once the external role has been selected, the repository manager creates a corresponding role. You can then assign other roles to this new externally mapped role. *Figure 8.16, “Mapping an External Role to an Internal Role”* shows that the “SVN role from LDAP” is being assigned the *Administrator* role. This means that any user that is authenticated against the external LDAP Realm who is a member of the *svn* LDAP group will be assigned a role that maps to the *Administrator* role.

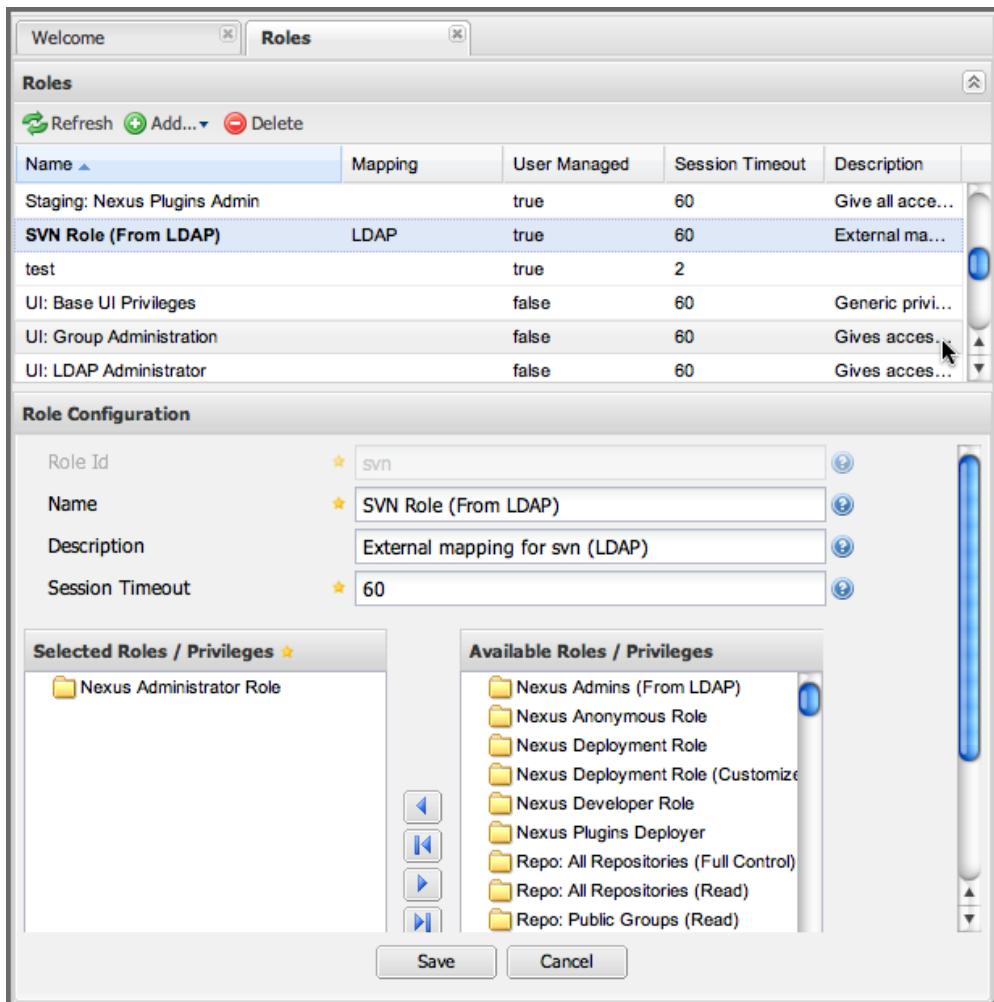


Figure 8.16. Mapping an External Role to an Internal Role

Enterprise LDAP Support

 **Available in Nexus Repository Pro only**

Enterprise LDAP Fail-over Support

When an LDAP server fails, the applications authenticating against it can also become unavailable. Because a central LDAP server is such a critical resource, many large software enterprises will install a series of primary and secondary LDAP servers to make sure that the organization can continue to operate in the case of an unforeseen failure. Nexus Repository Manager Pro's Enterprise LDAP plugin now provides you with the ability to define multiple LDAP servers for authentication. To configure multiple LDAP servers, click on *Enterprise LDAP* under Security in the main application menu. You should see the *Enterprise LDAP* panel shown in the following figure:

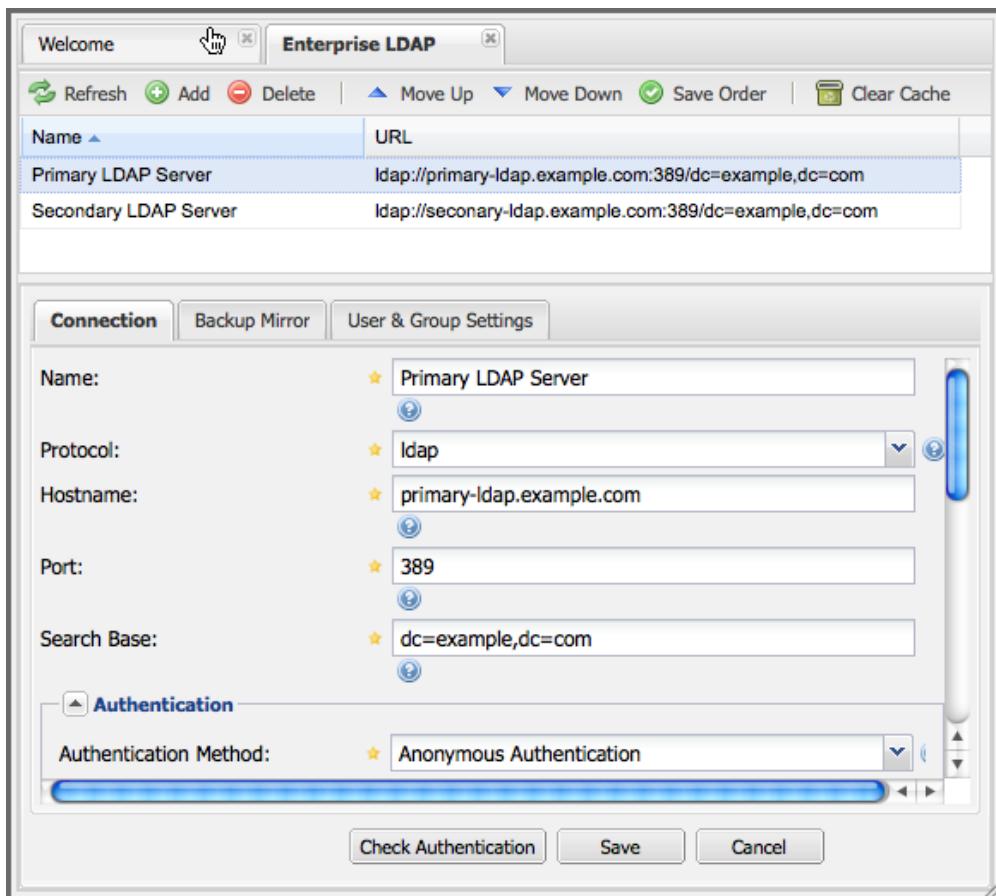


Figure 8.17. Defining Multiple LDAP Servers in Nexus Repository Manager Pro

From here you can use the *Backup Mirror* setting for an LDAP repository. This backup mirror is another LDAP server that will be consulted if the original LDAP server cannot be reached. Nexus Repository Manager Pro assumes that the backup mirror is a carbon copy of the original LDAP server and it will use the same user and group mapping configuration as the original LDAP server. Instead of using the backup mirror settings, you could also define multiple LDAP backup mirrors in the list of configured LDAP servers shown in the previous figure. When you configure more than one LDAP server, Nexus Repository Manager Pro will consult the servers in the order they are listed in this panel. If the repository manager can't authenticate against the

first LDAP server, Nexus Repository Manager Pro will move on to the next LDAP server until it either reaches the end of the list or finds an LDAP server to authenticate against.

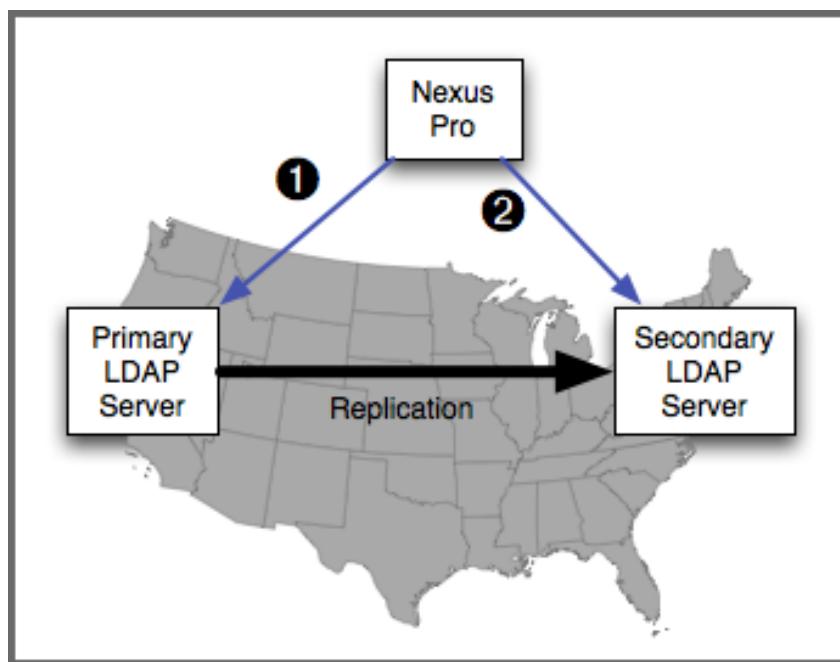


Figure 8.18. Use Multiple LDAP Servers in a Fail-over Scenario

The feature just described is one way to increase the reliability of your repository manager. In the previous case, both servers would have the same user and group information. The secondary would be a mirror of the primary. But, what if you wanted to connect to two LDAP servers that contained different data?

If you want to connect to two LDAP servers that contain different data, Nexus Repository Manager Pro also provides support for multiple servers and LDAP schemas as described in [Support for Multiple Servers and LDAP Schemas](#)(see page 351).

Support for Multiple Servers and LDAP Schemas

The same ability to list more than one LDAP server also allows you to support multiple LDAP servers that may or may not contain the same user authentication information. Assume that you had an LDAP server for the larger organization containing all of the user information across all of the departments. Now assume that your own department maintains a separate LDAP server that you use to supplement this larger LDAP installation. Maybe your department needs to create new users that are not a part of the larger organization, or maybe you have to support the integration of two separate LDAP servers that use different schema on each server.

A third possibility is that you need to support authentication against different schema within the same LDAP server. This is a common scenario for companies that have merged and whose infrastructures have not yet been merged. To support multiple servers with different user/group mappings or to support a single server with multiple user/group mappings, you can configure these servers in the *Enterprise LDAP* panel shown

prior. The repository manager will iterate through each LDAP server until it can successfully authenticate a user against an LDAP server.

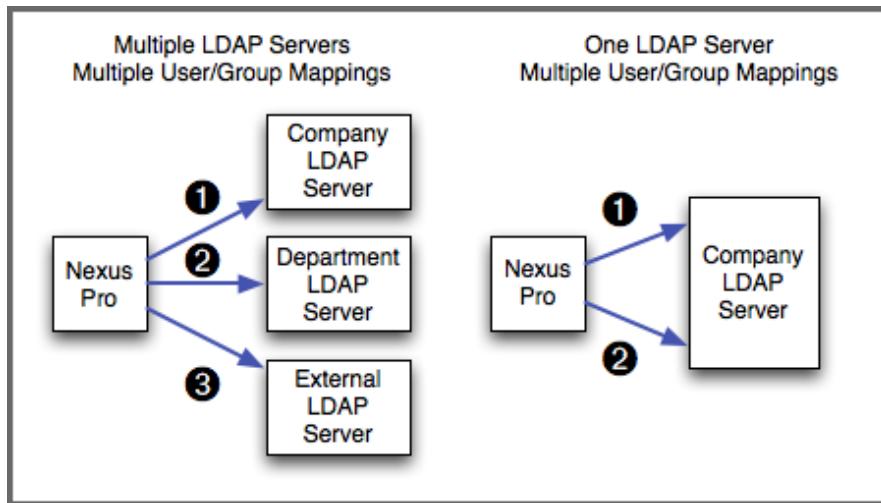


Figure 8.19. Supporting Multiple LDAP Schemas with Nexus Repository Manager Pro

Enterprise LDAP Performance Caching and Timeout

If you are constantly authenticating against a large LDAP server, you may start to notice a significant performance degradation. With Nexus Repository Manager Pro you can cache authentication information from LDAP. To configure caching, create a new server in the *Enterprise LDAP* panel, and scroll to the bottom of the *Connect* tab. You should see the following input field which contains the number of seconds to cache the results of LDAP queries.

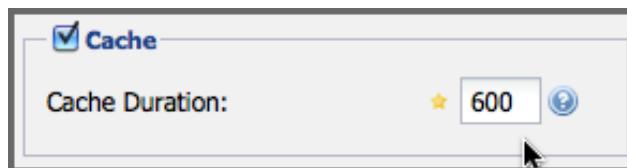


Figure 8.20. Setting the LDAP Query Cache Duration (in Seconds)

You will also see options to alter the connection timeout and retry interval for an LDAP server. If you are configuring a number of different LDAP servers with different user and group mappings, you will want to make sure that you've configured low timeouts for LDAP servers at the beginning of your *Enterprise LDAP* server list. If you do this properly, it will take the repository manager next to no time to iterate through the list of configured LDAP servers.

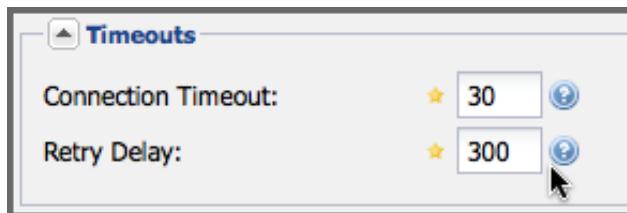
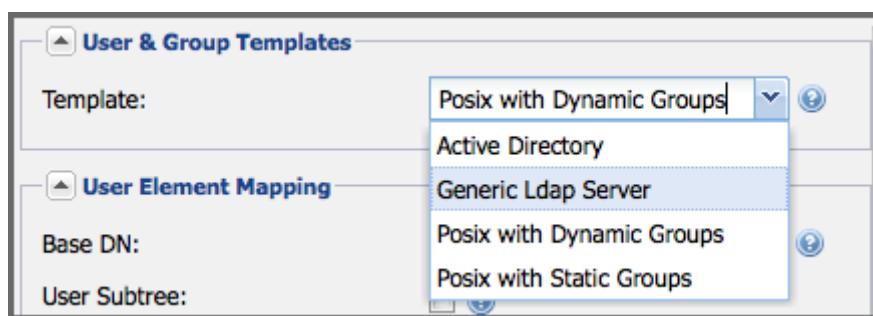


Figure 8.21. Setting the LDAP Connection Timeout (in Seconds)

Once you've configured LDAP caching in Nexus Repository Manager Pro, authentication and other operations that involve permissions and credentials once retrieved from an external server will run quickly and efficiently.


User and Group Templates

If you are configuring your Nexus Repository Manager Pro instance to connect to an LDAP server there is a very good chance that your server follows one of several, well-established standards. Nexus Repository Manager Pro's LDAP server configuration includes these widely used user and group mapping templates that greatly simplify the setup and configuration of a new LDAP server. To configure user and group mapping using a template, select a LDAP server from the *Enterprise LDAP* panel, and choose the *User and Group Settings*. You will see a *User & Group Templates* section as shown in the following figure.

**Figure 8.22. Using User and Group Mapping Templates**

Testing a User Login

Nexus Repository Manager Pro provides you with the ability to test a user login directly. To test a user login, go to the *User and Group Settings* tab for a server listed in the *Enterprise LDAP* panel. Scroll to the bottom of the form, and you should see a button named *Check Login*.

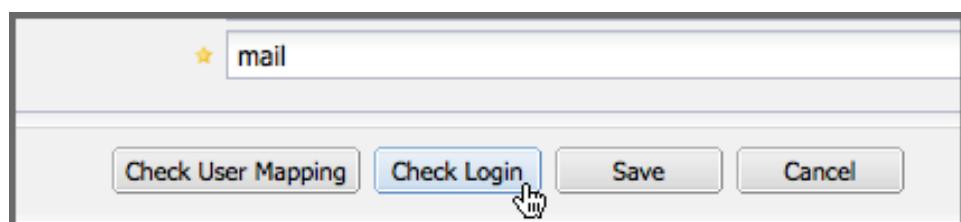**Figure 8.23. Testing a User Login**

If you click on *Check Login*, you will then be presented with the login credentials dialog shown below. You can use this dialog to login as an LDAP user and test the user and group mapping configuration for a particular server. This feature allows you to test user and group mapping configuration directly and to quickly diagnose and address difficult authentication and access control issues via the administrative interface.

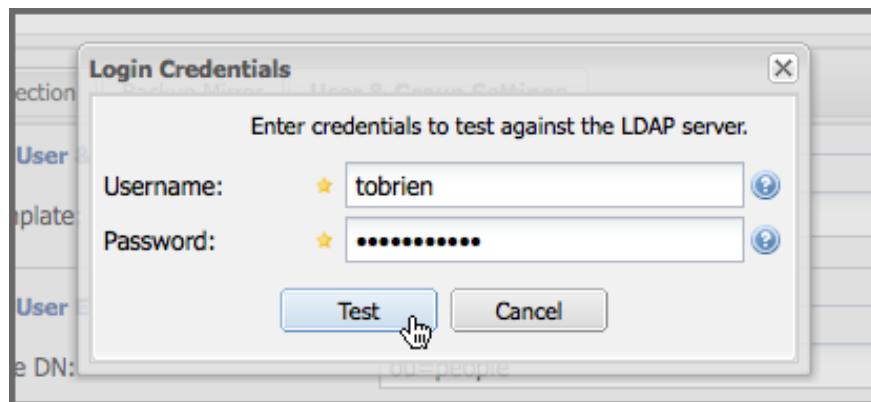


Figure 8.24. Supply a User's Login Credentials

Atlassian Crowd Support

 **Available in Nexus Repository Pro only**

Atlassian Crowd is a single sign-on and identity management product that many organizations use to consolidate user accounts and control which users and groups have access to which applications. Nexus Repository Manager Pro contains a security realm that allows you to configure the repository manager to authenticate against an Atlassian Crowd instance. The following steps are necessary to configure Crowd-based authentication:

- Prepare Nexus
- Prepare Atlassian Crowd
- Configure the Nexus Crowd Connection
- Configure Nexus Crowd Security
- Activate the Nexus Crowd Realm

Topics in this section:

- [Prepare NXRM and Atlassian Crowd\(see page 354\)](#)
- [Configure Nexus Repository Manager Pro Crowd Integration\(see page 358\)](#)
- [Configure Nexus Repository Manager Pro Crowd Security\(see page 360\)](#)
- [Activate Nexus Repository Manager Pro Crowd Realm\(see page 365\)](#)

Prepare NXRM and Atlassian Crowd

Prepare NXRM for Atlassian Crowd

Atlassian Crowd support is preinstalled and ready to configure in Nexus Repository Manager Pro 2.7+. In older versions, Crowd support is implemented as an optional plugin that comes as part of any Nexus Repository Manager Pro download. The directory containing the plugin code is called either enterprise-crowd-plugin-X.Y.Z or nexus-crowd-plugin-X.Y.Z. Install the plugin following the instructions in [Managing Plugins](#)(see page 493).

 Using LDAP and Crowd Realms together in the repository manager may work, but this is not supported. If you already use LDAP support, we recommend adding your LDAP server as a Crowd directory accessible to the Crowd nexus application instead of using both LDAP and Crowd realms in the repository manager.

Prepare Atlassian Crowd

Compatibility

Always use the latest version of Crowd available at the time your version of Nexus Repository Manager Pro was released. When upgrading to a newer Crowd server, carefully review the Crowd server release notes for REST API backwards compatibility issues.

Crowd support in Nexus Repository Manager Pro 2.7 and greater only works in Crowd versions (2.1+) that support the Crowd REST API. Older versions use a deprecated SOAP-based API and are less reliable and performant.

Crowd support is actively tested with the highest available version of Crowd at the time Nexus Repository Manager Pro is released.


Configure a Nexus Repository Manager Pro Application in the Atlassian Crowd Server

 These instructions are a general guide to adding an application to Crowd. For current detailed instructions, visit the official Crowd documentation.

To connect Nexus Repository Manager Pro to Atlassian's Crowd, you will need to configure Nexus Repository Manager Pro as an application in Crowd.

1. Login to Crowd as a user with administrative rights
2. Click on the Applications tab

3. Click Add Application to display the form, shown in *Figure 9.1, “Creating a Nexus Crowd Application”*, and create a new application with the following values in the *Details* tab of the Add Application form as the following example:
 - Application Type: Generic Application
 - Name: nexus
 - Description: Sonatype Nexus Professional
4. Choose a password for this application. Nexus Repository Manager will use this password to authenticate with the Crowd server. Click on the *Next* button.

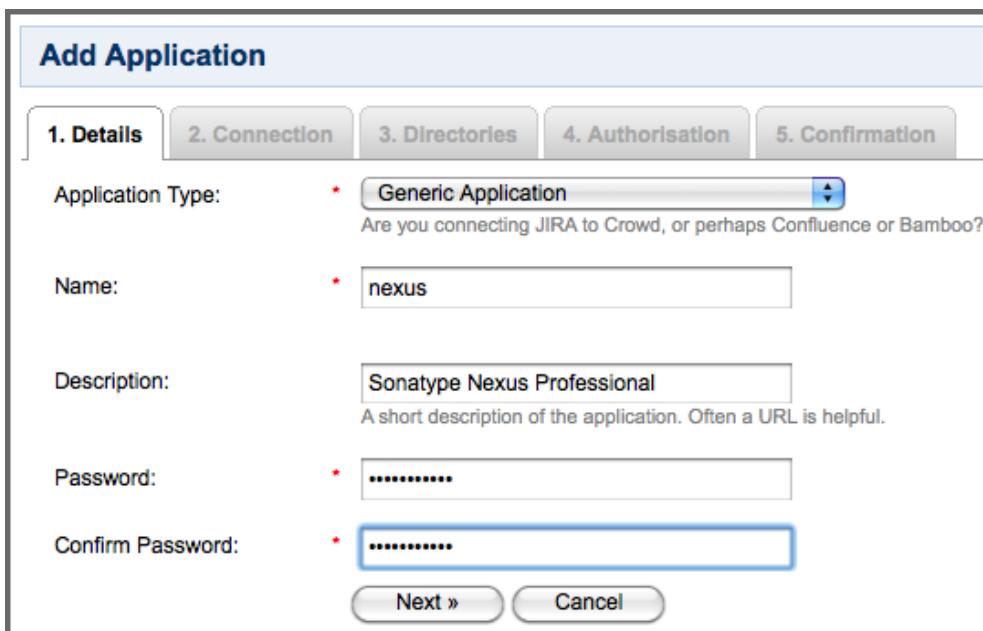


The screenshot shows the 'Add Application' dialog with the 'Details' tab selected. The form fields are as follows:

| | | |
|-------------------|---|--|
| Application Type: | * <input type="text" value="Generic Application"/> | Are you connecting JIRA to Crowd, or perhaps Confluence or Bamboo? |
| Name: | * <input type="text" value="nexus"/> | |
| Description: | <input type="text" value="Sonatype Nexus Professional"/> A short description of the application. Often a URL is helpful. | |
| Password: | <input type="password" value="*****"/> | |
| Confirm Password: | <input type="password" value="*****"/> | |

At the bottom are 'Next »' and 'Cancel' buttons.

Figure 9.1. Creating a Nexus Crowd Application

Clicking on *Next* will advance the form to the *Connection* tab shown in *Figure 9.2, “Creating a Nexus Crowd Application Connection”*. In this tab you need to supply the URL of your application instance and the remote IP address for Nexus Repository Manager Pro. *Figure 9.2, “Creating a Nexus Crowd Application Connection”*, shows the *Connection* form configured for a local instance of Nexus Repository Manager Pro. If you were configuring Crowd and Nexus Repository Manager Pro in a production environment, you would supply the URL that users would use to load the repository manager user interface in a web browser and you would supply the IP address that the repository manager will be connecting from. Once you have completed the *Connection* form, click on *Next* to advance to the *Directories* form shown in *Figure 9.3, “Choosing Atlassian Crowd Application Directories”*.

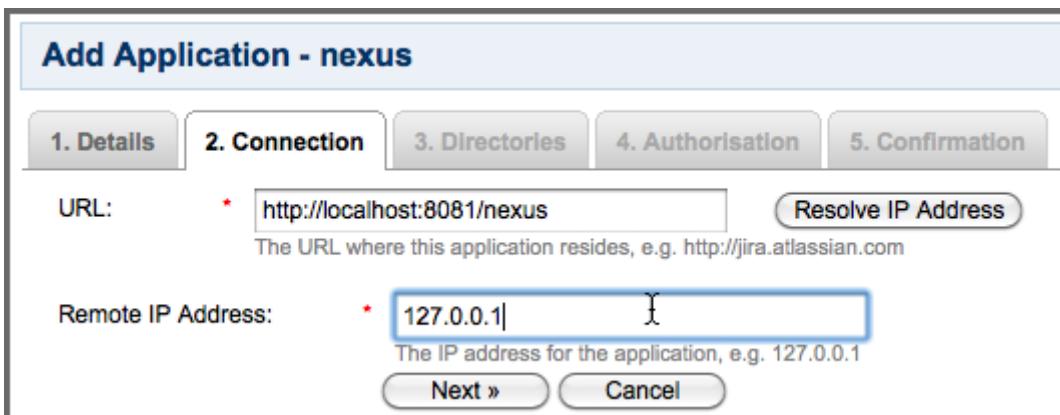

Add Application - nexus

1. Details 2. Connection 3. Directories 4. Authorisation 5. Confirmation

URL: * http://localhost:8081/nexus [Resolve IP Address](#)
The URL where this application resides, e.g. http://jira.atlassian.com

Remote IP Address: * 127.0.0.1
The IP address for the application, e.g. 127.0.0.1

[Next >](#) [Cancel](#)

Figure 9.2. Creating a Nexus Crowd Application Connection

The *Directories* form allows you to select the user directory used for Nexus Repository Manager authentication. In this example, the default *User Management* directory will be used.



Add Application - nexus

1. Details 2. Connection 3. Directories 4. Authorisation 5. Confirmation

Select the directories you are going to let this application use for authentication and authorisation.

User Management:
Crowd Internal Directory – This is a user management directory

[Next >](#) [Cancel](#)

Figure 9.3. Choosing Atlassian Crowd Application Directories

Clicking on the *Next* button in the *Directories* form advances to the *Authorisation* form shown in *Figure 9.4, “Creating a Nexus Crowd Application Authorization”*. If any of the directories selected in the previous form contain groups, each group is displayed on this form next to a checkbox. You can select *Allow all users to authenticate* for a directory or you can select specific groups that are allowed to authenticate to Nexus Repository Manager Pro via Crowd. This option would be used if you wanted to limit repository manager access to specific subgroups within a larger Crowd directory. If your entire organization is stored in a single Crowd directory, you may want to limit repository manager access to a group that contains only developers and administrators.

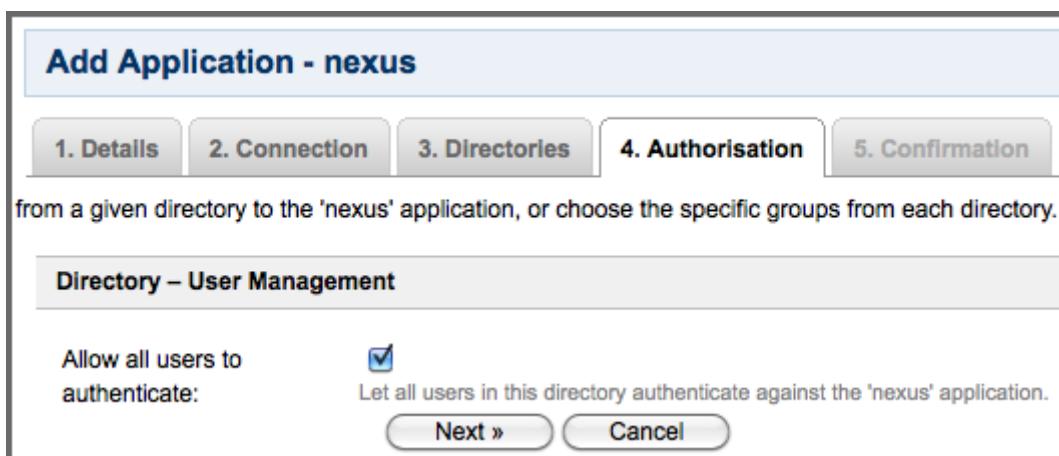


Figure 9.4. Creating a Nexus Crowd Application Authorization

Configure Nexus Repository Manager Pro Crowd Integration

Configure Nexus Repository Manager Pro to Trust Crowd's Secure URL (Optional)

Although optional, we advise the connection from Nexus Repository Manager Pro to your Crowd server to use the HTTPS protocol.

If the Crowd Server certificate is not signed by a public certificate authority, you may have to explicitly trust the server certificate using SSL support. A common symptom observed are peer not authenticated messages, when trying to connect to the Crowd server.

Steps to explicitly trust the Crowd Server URL certificate in Nexus Repository Manager Pro are:

1. Enable the *SSL: Crowd* capability
2. Add the Crowd server certificate to the truststore
3. Configure Crowd Connection URL using the HTTPS url

⚠ The *SSL: Crowd* capability is only available in Nexus Repository Manager Pro 2.7+. Older versions must manually configure trust using an explicit truststore specified with JRE system properties.

Enabling the SSL: Crowd Capability

1. Login to Nexus Repository Manager as an Administrator.
2. In the sidebar menu, click *Administration* → *Capabilities* to open the *Capabilities* panel.

3. Click the **Add** button in the panel toolbar. Select **SSL: Crowd** in the **Type** field. Make sure the **Enabled** checkbox is checked and click the **Save** button.

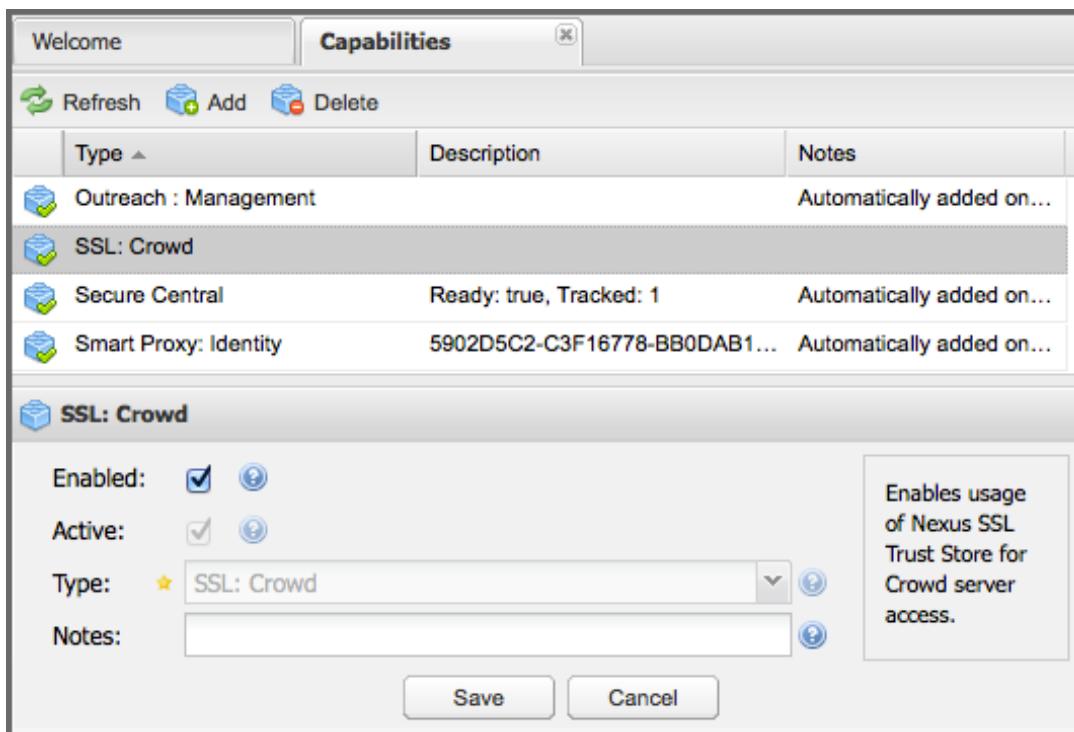


Figure 9.5. SSL: Crowd Capability

Adding the Crowd Server Certificate to the Truststore

In order to add the server certificate of your Crowd server to the truststore, locate the HTTPS Crowd Server URL and follow the Load from server instructions in [Trusting SSL Certificates Globally](#)(see page 0).

Configure Nexus Crowd Connection

The Crowd Configuration screen displayed in *Figure 9.6, “Crowd Configuration Panel”* can be accessed by users with administrative privileges in Nexus Repository Manager Pro by selecting *Crowd* in the *Security* section of the main menu.

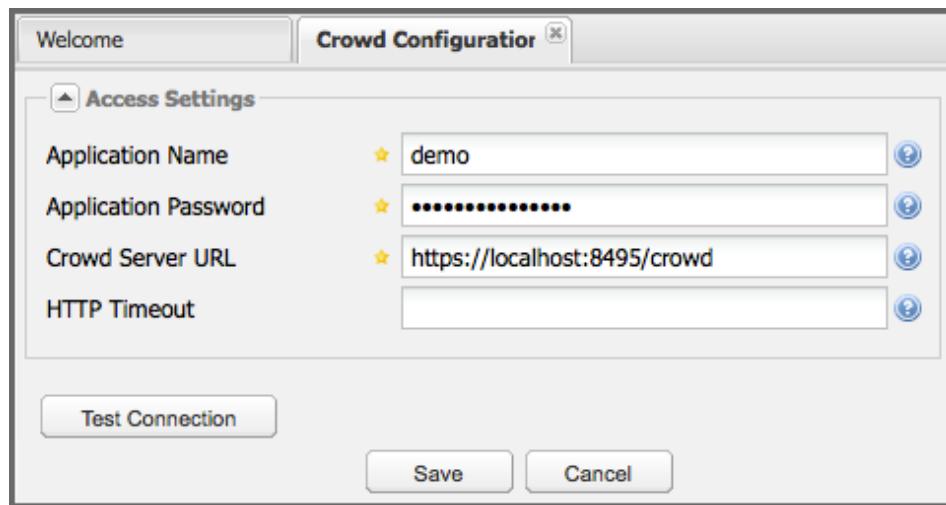


Figure 9.6. Crowd Configuration Panel

This panel contains the following fields:

Application Name

This field contains the application name of a Crowd application. This value should match the value in the *Name* field of the form shown in *Figure 9.1, “Creating a Nexus Crowd Application”*.

Application Password

This field contains the application password of a Crowd application. This value should match the value in the *Password* field of the form shown in *Figure 9.1, “Creating a Nexus Crowd Application”*.

Crowd Server URL

This is the URL used to connect to the Crowd Server. Both `http://` and `https://` URLs are accepted. You may need to trust the crowd server certificate if a `https://` URL is used.

HTTP Timeout

The HTTP Timeout specifies the number of milliseconds the repository manager will wait for a response from Crowd. A value of zero indicates that there is no timeout limit. Leave the field blank to use the default HTTP timeout.

You can use the *Test Connection* button to validate if your connection to Crowd is working. Once you have a working connection, do not forget to *Save* your configuration. Use *Cancel* to abort saving any changes.

Configure Nexus Repository Manager Pro Crowd Security

There are two approaches available to manage what privileges a Crowd user has when they login to Nexus Repository Manager Pro.

⚠ Mapping Crowd Groups to Nexus Repository Manager Pro Roles is preferable because there is less configuration involved overall in Nexus Repository Manager Pro and assigning users to Crowd groups can be centrally managed inside of Crowd by your security team after the initial repository manager setup.

Mapping a Crowd Group to Nexus Repository Manager Pro Role

When mapping a Crowd group to a Nexus Repository Manager Pro role, you are specifying the permissions (via roles) that users within the Crowd group will have after they authenticate.

To map a Crowd group to a Nexus Repository Manager Pro role, open the *Roles* panel by clicking on the *Roles* link under the *Security* section of the sidebar menu. Click on the *Add...* button and select *External Role Mapping* as shown in *Figure 9.7, “Adding an External Role Mapping”*.

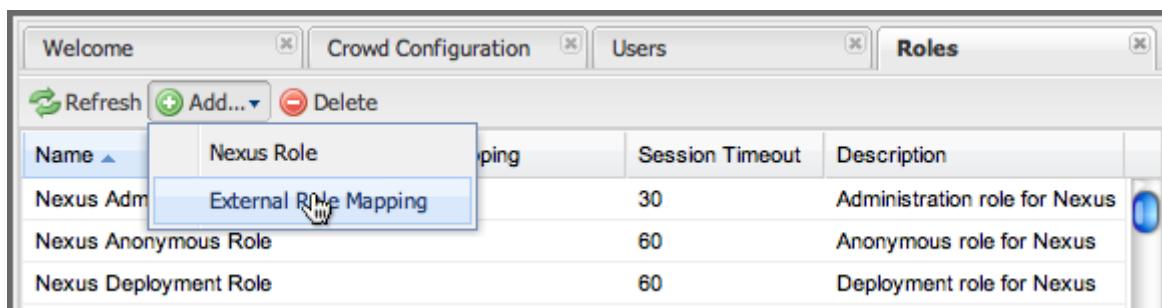


Figure 9.7. Adding an External Role Mapping

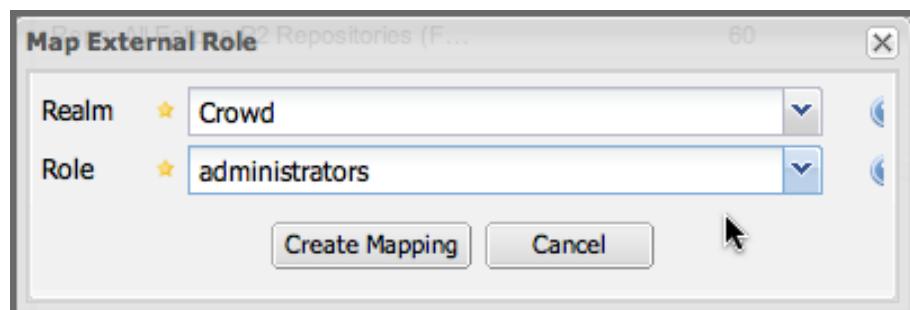


Figure 9.8. Mapping an External Crowd Group to a Nexus Repository Manager Pro Role

After choosing the *Crowd* realm, the *Role* drop-down should list all the Crowd groups the *nexus* crowd application has access to. Select the group to would like to map in the *Role* field and click *Create Mapping*.

⚠ If you have two or more groups in Crowd accessible to the *nexus* application with the same name but in different directories, the repository manager will only list the first one that Crowd finds. Therefore, Crowd administrators should avoid identically named groups in Crowd directories.

Before saving the group-to-role mapping, you must add at least one Nexus Repository Manager Pro role to the mapped group. After you have added the roles using the *Add* button, click the *Save* button.


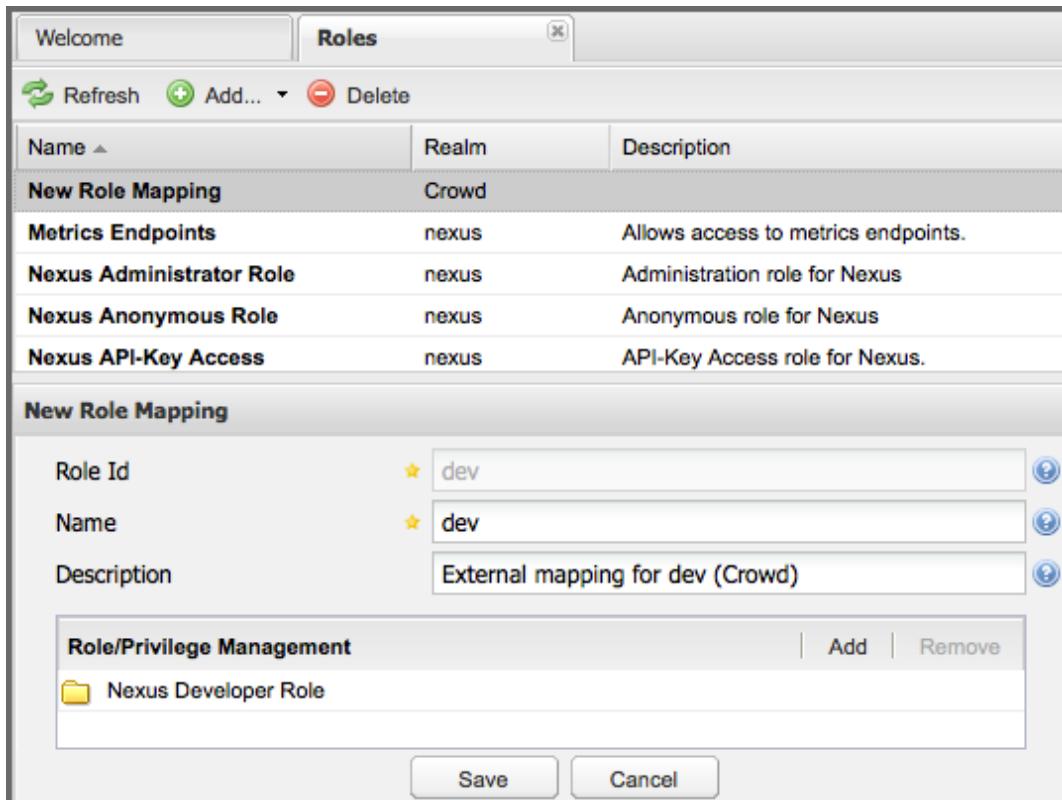


Figure 9.9. Unsaved Mapping of External Crowd dev Group to Developers Role

Saved mappings will appear in the list of roles with a mapping value of *Crowd*, as shown in *Figure 9.10, “Mapped External Crowd dev Group to Nexus Developers Role”*.

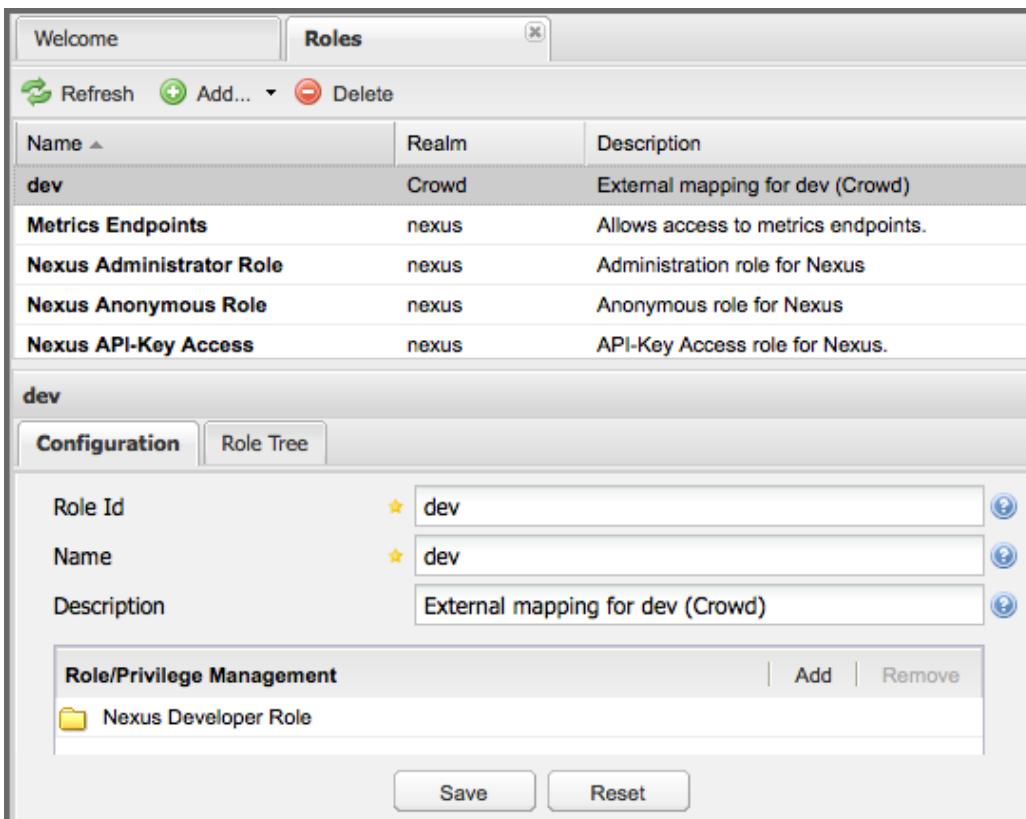

| Name | Realm | Description |
|--------------------------|-------|-------------------------------------|
| dev | Crowd | External mapping for dev (Crowd) |
| Metrics Endpoints | nexus | Allows access to metrics endpoints. |
| Nexus Administrator Role | nexus | Administration role for Nexus |
| Nexus Anonymous Role | nexus | Anonymous role for Nexus |
| Nexus API-Key Access | nexus | API-Key Access role for Nexus. |

Configuration

Role/Privilege Management


- Nexus Developer Role

Save Reset

Figure 9.10. Mapped External Crowd dev Group to Nexus Developers Role

Mapping a Crowd User to Nexus Role

To illustrate this feature, consider the Crowd server user with an id of `brian`. As visible in the Crowd administrative interface in *Figure 9.11, “Crowd Groups for User “brian””*, the user is a member of the `dev` group

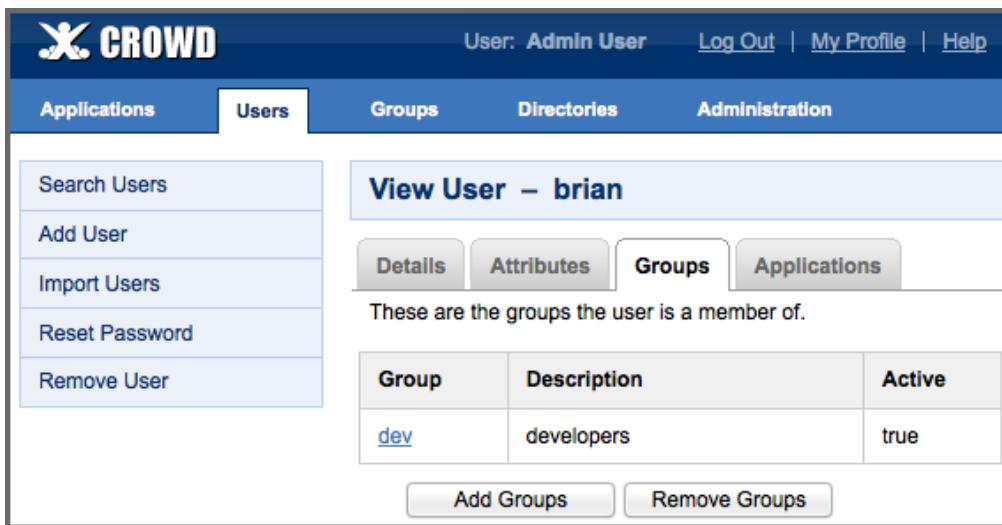

User: Admin User | Log Out | My Profile | Help

Applications Users Groups Directories Administration

Search Users Add User Import Users Reset Password Remove User

View User – brian

Details Attributes Groups Applications

These are the groups the user is a member of.

| Group | Description | Active |
|-------|-------------|--------|
| dev | developers | true |

Add Groups Remove Groups

Figure 9.11. Crowd Groups for User "brian"

To add an *External User Role Mapping*, open the *Users* panel in the repository manager by clicking *Users* in the *Security* section of the sidebar menu.

Click on the *Add...* button and select *External User Role Mapping* from the drop-down as shown in *Figure 9.12, "Adding an External User Role Mapping"*.

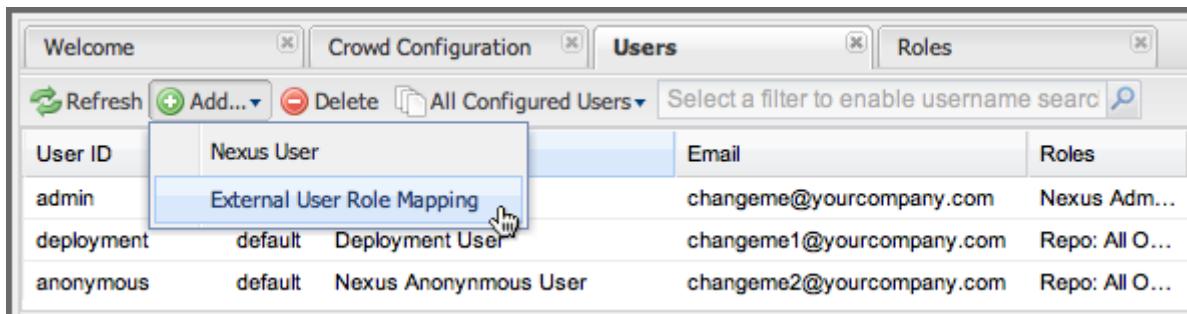


Figure 9.12. Adding an External User Role Mapping

Selecting *External User Role Mapping* will show a mapping panel where you can locate a user by Crowd user id.


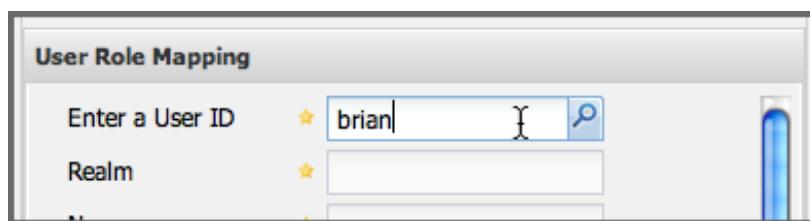


Figure 9.13. Locate a Crowd User by User ID

Typing the Crowd user id, in this example *brian*, in the *Enter a User ID* field and clicking the magnifying glass icon will cause the repository manager to search for the user ID "brian" in all known realms, including Crowd.

Once you locate the Crowd user, use *Add* button to add roles to the Crowd User. You must map at least one role to the Crowd managed user in order to *Save*. *Figure 9.14, "Mapped External Crowd User Example"* displays the *brian* Crowd realm user as a member of the *dev* Crowd group and the mapped role called *Nexus Administrator Role*. External groups like *dev* are bolded in the *Role Management* list.

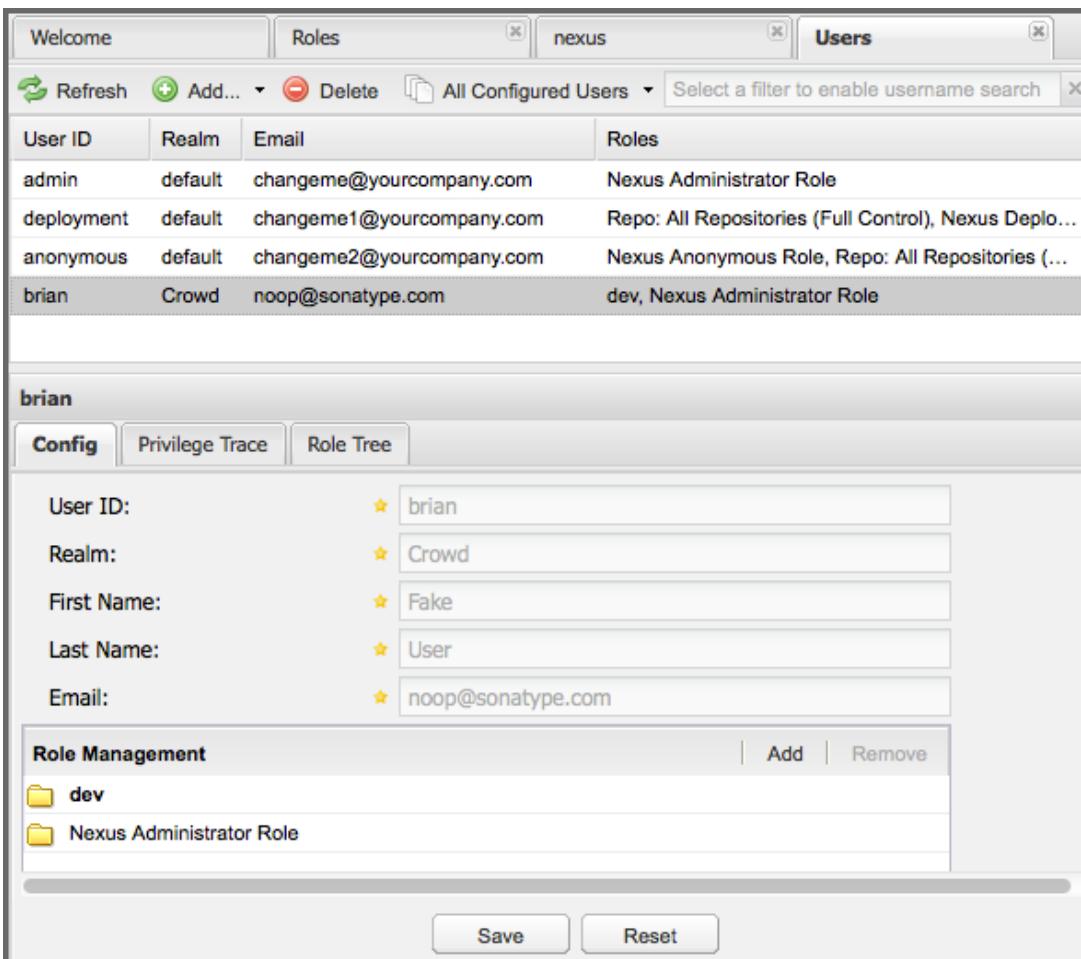

The screenshot shows the 'Users' page in the Nexus Repository Manager 2 interface. At the top, there are tabs for 'Welcome', 'Roles', and 'nexus'. Below them are buttons for 'Refresh', 'Add...', 'Delete', and a dropdown for 'All Configured Users' with a search bar. The main table lists users with columns for 'User ID', 'Realm', 'Email', and 'Roles'.

| User ID | Realm | Email | Roles |
|------------|---------|---------------------------|---|
| admin | default | changeme@yourcompany.com | Nexus Administrator Role |
| deployment | default | changeme1@yourcompany.com | Repo: All Repositories (Full Control), Nexus Deplo... |
| anonymous | default | changeme2@yourcompany.com | Nexus Anonymous Role, Repo: All Repositories (...) |
| brian | Crowd | noop@sonatype.com | dev, Nexus Administrator Role |

Below the table, a specific user profile for 'brian' is shown. The 'Config' tab is selected, displaying fields for User ID, Realm, First Name, Last Name, and Email, all populated with the values from the table. The 'Role Management' section shows the 'dev' and 'Nexus Administrator Role' assigned to this user. At the bottom are 'Save' and 'Reset' buttons.

Figure 9.14. Mapped External Crowd User Example

Activate Nexus Repository Manager Pro Crowd Realm

The final step to allow Crowd users to authenticate against Nexus Repository Manager Pro is to activate the Crowd authorization realm in the Security Settings displayed in *Figure 9.15, “Activating the Crowd Realm”*.

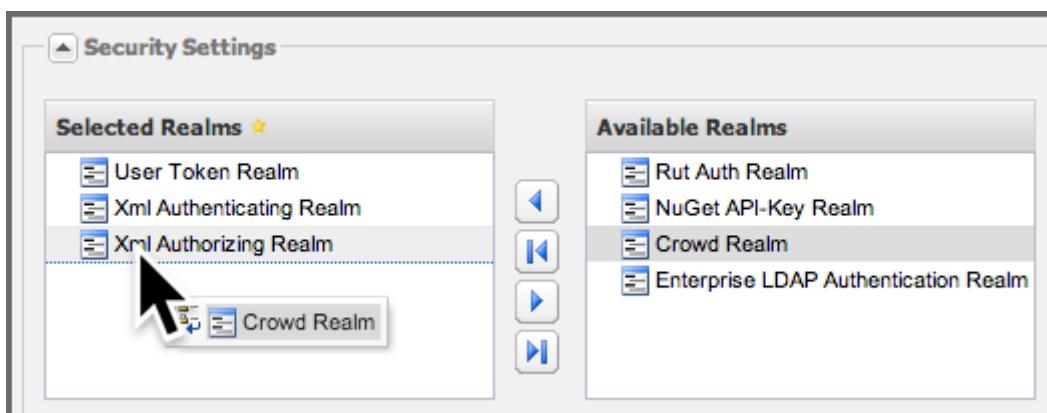


Figure 9.15. Activating the Crowd Realm

1. Select *Administration* → *Server* from the sidebar menu.
2. Scroll down to the *Security Settings* section.
3. Drag *Crowd Realm* from the list of *Available Realms* to the end of the *Selected Realms* list.
4. Save the server settings.

Procurement Suite

 **Available in Nexus Repository Pro only**

Introduction

The Procurement Suite of Nexus Repository Manager Pro provides an organization with control over what components are allowed into a repository from an external proxied repository such as the Central Repository. Such control can be a prerequisite for organizations unwilling or unable to trust the entire contents of an external public repository. If an organization is developing mission critical code, they will likely want to subject every third party dependency to intense scrutiny and testing before making the component available to build a release or support a team of developers. In most Enterprise development environments, a developer can't just decide to add in a new dependency to Hibernate or to the Spring Framework on a whim; the decision to add dependencies to third-party libraries will need to be funneled through an oversight process that relies on an architect or an administrator to promote components to a certified release repository.

Another more common experience is an organization that needs to proxy like the Central Repository or any other public repository but wants to limit access to specific versions of components or prevent dependencies on all components contained under a specific group. Some organizations are more amenable to trusting the contents of a remote proxied repository, like the Central Repository, but they also need the ability to block certain dependencies. Maybe you work on a team that needs to limit access to dependencies with a certain license, or maybe you just want to make sure no one uses a problematic version of Hibernate with a known bug. The procurement suite is the tool that provides for both coarse and fine-grained control of the components that can appear in a repository.

The Stages of Procurement

A procured repository is a hosted Repository that procures components from a Proxy Repository while procurement is enabled. For example, one could create a hosted repository named "Approved From Central" and then configure this hosted repository to procure components from the "Central" repository. Once the hosted repository has been created and the source of procurement has been configured, the repository will

obtain components from the proxy repository as long as procurement is activated. If you start procurement for a hosted repository, the hosted repository will fetch components from the proxy repository specified in the procurement settings. If you stop procurement for a hosted repository, no additional components will be retrieved from the proxy repository specified in the procurement settings. Without procurement active it is a hosted repository and therefore completely static.

The ability to enable or disable procurement for a hosted repository comes in very handy when you want to "certify" a hosted repository as containing all of the components (no more and no less) required for a production build. You can start procurement, run a build that triggers component procurement, and then stop procurement, knowing that the procured repository now contains all of the components required for building a specific project. Stopping procurement assures you that the contents of the repository will not change if the third-party, external proxied repository does. This is an extra level of assurance that your release components depend on a set of components under your complete control.

Topics in this section:

- [Approaches to Procurement\(see page 367\)](#)
- [Setting up a Procured Repository\(see page 369\)](#)
- [Configuring Procurement\(see page 375\)](#)
- [Stopping Procurement\(see page 380\)](#)

Approaches to Procurement

There are two main use cases for the Procurement Suite. In the first use case, the Procured Release Repository, the procurement features are used to create a procured release repository to make sure that the organization has full control over the components that are making it into a production release. The other use case, the Procured Development Repository, is for organizations that need more up-front control over which components are allowed during the development of a project. The following sections describe these two uses cases in more detail.

Procured Release Repository

The Procurement Suite can be used in two different ways. In the "Procured Release" mode, developers work with a proxied third-party repository exactly as they would without the Procurement Suite. When a developer needs to add a dependency on a new component, the repository manager will retrieve the component from the third-party repository (like Central or Apache Snapshots) and this component will be served to Maven via a proxied repository. When a QA or Release engineer needs to build a release or staging component, the Release or QA build would be configured to execute against a procured repository or repository group with only approved and procured repositories. A procured repository is one that only serves the components that have been explicitly approved using the Procurement Suite.

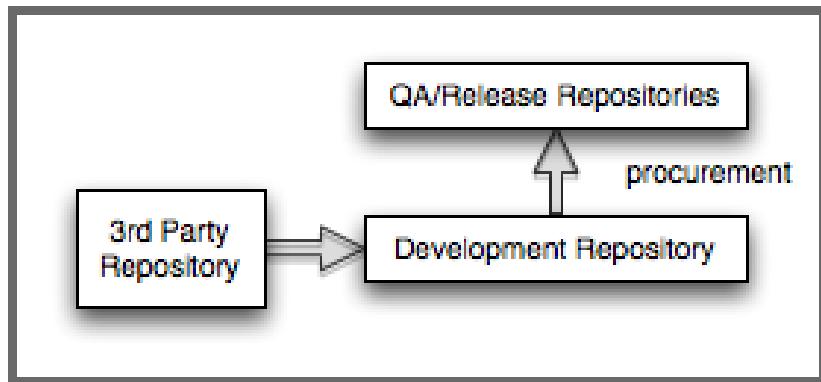


Figure 10.1. Procurement to a Certified Release Repository

In this model, developers can add as many third-party dependencies as they want, and it is the responsibility of the QA and release engineers to approve (or procure) components from the development Repository to the QA/Release repository. Developers can move forward, adding dependencies freely from a third-party, proxied repository, but once it is time to populate a release repository, an administrator can audit the required components, create a hosted repository, turn on procurement, populate the repository, and then deactivate procurement. This has the effect of "locking down" the components that are involved in a production release.

Procured Development Repository

There are some development environments that require even more control over which components can be used and referenced by developers. In these situations, it might make sense to only allow developers to work with a procured repository. In this mode, a developer must ask an administrator for permission to add a dependency on a particular third-party component. A procurement manager would then have to approve the component or group of components so that they would be made available to the developers. This is the "ask-first" model for organizations that want to control which components make it into the development cycle.

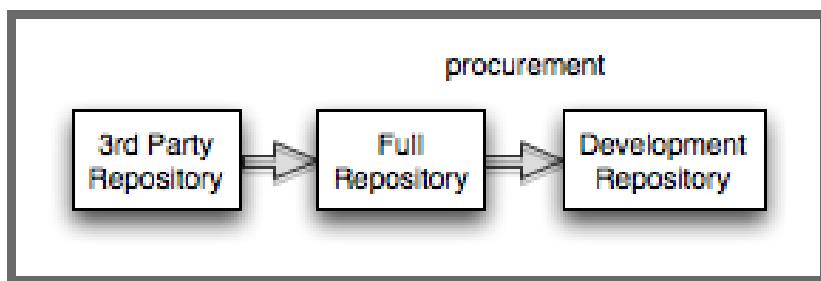


Figure 10.2. Procurement to a Certified Development Repository

This is a model common in industries that have strict oversight requirements. More often than not, banks, hospitals and government agencies have fairly strict regulations on the software that can be used by large development teams. With the Procured Development Repository approach, an architecture group can have full control over what components can be referenced by a large development team.

Providing Access with a Repository Group

In a typical usage a software build relies on approved components that have successfully passed procurement and additional components that have been authored internally in the organization and are available on the repository manager as well.

In order to use a combination of such components together with the procured component, you should set up a repository group that contains all repositories with pre-approved components as well as the procurement repository. For example, the release and snapshot repositories could be added to the group, based on the assumption that any internally authored components deployed there are automatically approved. In addition, you could add the third-party repository, if all uploads to it are done with prior approval of the specific components.

Once this repository group is set up, you can reference it from any tool just like the public group, e.g., in a `separate settings.xml` used by builds that can only have access to the approved components.

- ⓘ When running builds you need to make sure that you run to run clean builds. No components from other builds, accessing non-procured repositories, should be in the local repository of the build. This ensures that only approved components are used in the build. The easiest way to achieve this is to clear the local repository before a build or to run the build against a project specific local repository.

Setting up a Procured Repository

If you installed Nexus Repository Manager Pro, the procurement Suite is already installed and available via the *Artifact Procurement* option in the *Enterprise* menu of the user interface.

This section will walk through the process of creating and configuring an example hosted repository named `Approved From Central` which will be procured from the Central proxy repository. Setting up a procured repository consists of the following steps:

- Enable the remote index downloads for the proxy repository, that will act as the source of the procured components
- Create a hosted repository, which will be the target of the procurement
- Configure procurement for the hosted repository
- Configure the procurement rules

Before configuring a procured repository, you need to make sure that you have enabled Remote Index downloading for the proxied repository that will serve as the source for your procured repository.

⚠ If you are attempting to procure components from a remote repository that does not have a repository index, you can still use the procurement suite. Without a remote repository index, you will need to configure procurement rules manually without the benefit of the already populated repository tree shown in [Configuring Procurement](#)(see page 0).

Enable Remote Index Downloads

When you configure procurement rules for a hosted repository, the administrative interface displays the repository as a tree view using the Maven repository format of the groups and components populated from remote repository's index. Nexus Repository Manager ships with a set of proxy repositories but remote index downloading is disabled by default.

To use procurement effectively, you will need to tell Nexus Repository Manager Pro to download the remote indexes for a proxy repository. Click on *Repositories* under *Views/Repositories* in the main menu, then click on the *Central Repository* in the list of repositories. Click on the *Configuration* tab and switch *Download Remote Indexes* to *True* as shown in *Figure 10.3, "Enabling Remote Index Downloads for a Proxy Repository"*.

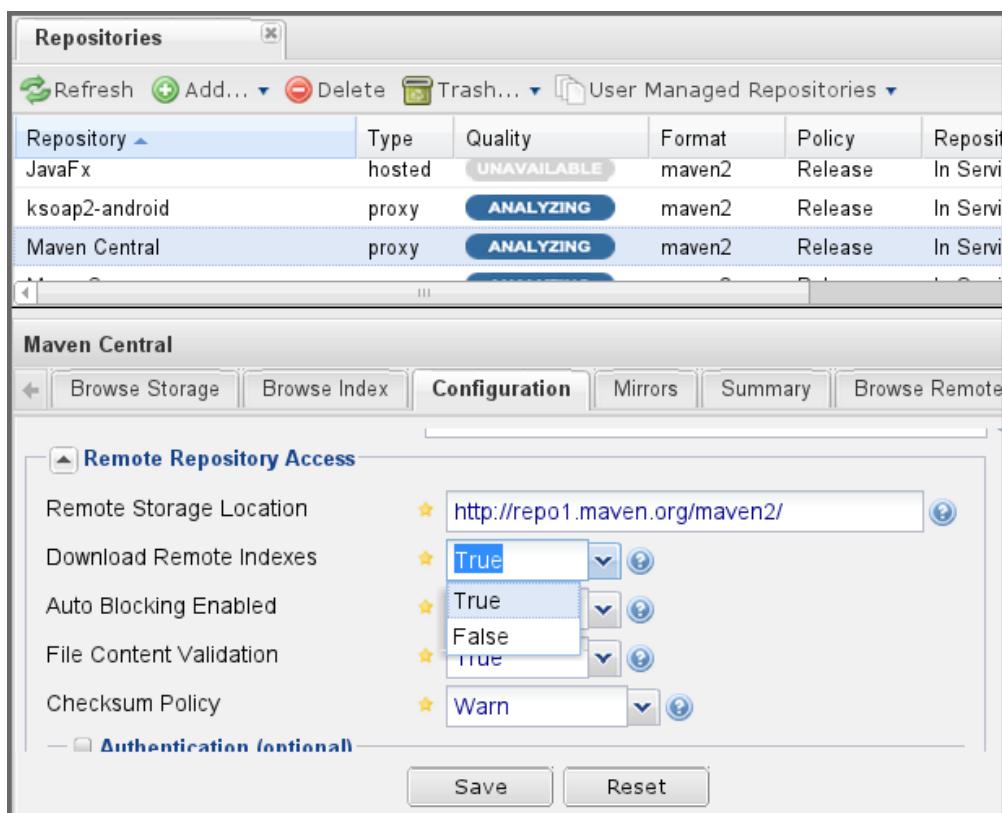



Figure 10.3. Enabling Remote Index Downloads for a Proxy Repository

Click on the *Save* button in the dialog shown in *Figure 10.3, "Enabling Remote Index Downloads for a Proxy Repository"*. Right-click on the repository row in the *Repositories* list and select *Update Index*. The repository

manager will then download the remote repository index and recreate the index for any repository groups that contain this proxied repository.

The repository manager may take a few minutes to download the remote index for a large repository. The size of the remote index, for example, for the Central Repository currently exceeds 50MB and is growing in parallel to the size of the repository itself.

To check on the status of the remote index download, click on *System Feeds* under *Views.Repositories* in the main menu. Click on the last feed to see a list of *System Changes in Nexus*. If you see a log entry like the one highlighted in *Figure 10.4, “Verification that the Remote Index has been Downloaded”*, the repository manager has successfully completed the download of the remote index from the Central Repository.

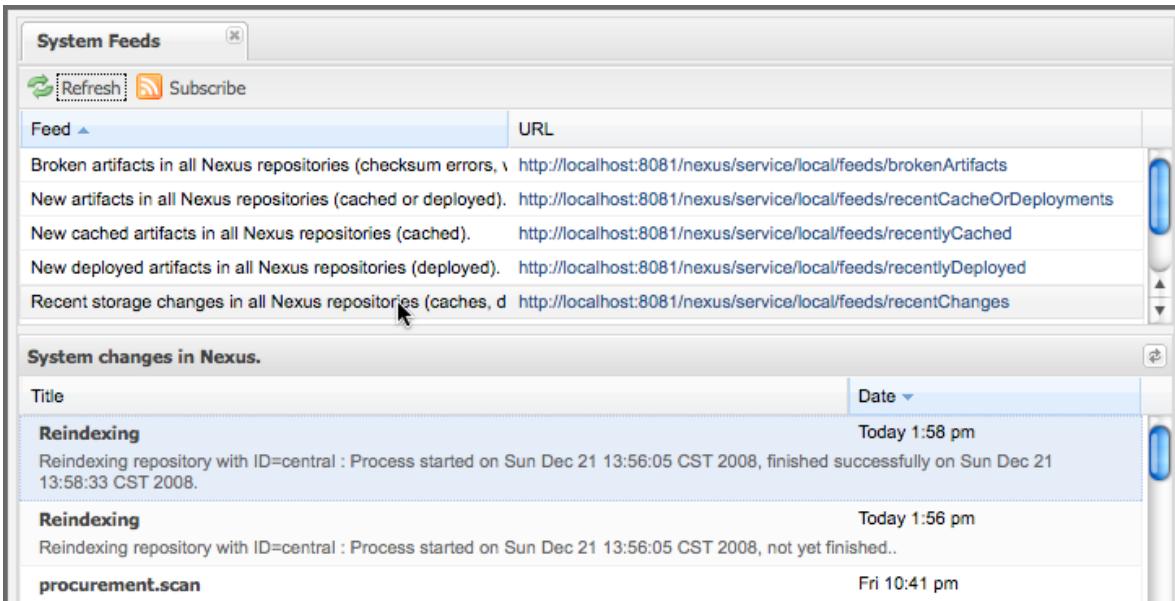

The screenshot shows the 'System Feeds' interface in the Nexus Repository Manager. The top navigation bar includes 'System Feeds', 'Refresh', and 'Subscribe'. Below this is a table with columns 'Feed' and 'URL'. The table lists several feeds:

| Feed | URL |
|--|---|
| Broken artifacts in all Nexus repositories (checksum errors, v | http://localhost:8081/nexus/service/local/feeds/brokenArtifacts |
| New artifacts in all Nexus repositories (cached or deployed). | http://localhost:8081/nexus/service/local/feeds/recentCacheOrDeployments |
| New cached artifacts in all Nexus repositories (cached). | http://localhost:8081/nexus/service/local/feeds/recentlyCached |
| New deployed artifacts in all Nexus repositories (deployed). | http://localhost:8081/nexus/service/local/feeds/recentlyDeployed |
| Recent storage changes in all Nexus repositories (caches, d | http://localhost:8081/nexus/service/local/feeds/recentChanges |

Below the table is a section titled 'System changes in Nexus.' It contains a table with columns 'Title' and 'Date'. The table shows two entries:

| Title | Date |
|---|---------------|
| Reindexing Reindexing repository with ID=central : Process started on Sun Dec 21 13:56:05 CST 2008, finished successfully on Sun Dec 21 13:58:33 CST 2008. | Today 1:58 pm |
| Reindexing Reindexing repository with ID=central : Process started on Sun Dec 21 13:56:05 CST 2008, not yet finished.. | Today 1:56 pm |
| procurement.scan | Fri 10:41 pm |

Figure 10.4. Verification that the Remote Index has been Downloaded

Create a Hosted Repository

When you configure procurement you are establishing a relationship between a proxy repository and a hosted repository. The hosted repository will be the static container for the components, while the proxy repository acts as the component source. To create a hosted repository, select *Repositories* from the *Views.Repositories* section of the main menu, and click on the *Add* button selecting *Hosted Repository* as shown in *Figure 10.5, “Adding the “Approved From Central” Hosted Repository”*.

The screenshot shows the Nexus Repository Manager 2 interface. At the top, there's a toolbar with 'Refresh', 'Add...', 'Delete', 'Trash...', and 'User Managed Repositories'. Below the toolbar is a table titled 'Repositories' with columns: Repository, Type, Quality, Format, and Policy. The table lists several repositories: 'Apache Snapshots' (proxy, ANALYZE, maven2, Snapshot), 'Approved From Central' (hosted, ANALYZE, maven2, Release), 'aQute' (proxy, ANALYZE, maven2, Release), and 'archive_migration' (hosted, ANALYZE, maven2, Release). A modal window titled 'Approved From Central' is open, showing configuration details for this specific repository. The configuration tabs include 'Browse Index', 'Browse Storage', 'Configuration' (selected), 'Mirrors', and 'Routing'. The configuration fields are: Repository ID (approved-from-central), Repository Name (Approved From Central), Repository Type (hosted), Provider (Maven2), Format (maven2), and Repository Policy (Release).

Figure 10.5. Adding the "Approved From Central" Hosted Repository

Selecting *Hosted Repository* will then load the configuration form. Create a repository with a Repository ID of approved-from-central and a name of Approved From Central. Make the release policy Release. Click the Save button to create the new hosted repository.

Configuring Procurement for Hosted Repository

At this point, the list of Repositories will have a new Hosted repository named Approved From Central. The next step is to start procurement for the new repository. When you do this, you are establishing a relationship between the new hosted repository and another repository as source of components. Typically, this source is a proxy repository. In this case, we're configuring procurement for the repository and we're telling the Procurement Suite to procure components from the Central proxy repository. To configure this relationship and to start procurement, click on *Artifact Procurement* under the *Enterprise* menu. In the *Procurement* panel, click on *Add Procured Repository* as shown in *Figure 10.6, "Adding a Procured Repository"*.

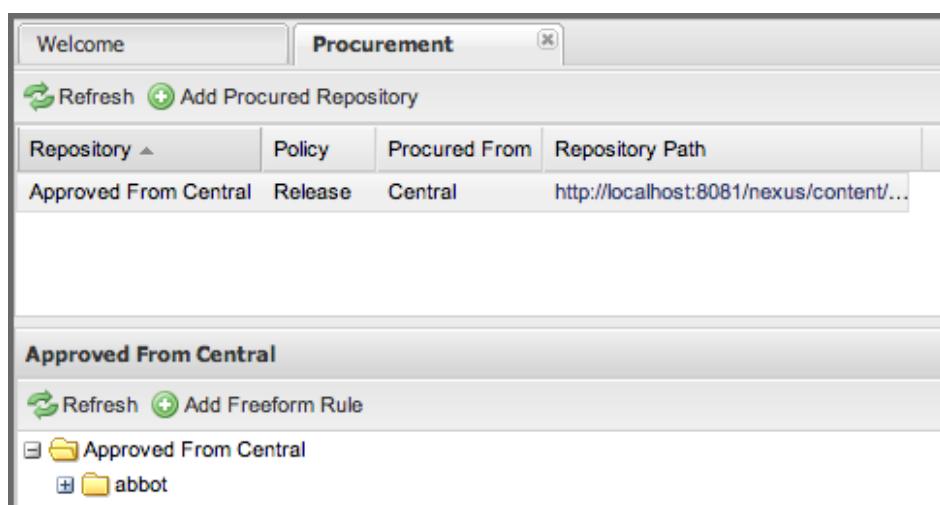


Figure 10.6. Adding a Procured Repository

You will then be presented with the *Start Procurement* dialog as shown in Figure 10.7, “Configuring Procurement for a Hosted Repository”. Select the Central proxy repository from the list of available Source repositories.

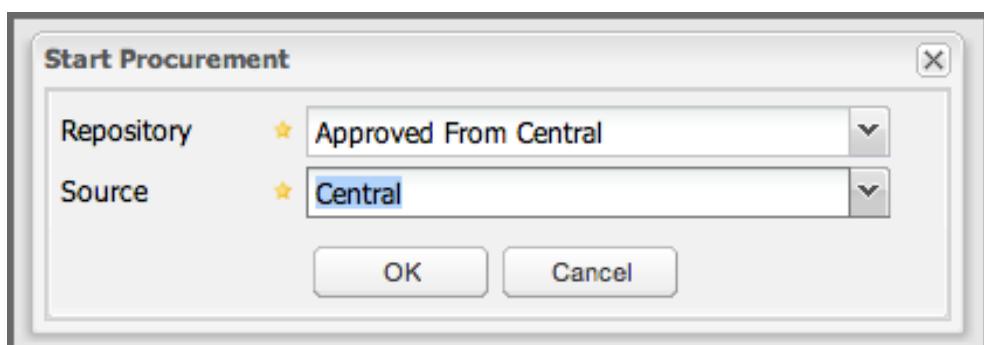


Figure 10.7. Configuring Procurement for a Hosted Repository

Procurement is now configured and started. If you are using an instance of Nexus Repository Manager Pro installed on localhost port 8081, you can configure your clients to reference the new repository at <http://localhost:8081/nexus/content/repositories/approved-from-central>.

By default, all components are denied and, without further customization of the procurement rules, no components will be available in the new repository.

One interesting thing to note about the procured repository is that the repository type changed once procurement was started. When procurement is activated for a hosted repository, the repository will not show up in the repositories list as a *User Managed Repository*. Instead it will show up as a proxy repository in the list of *Nexus Managed Repositories*. Use the drop-down for User Managed/Nexus Managed Repositories in the *Repositories* list. Click Refresh in the *Repositories* list and look at the *Approved From Central* repository in the list of *Nexus Managed Repositories*. You will see that the repository *Type* column contains proxy as shown in Figure 10.8, “Hosted Repository is a Nexus Managed Proxy Repository while

Procurement is Active". When procurement is started for a hosted repository, it is effectively a proxy repository, and when it is stopped it will revert back to being a normal hosted repository.

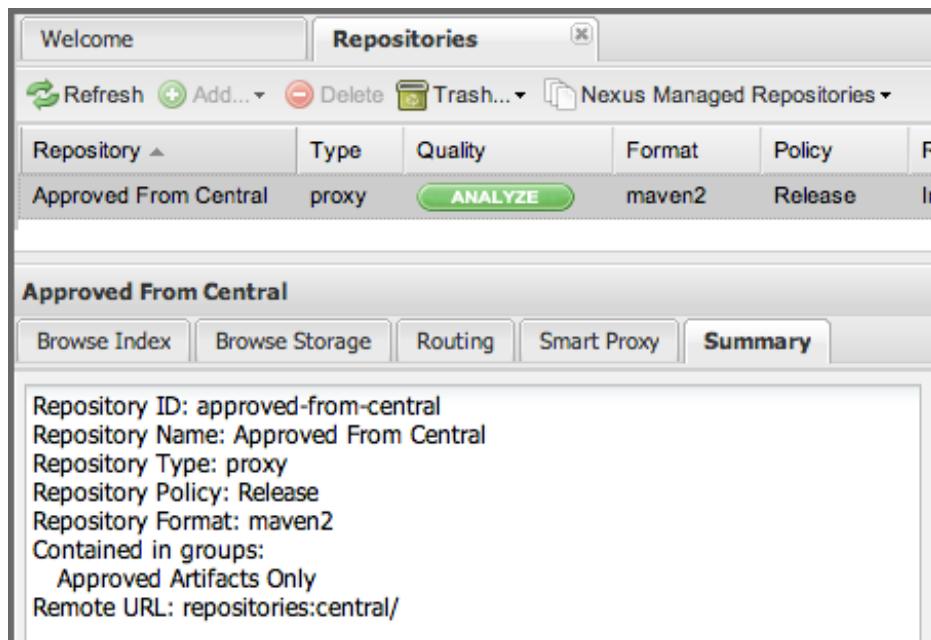


Figure 10.8. Hosted Repository is a Nexus Managed Proxy Repository while Procurement is Active

Procured Repository Administration

Once you've defined the relationship between a hosted repository and a proxy repository and you have started procurement, you can start defining the rules that will control which components are allowed in a procured repository and which components are denied. You can also start and stop procurement. This section details some of the administration panels and features that are available for a procured repository.

A procurement rule is a rule to allow or deny the procurement of a group, component, or a collection of groups or components. You load the *Artifact Procurement* interface by selecting *Artifact Procurement* in the *Enterprise* menu of the left-hand navigation. Clicking on this link will load a list of procured repositories. Clicking on the repository will display the proxied source repository and the current content of the procured repository in a tree as shown in *Figure 10.9*, "Viewing a Repository in the Artifact Procurement Interface".

This section will illustrate the steps required for blocking access to a specific component and then selectively allowing access to a particular version of that same component. This is a common use case in organizations that want to standardize specific versions of a particular dependency.

- ⚠** If you are attempting to procure components from a remote repository that does not have a repository index, you can still use the procurement suite. Without a remote repository index, you will need to configure procurement rules manually without the benefit of the already populated repository tree shown in this section.

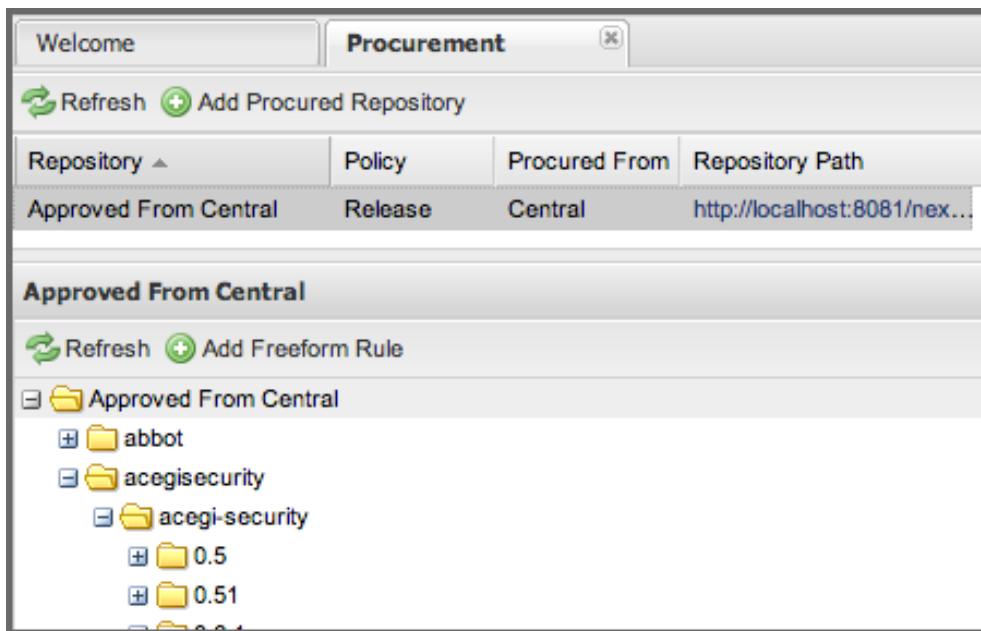


Figure 10.9. Viewing a Repository in the Artifact Procurement Interface

The directory tree in *Figure 10.9, “Viewing a Repository in the Artifact Procurement Interface”* is the index of the proxy repository from which components are being procured.

Configuring Procurement

To configure a procurement rule, right-click on a folder in the tree. *Figure 10.10, “Applying a Rule to a Component Folder for org/eclipse/aether”* displays the procurement interface after right-clicking on the org/eclipse/aether component folder.

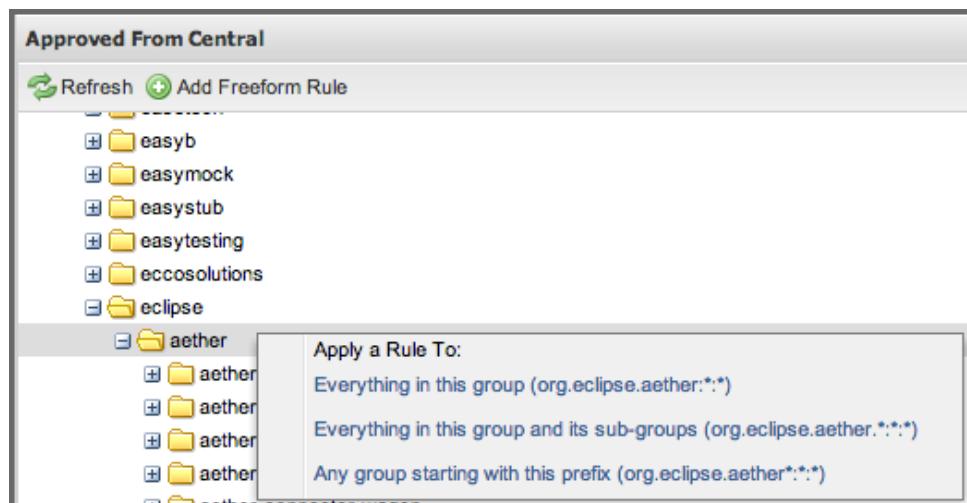


Figure 10.10. Applying a Rule to a Component Folder for org/eclipse/aether

In this dialog, we are deciding to configure a rule for everything within the group and its sub groups that display the rule configuration dialog displayed in *Figure 10.11, “Approving org.eclipse.aether Components”*. The dialog to add rules allows you to select the available rule, e.g., a Forced Approve/Deny Rule, and configure the rule properties. The displayed dialog approves all components Eclipse Aether components.

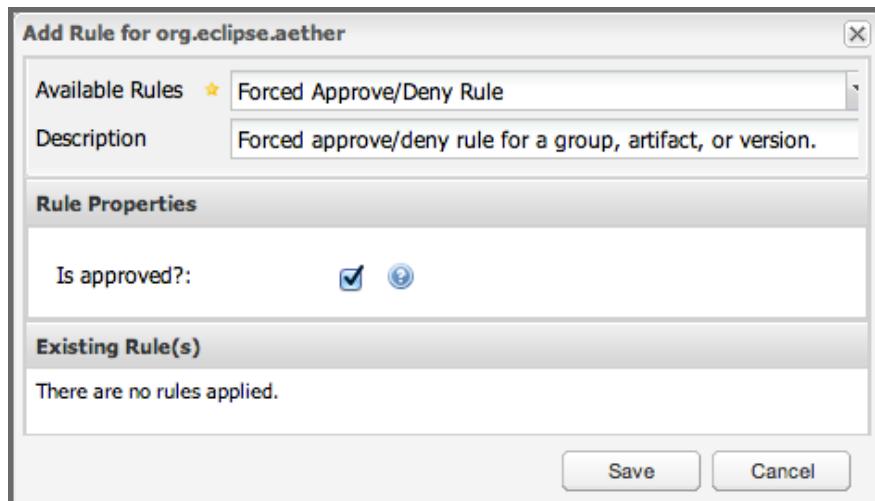


Figure 10.11. Approving org.eclipse.aether Components

By right-clicking on the top level folder of the repository, as displayed in *Figure 10.12, “Accessing the Global Repository Configuration”*, you can configure rules for the complete repository as well as access all configured rules via the Applied Rules option.



Figure 10.12. Accessing the Global Repository Configuration

This allows you to set up a global rule, like blocking all components from the repository. Once you have configured this you can then selectively allow specific versions of a component. *Figure 10.13, “Procurement Configurations Options for a Specific Component Version”* displays the options available for configuring rules for a specific component version of the Apache Commons Collections component.

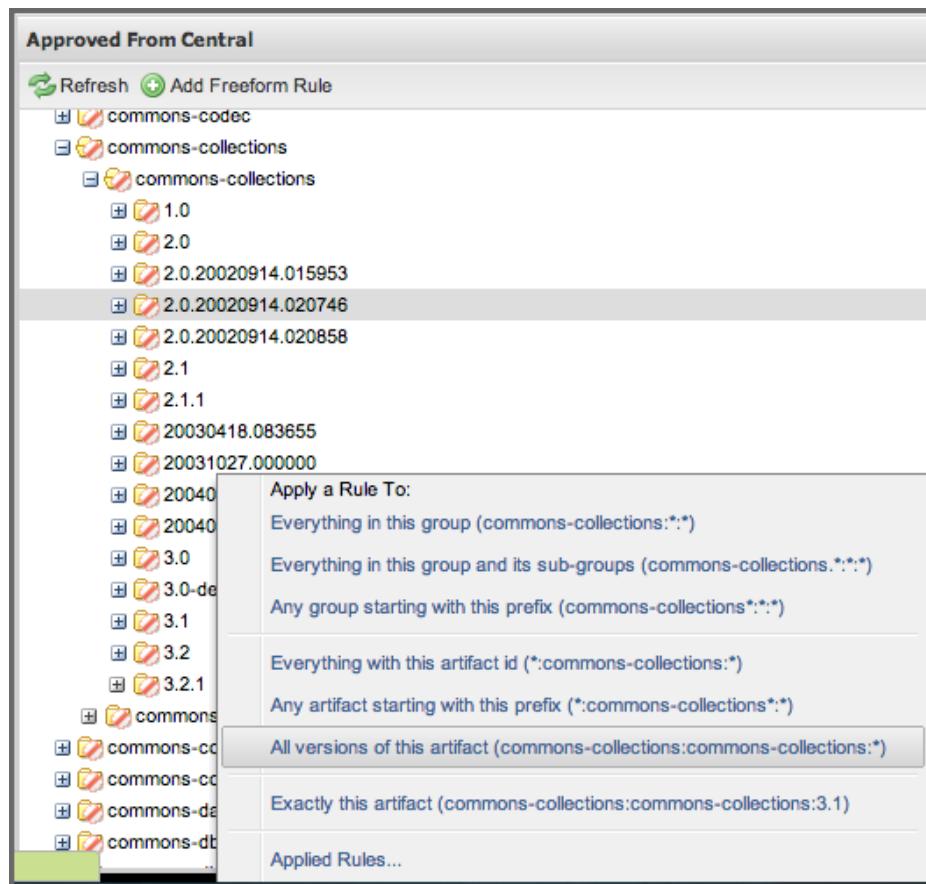


Figure 10.13. Procurement Configurations Options for a Specific Component Version

Once you approve a specific version, the tree view will change the icons for the component displaying green checkmarks for approved components and red cross lines for denied components as visible in *Figure 10.14, “Procurement Repository Tree View with Rule Visualization”*. The icons are updated for signature validation rule violations, if applicable, showing a yellow icon.

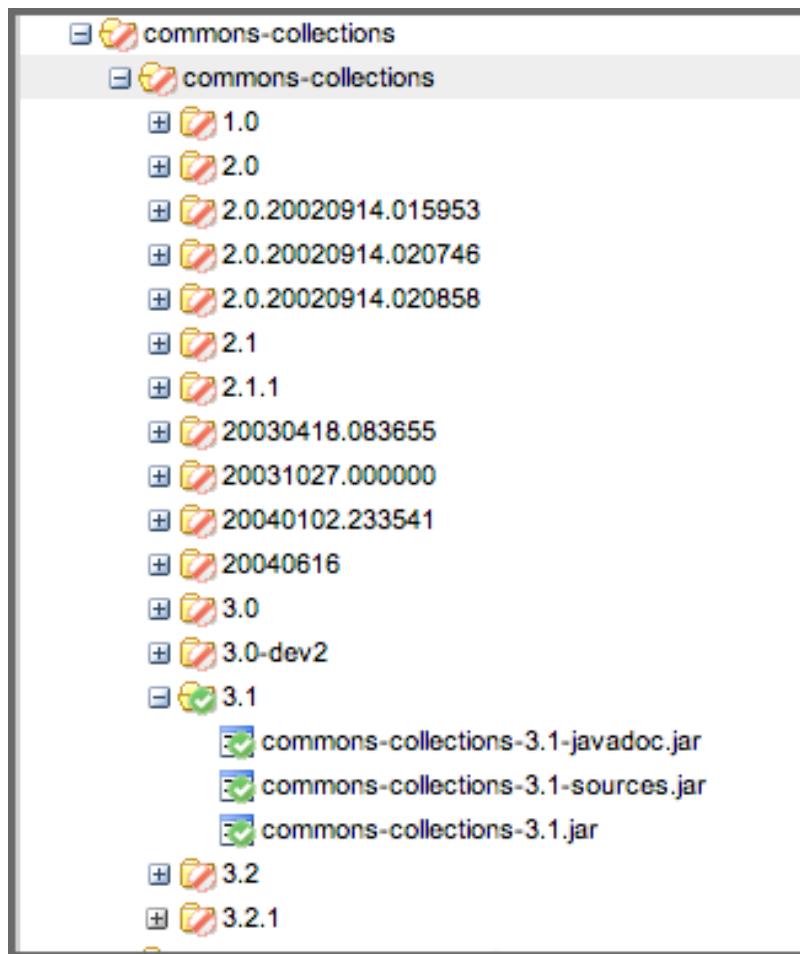


Figure 10.14. Procurement Repository Tree View with Rule Visualization

An example dialog of *Applied Rules* for the complete repository is visible in *Figure 10.15, “Applied Rules for the Complete Procurement Repository”*. This repository currently denies access to all components, only approving components within *org/apache/maven* and *org/eclipse/aether*.

This dialog gives the procurement administrator a fine-grained view into the rules that apply to the complete repository. A view of all *Applied Rules* for a specific repository folder can be accessed by right-clicking on the folder and selecting *Applied Rules*. The dialog allows you to remove specific rules or all rules as well.

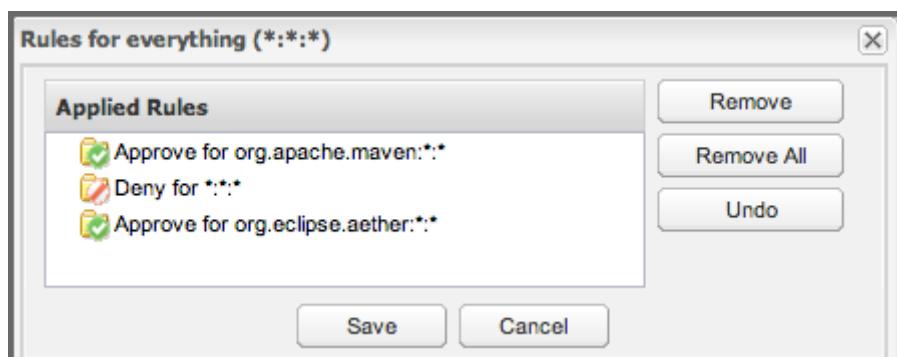


Figure 10.15. Applied Rules for the Complete Procurement Repository

The *Refresh* button above the tree view of a repository tree view allows you to update the tree view and to see all of the applied rules. The *Add Freeform Rule* button allows you to display the dialog to manually configure a procurement rule displayed in *Figure 10.16, “Adding a Freeform Rule”*. This is especially useful if the tree view is not complete due to a missing repository index or if you have detailed knowledge of the component to which you want to apply a rule. The format for entering a specific component in the *Enter a GAV* input field is the short form for a Maven component coordinate using the groupId, artifactId and version separated by `:`. The `*` character can be used as a wildcard for a complete coordinate.



Figure 10.16. Adding a Freeform Rule

Examples for freeform rule coordinates are:

:::

matches any component in the complete repository

org.apache.ant:*:*

matches any component with the groupId `org.apache.ant` located in `org/apache/ant`

org.apache.ant.*:::*

matches any component with the groupId `org.apache.ant` located in `org/apache/ant` as well as any sub-groups e.g., `org.apache.ant.ant`

These coordinates are displayed in the Maven build output log when retrieving a component fails. You can see them as part of the error message with the addition of the packaging type. It is therefore possible to cut and paste the respective coordinates from the build output and insert them into a freeform rule. Once you have done that you can kick off the build again, potentially forcing downloads with the option `-U` and continue procurement configuration for further components.

Stopping Procurement

Some organizations may want to lock down the components that a release build can depend upon. It is also a good idea to make sure that your build isn't going to be affected by changes to a repository not under your control. A procurement administrator can configure a procured repository, start procurement, and run an enterprise build against the repository to populate the procured, hosted repository with all of the necessary components. After this process, the procurement administrator can stop procurement and continue to run the same release build against the hosted repository that now contains all of the procured components while being a completely static repository.

To stop procurement, go to the procurement management interface by clicking on *Artifact Procurement* under the *Enterprise* section of the menu. Right-click on the repository and choose *Stop Procurement* as shown in *Figure 10.17, "Stopping Procurement for a Procured Repository"*.

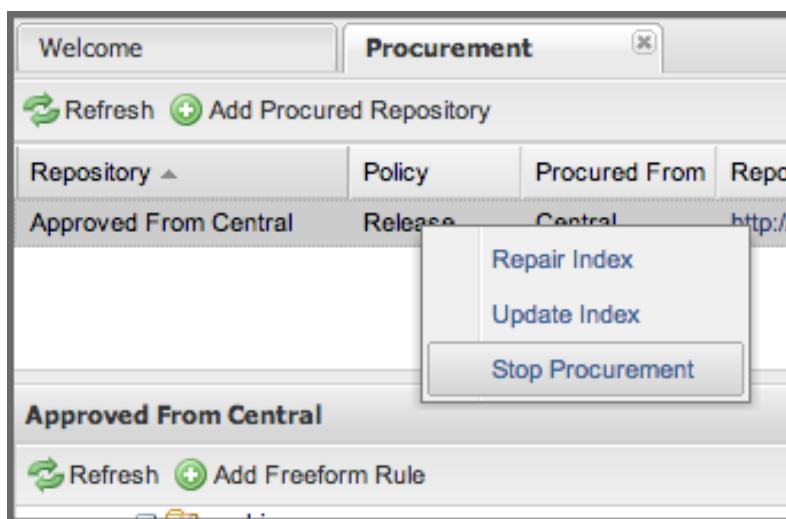


Figure 10.17. Stopping Procurement for a Procured Repository

After choosing *Stop Procurement*, you will then see a dialog confirming your decision to stop procurement. Once procurement is stopped, the procured repository will revert back to being a hosted repository.

In order to add further components, you create a procurement repository off the hosted repository as you did initially. If the repository contains components already, activating procurement will automatically generate rules that allow all components already within the repository.

Staging Releases

 **Available in Nexus Repository Pro only**

If you release software, you will often need to test a release before deploying it to a production system or an externally accessible repository. For example, if you are developing a large, enterprise web application, you may want to stage a release candidate to a staging system and perform a series of rigorous tests before a release manager makes a decision to either return a system to development or deploy a system to production.

The staging suite in Nexus Repository Manager Pro allows an organization to create a temporary staging repository and to manage the promotion of components from a staging repository to a release repository. This ability to create an isolated, release candidate repository that can be discarded or promoted makes it possible to support the decisions that go into certifying a release, while the certification process is done on the same binaries that will ultimately be released.

Topics in this section:

- [Staging Overview](#)(see page 381)
- [Configuring the Staging Suite](#)(see page 383)
- [Configuring Your Project for Deployment](#)(see page 393)
- [Managing Staging Repositories](#)(see page 410)
- [Enforcing Standards for Deployment and Promotion with Rulesets](#)(see page 421)
- [Policy Enforcement with Nexus IQ Server](#)(see page 424)
- [Artifact Bundles](#)(see page 425)

Staging Overview

Releasing Software without a Staging Repository

Without the staging suite, when a developer deploys a component to a hosted repository such as the release repository, this component is published and immediately made available, having no oversight, no process, and no certification process. There is no chance to test the component before writing the component to a hosted repository. If there is a mistake in the release, often the only option available is to republish the components to the release repository or deploy a new version of the components.

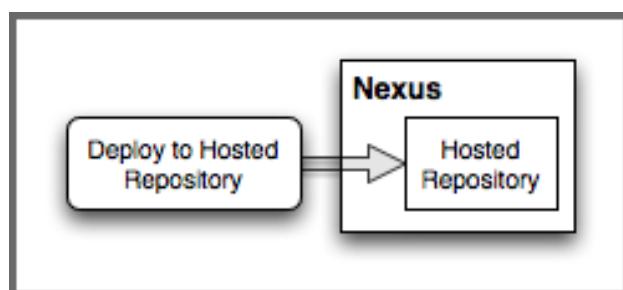


Figure 11.1. Release Deployment Without the Nexus Staging Suite

While this is acceptable for some users, organizations and enterprises with a QA cycle often need a temporary storage for potential release candidates: a staging repository. With the staging suite, an organization can automatically stage releases to a temporary repository that can then be used to test and certify a set of components, before they are published to a final release repository. This temporary repository can then be promoted as a whole or dropped, depending on the results of testing. When used, the binary components being tested and certified are the identical components that will ultimately be released. You will not have a clean fresh build kicked off after the certification finished, as is often the case without a staging suite being used.

How the Staging Suite Works

Here's how staging works in Nexus Repository Manager Pro:

1. A developer deploys a component (or a set of components) to Nexus Repository Manager Pro.
2. The staging suite intercepts this deployment and determines if the deployment matches for a staging profile.
3. If a match is found, a temporary staging repository is created and the components are deployed to this repository.
4. Once the developer has deployed a set of components, they will then "Close" the staging repository.
5. The Staging Suite will then add this temporary staging repository to one or more Target Repository Groups.

Once the staging repository is closed and has been added to a target repository group, the components in the staging repository are available to users for testing and certification via a repository group. Tests can be performed on the components as if they were already published in a hosted repository. At this point different actions can be performed with the staging repository:

Release

A user can "release" a staging repository and select a hosted repository to publish the chosen components. Releasing the contents of a repository publishes all components from the staging repository to a hosted repository and deletes the temporary staging repository.

Drop

A user can "drop" a staging repository. Dropping a staging repository will remove it from any groups and delete the temporary staging repository.

Promote

If your repository manager contains *Build Promotion* profiles, you will also see an option to "promote" a staging repository to a *Build Promotion Group*. When you promote a staging repository you expose the contents of that staging repository via additional groups. *Build Promotion* profiles are explained in [Configuring the Staging Suite](#)(see page 383).

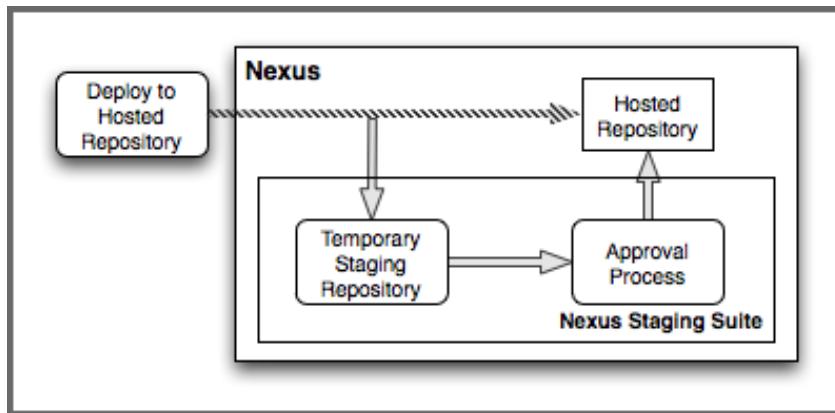


Figure 11.2. Release Deployment with the Staging Suite

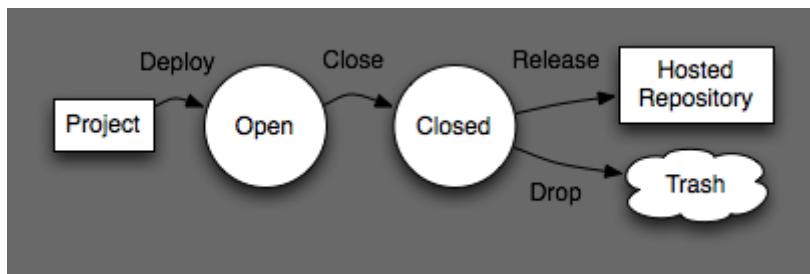


Figure 11.3. The Stages of a Staging Repository Starting with Deployment and Ending with a Release or a Drop of the Repository

Configuring the Staging Suite

Overview

The Staging Suite is part of the default Nexus Repository Manager Pro install and is accessible with the menu items *Staging Profiles*, *Staging Repositories*, *Staging Ruleset*, and *Staging Upload* options in the left-hand navigation menu of the user interface called *Build Promotion*.

Staging Profiles define the rules by which component deployments from your project are intercepted by the repository manager and staged in *Staging Repositories*.

Staging Repositories are dynamically created by the repository manager as they are needed. They are temporary holding repositories for your components that are used for the different staging related steps. Using them in the user interface, users can promote the contents of the staging repository to a hosted repository, discard them, and perform other tasks.

Staging Rulesets allow you to define rules that the components being deployed have to follow in order to allow successful deployment.

Staging Upload allows you to manually upload components via the user interface rather than by using your build system.

Configuring a Staging Profile

Staging Profiles control the process by which components are selected for staging. When you define a profile, you are defining a set of rules which will control the way in that the repository manager intercepts a component deployment and what actions to perform during and after staging the components. When you click on *Staging Profiles* in the main menu, you will see a list of configured staging profiles. This list allows you to *Add...* and *Delete* staging profiles. Click on an existing staging profile in the list and the panel below the list will display the configuration of the profile.

The list of staging profiles displayed also determines the order in which the profiles are examined when a component is deployed to staging. Going down the list each profile is checked for a match of the deployed component characteristics to the configuration of the profile. If a match is found a staging repository for this profile with the deployed components is created. Otherwise the next profile in the list is examined.

Specifically with implicit matching criteria being used for your deployments as explained in more detail below, this order becomes important and can be controlled by selecting a staging profile and using the *Move Up* and *Move Down* buttons on the top of the list. Once you have created the desired order, press the *Save Order* button and confirm the order in the dialog.

Clicking on *Add...* will display the drop-down menu shown in *Figure 11.4, “Adding a Staging Profile”*.


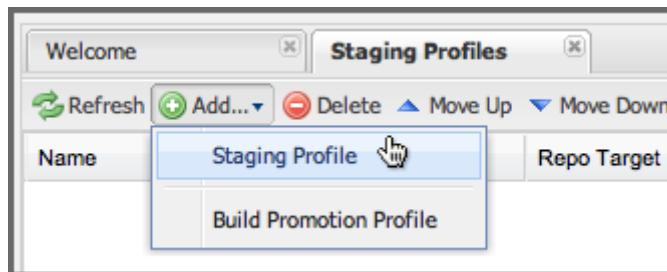


Figure 11.4. Adding a Staging Profile

Selecting *Staging Profiles* will create a new staging profile and display the form shown in *Figure 11.5, “Creating a New Staging Profile”*.

Figure 11.5, “Creating a New Staging Profile” defines a staging profile named `Test`. It is configured to only intercept explicit deployments in the Profile Selection Strategy using the Profile ID and the Nexus Staging Maven Plugin. It uses the template `Maven2 (hosted, release)` for newly created temporary staging repositories, and it will automatically add closed staging repositories to the Public Repositories group. In addition, it is configured to verify the deployment against the rules defined in Nexus IQ Server for the CLM Application Id `bom1-12345678`.

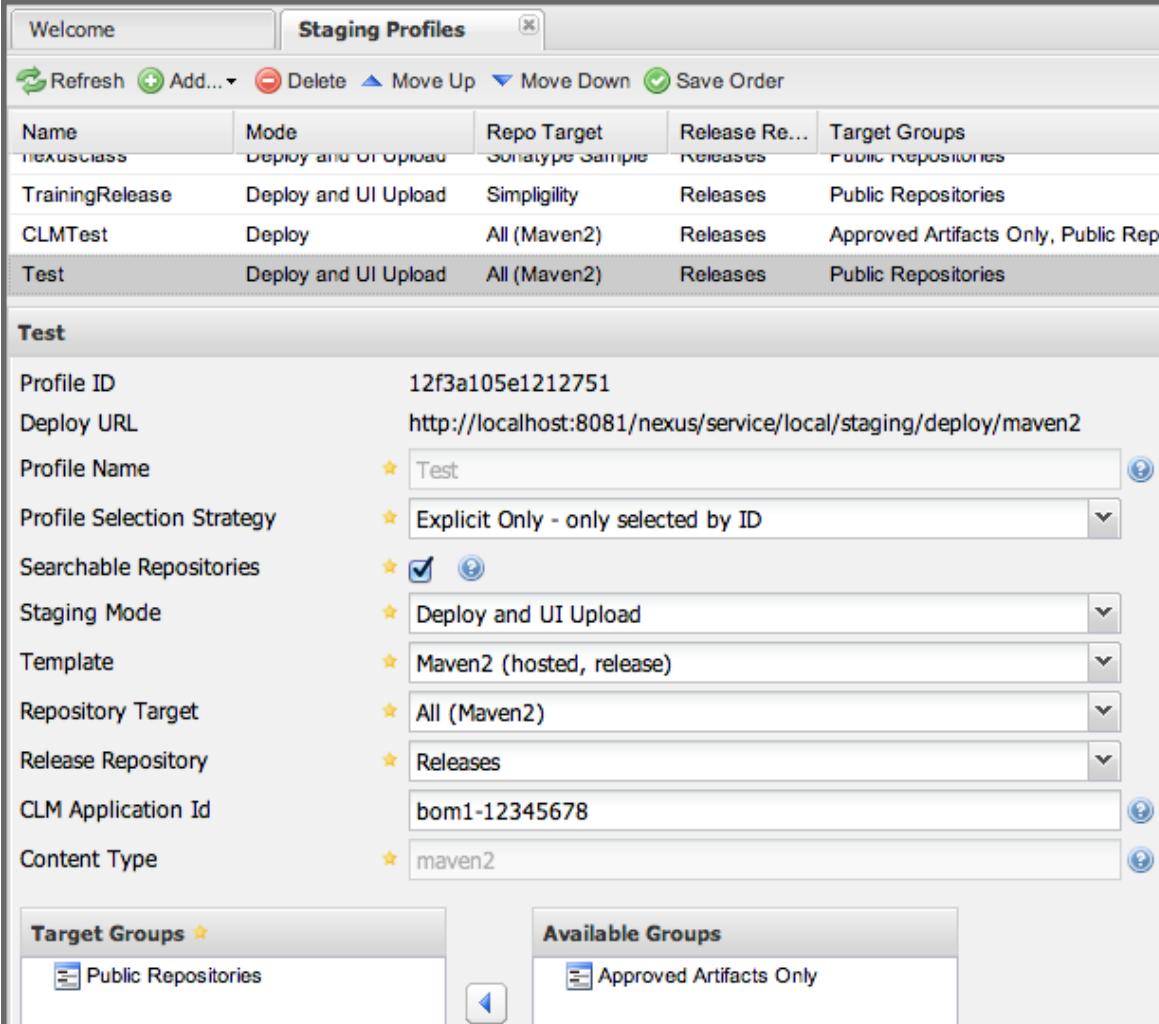

| Name | Mode | Repo Target | Release Re... | Target Groups |
|-----------------|----------------------|--------------|---------------|--------------------------------------|
| TrainingRelease | Deploy and UI Upload | Simpligility | Releases | Public Repositories |
| CLMTest | Deploy | All (Maven2) | Releases | Approved Artifacts Only, Public Repo |
| Test | Deploy and UI Upload | All (Maven2) | Releases | Public Repositories |

Test

| | |
|----------------------------|---|
| Profile ID | 12f3a105e1212751 |
| Deploy URL | http://localhost:8081/nexus/service/local/staging/deploy/maven2 |
| Profile Name | ★ Test |
| Profile Selection Strategy | ★ Explicit Only - only selected by ID |
| Searchable Repositories | ★ <input checked="" type="checkbox"/> |
| Staging Mode | ★ Deploy and UI Upload |
| Template | ★ Maven2 (hosted, release) |
| Repository Target | ★ All (Maven2) |
| Release Repository | ★ Releases |
| CLM Application Id | bom1-12345678 |
| Content Type | ★ maven2 |

Target Groups ★

- Public Repositories

Available Groups

- Approved Artifacts Only

Figure 11.5. Creating a New Staging Profile

The form allows you to configure a profile with the following fields:

Profile ID and Deploy URL

These two fields are displayed as "read only" once a profile has been created. The *Profile ID* displays the unique identifier that can be used for staging to this repository using the Nexus Staging Maven plugin. The *Deploy URL* displays the generic staging URL that can be used with the default Maven Deploy Plugin together with the *Repository Target* configuration to intercept the deployment and move the components into the Staging Suite instead.

Profile Name

The name of the staging profile. This can be an arbitrary value. It is simply a convenience for the Administrator, and it is also used to create roles that are used to grant permissions to view and manipulate staging repositories created by this profile.

Profile Selection Strategy

Select the strategy used by the repository manager to select this staging profile. Explicit or Implicit is the default behavior and causes the repository manager to select the profile by the provided staging profile identifier and to fall back to an automatic determination, if none is provided. It is necessary to be used with the Maven deploy plugin and the correct staging profile is determined using repository targets together with the generic deploy URL.

When using the Nexus Staging Maven plugin for deployments, and therefore an explicitly defined staging profile in the project POM, the setting should be changed to *Explicit Only*. This will prevent the profile from implicitly capturing a deployment in this repository due to the matching defined and allow the repository manager to ensure that the deployment reaches the staging profile with the configured staging profile ID, even if the default matching and staging profile order could potentially cause a deployment to end up in a different profile.

Searchable Repositories

The default value of enabling this feature will cause any new components in this staging profile to be added to the indexes and therefore be available in search queries. Disable this feature to "hide" components in staging.

Staging Mode

This field contains the options *Deploy*, *UI Upload*, and *Deploy and UI Upload*. This controls how components can be staged to this staging profile. If *Deploy* is selected, components can only be deployed using Maven to upload build components. If *UI Upload* is selected, users can upload components using the user interface.

Template

Defines the template for the format of the temporary staging repositories created by this staging profile. The current version of Nexus Repository Manager Pro provides the option *Maven2 (hosted, release)* only. Additional templates can be supplied by plugins that enable staging for other repository types. An example for such a plugin is the Nexus Yum Plugin.

Repository Target

When a developer deploys a component to the generic *Deploy URL*, the Staging Suite will check to see if the component matches the patterns defined in this Repository Target. The repository target defines the "trigger" for the creation of a staging repository from this staging profile and is only needed for implicit deployments with the Deploy URL and not for explicit deployments using the Profile ID.

Release Repository

Staged components are stored in a temporary staging repository that is made available via *Target Groups*. Once a staged deployment has been successfully tested, components contained in the temporary staging repository are promoted to a hosted repository as their final storage place. The *Release Repository* setting configures this target release repository for this staging profile.

CLM Application Id

Configure the application identifier defined in the Nexus IQ Server to allow to use of the rules defined there for staging. More details can be found in [Section 11.6, “Policy Enforcement with Nexus IQ Server”](#).

Content Type

The repository manager can create staging repositories for repositories of type *Maven2*. This value is automatically selected based on the chosen template.

Target Groups

When a *Staging Repository* is closed and is made available to users and developers involved in the testing process, the temporary *Staging Repository* is added to one or more *Repository Groups*. This field defines those groups. It is a best practice to create a separate group, different from the group typically used for development like the default *Public Repositories* group for staging. This prevents the staged components from leaking to all users and allows you to control access to them via security settings for the separate repository group. In many cases multiple target groups can be useful for different user groups to have access.

Close Repository Notification Settings

After a developer has deployed a set of related release components, a staging repository is closed . This means that no further components can be deployed to the same staging repository. A repository would be closed when a developer is satisfied that a collection of staged components is ready to be certified by a manager or a quality assurance resource. In this setting, it is possible to define email addresses and roles that should be notified of a staging repository being closed. A notification email will be sent to all specified email addresses, as well as all users in the specified roles, informing them that a staging repository has been closed. It is also possible to select that the creator of the staging repository receives this notification.

Promote Repository Notification Settings

Once a closed staging repository has been certified by whomever is responsible for testing and checking a staged release, it can then be promoted (published) or dropped (discarded). In this setting, it is possible to define the email addresses and security roles that should be notified of a staging repository being promoted. A notification email will be sent to all specified email addresses, as well as all users in the specified roles, informing them that a staging repository has been promoted. It is also possible to select that the creator of the staging repository receives this notification.

Drop Repository Notification Settings

In this setting, it is possible to define email addresses and roles notified when a staging repository is being dropped. A notification email will be sent to all specified email addresses, as well as all users in the specified roles, informing them that a staging repository has been dropped. It is also possible to select that the creator of the staging repository receives this notification.

Close Repository Staging Rulesets

This defines the rulesets applied to a staging repository before it can be closed. If the staging repository does not pass the rules defined in the specified rulesets, you will be unable to close it. For more information about rulesets, see [Enforcing Standards for Deployment and Promotion with Rulesets](#).

Promote Repository Staging Rulesets

This defines the rulesets applied to a staging repository on promotion. If the staging repository does not pass the rules defined in the specified rulesets, the promotion will fail with an error message supplied by the failing rule. For more information about rulesets, see [Enforcing Standards for Deployment and Promotion with Rulesets](#).

Configuring Build Promotion Profiles

A build promotion profile is used when you need to add an additional step between initial staging and final release. To add a new *Build Promotion* profile, open the *Staging Profiles* link from the main menu and click on *Add...* to display the drop-down menu shown in *Figure 11.6, “Multilevel Staging and Build Promotion”*.

Select *Build Promotion Profile* from this drop-down to create a new build promotion profile:

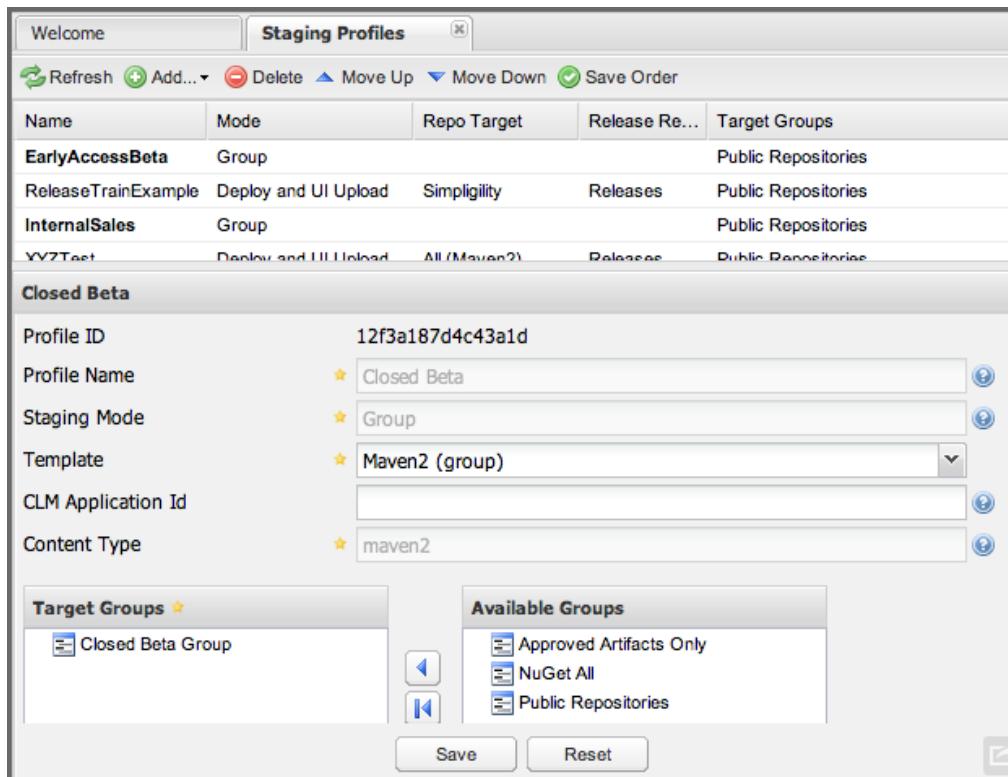


Figure 11.6. Multilevel Staging and Build Promotion

After creating a new build promotion profile, you will see the form shown in *Figure 11.7, “Configuring a Build Promotion Profile”*. This form contains the following configuration fields:

Profile Name

The name for the build promotion profile displayed in the promotion dialog and associated with repositories created from this promotion profile.

Template

The template for repositories generated by this build promotion profile. The default value for this field is *Maven2 (group)*.

Target Groups

The *Target Groups* field is the most important configuration field for a build promotion profile, as it controls the group through which promoted components are made available. Components can be made available through one or more groups.

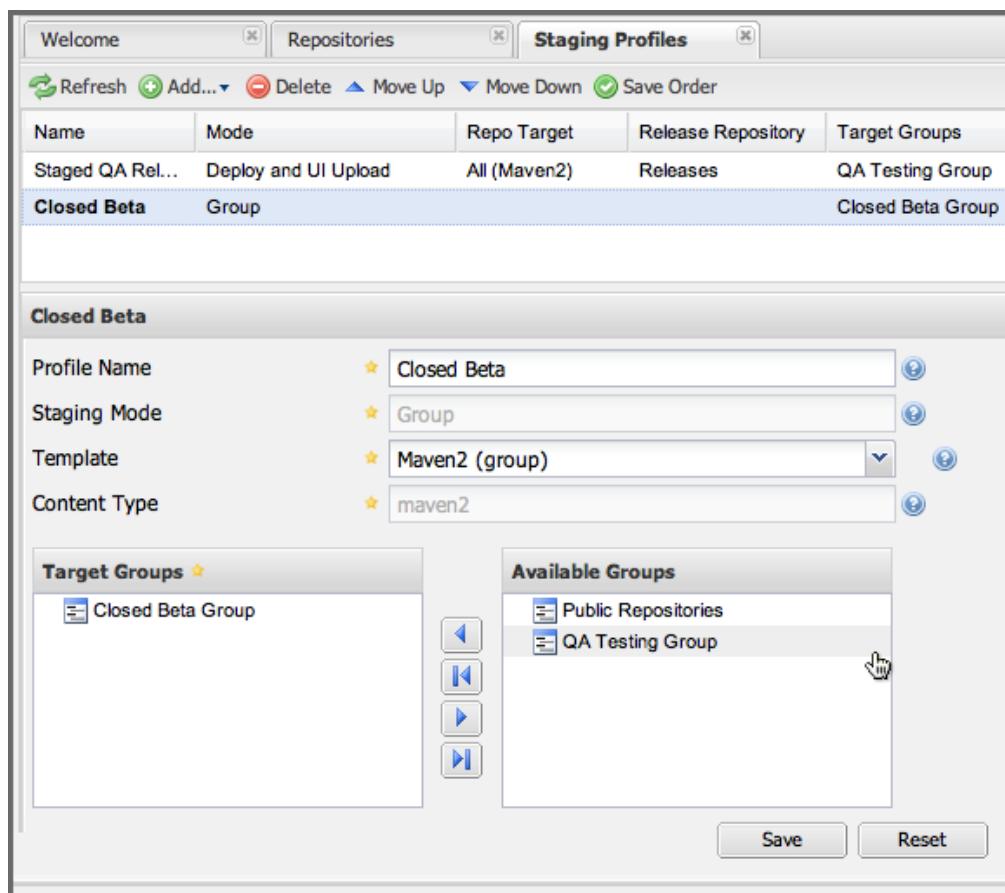


Figure 11.7. Configuring a Build Promotion Profile

Staging Related Security Setup

Staging Suite is controlled by three roles:

- *Staging: Deployer*
- *Staging: Promoter*
- *Staging: Repositories*

These roles are available as general admin roles that apply to all staging profiles with the respective access. When you create a new staging profile, the repository manager will create new roles that grant permissions specific to that staging profile. If you created the staging profile named *Test*, the repository manager created the three new and profile-specific roles:

Staging: Repositories (Test)

This role grants a user read and view access to the staging repositories created by the *Test* staging profile.

Staging: Deployer (Test)


This role grants all of the privileges from the *Staging: Repositories* role and, in addition, grants the user permission to deploy components, close and drop any staging repository created by the *Test* staging profile.

Staging: Promoter (Test)

This role grants the user the right to promote staging repositories created by the *Test* staging profile.

To perform a staged deployment, the user deploying the component must have the *Staging: Deployer (admin)* role or the *Staging: Deployer* role for a specific staging profile.

To configure the deployment user with the appropriate staging role, click on *Users* under the *Security* menu in the menu. Once you see the *Users* panel, click on the deployment user to edit this user's roles. Click on the *Add* button in the *Role Management* section of the *Config* tab visible in *Figure 11.8, “Adding a Role to a User”* for the user to be able to add new roles to the user.

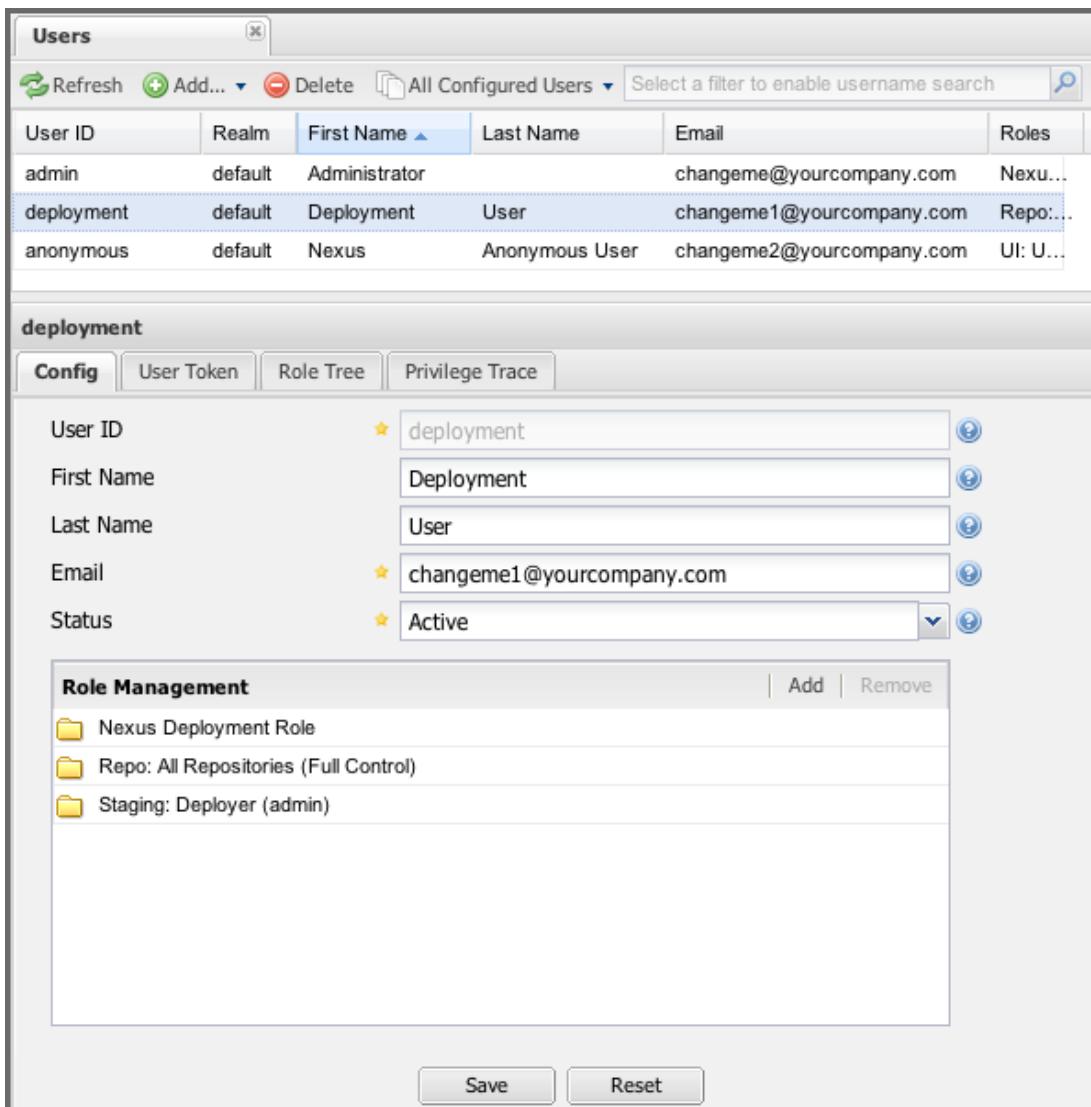

The screenshot shows the 'Users' management screen in Nexus Repository Manager 2. At the top, there's a toolbar with 'Refresh', 'Add...', 'Delete', 'All Configured Users', and a search bar. Below the toolbar is a table listing users:

| User ID | Realm | First Name | Last Name | Email | Roles |
|------------|---------|---------------|----------------|---------------------------|----------|
| admin | default | Administrator | | changeme@yourcompany.com | Nexu... |
| deployment | default | Deployment | User | changeme1@yourcompany.com | Repo:... |
| anonymous | default | Nexus | Anonymous User | changeme2@yourcompany.com | UI: U... |

The 'deployment' user is selected and shown in the details view below. The 'Config' tab is active, displaying the user's information:

- User ID: deployment
- First Name: Deployment
- Last Name: User
- Email: changeme1@yourcompany.com
- Status: Active

The 'Role Management' section shows available roles:

- Nexus Deployment Role
- Repo: All Repositories (Full Control)
- Staging: Deployer (admin)

At the bottom are 'Save' and 'Reset' buttons.

Figure 11.8. Adding a Role to a User

Use the *Filter* section with the keyword *Staging* and press the *Apply Filter* button to see all available staging-related roles as displayed in *Figure 11.8, “Adding a Role to a User”*.

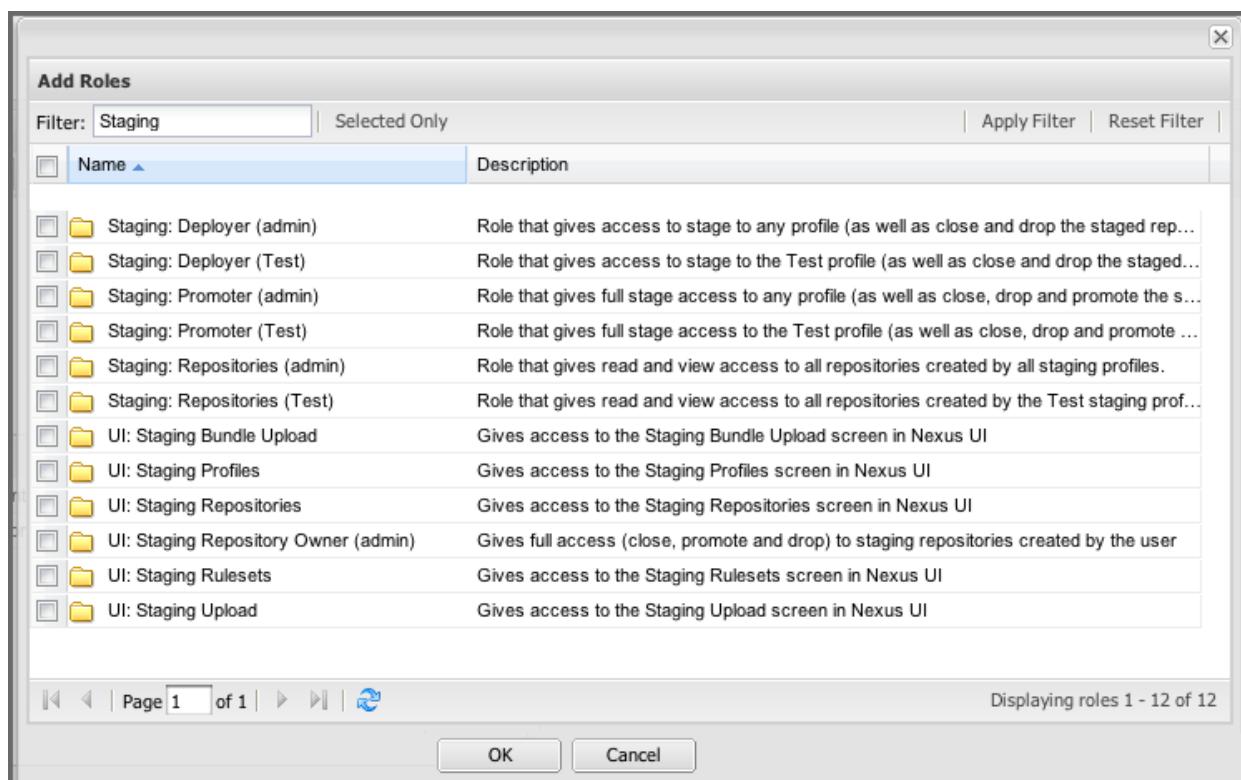


Figure 11.9. Available Roles for Staging with a Test Staging Profile

You should see the "Staging: Deployer (admin)" role listed as well as the *Test* staging profile-specific role, the promoter and repositories ones for admin and *Test* and a few staging user interface related roles. These roles are required if interaction with the staging suite in the user interface is desired and allow you to control the details about this access. If you need to add a specific permission to activate a single *Staging Profile*, you would select that specific role.

Once the deployment user has the "Staging: Deployer (admin)" role, you can then use this user to deploy to the staging URL and trigger any staging profile. Without this permission, the deployment user would not be able to publish a staged component.

In a similar fashion, you can assign the promoter role to users.

In addition to the roles created a number of specific privileges is available to further customize the access to the staging suite:

Staging Profiles

Allows control of create, read, delete and update operations on staging profiles.

Staging Repository: test-001

There are separate privileges for each staging repository allowing create, read, update and delete operations are generated automatically.

Staging: All Profiles, Owner All Profiles and Profile xyz

These staging profile specific-privileges can be granted for drop, promote, read and finish operations.

Staging: Rule Set and Staging: Rule Types

Control access to staging rules and rule types.

Staging: Upload

Controls access to the manual staging upload user interface.

Staging: Repositories, Promote Repository, Profile Ordering, Close Staging and others

A number of application user interface-specific privileges allow fine-grained control over access in the user interface.

Using Repository Targets for Staging

The Staging Suite intercepts deployments using Repository Targets as documented in [Managing Repository Targets\(see page 311\)](#) when using implicit matching as a profile selection strategy, based on the components path in the repository.

For example, if you wanted to intercept all deployments to the com.sonatype.sample groupId, you would create a repository target with a pattern with a regular expression of ^/com/sonatype/sample/.+ and use that repository target in your *Staging Profile* configuration.

Configuring Your Project for Deployment

Once the repository manager is configured to receive components in the staging suite as documented in [Configuring the Staging Suite\(see page 383\)](#), you will have to update your project build configuration to deploy to the staging suite.

The preferred way to do this is to take advantage of the features provided by the Nexus Staging Maven plugin or the Nexus Staging Ant tasks as documented in [Deployment with the Nexus Staging Maven Plugin\(see page 393\)](#) and [Deployment with the Nexus Staging Ant Tasks\(see page 404\)](#).

If you need to continue to use the Maven Deploy plugin, you can read about using it with the staging suite in [Deployment with the Maven Deploy Plugin\(see page 393\)](#).

With all tools you can use the manual upload of your components documented in [Manually Uploading a Staged Deployment\(see page 393\)](#).

Deployment with the Nexus Staging Maven Plugin

The Nexus Staging Maven plugin is a specific and more powerful replacement for the Maven Deploy plugin with a number of features specifically geared towards usage with the staging suite. The simplest usage can be configured by adding it to the project build plugins section as an extension:

```
<build>
  <plugins>
    <plugin>
      <groupId>org.sonatype.plugins</groupId>
      <artifactId>nexus-staging-maven-plugin</artifactId>
      <version>1.6.6</version>
      <extensions>true</extensions>
      <configuration>
        <serverId>nexus</serverId>
        <nexusUrl>http://localhost:8081/nexus/</nexusUrl>
      </configuration>
    </plugin>
  </plugins>
</build>
```

⚠ It is important to use a version of the plugin that is compatible with your Nexus Repository Manager Pro server. Version 1.2 is compatible with Nexus Repository Manager Pro 2.3, Version 1.4.4 is compatible with Nexus Repository Manager Pro 2.4, Version 1.4.8 is compatible with Nexus Repository Manager Pro 2.5 and 2.6. 1.5 and 1.6.x can be used for Nexus Repository Manager Pro 2.7 to 2.10. The latest version of the plugin available is always compatible with the latest available version of Nexus Repository Manager Pro. Try to use the newest possible plugin version to take advantage of any available improvements.

Following Maven best practices, the version should be pulled out into a `pluginManagement` section in a company POM or parent POM.

This configuration works only in Maven 3 and automatically replaces the `deploy` goal invocation of the Maven Deploy plugin in the `deploy` Maven life cycle phase with the `deploy` goal invocation of the Nexus staging Maven plugin.

The minimal required configuration parameters for the Nexus Staging Maven plugin are:

serverId

The `id` of the `server` element in `settings.xml` from which the user credentials for accessing the repository manager should be retrieved.

nexusUrl

The base URL at which the repository manager to be used for staging is available.

With this configuration the Nexus Staging Maven plugin will stage the components locally and connect to the repository manager. It will try to determine the appropriate staging profile by matching the component path with any repository targets configured with staging profiles with an activated implicit profile selection strategy. If an appropriate staging profile is found, a staging repository is created on the fly and the components are deployed into it. If no profile is found, the upload will fail.

To successfully deploy to your repository manager, you will need to update your Maven Settings with the credentials for the deployment user. These credentials are stored in the Maven Settings file in `~/.m2/settings.xml`.

To add these credentials, add the following element to the servers element in your `~/.m2/settings.xml` file as shown below:

Listing deployment credentials in Maven Settings

```
<settings>
  ...
  <servers>
    ...
    <server>
      <id>nexus</id>
      <username>deployment</username>
      <password>deployment123</password>
    </server>
  </servers>
  ...
</settings>
```

Note that the server identifier listed in Listing deployment credentials in Maven Settings should match the `serverId` parameter you are passing to the Nexus Staging Maven plugin and in the example contains the default password for the deployment user - "deployment123". You should change this password to match the deployment password for your repository manager.

If more control is desired over when the plugins deploy goal is activated or if Maven 2 is used, you have to explicitly deactivate the Maven Deploy plugin and replace the Maven Deploy plugin invocation with the Nexus Staging Maven plugin shown in the example below:

Usage of Nexus Staging Maven Plugin for Maven 2

```
<build>
  <plugins>
    <plugin>
      <groupId>org.apache.maven.plugins</groupId>
      <artifactId>maven-deploy-plugin</artifactId>
      <configuration>
        <skip>true</skip>
      </configuration>
    </plugin>
    <plugin>
      <groupId>org.sonatype.plugins</groupId>
      <artifactId>nexus-staging-maven-plugin</artifactId>
      <executions>
        <execution>
          <id>default-deploy</id>
          <phase>deploy</phase>
          <goals>
            <goal>deploy</goal>
          </goals>
        </execution>
      </executions>
      <configuration>
        <serverId>nexus</serverId>
        <nexusUrl>http://localhost:8081/nexus/</nexusUrl>
        <!-- explicit matching using the staging profile id -->
        <stagingProfileId>129341e09fzee275</stagingProfileId>
      </configuration>
    </plugin>
  ...

```

The implicit matching relies on the setup of repository targets as well as the correct order of staging profiles and is therefore an error prone approach when many staging profiles are in use.

The preferred way to work in this scenario is to change the profile selection strategy on all staging profiles to explicit only and pass the staging profile ID to the Nexus Staging Maven plugin using the `stagingProfileId` configuration parameter as documented above. A full example `pom.xml` for deployment of snapshot as well as release builds with the Nexus Staging Maven plugin using explicit matching for the staging profile and locally staged builds and atomic uploads is available in the example `pom.xml` for Nexus Staging Maven Plugin below:

Full example pom.xml for Nexus Staging Maven Plugin usage

```
<project>
  <modelVersion>4.0.0</modelVersion>

  <groupId>com.sonatype.training.nxs301</groupId>
  <artifactId>explicit-staging-example</artifactId>
  <version>1.0.0</version>

  <distributionManagement>
    <snapshotRepository>
      <id>nexus-snapshots</id>
      <url>http://localhost:8081/nexus/content/repositories/snapshots</url>
    </snapshotRepository>
  </distributionManagement>

  <build>
    <plugins>
      <plugin>
        <groupId>org.sonatype.plugins</groupId>
        <artifactId>nexus-staging-maven-plugin</artifactId>
        <version>1.6.3</version>
        <extensions>true</extensions>
        <configuration>
          <serverId>nexus-releases</serverId>
          <nexusUrl>http://localhost:8081/nexus/</nexusUrl>
          <!-- update this to the correct id! -->
          <stagingProfileId>1296f79efe04a4d0</stagingProfileId>
        </configuration>
      </plugin>
    </plugins>
  </build>
</project>
```

In order to deploy project components with the above setup you would invoke a build with `mvn clean deploy`.

The build will locally stage the components for deployment in `target/nexus-staging` on the console and create a closed staging repository holding the build components. This execution of the `deploy` goal of the Nexus Staging Maven plugin performs the following actions:

- Components are staged locally.
- A staging profile is selected either implicitly or explicitly.
- A staging repository is either created on the fly, if needed, or just selected.
- An atomic upload to the staging repository is performed.
- The staging repository is closed (or dropped if upload fails).

The log of a successful deployment would look similar to this:

```
[INFO] --- nexus-staging-maven-plugin:1.1.1:deploy (injected-nexus-deploy) @ staging-example ---
[INFO] Using server credentials with ID="nexus-releases" from Maven settings.
[INFO] Preparing staging against Nexus on URL http://localhost:8081/nexus/
[INFO] * Remote Nexus reported itself as version 2.2.1 and edition "Professional"
[INFO] * Using staging profile ID "12a1656609231352" (matched by Nexus).
[INFO] Staging locally (stagingDirectory=
"/Users/manfred/dev/explicit-staging-example/target/nexus-staging/12a1656609231352")...
Uploading: file: ... explicit-staging-example-1.0.0.jar
Uploaded: file: ... explicit-staging-example-1.0.0.jar (4 KB at 1051.1 KB/sec)
Uploading: file: ... explicit-staging-example-1.0.0.pom
Uploaded: file: ... explicit-staging-example-1.0.0.pom (4 KB at 656.2 KB/sec)
Downloading: file: ...maven-metadata.xml
Uploading: file: ...maven-metadata.xml
Uploaded: file: ... maven-metadata.xml (322 B at 157.2 KB/sec)
[INFO] Staging remotely...
[INFO] Uploading locally staged directory: 12a1656609231352
[INFO] Performing staging against Nexus on URL http://localhost:8081/nexus/
[INFO] * Remote Nexus reported itself as version 2.2.1 and edition "Professional"
[INFO] * Created staging repository with ID "test-002",
applied tags: {javaVersion=1.6.0_37, localUsername=manfred}
[INFO] * Uploading locally staged components to:
http://localhost:8081/nexus/service/local/staging/deployByRepositoryId/test-002
[INFO] * Upload of locally staged components done.
[INFO] * Closing staging repository with ID "test-002".
[INFO] Finished staging against Nexus with success.
```

Failures are accompanied by error reports that reveal further details:

```
[ERROR] Error while trying to close staging repository with ID "test-003".
[ERROR]
[ERROR] Nexus Staging Rules Failure Report
[ERROR] =====
[ERROR]
[ERROR] Repository "Test-003 (u:admin, a:127.0.0.1)" (id=n/a) failures
[ERROR] Rule "RepositoryWritePolicy" failures
[ERROR] * Artifact updating: Repository ='releases:Releases' does
not allow updating
artifact='/com/sonatype/training/nexus/explicit-staging-example/t1.0.0/staging-example-1.0.0.jar'
[ERROR] * Artifact updating: Repository ='releases:Releases' does
not allow updating
artifact='/com/sonatype/training/nexus/explicit-staging-example/1.0.0/staging-example-1.0.0.pom'
[ERROR]
[ERROR]
```

If the configuration parameter `skipStagingRepositoryClose` is set to `true` is passed to the plugin execution, the remote staging repository will not be closed.

Instead of repository manager creating a staging repository based on the implicit or explicit staging profile selection, you can explicitly configure the staging repository to use by providing the staging repository name as value of the `stagingRepositoryId` configuration property via the plugin configuration or command line invocation.

The identifier of a staging repository can be determined by looking at the name column in the list of staging repositories. The name column used the capitalized ID and adds the username and address the staging was deployed from in brackets. For example a name could be Test-003 (u: admin, a: 127.0.0.1). The ID of this staging repository is test-003.

Together with skipping the closing of the repository using `skipStagingRepositoryClose`, it is possible to get multiple builds to deploy to the same staging repository and, therefore, have a number of components go through the staging workflow together. An alternative to this approach would be to create an aggregating project that assembles all components together, e.g., in an assembly and then use this project for staging.

Finally to override all staging, you can define the full repository URL to deploy to with the `deployUrl` configuration parameter. For example, see below:

```
http://localhost:8081/nexus/content/repositories/releases/
```

This would cause any staging to be skipped and a straight upload of the components to the repository to occur.

As part of the configuration section for the plugin you can define tags with arbitrary key and value names. For example, you could create a tag with key `localUsername` and a value of the current user picked up from the `USER` environment variable:

```
...
<configuration>
...
<tags>
  <localUsername>${env.USER}</localUsername>
  <javaVersion>${java.version}</javaVersion>
</tags>
...
```

Once components are released these tags are transformed into attributes stored along the components in the release repository and can be accessed via the REST interface and, therefore, any plugin and user interface integration.

In addition to the above documented configuration options that determine the behavior of the Nexus Staging Maven plugin, further configuration can be provided with the following parameters:

altStagingDirectory

Defaulting to `target/nexus-staging` you can set the property to set a different folder for the local staging.

autoReleaseAfterClose

If you set this flag to `true`, the staging repository will be closed and, following a successful validation of all staging rules including potential Nexus IQ Server-based validation, released. By default this property is set to `false`. Changing it to `true` can be a useful setup for continuous integration server based releases.

description

Allows you to provide a description for the staging repository action (like close or drop) carried out as part of the plugin execution. The description will then be used in any notification just like a description provided in the user interface.

keepStagingRepositoryOnFailure

Setting this flag to true will cause the plugin to skip any clean up operations like dropping a staging repository for failed uploads, by default these clean up operations occur.

keepStagingRepositoryOnCloseRuleFailure

With the default setting of `false`, the Nexus Staging Maven plugin will drop the created staging repository if any staging rule violation occurs. If this flag is set to `true`, it will not drop the staging repository. This allows you to inspect the deployed components in order to figure out why a rule failed causing the staging failure.

skipStagingRepositoryClose

Set this to true to turn off the automatic closing of a staging repository after deployment.

skipNexusStagingDeployMojo

Set to `false` by default, this flag will cause to skip any execution of the deploy goal of the plugin when set to true similar to `maven.deploy.skip`. In multi-module builds the staging of all components is performed in the last module based on the reactor order. If this property is set to true in the module, all staging will be skipped. You have to ensure that this property evaluates as true in the last module of the reactor. If necessary, you can add a dummy module.

skipStaging

Set to `false` by default this flag will cause to skip any execution of the plugin when set to true.

skipRemoteStaging

If this flag is set to true any step related to remote staging will be skipped and only local staging will be performed. The default setting is `false`.

skipLocalStaging

When `true`, bypass all staging specific features. Remote deploys happen inline at deploy phase of each module, not at build end. The deployment repository is "sourced" from `pom.xml <distributionManagement>`. Which distribution repository is used depends on the project having a release or snapshot version. Essentially this option makes the staging plugin execution act like the default maven-deploy-plugin. The default setting is `false`.

stagingProgressTimeoutMinutes

Defaulting to 5 minutes, this configuration allows you to set the timeout for staging operations.

Changes are most often required for complex staging operations involving custom staging rules or Nexus IQ Server integration.

stagingProgressPauseDurationSeconds

The default of 3 seconds can be changed if larger pauses between progress polls for staging operations are desired.

With `skipRemoteStaging` is set to `true`, only the local staging happens. This local staging can then be picked up for the remote staging and closing by running the `deploy-staged` goal of the plugin explicitly like this:

```
mvn nexus-staging:deploy-staged
```

Besides the default `deploy` goal the Nexus Staging Maven plugin supports a number of additional goals. By configuring executions of the goals as part of your POM or manually invoking them further automation of a staged release process can be achieved.

deploy-staged

Perform full staging deployment workflow for a locally staged project, e.g., with the components in `target/nexus-staging`.

deploy-staged-repository

Perform an upload of a repository from the local filesystem to a staging repository.

close

Close the staging repository for current context.

drop

Drop the staging repository for current context.

release

Release the staging repository for current context.

promote

Promote the staging repository for the current context.

Closing, dropping, and releasing the staging repository using the goals relies on content of a local staging folder .

Promoting additionally needs the build promotion profile name passed in via the `buildPromotionProfileId` configuration parameter.

The `deploy-staged-repository` goal can be used to stage a repository. Typically, a local repository is created with an invocation of the `deploy` similar to:

```
mvn deploy -DaltDeploymentRepository=local::default::file://path
```

To deploy this file system repository with the goal, you have to provide the path to this repository with the *repositoryDirectory* parameter as well as *nexusUrl*, *serverId* and *stagingProfileId*. Optionally you can configure the repository to stage into with *stagingRepositoryId*. This aggregated command can then be run outside any specific Maven project.

While the above goals need the context of a project with configuration for the Nexus Staging Plugin in the POM file, it is possible to execute staging repository-related tasks without a project as well. The Nexus Staging Maven plugin offers remote-control goals to control staging:

rc-close

Close a specified staging repository.

rc-drop

Drop a specified staging repository.

rc-release

Release a specified staging repository.

rc-promote

Promote a specified staging repository.

rc-list

List all staging repositories.

When invoking these goals outside a project context, you need to have the Nexus Staging Maven plugin group ID specified as a pluginGroup in your `settings.xml`:

```
<pluginGroups>
  <pluginGroup>org.sonatype.plugins</pluginGroup>
</pluginGroups>
```

In addition, you need to specify all parameters on the command line as properties passed in via `-Dkey=value`.

At a minimum the required parameters `serverId` and `nexusUrl` have to be specified:

```
mvn nexus-staging:rc-close -DserverId=nexus -
DnexusUrl=http://localhost:8081/nexus
```

Depending on the goal you will have to configure the staging repositories you want to close, drop or release with:

```
-DstagingRepositoryId=repo-001,repo-002
```

Also, you may supply a description like this:

```
-DstagingDescription="Dropping since QA of issue 123 failed"
```

For promoting, you need to add the required parameter that specifies the build promotion profile identifier:

```
-DbuildPromotionProfileId=12a25eabf8c8b3f2
```

A successful remote control drop would be logged in the command line similar to this:

```
– nexus-staging-maven-plugin:1.2:rc-drop (default-cli) @ standalone-pom –
[INFO] Connecting to Nexus...
[INFO] Using server credentials with ID="nexus-releases" from Maven settings.
[INFO] RC-Dropping staging repository with IDs=[test-003]
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
```

An example usage of the `rc-list` goal with output is:

```
$mvn nexus-staging:rc-list -DnexusUrl=http://localhost:8081/nexus
-DserverId=nexus
...
[INFO] --- nexus-staging-maven-plugin:1.5.1:rc-list (default-cli) @ standalone-pom ---
[INFO] Connecting to Nexus...
[INFO] Using server credentials with ID="nexus" from Maven settings.
[INFO] Getting list of available staging repositories...
[INFO]
[INFO] ID State Description
[INFO] example_release_profile-1000 OPEN Implicitly created (auto
staging).
...
```

❗ The Nexus Maven plugin in versions earlier than 2.1.0 had goals to work with staging repositories. These goals have been deprecated in favor of the remote control goals of the Nexus Staging Maven plugin.

Deployment with the Nexus Staging Ant Tasks

The Nexus Staging Ant tasks provide equivalent features to the Nexus Staging Maven plugin for Apache Ant users covering all use cases for interacting with the staging suite.

Historically Ant builds typically have components that are required for the build, statically managed in the version control system or even outside the project workspace altogether. More modern Ant builds use Apache Ivy or Eclipse Aether for resolving dependencies dynamically as well as deployment build outputs to a repository manager. Examples projects setups using Ivy as well as Aether can be found in the documentation examples project . This project includes examples for integration with the Nexus Staging Ant tasks.

To use the Ant tasks in your Ant build file, download the complete JAR with the included dependencies from the Central Repository. Simply search for `nexus-staging-ant-tasks` and download the JAR file with the uber classifier e.g., `nexus-staging-ant-tasks-1.6-2-uber.jar`.

After downloading, put the JAR file somewhere in your project or in your system so you can add it to the classpath in your build file with a task definition. In the following example, the JAR file is placed in a tasks folder within the project:

```
<taskdef uri="antlib:org.sonatype.nexus.ant.staging"
         resource="org/sonatype/nexus/ant/staging/antlib.xml">
  <classpath>
    <fileset dir="tasks" includes="nexus-staging-ant-tasks-*uber.jar" />
  </classpath>
</taskdef>
```

To enable the tasks in your build file using a shortcut for the namespace, e.g., `staging`, you have to add it to the project node:

```
<project xmlns:staging="antlib:org.sonatype.nexus.ant.staging" ...>
```

The deployment-related information for your project is captured in a `nexusStagingInfo` section in your build file that contains all the necessary configuration:

```
<staging:nexusStagingInfo id="target-nexus"
    stagingDirectory="target/local-staging">
<staging:projectInfo groupId="org.sonatype.nexus.ant"
    artifactId="nexus-staging-ant-tasks"
    version="1.0" />
<staging:connectionInfo
    baseUrl="http://localhost:8081/nexus">
<staging:authentication
    username="deployment"
    password="deployment123" />
</staging:connectionInfo>
</staging:nexusStagingInfo>
```

nexusStagingInfo:id

The identifier that allows you to reference the staging information in the Ant build file.

stagingInfo:stagingDirectory

The local staging directory, a place where local staging will happen. Ensure that this directory is cleaned up by a `clean` task or alike, if any.

projectInfo

The project information targeting a staging profile. This can be done explicitly with the `stagingProfileId` or implicitly with `groupId`, `artifactId` and `version`. `stagingRepositoryId` can also be part of `projectInfo` identifying a staging repository for interaction.

connectionInfo(baseUrl)

The base URL of the repository manager you want to deploy to and interact with.

If necessary the `connectionInfo` can have a nested proxy section:

```
<staging:proxy
    host="proxy.mycorp.com"
    port="8080">
<staging:authentication
    username="proxyUser"
    password="proxySecret" />
</staging:proxy>
```

With the above setup you are ready to add a `deploy` target to your build file that stages the components locally as well as remotely and closes the staging repository:

```
<target name="deploy" description="Deploy: Local and Remote Staging">
  <staging:stageLocally>
    <staging:nexusStagingInfo
      refid="target-nexus" />
    <fileset dir="target/local-repo"
      includes="**/*.*" />
  </staging:stageLocally>

  <staging:stageRemotely>
    <staging:nexusStagingInfo
      refid="target-nexus" />
  </staging:stageRemotely>
</target>
```

The folder `target/local-repo` has to contain the components in a directory structure resembling the Maven repository format using the `groupId`, `artifactId`, and `version` coordinates of the component mapped to directory names. It will be merged into the target release repository, when the staging repository is released. An example on how to create such a structure in Ant can be found in the staging example for Apache Ivy and Eclipse Aether in the [documentation examples project](#)²¹⁴¹.

Similarly, you can create a target that releases the staged components by adding the `releaseStagingRepository` task to the end of the target:

```
<staging:releaseStagingRepository>
  <staging:nexusStagingInfo
    refid="target-nexus" />
</staging:releaseStagingRepository>
```

The `stageLocally` task takes a fileset as configuration. The `stageRemotely` task has additional configuration options.

keepStagingRepositoryOnFailure

Set to `true` this causes the remote staging repository to be kept rather than deleted in case of a failed upload. Default setting is `false`

skipStagingRepositoryClose

By default a staging repository is automatically closed, setting this parameter to `true` will cause the staging repository to remain open.

In addition to the tasks for local and remote staging, the Nexus Staging Ant tasks include tasks for closing, dropping, releasing and promoting a staging repository:

- `closeStagingRepository`
- `dropStagingRepository`
- `releaseStagingRepository`

²¹⁴¹ <https://github.com/sonatype/nexus-book-examples/>

- `promoteStagingRepository`

All these tasks take the context information from the local staging directory or from the optional parameter `taggingRepositoryId`. The task to promote a repository has the additional, mandatory attribute `buildPromotionProfileId` to specify the build promotion profile to promote.

The timing of the task operation can be affected by the following configuration parameters:

stagingProgressTimeoutMinutes

Defaulting to 5 minutes, this configuration allows you to set the timeout for staging operations.

Changes are most often required for complex staging operations involving custom staging rules or Nexus IQ Server integration.

stagingProgressPauseDurationSeconds

The default of 3 seconds can be changed if larger pauses between progress polls for staging operations are desired.

Deployment with the Maven Deploy Plugin

When using the Maven Deploy plugin with the staging suite, you rely on implicit matching of the components against a staging profile based on a repository target definition.

To deploy a staged release, a developer needs to deploy to the staging URL. To configure a project to deploy to the staging URL, add the `distributionManagement` element to your project's POM:

Listing the Staging URL in distributionManagement

```
<project xmlns="http://maven.apache.org/POM/4.0.0"
...
<distributionManagement>
  <repository>
    <id>nexus</id>
    <name>Nexus Staging Repo</name>
    <url>http://localhost:8081/nexus/service/local/staging/deploy/maven2</url>
  </repository>
</distributionManagement>
...
</project>
```

This configuration element, `distributionManagement`, defines the repository to which our deployment will be made. It references the staging suite's URL: `http://localhost:8081/nexus/service/local/staging/deploy/maven2`

This URL acts as a virtual repository to be published to. If a component being published matches one of the repository targets in a staging profile, that staging profile is activated and a temporary staging repository is created.

Once the sample project's `distributionManagement` has been set to point at the staging URL and your deployment credentials are updated in your `~/.m2/settings.xml` file, you can deploy to the staging URL. To do this, run `mvn deploy`:

```
$ mvn deploy
[INFO] Scanning for projects...
[INFO] -----
[INFO] Building staging-test
[INFO] task-segment: [deploy]
[INFO] -----
[INFO] [resources:resources]
[INFO] Using default encoding to copy filtered resources.
[INFO] [compiler:compile]
[INFO] Nothing to compile - all classes are up to date
[INFO] [resources:testResources]
[INFO] Using default encoding to copy filtered resources.
[INFO] [compiler:testCompile]
[INFO] Nothing to compile - all classes are up to date
[INFO] [surefire:test]
[INFO] Surefire report directory: /private/tmp/staging-test/target/surefire-reports
...
[INFO] [jar:jar]
[INFO] [install:install]
[INFO] Installing /private/tmp/staging-test/target/staging-test-1.0.jar to \
~/.m2/repository/com/sonatype/sample/staging-test/1.0/staging-test-1.0.jar
[INFO] [deploy:deploy]
altDeploymentRepository = null
Uploading: http://localhost:8081/nexus/service/local/staging/deploy/maven2/\
com/sonatype/sample/staging-test/1.0/staging-test-1.0.jar
2K uploaded
[INFO] Uploading project information for staging-test 1.0
[INFO] Retrieving previous metadata from nexus
[INFO] repository metadata for: 'component com.sonatype.sample:staging-test'
could not be found on repository: nexus, so will be created
[INFO] Uploading repository metadata for: 'component com.sonatype.sample:staging-test'
[INFO] -----
[INFO] BUILD SUCCESSFUL
```

If the staging suite is configured correctly, any deployment to the staging URL matching a repository target configured for a staging profile should be intercepted by the staging suite and placed in a temporary staging repository. Deployment with the Maven Deploy plugin will not automatically close the staging repository. Closing the staging repository has to be done via the user interface or the Nexus Staging Maven plugin. Once this repository has been closed, it will be made available in the target group you selected when you configured the staging profile.

Deployment and Staging with Gradle

The Gradle build system can be used to deploy components with the Gradle Maven plugin. The Nexus Staging Ant tasks can be used in Gradle allowing full integration of the staging suite features in a Gradle build.

An example project showcasing this integration is available in the [documentation examples project](#)²¹⁴².

Manually Uploading a Staged Deployment

You can also upload a staged deployment via the user interface. To upload a staged deployment, select *Staging Upload* from the main menu. Clicking *Staging Upload* will show the panel shown in *Figure 11.10, “Manually Uploading a Staged Deployment”*.

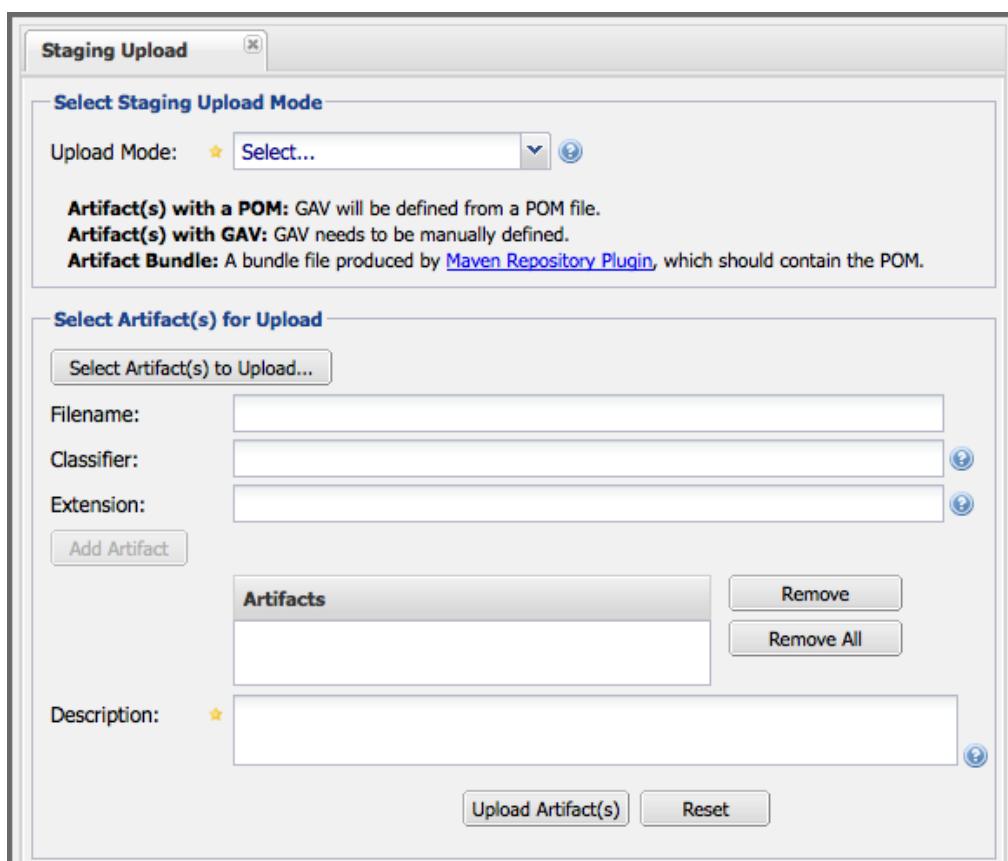


Figure 11.10. Manually Uploading a Staged Deployment

To upload a component, click on *Select Artifact(s) for Upload...* and select an components from the filesystem to upload. Once you have selected a component, you can modify the classifier and the extension before clicking on the *Add Artifact* button. Repeat this process to upload multiple components for the

²¹⁴² <https://github.com/sonatype/nexus-book-examples>

same *Group*, *Artifact* and *Version* (GAV) coordinates like a JAR, the POM and maybe a sources and javadoc JAR in addition. Once you have added all the components, you can then configure the source of the *Group*, *Artifact*, *Version* (GAV) parameters.


If the component you are uploading is a JAR file that was created by Maven, it will already have POM information embedded in it, but if you are uploading a JAR from a vendor you will likely need to set the *Group Identifier*, *Artifact Identifier*, and *Version* manually. To do this, select *GAV Parameters* from the *GAV Definition* drop-down at the top of this form. Selecting *GAV Parameters* will expose a set of form fields that will let you set the Group, Artifact, Version, and Packaging of the components being uploaded. If you would prefer to set the Group, Artifact, and Version identifiers from a POM file that was associated with the uploaded component, select *From POM* in the *GAV Definition* drop-down. Selecting *From POM* in this drop-down will expose a button labeled *Select POM to Upload*. Once a POM file has been selected for upload, the name of the POM file will be displayed in the form field below this button.

The Staging Upload panel supports multiple components with the same *Group*, *Artifact*, and *Version* identifiers. For example, if you need to upload multiple components with different classifiers, you may do so by clicking on *Select Artifact(s)* for Upload and Add Artifact multiple times. This interface also accepts an *Artifact Bundle* which is a JAR that contains more than one component, which is documented in more detail in [Artifact Bundles](#)(see page 425).

Once a staging component upload has been completely configured, click on *Upload Artifact(s)* button to begin the upload process. The repository manager will upload the components to the Staging URL which will trigger any staging profiles that are activated by the upload by explicitly matching using the repository targets configured with the staging profiles. If a staging profile is activated, a new staging repository will be created and can be managed using the procedures outlined in Managing Staging Repositories.

Managing Staging Repositories

With a staging profile configured and a deployment completed as outlined in [Configuring the Staging Suite](#)(see page 383) and [Configuring Your Project for Deployment](#)(see page 393), you will have an automatically generated staging repository. A list of all staging repositories can be accessed by selecting the *Staging Repositories* item in the *Build Promotion* menu and is displayed in Figure 11.11, "Staging Repositories List Panel".

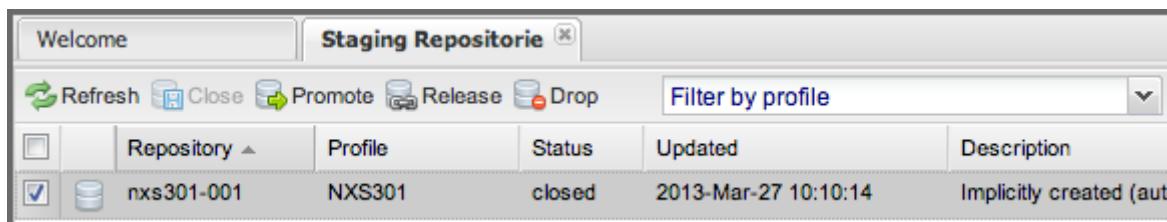

| | Repository | Profile | Status | Updated | Description |
|-------------------------------------|------------|---------|--------|----------------------|----------------------------|
| <input checked="" type="checkbox"/> | nxs301-001 | NXS301 | closed | 2013-Mar-27 10:10:14 | Implicitly created (aut... |

Figure 11.11. Staging Repositories List Panel

Actions for the selected staging repository (or repositories) in the list include options to *Close*, *Promote*, *Release*, or *Drop*. The *Refresh* button can be used to force a reload of the list of repositories. The *Filter by profile* drop-down allows you to select one or multiple staging profiles from which the repositories in the list

were created. The list of repositories itself displays a number of columns with details for each repository. Further columns can be added by pressing on the drop-down triangle beside the currently selected column. Sorting by a single column in Ascending or Descending order can be set from the same drop-down as the column addition.

- ⚠** When triggering a transition for a staging repository from e.g., the open state to a the closed state, a background task performs all the necessary operations. Since these are potentially longer running tasks, the user interface is not immediately updated. You are required to press Refresh to get the latest state of all repositories.

By default the following columns are displayed:

Checkbox

A checkbox to allow operations on multiple repositories.

Status Icon

An icon symbolizing the status of the staging repository.

Repository

The name of the staging repository.

Profile

The name of the staging profile, that was used to create the staging repository.

Status

Status of the repository.

Updated

Date and time of the last update.

Description

Textual description of the repository.

Additional columns are:

Release To

Target repository for the components in the staging repository after release.

Promoted To

The build promotion profile, to which a staging repository was optionally promoted to.

Owner

The username of the creator of the staging repository.

Created

Date and time of the creation of the staging repository.

User Agent

User agent string sent by the tool used for the deployment, e.g., Apache-Maven/3.0.5.

-  You can also access staging repositories in the list of repositories available in the *Repositories* panel available via the *Views/Repositories* as a Nexus Repository-managed repository.

In the following sections, you will walk through the process of managing staging repositories. Once you have deployed a set of related components, you must close the repository moving it from an *Open* to a *Closed* state unless the deployment tool automatically closed the staging repository.

A repository in the *Closed* state is added to a *Repository Group* and is made available for testing purposes or other inspection and can no longer receive additional components in it.

When the component examination is complete, you can either *Promote*, *Release*, or *Drop* the closed repository.

If the repository is dropped, the repository is discarded and removed from the *Repository Group* and the components are moved to the *Trash*.

If the repository is promoted, it is assigned to a build promotion profile for further staging activities.

If the repository is released, its components are moved to the target repository configured in the staging profile.

-  A scheduled task documented in [Managing Scheduled Tasks](#)(see page 293) can be used to clean up inactive staging repositories automatically.

Selecting a staging repository in the list displays further details about the repository in the *Summary*, *Activity*, and *Content* tabs below the list. An example for an open repository is displayed in *Figure 11.12, “List of Activities Performed on a Promoted Staging Repository”*.

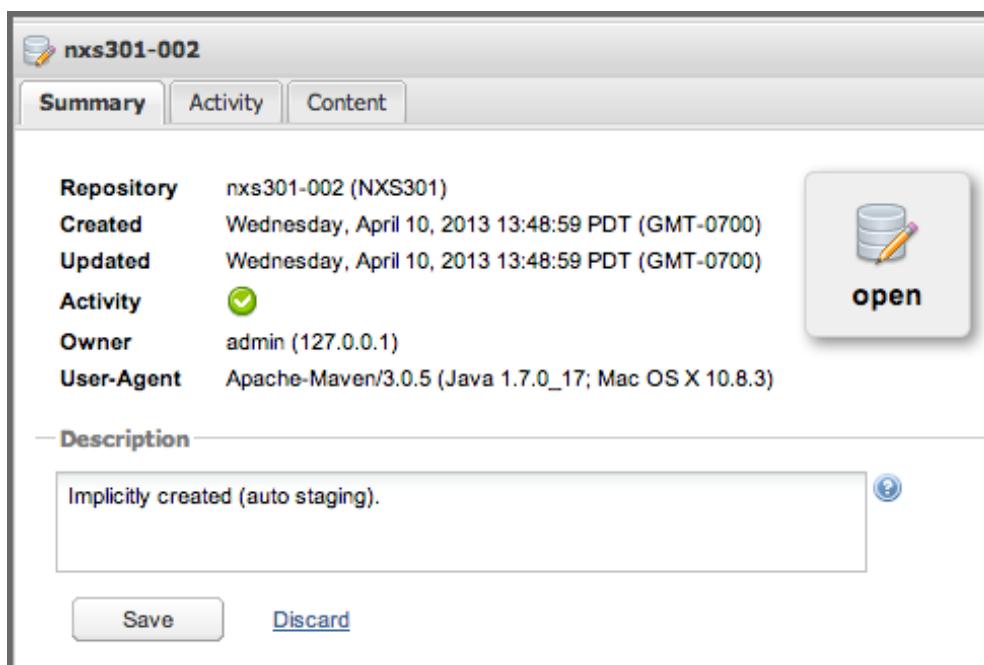


Figure 11.12. List of Activities Performed on a Promoted Staging Repository

The *Summary* tab displays a number of properties of the staging repository and allows you to edit the *Description*. The properties include the name of the repository, created date/time and updated date/time, activity indicator, owner and originating IP number of the deployment as well as the user agent string sent by the deployment. All staging operations have a default description that is used if the input field is left blank.

The *Activity* tab shows all the activities that occurred on a specific staging repository. An example for a promoted repository is displayed in *Figure 11.13, “Details of an Open Staging Repository as Displayed under the List of Staging Repositories”*. The activities are separated per activity and list all events that occurred in an activity. Selecting an event displays further details about the event on the right side of the tab.

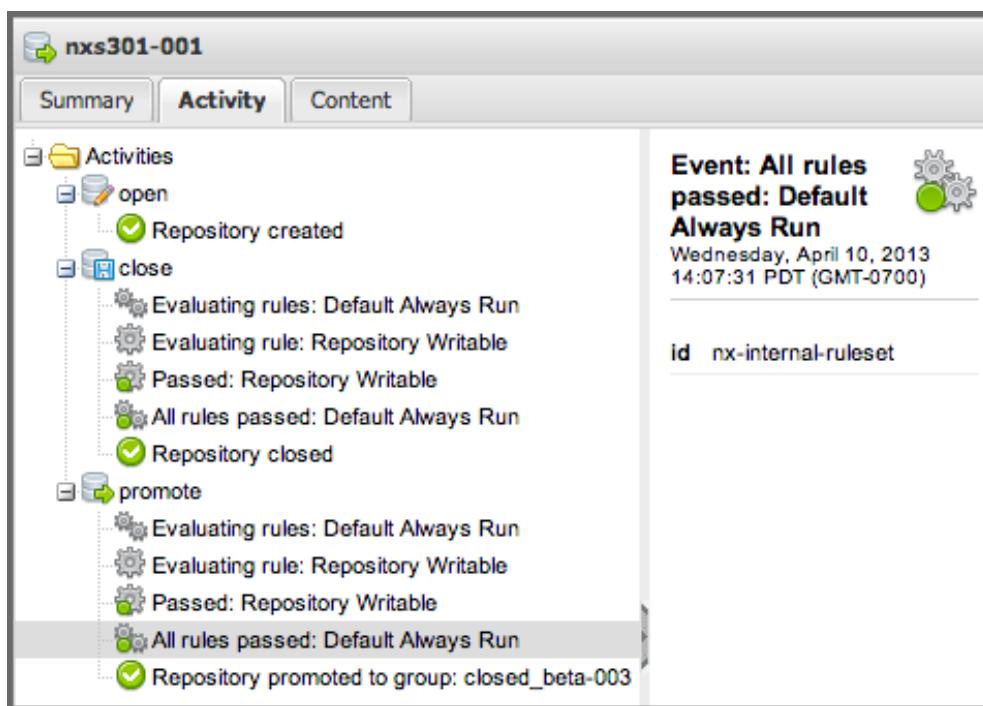


Figure 11.13. Details of an Open Staging Repository as Displayed under the List of Staging Repositories

The Content tab displays a repository browser view of the staging repository content and allows you to filter and display the components in the tree view. Selecting a specific component triggers the display of further panels with further information about the component, in the same manner as other repository browser views. The tabs include Maven and Artifact information and others.

For build promotion profile an additional *Members* tab is shown. It displays the source repositories and build promotion profiles from which this current build promotion profile was created.

Closing an Open Repository

Once you deploy a component that triggers a staging profile, staging suite will create a repository that contains the components you deployed. A separate staging repository is created for every combination of *User ID*, *IP Address*, and *User Agent*. This means that you can perform more than one deployment to a single staging repository, as long as you perform the deployment from the same IP with the same deployment user and the same installation of Maven.

You can perform multiple deployments to an open staging repository. Depending on the deployment tool and your configuration, the staging repository might be automatically closed during deployment or left open until manually closed.

Once you are ready to start testing the staging repository content, you will need to transition the repository from the open state to the closed state. This will close the staging repository to more deployments.

To close a repository, select the open staging repository in the list and by clicking the checkbox in the list or anywhere else in the row. For an open repository, the *Close* and the *Drop* buttons above the table will be

activated. Pressing the *Close* button will bring up the dialog for a staging deployer to describe the contents of the staging repository and confirm. This description field can be used to pass essential information to the person who needs to test a deployment.

In *Figure 11.14, “Confirmation and Description Dialog for Closing a Staging Repository”*, the description field is used to describe the release for the user who needs to certify and promote a release.

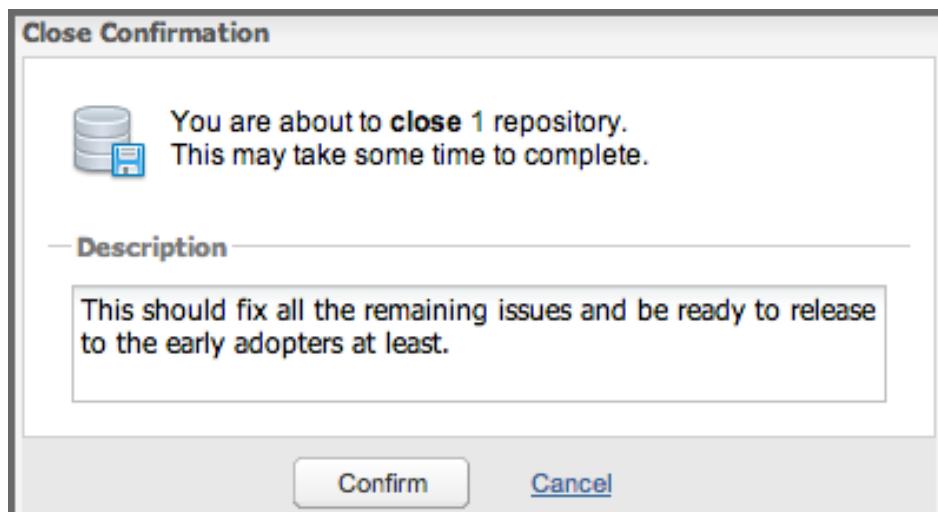


Figure 11.14. Confirmation and Description Dialog for Closing a Staging Repository

Confirming this state transition will close the repository and add the repository to the repository groups configured in the staging profile. The updated status will be visible in the list of staging repositories after a *Refresh*, since the transition could take longer depending on the configured staging rules and potential validation against Nexus IQ Server.

Using the Staging Repository

Once the staging repository has been closed, it will automatically be added to the repository group(s) that are specified as target groups in the staging profile configuration.

This has the effect of making the staged components available to everyone who is referencing this group. Developers who are referencing this repository group can now test and interact with the staged components as if they were published to a hosted repository.

While the components are made available in a repository group, the fact that they are held in a temporary staging directory gives the staging user the option of promoting this set of components to a hosted repository. Alternatively, the user can drop this temporary staging repository, if there are problems discovered during the testing and certification process for a release.

Once a staging repository is closed, you can also browse and search the repository in the staging repositories list.

To view all staging repositories, click on the *Repositories* item in the *Views.Repositories* menu and then select *Nexus Managed Repositories* as shown in *Figure 11.15, “Viewing Nexus Managed Repositories”*.

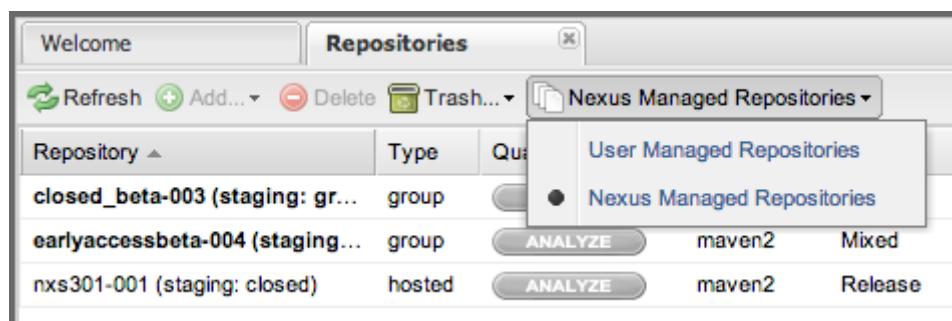


Figure 11.15. Viewing Nexus Managed Repositories

This list allows you to access all Nexus Managed Repositories, just like the *User Managed Repositories*, including browsing the content and accessing detailed information about the components in the repository. In addition to staging repositories, the list included procured repositories as documented in [Procurement Suite](#)(see page 366).

Releasing a Staging Repository

When you are finished testing or certifying the contents of a staging repository, you are ready to either release, promote, or drop the staging repository. Dropping the staging repository will delete the temporary it from the repository manager and remove any reference to this repository from the groups with which it was associated. Releasing the staging repository allows you to publish the contents of this temporary repository to a hosted repository. Promoting the repository will move it to a build promotion profile.

You can release a staging repository by pressing Release, after selecting a closed staging repository from the staging repositories list. The *Release Confirmation* dialog displayed in *Figure 11.16, “Confirmation Dialog for Releasing a Staging Repository”* will allow you to supply a description and configure if the staging repository should be automatically dropped after the components have been released to the hosted repository.

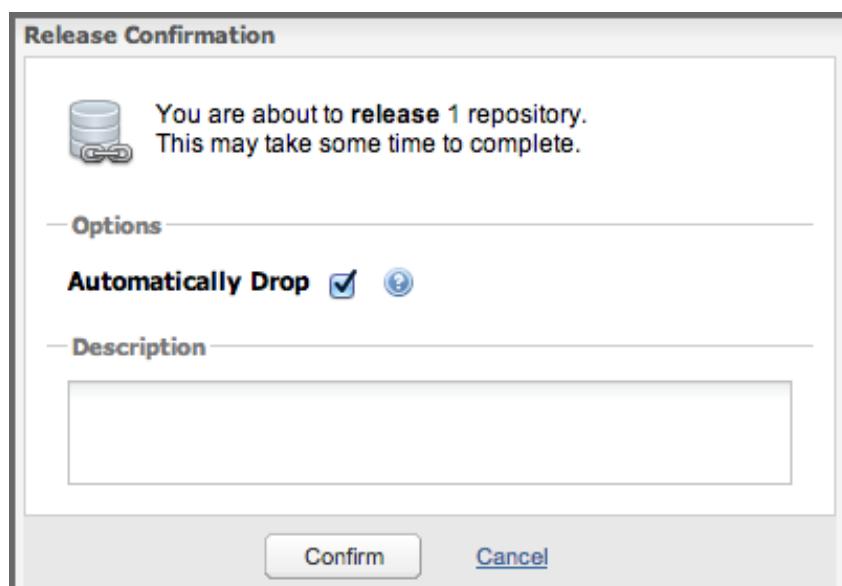


Figure 11.16. Confirmation Dialog for Releasing a Staging Repository

Promoting a Staging Repository

If you have a closed staging repository that you want to promote to a *Build Promotion Profile*, open the list of *Staging Repositories* and click the Promote button to bring up the *Promote Confirmation* dialog displayed in Figure 11.16, “Confirmation Dialog for Releasing a Staging Repository”. It allows you to select the build promotion profile to which you want to stage the repository to as well as provide a description.


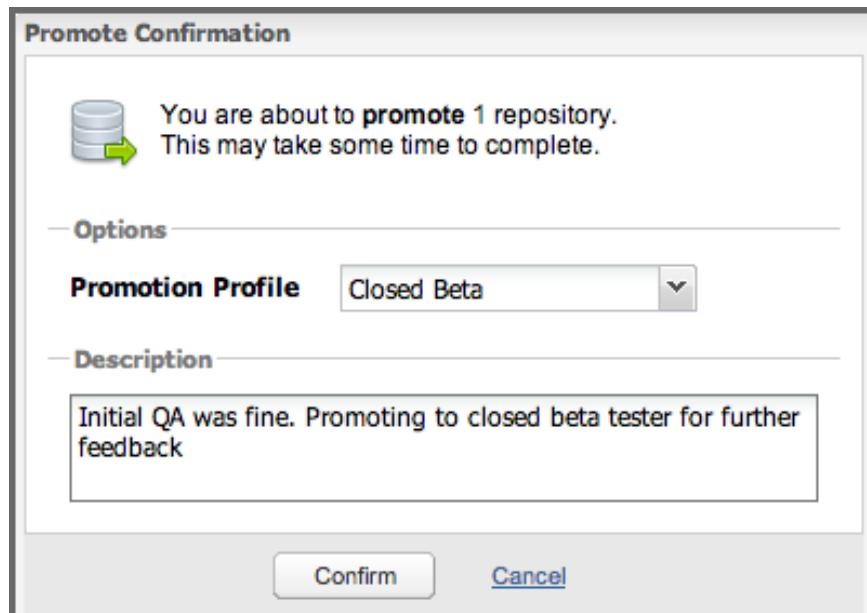


Figure 11.17. Confirmation Dialog for Promoting a Staging Repository

Clicking on the *Promote* button in the dialog will promote the staging repository to a build promotion repository and expose the contents of the selected staging repository through the target group(s) associated with the build promotion profile.

The build promotion repository is accessible in the staging repository list as displayed in Figure 11.18, “A Build Promotion Repository and its Members Panel”. If you add the column *Promoted To* to the list you will observe that the repository manager keeps track of the promotion source. The *Members* tab for a build promotion repository displays the path of a build promotion repository back to a staging repository. One or more staging repositories can be promoted to a single build promotion profile.

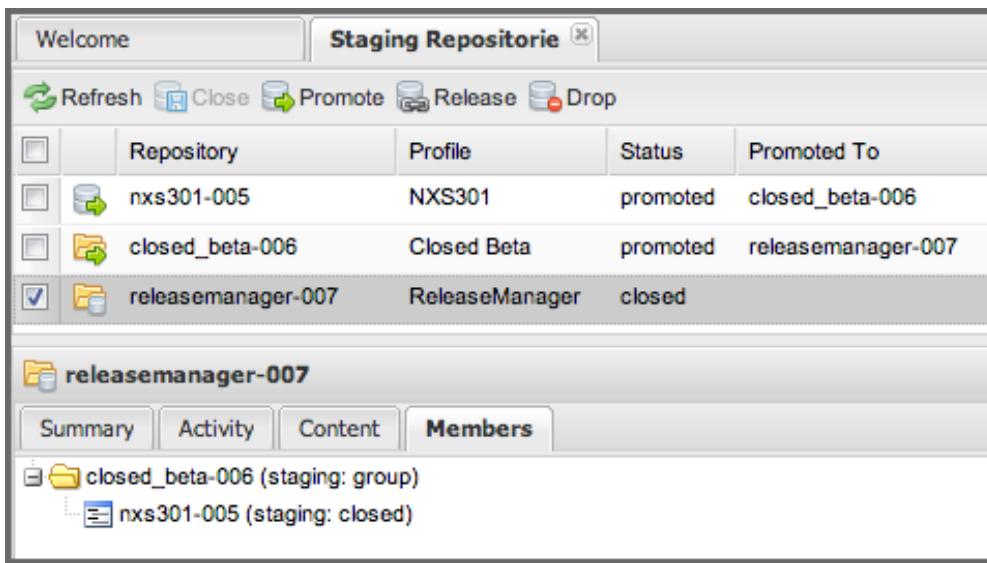

The screenshot shows the Nexus Repository Manager 2 interface. The top navigation bar has tabs for "Welcome" and "Staging Repositories". Below the navigation is a toolbar with icons for Refresh, Close, Promote, Release, and Drop. A main table lists repositories with columns for Repository, Profile, Status, and Promoted To. Three rows are shown: "nxs301-005" (Profile: NXS301, Status: promoted, Promoted To: closed_beta-006), "closed_beta-006" (Profile: Closed Beta, Status: promoted, Promoted To: releasemanager-007), and "releasemanager-007" (Profile: ReleaseManager, Status: closed). A checkbox next to "releasemanager-007" is checked. Below the table, a section titled "releasemanager-007" contains tabs for Summary, Activity, Content, and Members. The Members tab is selected, showing two entries: "closed_beta-006 (staging: group)" and "nxs301-005 (staging: closed)".

Figure 11.18. A Build Promotion Repository and its Members Panel

Releasing, Promoting, and Dropping Build Promotion Profiles

When you configure a build promotion profile and promote staging repositories to promotion profiles, each build promotion profile creates a repository that contains one or more staging repositories. Just like you can promote the contents of a staging repository to a build promotion profile, you can also promote the contents of a build promotion profile to another build promotion profile. When you do this you can create hierarchies of staging repositories and build promotion profiles that can then be dropped or released together.

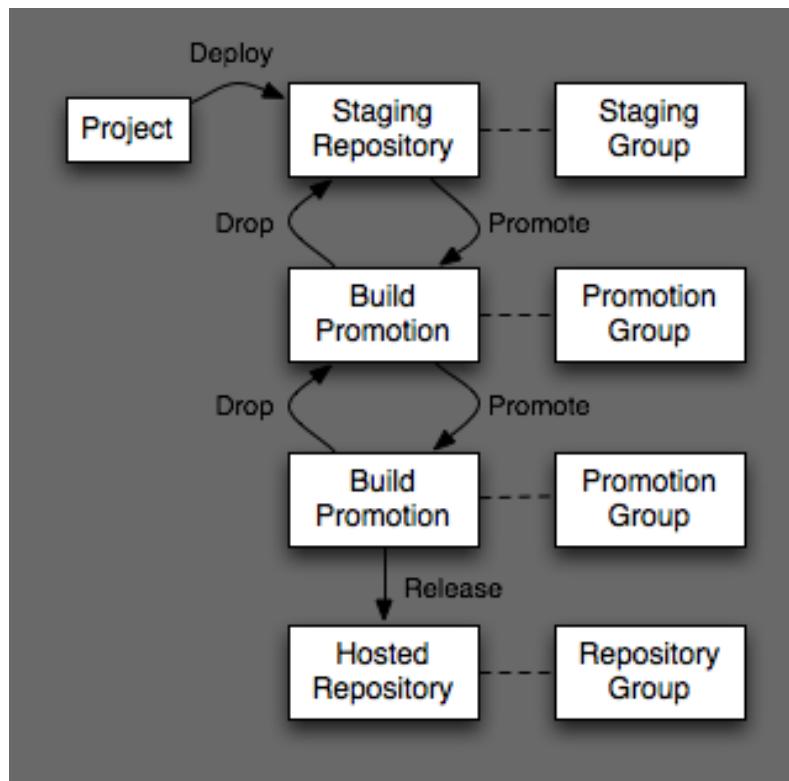


Figure 11.19. Releasing, Promoting, and Dropping Build Promotion Profiles

When you promote a staging repository to a build promotion profile, you make the contents of a staging repository available via a repository group associated with a build promotion profile.

For example, if you staged a few components to a QA staging repository and then subsequently promoted that repository to a Closed Beta build promotion group, the contents of the QA staging repository would initially be made available via a QA repository group. After a build promotion, these components would also be available via a Closed Beta repository group.

You can take it one step further and promote the contents of the Closed Beta build promotion profile to yet another build promotion profile. In this way you can have an arbitrary number of intermediate steps between the initial staging deployment and the final release.

If you drop the contents of a build promotion profile, you roll back to the previous state. For example, if you decided to drop the contents of the Closed Beta build promotion group, the repository manager will revert the status of the staging repository from promoted to closed and make the components available via the QA staging repository. The effects of promoting, dropping, and releasing components through a series of staging profiles and build promotion profiles is shown in *Figure 11.19, “Releasing, Promoting, and Dropping Build Promotion Profiles”*.

When you perform a release on a build promotion profile, it rolls up to release all its members, ultimately reaching a staging repository. Each staging repository releases its components to the release repository configured in *Figure 11.5, “Creating a New Staging Profile”*. Because a build repository can contain one or

more promoted staging repositories, this means that releasing a build promotion profile can cause components to be published to more than one release repository.

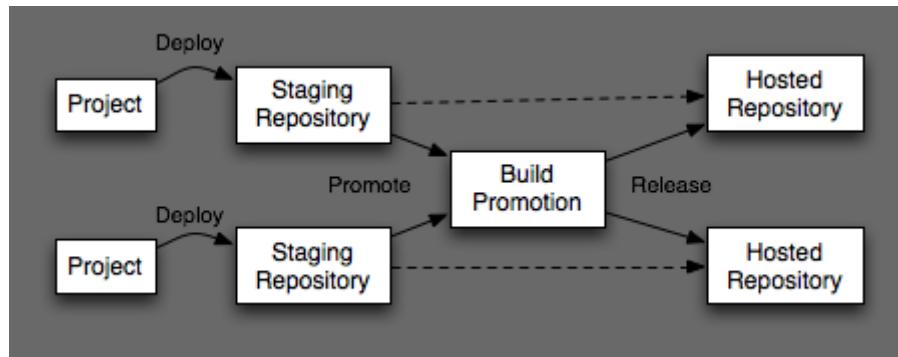


Figure 11.20. Promoting Multiple Repositories to the Same Build Promotion Profile

Build promotion profiles are not directly related to release repositories, only staging profiles are directly associated with target release repositories. *Figure 11.20, “Promoting Multiple Repositories to the Same Build Promotion Profile”* illustrates this behavior with two independent staging repositories, each configured with a separate release repository. Releasing the build promotion profile causes the repository manager to publish each staging repository to a separate hosted repository.

Multilevel Staging and Build Promotion

Nexus Repository Manager Pro also supports multilevel staging and build promotion. With multilevel staging, a staging repository can be tested and then promoted to multiple separate build promotion profiles consecutively and exposed through different repository groups to allow for additional testing and qualification before a final release. *Figure 11.21, “Multilevel Staging and Build Promotion”* illustrates a potential use for multilevel staging:

Stage

A developer publishes components to a QA staging profile that exposes the staged components in a QA repository group used by an internal quality assurance team for testing.

Promote to Beta

Once the QA team has successfully completed testing, they promote the temporary staging repository to a build promotion profile that exposes the staged components to a limited set of customers who have agreed to act as beta testers for a new feature.

Release

Once this Closed Beta testing period is finished, the staged repository is then released and the components it contains are published to a hosted release repository and exposed via the public repository group.

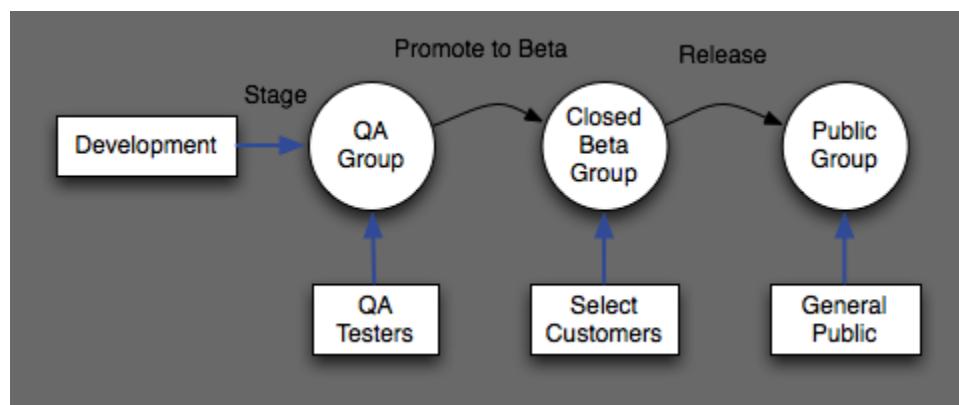


Figure 11.21. Multilevel Staging and Build Promotion

To support this multilevel staging feature, you can configure *Build Promotion* profiles as detailed in [Configuring Build Promotion Profiles](#)(see page 388). Once you have promoted a *Staging Repository* to a *Build Promotion* profile, you can drop, promote, or release the components it contains as detailed in [Configuring the Staging Suite](#)(see page 383).

Enforcing Standards for Deployment and Promotion with Rulesets

Nexus Repository Manager Pro has the ability to define staging rules that must be satisfied to allow successful deployment or before a staging repository can be promoted.

Managing Staging Rulesets

Staging rulesets are customizable groups of rules that are validated against the components in a staging repository when the repository is closed or promoted. If any rules cannot be validated, closing or promoting the repository will fail.

A staging repository associated with a staging ruleset, configured in the staging profile, cannot be closed or promoted until all of the rules associated with the rulesets have been satisfied. This allows you to set standards for your own hosted repositories, and it is the mechanism that is used to guarantee the consistency of components stored in the Central Repository.

To create a *Staging Ruleset*, click on the *Staging Ruleset* item in the *Build Promotion* menu. This will load the interface shown in *Figure 11.22, “Creating a Staging Ruleset”*. The *Staging Ruleset* panel is used to define sets of rules that can be applied to staging profiles.

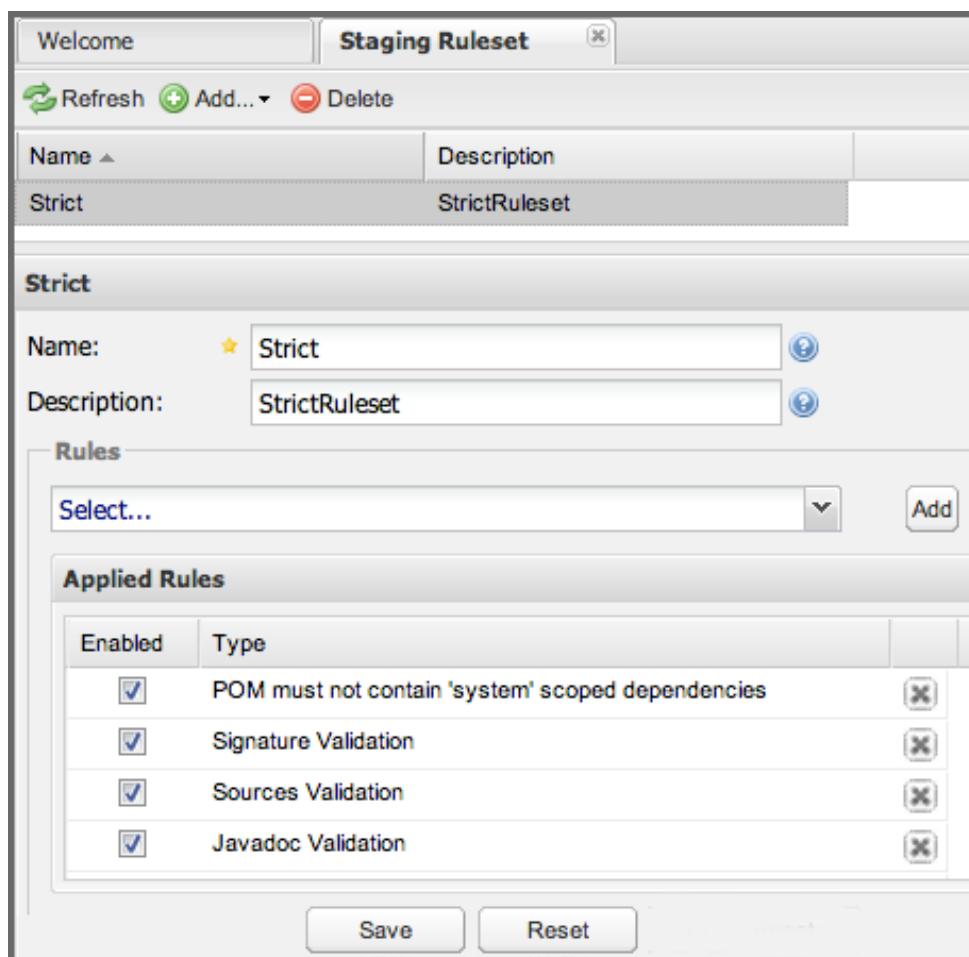


Figure 11.22. Creating a Staging Ruleset

Nexus Repository Manager Pro contains the following rules:

Archives must not contain insecure paths

This rule verifies that the staging repository does not contain any archive files, which contain path entries that may traverse outside of the desired unpack location, by using any number of "../" strings in the path.

Artifact Uniqueness Validation

This rule checks to see that the component being released, promoted, or staged is unique in a particular repository manager instance.

Checksum Validation

This rule validates that file checksum files are present and correct for the published components.

Javadoc Validation

The Javadoc Validation rule will verify that every project has a component with the javadoc classifier. If you attempt to promote a staging repository that contains components not accompanied by "-javadoc.jar" components, this validation rule will fail.

No promote action allowed

This rule can be used to prevent the promotion of a staging repository to a build promotion profile. It can be used enforce a choice between releasing and dropping a staging repository only.

No release action allowed

This rule can be used to prevent the direct release of a staging repository. It can be used enforce a choice between promoting and dropping a staging repository only.

POM Validation

The Staging POM Validation rule will verify Project URL - project/url, Project Licenses - project/licenses and Project SCM Information - project/scm. Any of these POM elements cannot be missing or empty.

POM must not contain system scoped dependencies

Ensures that no dependency is using the scope system. This allows for a path definition ultimately making the component rely on a specific relative path and using it is considered bad practice and violates the idea of having all necessary components available in repositories.

POM must not contain release repository

This rule can ensure that no release repository is defined in the repositories element in the POM. This is important since it potentially would circumvent the usage of the repository manager and could point to other repositories that are not actually available to a user of the component.

Profile target matcher

This rule verifies the staging repository content against the repository target configured in the staging profile for this staging repository. This enforces that only components using the correct repository path as a result of the groupId.

Signature Validation

The Signature Validation rule verifies that every item in the repository has a valid PGP signature. If you attempt to promote a staging repository that contains components not accompanied by valid PGP signature, this validation will fail.

Sources Validation

The Sources Validation rule will verify that every project has a component with the sources classifier. If you attempt to promote a staging repository that contains components not accompanied by "-sources.jar" components, this validation rule will fail.

Defining Rulesets for Promotion

To define a ruleset to be used for closing or promotion, edit the staging profile by selecting it in the staging profile list. Scroll down to the sections *Close Repository Staging Rulesets* and *Promote Repository Staging Rulesets* as shown in *Figure 11.23, “Associating a Staging Ruleset with a Staging Profile”* and add the desired available rulesets to the left-hand list of activated rulesets for the current staging profile.

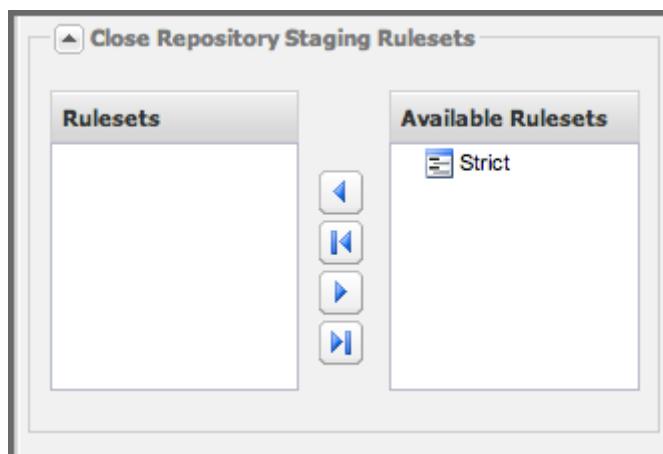


Figure 11.23. Associating a Staging Ruleset with a Staging Profile

The next time you attempt to close or promote a staging repository that was created with this profile, Nexus Repository Manager Pro will check that all of the rules in the associated rulesets are being followed.

Policy Enforcement with Nexus IQ Server

As discussed in [Concepts](#)(see page 174), repository management and managing components in your software development life cycle are closely related activities. The Nexus suite of tools provides a server application for administrating your component usage policies and other features that integrate with other tools of the suite. It has access to extensive security vulnerability and license information data from the Nexus IQ Server backend that can be used as input for your policies. For example you could establish a policy that is logged as violated, if any component in your software has a known security vulnerability or uses a license that is incompatible with your business model.

Nexus Repository Manager Pro can take advantage of Nexus IQ Server. It can be integrated to validate policies as part of your usage of the staging suite.

Detailed instructions on how to install and configure the Nexus IQ Server as well as the integration with Nexus Repository Manager Pro can be found in the [documentation](#)²¹⁴³.

²¹⁴³ <https://help.sonatype.com/display/NXI/IQ+Server+and+NXRM+2.x>

Artifact Bundles

Artifact bundles are groups of related components that are all related by the same groupId, artifactId, and version (GAV) coordinate. They are used by projects that wish to upload components to the Central Repository. Bundles must contain the following POM elements:

- modelVersion
- groupId
- artifactId
- packaging
- name
- version
- description
- url
- licenses
- scm
 - url
 - connection

Creating an Artifact Bundle from a Maven Project

Artifact bundles are created with the Maven Repository Plugin. For more information about the Maven Repository plugin, see <http://maven.apache.org/plugins/maven-repository-plugin/>.

Sample POM Containing all Required Bundle Elements lists a project's POM that satisfies all of the constraints that are checked by the Maven

Repository plugin. The following POM contains a description and a URL, SCM information, and a reference to a license. All of this information is required before a component bundle can be published to the Maven Central repository.

Sample POM Containing all Required Bundle Elements

```
<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
  http://maven.apache.org/maven-v4_0_0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <groupId>com.sonatype.sample</groupId>
  <artifactId>sample-project</artifactId>
  <packaging>jar</packaging>
  <version>1.0</version>
  <name>sample-project</name>
  <description>A Sample Project</description>
  <url>http://books.sonatype.com</url>
  <licenses>
    <license>
      <name>The Apache Software License, Version 2.0</name>
      <url>http://www.apache.org/licenses/LICENSE-2.0.txt</url>
      <distribution>repo</distribution>
    </license>
  </licenses>
  <scm>
    <connection>
      scm:git:git://github.com/sonatype/sample-project.git
    </connection>
    <url>http://github.com/sonatype/sample-project.git</url>
    <developerConnection>
      scm:git:git://github.com/sonatype-sample-project.git
    </developerConnection>
  </scm>
  <dependencies>
    <dependency>
      <groupId>junit</groupId>
      <artifactId>junit</artifactId>
      <version>3.8.1</version>
      <scope>test</scope>
    </dependency>
  </dependencies>
</project>
```

To create a bundle from a Maven project, run the repository:bundle-create goal. This goal will check the POM to see if it complies with the standards for publishing a bundle to a public repository. It will then bundle all of the components generated by a particular build.

To build a bundle that only contains the standard, unclassified component from a project, run mvn repository:bundle-create.

To generate a bundle that contains more than one component, run mvn javadoc:jar source:jar repository:bundle-create:

```
~/examples/sample-project$ mvn javadoc:jar source:jar repository:bundle-create
[INFO] Scanning for projects...
[INFO] Searching repository for plugin with prefix: 'javadoc'.
[INFO] -----
[INFO] Building sample-project
[INFO] task-segment: [javadoc:jar, source:jar, repository:bundle-create]
[INFO] -----
[INFO] [javadoc:jar {execution: default-cli}]
Loading source files for package com.sonatype.sample...
Constructing Javadoc information...
Standard Doclet version 1.6.0_15
Building tree for all the packages and classes...
...
[INFO] Preparing source:jar
[INFO] No goals needed for project - skipping
[INFO] [source:jar {execution: default-cli}]
...
```

TESTS

```
Running com.sonatype.sample.AppTest
Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.03 sec
Results :
Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO] [jar:jar {execution: default-jar}]
[INFO] Building jar: ~/temp/sample-project/target/sample-project-1.0.jar
[INFO] [repository:bundle-create {execution: default-cli}]
[INFO] The following files are marked for inclusion in the repository bundle:
0.) Done
1.) sample-project-1.0.jar
2.) sample-project-1.0-javadoc.jar
3.) sample-project-1.0-sources.jar
Please select the number(s) for any files you wish to exclude, or '0' when \
you're done. Separate the numbers for multiple files with a comma ','.
Selection:
0
[INFO] Building jar: ~/temp/sample-project/target/sample-project-1.0-bundle.jar
[INFO] -----
[INFO] BUILD SUCCESSFUL
[INFO] -----
[INFO] Total time: 11 seconds
[INFO] Finished at: Sat Oct 10 21:24:23 CDT 2009
[INFO] Final Memory: 36M/110M
[INFO] -----
```

Once the bundle has been created, there will be a bundle JAR in the target directory. As shown in the following command output, the bundle JAR contains a POM, the project's unclassified component, the javadoc component, and the sources component:

```
~/examples/sample-project$ cd target
~/examples/sample-project/target$ jar tvf sample-project-1.0-bundle.jar
0 Sat Oct 10 21:24:24 CDT 2009 META-INF/
98 Sat Oct 10 21:24:22 CDT 2009 META-INF/MANIFEST.MF
1206 Sat Oct 10 21:23:46 CDT 2009 pom.xml
2544 Sat Oct 10 21:24:22 CDT 2009 sample-project-1.0.jar
20779 Sat Oct 10 21:24:18 CDT 2009 sample-project-1.0-javadoc.jar
891 Sat Oct 10 21:24:18 CDT 2009 sample-project-1.0-sources.jar
```

Uploading an Artifact Bundle

To upload a component bundle to Nexus Repository Manager Pro, you have to have a repository target for the project configured as described in [Managing Repository Targets](#)(see page 0).

Once that is done, select *Staging Upload* from the *Build Promotion* section of the main menu. This will load the *Staging Upload* tab. Choose *Artifact Bundle* from the *Upload Mode* drop-down. The *Staging Upload* panel will switch to the form shown in *Figure 11.24, “Uploading an Artifact Bundle”*. Click on *Select Bundle to Upload...* and then select the JAR that was created with the Maven repository plugin used in the previous sections. Once a bundle is selected, click on *Upload Bundle*.

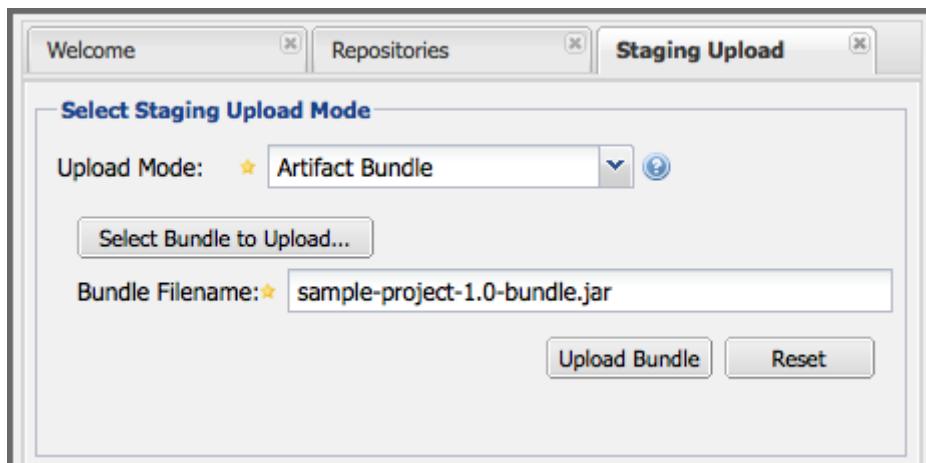


Figure 11.24. Uploading an Artifact Bundle

After a successful upload, a dialog displays the name of the created staging repository in a URL that links to the content of the repository. To view the staging repository, click on the *Staging Repositories* link in the *Build Promotion* section of the menu. You should see that the Staging Artifact Upload created and closed a new staging repository as shown in *Figure 11.25, “Staging Repository Created from Artifact Bundle Upload”*. This repository contains all of the components contained in the uploaded bundle. It allows you to promote or drop the components contained in a bundle as a single unit.

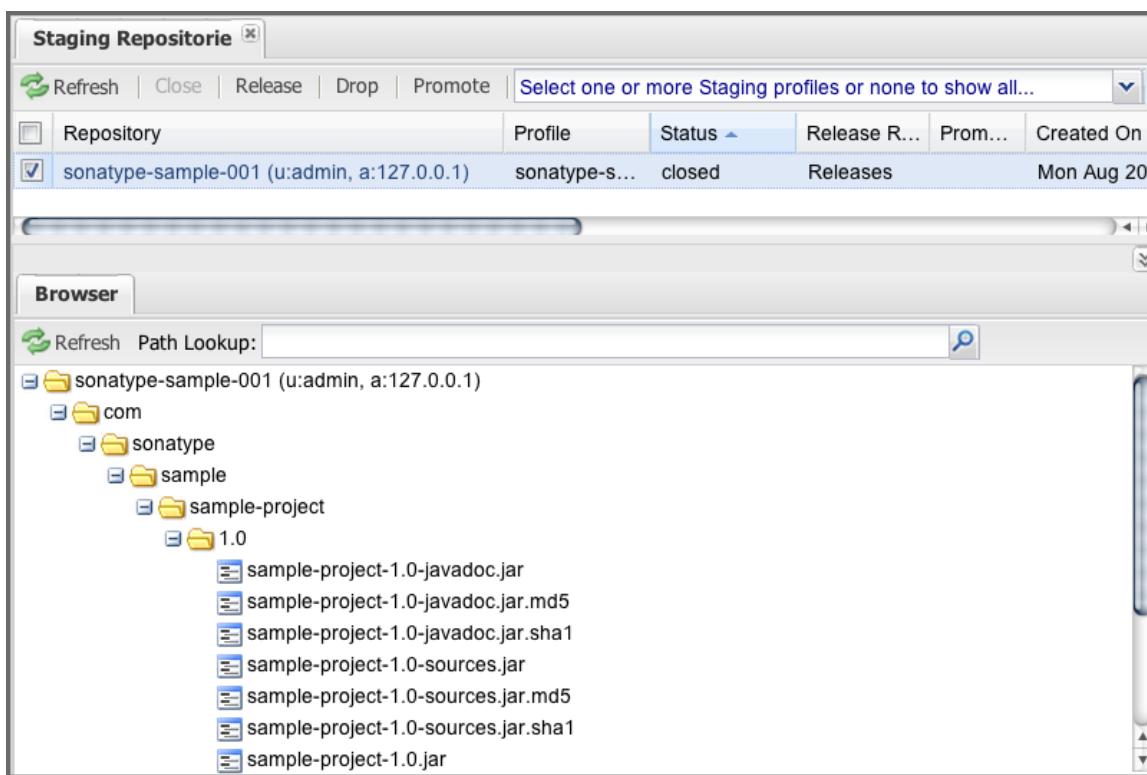


Figure 11.25. Staging Repository Created from Artifact Bundle Upload

Once the staging repository is closed, you can promote it to a Build Promotion Profile or release it to the target repository of the staging profile as documented in [Managing Staging Repositories](#)(see page 410).

Managing Maven Settings

Available in Nexus Repository Pro only

When you move an organization to a repository manager such as Nexus Repository Manager, one of the constant challenges is keeping everyone's Maven settings synchronized to ensure the repository manager server is used and any further configuration in the settings file is consistent. In addition, different users or use cases require different settings files. You can find out more about the Maven settings file in [Maven and Other Build Tools](#)(see page 215). Nexus Repository Manager Pro allows you to define templates for Maven settings stored on the server and provide them to users via the user interface or automated download.

If an administrator makes a change that requires every developer to modify his or her `~/.m2/settings.xml` file, this feature can be used to manage the distribution of Maven settings changes to the entire organization. Once you have defined a Maven settings template in Nexus Repository Manager Pro, developers can then use the Nexus M2Settings Maven Plugin to retrieve the new Maven settings file directly from Nexus Repository Manager Pro.

Overall the Maven Settings integration in Nexus Repository Pro allows you to maintain multiple settings template files on the central repository manager. You can configure settings files for different use cases, for example:

- referencing a repository group containing only approved components in the mirror section for your release or QA builds
- providing an open public group mirror reference to all of your developers for experimentation with other components.


By using the Nexus M2Settings Maven Plugin you can completely automate initial provisioning and updates of these settings files to your users.

Topics in this section:

- [Manage Maven Settings Templates](#)(see page 430)
- [Nexus M2Settings Maven Plugin](#)(see page 433)

Manage Maven Settings Templates

To manage Maven Settings templates, click on *Maven Settings* in the *Enterprise* section of the main menu on the left side of the user interface. This will load the panel shown in *Figure 12.1, “The Maven Settings Panel”*.

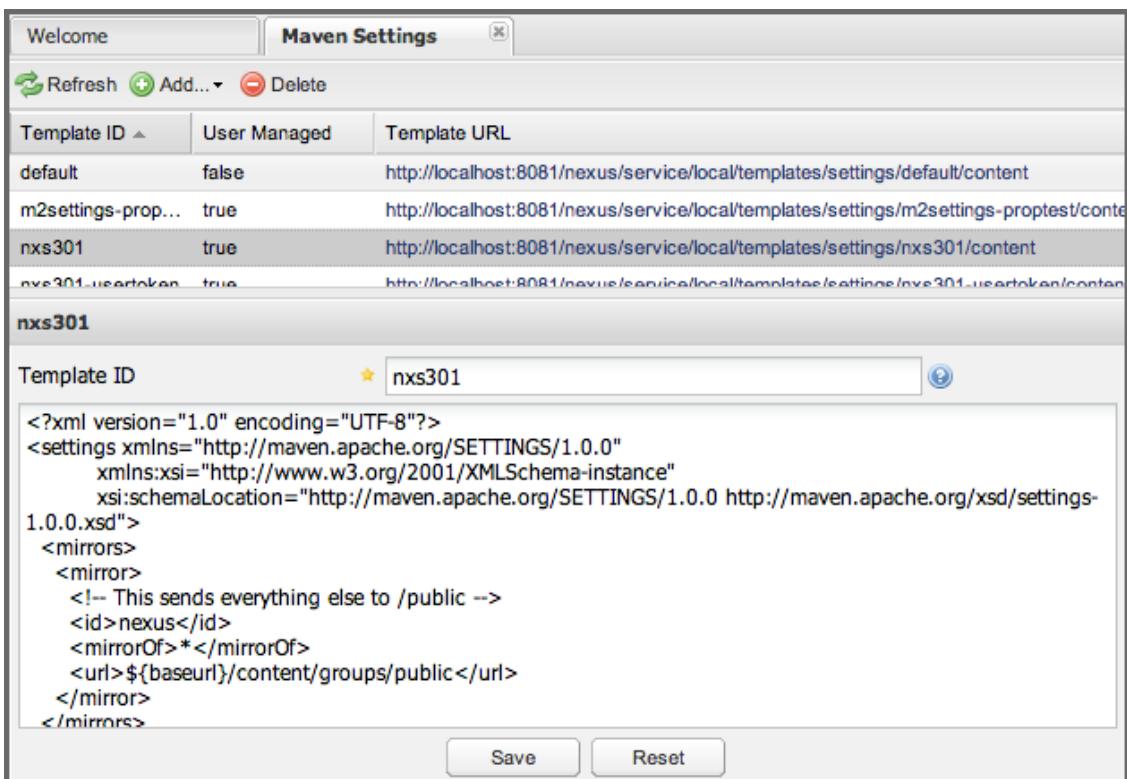

| Template ID | User Managed | Template URL |
|--------------------|--------------|--|
| default | false | http://localhost:8081/nexus/service/local/templates/settings/default/content |
| m2settings-prop... | true | http://localhost:8081/nexus/service/local/templates/settings/m2settings-proptest/content |
| nxs301 | true | http://localhost:8081/nexus/service/local/templates/settings/nxs301/content |
| nxs301-userToken | true | http://localhost:8081/nexus/service/local/templates/settings/nxs301-userToken/content |

nxs301

Template ID: nxs301

```
<?xml version="1.0" encoding="UTF-8"?>
<settings xmlns="http://maven.apache.org/SETTINGS/1.0.0"
          xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
          xsi:schemaLocation="http://maven.apache.org/SETTINGS/1.0.0 http://maven.apache.org/xsd/settings-1.0.0.xsd">
    <mirrors>
        <mirror>
            <!-- This sends everything else to /public -->
            <id>nexus</id>
            <mirrorOf>*</mirrorOf>
            <url>${baseurl}/content/groups/public</url>
        </mirror>
    </mirrors>
```

Save Reset

Figure 12.1. The Maven Settings Panel

The *Maven Settings* panel allows you to add, delete, and edit settings templates. The default template has an ID of *default* and can not be changed. It contains the recommended settings for a standard repository manager installation. To create a new Maven settings template, click on the *Add...* button and select *Settings*

Template. Once the new template is created, assign a name to the template in the *Template ID* text input and click the **Save** button.

To edit a template, click on a template that has a *User Managed* value of `true` in the list and edit the template in the tab below the list. Once you are finished editing the template, click **Save** to save the template. When editing the template you can insert some property references that will be replaced on the server with their values at request time:

baseUrl

The base URL of the repository manager installation.

userId

The user id of the user that is generating a Maven Settings file from this template.

Server side interpolation takes effect even when the download of the settings template is done with tools like `curl`. These properties can be referenced in the settings file using the syntax `${property}`:

```
<settings>
  <mirrors>
    <mirror>
      <id>nexus</id>
      <mirrorOf>*</mirrorOf>
      <url>${baseUrl}/content/groups/public</url>
    </mirror>
  ...

```

To preview a Maven settings template, click on the *Template URL* in the list. Clicking on this URL loads a dialog window that contains the Maven Settings file generated from this template. This rendered view of the Maven Settings template has all variable references replaced using the current context of the user. This is the result of running the property replacement on the repository manager.

The Nexus M2Settings Maven Plugin supports the more powerful and feature-rich, client-side replacement of properties using a `${property}` syntax.

Client-side properties supported by the Nexus M2Settings Maven Plugin are

baseUrl

The base URL of the repository manager installation.

userId or username

The username of the user that is requesting a Maven Settings file from this template.

password

The password of the user.

userToken

The formatted user token composed of name code, `:`, and pass code.

userToken.nameCode

The name code part of the user token.

userToken.passCode

The pass code part of the user token.

userToken.passCode.encrypted

The encrypted pass code part of the user token.

Client side interpolation allows you to fully populate a <server> section with the required properties either with the plain text username and password:

```
<server>
  <id>nexus</id>
  <username>$[username]</username>
  <password>$[password]</password>
</server>
```

You can also use the usertoken equivalent:

```
<server>
  <id>nexus</id>
  <!-- User-token: ${userToken} -->
  <username>$[userToken.nameCode]</username>
  <password>$[userToken.passCode]</password>
</server>
```

Alternatively you can use [Maven master-password encryption](#)²¹⁴⁴ with the master keyword in settings-security.xml:

```
<server>
  <id>nexus-client-side-interp-encrypted</id>
  <!-- Maven master password encrypted user token password -->
  <username>$[userToken.nameCode]</username>
  <password>$[userToken.passCode.encrypted]</password>
</server>
```

The usage of the .encrypted key results in values similar to the following snippet:

²¹⁴⁴ <http://maven.apache.org/guides/mini/guide-encryption.html>

```
<server>
  <id>nexus-client-side-interp-encrypted</id>
  <!-- master password encrypted user token password -->
  <username>KOYC8Q76</username>
  <password>{fsx2f...}</password>
</server>
```

⚠️ `userToken.*` properties are only expanded to values if the User Token feature as documented in [Security Setup with User Tokens](#)(see page 0) is enabled and configured.

Nexus M2Settings Maven Plugin

Once you have defined a set of Maven templates, you can use the Nexus M2Settings Maven Plugin to distribute changes to the settings file to the entire organization.

Running the Nexus M2Settings Maven Plugin

To invoke a goal of the Nexus M2Settings Maven Plugin, you will initially have to use a fully qualified groupId and artifactId in addition to the goal. An example invocation of the download goal is:

```
mvn org.sonatype.plugins:nexus-m2settings-maven-plugin:download
```

In order to be able to use an invocation with the simple plugin prefix like this

```
mvn nexus-m2settings:download
```

you have to have the appropriate plugin group `org.sonatype.plugins` configured in your Maven Settings file:

```
<settings>
  ...
  <pluginGroups>
    <pluginGroup>org.sonatype.plugins</pluginGroup>
  </pluginGroups>
  ...
```

An initial invocation of the download goal will update your settings file with a template from Nexus Repository Manager Pro. The default template in Nexus Repository Manager Pro adds the `org.sonatype.plugins` group to the `pluginGroups`, so you will not have to do this manually. It is essential that you make sure

that any new, custom templates also include this plugin group definition. Otherwise, there is a chance that a developer could update his or her Maven settings and lose the ability to use the Nexus M2Settings Maven Plugin with the short identifier.

- ⓘ This practice of adding pluginGroups to the settings file is useful for your own Maven plugins or other plugins that do not use the default values of `org.apache.maven.plugins` or `org.codehaus.mojo` as well, since it allows the short prefix of a plugin to be used for an invocation outside a Maven project using the plugin.

The download goal of the Nexus M2Settings Maven Plugin downloads a Maven Settings file from Nexus Repository Manager Pro and stores it locally. The default file name for the settings file is the Maven default for the current user of `~/.m2/settings.xml` file. If you are replacing a Maven Settings file, this goal can be configured to make a backup of an existing Maven Settings file.

- ⚠ The download with the Nexus Maven Plugin is deprecated and has been replaced with the Nexus M2Settings Maven Plugin.

Configuring Nexus M2Settings Maven Plugin

The download goal of the Nexus M2Settings Maven plugin prompts the user for all required parameters, which include the server URL, the username and password, and the template identifier.

- ⚠ For security reasons, the settings download requires an HTTPS connection to your repository manager instance. If you are running the repository manager via plain HTTP you will have to set the `secure` parameter to `false`.

The required configuration parameters can either be supplied as invocation parameters or when prompted by the plugin and are:

nexusUrl

Points to the repository manager installation's base URL. If you have installed the repository manager on your local machine, this would be `http://localhost:8081/nexus/`. Access via HTTP only works with the secure configuration parameter set to `false`.

username

The username to use for authenticating to the repository manager. Default value is the Java System property `user.name`.

password

The password to use for authenticating to the repository manager.

templateId

The Template ID for the settings template as defined in the user interface.

Additional general configuration parameters are related to the security of the transfer and the output file:

secure

By default set to true , this parameter forces a URL access with HTTPS. Overriding this parameter and setting it to false allows you to download a settings file via HTTP. When using this override it is important to keep in mind that the username and password transferred via HTTP can be intercepted.

outputFile

Defines the filename and location of the downloaded file and defaults to the standard `~/.m2/settings.xml`.

backup

If true and there is a pre-existing `settings.xml` file in the way of this download, back up the file to a date-stamped filename, where the specific format of the timestamp is given by the `backupTimestampFormat` parameter. Default value is `true`.

backup.timestampFormat

When backing up an existing `settings.xml` file, use this date format in conjunction with `SimpleDateFormat` to construct a new filename of the form: `settings.xml-${format}`. Date stamps are used for backup copies of the `settings.xml` to avoid overwriting previously backed up settings files. This protects against the case where the download goal is used multiple times with incorrect settings, where using a single static backup file name would destroy the original, preexisting settings. Default value is: `yyyMMddHHmmss`.

encoding

Use this optional parameter to define a non-default encoding for the settings file.

As a Maven plugin, the Nexus M2Settings Maven Plugin relies on Apache Maven execution and on the fact that the Central Repository can be contacted for downloading the required plugins and dependencies. If this access is only available via a proxy server you can configure the proxy related parameters `proxy`, `proxy.protocol`, `proxy.host`, `proxy.port`, `proxy.username`, and `proxy.password`.

Downloading Maven Settings

You can download the Maven Settings from Nexus Repository Manager Pro with a simple invocation, and rely on the plugin to prompt you for the required parameters:

```
$ mvn org.sonatype.plugins:nexus-m2settings-maven-plugin:download
[INFO] Scanning for projects...
[INFO]
[INFO] -----
[INFO] Building Maven Stub Project (No POM) 1
[INFO] -----
[INFO]
[INFO] --- nexus-m2settings-maven-plugin:1.6.2:download (@default-cli) @ standalone-pom ---
Nexus URL: https://localhost:8081/nexus
Username [manfred]: admin
Password: *****
[INFO] Connecting to: https://localhost:8081/nexus (as admin)
[WARNING] Insecure protocol: https://localhost:8081/nexus/
[INFO] Connected: {pro} {version-exact}
Available Templates:
0) default
1) example
Select Template: 0
[INFO] Fetching content for templateId: default
[INFO] Backing up: /Users/manfred/.m2/settings.xml to: /Users/manfred/.m2/settings.xml-20130404120146
[INFO] Saving content to: /Users/manfred/.m2/settings.xml
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 29.169s
[INFO] Finished at: Thu Apr 04 12:01:46 PDT 2013
[INFO] Final Memory: 12M/153M
[INFO] -----
```

If your repository manager is hosted internally and does not use HTTPS you can download a settings file with

```
$ mvn org.sonatype.plugins:nexus-m2settings-maven-plugin:download -
Dsecure=false
```

As displayed, the plugin will query for all parameters and display a list of the available templates.

Alternatively, you can specify the username, password, URL, and template identifier on the command line.

```
$ mvn org.sonatype.plugins:nexus-m2settings-maven-plugin:download \
-DnexusUrl=https://localhost:8443/nexus \
-Dusername=admin \
-Dpassword=admin123 \
-DtemplateId=default
```

Enabling proxy access with `-Dproxy=true` will trigger the plugin to query the necessary configuration:

```
[INFO] Connecting to: https://localhost:8443/nexus (as admin)
Proxy Protocol:
0) http
1) https
Choose: 1
Proxy Host: myproxy.example.com
Proxy Port: 9000
Proxy Authentication:
0) yes
1) no
Choose: 0
Proxy Username [manfred]: proxy
Proxy Password: *****
[INFO] Proxy enabled: proxy@https://myproxy.example.com:9000
```

In some scenarios you have to get an initial settings file installed on a computer that does not have internet access and, therefore, cannot use the Maven plugin. For this first initial configuration that connects the computer to the repository manager for following Maven invocations, a simple HTTP GET command to retrieve an unmodified settings file can be used:

```
curl -u admin:admin123 -X GET "http://localhost:8081/nexus/service/local/templates/settings/default/
content"
> ~/.m2/settings.xml
```

Modify the commandline above by changing the username:password supplied after -u and adapting the URL to the URL visible in the user interface. This invocation will however not replace parameters on the client side, so you will have to manually change any username or password configuration, if applicable.

OSGi Bundle Repositories

Introduction

Nexus Repository Manager supports the OSGi Bundle Repository format. The OSGi Bundle format is defined by the OSGi RFC 112 "Bundle Repository." It is a format for the distribution of OSGi bundles which includes any components that are described by the OSGi standards set forth in RFC 112. An OBR repository has a single XML file that completely describes the contents of the entire repository. Nexus Repository Manager can read this OBR repository XML and create proxy repositories that can download OSGi bundles from remote OBR repositories. Nexus Repository Manager can also act as a hosting platform for OSGi bundles. You can configure your builds to publish OSGi bundles to Nexus Repository Manager, and then expose these bundle repositories to internal or external developers using Nexus Repository Manager as a publishing and distribution platform.

Nexus Repository Manager can also act as a bridge between Maven repositories and OSGi bundle repositories. When you configure a virtual OBR repository that uses a Maven 2 repository as a source

repository, Nexus Repository Manager will expose components with the appropriate metadata from the Maven repository as OSGi bundles. In this way, you can unify your OSGi and non-OSGi development efforts and publish components with the appropriate OSGi metadata to Nexus Repository Manager. Non-OSGi clients can retrieve software components from a Maven repository, and OSGi aware clients can retrieve OSGi bundles from a virtual OBR repository.

The following sections detail the procedures for creating and managing OBR repositories. Nexus Repository Manager Pro has OBR support installed by default. Prior to any usage in Nexus Repository Manager OSS the Nexus OBR Plugin needs to be installed. You can download the `-bundle.zip` file for your specific version from the Central Repository:

- [Nexus OBR Plugin](#)²¹⁴⁵

Extract the file into `sonatype-work/nexus/plugin-repository` and restart the repository manager. Ensure to repeat the step for any upgrades.

Proxy OSGi Bundle Repositories

Nexus Repository Manager can proxy an OSGi Bundle Repository using the OBR repository XML as the remote storage location. To create a new proxy OBR repository access the *Repositories* view from the *Views/Repositories* submenu and click the *Add..* button above the list of repositories and choose *Proxy Repository* from the drop-down of repository types.

In the *New Proxy Repository* configuration tab, supply a *Repository ID* and a *Repository Name* and select *OBR* as the *Provider*.

Then enter the URL to the remote repository OBR XML as the *Remote Storage Location* then click *Save*. In *Figure 13.1, “Creating an OSGi Bundle Proxy Repository”* a sample configuration is created for a proxy Apache Felix OBR repository.

²¹⁴⁵ <https://search.maven.org/search?q=a:nexus-obr-plugin>

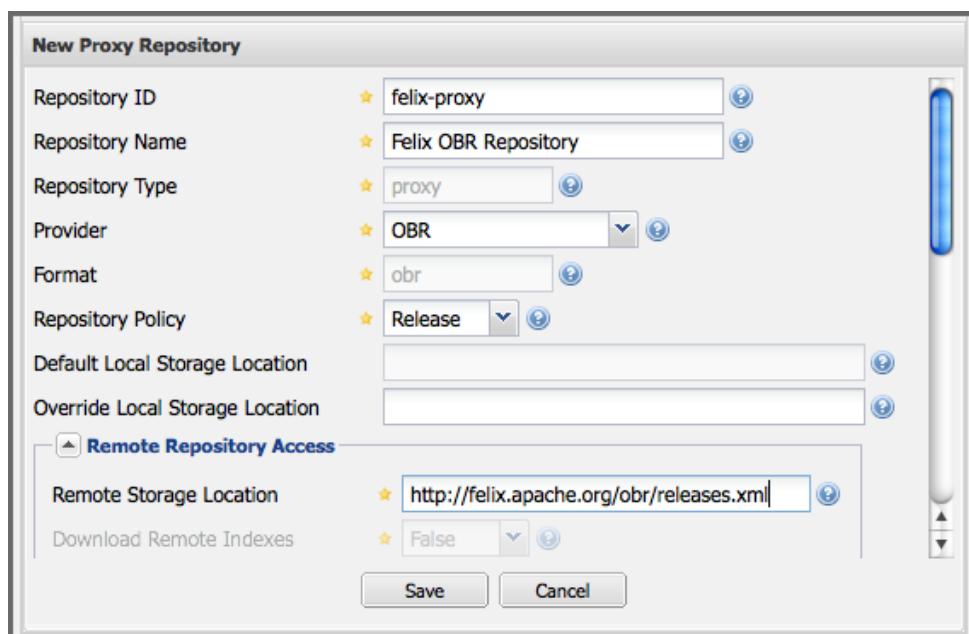


Figure 13.1. Creating an OSGi Bundle Proxy Repository

To verify that the OBR proxy repository has been properly configured, you can then load the OBR XML from Nexus Repository Manager. If Nexus Repository Manager is properly configured, you will be able to load the `obr.xml` by navigating to the `.meta` directory:

```
$curl http://localhost:8081/nexus/content/repositories/felix-proxy/.meta/obr.xml
<?xml version='1.0' encoding='utf-8'?>
<?xml-stylesheet type='text/xsl' href='http://www2.osgi.org/www/obr2html.xsl'?>
<repository name='Felix OBR Repository' lastmodified='1247493075615'>
    <resource id='org.apache.felix(javax.servlet/1.0.0'
        presentationname='Servlet 2.1 API'
        symbollicname='org.apache.felix(javax.servlet'
        uri='../../bundles/org.apache.felix(javax.servlet-1.0.0.jar'
        version='1.0.0'>
        <description>
            Servlet 2.1 API
        </description>
        <documentation>
            http://www.apache.org/
        </documentation>
        <license>
            http://www.apache.org/licenses/LICENSE-2.0.txt
        </license>
        ...
    
```

Hosted OSGi Bundle Repositories

Nexus Repository Manager can host an OSGi Bundle Repository, providing you with a way to publish your own OBR bundles. To create a hosted OBR repository access the *Repositories* view from the *Views*/

Repositories submenu and click the *Add..* button above the list of repositories and choose *Hosted Repository* from the drop-down of repository types.

In the *New Hosted Repository* configuration tab, supply a *Repository ID* and a *Repository Name* and select *OBR* as the *Provider*.

Then enter the URL to the remote repository OBR XML as the *Remote Storage Location* then click *Save*.

In *Figure 13.2, “Creating a Hosted OSGi Bundle Repository”* a sample configuration is used to create a hosted OBR repository.

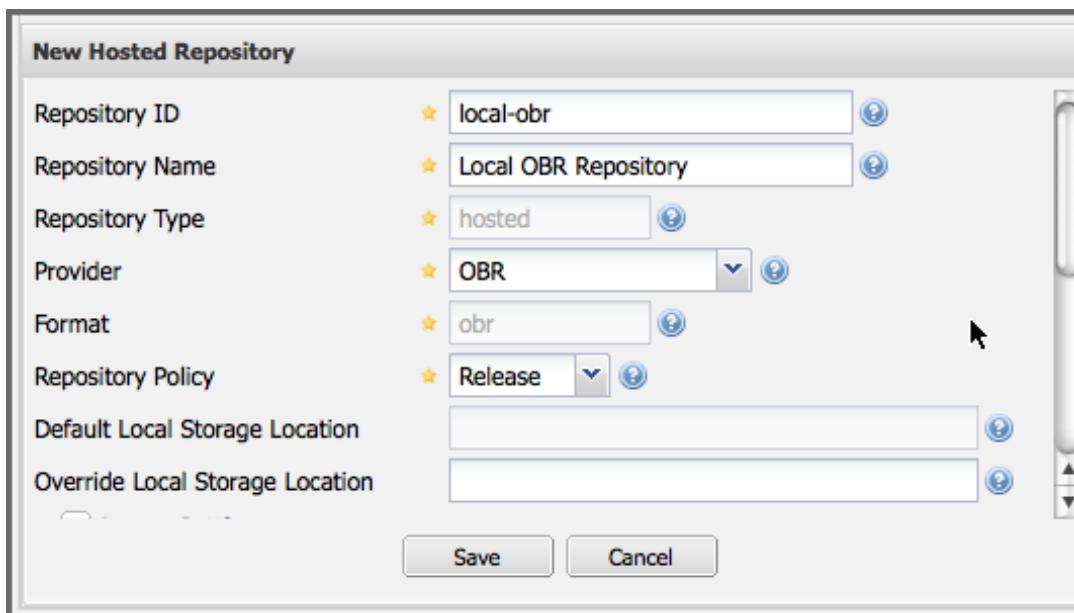


Figure 13.2. Creating a Hosted OSGi Bundle Repository

Virtual OSGi Bundle Repositories

Nexus Repository Manager can be configured to convert a traditional Maven repository into an OSGi Bundle repository using a virtual OBR repository. To configure a virtual OBR repository, create a new *Virtual Repository* in the *Repositories* administration area providing a *Repository ID* and *Repository Name* as well as the *Source Nexus Repository ID* setting the repository you want to expose as OBR. Finally set the *Provider* to OBR and click *Save*.

In *Figure 13.3, “Creating a Virtual OSGi Bundle Repository from a Maven Repository”* a sample configuration is used to create a virtual OBR repository that transforms the proxy repository for Maven Central into an OBR repository.

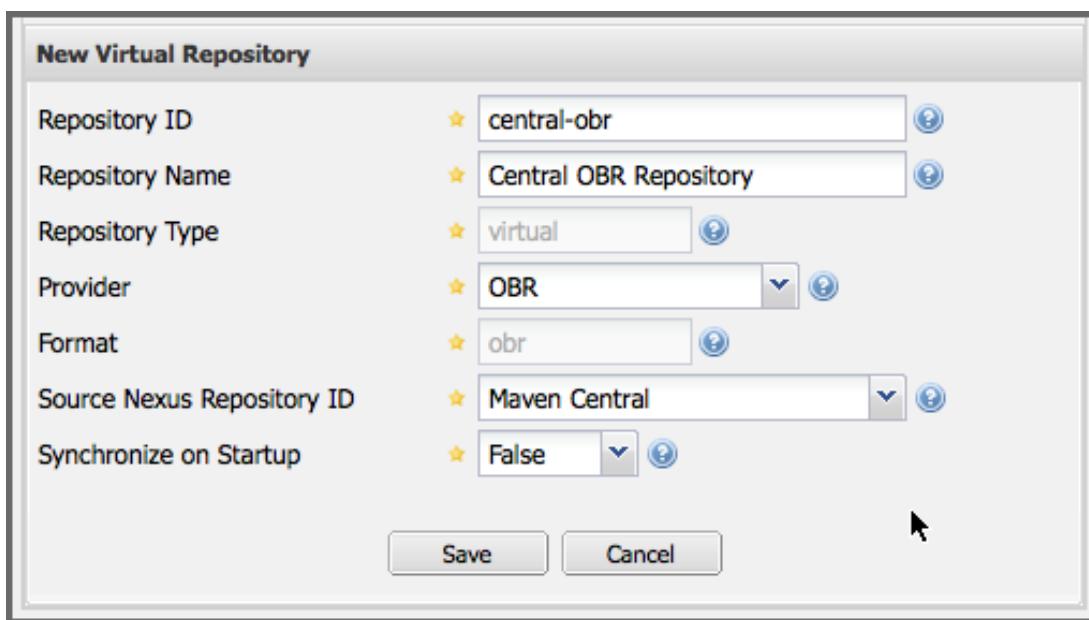


Figure 13.3. Creating a Virtual OSGi Bundle Repository from a Maven Repository

Grouping OSGi Bundle Repositories

Just like the repository manager can group Maven repositories, Eclipse update sites, and P2 repositories, it can also be configured to group OSGi Bundle Repositories. To group OSGi bundle repositories, create a new *Repository Group* and set the *Provider* to *OBR* and select the repositories you want to group after providing a *Group ID* and a *Group Name*.

Figure 13.4, “Creating a New OSGi Bundle Repository Group” shows an example of the a new repository group that contains a hosted OSGi Bundle repository, a virtual OSGi Bundle repository, and a OSGi Bundle proxy repository.

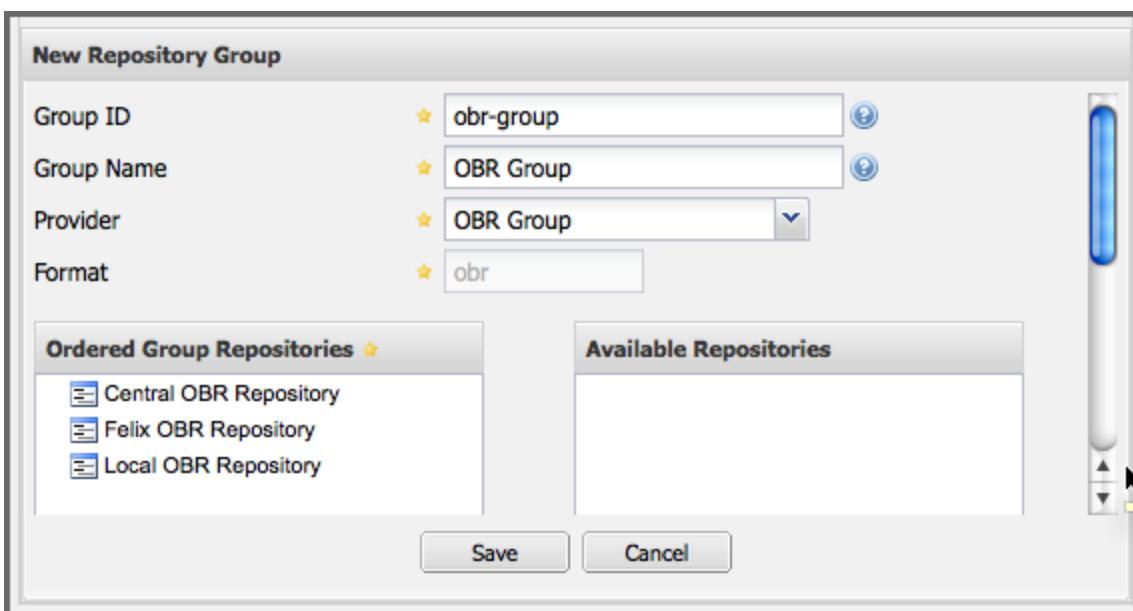


Figure 13.4. Creating a New OSGi Bundle Repository Group

P2 Repositories

Available in Nexus Repository Pro only

Introduction

Nexus Repository Manager supports the P2 Repository format. The P2 repository format is a provisioning platform for Eclipse components. For more information about the P2 repository format, see the [Equinox P2 documentation](#)²¹⁴⁶ on the Eclipse Wiki.

The following sections detail the procedures for creating and managing P2 repositories.

Nexus Repository Manager Pro has P2 support installed by default. Prior to any usage in Nexus Repository Manager OSS the Nexus P2 Bridge Plugin and the Nexus P2 Repository Plugin need to be installed. You can download the bundle.zip files for your specific version from the Central Repository:

- [Nexus P2 Repository Plugin](#)
- [Nexus P2 Bridge Plugin](#)

Extract the two files into `sonatype-work/nexus/plugin-repository` and restart the repository manager.

²¹⁴⁶ <http://wiki.eclipse.org/Equinox/p2>

i P2 processing requires larger amounts of memory. We suggest to increase the configured Java heap memory by increasing wrapper.java.maxmemory to a minimum of 2048. This configuration value can be found in \$NEXUS_HOME/bin/jsw/conf/wrapper.conf.

Proxy P2 Repositories

Nexus Repository Manager can proxy a P2 Repository. To create a new proxy P2 repository:

1. Click *Repositories* in the *Views/Repositories* menu.
2. Click the *Add..* button above the list of repositories, and choose *Proxy Repository* from the drop-down of repository types.
3. In the *New Proxy Repository* window,
 - a. Select *P2* as the *Provider*.
 - b. Supply a *Repository ID* and a *Repository Name*.
 - c. Enter the URL to the remote P2 repository as the *Remote Storage Location*.
 - d. Click *Save*.

Figure 14.1, “Creating a P2 Proxy Repository” provides a sample configuration used to create a proxy of the Indigo Simultaneous Release P2 repository.

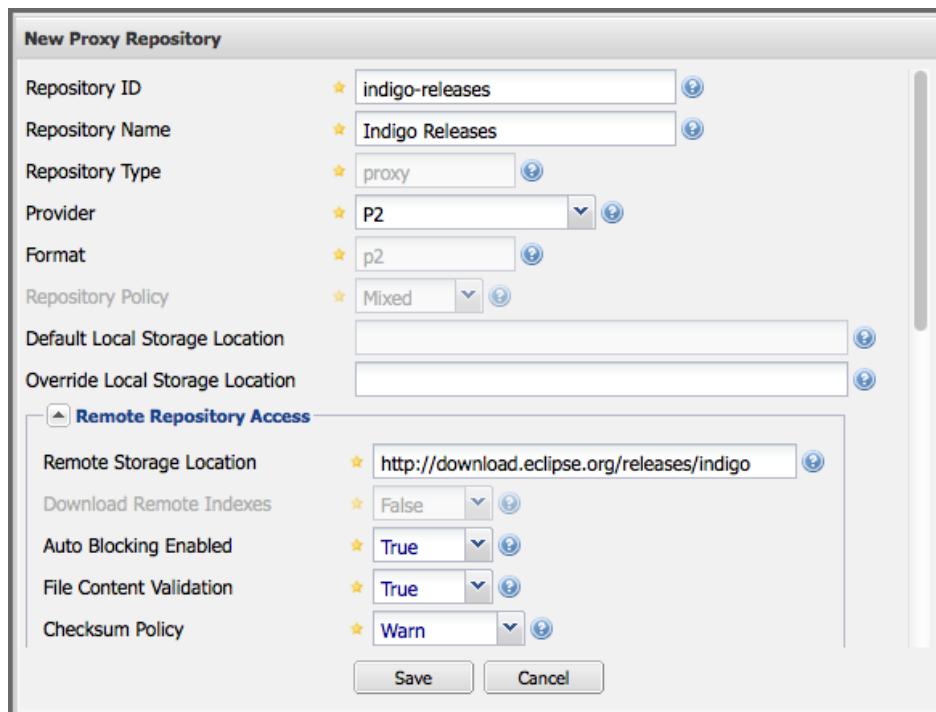


Figure 14.1. Creating a P2 Proxy Repository

Grouping P2 Repositories

Just like Nexus Repository Manager can group Maven repositories and OBR repositories, it can also be configured to group P2 Repositories. To group P2 repositories:

1. Click *Repositories* in the *Views/Repositories* menu.
2. Click the *Add..* button above the list of repositories, and choose *Repository Group* from the drop-down of repository types.
3. In the *New Repository Group* window,
 - a. Select *P2* as the *Provider*.
 - b. Drag and drop one or more P2 repositories into the new group.
 - c. Supply a *Group ID* and a *Group Name*.
 - d. Click *Save*.

Figure 14.2, “Creating a New P2 Repository Group” shows an example of a repository group that contains two P2 proxy repositories.

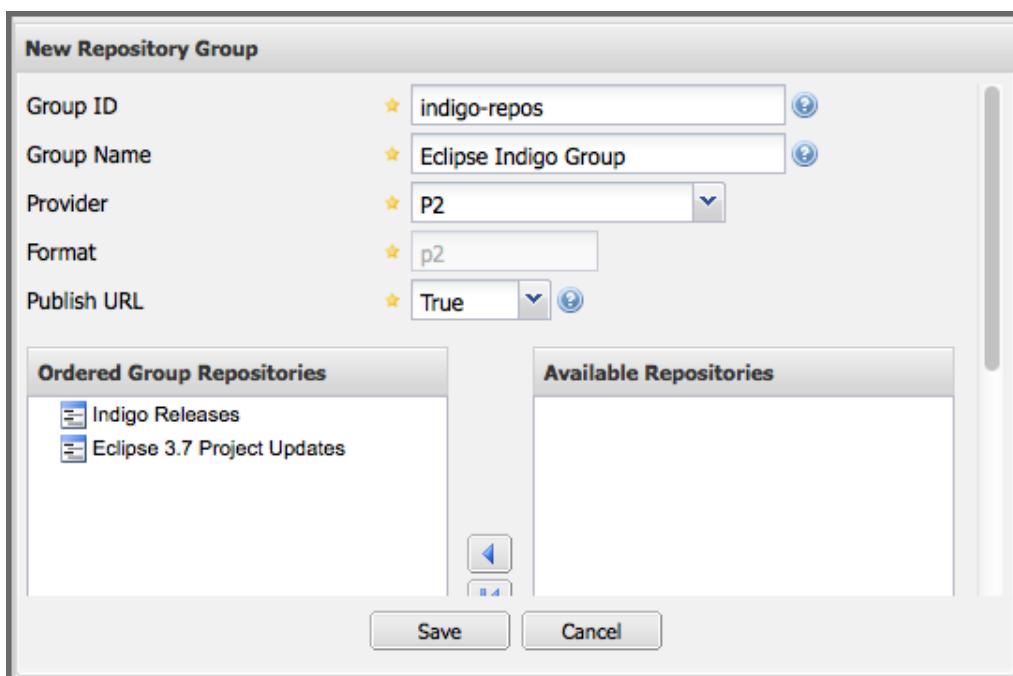


Figure 14.2. Creating a New P2 Repository Group

.NET Package Repositories with NuGet

 **Available in Nexus Repository OSS and Nexus Repository Pro**

Introduction

With the creation of the NuGet project, a package management solution for .NET developers has become available. Similar to Apache Maven dependency management for Java developers, NuGet makes it easy to add, remove, and update libraries and tools in Visual Studio projects that use the .NET Framework.

The project websites at www.nuget.org²¹⁴⁷ and <https://github.com/NuGet/Home> host tool downloads and detailed documentation as well as links to further resources and provide a repository and features to upload your open source NuGet packages. With the NuGet Gallery a repository of open source libraries and tools is available and the need for repository management arises.

- ⚠ With the release of version 2.9, NuGet support is available in Nexus Repository Manager Pro and Nexus Repository Manager OSS.

Nexus Repository Manager Pro and Nexus Repository Manager OSS support the NuGet repository format for hosted and proxy repositories. They also supports aggregation of NuGet repositories and conversion of other repositories containing .nupkg components to the NuGet format. This allows you to improve collaboration and control, while speeding up .NET development, facilitating open source libraries and sharing of internal component across teams. When you standardize on a single repository for all your development and use it for internal components as well, you will get all the benefits of using a repository manager when working in the .NET architecture.

To share a library or tool with NuGet, you create a NuGet package and store it in the repository manager-based NuGet repository. Similarly, you can use packages others have created and made available in their NuGet repositories by proxying them or downloading the packages and installing them in your own hosted repository for third party packages.

- ⚠ Users can enable Repository Health Check on a repository using the NuGet format to retrieve all metadata from components in the repository, such as security and license.

The NuGet Visual Studio extension allows you to download the package from the repository and install it in your Visual Studio project or solution. NuGet copies everything and makes any required changes to your project setup and configuration files. Removing a package will clean up any changes as required.

²¹⁴⁷ <http://www.nuget.org>

- ⓘ Using NuGet repositories benefits from a larger memory size available to the repository manager. This memory allocation can be configured in `wrapper.conf` as documented in [Running\(see page 185\)](#) (the [Installation and Running\(see page 182\)](#) section).


NuGet Proxy Repositories

The NuGet Gallery is the central repository used by all package authors and consumers. To reduce duplicate downloads and improve download speeds for your developers and CI servers, you should proxy the NuGet Gallery with the repository manager. If you use other external repositories, you should also proxy them as well.

To proxy an external NuGet repository, you simply create a new Proxy Repository as documented in [Managing Repositories\(see page 0\)](#). The Provider has to be set to *NuGet*. The *Remote Storage Location* has to be set to the URL of the remote repository you want to proxy. The URL for the main NuGet Gallery repository is

```
https://www.nuget.org/api/v2/
```

A complete configuration for proxying the NuGet Gallery is visible in *Figure 15.1, “NuGet Proxy Repository Configuration for the NuGet Gallery”*.

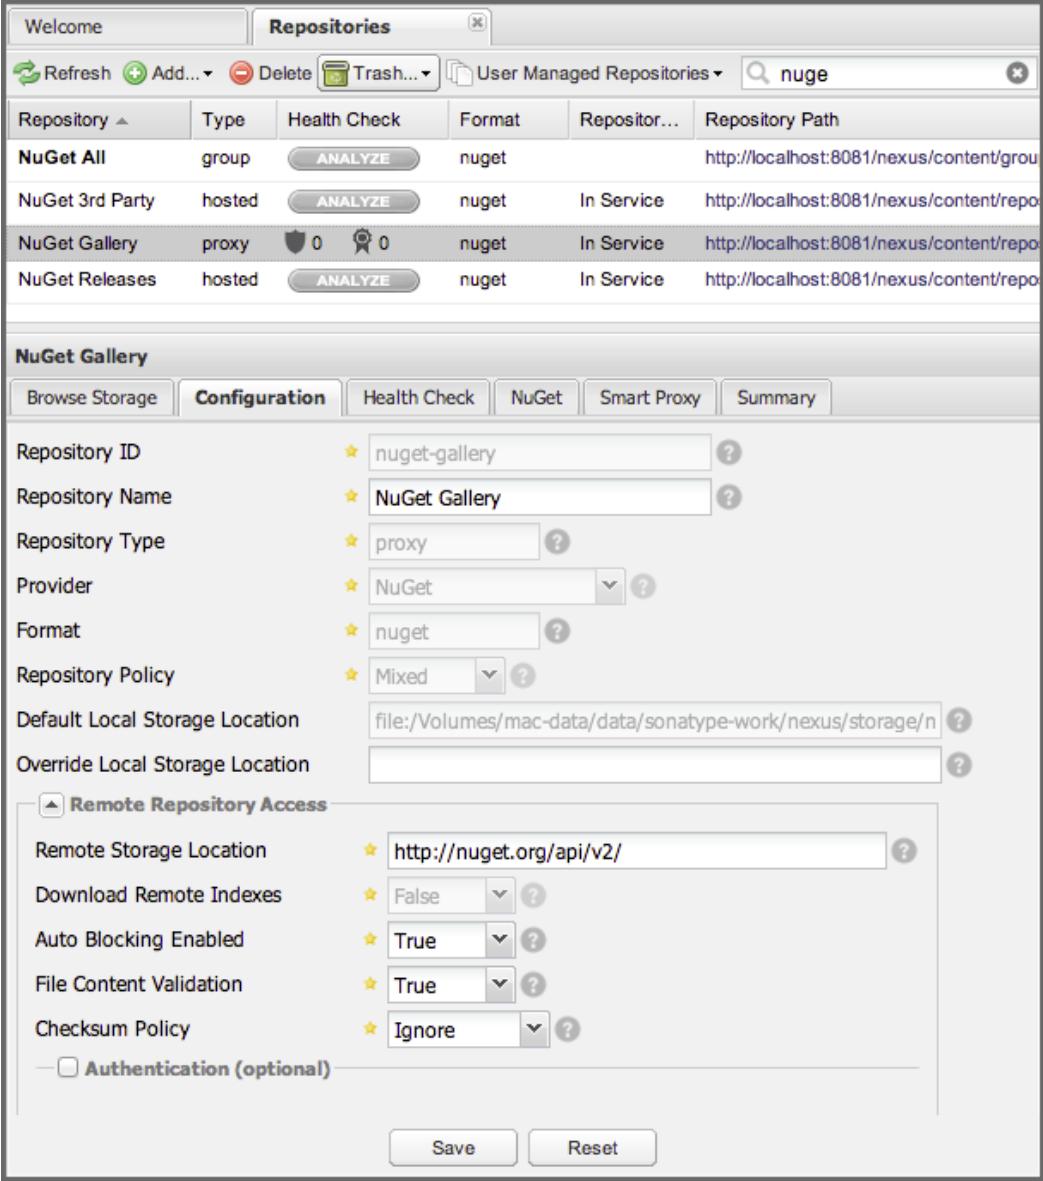

The screenshot shows the Nexus Repository Manager 2 interface. At the top, there's a header with 'Welcome' and 'Repositories'. Below the header is a toolbar with 'Refresh', 'Add...', 'Delete', 'Trash...', 'User Managed Repositories', and a search bar containing 'nuget'. A 'NuGet' icon is also present in the toolbar.

The main area displays a table of repositories:

| Repository | Type | Health Check | Format | Repository Path | |
|-----------------|--------|----------------|--------|---|---|
| NuGet All | group | ANALYZE | nuget | http://localhost:8081/nexus/content/groups/public | |
| NuGet 3rd Party | hosted | ANALYZE | nuget | In Service | http://localhost:8081/nexus/content/repositories/nuget |
| NuGet Gallery | proxy | 0 🏅 0 | nuget | In Service | http://localhost:8081/nexus/content/repositories/nuget |
| NuGet Releases | hosted | ANALYZE | nuget | In Service | http://localhost:8081/nexus/content/repositories/releases |


Below the table, a section titled 'NuGet Gallery' contains configuration tabs: 'Configuration' (selected), 'Health Check', 'NuGet', 'Smart Proxy', and 'Summary'. The 'Configuration' tab shows the following settings:

- Repository ID: nuget-gallery
- Repository Name: NuGet Gallery
- Repository Type: proxy
- Provider: NuGet
- Format: nuget
- Repository Policy: Mixed
- Default Local Storage Location: file:/Volumes/mac-data/data/sonatype-work/nexus/storage/nuget
- Override Local Storage Location: (empty)
- Remote Repository Access:
 - Remote Storage Location: http://nuget.org/api/v2/
 - Download Remote Indexes: False
 - Auto Blocking Enabled: True
 - File Content Validation: True
 - Checksum Policy: Ignore
- Authentication (optional): (checkbox is unchecked)

At the bottom of the configuration panel are 'Save' and 'Reset' buttons.

Figure 15.1. NuGet Proxy Repository Configuration for the NuGet Gallery

The repository configuration for a NuGet proxy repository has an additional tab titled *NuGet* as visible in *Figure 15.2, “NuGet Gallery with Package Source URL”*. It displays the Package Source URL that is the URL where the repository is available as a NuGet repository.

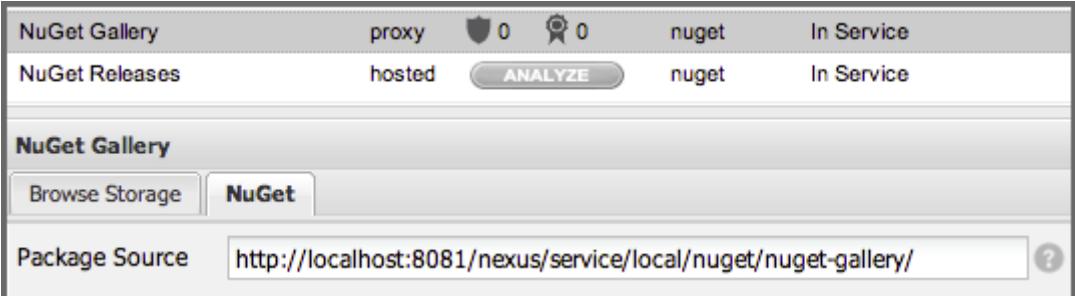

The screenshot shows the 'NuGet Gallery' configuration page. At the top, it lists two repositories:

| | | | | |
|----------------|--------|----------------|-------|------------|
| NuGet Gallery | proxy | 0 🏅 0 | nuget | In Service |
| NuGet Releases | hosted | ANALYZE | nuget | In Service |

Below the table, a section titled 'NuGet Gallery' contains tabs: 'Browse Storage' (selected) and 'NuGet'. The 'NuGet' tab is currently inactive.

The 'Package Source' field is populated with the URL: <http://localhost:8081/nexus/service/local/nuget/nuget-gallery/>.

Figure 15.2. NuGet Gallery with Package Source URL

By default, searches in NuGet repositories in the repository manager are passed through to the remote repositories, and the search results are merged with internal search results and included in an internally managed index. This merging has to make some assumptions to generate component counts.

NuGet Hosted Repositories

A hosted repository for NuGet can be used to upload your own packages as well as third-party packages. It is good practice to create two separate hosted repositories for these purposes. To create a NuGet hosted repository, simply create a new *Hosted Repository* and set the *Provider* to *NuGet*. A sample configuration for an internal releases NuGet hosted repository is displayed in *Figure 15.3, “Example Configuration for a NuGet Hosted Repository for Release Packages”*.


The screenshot shows the 'Configuration' tab for a 'hosted' repository named 'nuget-releases'. The configuration includes:

- Repository ID:** nuget-releases
- Repository Name:** NuGet Releases
- Repository Type:** hosted
- Provider:** NuGet
- Format:** nuget
- Repository Policy:** Mixed
- Default Local Storage Location:** file:/Volumes/mac-data/data/sonatype-work/1
- Override Local Storage Location:** (empty)
- Access Settings:**
 - Deployment Policy:** Disable Redeploy
 - Allow File Browsing:** True
 - Include in Search:** False
 - Publish URL:** True
- Expiration Settings:**
 - Not Found Cache TTL:** 1440 minutes

At the bottom are 'Save' and 'Reset' buttons.

Figure 15.3. Example Configuration for a NuGet Hosted Repository for Release Packages

Besides the NuGet tab, the configuration for the repository has a NuPkg Upload tab as displayed in Figure 15.4, “The NuPkg Upload Panel for a Hosted NuGet Repository” that allows you to manually upload one or multiple packages.

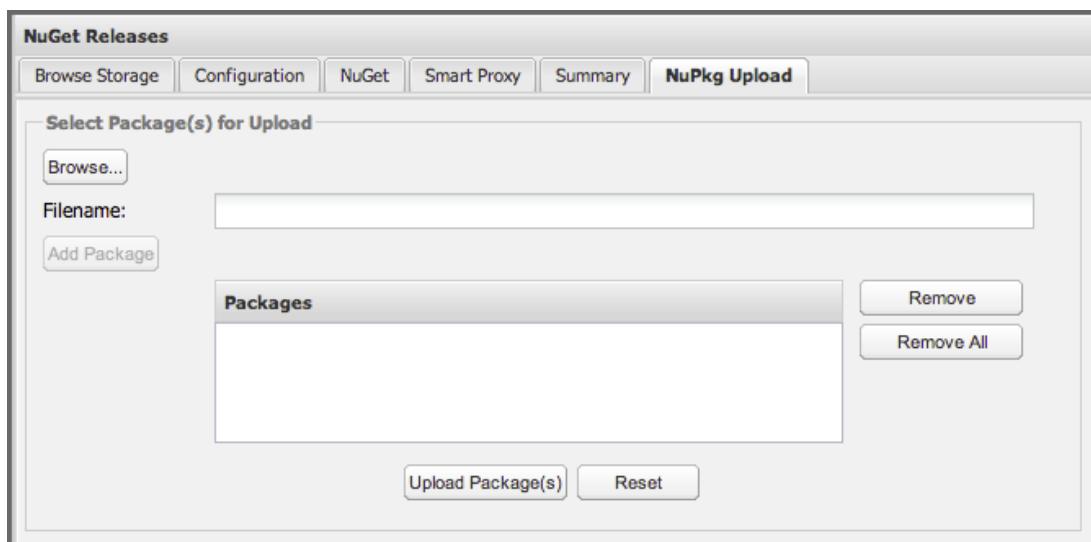**Figure 15.4. The NuPkg Upload Panel for a Hosted NuGet Repository**

The NuGet feed is immediately updated as packages are deployed or deleted from the host repository. To rebuild the feed for a hosted NuGet repository you can manually schedule a *Rebuild NuGet Feed* task.

NuGet Virtual Repositories

If you have deployed NuGet packages to a Maven repository in the past, you can expose them to Visual Studio by creating a virtual repository as documented in [Managing Repositories](#)(see page 0) and setting the *Provider* to NuGet. The setup displayed in Figure 15.5, “A Virtual NuGet Repository for the Releases Repository” shows a virtual repository configured to expose the content of the regular Maven Releases repository as a NuGet repository, so that NuGet can access any NuGet packages deployed to the releases repository.

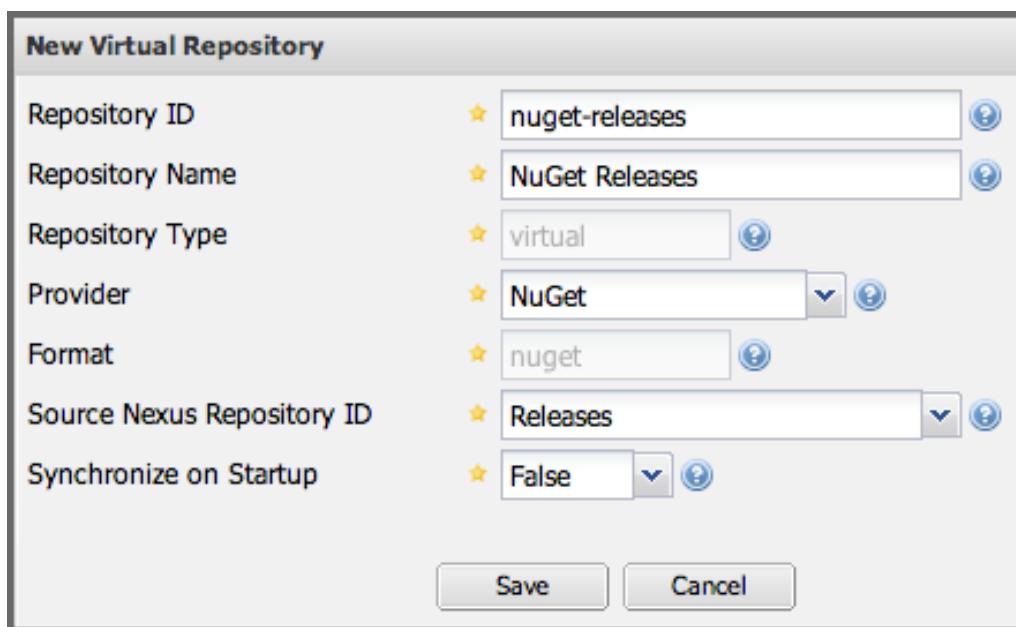


Figure 15.5. A Virtual NuGet Repository for the Releases Repository

The NuGet feed is immediately updated as packages are deployed or deleted from the shadowed repository. To rebuild the feed for a virtual NuGet repository, you can manually schedule a Synchronize Shadow Repository task.

NuGet Group Repositories

A repository group is the recommended way to expose all your NuGet repositories to your users, without needing any further client side configuration. A repository group allows you to expose the aggregated content of multiple proxy and hosted repositories with one URL to your tools. This is possible for NuGet repositories by creating a new *Repository Group* with the *Provider* set to NuGet as documented in [Managing Repository Groups](#)(see page 0).

A typical, useful example would be to group the proxy repository that proxies the NuGet Gallery, a NuGet, hosted repository with internal software packages and another NuGet, hosted repository with third-party packages. The configuration for such a setup is displayed in *Figure 15.6, “A Public NuGet Group Combining a Proxy and Two Hosted Repositories”*.

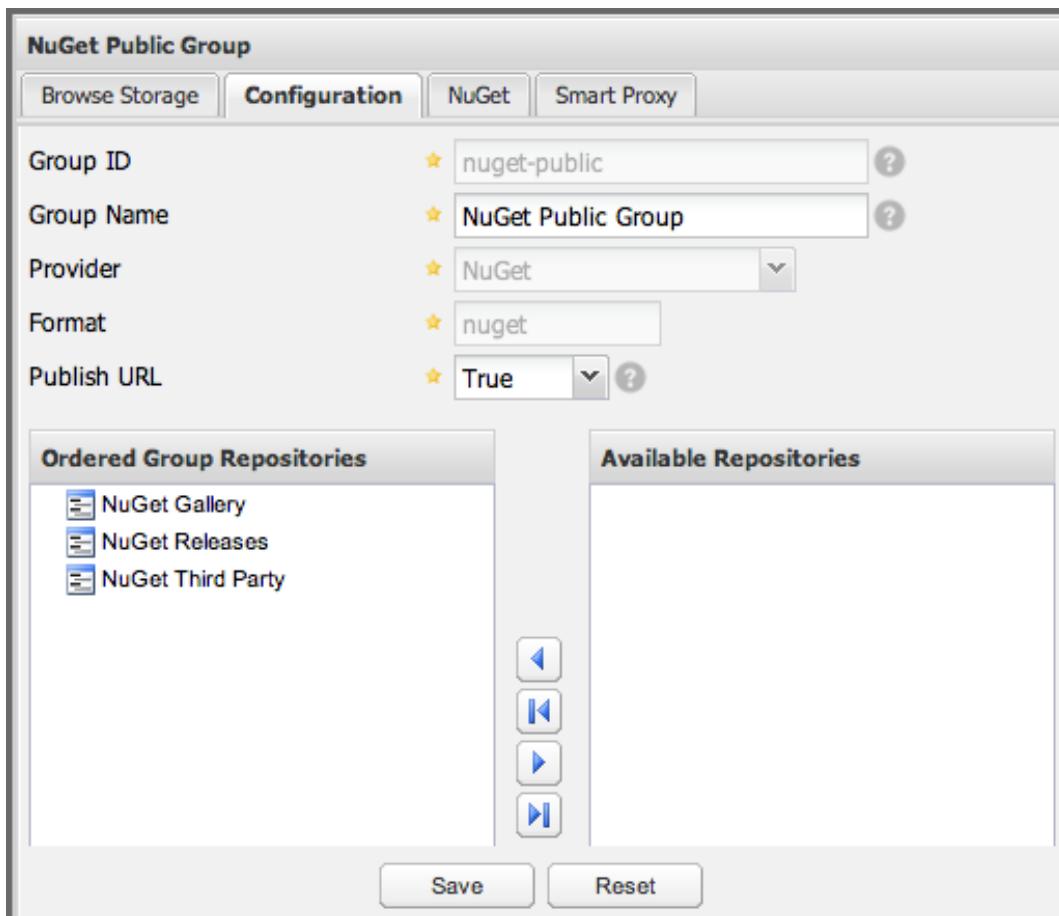


Figure 15.6. A Public NuGet Group Combining a Proxy and Two Hosted Repositories

Using the Repository Path of the repository group as your NuGet repository URL in your client tool will give you access to the packages in all three repositories with one URL. Any new packages added as well as any new repositories added to the group will automatically be available.

Accessing Packages in Repositories and Groups

Once you have set up your hosted and proxy repositories for NuGet packages, and potentially created a repository group, you can access them with the `nuget` tool on the command line. Copy the Package Source URL from the NuGet tab of the repository/group configuration you want to access and add it to `nuget` on the command line with e.g.:

```
nuget sources add -name NuGetNexus -source  
http://localhost:8081/nexus/service/local/nuget/nuget-public
```

Replace `localhost` with the public hostname or URL of your repository manager and `nuget-public` with the name of the repository you want to proxy. Ideally, this will be your NuGet group.

After this source was added, you can list the available packages with the command `nuget list`.

Access to the packages is not restricted by default. If access restrictions are desired, you can configure security directly or via LDAP/Active Directory external role mappings combined with repository targets for fine grained control. Authentication from NuGet is then handled via NuGet API keys as documented in [Deploying Packages to NuGet Hosted Repositories](#)(see page 452).

Deploying Packages to NuGet Hosted Repositories

In order to authenticate a client against a NuGet repository, NuGet uses an API key for deployment requests. These keys are generated separately on request from a user account on the NuGet gallery and can be regenerated at any time. At regeneration, all previous keys generated for that user are invalid.

Creating a NuGet API-Key

For usage with the repository manager, NuGet API keys are only needed when packages are going to be deployed; therefore, API key generation is by default not exposed in the user interface to normal users. Only users with at least the Deployment role have access to the API keys.

Other users that should be able to access and create an API key have to be given the Nexus API-Key Access role in the Users security administration.

In addition, the NuGet API-Key Realm has to be activated. To do this, simply add the realm to the selected realms in the *Security Settings* section of the Server configuration available in the Administration submenu of the left-hand navigation panel.

Once this is set up, you can view as well as reset the current *Personal API Key* in the NuGet tab of any NuGet proxy or hosted repository as visible in *Figure 15.7, “Viewing and Resetting the NuGet API Key in the NuGet Configuration Tab”*.

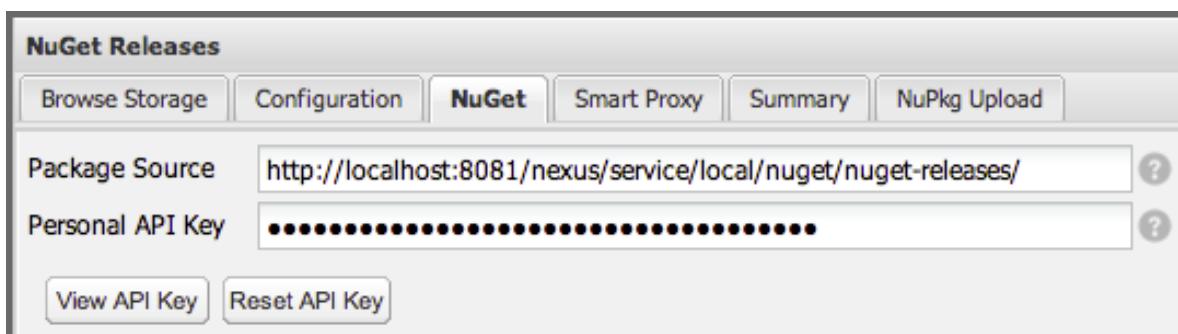


Figure 15.7. Viewing and Resetting the NuGet API Key in the NuGet Configuration Tab

Creating a Package for Deployment

Creating a package for deployment can be done with the pack command of the nuget command line tool or within Visual Studio. Detailed documentation can be found on the [NuGet website](#)²¹⁴⁸.

Deployment with the NuPkg Upload User Interface

Manual upload of one or multiple packages is done on the NuPkg Upload tab of the repository displayed in *Figure 15.4, “The NuPkg Upload Panel for a Hosted NuGet Repository”*. Press the Browse button to access the package you want to upload on the file system and press Add Package. Repeat this process for all packages you want upload, and press Upload Package(s) to complete the upload.

Command line based Deployment to a NuGet Hosted Repository

Alternatively to manual uploads, the nuget command line tool allows you to deploy packages to a repository with the push command. The command requires you to use the API Key and the Package Source path. Both of them are available in the NuGet tab of the hosted NuGet repository to where you want to deploy. Using the delete command of nuget allows you to remove packages in a similar fashion. Further information about the command line tool is available in the on-line help.

Integration of NuGet Repositories in Visual Studio

In order to access a NuGet repository or preferably all NuGet repositories exposed in a group from the repository manager, you provide the Name and Source to the Visual Studio configuration for the Package Sources of the NuGet Package Manager as displayed in *Figure 15.8, “Package Source Configuration for the NuGet Package Manager in Visual Studio”*.

²¹⁴⁸ <http://docs.nuget.org/>

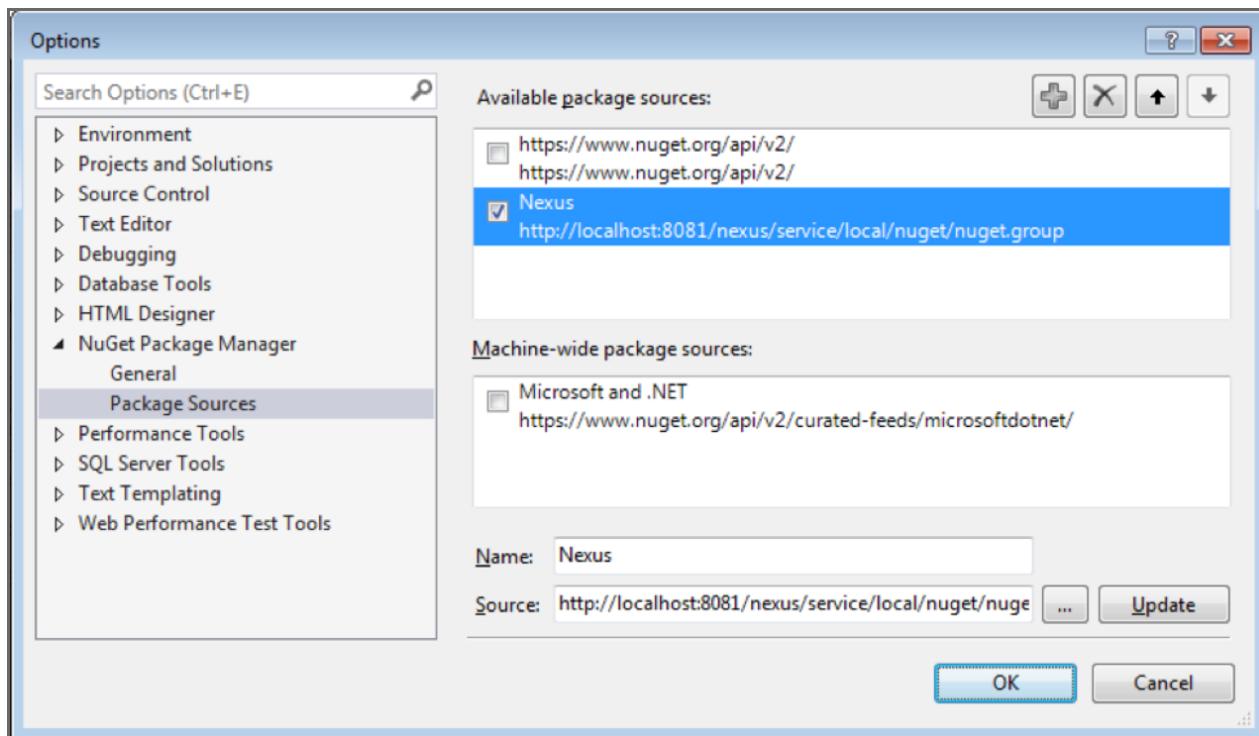


Figure 15.8. Package Source Configuration for the NuGet Package Manager in Visual Studio

With this configuration in place, all packages available in your NuGet repository will be available in the NuGet Package Manager in Visual Studio.


NuGet Proxy Repositories

The NuGet Gallery is the central repository used by all package authors and consumers. To reduce duplicate downloads and improve download speeds for your developers and CI servers, you should proxy the NuGet Gallery with the repository manager. If you use other external repositories, you should also proxy them as well.

To proxy an external NuGet repository, you simply create a new Proxy Repository as documented in [Managing Repositories](#)(see page 0). The Provider has to be set to *NuGet*. The *Remote Storage Location* has to be set to the URL of the remote repository you want to proxy. The URL for the main NuGet Gallery repository is

`https://www.nuget.org/api/v2/`

A complete configuration for proxying the NuGet Gallery is visible in *Figure 15.1, “NuGet Proxy Repository Configuration for the NuGet Gallery”*.

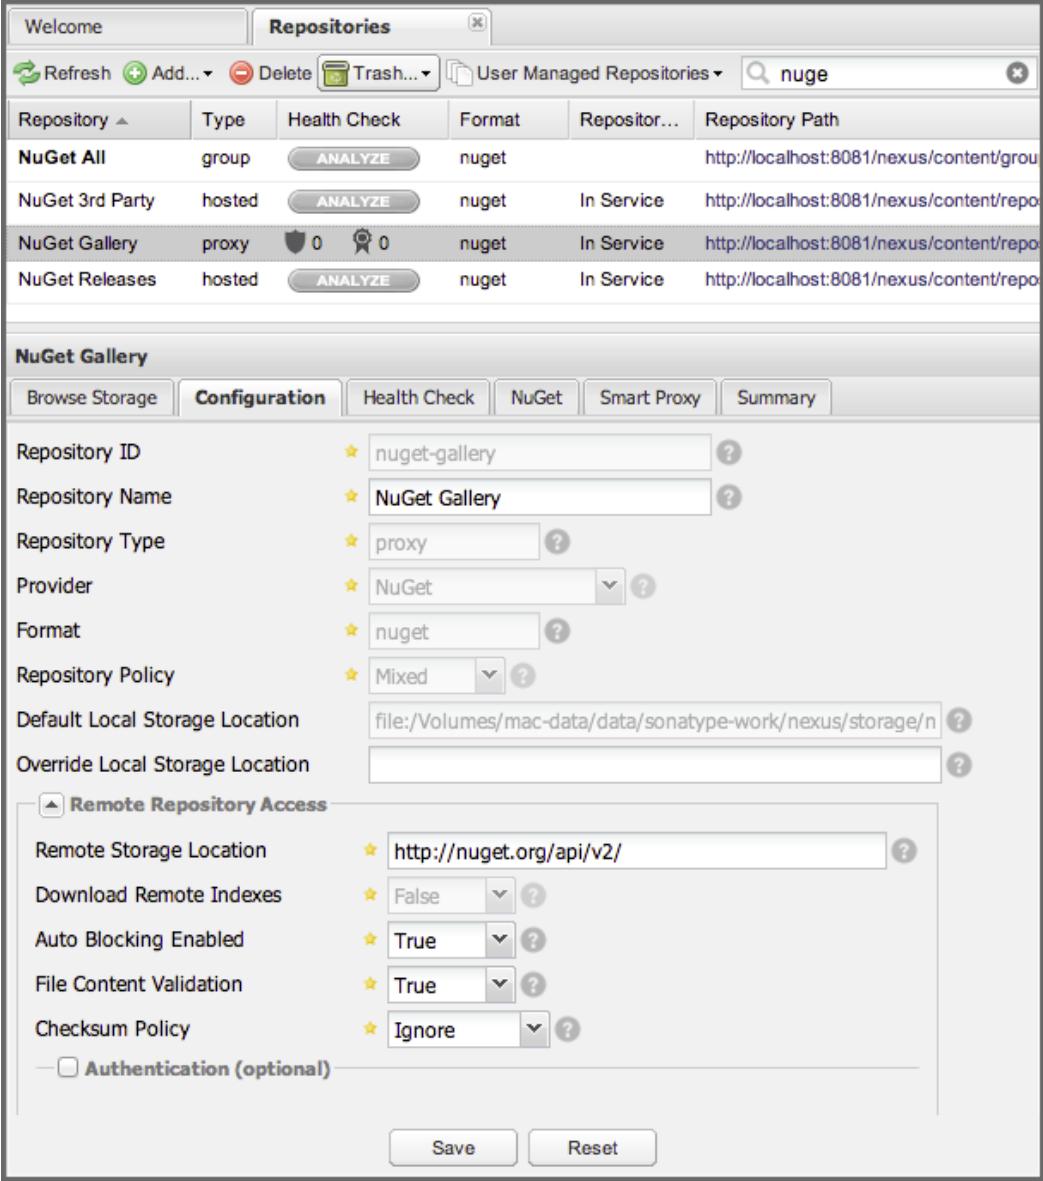

The screenshot shows the Nexus Repository Manager 2 interface. At the top, there's a navigation bar with tabs like 'Welcome' and 'Repositories'. Below it is a toolbar with icons for Refresh, Add, Delete, Trash, and a search bar set to 'nuget'. A dropdown menu says 'User Managed Repositories'. The main area shows a table of repositories:

| Repository | Type | Health Check | Format | Repository Path | |
|-----------------|--------|----------------|--------|---|---|
| NuGet All | group | ANALYZE | nuget | http://localhost:8081/nexus/content/groups/public | |
| NuGet 3rd Party | hosted | ANALYZE | nuget | In Service | http://localhost:8081/nexus/content/repositories/nuget |
| NuGet Gallery | proxy | 0 🏅 0 | nuget | In Service | http://localhost:8081/nexus/content/repositories/nuget |
| NuGet Releases | hosted | ANALYZE | nuget | In Service | http://localhost:8081/nexus/content/repositories/releases |


Below the table is a section titled 'NuGet Gallery' with a 'Configuration' tab selected. This tab contains various configuration options:

- Repository ID: nuget-gallery
- Repository Name: NuGet Gallery
- Repository Type: proxy
- Provider: NuGet
- Format: nuget
- Repository Policy: Mixed
- Default Local Storage Location: file:/Volumes/mac-data/data/sonatype-work/nexus/storage/nuget
- Override Local Storage Location: (empty)
- Remote Repository Access:
 - Remote Storage Location: http://nuget.org/api/v2/
 - Download Remote Indexes: False
 - Auto Blocking Enabled: True
 - File Content Validation: True
 - Checksum Policy: Ignore
- Authentication (optional): (checkbox is unchecked)

At the bottom are 'Save' and 'Reset' buttons.

Figure 15.1. NuGet Proxy Repository Configuration for the NuGet Gallery

The repository configuration for a NuGet proxy repository has an additional tab titled *NuGet* as visible in Figure 15.2, “NuGet Gallery with Package Source URL”. It displays the Package Source URL that is the URL where the repository is available as a NuGet repository.

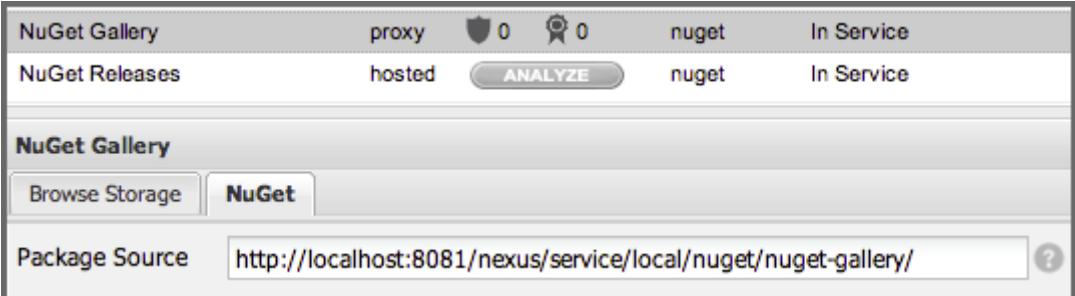

The screenshot shows the same repository configuration as Figure 15.1, but with the 'NuGet' tab selected instead of 'Configuration'. The 'NuGet' tab displays the 'Package Source' URL:

| | | | | |
|----------------|--------|----------------|-------|------------|
| NuGet Gallery | proxy | 0 🏅 0 | nuget | In Service |
| NuGet Releases | hosted | ANALYZE | nuget | In Service |

NuGet Gallery

Browse Storage **NuGet**

Package Source: <http://localhost:8081/nexus/service/local/nuget/nuget-gallery/>

Figure 15.2. NuGet Gallery with Package Source URL

By default, searches in NuGet repositories in the repository manager are passed through to the remote repositories, and the search results are merged with internal search results and included in an internally managed index. This merging has to make some assumptions to generate component counts.

NuGet Hosted Repositories

A hosted repository for NuGet can be used to upload your own packages as well as third-party packages. It is good practice to create two separate hosted repositories for these purposes. To create a NuGet hosted repository, simply create a new *Hosted Repository* and set the *Provider* to *NuGet*. A sample configuration for an internal releases NuGet hosted repository is displayed in *Figure 15.3, “Example Configuration for a NuGet Hosted Repository for Release Packages”*.


The screenshot shows the 'Configuration' tab for a 'hosted' repository named 'nuget'. The configuration includes:

- Repository ID:** nuget-releases
- Repository Name:** NuGet Releases
- Repository Type:** hosted
- Provider:** NuGet
- Format:** nuget
- Repository Policy:** Mixed
- Default Local Storage Location:** file:/Volumes/mac-data/data/sonatype-work/1
- Override Local Storage Location:** (empty)
- Access Settings:**
 - Deployment Policy:** Disable Redeploy
 - Allow File Browsing:** True
 - Include in Search:** False
 - Publish URL:** True
- Expiration Settings:**
 - Not Found Cache TTL:** 1440 minutes

At the bottom are 'Save' and 'Reset' buttons.

Figure 15.3. Example Configuration for a NuGet Hosted Repository for Release Packages

Besides the NuGet tab, the configuration for the repository has a NuPkg Upload tab as displayed in Figure 15.4, “The NuPkg Upload Panel for a Hosted NuGet Repository” that allows you to manually upload one or multiple packages.

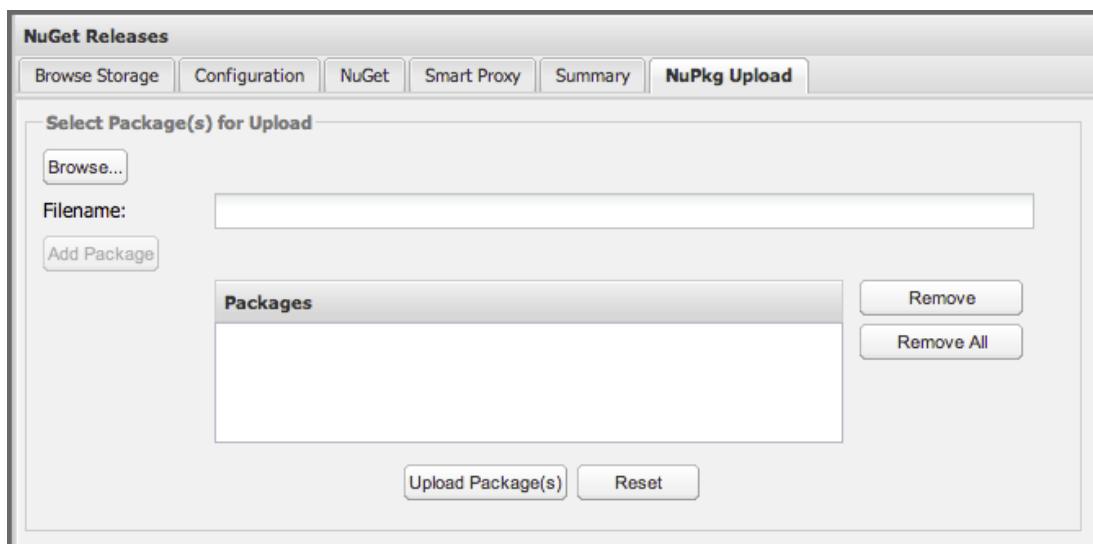**Figure 15.4. The NuPkg Upload Panel for a Hosted NuGet Repository**

The NuGet feed is immediately updated as packages are deployed or deleted from the host repository. To rebuild the feed for a hosted NuGet repository you can manually schedule a *Rebuild NuGet Feed* task.

NuGet Virtual Repositories

If you have deployed NuGet packages to a Maven repository in the past, you can expose them to Visual Studio by creating a virtual repository as documented in [Managing Repositories](#)(see page 0) and setting the *Provider* to NuGet. The setup displayed in Figure 15.5, “A Virtual NuGet Repository for the Releases Repository” shows a virtual repository configured to expose the content of the regular Maven Releases repository as a NuGet repository, so that NuGet can access any NuGet packages deployed to the releases repository.

New Virtual Repository

| | |
|----------------------------|----------------|
| Repository ID | nuget-releases |
| Repository Name | NuGet Releases |
| Repository Type | virtual |
| Provider | NuGet |
| Format | nuget |
| Source Nexus Repository ID | Releases |
| Synchronize on Startup | False |

Save Cancel

Figure 15.5. A Virtual NuGet Repository for the Releases Repository

The NuGet feed is immediately updated as packages are deployed or deleted from the shadowed repository. To rebuild the feed for a virtual NuGet repository, you can manually schedule a Synchronize Shadow Repository task.

NuGet Group Repositories

A repository group is the recommended way to expose all your NuGet repositories to your users, without needing any further client side configuration. A repository group allows you to expose the aggregated content of multiple proxy and hosted repositories with one URL to your tools. This is possible for NuGet repositories by creating a new *Repository Group* with the *Provider* set to NuGet as documented in [Managing Repository Groups](#)(see page 0).

A typical, useful example would be to group the proxy repository that proxies the NuGet Gallery, a NuGet, hosted repository with internal software packages and another NuGet, hosted repository with third-party packages. The configuration for such a setup is displayed in *Figure 15.6, “A Public NuGet Group Combining a Proxy and Two Hosted Repositories”*.

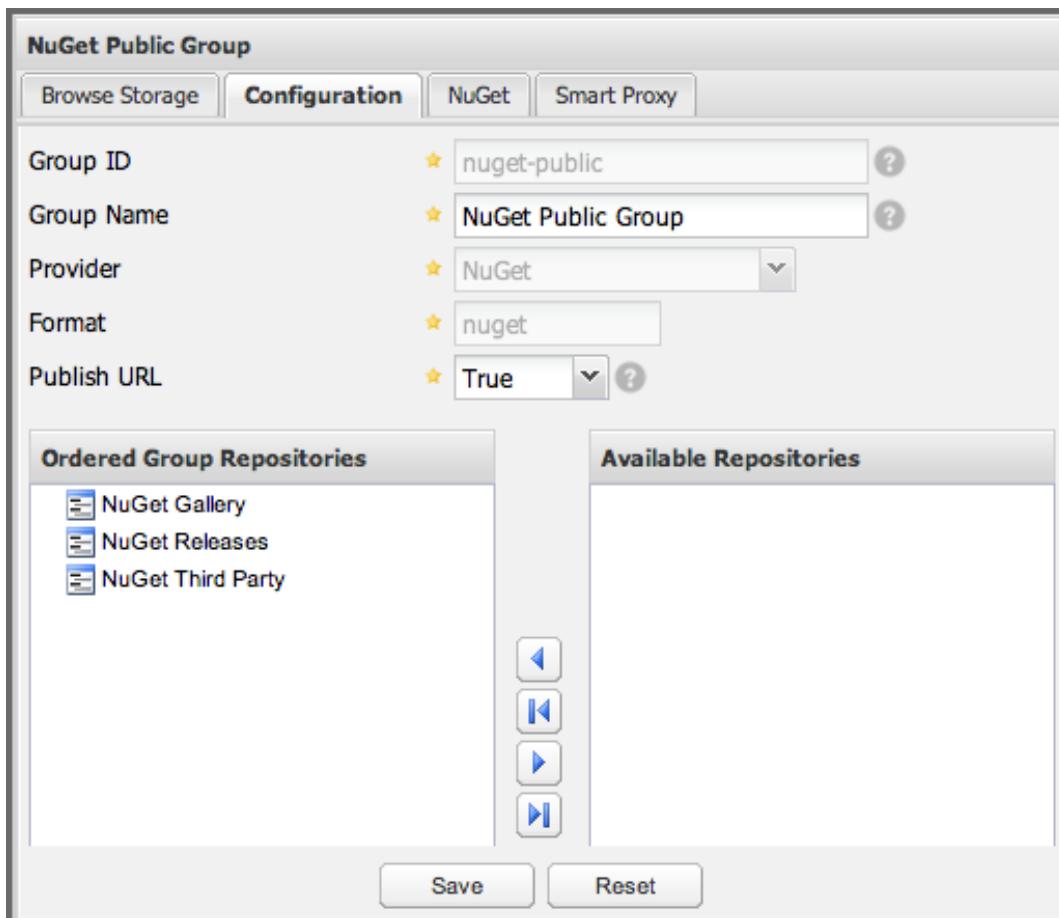


Figure 15.6. A Public NuGet Group Combining a Proxy and Two Hosted Repositories

Using the Repository Path of the repository group as your NuGet repository URL in your client tool will give you access to the packages in all three repositories with one URL. Any new packages added as well as any new repositories added to the group will automatically be available.

Accessing Packages in Repositories and Groups

Once you have set up your hosted and proxy repositories for NuGet packages, and potentially created a repository group, you can access them with the `nuget` tool on the command line. Copy the Package Source URL from the NuGet tab of the repository/group configuration you want to access and add it to `nuget` on the command line with e.g.:

```
nuget sources add -name NuGetNexus -source  
http://localhost:8081/nexus/service/local/nuget/nuget-public
```

Replace `localhost` with the public hostname or URL of your repository manager and `nuget-public` with the name of the repository you want to proxy. Ideally, this will be your NuGet group.

After this source was added, you can list the available packages with the command `nuget list`.

Access to the packages is not restricted by default. If access restrictions are desired, you can configure security directly or via LDAP/Active Directory external role mappings combined with repository targets for fine grained control. Authentication from NuGet is then handled via NuGet API keys as documented in [Deploying Packages to NuGet Hosted Repositories](#)(see page 452).

Deploying Packages to NuGet Hosted Repositories

In order to authenticate a client against a NuGet repository, NuGet uses an API key for deployment requests. These keys are generated separately on request from a user account on the NuGet gallery and can be regenerated at any time. At regeneration, all previous keys generated for that user are invalid.

Creating a NuGet API-Key

For usage with the repository manager, NuGet API keys are only needed when packages are going to be deployed; therefore, API key generation is by default not exposed in the user interface to normal users. Only users with at least the Deployment role have access to the API keys.

Other users that should be able to access and create an API key have to be given the Nexus API-Key Access role in the Users security administration.

In addition, the NuGet API-Key Realm has to be activated. To do this, simply add the realm to the selected realms in the *Security Settings* section of the Server configuration available in the Administration submenu of the left-hand navigation panel.

Once this is set up, you can view as well as reset the current *Personal API Key* in the NuGet tab of any NuGet proxy or hosted repository as visible in *Figure 15.7, “Viewing and Resetting the NuGet API Key in the NuGet Configuration Tab”*.

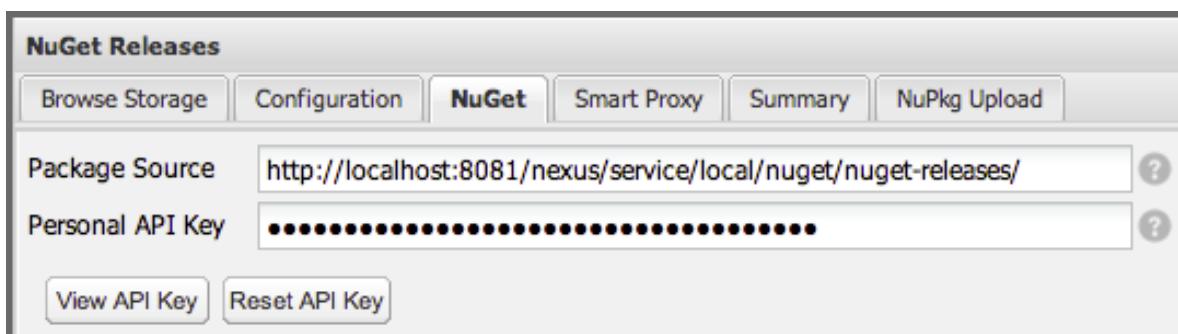


Figure 15.7. Viewing and Resetting the NuGet API Key in the NuGet Configuration Tab

Creating a Package for Deployment

Creating a package for deployment can be done with the pack command of the nuget command line tool or within Visual Studio. Detailed documentation can be found on the [NuGet website](#)²¹⁴⁹.

Deployment with the NuPkg Upload User Interface

Manual upload of one or multiple packages is done on the NuPkg Upload tab of the repository displayed in *Figure 15.4, “The NuPkg Upload Panel for a Hosted NuGet Repository”*. Press the Browse button to access the package you want to upload on the file system and press Add Package. Repeat this process for all packages you want upload, and press Upload Package(s) to complete the upload.

Command line based Deployment to a Nexus NuGet Hosted Repository

Alternatively to manual uploads, the nuget command line tool allows you to deploy packages to a repository with the push command. The command requires you to use the API Key and the Package Source path. Both of them are available in the NuGet tab of the hosted NuGet repository to where you want to deploy. Using the delete command of nuget allows you to remove packages in a similar fashion. Further information about the command line tool is available in the on-line help.

Integration of NuGet Repositories in Visual Studio

In order to access a NuGet repository or preferably all NuGet repositories exposed in a group from the repository manager, you provide the Name and Source to the Visual Studio configuration for the Package Sources of the NuGet Package Manager as displayed in *Figure 15.8, “Package Source Configuration for the NuGet Package Manager in Visual Studio”*.

²¹⁴⁹ <http://docs.nuget.org/>

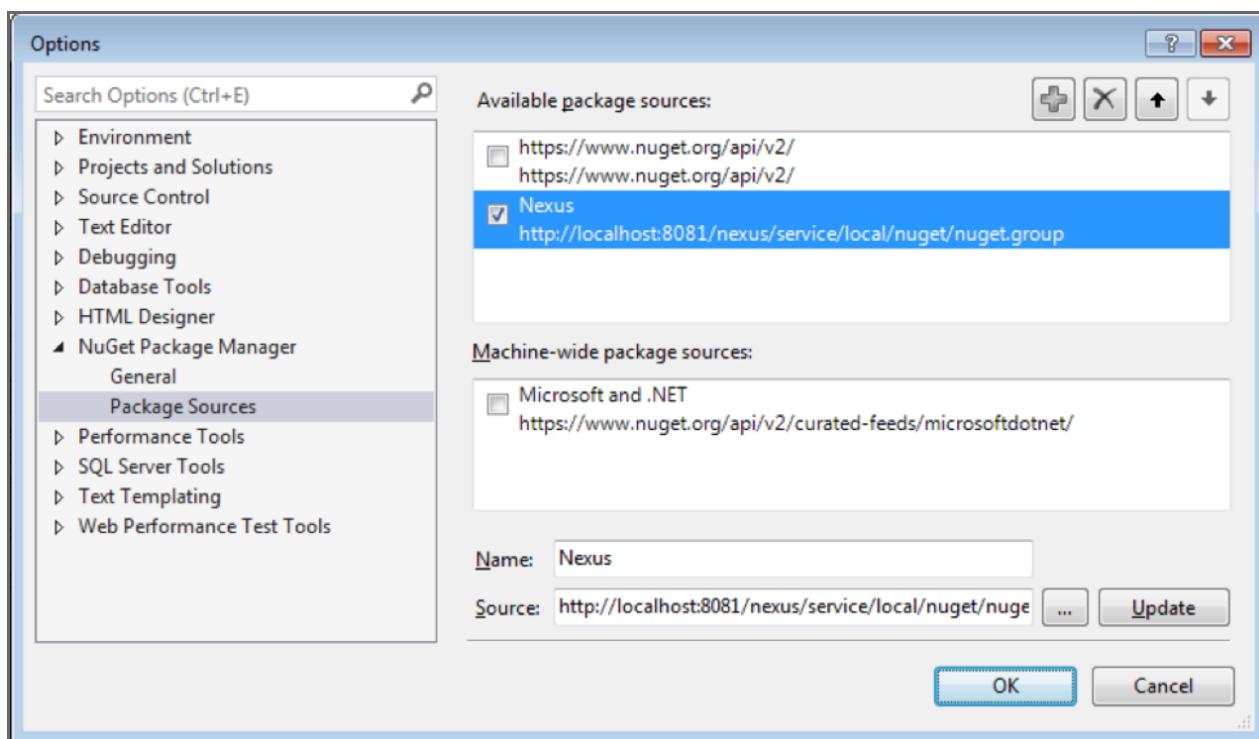


Figure 15.8. Package Source Configuration for the NuGet Package Manager in Visual Studio

With this configuration in place, all packages available in your NuGet repository will be available in the NuGet Package Manager in Visual Studio.

Node Packaged Modules and npm Registries

Available in Nexus Repository OSS and Nexus Repository Pro

Introduction

The command line tool `npm` is a package management solution for Javascript-based development. It is used to create and use node packaged modules and is built into the popular Javascript platform [Node.js](#)²¹⁵⁰, which is mostly used for server-side application development.

The `npmjs` website, available at <https://www.npmjs.org>, provides search and other convenience features to access the public registry at <https://registry.npmjs.org/>. It is the default package registry, from which components can be retrieved. It contains a large number of open source packages for Node.js based server-side application development, build tools like bower or grunt and many other packages for a variety of use cases.

²¹⁵⁰ <http://www.nodejs.org/>

Nexus Repository Manager Pro and Nexus Repository Manager OSS support the npm registry format for proxy repositories. This allows you to take advantage of the packages in the npm registry and other public registries without incurring repeated downloads of packages, since they will be proxied.

In addition, Nexus Repository Manager Pro and Nexus Repository Manager OSS support running your own private registry - also known as a hosted repository using the npm format. You can share internally developed, proprietary packages within your organization via these private registries allowing you to collaborate efficiently across development teams with a central package exchange and storage location.

- ⚠ Users can enable Repository Health Check on a repository using the npm format to retrieve all metadata from components in the repository, such as security and license.

To simplify configuration Nexus Repository Manager Pro and Nexus Repository Manager OSS support aggregation of npm registries. This allows you to expose all the external package from the npm registry and other public registries as well as the private registries as one registry, which greatly simplifies client configuration.

To share a package or tool with npm, you create a npm package and store it in the repository manager-based npm registry. Similarly, you can use packages others have created and made available in their NPM repositories by proxying them or downloading the packages and installing them in your own private registry for third party packages.

- ⓘ npm support is a feature of version 2.10 and higher and is available in Nexus Repository Manager Pro and Nexus Repository Manager OSS and requires npm version 1.4 and above.

Proxying npm Registries

To reduce duplicate downloads and improve download speeds for your developers and CI servers, you should proxy the registry hosted at <https://registry.npmjs.org>. It is accessed directly by npm out-of-the-box. You can also proxy any other registries you require.

To proxy an external npm registry, you simply create a new Proxy Repository as documented in [Managing Repositories](#)(see page 0). The Provider has to be set to NPM . The Remote Storage Location has to be set to the URL of the remote repository you want to proxy. The official URL for the main npm registry is

```
https://registry.npmjs.org
```

A complete configuration for proxying the default npm registry is visible in Figure 16.1, “Proxy Repository Configuration for the npm Registry”.

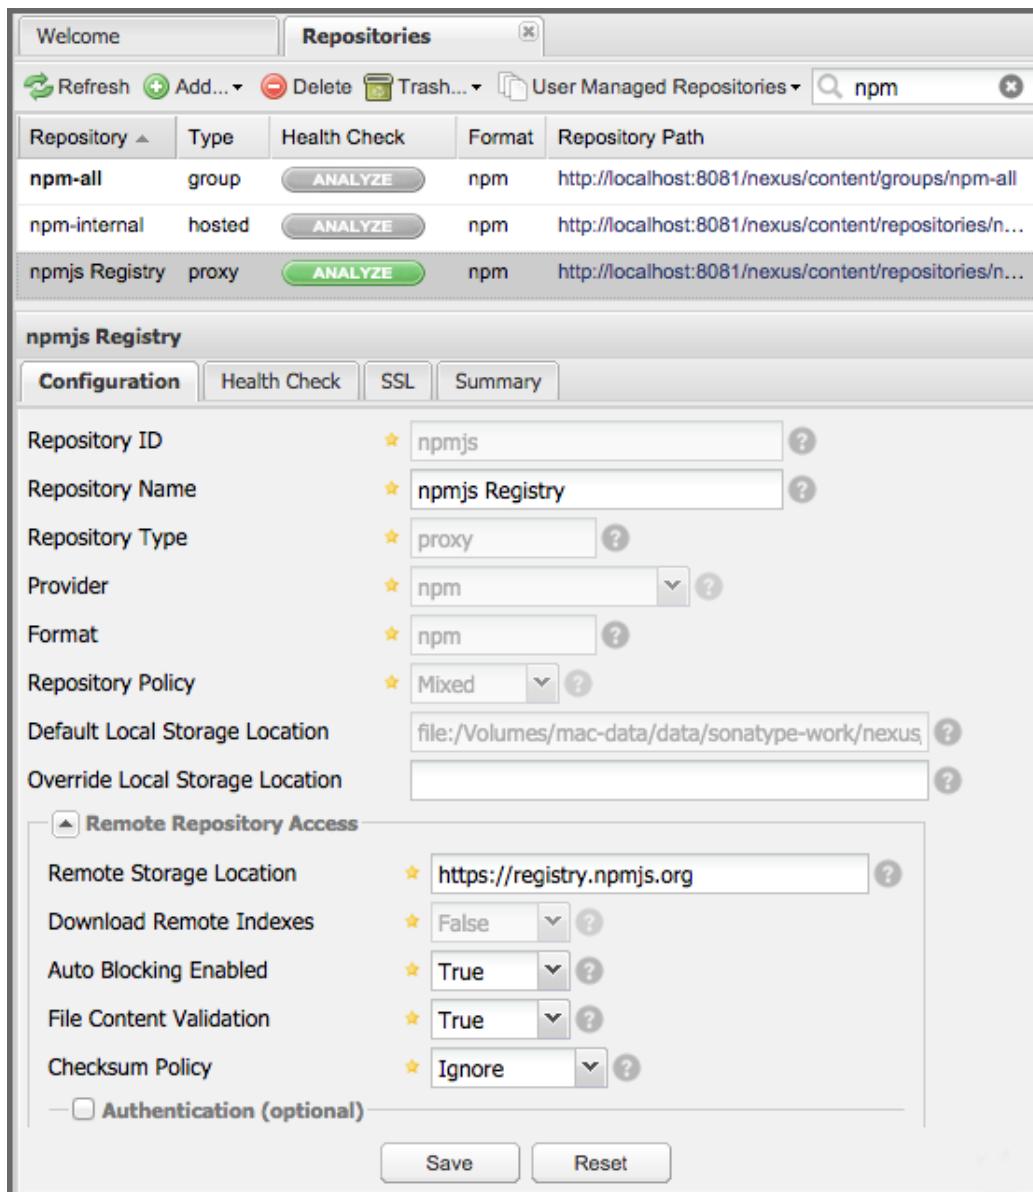



Figure 16.1. Proxy Repository Configuration for the npm Registry

- ⚠️ Browsing the registry storage or the remote registry and searching for packages in the repository manager is not supported

Private npm Registries

A private npm registry can be used to upload your own packages as well as third-party packages. You can create a private npm registry by setting up a hosted repository with the npm format in the repository manager. It is good practice to create two separate hosted repositories for these purposes.

To create a hosted repository with npm format, simply create a new Hosted Repository and set the Provider to npm as documented in [Managing Repositories](#)(see page 0). A sample configuration for an internal releases npm hosted repository is displayed in Figure 16.2, “Example Configuration for a Private npm Registry”.

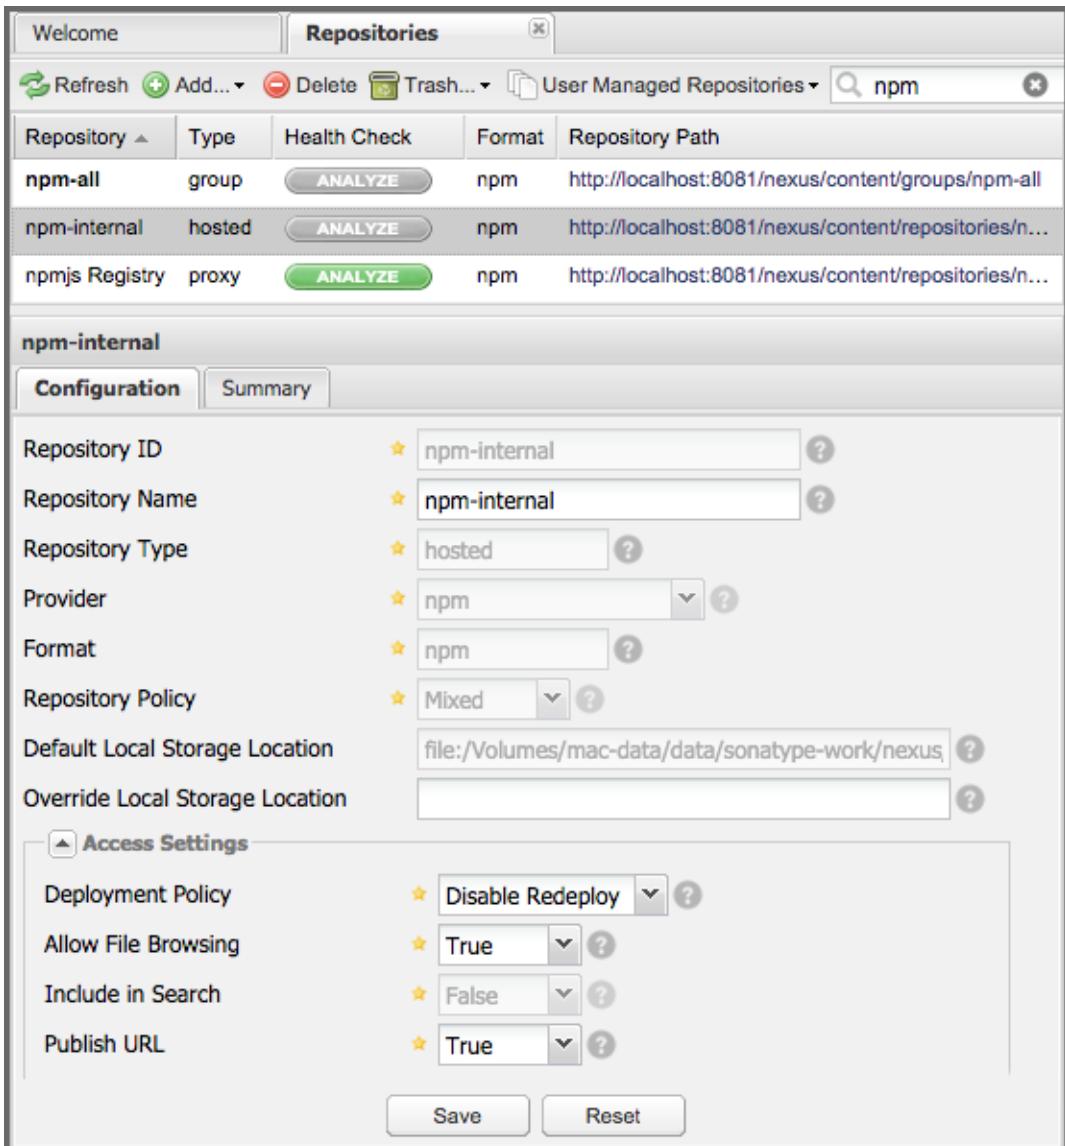

The screenshot shows the Nexus Repository Manager interface. In the top navigation bar, the 'Repositories' tab is selected. Below it, a table lists three repositories: 'npm-all' (group), 'npm-internal' (hosted), and 'npmjs Registry' (proxy). The 'npm-internal' repository is selected, and its configuration details are displayed in the main pane.

Configuration for npm-internal:

- Repository ID:** npm-internal
- Repository Name:** npm-internal
- Repository Type:** hosted
- Provider:** npm
- Format:** npm
- Repository Policy:** Mixed
- Default Local Storage Location:** file:/Volumes/mac-data/data/sonatype-work/nexus
- Override Local Storage Location:** (empty field)
- Access Settings:**
 - Deployment Policy:** Disable Redeploy
 - Allow File Browsing:** True
 - Include in Search:** False
 - Publish URL:** True

At the bottom of the configuration pane are 'Save' and 'Reset' buttons.

Figure 16.2. Example Configuration for a Private npm Registry

The npm registry information is immediately updated as packages are deployed or deleted from the repository.


 Browsing the registry storage or searching for packages is not supported.

The scheduled tasks to recreate the npm metadata database based on the components in a hosted repository and to back up the database are documented in [Managing Scheduled Tasks](#)(see page 293).

Grouping npm Registries

A repository group is the recommended way to expose all your npm registries repositories to your users, without needing any further client side configuration. A repository group allows you to expose the aggregated content of multiple repositories with one URL to npm and other tools. This is possible for npm repositories by creating a new Repository Group with the Provider set to npm as documented in [Managing Repository Groups](#)(see page 0).

A typical, useful example would be to group the proxy repository that: proxies the npm registry, a npm, hosted repository with internal software packages and another npm, hosted repository with third-party packages. The configuration for such a setup is displayed in Figure 16.3, “An npm Group Combining the npm Registry and Two Private Registries”.

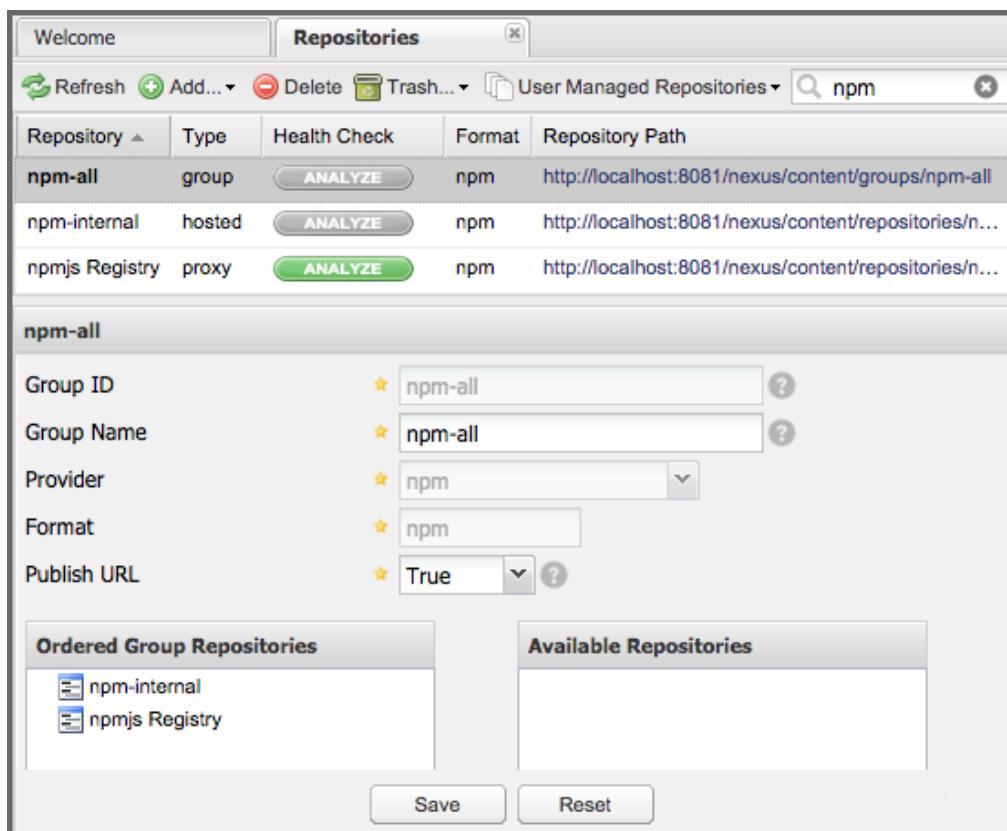

The screenshot shows the 'Repositories' screen in the Nexus Repository Manager 2. At the top, there is a toolbar with 'Refresh', 'Add...', 'Delete', 'Trash...', and a search bar for 'User Managed Repositories'. Below the toolbar, a table lists three repositories:

| Repository | Type | Health Check | Format | Repository Path |
|----------------|--------|----------------------|--------|---|
| npm-all | group | ANALYZE | npm | http://localhost:8081/nexus/content/groups/npm-all |
| npm-internal | hosted | ANALYZE | npm | http://localhost:8081/nexus/content/repositories/n... |
| npmjs Registry | proxy | ANALYZE | npm | http://localhost:8081/nexus/content/repositories/n... |

Below the table, a detailed configuration panel is open for the 'npm-all' group. It contains the following fields:

| | |
|-------------|--------------------------------------|
| Group ID | <input type="text" value="npm-all"/> |
| Group Name | <input type="text" value="npm-all"/> |
| Provider | <input type="text" value="npm"/> |
| Format | <input type="text" value="npm"/> |
| Publish URL | <input type="text" value="True"/> |

At the bottom of the configuration panel, there are two sections: 'Ordered Group Repositories' and 'Available Repositories'. The 'Ordered Group Repositories' section contains 'npm-internal' and 'npmjs Registry'. The 'Available Repositories' section is empty. At the very bottom of the configuration panel are 'Save' and 'Reset' buttons.

Figure 16.3. An npm Group Combining the npm Registry and Two Private Registries

Using the Repository Path of the repository group as your npm repository URL in your client tool will give you access to the packages in all three repositories with one URL. Any new packages added as well as any new repositories added to the group will automatically be available.

Configuring npm

Once you set up your hosted and proxy repositories and create a repository group to merge them, you can access them with the `npm` tool on the command line as one registry.

As shown below, you can configure the registry used by `npm` in your `.npmrc` file located in your user's home directory. If the file does not exist simply create it and add the registry configuration with the URL of your npm repository group. You can find the public URL of your group repository in the repository list in the Repository Path column.

Registry configuration in `.npmrc`

```
registry = http://localhost:8081/nexus/content/groups/npm-all/
```

With this configuration any npm commands will use the new registry from the repository manager. The command line output will reference the URLs in --verbose mode or with info logging for the downloads of the requested packages:

```
$ npm --loglevel info install grunt
...
npm http fetch GET http://localhost:8081/repository/npmjs-org/grunt/-/grunt-0.4.5.tgz
npm http fetch 200 http://localhost:8081/repository/npmjs-org/grunt/-/grunt-0.4.5.tgz
...
npm http fetch GET http://localhost:8081/repository/npm-all/underscore/-/underscore-1.7.0.tgz
npm http fetch 200 http://localhost:8081/repository/npm-all/underscore/-/underscore-1.7.0.tgz
```

By default any anonymous user has read access to the repositories and repository groups. If desired, the repository manager can be configured to require authentication by adding `always-auth=true` to the `.npmrc` file and adding the encoded authentication details as documented in [Publishing npm Packages](#)(see page 467).

Publishing npm Packages

Publishing your own packages to a npm hosted repository allows you to share packages across your organization or with external partners.

The `npm publish` command uses a registry configuration value to know where to publish your package. There are several ways to change the registry value to point at your hosted npm repository.

Since the `.npmrc` file usually contains a registry value intended only for getting new packages, a simple way to override this value is to provide a registry to the `publish` command:

```
npm publish --registry http://localhost:8081/nexus/content/repositories/npm-internal/
```

Alternately, you can edit your package.json file and add a publishConfig section:

```
"publishConfig" : {  
  "registry" : "http://localhost:8081/nexus/content/repositories/npm-internal/"  
},
```

If your package requires the use of npm scope, the repository manager supports this functionality. Packages published to the repository manager with a defined scope are reflected with the scope value populating a hosted or proxy repository. Scoped packages are distinguishable with an @ placed in front of the scope, followed by a slash (/) and package name (e.g. @scope/project-name).

When you publish the package, the user interface will contain a new folder with an @ preceding name of the scope. You can browse scoped packages from the Repository Path column. These packages are alphabetically indexed, in tree view, amid your repository's overall list of packages.

Further details on [scoping are available on the npm website](#)²¹⁵¹.

Publishing requires authentication. It can be configured by adding an _auth value to .npmrc. The value has to be generated by base64-encoding the string of username:password.

Encoding Credentials on Linux

You can create this encoded string on Linux with the openssl command line tool. For example, for the default admin user:

```
echo -n 'admin:admin123' | openssl base64
```

Encoding Credentials on Windows using "certutil"

To use certutil on Windows you need to put the credentials to be encoded into a file:

```
admin:admin123
```

Then run:

```
c:\certutil /encode in.txt out.txt
```

²¹⁵¹ <https://docs.npmjs.com/misc/scope>

After this the base64 encoded credentials can be found in between the begin and end certificate lines in the output file:

```
-----BEGIN CERTIFICATE-----  
YWRtaW46YWRtaW4xMjM=  
-----END CERTIFICATE-----
```

Encoding Credentials on Windows using Powershell

```
$Bytes = [System.Text.Encoding]::UTF8.GetBytes("admin:admin123")  
[Convert]::ToBase64String($Bytes)
```

Adding Credentials to the npm Configuration

Once you have the encoded credentials the value as well as author information can then be added to the `.npmrc` file:

```
init.author.name = Jane Doe  
init.author.email = jane@example.com  
init.author.url = http://blog.example.com  
# an email is required to publish npm packages  
email=jane@example.com  
always-auth=true  
_auth=YWRtaW46YWRtaW4xMjM=
```

- ① Using whatever tool you are generating the encoded username and password string, try to encode the string `admin:admin123`. The result is `YWRtaW46YWRtaW4xMjM=`. Another example for a valid setup is `jane:testpassword123` resulting in `amFuZTp0ZXN0cGFzc3dvcmQxMjM=`.

Once a package is published to the private registry in the repository manager, any other developers or build servers, that access it via the repository group have instant access to the packages.

More information about package creation can be found on the [npm website](https://www.npmjs.org/doc/cli/npm-publish.html)²¹⁵².

Ruby, RubyGems and Gem Repositories

Available in Nexus Repository OSS and Nexus Repository Pro

²¹⁵² <https://www.npmjs.org/doc/cli/npm-publish.html>

Introduction

For developers using the Ruby programming language, the `gem` tool serves as their package management solution. In fact, since version 1.9 of Ruby, it has been included as part of the default Ruby library. Packages are called **gems** and, just like all package managers, this allows for ease of use when distributing programs or libraries.

Of course, package management really only goes as far as improving distribution. A great feat certainly, but to really find success, a development community needs to exist. At the heart of every development community, especially those like Ruby, where open source projects are one of the most critical elements, the community needs a place to host and share their projects.

Enter RubyGems hosted at rubygems.org²¹⁵³ - the most popular and leading gem hosting service supporting the Ruby community. Here, a large variety of open source Ruby projects supply their gems for download to all users.

Ruby has been a successful platform for developers for a long time now. The popularity of Ruby and therefore the usage of gems and gem repositories means that lots of teams are downloading and exchanging lots of components on a regular basis. Obviously, this can (and does) become a crunch on resources, not to mention a pain to manage.

Luckily Nexus Repository Manager Pro and Nexus Repository Manager OSS support gem repositories. A user can connect to the repository manager to download gems from RubyGems, create proxies to other repositories, and host their own or third-party gems. Any gem downloaded via the repository manager needs to be downloaded from the remote repository, like RubyGems, only once and is then available internally from the repository manager. Gems pushed to the repository manager automatically become available to everyone else in your organization. Using the repository manager as a proxy avoids the overhead of teams and individual developers having to repeatedly download components or share components in a haphazard and disorganized manner.

 Gem repository support is a feature of version 2.11 and higher, and is available in Nexus Repository Manager Pro and Nexus Repository Manager OSS editions.

The following features are included as part of the gem repository support:

- Proxy repository for connecting to remote gem repositories and caching gems on the repository manager to avoid duplicate downloads and wasted bandwidth and time
- Hosted repository for hosting gems package and providing them to your users
- Repository groups for merging multiple hosted and proxy Gem repositories and easily exposing them as one URL to all users

²¹⁵³ <http://rubygems.org/>

- ⓘ None of this functionality requires Ruby (or any extra tooling) to be installed on the operating system running the repository manager. Ruby specific details are implemented using a bundled JRuby²¹⁵⁴.

Proxying Gem Repositories

To reduce duplicate downloads and improve download speeds for your developers, continuous integration servers and other systems using gem, you should proxy the RubyGems repository and any other repositories you require.

To proxy an external Gem repository, like RubyGems, simply create a new Proxy Repository as documented in [Managing Repositories](#)(see page 274). The Provider has to be set to Rubygems. The Remote Storage Location has to be set to the URL of the remote repository you want to proxy. The official URL for [Rubygems.org](#)²¹⁵⁵ is

```
https://rubygems.org
```

This main configuration for proxying RubyGems is visible in *Figure 17.1, “Proxy Gem Repository Configuration for RubyGems”*. Further configuration details are available in [Managing Repositories](#)(see page 274).

²¹⁵⁴ <http://jruby.org/>

²¹⁵⁵ <http://Rubygems.org>

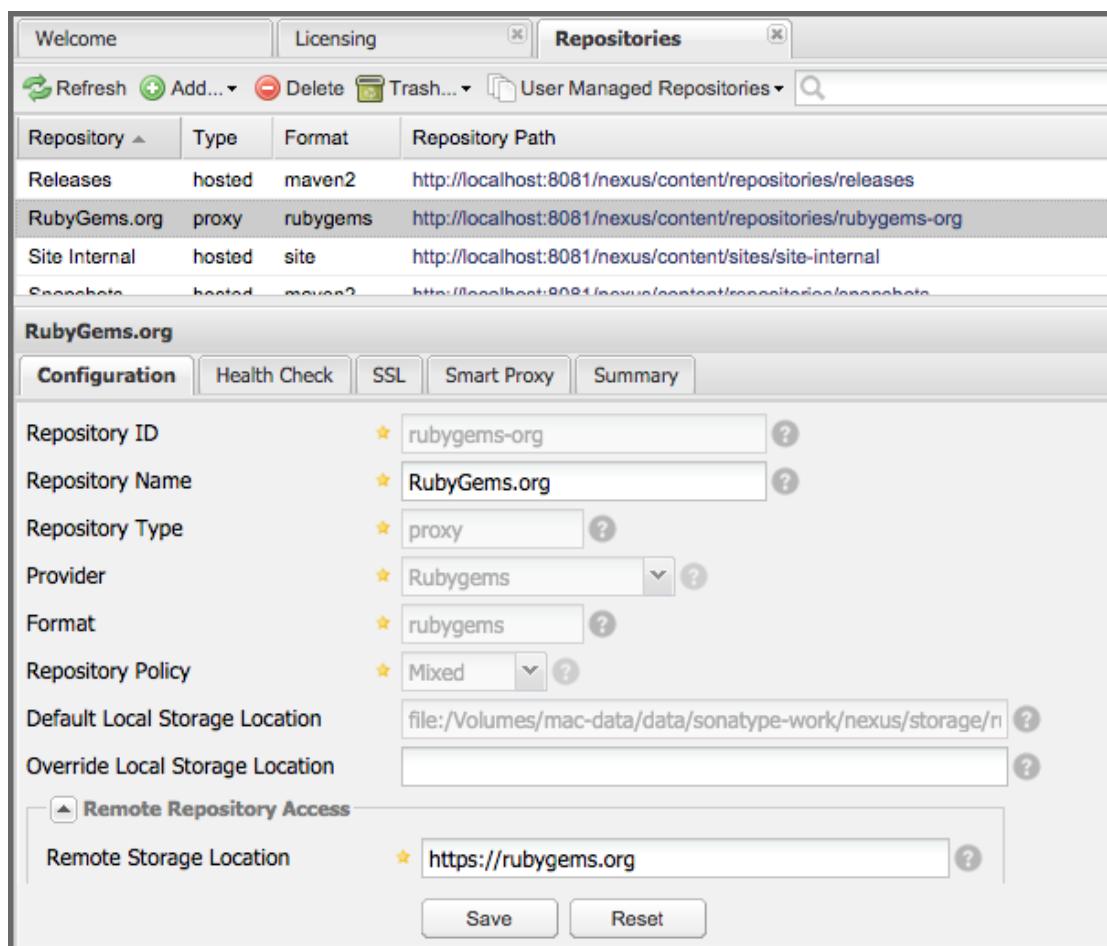


Figure 17.1. Proxy Gem Repository Configuration for RubyGems

If you are using Nexus Repository Manager Pro and are proxying a repository via HTTPS, you can get the certificate added to the repository manager truststore to simplify management using the SSL tab of the repository configuration.

Scheduled tasks can be used to purge broken metadata of a proxy gem repository as well as to synchronize the metadata files of a proxy gem repository.

Private Hosted Gem Repositories

A private Gem repository on repository manager can be used as target to push your own gems as well as third-party gems and subsequently provide them to your users. It is good practice to create two separate hosted Gem repositories for internal and third-party gems.

To create a hosted Gem repository, simply create a new Hosted Repository and set the Provider to Rubygems as documented in [Managing Repositories](#)(see page 274). A sample configuration for an internal hosted Gem repository is displayed in *Figure 17.2, “Example Configuration for a Private Gem Repository”*.

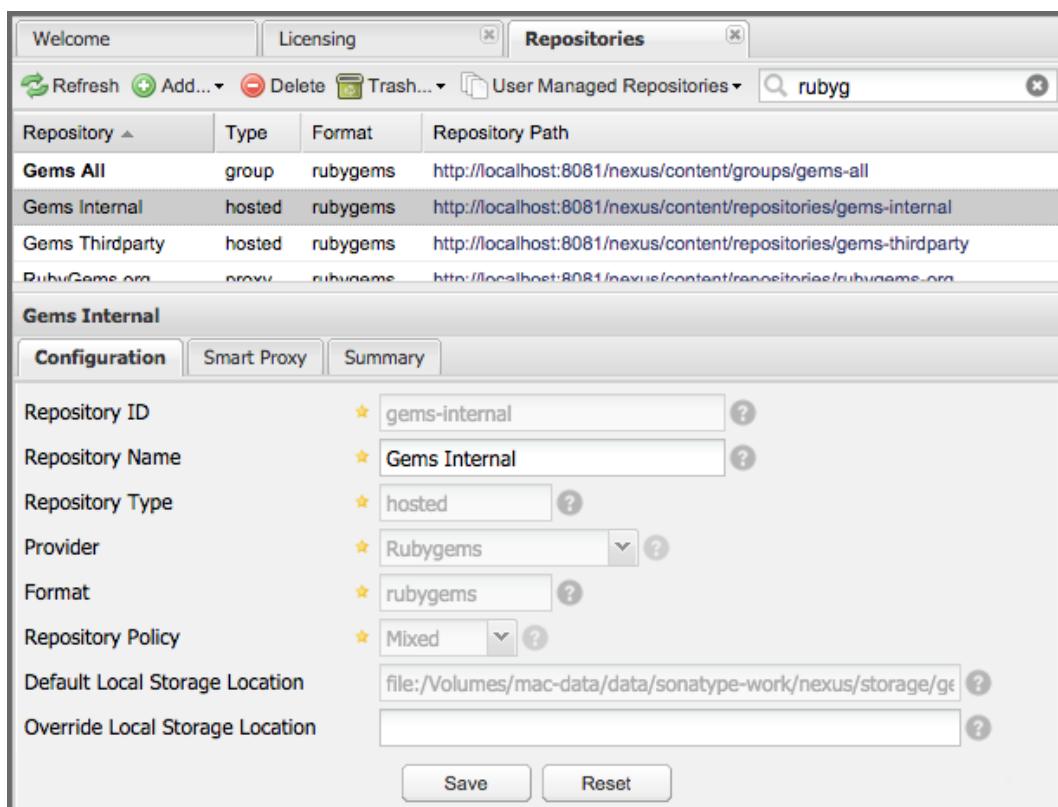


Figure 17.2. Example Configuration for a Private Gem Repository

The Gem repository information is immediately updated as gems are pushed to the repository or deleted from it.

A scheduled task can be used to rebuild the metadata of a hosted gem repository and can be configured as documented in [Managing Scheduled Tasks](#)(see page 293).

Grouping Gem Repositories

A repository group is the recommended way to expose all your Gem repositories to your users, without needing any further client side configuration after initial setup. A repository group allows you to expose the aggregated content of multiple proxy and hosted Gem repositories with one URL to gem and other tools. This is possible for Gem repositories by creating a new Repository Group with the Provider set to Rubygems as documented in [Managing Repository Groups](#)(see page 286).

A typical, useful example would be to group the proxy repository that proxies the RubyGems repository, a hosted Gem repository with internal software gems, and another hosted Gem repository with third-party gems. The configuration for such a setup is displayed in *Figure 17.3, “A Gem Repository Group Combining the RubyGems Proxy Repository and Two Private Gem Repositories”*.

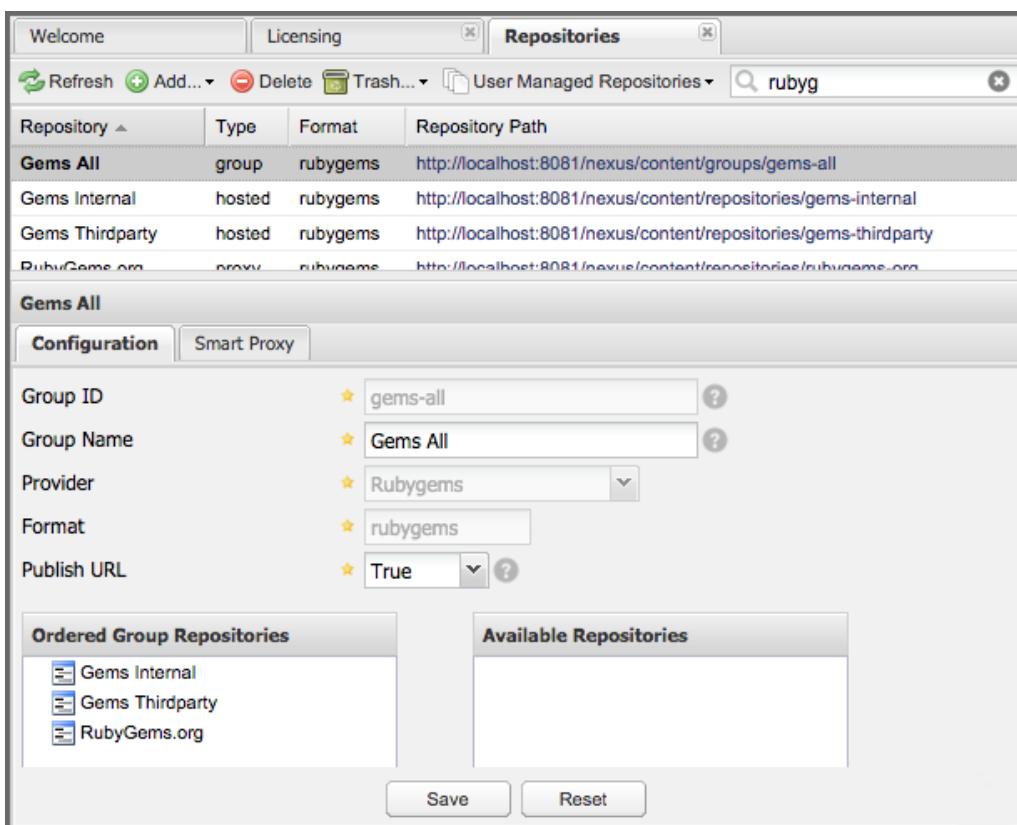


Figure 17.3. A Gem Repository Group Combining the RubyGems Proxy Repository and Two Private Gem Repositories

Using the *Repository Path* of the repository group as your Gem repository URL in your client tool gives you access to the gems in all three repositories with one URL.

Any new gem added to the remote proxy Gem repositories or the hosted Gem repositories becomes immediately available to all users of the Gem repository group. Adding a new proxy Gem repository to the group makes all gems immediately available to the users as well.

Using Gem Repositories

Once you have configured the repository manager with the gem repository group, you can add it to your configuration for the `gem` command line tool.

You can add the URL of a gem repository or group using the URL from the repository list with a command like

```
gem sources --add http://localhost:8081/nexus/content/groups/gems-all/
```

In order to take full advantage of the repository manager and the proxying of gems, you should remove any other sources. By default `https://rubygems.org/` is configured in gem and this can be removed with

```
$ gem sources --remove https://rubygems.org/  
https://rubygems.org/ removed from sources
```

Subsequently you should clear the local cache with

```
$ gem sources -c  
*** Removed specs cache ***
```

To check a successful configuration you can run

```
$ gem sources  
*** CURRENT SOURCES ***  
  
http://localhost:8081/nexus/content/groups/gems-all/
```

With this setup completed any installation of new gems with `gem install GEMNAME` (e.g. `gem install rake`) will download from the repository manager.

By default read access is available to anonymous access and no further configuration is necessary. If your repository manager requires authentication, you have to add the *Basic Auth* authentication details to the sources configuration:

```
$ gem sources --add  
http://myuser:mypassword@localhost:8081/nexus/content/repositories/gems-all/
```

If you are using the popular [Bundler tool](#)²¹⁵⁶ for tracking and installing gems, you need to install it with `gem`:

```
$ gem install bundle  
Fetching: bundler-1.7.7.gem (100%)  
Successfully installed bundler-1.7.7  
Fetching: bundle-0.0.1.gem (100%)  
Successfully installed bundle-0.0.1  
Parsing documentation for bundle-0.0.1  
Installing ri documentation for bundle-0.0.1  
Parsing documentation for bundler-1.7.7  
Installing ri documentation for bundler-1.7.7  
Done installing documentation for bundle, bundler after 4 seconds  
2 gems installed
```

To use the repository manager with Bundler, you have to configure the gem repository group as a mirror:

²¹⁵⁶ <http://bundler.io/>

```
$ bundle config mirror.http://rubygems.org
http://localhost:8081/nexus/content/repositories/gems-all
```

You can confirm the configuration succeeded by checking the configuration:

```
$ bundle config
Settings are listed in order of priority.
The top value will be used.
mirror.http://rubygems.org
Set for the current user (/Users/manfred/.bundle/config):
"http://localhost:8081/nexus/content/repositories/gems-all"
```

With this configuration completed, you can create a `Gemfile` and run `bundle install` as usual and any downloads of gem files will be using the gem repository group configured as a mirror.

Pushing Gems

At this point you have set up the various gem repositories on the repository manager (proxy, hosted and group), and are successfully using them for installing new gems on your systems. A next step can be to push gems to hosted gem repositories to provide them to other users. All this can be achieved on the command line with the features of the `nexus` gem.

The `nexus` gem is available at RubyGems and provides features to interact with Nexus Repository Manager Pro including pushing gems to a hosted gem repository including the necessary authentication.

You can install the `nexus` gem with

```
$ gem install nexus
Fetching: nexus-1.2.1.gem (100%)
...
Successfully installed nexus-1.2.1
Parsing documentation for nexus-1.2.1
Installing ri documentation for nexus-1.2.1
Done installing
```

After successful installation you can push your gem to a desired repository. The initial invocation will request the URL for the gem repository and the credentials needed for deployment. Subsequent pushes will use the cached information.

```
$gem nexus example-1.0.0.gem
Enter the URL of the rubygems repository on a Nexus server
URL: http://localhost:8081/nexus/content/repositories/gems-internal
The Nexus URL has been stored in ~/.gem/nexus
Enter your Nexus credentials
Username: admin
Password:
Your Nexus credentials have been stored in /Users/manfred/.gem/nexus
Uploading gem to Nexus...
Created
```

By default pushing an identical version to the repository, known as redeployment, is not allowed in a hosted gem repository. If desired this configuration can be changed, although we suggest to change the version for each new deployment instead.

The nexus gem provides a number of additional features and parameters. You can access the documentation with

```
$ gem help nexus
```

E.g. you can access a list of all configured repositories with

```
$gem nexus --all-repos
DEFAULT:
http://localhost:8081/nexus/content/repositories/gems-internal
```

RPM Packages and YUM Repositories

Available in Nexus Repository OSS and Nexus Repository Pro

Introduction

RPM packages and the RPM package manager solution yum are used as the default application package manager on Linux based operating systems such as Red Hat²¹⁵⁷, CentOS²¹⁵⁸, Fedora²¹⁵⁹, Oracle Linux²¹⁶⁰, SUSE²¹⁶¹, openSUSE²¹⁶², Scientific Linux²¹⁶³ and others.

²¹⁵⁷ <http://www.redhat.com/>

²¹⁵⁸ <http://www.centos.org/>

²¹⁵⁹ <https://getfedora.org/>

²¹⁶⁰ <http://www.oracle.com/us/technologies/linux/overview/index.html>

²¹⁶¹ <https://www.suse.com/>

²¹⁶² <http://www.opensuse.org/>

²¹⁶³ <https://www.scientificlinux.org/>

The yum repository support of Nexus Repository Manager Pro and Nexus Repository Manager OSS allows you to expose RPM packages hosted in a Maven repository in the yum repository format. It generates the yum metadata, so that systems with yum support can use the repository manager as a software package repository.

This enables a build and deployment pipeline for Java or other JVM-based applications via Maven repositories to Linux computers. E.g., a Java Enterprise Archive (EAR) or Web Archive (WAR) or some other application is deployed to a Maven repository. The deployment is performed by a CI server build using Maven or other build systems or as a manually run deployment. Once the repository manager hosts the application RPM package, it can be retrieved via yum for installation and updates on testing and production systems. The metadata of the RPM package can additionally trigger installation of other required packages including e.g. a Java runtime or an application server.

Installation and Requirements

Yum support is bundled with Nexus Repository Manager Pro and Nexus Repository Manager OSS and no further installation steps are required. It relies on the commands `createrepo` and `mergerepo` to be installed on the operating system running the repository manager server and to be available on the path.

Documentation about these commands can be found on the [createrepo website](#)²¹⁶⁴. Typically `createrepo` is installed on RPM-based Linux distributions and as such they are suitable to run the repository manager with yum support. If desired the path to the commands can be configured in the user interface.

If your RPM-based system does not have this command you can install it by running

```
yum install createrepo
```

with a sufficiently privileged user.

Configuration

Yum related configuration is done with the Capabilities management documented in [Accessing and Configuring Capabilities\(see page 0\)](#).

The capability *Yum: Configuration* allows you to enable or disable yum support. It can only be enabled successfully, if the `createrepo` and the `mergerepo` commands can be found by the repository manager. By default it will look for them on the path. The configuration settings *Path of "createrepo"* and *Path of "mergerepo"* allow you to alternatively configure a specific absolute path.

The parameter Max number of parallel threads defaults to ten and defines how many threads can be used to manage the yum repositories with the `createrepo` and the `mergerepo` commands.

²¹⁶⁴ <http://createrepo.baseurl.org/>

You need to ensure that this capability is enabled, before proceeding with your repository specific configuration. The Status tab of the capability displays the detected versions for `createrepo` and `mergerepo` and details any problems as applicable.

Configure Hosted Yum Repositories

To expose a Maven repository like Releases via yum, press the **New** button in the capabilities configuration tab and select *Yum: Generate Metadata* from the Type drop down in the dialog displayed in *Figure 18.1, "Yum Configuration for the Hosted Releases Repository"*.

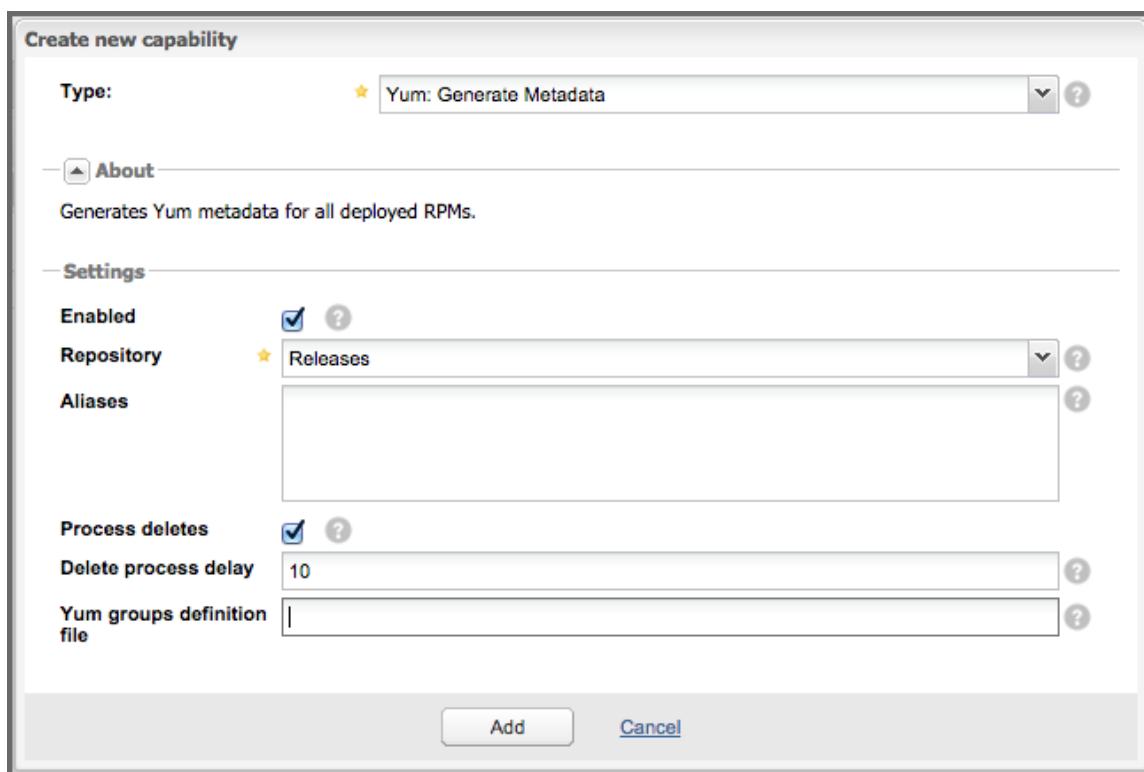


Figure 18.1. Yum Configuration for the Hosted Releases Repository

The **Repository** drop down allows you to select the hosted Maven repository. Release as well as snapshot policy repositories can be configured. Once configured, any RPM package added to the hosted Maven repository is available via yum. The same URL of the repository used for Maven based access e.g., `http://localhost:8081/nexus/content/repositories/releases` and displayed in the repository administration area list, can be used as the URL for a yum repository in the yum configuration.

The yum integration supports versioned views on a repository. The URL `http://localhost:8081/nexus/service/local/yum/repos/releases/1.2.3/` exposes a yum repository with all packages with version 1.2.3 in the releases repository. A custom repodata folder is available at the context.

The **Aliases** field can be used to define alternative access paths to specific versions. For example, you can configure alias values of

```
production=1.2,testing=2.0
```

These values would in turn expose the version 1.2 under a URL like `http://localhost:8081/nexus/service/local/yum/repos/releases/production/` and the version 2.0 at `http://localhost:8081/nexus/service/local/yum/repos/releases/testing/`. Using these URLs in the yum configuration on the target servers as a static URL enables upgrades to new versions by simply changing the alias e.g. to `production=1.3` and running a yum update command on the target server.

Besides maintaining the aliases in the capability administration, it is possible to create or update an alias in the command line:

```
curl -d "1.0" --header "Content-Type: text/plain" http://localhost:8081/nexus/service/local/yum/alias/releases/development/
```

Usage of the alias-based URL is done via the normal yum configuration e.g. with a file `/etc/yum.repos.d/nexus-production.repo` and the following content:

```
[nexus-production]
name=Production Repository
baseurl=http://localhost:8081/nexus/service/local/yum/repos/releases/production/
enabled=1
protect=0
gpgcheck=0
metadata_expire=30s
autorefresh=1
type=rpm-md
Promote RPM through Stages
```

By deploying new versions and switching alias associations to the versions, a controlled roll out of new versions of RPM archives to target servers can be achieved.

The configuration options *Process deletes* and *Delete process delay* can be used to enable updates to the yum metadata, following delete operations of rpm packages in the Maven repository.

The *Yum groups definition file* configuration allows you to configure a path to a package groups configuration file. This file is typically named `comps.xml` and can be used to define a group of RPM packages. The groups can then be managed with commands such as `yum grouplist`, `yum groupinstall` and `yum groupremove`.

Once the capability is saved, the *Status* tab displays an example yum configuration for accessing the repository. Each RPM deployed to the repository causes the repository manager to update the yum metadata immediately.

The metadata used by yum is available in the repodata context e.g., at `.../nexus/content/repositories/releases/repodata`, in the following files. Apart from the `repomd.xml` file, the files are prepended with a unique hash value as part of the name to avoid caching issues:

repomd.xml

This XML file contains information about the other metadata files.

hash-primary.xml.gz

This zipped XML file describes the primary metadata of each RPM archive in the repository.

hash-filelists.xml.gz

This zipped XML file describes all the files contained within each RPM archive.

hash-other.xml.gz

This zipped XML file contains further, miscellaneous information regarding each RPM archive.

Proxying Repositories

The yum integration is able to proxy yum-enabled Maven repositories from remote Nexus Repository Manager servers. The metadata in these repositories contains absolute URLs, which will cause yum to use these URLs. The capability *Yum: Proxy Metadata* can be configured on such a proxy repository. It will cause the URLs in the metadata to be rewritten and corrected for the current repository manager.

This allows the proxy repositories to be part of a repository group and expose the correct yum metadata via the merged metadata creation on the group.

Configure Repository Group for yum

To expose a Maven repository group to yum, simply add a new capability with the type *Yum: Merge Metadata* and select the repository group in the Group drop down. Figure 18.2, “Yum Configuration for the Hosted Releases Repository” shows the Settings tab for the Public Repositories configured for yum.



Figure 18.2. Yum Configuration for the Hosted Releases Repository

This configuration causes the repository manager to merge the yum metadata of all repositories in the repository group. Metadata generation has to be configured for the individual repositories desired to be exposed as part of the group. The URL of the repository group, can now be used as the URL for a yum

repository in the yum configuration, since the same metadata files are being maintained and exposed via the repodata context like in a hosted repository.

Scheduled Tasks

The yum support includes a scheduled task called *Yum: Generate Metadata* that can be run to generate yum metadata with createrepo for a specific repository.

Typically this task does not need to be run, however it can be useful when RPM files already exist in a repository or are deployed in some external mode that requires a manually triggered update of the metadata.

The *Optional Output Directory* parameter can be used to get the metadata created in a different folder from the default repo-data in repository root.

The parameter *Single RPM per directory* is activated by default and causes the task to take only one RPM file per directory in the Maven repository into account when creating the yum metadata.

The *Full Rebuild* parameter can be activated to force the repository manager to traverse all directories in the repository in order to find the RPM files that need to be taken into account for the metadata creation. This option is off by default and causes the repository manager to take the existing metadata cache as a basis for the update.

Example Usages

The component upload to a hosted repository allows you to publish any RPM file to a Maven repository and subsequently expose it via the yum integration. This is a basic use case, that can be used to e.g., expose third-party supplied RPM archives. The more advanced setup involves a Maven project that creates the RPM as detailed in this section.

The [RPM Maven Plugin](#)²¹⁶⁵ can be used to create an RPM package of a Java application and attach it as a secondary built component with the attached-rpm goal. An example plugin configuration for a war project can be found below in "Maven pom.xml snippet for configuring and attaching an RPM".

If your project includes a distributionManagement for the releases repository, a build with mvn clean deploy , causes the war as well as the rpm file to be uploaded to the repository. With yum configured for the releases repository, the RPM package can be consumed by any server configured to access the repository with yum.

Maven pom.xml snippet for configuring and attaching an RPM

²¹⁶⁵ <http://www.mojohaus.org/rpm-maven-plugin/>

```
<build>
  <plugins>
    <plugin>
      <groupId>org.codehaus.mojo</groupId>
      <artifactId>rpm-maven-plugin</artifactId>
      <version>2.1</version>
      <executions>
        <execution>
          <id>build-rpm</id>
          <goals>
            <goal>attached-rpm</goal>
          </goals>
        </execution>
      </executions>
      <configuration>
        <group>Applications/Internet</group>
        <copyright>EPL</copyright>
        <requires>
          <require>tomcat8</require>
        </requires>
        <mappings>
          <mapping>
            <directory>/var/lib/tomcat8/webapps/${project.build.finalName}</directory>
            <sources>
              <source>
                <location>${project.build.directory}/${project.build.finalName}</location>
              </source>
            </sources>
          </mapping>
        </mappings>
      </configuration>
    </plugin>
  ...

```

Now that the repository manager hosts a RPM package with your Java web application in a yum repository, you can configure yum on the target server to retrieve it for installation. You have to configure yum to include the repository as a package source. Depending on your specific Linux distribution, file paths and tools for this configuration will differ. A typical example would be to create a new file e.g. `nexus.repo` in `/etc/yum.repos.d`. A sample configuration for the public group can be found in "Example yum source repository configuration".

Example yum source repository configuration

```
[nexus-public]
name=Nexus Releases Repository
baseurl=http://<yournexusserverhost>/nexus/content/groups/public
enabled=1
protect=0
gpgcheck=0
metadata_expire=30s
autorefresh=1
type=rpm-md
```

Once the configuration is added you can install or update any RPM packages from the repository manager as usual with `yum install <packagename>` or `yum update <packagename>`. This includes any required dependencies like a servlet container or a Java runtime as declared in the RPM Maven Plugin configuration and therefore the RPM/yum metadata.

Staging with RPMs

Available in Nexus Repository Pro only

The [Staging Suite](#)(see page 380) of Nexus Repository Manager Pro can be used with yum repositories allowing you to optimize the release process for your RPM packages.

The capability *Yum: Staging Generate Metadata* allows you to configure yum for a *Staging Profile*. Any staging repository created from a deployment via the staging profile is then automatically configured as a yum repository. The Aliases configuration allows for the same mechanism as the capability *Yum: Generate Metadata* documented earlier.

The capability *Yum: Staging Merge Metadata* can be used to configure yum metadata creation for a build promotion profile and the attached repository groups.

If a staging repository or build promotion repository is configured for yum metadata generation and exposed via a repository group that is configured for yum metadata merging, the metadata from staging will be merged appropriately.

Site Repositories

Available in Nexus Repository OSS and Nexus Repository Pro

Introduction

Nexus Repository Manager Pro and Nexus Repository Manager OSS include a repository provider for hosting static websites - the Site format. Hosted repositories with this format can be used to hold a Maven-generated website. This section details the process of configuring a site repository and configuring a simple Maven project to publish a Maven-generated project site to the repository manager.

Creating a New Maven Project

In this section, you will be creating a simple Maven project with a simple website that will be published to a Site repository. To create a new Maven project, use the archetype plugin's archetype:generate goal on the command line, and supply the following identifiers:

- groupId: org.sonatype.books.nexus
- artifactId: sample-site
- version: 1.0-SNAPSHOT
- package: org.sonatype.books.nexus

```
~/examples$ mvn archetype:generate
[INFO] [archetype:generate {execution: default-cli}]
[INFO] Generating project in Interactive mode
Choose archetype:
1: internal -> appfuse-basic-jsf
...
13: internal -> maven-archetype-portlet (A simple portlet application)
14: internal -> maven-archetype-profiles ()
15: internal -> maven-archetype-quickstart ()
...
Choose a number: (...14/15/16...) 15: : 15
Define value for groupId: : org.sonatype.books.nexus
Define value for artifactId: : sample-site
Define value for version: 1.0-SNAPSHOT: : 1.0-SNAPSHOT
Define value for package: org.sonatype.books.nexus: : org.sonatype.books.nexus
Confirm properties configuration:
groupId: org.sonatype.books.nexus
artifactId: sample-site
version: 1.0-SNAPSHOT
package: org.sonatype.books.nexus
Y: :
[INFO] Parameter: groupId, Value: org.sonatype.books.nexus
[INFO] Parameter: packageName, Value: org.sonatype.books.nexus
[INFO] Parameter: package, Value: org.sonatype.books.nexus
[INFO] Parameter: artifactId, Value: sample-site
[INFO] Parameter: basedir, Value: /private/tmp
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] OldArchetype created in dir: /private/tmp/sample-site
[INFO] -----
[INFO] BUILD SUCCESSFUL
```

After running the archetype:generate command, you will have a new project in a sample-site/ subdirectory.

Configuring Maven for Site Deployment

To deploy a site to a *Site* repository, you will need to configure the project's distribution management settings, add site deployment information, and then update your Maven settings to include the appropriate credentials for the repository manager.

Add the following section to sample-site/pom.xml before the dependencies element. This section will tell Maven where to publish the Maven-generated project website:

Distribution Management for Site Deployment.

```
<distributionManagement>
  <site>
    <id>nexus</id>
    <url>dav:http://localhost:8081/nexus/content/sites/site/</url>
  </site>
</distributionManagement>
```

The URL in the distribution management does not change with the project versions automatically, which means that any redeployment overwrites old content and potentially leaves old stale files behind. To have a new deployment directory for each version, change the URL to a parameterized setup or a hardcoded specific URL for your project version.

If you combine this approach with a redirector or a static page that links to the different copies of your site, you can e.g., maintain separate sites hosting your javadoc and other documentation for different releases of your software.

The DAV protocol used by for deployment to the repository manager requires that you add the implementing library as a dependency to the Maven site plugin configuration.

Configuring Version 3.4 of the Maven Site Plugin with DAV support

```
<build>
  <plugins>
    <plugin>
      <artifactId>maven-site-plugin</artifactId>
      <version>3.4</version>
      <dependencies>
        <dependency>
          <groupId>org.apache.maven.wagon</groupId>
          <artifactId>wagon-webdav-jackrabbit</artifactId>
          <version>2.6</version>
        </dependency>
      </dependencies>
    </plugin>
  </plugins>
</build>
```

Adding Credentials to Your Maven Settings

When the Maven Site plugin deploys a site to a repository, it needs to supply the appropriate deployment credentials. To configure this, you need to add credentials to your Maven Settings. Open up your `~/.m2/settings.xml` and add the following server configuration to the servers element:

Configuring Deployment Credentials for Site Deployment

```
<settings>
  <servers>
    <server>
      <id>nexus</id>
      <username>deployment</username>
      <password>deployment123</password>
    </server>
  </servers>
</settings>
```

⚠ Configuring Deployment Credentials for Site Deployment uses the default deployment user and the default deployment user password. You will need to configure the username and password to match the values expected by your repository manager.

Creating a Site Repository

To create a site repository, log in as a user with Administrative privileges, and click on Repositories under Views.Repositories in the main menu. Under the *Repositories* tab, click on the *Add...* dropdown and choose [Hosted Repository](#)(see page 0) as shown in *Figure 19.1, “Adding a Hosted Repository”*.


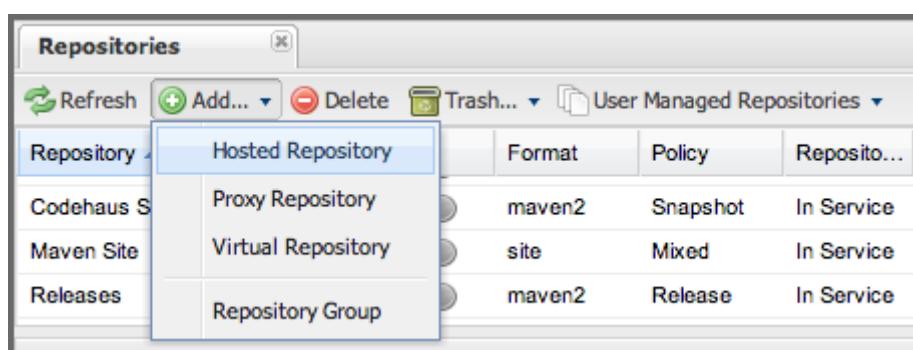


Figure 19.1. Adding a Hosted Repository

In the New Hosted Repository form, click on the Provider drop-down and chose the Site provider as shown in *Figure 19.2, “Creating a New Maven Site Repository”*. Although you can use any arbitrary name and identifier

for your own repository, for the section's example, use a Repository ID of site and a Repository Name of Maven Site.

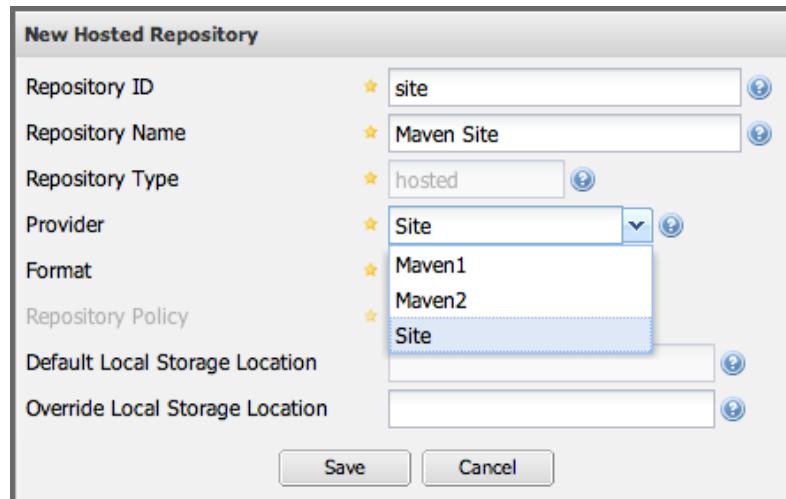


New Hosted Repository

| | |
|---------------------------------|--|
| Repository ID | <input type="text" value="site"/> |
| Repository Name | <input type="text" value="Maven Site"/> |
| Repository Type | <input type="text" value="hosted"/> |
| Provider | <input style="width: 150px; height: 20px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="button" value="Site"/> <div style="border: 1px solid #ccc; padding: 5px; display: inline-block;"> Site Maven1 Maven2 Site </div> |
| Format | <input type="text" value="maven2"/> |
| Repository Policy | <input type="text" value="Release"/> |
| Default Local Storage Location | <input type="text"/> |
| Override Local Storage Location | <input type="text"/> |

Figure 19.2. Creating a New Maven Site Repository

After creating a new Site repository, it should appear in the list of repositories as shown in *Figure 19.3, “Newly Created Site Repository”*. Note that the Repository Path shown in *Figure 19.3, “Newly Created Site Repository”* is the same as the repository path referenced in Distribution Management for Site Deployment.

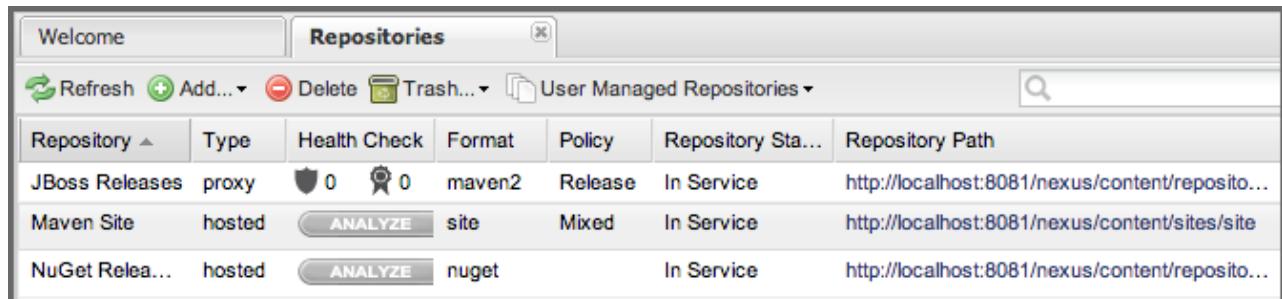

Welcome | **Repositories**

| Repository | Type | Health Check | Format | Policy | Repository Status | Repository Path |
|----------------|--------|--|--------|---------|-------------------|---|
| JBoss Releases | proxy | 0 | maven2 | Release | In Service | http://localhost:8081/nexus/content/repositories/jboss-releases |
| Maven Site | hosted | <input type="button" value="ANALYZE"/> | site | Mixed | In Service | http://localhost:8081/nexus/content/sites/site |
| NuGet Relea... | hosted | <input type="button" value="ANALYZE"/> | nuget | | In Service | http://localhost:8081/nexus/content/repositories/nuget-releases |

Figure 19.3. Newly Created Site Repository

- ⚠** The Site provider support is implemented in the Nexus Site Repository Plugin and is installed by default in Nexus Repository Manager OSS as well as Nexus Repository Manager Pro.

Add the Site Deployment Role

In the Maven Settings shown in *Configuring Deployment Credentials for Site Deployment*, you configured your Maven instance to use the default deployment user and password. To successfully deploy a site to the repository manager, make sure that the deployment user has the appropriate role and permissions. To add the site deployment role to the deployment user, click on *Users* under the *Security* section of the main menu, and click on the *Add* button in the *Role Management* section. This will trigger the display of the *Add Roles*

dialog that will allow you to apply a filter value of site to locate the applicable roles as shown in *Figure 19.4, “Adding the Site Deployment Role to the Deployment User”*.

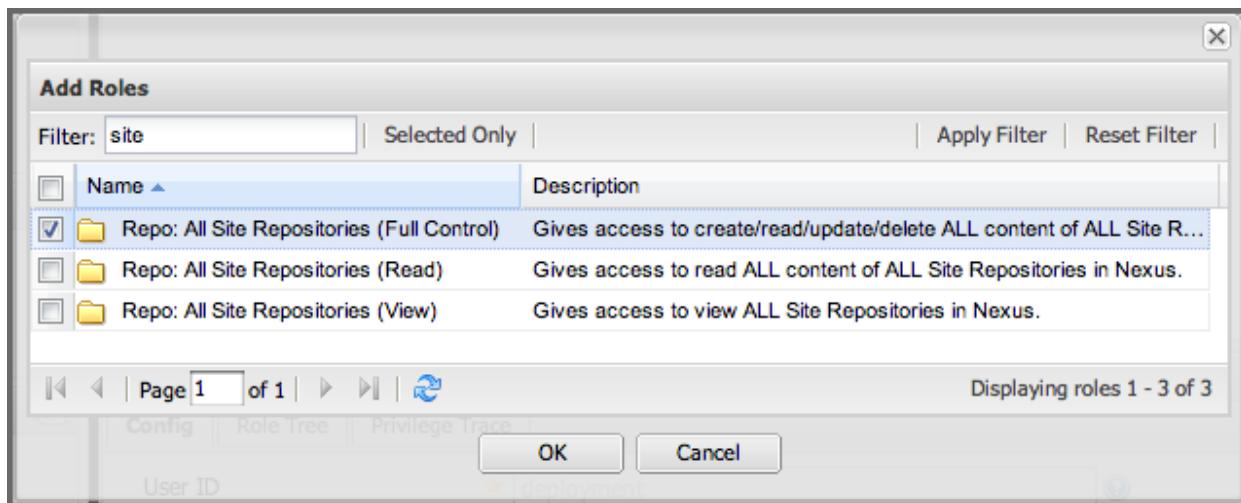


Figure 19.4. Adding the Site Deployment Role to the Deployment User

Check the box beside the *Repo: All Site Repositories (Full Control)* role in the list and press *OK* in the dialog. After the dialog closes, you should see the new role in the *Role Management* section. Click on the *Save* button to update the roles for the deployment user. The deployment user now has the ability to publish sites to a Maven site repository.

Publishing a Maven Site

To publish a site to a Site repository, run `mvn site-deploy` from the `sample-site/` project created earlier in this section. The Maven Site plugin will deploy this site to the repository manager using the credentials stored in your Maven Settings.

```
~/examples/sample-site$ mvn site-deploy
[INFO] Scanning for projects...
[INFO] -----
[INFO] Building sample-site
...
[INFO] Generating "About" report.
[INFO] Generating "Issue Tracking" report.
[INFO] Generating "Project Team" report.
[INFO] Generating "Dependencies" report.
[INFO] Generating "Project Plugins" report.
[INFO] Generating "Continuous Integration" report.
[INFO] Generating "Source Repository" report.
[INFO] Generating "Project License" report.
[INFO] Generating "Mailing Lists" report.
[INFO] Generating "Plugin Management" report.
[INFO] Generating "Project Summary" report.
[INFO] [site:deploy {execution: default-cli}]
http://localhost:8081/nexus/content/sites/site/ - Session: Opened
Uploading: ./css/maven-base.css to http://localhost:8081/nexus/content/sites/site/
#http://localhost:8081/nexus/content/sites/site//./css/maven-base.css \
- Status code: 201
Transfer finished. 2297 bytes copied in 0.052 seconds
Uploading: ./css/maven-theme.css to http://localhost:8081/nexus/content/sites/site/
#http://localhost:8081/nexus/content/sites/site//./css/maven-theme.css \
- Status code: 201
Transfer finished. 2801 bytes copied in 0.017 seconds
Transfer finished. 5235 bytes copied in 0.012 seconds
http://localhost:8081/nexus/content/sites/site/ - Session: Disconnecting
http://localhost:8081/nexus/content/sites/site/ - Session: Disconnected
[INFO] -----
[INFO] BUILD SUCCESSFUL
[INFO] -----
[INFO] Total time: 45 seconds
[INFO] Finished at: Sat Oct 03 07:52:35 CDT 2009
[INFO] Final Memory: 35M/80M
[INFO] -----
```

Once the site has been published, you can load the site in a browser by going to <http://localhost:8081/nexus/content/sites/site/>.

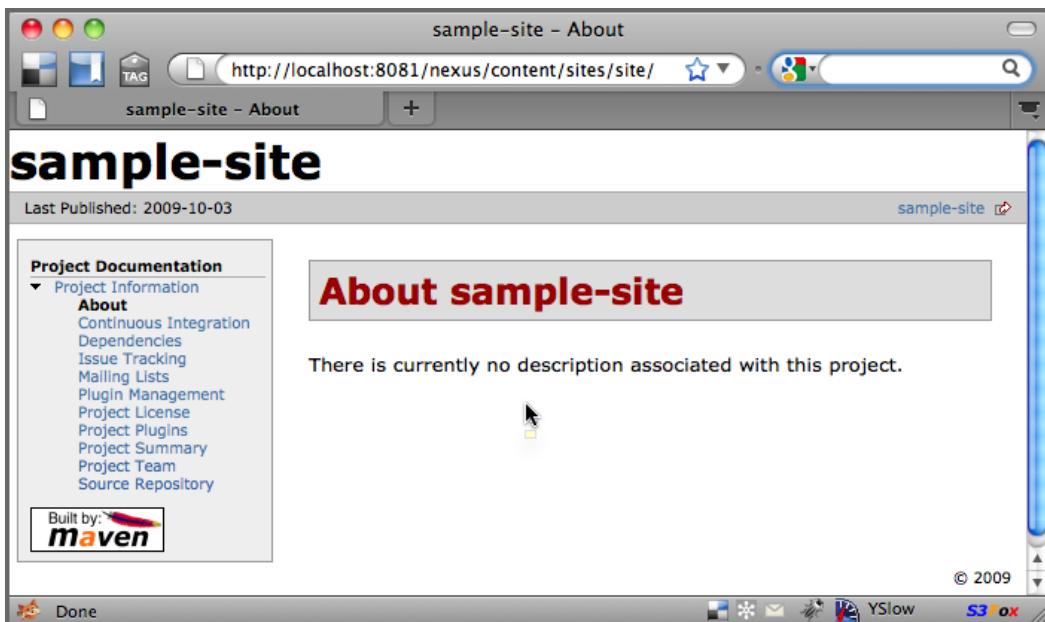


Figure 19.5. Sample Site Maven Project Website

Repository Manager Best Practices

Available in Nexus Repository OSS and Nexus Repository Pro

Introduction

Once you decide to install a Nexus Repository Manager, the next decision is how to set up your repositories, particularly if you have multiple teams sharing the same instance. Nexus Repository Manager is very flexible in this area and supports a variety of configurations. We first describe the options and then discuss the thought process used to decide what makes sense for your organization.

Repositories Per Project/Team

The first and most obvious way to support multiple teams is to configure a pair of repositories per team (one release, one snapshot). The team is then given the appropriate C.R.U.D. permissions, and they are able to use the system for their components.

Partition Shared Repositories

Another option is to have a single pair (or a few pairs) of release and snapshot repositories for your entire organization. In this case, the access is controlled by [repository targets](#)(see page 0).

Simply put, a repository target is a way to manage a set of components based on their paths in a repository. A repository target is simply a list of regular expressions and a name. For example, a repository target pattern for Apache Maven would be `./org/apache/maven/.` or for Nexus Repository Manager OSS it would be `./org/sonatype/nexus/..`

⚠ While it is most common to manage components based on the path of their groupId, the *Regular Expression* is matched against the entire path, and so it is also possible, for example, to define Sources as `.*-sources.jar`. It is also worth noting that repository targets are not mutually exclusive. It is perfectly valid for a given path to be contained by multiple targets.

In this model, you would create a repository target for each project in your system. You are then able to take the repository target and associate it with one or more repositories or repository groups. This creates new C.R.U.D. [privileges\(see page 0\)](#) specific to the repository or group. For example, you could take the Maven repository target, associate it with the release and snapshot repository. You get privileges you can assign to Create, Read, Update, Delete "Maven" (`./org/apache/maven/.`) components in the release and snapshot repositories.

This method is used to manage the <http://repository.apache.org> instance, where we have just one release and snapshot repository and each project team gets permissions to their components based on the path.

Selecting an Approach

First of all, these choices aren't mutually exclusive. In fact, the first option builds upon the default repository target of `.*` which simply gives you access to all components regardless of the path. You still associate the default repository target with specific repositories to create the assignable privileges.

In general, fewer repositories will scale better and are easier to manage. It's also easier to start off with a single pair of repositories with the default target and simply refine the permissions as you scale. Most things that are configured per repository (*Cache, Storage location, Snapshot purging, etc.*) will generally be applicable for all projects, so this mode avoids the duplication of these tasks. Since everything will be stored together in a single folder on disk, it makes backups easier as well.

The reasons why you would want multiple sets of repositories is essentially the opposite of above: If you need different expiration, snapshot purging, or storage folders, then a single shared repo won't work. Replication and failover strategies may also make this method easier to support. If you absolutely must maintain total separation between project teams, i.e. they can't read each other's components, then this solution might be more applicable as well.

In summary, Nexus Repository Manager allows you to control the security of your components based on the repository and/or the path of the components, meaning it is possible to slice and dice the system any way you see fit. The default suggestion is to use as few hosted repositories as possible and control the permissions by using repository targets.

Plugins

Available in Nexus Repository OSS and Nexus Repository Pro

Nexus Repository Manager OSS and Nexus Repository Manager Pro are built using a plugin architecture, where each version includes a different set of plugins. You can install plugins available from the open source community, other vendors, or created by yourself in addition to the default plugins.

Plugins can provide further functionality for the backend such as support for new repository formats, specific behavior for components, new scheduled tasks, new staging rules, and any other additional functionality as well as new user interface components and modifications. They can also group a number of these features together in one plugin.

Managing Plugins

All plugins supplied by Sonatype are installed as part of the default configuration and can be found in `$NEXUS_HOME/nexus/WEB-INF/plugin-repository`. Most plugins are enabled by default.

Some plugins expose a capability as documented in [Accessing and Configuring Capabilities\(see page 0\)](#) and can be enabled, disabled, and otherwise configured in the capability administration. The branding plugin or the outreach plugin are examples of plugins exposing capabilities.

⚠ Prior to version 2.7 optional plugins, supplied by Sonatype, can be found in the directory `$NEXUS_HOME/nexus/WEB-INF/optional-plugins`. To install any of these, simply copy the folder containing the desired plugin into `$NEXUS_HOME/nexus/WEB-INF/plugin-repository`. When updating the repository manager, redo the install of any optional plugins using the newest version shipping with the download of the new version. Any configuration of the plugin will be preserved from one version to the other.

Plugins supplied by third parties or ones that you authored are installed by copying the folder with the plugin code into `sonatype-work/nexus/plugin-repository` or extracting the plugin bundle `zip` file in that folder.

After a restart of the repository manager, the new plugins will be active and ready to use. Upgrades are done by shutting down the repository manager, copying the newer plugin into the folder, removing the older one, and restarting it.

Capability-based plugins can be disabled in the capability administration. Otherwise, plugins can be removed by deleting the respective folder in the plugin-repository and restarting.

Developing Plugins

Developing plugins allow you to customize and further enhance the repository manager beyond the features and capabilities offered. This section provides you with the information to begin developing your own plugins.

The preferred way to write plugins is to use Java as the implementation language and Apache Maven as the build system. The [Nexus Example Plugins](#)²¹⁶⁶ project demonstrates a number of plugin examples for Nexus Repository Manager OSS and Nexus Repository Manager Pro. Further examples are the plugins of Nexus Repository Manager OSS.

The easiest way to create a new plugin project is to replicate a plugin with a similar functionality from these projects. The existing plugins and codebase should be used as examples for your own functionality. Inspect the source code of plugins with similar functionality, and read the JavaDoc documentation for the involved classes.

 The Maven archetype `nexus-archetype-quickstart` is deprecated.

To gain access to all the components needed for your plugin development, you have to proxy the Sonatype grid repository with the URL below:

```
https://repository.sonatype.org/content/groups/sonatype-public-grid/
```

For some Nexus Repository Manager Pro specific plugins, you might need access to the private grid. We suggest that you work with the support team in this situation.

Set up your project to include inheriting from the parent of all the Nexus Repository Manager OSS plugins with the version you are targeting as displayed in "Inheriting from the `nexus-plugins` Parent".

Inheriting from the `nexus-plugins` Parent

```
<parent>
  <groupId>org.sonatype.nexus.plugins</groupId>
  <artifactId>nexus-plugins</artifactId>
  <version>2.12.1-01</version>
</parent>
```

²¹⁶⁶ <https://github.com/sonatype/nexus-example-plugins>

❗ It is best to use the identical version of the parent as the Nexus Repository Manager instance no which you want to run your plugin. When developing a plugin you are using large parts of internals, which are subject to change from one version to another. This same logic applies to any dependencies as well.

A plugin Maven project creates a custom build output file in the form of a zip file that contains all dependencies, in addition to your class files and resources from your plugin and some metadata. Enable this by changing the packaging and adding the bundle plugin listed in "nexus-plugin Packaging".

nexus-plugin Packaging

```
<project>
...
<groupId>com.myorganization.nexus.plugins</groupId>
<artifactId>example-nexus-plugin</artifactId>
<version>1.0-SNAPSHOT</version>
<packaging>nexus-plugin</packaging>
...
<build>
  <plugins>
    <plugin>
      <groupId>org.sonatype.nexus</groupId>
      <artifactId>nexus-plugin-bundle-maven-plugin</artifactId>
      <extensions>true</extensions>
    </plugin>
  </plugins>
</build>
```

Add the dependencies in "Adding the Nexus Plugin API and Testsupport" to your Maven project pom.xml file, to access the Nexus Plugin API and test support.

Adding the Nexus Plugin API and Testsupport

```
<dependencies>
  <dependency>
    <groupId>org.sonatype.nexus</groupId>
    <artifactId>nexus-plugin-api</artifactId>
    <scope>provided</scope>
  </dependency>
  <dependency>
    <groupId>org.sonatype.nexus</groupId>
    <artifactId>nexus-plugin-testsupport</artifactId>
    <scope>test</scope>
  </dependency>
</dependencies>
```

These dependencies pull in a large number of transitive dependencies that expose Nexus Repository Manager functionality and other libraries to your project. Depending on the type of plugin and functionality you aim to create, additional dependencies and other details can be added to this minimal project setup. A large number of further classes is available and can be used as part of your plugin development. Some of these classes are contained in other plugins. If you want to use these, you have to add a dependency to this plugin to your plugin's pom.xml.

An example is a plugin you create that exposes a REST API for further integrations with tools outside of the repository manager similar to how all other plugins expose a REST API. The dependency to add is displayed in "Adding a Dependency to the Nexus Siesta Plugin".

Adding a Dependency to the Nexus Siesta Plugin

```
<dependency>
  <groupId>com.sonatype.nexus.plugins</groupId>
  <artifactId>nexus-siesta-plugin</artifactId>
  <type>nexus-plugin</type>
  <scope>provided</scope>
</dependency>
```

Nexus Repository Manager Pro, Nexus Repository Manager OSS and plugins use JSR-330 annotations like @javax.inject.Inject and the Google Guice dependency injection framework. Typical classes are @Named and are often a @Singleton. Other components are typically injected via constructor injection as displayed in the example from the virusscan example plugin in "Constructor Injection".

Constructor Injection

```
@Inject
public VirusScannerRequestProcessor(@Final EventBus eventBus,
                                     @Final List<VirusScanner> scanners)
{
    this.eventBus = Preconditions.checkNotNull(eventBus);
    this.scanners = Preconditions.checkNotNull(scanners);
    ...
}
```

Your Maven project setup should follow the typical standard directory layout conventions. In addition, static resources such as JavaScript files, images, and CSS should be placed in src/main/resources/static.

Once you have created your Maven project as described above, you can build the plugin with

```
mvn clean install
```

A successful build includes the creation of a *.bundle.zip file in the target folder. To install your plugin into the repository manager you can extract it into the plugin-repository directory as described in [Managing Plugins](#)(see page 493).

Summary

The Nexus Repository Manager architecture is largely based on plugins including the differentiation of Nexus Repository Manager OSS and Nexus Repository Manager Pro. By inspecting the example plugins and the Nexus Repository Manager OSS project, you can create additional functionality for yourself as well as potentially share it with the user community.

Migrating

Available in Nexus Repository OSS and Nexus Repository Pro

If you have been running another repository manager, such as Artifactory, Archiva, or Proximity, and you want to migrate this repository to Nexus Repository Manager Pro or Nexus Repository Manager OSS, you can do so by copying the files from a standard Maven 2 repository file layout to the storage.

Depending on your repository managers, you will have to use different approaches to get access to a repository in Maven 2 format on disk.

Nexus Repository Manager Pro and Nexus Repository Manager OSS store its components in standard Maven 2 layout, and they are served directly from disk, and can therefore be easily integrated into an existing Nexus Repository Manager instance as a new hosted repository.

Topics in this section:

- [Migrating from Archiva\(see page 497\)](#)
- [Migrating from Artifactory\(see page 507\)](#)

Migrating from Archiva

Introduction

This section walks you through the process of migrating an existing [Archiva](#)²¹⁶⁷ installation to a new Nexus Repository Manager installation.

²¹⁶⁷ <http://archiva.apache.org/>

Migrating Archiva Repositories


Archiva uses the file system to store hosted repositories and proxied repositories, making migration from Archiva to Nexus Repository Manager very simple. The following sections outline the process for migrating existing Archiva repositories to a new Nexus Repository Manager instance.

Migrating an Archiva Managed Repository

Archiva *Managed Repositories* are the equivalent of hosted repositories. To migrate a Managed Repository from Archiva to Nexus Repository Manager, do the following:

- Create a *New Hosted Repository* in Nexus Repository Manager.
- Copy the Contents of the Archiva Managed Repository to the Storage Directory of the newly-created Hosted Repository.
- Rebuild the Index for the *New Hosted Repository*.

The following example will walk through the process of migrating the Archiva repository named `internal`, to a new Hosted repository named "internal". To view your managed repositories in Archiva, login to Archiva as an administrative user and click on the *Repositories* link in the left-hand navigation menu. Clicking on *Repositories* will list all of your Archiva Managed repositories as shown in *Figure 22.1, "Archiva Managed Repositories"*.

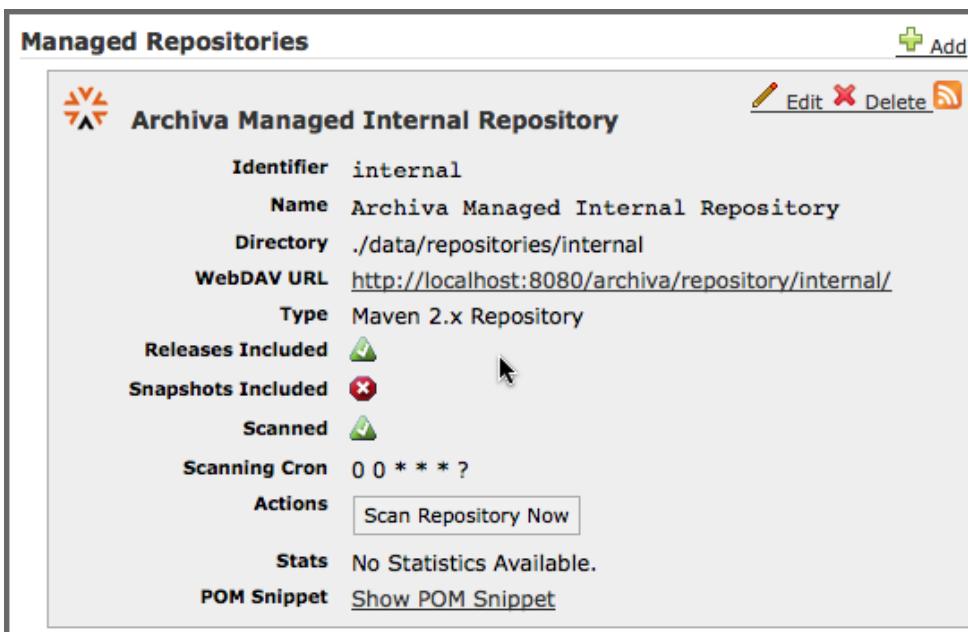


The screenshot shows the "Managed Repositories" page in Archiva. A single repository is listed:

| Archiva Managed Internal Repository | |
|-------------------------------------|---|
| Identifier | internal |
| Name | Archiva Managed Internal Repository |
| Directory | ./data/repositories/internal |
| WebDAV URL | http://localhost:8080/archiva/repository/internal/ |
| Type | Maven 2.x Repository |
| Releases Included | |
| Snapshots Included | |
| Scanned | |
| Scanning Cron | 0 0 * * * |
| Actions | Scan Repository Now |
| Stats | No Statistics Available. |
| POM Snippet | Show POM Snippet |

Figure 22.1. Archiva Managed Repositories

To migrate this Managed repository to a *Hosted repository*, find the directory in which Archiva stores all of the repository components. To do this, click on the *Edit* link listed next to the name of the repository you want to migrate as shown in *Figure 22.1, “Archiva Managed Repositories”*. Clicking on *Edit* should load the form shown in *Figure 22.2, “Editing an Archiva Managed Repository”*.

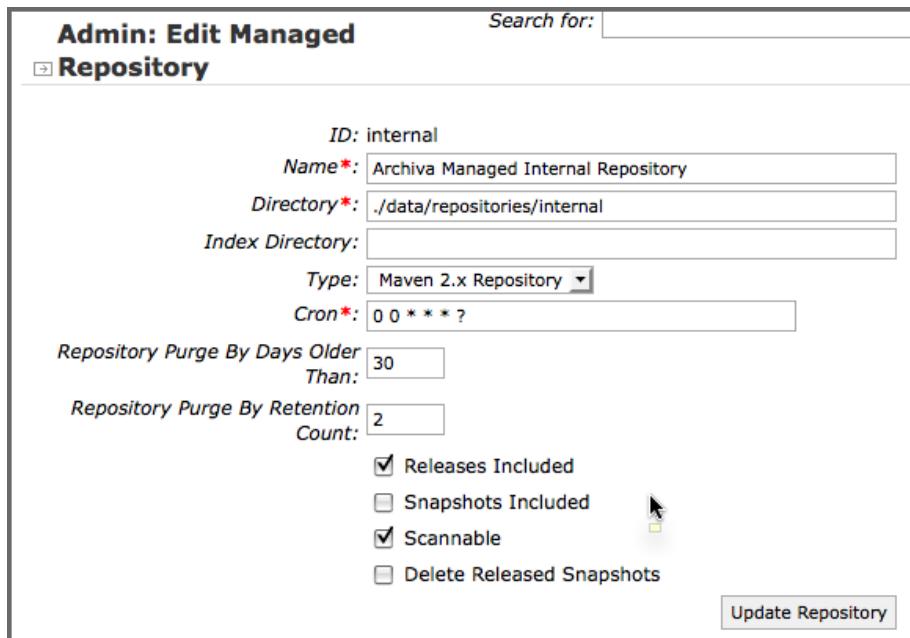

The screenshot shows the 'Admin: Edit Managed Repository' interface. The 'Name*' field is set to 'Archiva Managed Internal Repository'. The 'Directory*' field is set to '/data/repositories/internal'. The 'Type:' dropdown is set to 'Maven 2.x Repository'. The 'Cron*' field contains '0 0 * * * ?'. Under 'Repository Purge By Days Older Than:', the value '30' is entered. Under 'Repository Purge By Retention Count:', the value '2' is entered. There are four checkboxes at the bottom: 'Releases Included' (checked), 'Snapshots Included' (unchecked), 'Scannable' (checked), and 'Delete Released Snapshots' (unchecked). A 'Update Repository' button is located at the bottom right.

Figure 22.2. Editing an Archiva Managed Repository

Take note of the file path for *Directory*. The file path shown in *Figure 22.2, “Editing an Archiva Managed Repository”* is /data/repositories/internal. If Archiva is installed in /usr/local/archiva-1.2.1, it should correspond to the directory /usr/local/archiva-1.2.1/data/repositories/internal. You will use this path later in this section to copy the contents of your old Archiva Managed Repository to your new *Hosted Repository*.

Next, create a new hosted repository in Nexus Repository Manager with the same identifier and Name as the old Archiva Managed Repository. To do this, log into the user interface as an administrative user, click on *Repositories* in the left-hand main navigation menu, and then click on the *Add* drop-down as shown in *Figure 22.3, “Creating a Hosted Repository”*. Select *Hosted Repository* and then fill out the *Repository ID* and *Repository Name* to match the name of the old Archiva repository. If you are migrating a Snapshot repository, select a *Repository Policy* of *Snapshot*, and if you are migrating a Release repository select a *Snapshot Policy of Release*.

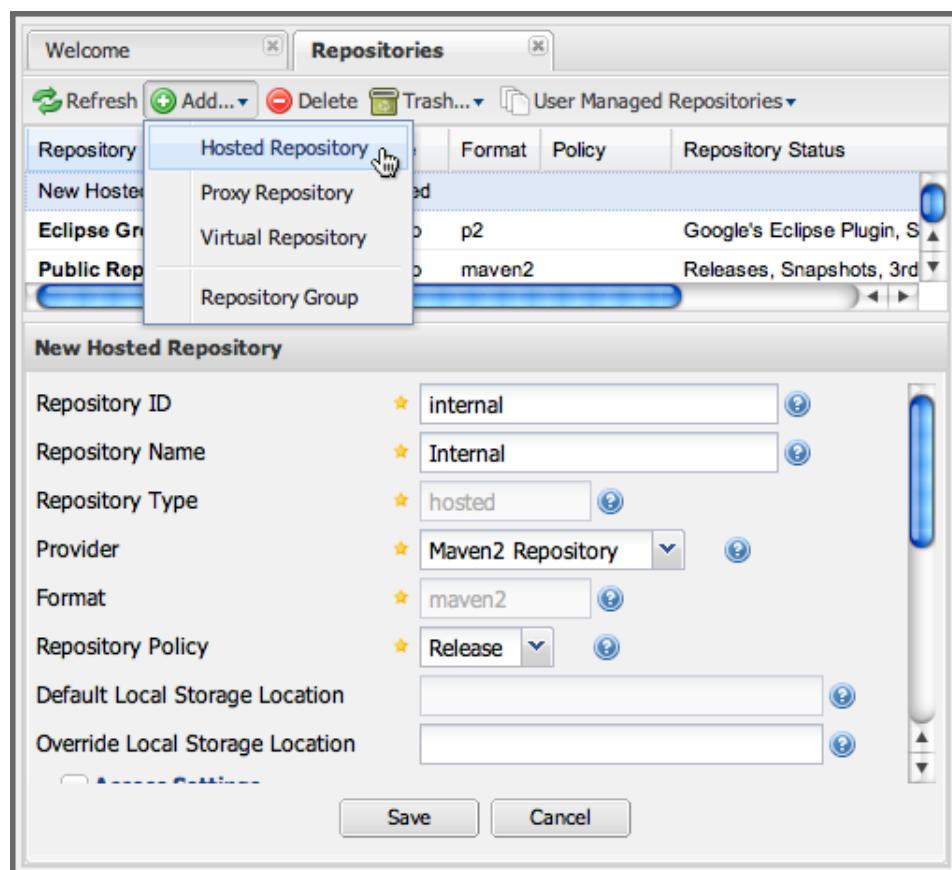


Figure 22.3. Creating a Hosted Repository

Now, you'll need to copy the Archiva repository to the repository in the Nexus Repository Manager. You can do this by copying the contents of the Archiva repository directory to the repository storage directory. If we assume that Archiva is installed in `/usr/local/archiva-1.2.1`, Nexus Repository Manager is installed in `/usr/local/nexus`, and the Sonatype Work directory is `/usr/local/sonatype-work`. You can copy the contents of the Archiva managed repository to the new hosted repository by executing the following command:

```
$ cp -r /usr/local/archiva-1.2.1/data/repositories/internal/* \
/usr/local/sonatype-work/nexus/storage/internal/
```

If you are migrating to a repository manager instance on a different server, you can simply create an archive of the `/usr/local/archiva-1.2.1/data/repositories/internal` directory, copy it to the new server, and then decompress your repository archive in the appropriate directory.

- ⚠ Archiva stores components from proxied remote repositories in the same directory as components in a managed repository. If you have been proxying a remote repository, you might want to remove components that have been proxied from a remote repository. For example, if your organization uses a groupId of `org.company` for an internal project, you can make sure to only copy the components under the corresponding `org/company/`.

Once the contents of the repository have been copied to the hosted repository, you must rebuild the repository index as shown in *Figure 22.4, “Rebuilding the Index of a Hosted Repository”*. Right-clicking on the repository in the list of repositories will display the context menu shown in the following figure.

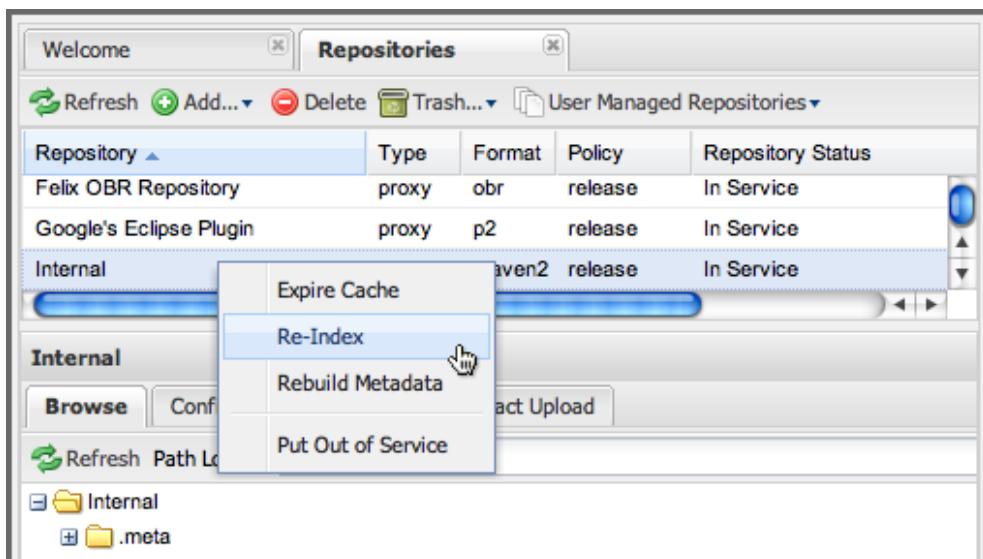


Figure 22.4. Rebuilding the Index of a Hosted Repository


Once the migration is complete, you will be able to search and browse the contents of your newly migrated hosted repository.

Migrating an Archiva Proxy Connector

Archiva allows you to define remote repositories and repository connectors to proxy remote repositories and cache remote components from remote repositories in Archiva Managed Repositories. While Nexus Repository Manager also provides Proxy repositories, there is one major difference between Nexus Repository Manager and Archiva. Where Nexus Repository Manager maintains a separate local storage directory for each proxy repository, Archiva combines cached remote components into a single file system with the contents of a managed repository. In other words, there is no good way to transfer an existing local cache of components between Archiva and Nexus Repository Manager without manually manipulating the contents of Archiva's Managed Repository directory.

To recreate an Archiva repository connector in Nexus Repository Manager as a Proxy repository and to preserve the local cache of components from this repository. You'll need to create a Proxy repository in Nexus Repository Manager, copy the contents of the existing proxy repository to the storage location for your new Proxy repository, and then rebuild the metadata of your new repository.


First step is to take a look at the Remote Repositories in your Archiva installation. Log in as an administrative user and then click on *Repositories* under the *Administration* menu in the left-hand Archiva navigation menu. Once you've clicked this link and loaded the list of repositories, scroll to the bottom of the page to see the list of remote repositories as shown in Figure 22.5, "Browsing Archiva Remote Repositories".

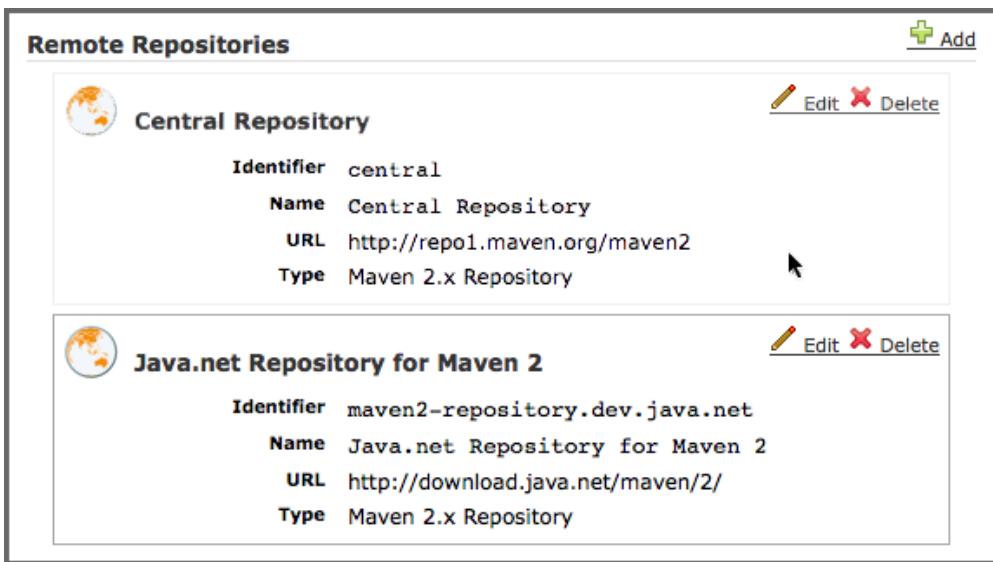

| Identifier | Name | URL | Type |
|--------------------------------|---------------------------------|-----------------------------------|----------------------|
| central | Central Repository | http://repo1.maven.org/maven2 | Maven 2.x Repository |
| maven2-repository.dev.java.net | Java.net Repository for Maven 2 | http://download.java.net/maven/2/ | Maven 2.x Repository |

Figure 22.5. Browsing Archiva Remote Repositories

Defining a proxy repository in Archiva involves associating one of the remote repositories defined in *Figure 2.5, "Browsing Archiva Remote Repositories"* with one of the Managed Repositories defined in *Figure 22.1, "Archiva Managed Repositories"*. Once you do this, requests for components from the managed repository will also query the remote repository. If a component is found in the remote repository, it will be retrieved and stored in the managed repository's storage directory. To see a list of proxy connectors and the managed repositories with which they are associated, click on *Proxy Connectors* in the left-hand Archiva menu and you will see a list similar to that shown in *Figure 22.6, "Archiva Proxy Connectors"*.

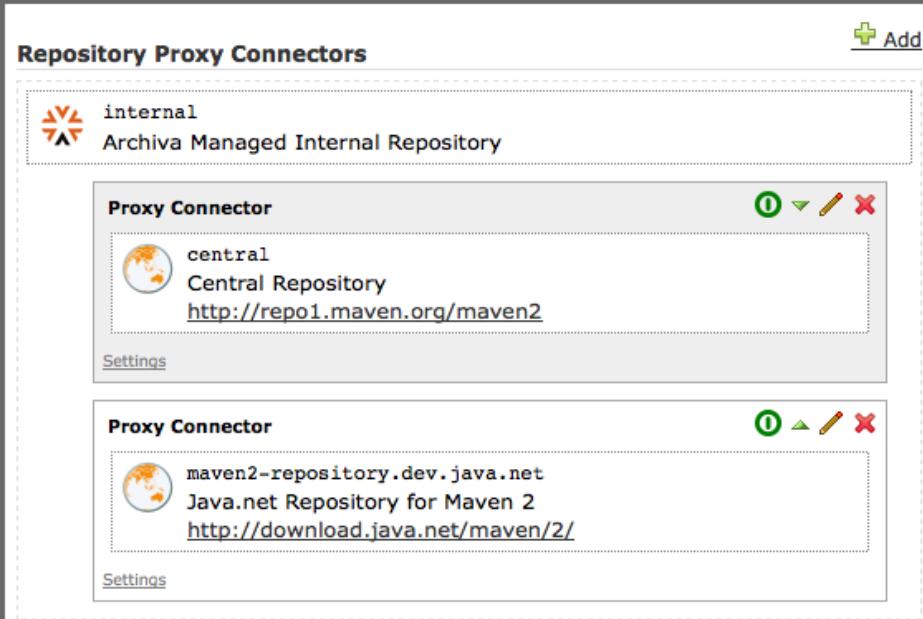

The screenshot shows the "Repository Proxy Connectors" section of the Archiva interface. It lists two proxy connectors:

- internal**: Archiva Managed Internal Repository. This is a system repository and cannot be edited.
- central**: Central Repository. This is a proxy connector with the URL <http://repo1.maven.org/maven2>. It includes edit, move, and delete icons.

Figure 22.6. Archiva Proxy Connectors

Click on the edit icon (or pencil) next to second *Proxy Connector* listed in *Figure 22.6, “Archiva Proxy Connectors”*, to load the settings form for this proxy connector shown in *Figure 22.7, “Archiva Proxy Connector Settings”*. You should use the settings for this proxy connect to configure your new proxy repository.

The screenshot shows the 'New Proxy Repository' configuration page. It includes fields for 'Network Proxy*', 'Managed Repository*', and 'Remote Repository*'. Under 'Policies', there are dropdowns for 'Return error when', 'On remote error', 'Releases', 'Snapshots', 'Checksum', and 'Cache failures'. A 'Properties' section allows adding key-value pairs. 'Black List' and 'White List' sections show patterns that have been set, each with an 'Add Pattern' button. A 'Save Proxy Connector' button is at the bottom.

Network Proxy*: (direct connection) ↗

Managed Repository*: internal ↗

Remote Repository*: maven2-repository.dev.java.net ↗

Policies:

- Return error when: always ↗
- On remote error: stop ↗
- Releases: once ↗
- Snapshots: never ↗
- Checksum: fix ↗
- Cache failures: yes ↗

Properties:

No properties have been set.

Black List:

No black list patterns have been set.

White List:

"javax/**" ✘
"org/jvnet/**" ✘
"com/sun/**" ✘

Save Proxy Connector

Figure 22.7. Archiva Proxy Connector Settings

To create a Proxy repository that will correspond to the Proxy Connector in Archiva, log into Nexus Repository Manager as an administrative user, and click on Repositories in the left-hand main menu. Once you can see a list of repositories, click on *Add...* and select *Proxy Repository* from the drop-down of repository types. In the *New Proxy Repository* form (shown in *Figure 22.8, “Creating a Proxy Repository”*) populate the repository ID, repository Name, and use the remote URL that was displayed in *Figure 22.5, “Browsing Archiva Remote Repositories”*. You will need to create a remote repository for every proxy connector that was defined in Archiva.

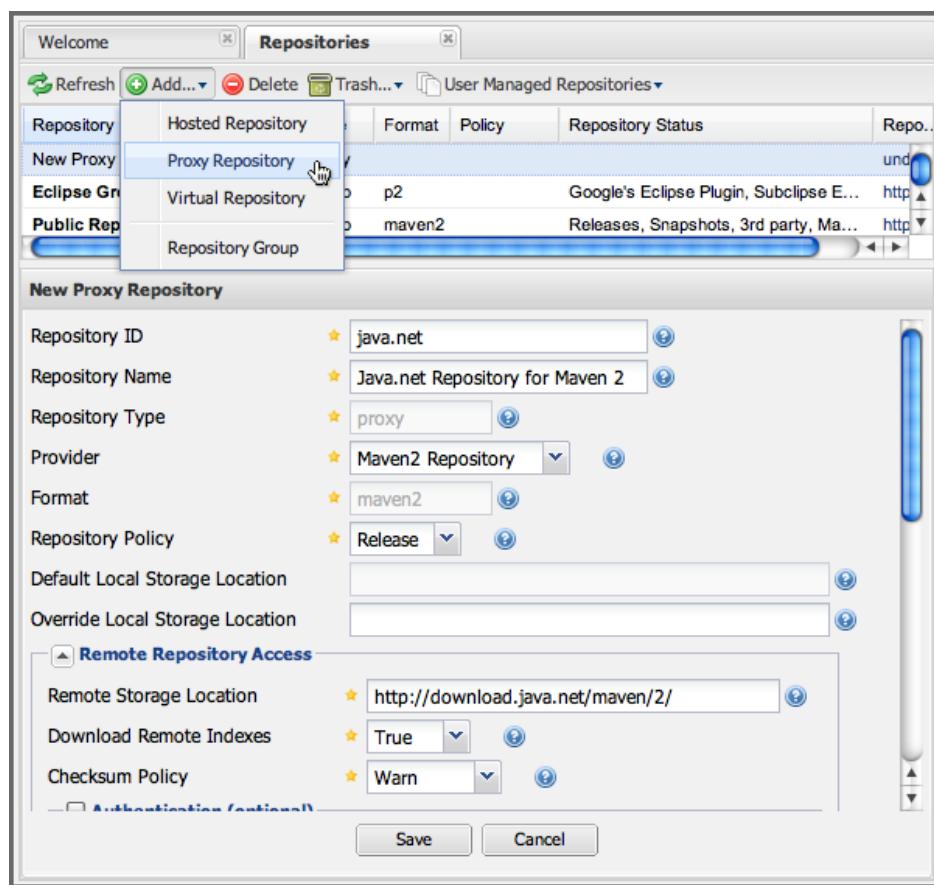


Figure 22.8. Creating a Proxy Repository

To expose this new Proxy repository in a *Repository Group*, create a new *Repository Group* or select an existing group by clicking on *Repositories* in the left-hand main menu. Click on a repository group and then select the Configuration tab to display the form shown in *Figure 22.9, “Adding a Proxy Repository to a Repository Group”*. In the Configuration tab you will see a list of Order Group Repositories and Available Repositories. Click and drag your new proxy repository to the list of Ordered Group Repositories, and click Save.

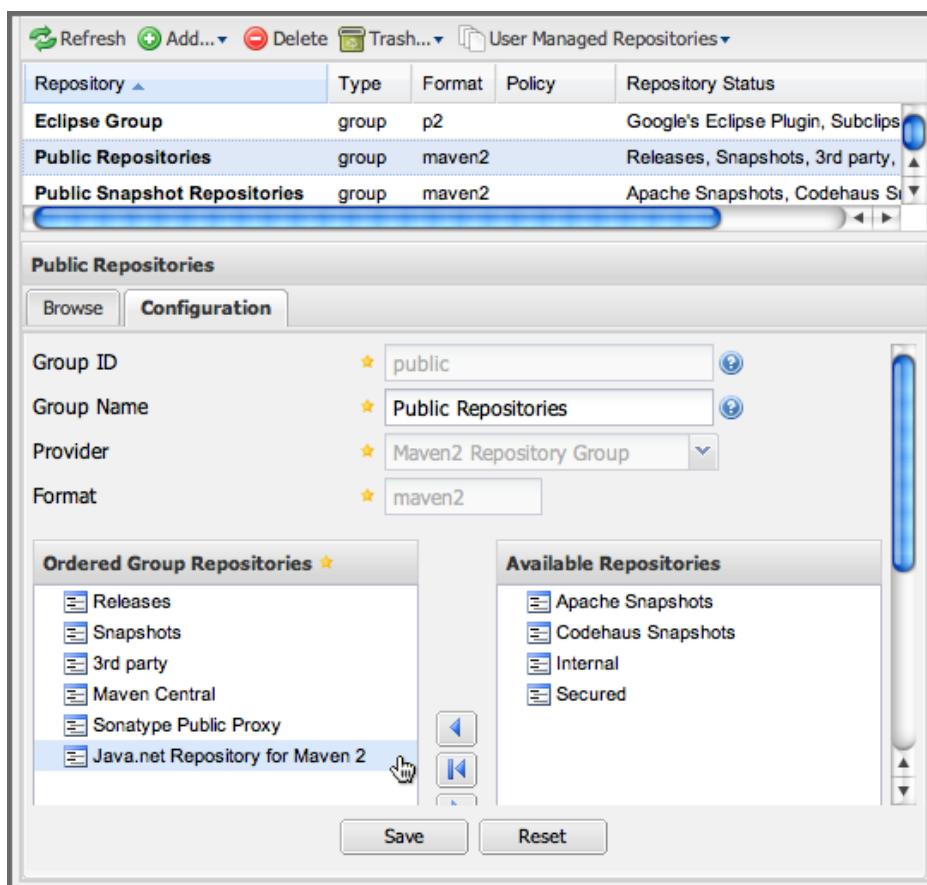


Figure 22.9. Adding a Proxy Repository to a Repository Group

Next, you will need to define repository groups that will tell Nexus Repository Manager to only locate certain components in the newly created proxy repository. In , Archiva defined three patterns that were used to filter components available from the proxy connector. These three patterns were "javax/", "com/sun/", and "org/jvnet/**". To recreate this behavior, define three Routes which will be applied to the group you configured in *Figure 22.9, "Adding a Proxy Repository to a Repository Group"*. To create a route, log in as an administrative user, and click on Routes under the Administration menu in the left-hand main menu. Click on Add.. and add three inclusive routes that will apply to the repository group you configured in *Figure 22.9, "Adding a Proxy Repository to a Repository Group"*.

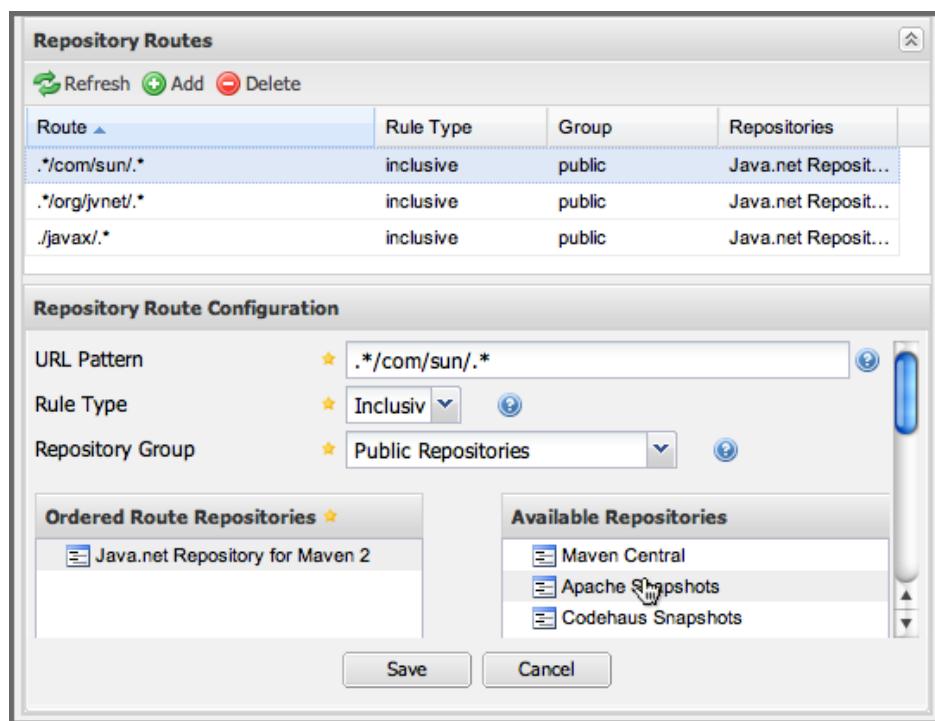


Figure 22.10. Defining Routes

Migrating from Artifactory

This section provides a guideline for migrating a Maven repository from Artifactory to Nexus Repository Manager.

Typically migrating from Artifactory revolves around migrating hosted repositories only, since any proxy repositories configured in Artifactory can just be set up with the same configuration in Nexus Repository Manager, and all data will be retrieved from the upstream repositories again.

Hosted repositories on the other hand have to be migrated. The best practice for migration is to use the import/export feature of Artifactory and migrate one hosted repository after another. Please consult the Artifactory documentation for step-by-step instructions on how to export a repository.

After the export, you have to create a hosted repository in Nexus Repository Manager e.g., with the name old-releases as documented in [Adding a New Repository](#)(see page 0). This will create a folder in sonatype-work/nexus/storage/old-releases.

Now you are ready to take the exported repository and copy it into the newly created storage folder.

Going back to the user interface, navigate to the repository administration and select the Browse Storage panel. Right-click on the root folder of the repository and select Rebuild Metadata first. and as a second step select Update Index. Once these tasks are completed, the migrated repository is ready to be used.

After these task are completed, you will probably want to add the migrated repository to the Public Repositories group or any other group in which you want the migrated repository content to be available.

If you want to ensure that the repository does not get any further content added, you can set the *Deployment Policy* to *Read Only* in the *Access Settings* of the repository *Configuration* panel.

Secure Socket Layer SSL

Available in Nexus Repository OSS and Nexus Repository Pro

Using Secure Socket Layer (SSL) communication with the repository manager is an important security feature and a recommended best practice. Secure communication can be inbound or outbound.

Outbound client communication may include integration with:

- a remote proxy repository over HTTPS
- SSL/TLS secured servers (e.g. for SMTP/email integration)
- LDAP servers configured to use LDAPS
- specialized authentication realms such as the Crowd realm

Inbound client communication includes:

- web browser HTTPS access to the user interface
- tool access to repository content
- manual or scripted usage of the REST APIs

Topics in this section:

- [Managing Outbound SSL Certificates](#)(see page 508)
- [Configuring Inbound HTTPS](#)(see page 514)

Managing Outbound SSL Certificates

Trusting SSL Certificates of Remote Repositories

Available in Nexus Repository Pro only

When the SSL certificate of a remote proxy repository is not trusted, the repository may be automatically blocked or outbound requests fail with a message similar to PKIX path building failed.

Nexus Repository Manager Pro includes a specific SSL configuration tab for each repository in the repository configuration documented in [Managing Repositories](#)(see page 0) to solve this problem. It is displayed when the remote URL of a proxy repository resolves to an https:// location.

The SSL tab shows the details of the remote certificate, as in the example Figure 23.1, “SSL Tab for a Proxy Repository with Remote Server Using HTTPS”. Use the ‘SSL’ tab when the remote certificate is not issued by

a well-known public certificate authority included in the default Java trust store. This specifically also included usage of self-signed certificates used in your organization.

To confirm trust of the remote certificate, click the *Add to trust store* button on the top-right of the SSL tab. This feature is analogous to going to the Figure 23.2, “SSL Certificates Administration” user interface and using the *Add* button found there. If the certificate is already added, the button can undo this operation and will read Remove from trust store .

The checkbox labelled *Use Nexus SSL trust store* is used to confirm that the repository manager should consult the private, internal truststore when confirming trust of the remote repository certificate. Without adding the certificate to the private truststore and enabling the checkbox, the repository will not trust the remote.

The default JVM truststore of the JVM installation used to run the repository manager and the private truststores are merged. The result of this merge is used to decide about the trust of the remote server. The default Java truststore already contains public certificate authority trust certificates. If the remote certificate is signed by one of these authorities, then explicitly trusting the remote certificate will not be needed.

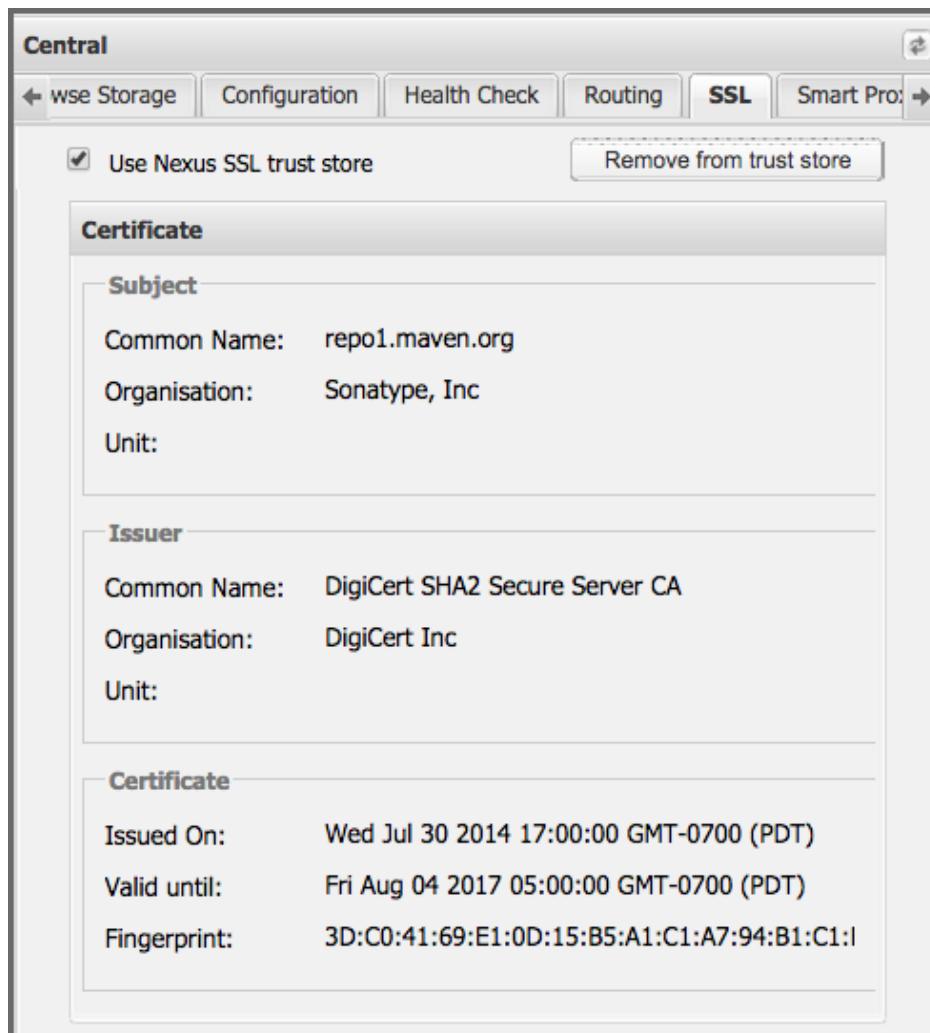


Figure 23.1. SSL Tab for a Proxy Repository with Remote Server Using HTTPS

- ⚠ When removing a remote trusted certificate from the truststore, a restart is required before a repository may become untrusted.

Tusting SSL Certificates Globally

Available in Nexus Repository Pro only

Nexus Repository Manager Pro allows you to manage trust of all remote SSL certificates in a centralized user interface. Use this interface when you wish to examine all the currently trusted certificates for remote repositories, or manage certificates from secure remotes that are not repositories.

Access Figure 23.2, “SSL Certificates Administration” by selecting SSL Certificates in the left-hand Administration menu. The list shows any certificates that are already trusted.

| Name | Issued To | Issued By | Fingerprint |
|-----------------|---------------|----------------|--------------------------|
| *.rubygems.org | | COMODO CA ... | F7:77:FD:29:C6:6F:C5... |
| repo1.maven.org | Sonatype, Inc | DigiCert Inc | 3D:C0:41:69:E1:0D:15:... |
| *.jboss.org | Red Hat Inc | GeoTrust, Inc. | 1E:E1:E2:19:F7:12:2B:... |

repo1.maven.org

Subject

Common Name: repo1.maven.org
 Organisation: Sonatype, Inc.
 Unit:

Issuer

Common Name: DigiCert SHA2 Secure Server CA
 Organisation: DigiCert Inc
 Unit:

Certificate

Issued On: Wed Jul 30 2014 17:00:00 GMT-0700 (PDT)
 Valid until: Fri Aug 04 2017 05:00:00 GMT-0700 (PDT)
 Fingerprint: 3D:C0:41:69:E1:0D:15:B5:A1:C1:A7:94:B1:C1:F1:D4:A6:A0:A

Figure 23.2. SSL Certificates Administration

Buttons are provided to Refresh the list from the server, Add a new certificate or Delete the selected certificate.

The *Add* button presents two options - *Paste PEM* and *Load from server*.

There are two types of secure addresses supported by the *Load from server* option.

The common approach is to choose *Load from server* and enter the full `https://` url of the remote site, e.g,

`https://repo1.maven.org`

. The repository manager will connect using HTTPS and use the HTTP proxy server settings if applicable. Any other protocol than `https://` is ignored, and a direct socket connection is attempted in that case.

When the remote is not accessible using `https://`, only enter the host name or IP address, optionally followed by colon and the port number. For example:

example.com²¹⁶⁸:8443. In this case repository manager will attempt a direct SSL socket connection to the remote host at the specified port.

Alternatively you can choose the Paste PEM option to configure trust of a remote certificate. Copy and paste the Base64 encoded X.509 DER certificate to trust. This text must be enclosed between lines containing -----BEGIN CERTIFICATE----- and -----END CERTIFICATE-----.

An example method to get the encoded X.509 certificate into a file on the command line using keytool is:

```
keytool -printcert -rfc -sslserver repo1.maven.org > repo1.pem
```

The resulting repo1.pem file will contain the encoded certificate text that you can cut and paste into the dialog. An example of inserting such a certificate is shown in Figure 23.3, “Providing a Certificate in PEM Format”.



Figure 23.3. Providing a Certificate in PEM Format

If the repository manager can successfully retrieve the remote certificate or decode the pasted certificate, the details will be shown in a dialog allowing you to confirm details as shown in Figure 23.4, “Certificate Details Displayed after Successful Retrieval”. Please review the displayed information carefully before clicking Add Certificate to establish the trust store addition.

²¹⁶⁸ <http://example.com>

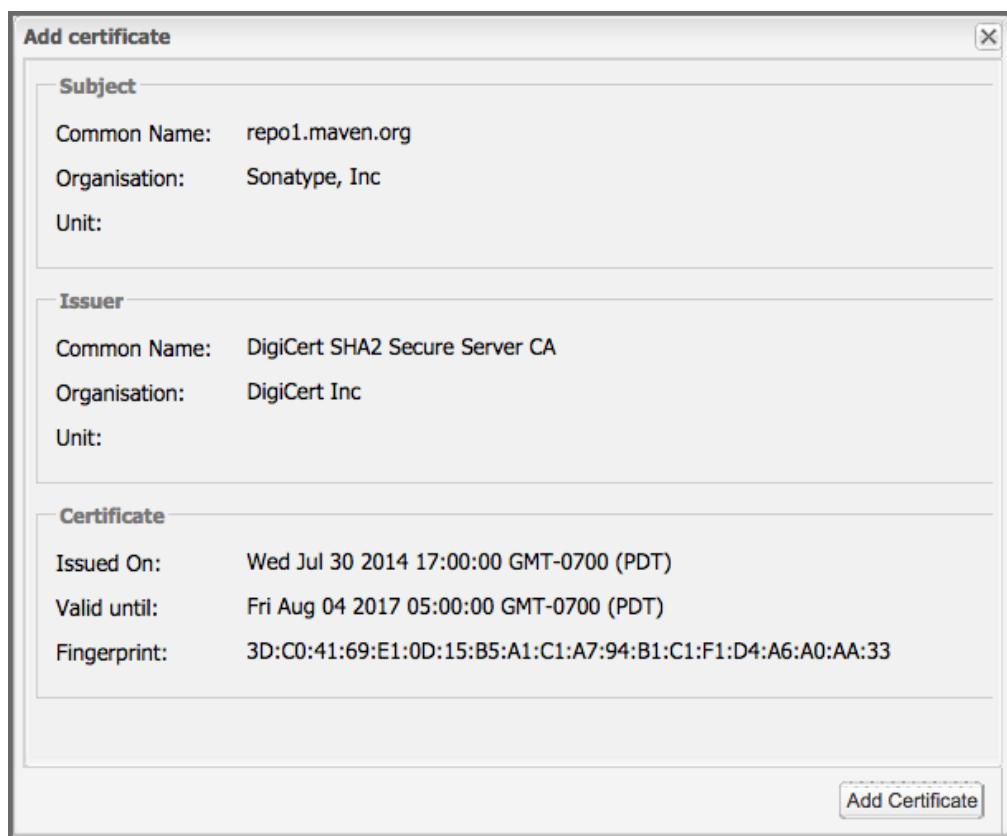


Figure 23.4. Certificate Details Displayed after Successful Retrieval

In some organizations, all of the remote sites are accessed through a globally configured proxy server which rewrites every SSL certificate. This single proxy server is acting as a private certificate authority. In this case, you can follow special instructions for trusting the proxy server root certificate , which can greatly simplify your certificate management duties.

Trusting SSL Certificates Using keytool

Available in Nexus Repository OSS and Nexus Repository Pro

Managing trusted SSL certificates from the command line using keytool and system properties is an alternative and more complex option than using the SSL certificate management features of Nexus Repository Manager Pro.

Before you begin the process of trusting a certificate from the command line you will need:

- a basic understanding of [SSL certificate technology and how the Java VM implements this feature](#)²¹⁶⁹
- command line access to the host operating system and the keytool program
- network access to the remote SSL server you want to trust from the host running the repository manager. This must include any HTTP proxy server connection details

²¹⁶⁹ <http://docs.oracle.com/javase/8/docs/technotes/guides/security/jsse/JSSERefGuide.html>

If you are connecting to servers which have certificates that are not signed by a public CA, you will need to complete these steps:

1. Copy the default JVM truststore file (`$JAVA_HOME/jre/lib/security/cacerts`) to a repository manager specific location for editing.
2. Import additional trusted certificates into the copied truststore file.
3. Configure JSSE system properties for the Nexus Repository Manager process so that the custom truststore is consulted instead of the default file.

Some common commands to manually trust remote certificates can be found in our [SSL Certificate Guide](#)²¹⁷⁰.

Configuring Nexus Repository Manager With a Custom Truststore

Once you have imported your trusted certificates into a truststore file, you can modify `$NEXUS_HOME/bin/jsw/conf/wrapper.conf` to set the system properties necessary to load this file. Make sure to adapt the property numbers (10, 11) to start at the last unused value, which depends on the rest of your configuration.

```
wrapper.java.additional.10=-Djavax.net.ssl.trustStore=<truststore>
wrapper.java.additional.11=-Djavax.net.ssl.trustStorePassword=<truststore_password>
```

Once you have added the properties shown above, restart the repository manager and attempt to proxy a remote repository using the imported certificate. The repository manager will automatically register the certificates in the truststore file as trusted.

Configuring Inbound HTTPS

Available in Nexus Repository OSS and Nexus Repository Pro

Providing access to the user interface and content via HTTPS is a recommended best practice for any deployment.

You have two options:

Terminating TLS Connections Using a Reverse Proxy

A common approach is to access the repository manager through a dedicated server which answers HTTPS requests on behalf of it - these servers are called reverse proxies or SSL/TLS terminators. Subsequently requests are forwarded to the repository manager via HTTP and responses received via HTTP are then sent back to the requestor via HTTPS.

²¹⁷⁰ <https://sonatype.zendesk.com/entries/95353268-SSL-Certificate-Guide#common-keytool-commands>

There are a few advantages to using these which can be discussed with your networking team. For example, the repository manager can be upgraded/installed without the need to work with a custom JVM keystore. The reverse proxy could already be in place for other systems in your network. Common reverse proxy choices are Apache httpd, nginx, Eclipse Jetty or even dedicated hardware appliances. All of them can be configured to serve SSL content, and there is a large amount of reference material available online.

Terminating TLS Connections Directly

We will elaborate here on the second approach, which is to use the Eclipse Jetty instance that is distributed with Nexus Repository Manager to accept HTTPS connections.

- ⓘ Keep in mind that you will have to redo some of these configurations each time you upgrade the repository manager, since they are modifications to the embedded Jetty instance located in \$NEXUS_HOME.

To configure the Eclipse Jetty instance to accept HTTPS connections, first enable the file `jetty-https.xml` to the Jetty startup configuration in `wrapper.conf` as detailed in Section 3.10.2, “Configuration Directory”.

Next, the HTTP port you want to use for the HTTPS connection has to be defined by setting the application `-port-ssl` property in `nexus.properties`.

```
application-port-ssl=8443
```

Create a keystore file containing a single certificate that Jetty will use for the HTTPS connections.

Instructions are available on the [Eclipse Jetty 8.x documentation site](#)²¹⁷¹. You may find the common keytool commands in the [SSL Certificate Guide](#)²¹⁷² a useful reference.

Adjust the values in the `jetty-https.xml` file in `$NEXUS_HOME/conf` to reflect your keystore settings. The default configuration in that file suggests to create a subdirectory `NEXUS_HOME/conf/ssl` and copy the keystore file in there and rename it to `keystore.jks`. You can either do that or choose a different location or filename for your keystore file and update the paths for the keystore and truststore in the `jetty-https.xml` file.

Once this is all in place you can start up the repository manager and access the user interface at e.g.,

<https://localhost:8443/nexus>

. If you have just created a self-signed certificate, modern web browsers will warn you about the certificate and you will have to acknowledge the fact that the certificate is self-signed. To avoid this behavior, you have to get a certificate signed by a signing authority or reconfigure the web browser.

²¹⁷¹ https://wiki.eclipse.org/Jetty/Howto/Configure_SSL

²¹⁷² <https://support.sonatype.com/hc/en-us/articles/213465768-SSL-Certificate-Guide>

The repository manager is now available via HTTPS. If desired you can configure automatic redirection from HTTP to HTTPS by adding usage of `jetty-http-redirect-to-https.xml` as additional app parameters in `wrapper.conf` as well as update the `Base URL` in your server configuration.

Community

Available in Nexus Repository OSS and Nexus Repository Pro

Introduction

Nexus Repository Manager OSS and Nexus Repository Manager Pro are widely used in a large variety of organizations for numerous use cases.

Integrating the repository manager and expanding its features is encouraged and enabled by the availability of Nexus Repository Manager OSS under the Eclipse Public License, the REST API and the support for plugins as part of the repository manager itself, including writing your own plugins.

A number of tools are available to facilitate the community of users.

My Sonatype

A Sonatype-created portal with numerous resources including a community forum, blog posts, videos, and more available at <https://my.sonatype.com>.

Users Mailing List

General discussion and support for anyone using and developing with Nexus Repository Manager Pro or Nexus Repository Manager OSS - [Browse or Subscribe](#)²¹⁷³.

Source Code

The Nexus Repository Manager OSS codebase is a great reference for your development of custom integrations and plugins. It is available on GitHub at <https://github.com/sonatype/nexus-public/tree/nexus-2.x/>.

Community Overview

Community projects range from open source efforts run by Sonatype, projects run by Nexus Repository Manager Pro customers or Nexus Repository Manager OSS users to one man, one-off hacks for some older version.

When using any of these projects, ensure you keep the quality of the project and their impacts on your production repository manager in mind.

²¹⁷³ <https://groups.google.com/a/glists.sonatype.com/forum/#!forum/nexus-users>

Plugins

Plugins expand functionality of the repository manager itself in various aspects on the user interface and underlying features:

Nexus Repository Manager OSS Plugins <https://github.com/sonatype/nexus-public/tree/nexus-2.x/plugins>

Large number of plugins bundled with Nexus Repository Manager OSS including YUM support, P2 support and others.

Example Plugins <https://github.com/sonatype/nexus-example-plugins>

Example plugins from Sonatype.

APT Plugin <https://github.com/Tangresh/nexus-apt-plugin>

APT/DEB repository support.

Rundeck Plugin <https://github.com/rundeck/nexus-rundeck-plugin>

Integration with Rundeck

Webhook Plugin <https://github.com/vbehar/nexus-webhook-plugin>

Support for webhook notifications for component deployments.

Artifact Usage Plugin <https://github.com/saleemshafi/nexus-artifact-usage-plugin>

Plugin to display components depending on a specific component.

Dependency Mgt. Plugin <https://github.com/Terracotta-OSS/nexus-dependency-management-plugin>

Plugin to display the dependency tree of a component with further detailed information.

GroupId Mgt. Plugin <https://github.com/UW-Madison-DoIT/nexus-groupid-management-plugin>

Plugin to help with provisioning security per groupId.

Repository Cleanup Plugin <https://github.com/Vlatombe/nexus-repository-cleanup-plugin/>

Scheduled task that can remove components based on age and a regular expression pattern.

Gitlab Token Auth Plugin <https://github.com/jdamick/nexus-gitlab-token-auth-plugin>

Authentication support using Gitlab user token.

AWS S3 Publish Plugin <https://github.com/carrot-garden/carrot-nexus>

Plugin to publish components deployed to the repository manager also to AWS S3.

Hipchat for Nexus Plugin <https://bitbucket.org/tpettersen/hipchat-for-nexus>

Supports notifications in HipChat when components matching a pattern are deployed to the repository manager.

Integrations

Nexus Maven Plugins <https://github.com/sonatype/nexus-maven-plugins>

The official Nexus Staging Maven Plugin and the Nexus M2Settings Maven Plugin from Sonatype. The plugins are using the REST API client library and can be used as example for your own Maven plugins or other Java based clients.

Nexus Ant Tasks <https://github.com/sonatype/nexus-ant-tasks>

The official Nexus Staging Ant Tasks from Sonatype.

Puppet Module for Nexus <https://github.com/hubspotdevops/puppet-nexus>

Puppet module to install and configure Nexus Repository Manager OSS, authored by HubSpot

Puppet Module for Nexus https://forge.puppetlabs.com/atlassian/nexus_rest

Another Puppet module to manage a Nexus Repository Manager, authored by Atlassian

Nexus Cookbook <https://github.com/RiotGames/nexus-cookbook>

Chef cookbook to install and configure Nexus Repository Manager.

Openshift Nexus <https://github.com/hongun/openshift-nexus>

Scripts to provision Nexus Repository Manager on OpenShift.

Nexus Ruby CLI https://github.com/RiotGames/nexus_cli

Ruby-based set of command line programs to interact with Nexus Repository Manager.

Nexus Python CLI <https://github.com/stardust85/repositorytools/>

Python-based set of command line programs to interact with Nexus Repository Manager.

Nexus RPM Package <https://github.com/jbraeuer/nexus-oss-rpms>

Nexus Repository Manager OSS as RPM package.

Nexus DEB Package <https://github.com/tobrien/nexus-oss-deb>

Nexus Repository Manager OSS as DEB package.

Puppet Nexus Client <https://github.com/cescoffier/puppet-nexus>

Puppet module to retrieve components

Gradle Plugin <https://github.com/bmuschko/gradle-nexus-plugin>

Gradle plugin to deploy components to Nexus Repository Manager and via OSSRH to the Central Repository.

Gradle Staging Plugin <https://github.com/adaptivecomputing/plugins-gradle/tree/master/nexus-workflow>

Gradle plugin to deploy components to Nexus Repository Manager Pro and via OSSRH to the Central Repository with good support for staging automation.

SBT Plugin <https://github.com/xerial/sbt-sonatype>

SBT plugin to deploy components to Nexus Repository Manager Pro and via OSSRH to the Central Repository.

List Versions Jenkins Plugin <https://github.com/USGS-CIDA/list-nexus-versions-plugin>

Jenkins plugin to display available component versions.

Nexus Metadata Jenkins Plugin <https://github.com/marcelbirkner/nexus-metadata-plugin>

Jenkins plugin to add custom metadata with deployments to Nexus Repository Manager Pro.

Artifact Promotion Jenkins Plugin <https://github.com/jenkinsci/artifact-promotion-plugin>

Jenkins plugin allowing you to promote components to different repositories in Nexus Repository Manager OSS

Go Maven Poller <https://github.com/ThoughtWorksInc/go-maven-poller>

Package material plugin for Go that can poll a Nexus Repository Manager repository for components.

Nexus Docker Image <https://registry.hub.docker.com/u/conceptnotfound/sonatype-nexus/>

Simple Docker image including Nexus Repository Manager OSS.

Nexus NPM Docker Image <https://github.com/marcellodesales/nexus-npm-registry-docker-image>

Docker Image of Nexus Repository Manager OSS with NPM support preconfigured

Other Community Projects

Nexus Performance Testing Library <https://github.com/sonatype/nexus-perf>

Regression and stress test library for Nexus Repository Manager OSS from Sonatype.

Repository Management With Nexus <https://github.com/sonatype/nexus-book>

The source code for the book, which is the official documentation for Nexus Repository Manager OSS and Nexus Repository Manager Pro.

Nexus Book Examples <https://github.com/sonatype/nexus-book-examples>

Examples for the trial guide section of the book Repository Management with Nexus.

Nexus Introduction <https://github.com/sonatype/nexus-introduction-presentation>

Slides and examples to present about Nexus Repository Manager Pro and Nexus Repository Manager OSS at user groups or in similar settings.

Contributing

All of the projects listed in [Other Community Projects](#)(see page 519) are community efforts and open to your participation. If you are aware of any other projects or would like to have your project listed here, please contact us at Nexus Exchange: <http://exchange.sonatype.com/contribute>.

sitemap.xml

| | |
|----------|----------------|
| template | sitemap.xml.vm |
|----------|----------------|