

# CTVS-1

## Synchronous Tokenized Vaults on Cardano

Authenticated identity, integer share accounting, and an exact candidate ledger boundary.

### Revision 0.6.3

Illustrated review edition / 16 September 2026

Prepared for Steer Protocol and ecosystem review.

Companion: CTVS-2, illustrated revision 0.6.3.

#### Publication and evidence status

Technical figures are embedded at the relevant sections. The semantic baseline remains revision 0.6, and CTVS-WIRE-2, wire integer 2, profile 0, remains unchanged.

**Implementation release remains blocked.** Local models and codec checks are not compiled-validator, ledger-execution, independent-review, or production-security evidence.

Illustration revision 0.6.3. A proposed standard, not an adopted CIP or frozen deployed interface.

#### **BASELINE REPOSITORY COMMIT**

f5f782de9ba6a7bf6cbb8213995a31734888559c

## Abstract

Tokenized vaults represent pooled economic exposure through fungible shares. A useful standard lets wallets, allocators, lending applications, and analytics providers identify the underlying asset, determine what the shares represent, construct bounded transactions, and reconstruct the outcome without understanding each vault's internal strategy.

CTVS-1 proposes this boundary for Cardano. It specifies authenticated vault identity, economic share supply, backing and liability accounting, conversion rules, direct deposit and redemption operations, and reproducible infrastructure views. It translates interface guarantees into predicates over extended-unspent-transaction-output transactions rather than reproducing an account-based contract interface. A separate asynchronous standard, CTVS-2, reuses the accounting model while separating request creation, economic settlement, and delivery.

The reference profile uses immutable configuration, one authenticated accounting-state UTxO, direct custody, native mint/burn shares, fixed entry and exit fees, and explicit ADA storage reserves. Its arithmetic uses integer rounding and immutable virtual balances. A restricted transaction-composition profile defines the candidate obligation domain; unrestricted cross-vault composition is not assumed. Managed strategies, authenticated share inventory, and governed terms are extension profiles with additional proof obligations.

The central requirement is economic conservation under authenticated transitions. An implementation must justify every change in backing, supply, liabilities, and user ownership. Conformance must also expose permissioning, valuation trust, liquidity limits, and recovery assumptions. A common interface does not make a strategy solvent, a price report accurate, or an operator available.

Revision 0.6 keeps those exact object, role and recursive Data rules for reference profile 0. It separately specifies native-format execution conformance and a minimum common integration contract. Economic supply and verifiable ownership are common requirements; the ID/STATE token construction, single-state custody, virtual-balance formula and restricted-purpose transaction family are explicit reference choices. Native formats are not accepted on the strength of matching JSON alone.

## Semantic baseline revision 0.6: common guarantees, explicit implementations

This revision implements the agreed scope review of both v0.5 papers. It distinguishes **common economic and integration requirements** from the **fully specified reference construction**, defines a bounded route for native-format conformance, and adds a semantic direct-at-settlement delivery variant. It does not add a universal transcript language, module framework, permission language, routing engine, or hosted adapter runtime. [REV06]

| Identifier or decision         | Revision 0.6 disposition                                                                  |
|--------------------------------|-------------------------------------------------------------------------------------------|
| Document                       | Public-review revision 0.6, 11 September 2026; supersedes v0.5 for review                 |
| Existing reference wire        | CTVS-WIRE-2; magic CTVS, integer 2, profile 0; unchanged                                  |
| Reference schemas and fixtures | Exact files retained byte-for-byte from the v0.5 source bundle                            |
| Native integration             | Explicit semantic mapping and evidence required; no native implementation certified here  |
| Direct-at-settlement delivery  | Specified semantic variant outside profile 0; no new wire tag or assigned profile integer |
| Budget fields                  | Existing storage, budget and exact-fee fields retained; no silent simplification          |

**Compatibility.** This is a substantive clarification of conformance and an addition to the semantic design, not an editorial-only relabeling. It does not reinterpret profile 0, permit a different spend of its existing Requests, change its constructors, or change its terms-commitment bytes. A native implementation or a future reference-wire variant must bind its own reviewed version and execution rules. Never change a datum field or action under an old profile merely because a new PDF names a capability.

**Implementation release remains blocked.** Historical economic and codec results are carried forward, not rerun or promoted. This revision checks source/encoding preservation, mathematical examples, document cross-references, response examples and rendered publication layout. It adds no compiled validator, cryptographic witness check, real ledger transaction, measured execution limit or deployed protocol integration. Full historical counts and the shared REQ-01–REQ-14 register now live once in docs/CTVS-Validation-Evidence.md and evidence/, rather than being duplicated in both papers. [EVIDENCE]

The kickoff participants preferred retaining native contracts and datums where feasible. That is design input, not certification of any described protocol. New conformance and delivery language below is the CTVS proposal adopted for this revision; it must not be attributed to a verified SundaeSwap implementation. [WG, REV06]

## Illustration revision 0.6.3: figure index and reading key

This illustration-only refresh replaces the eleven remaining earlier-style figures. It retains the four approved images from the previous refresh and leaves the revision-0.6 semantic text, equations, exact reference encoding and commitment bytes unchanged. Illustration revision is not an on-chain wire version or a new validation result.

The replacement figures use a shared spacing grid, thin uniform outlines, restrained line icons and soft blue, violet, green and sand cards. Labels and captions identify the applicable profile. Colour supports grouping; it does not establish authority, success, or a new protocol rule. Arrows identify the relationship named in the figure, not the provenance of individual fungible coins. Dashed treatment marks the locally stated alternative or unsupported path.

Eleven replacements are vector SVG/PDF illustrations with selectable text; the four retained approved figures are image-based. The source package identifies each format and provides the actual artwork used in the build. Logical Mermaid sources are reference outlines, not an alternate production renderer.

| Figure                                             | Placement        | Primary question                                                           |
|----------------------------------------------------|------------------|----------------------------------------------------------------------------|
| 1. One standard boundary, two implementation paths | Section 2.5      | How can profile 0 and a native implementation satisfy the same guarantees? |
| 2. Authenticated objects and the economic boundary | Section 4.1      | What are Config, State, Request, and Claim?                                |
| 3. Acyclic deployment and identity creation        | Section 4.2      | How are the trust-root objects created without a hash cycle?               |
| 4. Protected obligations and output allocation     | Section 8.1      | Why can one output not satisfy two obligations?                            |
| 5. Direct deposit and redeem anatomy               | Sections 9.2-9.3 | How do the direct operations affect backing, fees, supply, and payouts?    |
| 6. ADA accounting partitions                       | Section 9.4      | Which lovelace is backing, fee liability, reserve, or external funding?    |
| 7. Managed accounting boundary                     | Section 11.1     | What extra evidence is required once backing leaves direct custody?        |

The diagrams explain the written requirements. They add no compiled-validator, ledger-acceptance, resource, managed-integration or independent-review evidence. The existing implementation release gates remain blocked.

# Contents

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| <b>Abstract</b>                                                                    | <b>2</b>  |
| <b>Semantic baseline revision 0.6: common guarantees, explicit implementations</b> | <b>3</b>  |
| <b>Illustration revision 0.6.3: figure index and reading key</b>                   | <b>4</b>  |
| <b>1. Motivation and scope</b>                                                     | <b>6</b>  |
| <b>2. Standard architecture and conformance profiles</b>                           | <b>7</b>  |
| <b>3. Ledger and transaction model</b>                                             | <b>11</b> |
| <b>4. Identity, deployment, and state succession</b>                               | <b>12</b> |
| <b>5. Accounting definitions and boundaries</b>                                    | <b>16</b> |
| <b>6. Conversion, fees, and limits</b>                                             | <b>18</b> |
| <b>7. Direct transitions and authorization</b>                                     | <b>20</b> |
| <b>8. Payment attribution and reference composition</b>                            | <b>22</b> |
| <b>9. Worked UTxO transactions</b>                                                 | <b>24</b> |
| <b>10. Datum, redeemer, and encoding specification</b>                             | <b>28</b> |
| <b>11. Managed accounting and additional fee models</b>                            | <b>33</b> |
| <b>12. Formal properties and proof sketches</b>                                    | <b>35</b> |
| <b>13. Common integration contract and native interpretation</b>                   | <b>37</b> |
| <b>14. Resource limits, operational behavior, and risks</b>                        | <b>39</b> |
| <b>15. Validation and release requirements</b>                                     | <b>40</b> |
| <b>16. References</b>                                                              | <b>42</b> |
| <b>Appendix A. Revision boundary and delivery checklist</b>                        | <b>44</b> |

# 1. Motivation and scope

## 1.1 The interoperability objective

The useful outcome of a tokenized-vault standard is a reduction in integration-specific interpretation. An application should not need a new accounting model for every vault before it can ask what asset is accepted, how shares are priced, whether an operation is available, what it will cost, and which transaction effects must be verified.

ERC-4626 standardizes a single-asset vault interface, share conversions, previews, limits, and four economic operations. ERC-7540 adds request-based entry and exit. These are semantic precedents; CTVS does not claim ABI compatibility or exact equivalence with every EVM field. In particular, this paper deliberately names share backing separately from gross managed assets. [1, 2]

On Cardano, the common boundary must additionally identify the correct UTxOs, their authentication rules, datum and redeemer schemas, required witnesses, output obligations, and chain point used by an off-chain quote. A JSON endpoint alone does not provide this boundary.

## 1.2 In scope and outside the standard

**Scope rule.** CTVS standardizes authenticated economic meaning and enforceable user guarantees. It does not require one native order datum, strategy engine, permission mechanism or custody arrangement. Sections explicitly labeled reference profile 0 remain exact requirements of that profile. An alternative implementation must satisfy the common requirements through the mapping and evidence in Section 2.5; it does not inherit the reference profile's proofs by analogy.

The core boundary has one underlying asset and one transferable native share asset. Deposits and redemptions are denominated in the underlying asset. Internal exposure may be more complex, but an extension must justify its valuation and liquidity semantics.

| Standardized boundary                              | Implementation-specific interior                         |
|----------------------------------------------------|----------------------------------------------------------|
| Vault and asset identity; supported profiles       | Strategy selection and portfolio construction            |
| Economic backing, supply, fees, and limits         | Lending, liquidity positions, hedges, and leverage       |
| Bounded user operations and ownership changes      | Protocol-specific position data and execution routes     |
| Authenticated accounting and valuation provenance  | Choice of oracle, manager, or authorized operator        |
| Discoverable schemas and reconstructible lifecycle | Commercial service providers and governance organization |

A multi-asset entry router may swap into the underlying asset before depositing, but the swap is not a CTVS-1 deposit. A share's suitability as collateral is a separate risk decision. Permissioned deposits or strategy execution do not imply restrictions on ordinary native-share transfers; programmable transfer restrictions require a different, explicitly supported asset model.

## 1.3 Normative language and interpretation

Normative scope is part of each requirement. Common requirements bind every claimed CTVS behavior. Reference-construction requirements bind only CTVS-WIRE-2 profile 0. An extension or native mapping binds only the behaviors it explicitly specifies and proves. A capability label cannot waive a common guarantee; unsupported directions and differing user rights must be reported instead of normalized away.

MUST and MUST NOT express proposed conformance requirements. SHOULD expresses a recommendation with a documented exception. MAY expresses an option only when its profile is advertised. These words do not claim that the repository currently enforces the requirement.

The economic core, reference implementation choices, and experimental extensions are distinct. An implementation MUST list its exact profile combination. Recognition of an extension name is not proof that every combination is valid.

## 2. Standard architecture and conformance profiles

### 2.1 Common layers

CTVS has a shared semantic core used by both papers. CTVS-1 adds direct transaction execution; CTVS-2 adds request-based execution. Identity, accounting definitions, and infrastructure interpretation are common supporting specifications rather than an unrelated standard for each application.

| Layer                   | Required responsibility                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------|
| Identity and descriptor | Bind a deployment to assets, authenticated state, scripts, schemas, and economic terms.              |
| Economic kernel         | Define backing, participating supply, rounding, fees, and operation deltas.                          |
| Execution profile       | Define inputs, witnesses, state updates, payments, and failure conditions.                           |
| Accounting profile      | Establish which property backs shares and how it is valued.                                          |
| Provider interface      | Return verifiable snapshots, quotes, limits, transaction effects, and lifecycle data.                |
| Conformance evidence    | Connect requirements to vectors, validator tests, independent clients, and measured resource bounds. |

### 2.2 Exact reference profile - not the universal architecture

The CTVS-WIRE-2 profile-0 combination, descriptively DC-MB-IMM-RCI, means direct custody, native mint/burn supply, immutable terms, and restricted composition inputs. It uses an enterprise state address, so there is no staking credential attached to that state. It does not assume or promise strategy yield. These are reference choices, not universal requirements for every future CTVS vault.

| Axis                  | Reference decision                                          | Extension boundary                                         |
|-----------------------|-------------------------------------------------------------|------------------------------------------------------------|
| Custody and valuation | All backing is in authenticated state                       | Verified positions or attested NAV                         |
| Supply                | Native mint/burn; supply counter equals ledger supply       | Authenticated unissued inventory                           |
| Terms                 | Immutable economic configuration                            | Governed terms and protected migration                     |
| Fees                  | Fixed entry/exit asset fees                                 | Management/performance fee profiles                        |
| Operation             | Exact-asset deposit/withdraw;<br>exact-share mint/redeem    | CTVS-2 request execution                                   |
| Composition           | One vault accounting transition; closed script-input family | Reviewed direct-script and cross-vault allocation adapters |

|          |                                    |                                            |
|----------|------------------------------------|--------------------------------------------|
| Shutdown | No terminal close or reserve sweep | Separately specified close/migration proof |
|----------|------------------------------------|--------------------------------------------|

SundaeSwap’s published architecture supports script/multisig-owned orders and authorized scoopers. Minswap V2 specifies authorized batchers and pre-minted LP inventory. These examples motivate extensibility; they do not certify CTVS compatibility or current deployed bytecode. [10, 11]

## 2.3 Capability disclosure

Deposit and redemption capabilities **MUST** be independent. A vault may expose direct deposits and asynchronous redemptions, or the reverse. All four CTVS-1 operations are required for a fully direct reference deployment; an asynchronous-only direction **MUST NOT** pretend to offer an executable direct operation.

Read conformance, direct-execution conformance, request-execution conformance, and optional accounting extensions are separate claims. A provider may display a vault it cannot safely execute against, provided that distinction is explicit.

## 2.4 Reference wire and compatibility boundaries

CTVS-WIRE-2 remains the only exact **reference** wire in this publication. It supersedes WP1 sketches for reference profile 0, not the repository’s V0 types or another protocol’s native representation. Document revision 0.6, wire integer 2, profile integer 0, a native implementation version, deployed script hashes and evidence records are separate identities.

Profile 0 still fixes direct custody, mint/burn supply, immutable terms, the Section 6 reference fee/math rules, key roles, restricted composition and full-fill/snapshot/funded-claim asynchrony. Modes remain direct entry 1, direct exit 2, async entry 4 and async exit 8. `execution_modes` is a nonzero mask in 1..15; direct entry includes deposit and mint, direct exit includes withdraw and redeem. `max_batch` remains 1..16 as a provisional structural cap, not measured capacity. No direct-at-settlement, script-controller or managed-update action has been inserted into this encoding.

Native execution conformance below is not a second universal wire. It is a requirement for a specific implementation/version to expose and prove the common semantics using its own authenticated representation. Any future modification of profile 0’s exact records requires an intentional new wire/profile decision and migration analysis. [WIRE, REV06]

## 2.5 Native-format conformance without an adapter platform

A native implementation **MAY** retain its existing scripts, datums and token identities. It **MUST** publish a versioned mapping with the following seven elements before claiming execution conformance. A read-only integration that cannot establish these elements remains read-only.


| Mapping element         | Required result                                                                                                                                                        |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Implementation identity | Pin native protocol/build, scripts or policy identities, configuration authority and applicable terms. Explain how these are authenticated, including upgrades if any. |
| Decoding and sources    | Identify exact native objects, schemas, state/claim identity and their chain-point-consistent sources. Preserve original ledger identities.                            |

| Mapping element              | Required result                                                                                                                                                          |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Economic interpretation      | Derive one underlying asset, the share asset, participating supply, net backing, liabilities and available liquidity without double counting.                            |
| Operations                   | Specify exact input/output semantics, executable formulas, rounding, fees, limits, pricing basis and ownership cutover for each supported action.                        |
| Authorization and allocation | Identify the executing guards and required witnesses; prove every user-bound destination and non-overlapping value obligation.                                           |
| Construction and recovery    | Supply reproducible native transaction recipes, prerequisites, failure statuses, cancellation and delivery rights. A proprietary builder endpoint alone is insufficient. |
| Evidence                     | Bind positive/negative byte and transaction fixtures, independent interpretation and the actual conformance scope to the pinned implementation.                          |

For full direct conformance, the four operations and their applicable views are available; a partial integration must list its exact supported operations and cannot claim the missing ones. Async-only directions retain their shared economics but do not fake a synchronous operation. Ordinary transferable shares are required by this boundary; an account balance without such a share is not a CTVS tokenized vault merely because a provider displays it similarly.

**Mappings translate representation, not rights.** A mapping cannot make an unfunded ticket a funded claim, invent fixed refund rights, hide a different fee convention, or call a multi-asset withdrawal a guaranteed single-underlying redemption. If a wrapper actually creates the missing guarantees, identify that wrapper as a distinct implementation and disclose its custody and trust boundary.

This is a finite conformance record and reviewed construction procedure, not a universal translator or code-execution system. The descriptor does not authorize downloaded programs. No generic module catalogue, transcript interpreter, cross-protocol routing engine or new permission language is required.

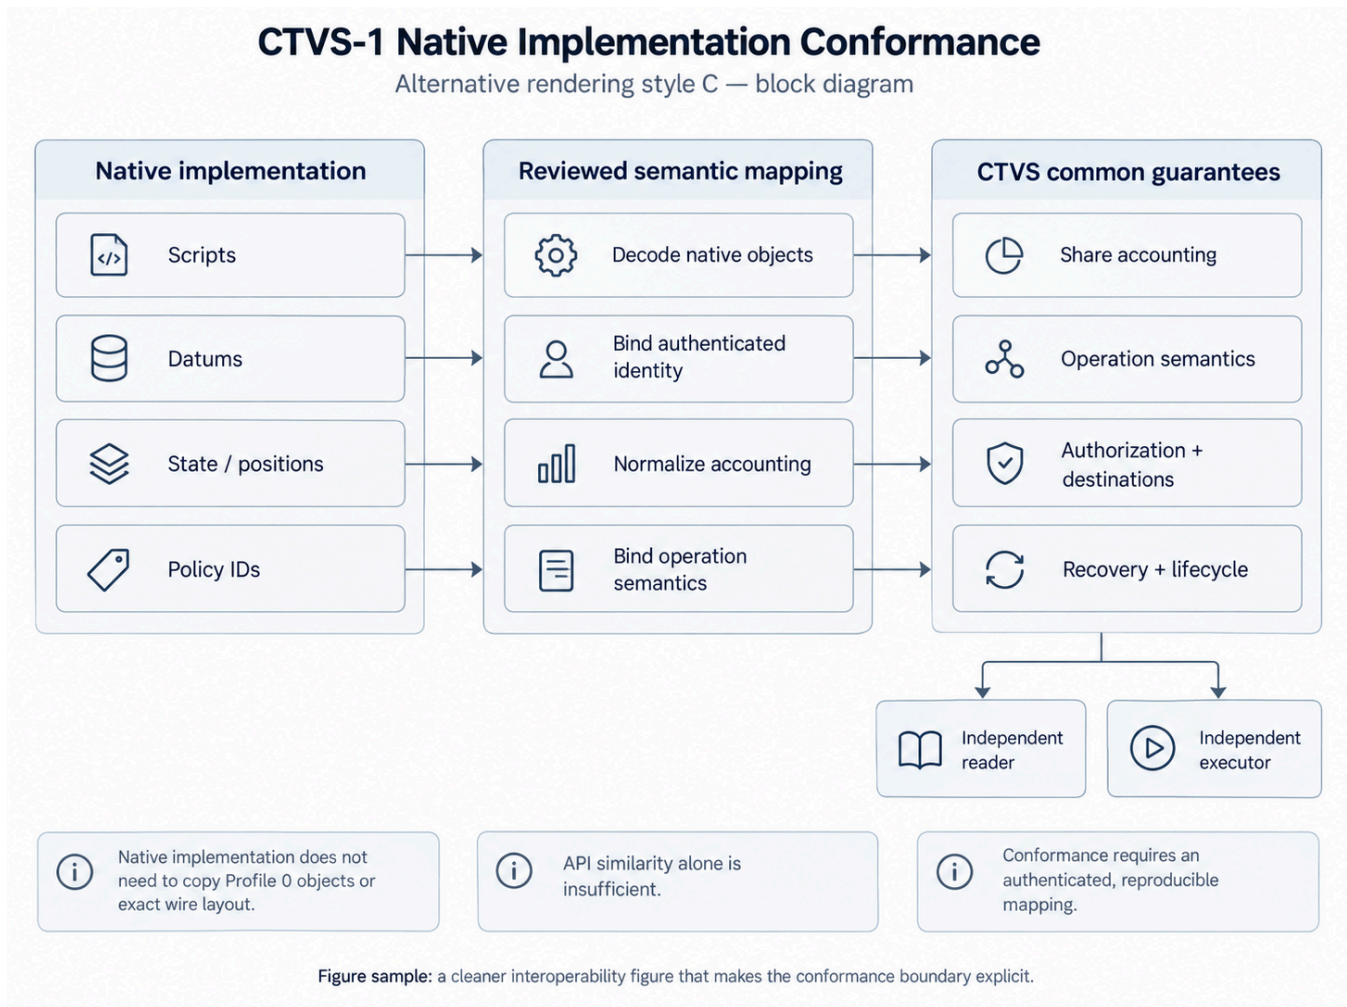

**Figure 1:** One standard boundary, two implementation paths. A native protocol may retain its own scripts and datums, but execution conformance requires a reviewed mapping to the same authenticated economic guarantees. Matching JSON or labels alone is not sufficient.

## 2.6 Common guarantees and implementation-local mechanisms

| Common guarantee                                              | Concrete reference-profile-0 choice                                   |
|---------------------------------------------------------------|-----------------------------------------------------------------------|
| Authentic vault, terms and accounting evidence                | One policy with ID/STATE/SHARE and the specified Config/State objects |
| Conservation of participating shares and backing              | Native mint/burn and all backing in one state UTxO                    |
| Reproducible conversions, fees and user bounds                | Fixed virtual balances and entry/exit markup equations                |
| Actual, scoped authorization and complete payment attribution | Key roles, disjoint outputs and restricted input/purpose family       |
| Explicit request ownership, pricing and recovery              | Full-fill snapshot requests; independent funded claims                |
| No loss of outstanding rights during updates or closure       | Immutable terms, permanent identities and no terminal sweep           |

The right column remains normative for profile 0 and must not be weakened to accommodate another system. The left column defines what a separately specified native implementation must demonstrate. Single-state concurrency,

exact token names, a particular authorization purpose and absence of a closure branch are not universal requirements by themselves.

### 3. Ledger and transaction model

#### 3.1 Objects and notation

Let the ledger UTxO set be a partial map from output references to outputs. An output reference is a transaction hash and output index. An output contains an address, a multi-asset value, a datum representation, and optionally a reference script. For this paper, every protocol state or request datum is inline.

$$\mathcal{L} : \text{OutRef} \rightarrow \text{Output}; \quad u = (\text{address}, \text{value}, \text{datum}, \text{scriptRef}) \quad (1)$$

An asset identifier is either ADA or a pair of policy ID and asset name. Write  $v(\alpha)$  for the integer quantity of asset  $\alpha$  in value  $v$ . An action transaction contains ordinary inputs  $I$ , reference inputs  $J$ , outputs  $O$ , a signed mint vector  $M$ , witnesses, redeemers, fees, and a validity interval.

CIP-31 reference inputs make existing outputs readable without spending them. CIP-32 specifies inline datums; CIP-33 supports reference scripts. A reference is evidence available to a validator, not authority to change the referenced object. [3–5]

#### 3.2 Conservation

For successful transactions in the restricted profile, which excludes withdrawals, certificates, governance actions, treasury-related fields, and other additional balance sources or sinks, the ledger value equation is:

$$\sum_{i \in I} \text{value}(i) + M = \sum_{o \in O} \text{value}(o) + \text{fee } \mathbf{1}_{\text{ADA}}. \quad (2)$$

This ledger equation is necessary but insufficient. A transaction can balance while paying the wrong recipient. CTVS validators must additionally establish ownership, allocation, accounting, and supply invariants.

Ordinary key inputs require their ledger authorization. Script inputs require successful validation of their spending conditions. Merely including a script as a reference input does not execute an authorization proof. Invalid-script collateral is separate from successful economic accounting; a failed transaction can affect collateral under the ledger's collateral rules. [9]

#### 3.3 Atomicity and concurrency

A successful direct action consumes a particular state UTxO and creates a successor. A competing transaction using the consumed reference must be rebuilt. This is state-version contention, not a statement that Cardano universally allows only one transaction per block.

A quote is therefore attached to an output reference, not just a wall-clock timestamp. Reference inputs reduce read contention; they do not permit two independent spends of one state. Independent requests in CTVS-2 move user submission outside this contested update.

### 3.4 Responsibility and observable evidence

| Requirement                                                                                         | Responsible boundary                                                            |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Existence, no double-spend, successful value balance, valid witnesses, collateral, and era rules    | Cardano ledger; represented faithfully in test contexts                         |
| Own-input resolution, protected object identity, value/datum interpretation, and branch obligations | Spending validator and minting policy                                           |
| Privileged role                                                                                     | Validator checks an explicitly required signatory; ledger validates its witness |
| Actual network, complete serialized size, fees, minimum ADA, collateral construction                | Builder and ledger, not a self-reported datum                                   |
| Discovery, origin attribution, authentic claim lineage, coherent snapshots, rollback                | Indexer/integrator, without replacing on-chain authorization                    |

The pinned Aiken transaction view is not the complete serialized transaction. Its fields include certificates, withdrawals, votes, proposals, current-treasury declarations, and donations. Omitting a field from a symbolic model does not prove it harmless. Profile 0 requires empty withdrawals, certificates, votes, and proposals, and absent current-treasury and donation fields. A zero-withdrawal aggregation hook is excluded too. Non-genesis minting is restricted to the configured SHARE delta. Unsupported purposes fail. [TX, PATTERNS]

A funding witness and the script-visible required-signatory list are not interchangeable. Builders **MUST** explicitly request each privileged signature checked by a validator. A request's controller is not inferred from funding inputs, a receiver, metadata, or an EVM-like caller.

The semantic transaction model uses symbolic ledger/signatory information. The wire-format checks exercise selected shape, role, and linkage predicates. Neither replaces phase-1 ledger checks, complete phase-2 execution, or cryptography. [SEMANTIC, WIRE]

## 4. Identity, deployment, and state succession


**Reference construction.** Section 4 specifies profile 0's exact authentication and deployment mechanism, not a factory every incumbent must redeploy. Every implementation must establish authentic assets, terms, accounting authority, succession and user-property separation. Section 2.5 requires a native proof of equivalent obligations; it does not accept look-alike metadata in place of the construction below.

### 4.1 Four objects, four distinct proofs


| Object  | Authentication and contents                                                                    | Spending role                                                         |
|---------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Config  | One exact ID asset; known immutable lock; committed Terms; declared storage ADA                | Read by reference; no ordinary spend                                  |
| State   | One exact STATE asset; expected full vault address; State datum; closed economic value         | One authenticated successor for every accounting transition           |
| Request | Originating output reference; supported recovery envelope; valid economics/value when selected | Settlement acknowledgment, fixed cancellation, or fixed expiry refund |

| Object | Authentication and contents                                                                      | Spending role                                            |
|--------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Claim  | Exact fixed-delivery script; funded asset/value; valid settlement lineage for authentic indexing | Deliver the entire locked value to the fixed destination |

Requests and claims do not need a per-user NFT in this reference profile. This does **not** mean their datums prove creation authority. Anyone can create a script-address output; the output's spending validator is not an admission hook. Providers distinguish candidates from authentic settlements. Reference inputs do not add spendable value and do not execute the referenced output's authorization conditions. [CIP31, CIP32, TX]

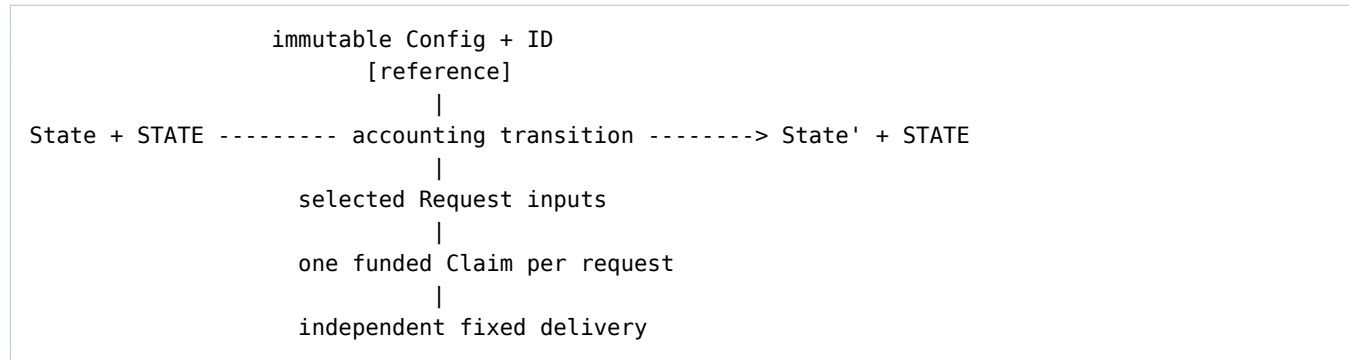

The mutable datum **MUST NOT** contain supposedly authoritative `pending_deposits`, `pending_request_count`, or a complete queue total unless request creation also updates an authenticated registration mechanism. Independent request creation does not touch state and cannot keep such a counter exact. Pending totals are chain-point-bound indexer views in this profile. The permanent-identity/no-close policy avoids pretending to prove global absence of outstanding requests from one local datum.

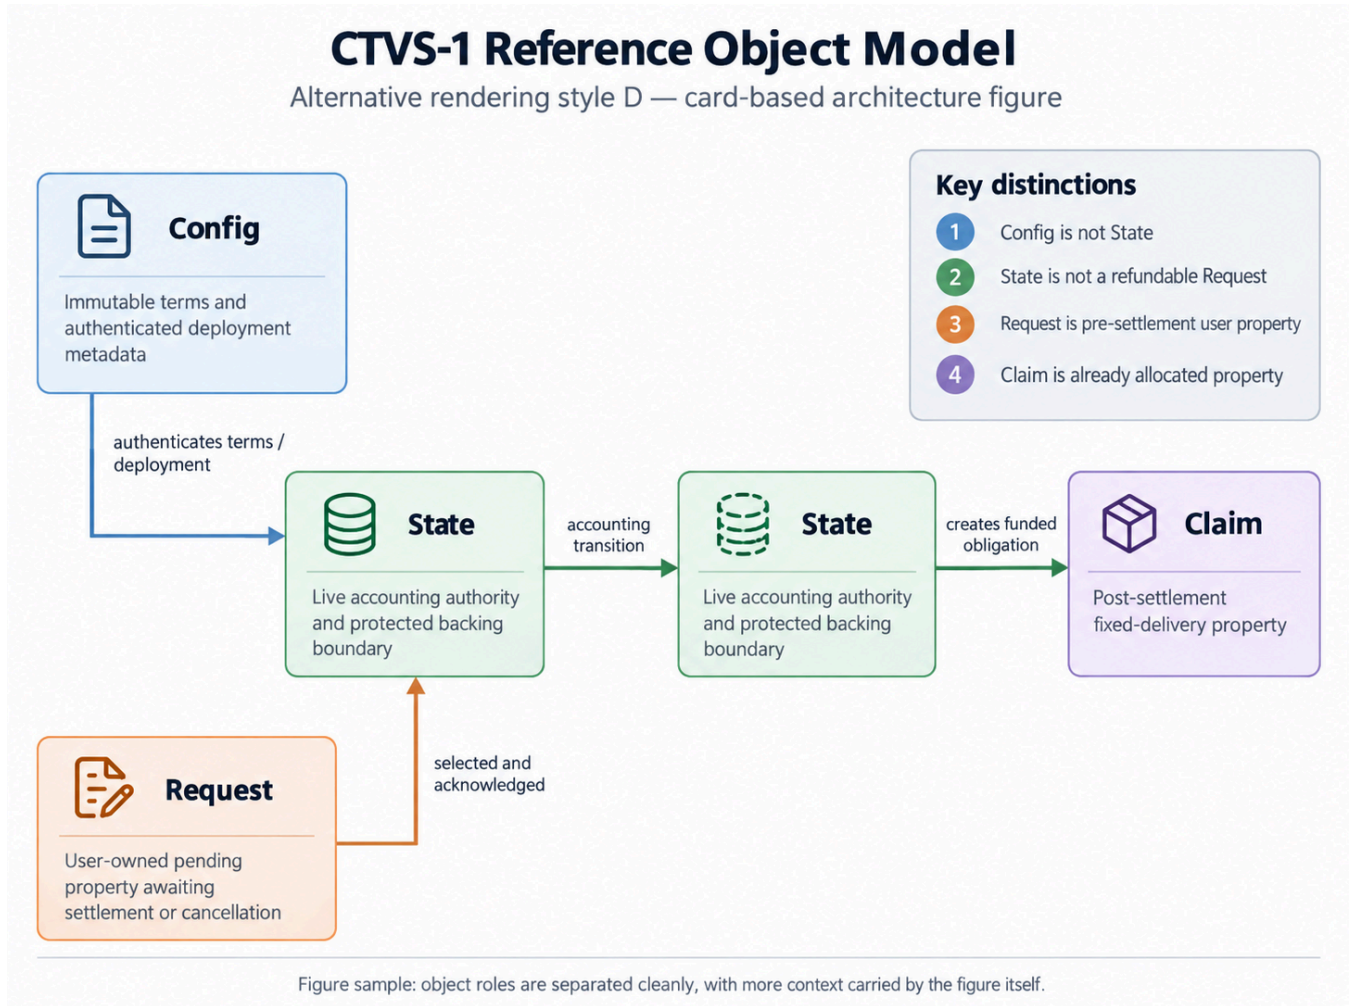

**Figure 2:** Authenticated reference objects and the economic boundary. Config, State, Request, and Claim have distinct authentication, ownership, and spending roles. A request-shaped datum cannot route genuine State custody through a refund branch.

## 4.2 Acyclic deployment and identity creation

Select and publish three concrete script templates: an always-failing configuration lock  $F\_lock$ , a fixed-delivery claim script  $Q\_claim$ , and a per-vault multipurpose program  $T$ .  $F\_lock$  and  $Q\_claim$  are compiled first. Their identities are fixed in the reviewed  $T$  build. They are not arbitrary URLs or caller-selected replacement scripts.

Let  $r_0$  be an existing seed output reference. Let  $K$  be Terms, excluding any identity that depends on  $T$ 's final per-vault hash. Define:

$$h_K = \text{Blake2b}_{256}(\text{domain} \parallel \text{serialiseData}(K)). \quad (3)$$

Here domain is the fixed 14-byte constant 435456532f48322f5445524d5300 (hexadecimal, including its final zero byte). Decode the hexadecimal to bytes before hashing; do not hash the printed characters. The constant is unchanged from revision 0.4 and is not derived from the public wire-format name. The candidate deployment then applies  $r_0$  and  $h_K$  to  $T$  and obtains policy/script hash  $P$ .  **$P$  is derived using the ledger's versioned script-hash construction, not an ad hoc hash of JSON, source text, or a displayed script hash.** The exact compilation/parameter-application path must still be demonstrated.


The byte names under  $P$  are fixed as  $ID$ ,  $STATE$ , and  $SHARE$ . This reference construction uses  $P$  both for the state/request payment script and its minting purpose. The genesis mint branch consumes  $r0$ , mints exactly  $ID(1)$  and  $STATE(1)$ , mints no shares, and creates:

- Config at enterprise script  $F\_lock$ , with seed  $r0$ , policy  $P$ , Terms  $K$ , matching  $hK$ , and its exact reserve.
- State at enterprise script  $P$ , with sequence zero,  $A=S=F\_fees=0$ , a positive funded reserve, matching  $hK$ , and initial pause flags zero.

It also rejects an underlying asset under  $P$ , additional assets minted by initialization, malformed terms, unexpected identities, wrong addresses, attached reference scripts, and nonzero initial economic issuance. The shared claim script  $Q\_claim$  has no dependency on  $P$  and cannot introduce a hash cycle. A descriptor/blueprint must not introduce a cycle by committing to an artifact that embeds  $P$  inside  $K$ .

The future mint branch permits only  $SHARE$  deltas coupled to an authentic state spend.  $ID$  and  $STATE$  can neither mint again nor burn. Genesis is a one-shot *branch*, not a statement that every future invocation of the share policy is one-shot.

**Unclosed proof obligation:** the package's repeated-byte fixture hashes are placeholders, not hashes of these compiled scripts. A token under an arbitrary policy is not authenticated merely because its name is  $STATE$ . Compiled genesis and script-template verification remain mandatory.

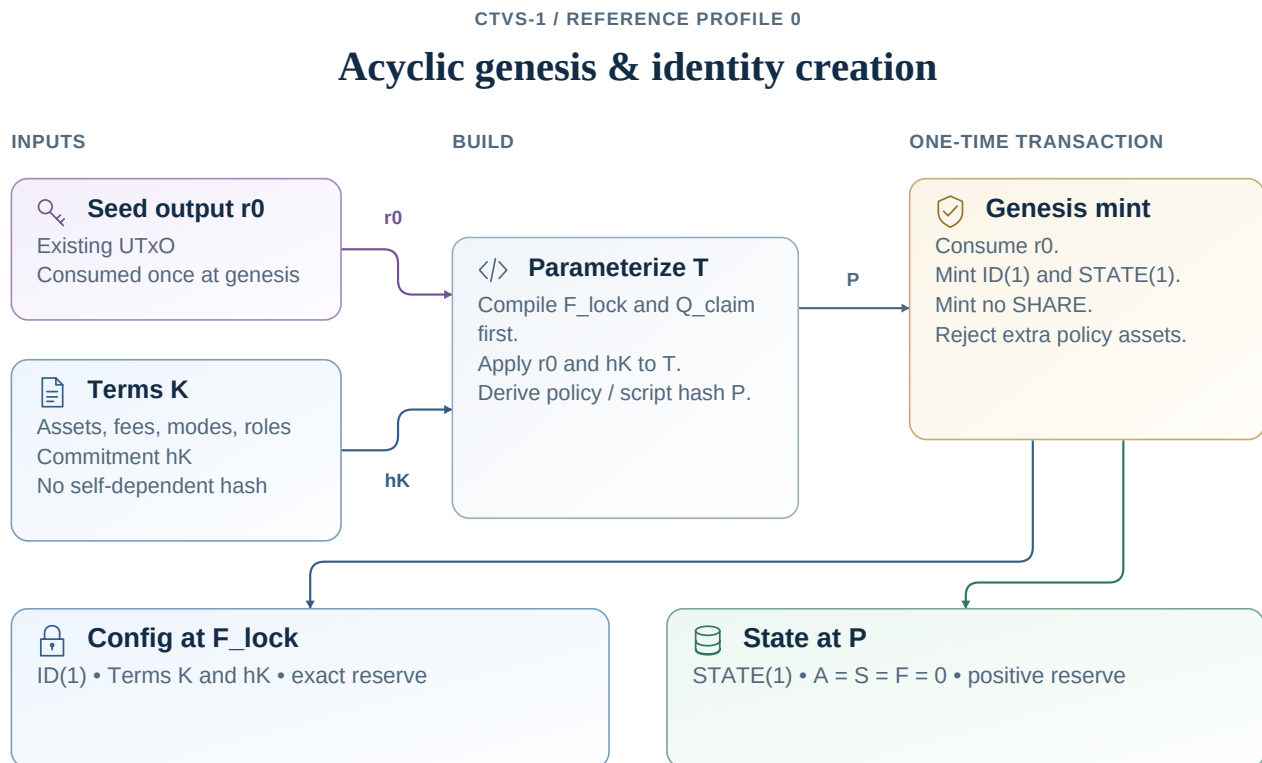

After genesis: only  $SHARE$  may change, coupled to an authentic State transition.  
 $ID$  and  $STATE$  cannot be minted again or burned. Compiled deployment proof remains required.

**Figure 3:** Acyclic deployment and one-time identity creation. The seed and Terms commitment parameterize the per-vault program; genesis creates Config and zero-supply State. Compiled hash construction and negative genesis vectors remain required evidence.

### 4.3 Authenticate the role before datum dispatch

For an ordinary input at the expected vault address, resolve it from the spending purpose's own output reference. First inspect protected identity assets. An input holding STATE(1) must take the State branch and have a State datum. A request-looking datum must never route actual STATE-bearing custody through a generic refund path. Any invalid nonzero STATE quantity or unexpected ID-bearing input fails.

For an input without these identity assets, require the supported request envelope before processing request branches. Do not choose a trusted role only from a user-controlled constructor tag. The tests exercise state-as-request rejection, state look-alikes without the token, wrong full address, and attached reference scripts.

### 4.4 Continuing state and terminal policy

Resolve the current input through its actual `Spend(own_ref)` purpose. Exactly one ordinary input contains this vault's STATE(1), and exactly one successor retains it at the same required enterprise script address. Authenticate configuration by its ID asset, immutable lock, terms, seed and script parameters; matching two untrusted datum fields is not authentication. The successor must preserve magic, wire version, policy, terms hash, and every field not permitted to change by the selected action. Sequence increases exactly once and must remain in range.

Config/state outputs MUST contain inline data and no attached reference script. The reference script witness, when used, is hosted separately; its location is an availability hint, never an alternative script identity. Normal economic actions preserve state storage. Only the positive reserve-top-up branch increases it. State/ID minting, burns, sweeps, in-place upgrades, and terminal closure are forbidden after genesis.

The permanent config reserve and absence of a sweep are disclosed design costs. Zero supply does not prove global absence of independent requests or claims. Residual backing remains under the same immutable arithmetic and can participate in later entry; no administrator acquires it implicitly. Lost shares remain issued supply. The model's fixture identities do not prove that secure genesis can actually create this construction; compiled trust-root evidence remains outstanding. [WIRE, SEMANTIC]

## 5. Accounting definitions and boundaries

### 5.1 Economic quantities

All economic arithmetic uses base-unit integers. Decimal display settings are presentation metadata, never inputs to the conversion kernel.

| Symbol   | Definition                                                                         |
|----------|------------------------------------------------------------------------------------|
| <i>A</i> | Underlying-asset units backing economically issued shares                          |
| <i>S</i> | Participating economic share supply, including valid user escrows and share claims |
| <i>F</i> | Accrued asset-denominated fees owed to the fee recipient; excluded from <i>A</i>   |
| <i>R</i> | Non-economic ADA storage reserve                                                   |
| <i>P</i> | Pending deposits not economically admitted                                         |
| <i>C</i> | Fixed, funded redemption claims no longer backing remaining shares                 |
| <i>L</i> | Asset liquidity available for the advertised immediate operation                   |
| <i>N</i> | Ledger supply of the native share asset                                            |

| Symbol | Definition                                                           |
|--------|----------------------------------------------------------------------|
| $I_s$  | Authenticated, economically unissued share inventory, when supported |

Pending balances and funded claims are separate UTxOs in the reference request profile. They are not subtracted again from a state balance that never included them.

## 5.2 Direct-custody identities

For an ADA underlying, the state carries exactly the state token and the following lovelace balance. For a native-token underlying, it additionally carries exactly that underlying asset and no unrelated native assets:

$$V_{\text{state}}(\text{ADA}) = A + F + R, \quad \text{ADA underlying} \quad (4)$$

$$V_{\text{state}}(\alpha) = A + F, \quad V_{\text{state}}(\text{ADA}) = R, \quad \text{native-token underlying.} \quad (5)$$

The reference value is closed: unaccounted excess assets, reserve reductions, and extra state tokens are invalid. Storage top-ups increase  $R$  exactly and have no effect on  $A$ ,  $F$ , or  $S$ .

ADA's fungibility means validators prove balance and allocation equations, not the provenance of individual lovelace. Any externally funded output top-up must leave all protected balances and outputs intact. Network fees and collateral must not silently consume backing, accrued fees, or refundable user storage.

## 5.3 Economic supply first; token mechanics second

Participating economic supply is the common quantity. For every supported issuance mechanism:

$$S' = S + q_{\text{issued}} - q_{\text{extinguished}}. \quad (6)$$

The reference mint/burn mechanism specializes this to  $S = N$  and  $M(\text{share}) = q_{\text{issued}} - q_{\text{extinguished}}$ . No alternative burn path may desynchronize its state counter. A native inventory mechanism instead establishes  $S = N - I_s$ , with authenticated, economically unissued inventory inaccessible to ordinary holders until valid issuance.

A hypothetical ledger supply of 1,000 shares with 400 verified unissued inventory shares represents 600 participating shares. A native field called `total_lp`, an explorer mint total or a displayed circulation figure MUST NOT be selected as the denominator by its name alone. The mapping must derive the relationship across initialization, issuance, exits and fees.

Transfers do not change economic supply. Under the supported request semantics, pending-redemption shares and shares already issued into claims participate; neither is unissued inventory. Moving a user's shares into escrow cannot relabel them as inventory.

Nonzero gross issuance and redemption may net to zero native mint. The accounting transition must still enforce both gross obligations and all user allocations. Inventory and mint/burn implementations use their own proved supply reconciliation, not a presumption that the minting policy always executes. Inventory conformance requires its own concrete native trace; it remains outside profile 0.

## 5.4 State fields versus derived views

The reference State contains only identity/version, terms binding, sequence, backing, economic supply, fees, storage, and pause flags. It contains no free-standing NAV epoch, queue size, pending-asset total, or liquidity oracle. For direct custody, the authoritative pricing checkpoint is the **consumed state reference**, with sequence as supporting lineage. Managed checkpoints need a separately encoded state and accepted-report mechanism.

Pending totals are indexer aggregates at a named chain point because request creation does not mutate this state. They must not be mistaken for validator-enforced capacity reservations. Aggregate value bounds are required in addition to bounds on individual fields: for example, bounded A, F, and R do not alone prove that A+F+R fits the permitted physical-value domain. [WIRE]

## 6. Conversion, fees, and limits

**Common operation contract; explicit reference formulas.** Every claimed implementation must publish executable conversion and action rules in underlying/share base units. Fee-free conversions are caller-independent and round down; previews include applicable operation fees, distinguish limits from mathematical output, and identify their state basis. Exact-input actions round economic outputs down; exact-output actions round required economic inputs up under the declared rule. User minima/maxima remain on-chain obligations.

Sections 6.1–6.4 give the complete profile-0 algorithm. Its virtual asset constant of one, fixed virtual-share parameter and percentage-markup fee are not mandatory economics for all native integrations. A different supported convention needs its own formula, fee order, rounding/domain rules and independent vectors; naming a math profile or providing an opaque server quote is insufficient. Proof sketches in Section 12 apply only under their stated formulas and premises.

### 6.1 Domain and virtual balances

The reference math sets virtual assets  $V_a = 1$  and immutable positive virtual shares  $V_s$ . Define adjusted balances  $X = A + V_a$  and  $Y = S + V_s$ . Virtual balances are constants in the conversion function, not property that can be spent.

The candidate bounded-integer profile permits individual stored economic quantities up to  $2^{63} - 1$ , subject to any stricter ledger bound. Intermediate arithmetic **MUST** be exact and sufficiently wide; implementations must not use floating-point arithmetic. Aggregate quantities are checked before serialization and execution. Unsupported versions and invalid inputs return an explicit error, not a usable zero quote.

OpenZeppelin documents virtual-balance and rounding defenses for vault share conversion. CTVS adopts the repository's named arithmetic profile, while authenticating custody through UTxO transitions rather than external account balances. [12, R3]

### 6.2 Conversion functions

For a nonnegative asset quantity  $a$  and share quantity  $q$ :

$$\text{sharesDown}(a) = \text{floor}\left(\frac{aY}{X}\right), \quad \text{sharesUp}(a) = \text{ceil}\left(\frac{aY}{X}\right). \quad (7)$$

$$\text{assetsDown}(q) = \text{floor}\left(\frac{qX}{Y}\right), \quad \text{assetsUp}(q) = \text{ceil}\left(\frac{qX}{Y}\right). \quad (8)$$

Fee-free conversion views use the down versions. Direct previews use the action-specific formula below. The exact fixed-state preview equals the validated economic result; later states do not inherit that guarantee. Output minima and input maxima must be enforced in the signed transaction.

The adjusted price  $p = X/Y$  is a pricing convention, not an oracle or an unconditional redeemable-value promise. At zero supply, display a bootstrap/residual status rather than dividing physical backing by zero.

### 6.3 Entry and exit fees

Let  $B = 10,000$ , with entry rate  $b_e$  and exit rate  $b_x$  satisfying  $0 \leq b < B$ . The reference fee is a markup on the pre-fee amount; its fee-inclusive inverse is not the same as a percentage-of-gross convention:

$$\text{feeRaw}(x, b) = \text{ceil} \left( \frac{xb}{B} \right), \quad \text{feeTotal}(x, b) = \text{ceil} \left( \frac{xb}{B + b} \right). \quad (9)$$

For example, a gross deposit of 101,000 with a 100-basis-point entry markup pays 1,000 in fees and admits 100,000 as backing. A 1% fee charged directly on gross would be a different profile.

| Operation         | Computation                                                             | User protection   |
|-------------------|-------------------------------------------------------------------------|-------------------|
| Deposit gross $d$ | $f = \text{feeTotal}(d, b_e); n = d - f;$<br>$q = \text{sharesDown}(n)$ | $q \geq q_{\min}$ |
| Mint exact $q$    | $n = \text{assetsUp}(q); f = \text{feeRaw}(n, b_e);$<br>$d = n + f$     | $d \leq d_{\max}$ |
| Withdraw net $w$  | $f = \text{feeRaw}(w, b_x); g = w + f;$<br>$q = \text{sharesUp}(g)$     | $q \leq q_{\max}$ |
| Redeem exact $q$  | $g = \text{assetsDown}(q);$<br>$f = \text{feeTotal}(g, b_x); w = g - f$ | $w \geq w_{\min}$ |

The reference execution profile rejects zero economic input, zero shares issued, or zero net redemption output. Fee-free conversion of zero remains a valid zero view. Fees, limits, liquidity, and authorization are different checks; a mathematically computed preview is not evidence that the transaction is executable.

### 6.4 Limits and the corrected maximum-operation algorithm

Let  $A_{\text{cap}}$  be the optional immutable backing cap. Admission requires  $A + n \leq A_{\text{cap}}$ . Exits require sufficient participating shares, gross backing, and physical liquidity after preserving fees/storage. A positive-output requirement creates a *lower* execution threshold, while caps and integer domains create upper thresholds. The whole execution predicate is therefore not necessarily prefix-monotone.

At  $A = S = 0$ ,  $V_s = 1$ , entry markup 9,999 basis points and backing cap one:

| Gross deposit | Fee | Net backing / shares | Execution             |
|---------------|-----|----------------------|-----------------------|
| 1             | 1   | 0 / 0                | Reject: zero issuance |
| 2             | 1   | 1 / 1                | Accept economically   |
| 3             | 2   | 1 / 1                | Accept economically   |
| 4             | 2   | 2 / 2                | Reject: cap           |

A last-true binary search over the entire acceptance predicate can incorrectly return zero. The corrected algorithm searches only the monotonic **upper-resource predicate**: backing cap, supply bound, fee-liability bound, and permitted model value bounds. It then checks positive issuance at the upper candidate. [SEMANTIC, SEMANTIC-EVID]

```

max_deposit(state, terms):
    reject invalid state/profile; return unavailable for disabled/paused entry
    hi = bounded gross-amount domain maximum
    d = largest x in [0, hi] satisfying upper_capacity(x)
        # binary search requires upper_capacity(0) = true
        # and upper_capacity must be prefix-monotone
    if d == 0 or deposit_shares(d) == 0: return known_zero
    return economic_maximum(d)

```

Do not call the returned amount a resource-feasible transaction maximum. The search does not measure serialized size, execution units, input availability, or minimum ADA. Maxima for other operations require their own proved monotonic upper constraints; a generic binary search over arbitrary feasibility predicates is not specified. Expose minimum economic size, economic maximum, construction limitations, unsupported, stale, paused, and unknown liquidity separately.

In this reference profile, nonzero state-action amounts and user bounds are positive integers; views can still convert zero. An immutable cap, a pause, or a disabled execution mode does not change the conversion equation. The economic maximum-deposit implementation agrees with exhaustive enumeration in 384 small configurations; no unbounded or ledger-resource conclusion follows.

## 7. Direct transitions and authorization

### 7.1 Accounting deltas

Every successful state transition verifies the old value equation, recomputes the action, checks the successor equation, and increments the state sequence. The variables below use the quotes from Section 6.

| Action                | $A'$    | $F'$    | $S'$    | Physical underlying change |
|-----------------------|---------|---------|---------|----------------------------|
| Deposit / mint        | $A + n$ | $F + f$ | $S + q$ | $+d$                       |
| Withdraw / redeem     | $A - g$ | $F + f$ | $S - q$ | $-w$                       |
| Collect all fees      | $A$     | $0$     | $S$     | $-F$                       |
| Top up reserve by $t$ | $A$     | $F$     | $S$     | ADA reserve $+t$ only      |
| Change pause flags    | $A$     | $F$     | $S$     | None                       |

For exits,  $A$  falls by gross value  $g$ , even though physical custody falls only by  $w$ . The difference has become a fee liability. Removing  $w$  from backing and also accruing  $f$  would incorrectly overstate shareholder assets.

### 7.2 Authorization and key-only reference roles

**Common obligation.** Prove authorization of the intended action and committed value; do not prescribe one universal authorization language. A native implementation may use an established script guard, provided its execution is bound to the vault/request, action, applicable terms, amount constraints and permitted destinations. Guard identity or a reference to its code is not execution. Profile 0 remains key-only as specified below.

The direct action spends ordinary funding/share inputs under their own ledger authorization. It fixes receiver, amount, and limit in a StateRedeemer. There is no global native-token allowance and no implicit caller. In pro-

file 0 the remaining funding/share inputs are key-controlled; arbitrary script-controlled direct input composition is not enabled.

A configured `pause_key`: `Some(k)` authorizes `SetPause` only when `k` is an explicit required signatory with a valid ledger witness. `None` disables that privileged branch. The reference profile has no capability slot in Terms and no always-true script-authority approximation. A controller capability is a separate profile requiring executed authorization, replay/domain binding, its own protected successor, and compatibility with output allocation.

A protocol can create a request under its own spending rules and name a supported key controller and script destination. That does not establish a native script-controlled cancellation implementation. Likewise, a destination's script is not executed merely when an output is created there. Local key-role and destination tests must not be described as capability or receiving-validator execution. [TX, WIRE]

### 7.3 Pause, fees, and reserves

Entry and exit pause flags are separate. An entry pause blocks deposit and mint; an exit pause blocks withdraw and redeem. Only the declared authority can change flags. State-reserve top-up and correct fee collection remain available. CTVS-2 separately defines that cancellation and funded-claim delivery are not blocked by these flags.

Fee collection is permissionless but pays only the immutable destination and exact economic amount. The collector supplies any additional output ADA and network fee. The transaction cannot change backing or share supply. A zero fee balance is not a valid collection action.

State-reserve top-up accepts only a positive increase and cannot modify other accounting fields. There is no repayment right for the contributor and no reserve withdrawal in the reference profile.

### 7.4 Full transition obligations and mint branch coupling

Before applying the arithmetic, check profile/mode, the selected State action tag, authentic own input and config, all old state bounds/value, permitted transaction family, and valid output indices. Recompute the quote and user bound; create one exact successor and a distinct protected payout. Direct entry is enabled by bit 1, direct exit by bit 2. `SetPause` alters only pause flags and sequence; `TopUpReserve` alters only storage and sequence. All accounting transitions increment sequence once.

`StateSpend` and `MintPurpose` are different redeemer envelopes. A nonzero SHARE mint/burn must use the supply-update action pointing to the actual consumed state; that state must independently verify its exact supply delta. The state MUST NOT assume a minting policy runs for a zero-net batch. No ID/STATE recreation, unrelated mint, or alternative share-burn route is permitted. Genesis alone creates the two identities. Exact envelope tags and action arities appear in Section 10; the asynchronous gross obligations appear in CTVS-2 Section 6. [WIRE]

### 7.5 Script-controlled user acceptance target

A real protocol-controlled user is an early interoperability requirement, not evidence already supplied by key-destination tests. Pin one treasury/portfolio guard and demonstrate: authorized funding of the supported deposit or request; successful output to the committed protocol destination/datum; cancellation of still-pending property back to the committed refund; and rejection of an operator-selected replacement recipient. Then spend the receiving output under its real validator to establish usability, not merely address equality.

Use the native guard's actual mechanism; CTVS does not require a new capability NFT or permission expression tree. Record all purposes the composition invokes and prove complete non-overlapping obligations. Such a transaction must not claim profile-0 restricted-input conformance when it consumes a foreign script or uses a withdrawal hook. Required compiled authorization, ledger and independent-builder evidence remain open. [WG, REGISTER]

## 8. Payment attribution and reference composition

### 8.1 Obligations, not address searches

The common requirement is no double satisfaction of protected obligations. A native implementation may use disjoint outputs or a proved aggregate allocation. For aggregate quantities  $x_{b,o,a}$  attributed to obligation  $b$ , output  $o$  and asset  $a$ , complete fulfillment and output capacity must both hold:  $\sum_o x_{b,o,a} = q_{b,a}$  and  $\sum_b x_{b,o,a} \leq V_o(a)$ , with matching destination conditions. The allocation is authenticated by actual validators, not an off-chain transcript. If a shared input serves several users, its per-intent protected partitions also require an authenticated, exhaustive accounting rule.

Profile 0 chooses the simpler disjoint-output mechanism below. Relaxing its purpose restrictions without another demonstrated coverage proof is not an allowed editorial change.


A payment obligation includes its source operation, asset, economic quantity, exact destination, datum condition, and storage/refund requirements. Two obligations to the same destination cannot each count the same value independently.

Let  $\mathcal{B}$  be the set of obligations. An allocation function maps each obligation to an output index. The reference rule requires distinct outputs for distinct protected obligations:

$$a : \mathcal{B} \rightarrow \{0, \dots, |O| - 1\}, \quad b_1 \neq b_2 \Rightarrow a(b_1) \neq a(b_2). \quad (10)$$

Each selected output must satisfy its obligation. State continuation, user payment, and fee payment cannot share an output. Output indices are permitted as validated lookup hints; identity does not depend on an unverified array position.

## CTVS-1 / REFERENCE-PROFILE PAYMENT ALLOCATION

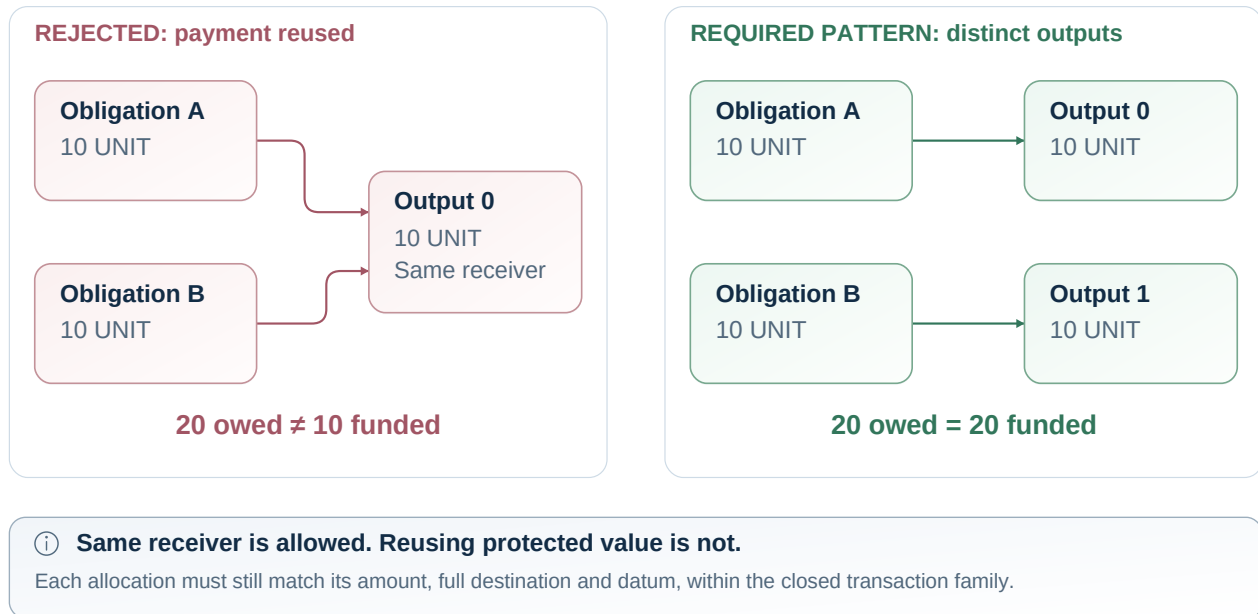**Every protected obligation needs its own value**

**Figure 4:** Protected obligations need exclusive output allocation. Same receiver is permitted, but one ten-unit payment cannot satisfy two separate ten-unit obligations. Amount, full destination, datum, and closed transaction domain still require validation.

## 8.2 Restricted composition inputs and purposes

Local output-index injectivity cannot prevent an unrelated validator from counting the same payout. Profile 0 therefore validates the transaction's entire permitted script-input family. A direct action has one authentic state plus key-controlled funding/share inputs. Batch extends that set only with this vault's request inputs. No other vault state, foreign script input, simultaneous claim delivery, or capability input is admitted.

Withdrawals, including zero-withdrawal hooks, certificates, votes, proposals, treasury declarations, donations, unrelated minting, and unsupported purposes are rejected as specified in Section 3.4. These are validator requirements, not builder conventions. Reference-only data does not fund payouts. Config/state and protected destination outputs forbid attached reference scripts.

The restricted family closes the reference proof's script-protected obligation set; it intentionally limits atomic composition. A shared allocation verifier or reviewed adapter is required before relaxing it. Request creation from another protocol and delivery to a script destination remain distinct from consuming that protocol's script during settlement. [WIRE, TX]

## 8.3 Destinations

A destination fixes the full ledger address and either no datum or an exact inline datum. Datum-hash-only destinations are outside this profile. The validator does not replace a recipient protocol's datum with a mandatory CTVS receipt.

For a native-token payout, the protected output contains exactly the economic quantity of the underlying. ADA additionally funds its storage. For an ADA payout, the output contains the economic amount plus any explicitly

returned reserve/top-up. Allocation and closed balance equations establish that a minimum-output top-up did not reduce another protected payment.

## 8.4 Destination and recovery preservation are different from economic quoting

Destination matching checks both credentials, exact datum mode/value, and no attached reference script. A native economic payout fixes its economic token quantity; ADA top-ups may be external. For CTVS-2 fixed refunds and deliveries, the stronger rule is componentwise preservation of the **entire actual source value**, not just a declared amount:

$$\text{DestinationMatches}(o, c) \wedge \forall a, V(o)[a] \geq V(c)[a]. \quad (11)$$

Distinct claims/refunds retain disjoint allocations. The exact ledger address subset and optional-datum representation are given in Section 10. Recipient data cannot be overwritten by a CTVS receipt; the separate claim object carries the source references. [WIRE]

# 9. Worked UTxO transactions

## 9.1 Example conventions

These are complete economic/value sketches, not serialized ledger transactions. ID, STATE, and SHARE abbreviate distinct authenticated assets; UNIT is a hypothetical native underlying. Numeric quantities are base units. The illustrated 3,000,000-lovelace state reserve, 2,000,000-lovelace destination reserve, and 400,000-lovelace transaction fee are assumptions, not current network minima or fee estimates. A builder must calculate actual sizes, fees, collateral, and witnesses. Reference inputs do not contribute spendable value.

Examples 1, 2, and 4 form one accounting sequence with  $V_a = V_s = 1$  and 100-basis-point entry/exit markup. A previously authenticated initial state is assumed. State/configuration inputs and destinations use their required inline datums; ordinary key outputs below have no datum.

## 9.2 Example 1 — native-token deposit

Start with  $A = S = 1,000,000$ ,  $F = 0$ , and  $R = 3,000,000$ . Gross deposit  $d = 101,000$  gives  $f = 1,000$ ,  $n = 100,000$ , and  $q = 100,000$ . The user requires at least 99,900 shares.

| Side      | Object                    | Value / economic data                       |
|-----------|---------------------------|---------------------------------------------|
| Reference | Config <code>cfg#0</code> | 1 ID; immutable terms                       |
| Input     | State <code>s0#0</code>   | 1 STATE; 1,000,000 UNIT; 3,000,000 lovelace |
| Input     | User <code>u0#0</code>    | 101,000 UNIT; 6,000,000 lovelace            |
| Mint      | SHARE                     | +100,000                                    |
| Output    | Successor state           | 1 STATE; 1,101,000 UNIT; 3,000,000 lovelace |
| Output    | Receiver                  | 100,000 SHARE; 2,000,000 lovelace           |
| Output    | User change               | 3,600,000 lovelace                          |
| Fee       | Network                   | 400,000 lovelace                            |

The successor datum has  $A' = 1,100,000$ ,  $F' = 1,000$ , and  $S' = 1,100,000$ . Native asset balance is  $1,000,000 + 101,000 = 1,101,000$ . ADA balance is  $9,000,000 = 3,000,000 + 2,000,000 + 3,600,000 + 400,000$ .


### 9.3 Example 2 — redemption with an accrued exit fee

Use Example 1's successor. Redeem 50,500 shares with a minimum payout of 49,900 UNIT. Since the adjusted exchange rate remains one, gross redemption is 50,500, fee is 500, and net payout is 50,000.

| Side   | Object          | Value / economic data                       |
|--------|-----------------|---------------------------------------------|
| Input  | State           | 1 STATE; 1,101,000 UNIT; 3,000,000 lovelace |
| Input  | Share holder    | 50,500 SHARE; 5,000,000 lovelace            |
| Mint   | SHARE           | -50,500                                     |
| Output | Successor state | 1 STATE; 1,051,000 UNIT; 3,000,000 lovelace |
| Output | Receiver        | 50,000 UNIT; 2,000,000 lovelace             |
| Output | User change     | 2,600,000 lovelace                          |
| Fee    | Network         | 400,000 lovelace                            |

The successor is  $A' = 1,049,500$ ,  $F' = 1,500$ ,  $S' = 1,049,500$ . Therefore  $A' + F' = 1,051,000$ , exactly the remaining physical UNIT balance. The 500-unit exit fee was not paid out and does not remain share backing.

## CTVS-1 / WORKED EXAMPLES 1 AND 2

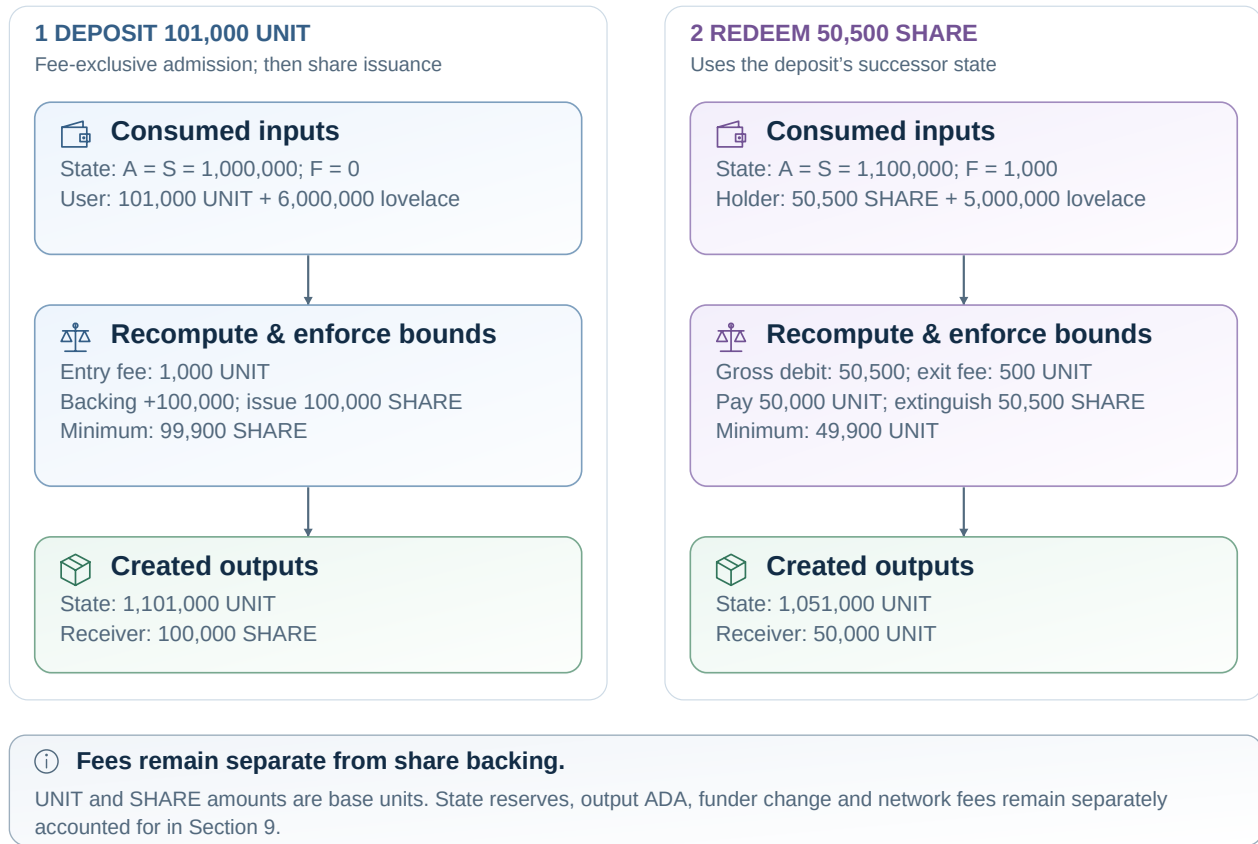**Deposit and redeem: opposite supply effects**

**Figure 5:** Direct deposit and redeem use the same authenticated State boundary but have opposite supply effects. The figure compares fee-exclusive admission and share issuance with gross backing debit, fee accrual, share extinction, and net payout.


**9.4 Example 3 — ADA underlying without reserve dilution**

Independently start at  $A = S = 100,000,000$ ,  $F = 0$ ,  $R = 3,000,000$ , with  $V_a = V_s = 1$ . Deposit 10,100,000 lovelace economically. The fee is 100,000 and shares issued are 10,000,000.

| Side   | Object          | Value                                |
|--------|-----------------|--------------------------------------|
| Input  | State           | 1 STATE; 103,000,000 lovelace        |
| Input  | User            | 15,100,000 lovelace                  |
| Mint   | SHARE           | +10,000,000                          |
| Output | Successor state | 1 STATE; 113,100,000 lovelace        |
| Output | Receiver        | 10,000,000 SHARE; 2,000,000 lovelace |
| Output | Change          | 2,600,000 lovelace                   |
| Fee    | Network         | 400,000 lovelace                     |

The state now separates 110,000,000 backing, 100,000 fees, and 3,000,000 reserve. The user's 2,000,000-lovelace share-output reserve does not buy additional shares. Total ADA is 118,100,000 on both sides including the fee.

## CTVS-1 / WORKED EXAMPLE 3 • ALL ADA VALUES IN LOVELACE

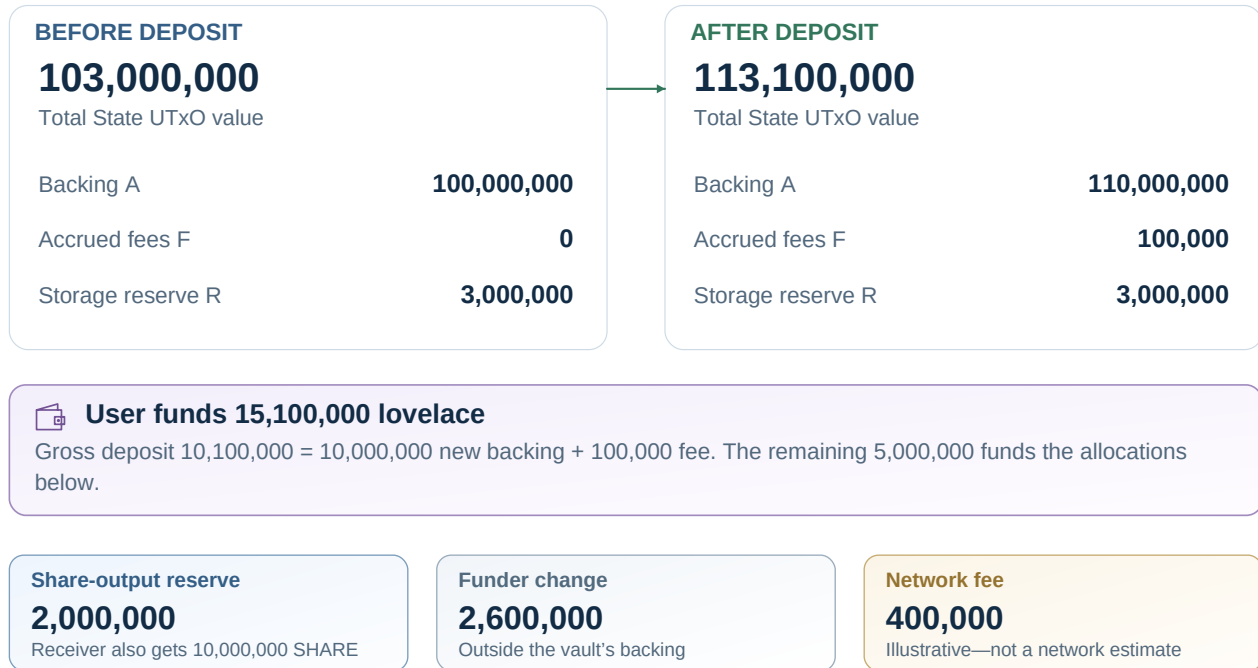**ADA: backing, fees and reserves are not interchangeable**

$$118,100,000 \text{ in} = 113,100,000 + 2,000,000 + 2,600,000 + 400,000 \text{ out}$$

Reserve R is unchanged; output storage does not buy extra shares.

**Figure 6:** ADA accounting keeps backing, accrued fees, and State storage separate. The partition boxes are not proportional; their purpose is to show that output storage, change, and network fees do not purchase shares or become backing.

### 9.5 Example 4 — collecting the fees from Example 2

The state contains 1,051,000 UNIT, comprising 1,049,500 backing and 1,500 fees. An external collector contributes 5,000,000 lovelace. The successor keeps 1,049,500 UNIT and its 3,000,000-lovelace reserve. The configured treasury receives 1,500 UNIT plus 2,000,000 lovelace. Collector change is 2,600,000 and the fee is 400,000.

No SHARE is minted or burned.  $A$  and  $S$  are unchanged;  $F' = 0$ . A payout to the correct treasury address with the wrong inline datum is invalid.

### 9.6 Example 5 — residual backing after the last redemption

This is a minimal arithmetic illustration, with storage omitted. Set  $V_a = 1$ ,  $V_s = 2$ , and no fees. From  $A = S = 0$ , mint three shares for  $\text{ceil}(3/2) = 2$  assets. Redeeming all three returns  $\text{floor}(3(2+1)/(3+2)) = 1$  asset. The final state is  $A = 1$ ,  $S = 0$ .

The reference policy preserves this residual and applies the same immutable math to future entry. It does not distribute an extra unit to the last redeemer, reset balances, or permit a sweep. The permanent-state profile remains open or paused. Any different residual disposition is a separately disclosed economic profile.

## 9.7 Exact datum and direct-action correspondence

Use Example 1 with old sequence 7 and no pause. Let  $p$  be the authenticated vault-policy bytes and  $hK$  the deployment's terms commitment; these symbolic names are not executable hashes. In the exact constructor notation of Section 10:

```
old_state = C(0,[CTVS,2,p,hK,7,
                1000000,1000000,0,3000000,0])
new_state = C(0,[CTVS,2,p,hK,8,
                1100000,1100000,1000,3000000,0])
StateRedeemer = C(0,[CTVS,2,
                    C(0,[receiver,101000,99900,0,1])])
MintRedeemer = C(3,[CTVS,2,C(1,[consumed_state_ref])])
```

The example fixes successor output 0, receiver output 1, and key change output 2. State field order is backing, supply, then accrued fees. The receiver is the full Destination constructor, not a string. The normal mint map is  $\text{SHARE}(+100,000)$ ; the reference config and state token are independently authenticated. A transaction with these numeric deltas but a wrong datum, wrong state branch, substituted config, or reused payout index is invalid under the candidate predicates.

Examples 2 and 4 advance the same sequence for redemption and fee collection. Their inner State action tags are respectively 3 and 5; no free-standing checkpoint field is added to the successor. Example 3 uses the same ten-field State structure with ADA represented by `Terms.Asset` constructor 0. These are candidate construction sketches, not serialized accepted transactions. [WIRE, WIRE-DATA]

## 10. Datum, redeemer, and encoding specification

**Normative for the existing reference wire.** The exact constructors, counts, bounds, names and commitment bytes in Section 10 are preserved from v0.5. They are not a mandatory migration format for every native integration. Native mappings must publish equally precise decoding and authentication rules for their own implementation and satisfy Section 2.5. The four files under `candidate-wire/` remain byte-identical; the revision checker verifies that preservation.

### 10.1 Candidate identity, notation, and recursive primitives

$C(t, [...])$  is Plutus Constr `t` fields, not a CBOR major type and not a JSON object.  $B[n]$  is a byte string of exactly  $n$  bytes.  $Q$  is an integer in 0 through  $2^{63}-1$ ;  $Q+$  is positive in that range. An output index is a candidate integer in 0 through 65,535, additionally checked against the actual transaction length. This bound is not a capacity promise.

The magic bytes are ASCII CTVS (43545653 hex). The candidate wire-version integer is 2. Amounts in the JSON fixture representation are exact decimal strings, not floating-point values.

```

Credential = C(0,[B[28]])          -- verification key hash
           | C(1,[B[28]])          -- script hash

Option<T>   = C(0,[T])              -- Some
           | C(1,[])               -- None

StakeRef    = C(0,[Credential])     -- inline credential
Address     = C(0,[Credential, Option<StakeRef>])
Destination= C(0,[Address, Option<BoundedData>])

Asset       = C(0,[])              -- ADA
           | C(1,[B[28], Bytes[0..32]]) -- native policy and name
OutRef      = C(0,[B[32], output_index])
Controller  = C(0,[B[28]])         -- key profile only
Settlers    = C(0,[])              -- any signing reward key
           | C(1,[List<B[28]>])     -- sorted, unique, 1..16 keys

```

Address nesting follows the selected Aiken standard-library representation for the supported subset. Pointer staking addresses and bootstrap addresses are excluded here, not silently interpreted as enterprise addresses. All payment and staking credentials are compared. On-chain address data does not itself contain the user-facing network identifier. The network-domain commitment is a deployment convention; clients and ledger construction must verify the actual network rather than pretending the validator has an implicit chain-ID oracle. [TX, ADDR]

A destination with None requires NoDatum. Some(d) requires an inline datum structurally equal to d, not a datum hash and not just any datum at the right address. NoDatum, DatumHash, and InlineDatum are distinct ledger variants. [TX]

## 10.2 Immutable Terms and Config

```

Terms = C(0,[
  profile,          -- exactly 0: this reference combination
  network_domain,   -- B[32], configured chain-domain fingerprint
  underlying,       -- Asset
  virtual_shares,   -- Q+; virtual assets are fixed at 1
  max_backing,      -- Option<Q>
  entry_bps, exit_bps, -- integers 0..9999
  fee_destination,  -- Destination
  pause_key,        -- Option<B[28]>
  settlers,         -- Settlers
  execution_modes,  -- integer 1..15
  max_batch,        -- integer 1..16, provisional structural cap
  descriptor_hash   -- Option<B[32]>, non-executable metadata
])

Config = C(3,[
  magic, wire_version, vault_policy, seed,
  terms_hash, terms, storage_lovelace
])

```

Config has exactly seven fields; Terms has exactly thirteen. Mode bits are direct entry 1, direct exit 2, asynchronous entry 4, and asynchronous exit 8. Direct entry includes deposit and mint; direct exit includes withdraw and redeem.

Unknown bits are not ignored. The descriptor is not executable builder code and is not an alternative authority for custody.

Verify the terms commitment against the program's authenticated parameter, not only against another field in the same untrusted datum. Config storage is positive. Config value is exactly its reserve plus ID(1), with no reference script.

### 10.3 Exact accounting State

```
State = C(0,[
  magic, wire_version, vault_policy, terms_hash,
  sequence, backing_assets, economic_supply, accrued_fees,
  storage_lovelace, pause_flags
])
```

The State has exactly ten fields. No unconstrained extensions: Data, mutable asset identifier, mutable fee destination, or generic oracle field is included. `pause_flags` is 0..3, with entry bit 1 and exit bit 2. All nonnegative quantities and aggregate physical balances are checked; individually bounded fields do not prove their sum fits.

sequence increments exactly once per accounting transition and has no authority over unrelated UTxOs. The direct profile has no meaningful NAV epoch, so no free-standing epoch field can be arbitrarily changed. A managed state needs a separate exact profile, not hidden managed semantics in this State.

The closed value equations are:

$$V_{\text{state}}(\text{ADA}) = A + F_{\text{fees}} + R \quad \text{for ADA underlying,} \quad (12)$$

$$V_{\text{state}}(u) = A + F_{\text{fees}}, \quad V_{\text{state}}(\text{ADA}) = R \quad \text{for native-token underlying.} \quad (13)$$

STATE(1) is also present, and every other native asset is absent. No reference script or staking credential is attached. Only an explicitly authorized reserve-top-up action increases R; ordinary operations preserve it. Fees and reserves cannot fund the network fee by an implicit state reduction.

### 10.4 Redeemer envelopes and action constructors

Every action envelope has exactly `[magic, wire_version, action]` and a role tag: `StateSpend 0`, `RequestSpend 1`, `ClaimSpend 2`, `MintPurpose 3`. A decoder for one role does not accept another role's tag. Constructor tags are scoped to the expected type; tag zero does not globally mean the same operation.

| Inner state action tag | Fields, in order                                                   |
|------------------------|--------------------------------------------------------------------|
| 0 Deposit              | receiver, gross_assets, min_shares, state_output, receiver_output  |
| 1 Mint                 | receiver, target_shares, max_assets, state_output, receiver_output |
| 2 Withdraw             | receiver, net_assets, max_shares, state_output, receiver_output    |
| 3 Redeem               | receiver, shares, min_assets, state_output, receiver_output        |
| 4 Batch                | state_output, entries, reward_key, optional_reward_output          |
| 5 CollectFees          | state_output, fee_output                                           |

| Inner state action tag | Fields, in order                  |
|------------------------|-----------------------------------|
| 6 TopUpReserve         | additional_lovelace, state_output |
| 7 SetPause             | pause_flags, state_output         |

A `SettleEntry` is `C(0,[request_ref,claim_output,claim_topup])`. Quotes and aggregate economic deltas are recomputed, not duplicated as independently authoritative numbers. Entries are sorted lexicographically by transaction-ID bytes then numerically by output index; snapshot economics do not use that order as a sequential pricing rule.

The request and mint inner actions are:

```
Request acknowledgment: C(0,[state_ref])
Controller cancellation: C(1,[refund_output])
Expiry refund:         C(2,[refund_output])
Mint initialization:    C(0,[config_output,state_output])
Mint supply update:     C(1,[state_ref])
```

Claim delivery is `C(0,[entries])`, where each `DeliverEntry` is `C(0,[claim_ref,receiver_output])`. Every consumed claim at `Q` must be covered exactly once, and every claim input must use the same semantic delivery-entry list. That rule is a normative candidate requirement; the local tests exercise allocation primitives, not the full multi-handler claim implementation. The exact recursive schemas are included in `schema.json` and `wire.cddl`.

The Batch reward key must occur among the transaction's explicit required signatories and, for a `KeySet` policy, in the immutable authorized set. When the sum of request settlement fees is zero, the reward-output option must be `None`. Otherwise it must select one distinct output to that key's enterprise address, with `NoDatum`, no reference script, and at least that summed lovelace amount; any excess is an external minimum-output top-up, not an additional request charge. All other assets are excluded from that reward output. The per-request fee is immutable intent; the operator cannot choose a larger amount by changing the reward index.

## 10.5 Semantic equality and commitment serialization

Plutus Data has integer, bytes, list, map, and constructor forms. Its decoder supports multiple CBOR spellings for some identical Data values. Constructor alternatives 0..6 use tags 121..127 in the preferred representation; 7..127 use 1280..1400; the extended form uses tag 102. Long byte strings use chunks no longer than 64 bytes. [SER, PLUTUS]

The local preferred writer emits empty lists as definite empty arrays, nonempty lists as indefinite arrays, maps as definite maps in their existing pair order, shortest integer encodings, and the documented byte chunks. A second JavaScript implementation checks these fixtures. **Agreement with the pinned Plutus builtin has not been executed.** This is a release gate, not an inferred pass.

For example, these decode to the same `C(0,[1,2])`:

```
preferred:           d8799f0102ff
definite field array: d879820102
```

Ordinary scripts receive the decoded value, so the reference validator must check constructor shape and semantic constraints, not an alleged original CBOR spelling. Indexers preserve original transaction bytes and IDs; they must not normalize a signed transaction and reuse its original signature/ID.

Terms are committed using the named builtin serialization of validated K and the fixed ASCII domain including its zero terminator. The local encoder provides candidate expected bytes. Do not substitute a generic JSON hash or a generic canonical-CBOR library's defaults. A semantic terms commitment and an actual ledger datum hash are different operations; do not assume reserialization reproduces every original hash spelling.

Protocol-owned records use constructors, not maps with loosely interpreted field names. Opaque recipient Data is not converted to a dictionary or sorted. Its pair ordering is preserved. This bounded candidate rejects duplicate equal map keys in opaque data rather than silently dropping one; supporting a different recipient convention requires an explicit profile. CIP-57 provides schema machinery but does not supply these transaction semantics automatically. [BLUEPRINT]

## 10.6 Operational bounds and decoding gates

| Item                                | Candidate limit                                                    |
|-------------------------------------|--------------------------------------------------------------------|
| Economic stored quantity            | $0..2^{63}-1$ , plus aggregate physical-value bounds               |
| Output-reference index              | $0..65,535$ and actual-container bounds                            |
| Opaque recipient Data               | depth $\leq 16$ ; nodes $\leq 256$ ; normalized bytes $\leq 1,024$ |
| Opaque integer                      | signed 256-bit range                                               |
| State datum                         | normalized bytes $\leq 256$                                        |
| Terms / config                      | normalized bytes $\leq 4,096$ / 4,608                              |
| Settlement-eligible request / claim | normalized bytes $\leq 4,096$ / 2,048                              |
| Entries and configured settler keys | $\leq 16$                                                          |

These are finite design envelopes selected for testing, **not measured safe transaction capacities**. User datums and whole transaction envelopes require actual execution measurements before any stable maximum is advertised. Structural bounds should be checked before expensive recursive normalization where possible.

Recovery does not require its economic body to pass the settlement byte/type limits. It validates the supported recovery fields. Extremely large or otherwise unconstructible escrow outputs still have no unconditional recovery guarantee; full-value preservation and practical transaction feasibility are separate. A malformed *recovery* envelope or unknown outer version has no implied refund path.

## 10.7 Machine-readable agreement and the remaining wire gate

`schema.json` fixes constructor types, arities and field order for CTVS-WIRE-2. Additional constraints in this specification and the recorded local schema checker include commitment verification, key ordering/uniqueness, body interpretation, value bounds and opaque-data limits. A type-correct datum is not thereby an authentic or executable transaction. `wire.cddl` is a readable companion, not a successfully executed CDDL-engine validation.

The preferred fixture writer produces candidate expected bytes, while the decoder accepts supported equivalent Data encodings. Arbitrary CBOR types are not valid Plutus Data. Opaque constructor tags are additionally restricted to  $0..127$ ; opaque integer range is  $-2^{255} \leq x < 2^{255}$ ; duplicate equal map keys are rejected without lossy dictionary conversion. Recovery's economic body is deliberately not required to satisfy recipient-data or settlement-body limits before dispatch.

The 22 local fixtures and 44 cross-language comparisons are not builtin-certified golden bytes. Compare the exact nested types with the pinned Aiken decoder, compare commitment bytes with `serialiseData`, and obtain independently expected semantic vectors before freezing the encoding. This revision does not create those E3/E4 results. CTVS-2 Section 12 supplies the Request, Recovery, RequestBody and Claim records using these same primitives. [WIRE-DATA, WIRE-EVID]

## 11. Managed accounting and additional fee models

### 11.1 A separate evidence contract

A vault that moves backing into another protocol is not direct custody. It must advertise a managed profile with an authenticated position set, liability perimeter, valuation method, liquidity estimate, and update authority.


Let  $G$  be gross recognized value inside a precisely defined perimeter,  $D$  external debt, and  $Q$  other payables. Where pending funds, claim reserves, fees, and excluded storage are included in  $G$ , a possible reconciliation is:

$$A = G - D - Q - F - P - C - R_{\text{valued}}. \quad (14)$$

This is a perimeter-dependent identity, not an instruction to deduct every symbol twice. If net equity is negative, the managed profile must retain the signed deficit and liabilities, mark insolvency, and halt ordinary conversion-based admission. It must not encode a negative backing value into the nonnegative reference kernel or hide debt by merely reporting zero assets. A separately escrowed claim that was excluded from  $G$  is not deducted again. An underlying-denominated lending receivable can be recognized once; its collateral and receipt token must not both be counted as independent backing.

CTVS-1 / MANAGED EXTENSION • OUTSIDE REFERENCE PROFILE 0

### Managed backing is not the same as available liquidity

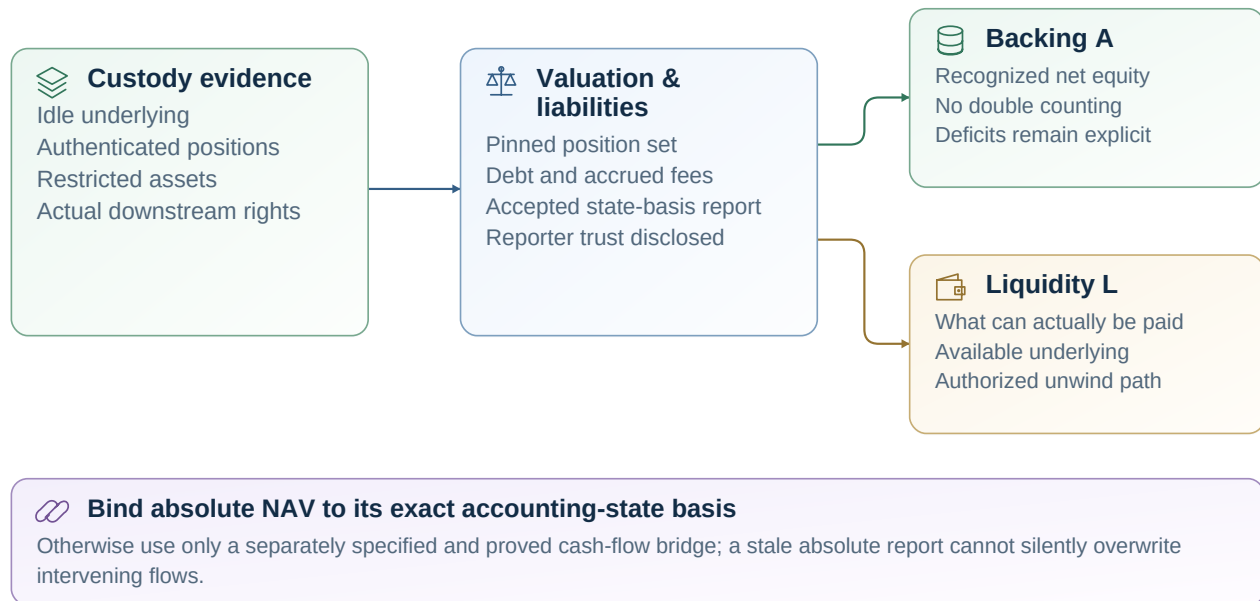

A signature identifies the reporter—it does not establish truthful value.

Positive backing does not guarantee immediate exit. Managed conformance still needs a real integration.

**Figure 7:** Managed accounting adds position, liability, valuation, and liquidity evidence. A signed report identifies an attestation; it does not prove fair value or immediate exit liquidity. This is an extension boundary, not profile-0 behavior.

## 11.2 Valuation and loss

A checkpoint identifies position evidence, valuation currency, accepted report epoch, valuation time, expiry, liabilities, and liquidity constraints. A signature proves who attested; a commitment proves which data were committed. Neither proves economic truth. An attested-NAV profile must explicitly disclose the trusted reporter and any independently enforced bounds.

Reference-only old reports can remain unspent. Freshness therefore requires an authenticated accepted-report head or equivalent sequencing rule, plus validity-interval checks. Settlement cannot choose any historically signed report just because its UTxO exists. CTVS-2 describes immutable batch pricing and committed-epoch extensions.

A loss reduces backing without reducing shareholder units unless the published loss model says otherwise. A vault with positive supply and zero recognized backing is not a new bootstrap vault. The baseline managed extension must halt ordinary conversion-based entry until a separately defined recapitalization or loss procedure is authorized. A lack of immediate liquidity is not automatically zero NAV.

## 11.3 Additional fees: specify the policy, not an incomplete formula

Profile 0's fixed entry/exit markup is the only complete fee algorithm fully specified for the reference candidate. A native implementation charging management, performance or share-denominated fees must specify accrual, capital-flow treatment, rate basis, rounding, crystallization order, dilution or asset payment, high-water-mark/loss treatment where applicable, and replay prevention. Backing, fee liabilities, supply and preview outputs must agree on that same policy.

No illustrative management-fee equation is adopted here. Such a formula without the surrounding timing and ownership rules is not an extension specification. No user flow may be retrospectively charged under new terms it did not authorize. Keep exact tests with the implementation-specific fee definition rather than adding a general fee-module framework.

## 11.4 Exact state-basis binding and managed acceptance

The common requirement is coherent valuation and complete flow reconciliation, not a prescribed oracle. The following exact-state rule is the conservative absolute-report candidate. A native protocol with provably equivalent state-coupled accounting may map that mechanism instead, but it must demonstrate the same prevention of stale valuations erasing or double-counting user flows.

The conservative absolute-NAV candidate **MUST** bind a report to the exact accounting-state reference it values, terms version, and accepted report head/sequence. Its update consumes only that basis state. A report for state s0 at 100 must not overwrite successor s1 at 110 after a ten-asset admission with 100. Reject and revalue, or separately specify and verify a cash-flow reconciliation mechanism. An old unspent signed report is not proof of the latest accepted assertion.

The entire transaction interval must fit the accepted valuation window. Exact state binding can stale reports during concurrent user operations, so its operational cost is a measurement obligation. A signature does not establish fair NAV or eliminate reporter trust.

**The ten-field reference State has no managed extension slot.** Define a distinct exact state/profile for custody/position sets, signed deficits, debt, accepted valuation, liquidity and authorized updates; do not insert these fields into CTVS-WIRE-2 profile 0. Before advertising managed conformance, one pinned permissioned protocol integration must demonstrate admission, allocation, position authentication, valuation, liability recognition, liquidity realization, redemption, and failure/recovery. No requirement forces that protocol to open its batcher set. [SEMANTIC, REGISTER, WIRE]

## 11.5 One concrete invested-vault mapping before adoption claims

Prioritize one actual single-underlying lending or liquidity-management vault rather than designing every strategy. Its mapping must pin the target version and follow admission, position custody, liabilities and accrued fees, valuation, liquid exit capacity, authorized unwind, redemption and failure/recovery. Distinguish the asset-to-share exchange rate from any external reference currency used to value collateral. The kickoff's lending-rate discussion motivates this distinction; its transcript is not an audited formula or current deployment specification. [WG]

The acceptance trace must use the actual permissioned or permissionless rights of that target, include one loss/illiquidity or stale-accounting negative case, and be reconstructed by an independent client. A positive direct-custody fixture or a parameter named managed does not complete this requirement. Until then report managed execution as not evidenced, not as a supported native integration. [REGISTER: REQ-13]

## 12. Formal properties and proof sketches

### 12.1 State and supply induction

**Property S1 — unique live state.** Assume genesis creates one state token, no later branch can mint or burn it, and every accepted state spend recreates exactly one permitted successor containing it. By induction on accepted transitions, there is one live authenticated state. Unspendability and liveness are separate: uniqueness does not guarantee an operator can or will advance it.

**Property S2 — supply conservation.** Assume zero genesis share supply, all nonzero share mint/burn requires a valid accounting-state transition, and that transition verifies its supply delta. Induction gives  $S = N$  at every accepted state. The state validator must also verify gross economic obligations when the net mint is zero.

These arguments depend on compiled policy/validator enforcement. They are not machine-checked proofs of the unimplemented scripts.

### 12.2 Value conservation under each action

For deposit,  $A' + F' = A + F + n + f = A + F + d$ . For redemption,  $A' + F' = A + F - g + f = A + F - w$ . Fee collection subtracts  $F$  from custody and the fee liability together. Reserve top-up affects only reserve ADA. Combined with correct destination allocation, these identities preserve the declared owners of all protected value.

Ledger balance alone does not prove these statements: the validator must enforce the semantic partition and the payment mapping.

### 12.3 Rounding favors the remaining pool

For a deposit admitting  $n$  and issuing  $q = \text{floor}(nY/X)$ , define  $\epsilon = nY - qX \geq 0$ . Then:

$$\frac{X+n}{Y+q} - \frac{X}{Y} = \frac{nY - qX}{Y(Y+q)} \geq 0. \quad (15)$$

For redeeming  $q$  with gross assets  $g = \text{floor}(qX/Y)$ , where successor denominators are positive:

$$\frac{X-g}{Y-q} - \frac{X}{Y} = \frac{qX - gY}{Y(Y-q)} \geq 0. \quad (16)$$

Ceiling-priced mint and withdrawal have analogous inequalities. These are statements about adjusted pricing under the specified transitions, not a promise of positive investment returns. Management losses and valuation changes can decrease price.

## 12.4 Deposit/redeem round trip

At unchanged external valuation, issue  $q \leq nY/X$  for admitted assets  $n$ . An immediate redemption after that deposit returns gross value at most  $n$ , because  $qX \leq nY$  implies  $q(X + n)/(Y + q) \leq n$ . Exit fees can only reduce the net result. Therefore this isolated round trip cannot return more than the original gross deposit under the defined arithmetic and valid states.

The claim excludes strategy P&L, rewards, external subsidies, checkpoint changes, and unrelated portfolio effects. Bounded tests supplement this algebra but do not establish unrelated authorization or ledger properties.

## 12.5 Role separation and observable-data assumptions

Conditional role-safety argument: if genesis establishes the protected STATE identity, every spend first checks that asset at its own resolved input, and STATE-bearing inputs can select only a valid State action, then a Request constructor cannot route genuine state custody into fixed refund. Reject invalid token quantities and unexpected ID-bearing inputs before dispatch. The local boundary tests exercise selected symbolic counterexamples; compiled dispatch remains an essential premise.

Conditional encoding argument: semantic field validation acts on decoded Data. Alternative accepted CBOR spellings that decode to the same Data must have the same field interpretation. The terms commitment is defined over the named serialization of validated Terms, not the original signed transaction spelling. Agreement of local writers does not prove agreement with the Plutus builtin.

These properties supplement, not replace, state/supply induction and rounding proofs. The economic predicates and byte/link predicates are separate programs; no completed proof connects their composition to actual compiled validator acceptance. [WIRE, SEMANTIC]

## 13. Common integration contract and native interpretation

### 13.1 One verifiable integration boundary

A conforming reader resolves one underlying asset, its share asset, authenticated deployment/terms and their economic interpretation at a coherent chain point. A conforming executor additionally constructs and verifies each claimed operation without depending on an opaque provider for its rules. A fixed API transport, vendor, module framework and arbitrary downloadable builder code are not required.

Profile 0 resolves its exact template/build, genesis, ID/STATE/SHARE and Config as specified earlier. A native implementation resolves the objects and guards in its reviewed Section 2.5 mapping. Both must support share-to-vault lookup with verified network and implementation identity. Labels, ticker symbols, a registry listing, descriptor metadata or a self-reported conformance badge are discovery hints, not proof of custody or execution rights.

### 13.2 Required response fields and value states

The following common semantic contract applies regardless of transport. The publication's `integration/response.schema.json` makes the initial snapshot, quote, request and build-effect envelopes machine-checkable; cross-field and ledger-evidence rules below remain mandatory beyond JSON shape validation. Its identifier CTVS-INTEGRATION-0.6 is an off-chain draft schema revision, not an on-chain wire version.

| Response            | Minimum required content                                                                                                                                                                                                                   |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Every response      | Schema identifier; record kind; network identity; chain point; vault ID; implementation binding; claimed conformance; evidence references; verification disposition.                                                                       |
| Snapshot            | Underlying/share IDs; quantities and their units; economic supply and backing; excluded fees; liquidity; status/capabilities; pricing/terms source references.                                                                             |
| Quote or estimate   | Operation and exact amount; fee-inclusive action result or explicit unknown; user bound; snapshot/pricing basis; economic and construction limits; economic fees, execution charge and protected storage separately; expiry/prerequisites. |
| Async request/claim | Origin and current lifecycle; economic participation; protected asset/quantity; terms, controller and both destinations; fixed recovery and delivery rights; settlement/claim evidence and fee/reserve allocation.                         |
| Build effects       | Exact operation and approved bound; inputs/reference inputs, mint/burn, expected outputs/datums, change, fee/collateral exposure, required authority, validity interval and evidence-verifiable effect summary.                            |

Unsigned quantities are decimal strings. Assets use `ada` or explicit policy-ID/asset-name bytes; display symbols and decimals do not change arithmetic. A quantity result is known with a value, or `unknown`, `unsupported`, `stale` or `not_applicable` without a fabricated value. Known zero is not missing data. Native signed deficits, if relevant, must be separately represented by the managed mapping rather than cast into unsigned backing.

Capabilities are operation-specific. Read availability does not imply construction or execution. Each direction reports supported operations, delivery form where `async`, applicable pricing rule, cancellation rights and authority requirements. An unknown required native rule disables execution; a provider may still return an explicitly partial or unsupported read view.

### 13.3 Snapshot, quote and limit invariants

All references must belong to the same verified ledger history and chain point. Identity/terms sources cannot be substituted from a newer incompatible configuration. A direct quote's pricing basis identifies the consumed state evidence or the native equivalent; an async request estimate never silently fixes a future rate. `exact_at_snapshot` means equality under that snapshot's declared calculation, not a reservation or guaranteed inclusion.

Report an economic minimum and maximum separately from a construction limit. A resource-feasible maximum cannot be inferred from Section 6.4's arithmetic search. `paused`, `unavailable_liquidity`, `unsupported`, `unknown` and `requires_fresh_build` are different explanations. Read-only estimates must not report a transaction as ready. Every constructed action still commits the appropriate min-output/max-input bound and intended destinations.

Fees are explicitly classified: protocol-economic fees in assets or shares under the declared algorithm, execution charge, refundable/carry storage, network fee estimate and any externally funded top-up. Their asset units, recipients and point of accrual must reconcile with the action. A quote **MUST NOT** add the same fee to a liability and deduct it again in its net payout.

### 13.4 Realized results, verification and rollback

A quote, an authorized request and an accepted result are separate records. Realized events identify actual transaction and source references, operation, gross and net effects, fees, participating-share delta, assigned outputs and terms/pricing evidence. Internal route-step attribution is optional. Missing per-step data must remain unknown and must not be replaced with predicted values.

Before signing, verify user inputs, amounts, bound, receiver and datum, change, state/native identity, mint/burn, fee/storage partitions, interval and required witnesses, including collateral exposure. A hosted builder is not a trusted signer. Preserve original signed bytes/IDs; do not normalize transaction CBOR and reuse its signature.

Rollback reverses both status and quantities. An orphaned settlement loses its realized output/claim attribution; a request is pending only if it exists on the replacement chain. Reversing delivery alone restores the unspent claim. Pending deposits, locked participating redemption shares, issued shares awaiting delivery and fixed asset claims must remain separate so wallets cannot double-count them. These are reconstruction requirements, not a mandatory event-DAG format.

### 13.5 Implementation binding and the integration acceptance test

implementation identifies either profile 0's exact reference binding or a native implementation's mapping ID, mapping version, mapping commitment and source references. Every independently decoded field must trace to that binding. The hash algorithm, domain and exact bytes covered by a mapping commitment must be documented by the mapping; merely hashing an arbitrary provider response is not authentication. No universal mapping registry or code runtime is introduced.

An independent builder must derive the same permitted effect from the public mapping, not call the first builder's opaque construction service. A separately implemented decoder/indexer must agree on native bytes, economic field meanings, each supported operation and real rollback. A schema-valid illustrative response is not that acceptance test. The included response fixtures exercise publication shape only; no native protocol is declared conformant by this revision.

## 14. Resource limits, operational behavior, and risks

Minimum ADA depends on the actual serialized output and protocol parameters. CIP-55 gives the Babbage-era expression  $(160 + \text{byteLength}(\text{serializedOutput})) \text{ coinsPerUTxOByte}$ . Implementations must use the active ledger-era calculation and parameter snapshot, not the numerical reserves in this paper. [6]

Measure datum sizes, worst-case integer serialization, asset names, inline recipient datums, reference inputs, witnesses, execution units, and transaction size. Bound every list and arbitrary datum field. Reference scripts improve witness reuse but require availability monitoring; their output references are hints that may become stale.

| Risk                   | Required interpretation or control                                             |
|------------------------|--------------------------------------------------------------------------------|
| State contention       | Rebuild against authenticated successor; do not weaken signed bounds.          |
| Donation/spoofed UTxO  | Count only authenticated state and permitted accounting transitions.           |
| Dust/residual rounding | Reject zero-output execution; disclose immutable residual policy.              |
| False managed NAV      | Disclose reporter trust and independent checks; do not call it direct custody. |
| Output reuse           | Complete allocation plus the enforced composition profile.                     |
| Authority failure      | Distinguish pause rights, asset movement, valuation, and execution roles.      |
| Provider inconsistency | One-chain-point snapshots; independent decoding and rollback.                  |
| Protocol changes       | Recompute budgets and reserves; do not change economic terms silently.         |

No throughput, cost, yield, or unconditional exit guarantee is made. The reference profile favors a small validation surface over unrestricted atomic composition. That tradeoff must be visible to integrators.

### 14.1 Reference bounds are not universal or measured capacities

The representative candidate fixture datums are Config 333 bytes, State 92, Request 310 and Claim 311. These are neither worst-case encodings nor complete outputs, and they do not establish minimum ADA or execution cost. Use the active ledger's serialized-output calculation. A top-up can itself increase encoded size; rebalance and recompute until the complete output/transaction meets its actual constraints. Config remains referenced rather than rewritten; a valid state reserve-top-up may recreate state when necessary. [WIRE-EVID, MINADA]

Measure all permitted action paths, reference witnesses, worst-case credential/data shapes, quantity growth, batch lists, required keys, collateral and collateral return. Prefer central batch economics plus explicit per-request linkage, but benchmark the actual handlers: repeated full-list scans may multiply cost. Structural cap 16 is not promised throughput.

Profile-0 restrictions are deliberate interoperability limits: no foreign script-input composition, no pointer/bootstrap destination, no datum-hash destination, no protected attached reference script, and no script controller. A later profile can revise them only with explicit semantics, versioning and evidence. No capability or managed support follows from naming an extension. [WIRE]

## 15. Validation and release requirements

### 15.1 Acceptance matrix

This is the concrete reference-profile acceptance matrix. A native implementation must prove the corresponding common obligations through its Section 2 mapping, not reproduce the reference factory or every reference-local mechanism. The script-controlled and managed integration targets have additional requirements in Sections 7.5 and 11.5. Evidence for one construction cannot be transferred by analogy to another.

| ID   | Requirement                                  | Required evidence                                                    |
|------|----------------------------------------------|----------------------------------------------------------------------|
| S-01 | Authenticated genesis and unique identity    | Compiled genesis vectors; duplicate/extra mint rejection             |
| S-02 | Immutable terms and correct state succession | Valid/invalid contexts for every state branch                        |
| S-03 | Economic and native supply agree             | Mint, burn, alternate-burn, and zero-net cases                       |
| S-04 | Closed ADA/native-token value partitions     | Conservation tests with fees, reserves, and top-ups                  |
| S-05 | Exact integer quotes and bounds              | Independent mathematical vectors and edge states                     |
| S-06 | Complete payment attribution                 | Same-destination, reused-index, and cross-vault rejection            |
| S-07 | Correct authority execution                  | Actual key witnesses; capability proofs for any advertised extension |
| S-08 | Explicit residual and insolvency behavior    | Bootstrap/residual cycles and loss-profile tests                     |
| S-09 | Native schema interoperability               | Golden CBOR; at least two independent decoders                       |
| S-10 | Reproducible transaction construction        | Independent builders and ledger-valid transactions                   |
| S-11 | Bounded resource usage                       | Measured bytes, CPU/memory, fees, and reserves                       |
| S-12 | Reliable infrastructure views                | State lineage, coherent snapshots, and rollback replay               |

### 15.2 Recorded evidence and this revision's checks

Both papers refer to one shared evidence record in docs/CTVS-Validation-Evidence.md; the historical results are not new runs and are not additive across the papers. They cover bounded economic/semantic checks and separate candidate-codec/link checks, not a complete compiled validator. Tests and models share an author; two languages do not establish independent review. [EVIDENCE]

Revision 0.6 additionally checks byte-for-byte preservation of the four candidate-wire files; unchanged reference fee/conversion examples; the budget reparameterization and direct-delivery value substitution; required response examples and deliberately invalid schema fixtures; document references and rendered layout. Arithmetic/source/schema results are in checks/revision-results.json; render/preflight results are in checks/pdf-qa.json. These are publication/schema/arithmetic checks, not native-protocol, ledger, resource or security-certification evidence. No newly proposed native delivery or script-controller mapping is recorded as implemented.

Every compiled-validator and ledger gate remains blocked. The exact old result counts and recorded provenance are consolidated once rather than repeated here. Request/claim/direct effects still need a jointly enforced implementation, and authentic initial identities remain premises until compiled genesis is demonstrated.

### 15.3 Required model-to-validator refinement

Let  $\alpha(T)$  project a real transaction and its resolved ledger context into the specified semantics. The soundness target is:

$$\begin{aligned} & \text{LedgerPrerequisites}(T) \\ & \wedge \text{CompiledValidatorsAccept}(T) \\ & \implies \text{CTVSRequirements}(\alpha(T)). \end{aligned} \tag{17}$$

Define every projection: own script purpose, ordinary versus reference inputs, credential nesting, actual datum variants, required signatories, mint, auxiliary era fields, time bounds, source references and output indices. Decoding bytes and passing amounts into the semantic model by hand is not that refinement proof.

Constructive success is also required: each advertised supported operation has a valid, resource-feasible, ledger-accepted transaction with the intended effect. Reject-everything scripts are not conforming. Negative cases must fail for the intended semantic reason; phase-1-invalid witnesses must not mask missing phase-2 payout checks.

### 15.4 Compiled end-to-end acceptance trace

The trace below validates the specified **reference construction**. A native mapping supplies its own equally explicit deployment, operation and recovery trace under its actual scripts and custody assumptions; it is not required to deploy `F_lock` or `Q_claim`.

```
authenticated F_lock / Q_claim / per-vault T build and genesis
-> direct deposit with exact State/Config/Terms
-> independent deposit and redemption Request(Recovery,Data)
-> purpose-bound permissioned Batch, including zero-net mint
-> funded Claim creation and fixed delivery to key/script destinations
-> cancellation/expiry with invalid economics and batcher unavailable
-> fee collection and state-reserve top-up
-> independent construction, authentic lineage and rollback replay
```

Run the same trace against malformed encodings, equivalent Data encodings, wrong-role datums, substituted config, wrong-branch acknowledgments, omitted/duplicate requests, output reuse, balanced theft, stale references and forbidden auxiliary actions. Confirm the pinned builtin's commitment bytes and actual ledger datum/hash behavior. Record full transaction bytes, outputs, witnesses, fees, collateral/return, minimum ADA and CPU/memory under a named protocol-parameter snapshot.

The baseline recorded in the repository is Aiken v1.1.22, standard library v3.1.0 and Plutus V3. This identifies the intended baseline, not the latest tooling or a successful compilation. Pin the ledger implementation and network parameters as well. [SEMANTIC, TX]

### 15.5 Profile-specific and independent-integration gates

A managed-profile claim additionally requires a concrete permissioned position lifecycle with exact custody, liabilities, accepted NAV basis, liquidity realization and real recovery permissions. A script-controller claim requires actual guard/purpose/domain and successor tests. Neither follows from direct-custody or key-only evidence.

A second builder must construct from authenticated public data without calling the first builder's construction implementation. Separate decoder expectations and a separate indexer must agree on transactions, exact fields, origin attribution and rollback. Two wrappers around one library or two codecs by the same author are not independent external validation.

The shared evidence register records local evidence without clearing any compiled-validator or ledger gate. The reference wire remains a candidate. Publishing this document does not update GitHub, deploy a contract, or certify production security.

## 16. References

The v0.5 source basis is retained. ERC-4626, ERC-7540 and CIP-57 were rechecked on 11 September 2026 for their interface context; no fresh contract or deployed-protocol audit was performed. New scope, mapping and delivery requirements are CTVS proposals, not claims of SundaeSwap conformance. Repository references R1–R3 are pinned to the reviewed revision. External protocol documentation describes published designs and is not a certification of deployed instances. The equations, proposed profiles, worked examples, and proof sketches in this paper are the proposed CTVS design unless explicitly attributed otherwise.

[R1] Steer Protocol. Cardano Tokenized Vault Standard, reviewed repository. <https://github.com/SteerProtocol/cardano-tokenized-vault-standard/tree/f5f782de9ba6a7bf6cbb8213995a31734888559c>

[R2] CTVS architecture-hardening review, 8 September 2026. User-provided planning artifact, CTVS-architecture-and-validation-review.md.

[R3] Steer Protocol. Proposed wire format and accounting kernel, `lib/ctvs/wire.ak` and `lib/ctvs/math.ak`, revision identified in R1.

[1] ERC-4626: Tokenized Vaults. <https://eips.ethereum.org/EIPS/eip-4626>

[2] ERC-7540: Asynchronous ERC-4626 Tokenized Vaults. <https://eips.ethereum.org/EIPS/eip-7540>

[3] Cardano CIP-31: Reference inputs. <https://cips.cardano.org/cip/CIP-0031>

[4] Cardano CIP-32: Inline datums. <https://cips.cardano.org/cip/CIP-0032>

[5] Cardano CIP-33: Reference scripts. <https://cips.cardano.org/cip/CIP-0033>

[6] Cardano CIP-55: Protocol Parameters (Babbage Era). <https://cips.cardano.org/cip/CIP-0055>

[7] Cardano CIP-57: Plutus Contract Blueprint. <https://cips.cardano.org/cip/CIP-0057>

[8] Cardano CIP-19: Cardano Addresses. <https://cips.cardano.org/cip/CIP-0019>

[9] Cardano CIP-40: Collateral Output. <https://cips.cardano.org/cip/CIP-0040>

[10] SundaeSwap. Published contract architecture. <https://github.com/SundaeSwap-finance/sundae-contracts>

[11] Minswap. AMM V2 specification. <https://github.com/minswap/minswap-dex-v2/blob/main/amm-v2-docs/amm-v2-specs.md>

[12] OpenZeppelin. ERC-4626 documentation. <https://docs.openzeppelin.com/contracts/5.x/erc4626>

[13] Cardano CIP-30: Cardano dApp-Wallet Web Bridge. <https://cips.cardano.org/cip/CIP-0030>

[PRIOR1] CTVS-1, revision 0.3, supplied main whitepaper, 9 September 2026.

[PRIOR2] CTVS-2, revision 0.3, supplied main whitepaper, 9 September 2026.

[SEMANTIC] CTVS semantic transaction model and economic review. Scope, findings, and limitations are summarized in `docs/CTVS-Validation-Evidence.md`. Recorded baseline: 8 September 2026.

[SEMANTIC-EVID] CTVS semantic verification evidence. `evidence/semantic-results.json` and the accompanying validation-evidence summary. Bounded symbolic/economic results; not compiled-validator or ledger evidence.

[REGISTER] CTVS implementation assurance requirements, REQ-01 through REQ-14. `docs/CTVS-Validation-Evidence.md` and `evidence/assurance-register.json` retain a BLOCKED disposition for every implementation gate.

[WIRE] CTVS wire-format and eUTxO specification, candidate CTVS-WIRE-2. Recursive layouts and transaction obligations are integrated in CTVS-1 Section 10 and CTVS-2 Section 12; supporting evidence is summarized in `docs/CTVS-Validation-Evidence.md`.

[WIRE-DATA] CTVS-WIRE-2 candidate artifacts: `candidate-wire/schema.json`, `wire.cddl`, `golden.json`, and `types.ak`. Type declarations are uncompiled; candidate bytes have not been certified against the Plutus builtin.

[WIRE-EVID] CTVS wire-format verification evidence, `evidence/wire-results.json`. Local codec/schema and selected boundary checks; not a complete economic validator. Scope and counts are recorded in the accompanying evidence summary.

[CIP31] Cardano CIP-31, Reference Inputs. <https://cips.cardano.org/cip/CIP-0031>

[CIP32] Cardano CIP-32, Inline Datums. <https://cips.cardano.org/cip/CIP-0032>

[TX] Aiken standard library v3.1.0, `cardano/transaction.ak`. Recorded blob `12f8ec80fdfe6c9976d63f3bb701f4fd525d3ec3`. <https://github.com/aiken-lang/stdlib/blob/v3.1.0/lib/cardano/transaction.ak>

[ADDR] Aiken standard library v3.1.0, `cardano/address.ak`. Recorded blob `0167b90fbbd4ad063db2725c44023f8d0bab42d6`. <https://github.com/aiken-lang/stdlib/blob/v3.1.0/lib/cardano/address.ak>

[SER] Cardano CIP-42, `serialiseData`. <https://cips.cardano.org/cip/CIP-0042>

[PLUTUS] IntersectMBO Plutus, `PlutusCore/Data.hs`. Recorded source blob: `a994354fb3c87a55ed6d1b4b6b544c7cd94c1c60`. <https://github.com/IntersectMBO/plutus/blob/master/plutus-core/plutus-core/src/PlutusCore/Data.hs>

[MINADA] Cardano CIP-55, Protocol Parameters (Babbage Era). <https://cips.cardano.org/cip/CIP-0055>

[BLUEPRINT] Cardano CIP-57, Plutus Contract Blueprint. <https://cips.cardano.org/cip/CIP-0057>

[VALIDATOR] Aiken, Validators. <https://aiken-lang.org/language-tour/validators>

[PATTERNS] Aiken, Common Design Patterns. <https://aiken-lang.org/fundamentals/common-design-patterns>

[BASE05] CTVS-1 and CTVS-2 revision 0.5, 9 September 2026, and the accompanying public source bundle. Direct editorial/technical baseline for this revision.

[WG] Cardano Vault Standard Working Group Kickoff, supplied transcript. In particular the opening discussion of avoiding unnecessary contract changes; the lending share-rate discussion; and the native-order/datum and controller discussion. Meeting statements are design input, not verified deployed behavior.

[REV06] Agreed scope review in the project conversation and docs/CTVS-v0.6-Change-Map.md. New recommendations are incorporated as expressly scoped proposal changes.

[REV-CHECKS] Revision 0.6 publication/arithmetic/schema checks, checks/verify\_revision.py and checks/revision-results.json. Not compiled-validator or ledger evidence.

[EVIDENCE] Shared docs/CTVS-Validation-Evidence.md and recorded evidence/ artifacts. Carries historical results with their original limitations and records this revision's separate checks.

## Appendix A. Revision boundary and delivery checklist

| Decision from the scope review                           | Result in revision 0.6                                                        |
|----------------------------------------------------------|-------------------------------------------------------------------------------|
| Preserve exact UTxO/datum hardening                      | Profile-0 reference construction and all candidate-wire files retained        |
| Stop treating one construction as universal              | Common guarantees separated; native-format conformance now explicit           |
| Avoid new transcript/module/permission frameworks        | None required by this revision                                                |
| Keep economic supply and user-bound mathematics          | Retained; native inventory/fee rules require precise mappings                 |
| Support script-controlled protocol users                 | Concrete acceptance target, not a fictitious key-only success claim           |
| Avoid mandatory intermediate claim for every native flow | Bounded direct-at-settlement semantic variant added outside profile 0         |
| Consider budget simplification                           | Algebra checked; existing fields preserved, no silent wire change             |
| Trim unfinished features and duplicated evidence         | Epoch/partial-fill workflow algorithms deferred; evidence consolidated once   |
| Make invested-vault support substantive                  | One pinned managed integration is an explicit unresolved acceptance milestone |

The source bundle includes both revised Markdown papers, the unchanged reference candidate files, common response schema and examples, a revision change map, the shared evidence record, new publication checks and the PDF build tooling. `python build_pdfs.py` typesets PDFs; `python checks/verify_revision.py` runs the stated local publication/arithmetic/schema checks. Neither compiles a contract or accepts a ledger transaction. Final publication QA must inspect rendered equations, tables, headings, cross-references and links.

Document revision 0.6 does not assign an on-chain profile to a native mapping or to `delivery_at_settlement`. The reference remains CTVS-WIRE-2, wire integer 2, profile 0, with identical committed bytes. Conformance claims must name the actual implementation, supported operation and evidence; a document version alone certifies none of them.

# CTVS-2

## Asynchronous Requests, Settlement, and Claims

Independent requests, purpose-bound settlement, and immutable full-value recovery.

### Revision 0.6.3

Illustrated review edition / 16 September 2026

Prepared for Steer Protocol and ecosystem review.

Companion: CTVS-1, illustrated revision 0.6.3.

#### Publication and evidence status

Technical figures are embedded at the relevant sections. The semantic baseline remains revision 0.6, and CTVS-WIRE-2, wire integer 2, profile 0, remains unchanged.

**Implementation release remains blocked.** Local models and codec checks are not compiled-validator, ledger-execution, independent-review, or production-security evidence.

Illustration revision 0.6.3. A proposed standard, not an adopted CIP or frozen deployed interface.

#### **BASELINE REPOSITORY COMMIT**

f5f782de9ba6a7bf6cbb8213995a31734888559c

## Abstract

A vault operation is asynchronous when the user's commitment, the economic exchange, and delivery cannot or should not occur in one transaction. Cardano also permits independent request UTxOs to be submitted without spending a shared accounting state, allowing a later transaction to settle a selected batch. These two motivations—economic delay and submission concurrency—are related but not identical.

CTVS-2 defines common full-fill request ownership and settlement obligations over the CTVS economic boundary. In the specified refundable-escrow semantics, a pending deposit remains nonparticipating until settlement; a pending redemption retains participating shares until economic extinction. The unchanged reference profile creates a fully funded claim. A separately specified native delivery-at-settlement variant pays the final receiver atomically instead. Both admit or extinguish shares once at settlement; later funded-claim delivery never reprices or changes supply. All authorization, accounting, user-bound and output obligations require real on-chain enforcement; present evidence is local and partial.

Settlement may be permissioned. The standard does not require an incumbent protocol to open its scooper or batcher set. It instead separates operator eligibility from custody safety, valuation trust, cancellation rights, and delivery availability. The conservative profile permits refundable pending escrow, one pre-settlement pricing snapshot per batch, fully funded claim outputs, and no partial fills or pre-pricing downstream deployment.

This paper formalizes the lifecycle, batch equations, controller authorization, deadline behavior, request and claim schemas, and infrastructure reconstruction. Worked examples reconcile underlying assets, native shares, and ADA across request creation, mixed-batch settlement, cancellation, and delivery. Direct delivery has an explicit bounded semantic design outside profile 0. Managed accounting, inventory, epochs and in-flight behavior require their own reviewed implementations; optional names do not imply readiness. Speculative algorithms are deferred rather than presented as part of the initial interface.

Exact Request/Recovery/Claim records and purpose-bound redeemers remain in this paper for profile 0; shared primitive encoding is defined once in CTVS-1 Section 10. Native formats use CTVS-1 Section 2.5's authenticated mapping, not a universal new order datum. Full-value recovery, claim independence, exact pricing and complete allocation are retained.

## Semantic baseline revision 0.6: common guarantees, explicit implementations

This revision implements the agreed scope review of both v0.5 papers. It distinguishes **common economic and integration requirements** from the **fully specified reference construction**, defines a bounded route for native-format conformance, and adds a semantic direct-at-settlement delivery variant. It does not add a universal transcript language, module framework, permission language, routing engine, or hosted adapter runtime. [REV06]

| Identifier or decision         | Revision 0.6 disposition                                                                  |
|--------------------------------|-------------------------------------------------------------------------------------------|
| Document                       | Public-review revision 0.6, 11 September 2026; supersedes v0.5 for review                 |
| Existing reference wire        | CTVS-WIRE-2; magic CTVS, integer 2, profile 0; unchanged                                  |
| Reference schemas and fixtures | Exact files retained byte-for-byte from the v0.5 source bundle                            |
| Native integration             | Explicit semantic mapping and evidence required; no native implementation certified here  |
| Direct-at-settlement delivery  | Specified semantic variant outside profile 0; no new wire tag or assigned profile integer |
| Budget fields                  | Existing storage, budget and exact-fee fields retained; no silent simplification          |

**Compatibility.** This is a substantive clarification of conformance and an addition to the semantic design, not an editorial-only relabeling. It does not reinterpret profile 0, permit a different spend of its existing Requests, change its constructors, or change its terms-commitment bytes. A native implementation or a future reference-wire variant must bind its own reviewed version and execution rules. Never change a datum field or action under an old profile merely because a new PDF names a capability.

**Implementation release remains blocked.** Historical economic and codec results are carried forward, not rerun or promoted. This revision checks source/encoding preservation, mathematical examples, document cross-references, response examples and rendered publication layout. It adds no compiled validator, cryptographic witness check, real ledger transaction, measured execution limit or deployed protocol integration. Full historical counts and the shared REQ-01–REQ-14 register now live once in docs/CTVS-Validation-Evidence.md and evidence/, rather than being duplicated in both papers. [EVIDENCE]

The kickoff participants preferred retaining native contracts and datums where feasible. That is design input, not certification of any described protocol. New conformance and delivery language below is the CTVS proposal adopted for this revision; it must not be attributed to a verified SundaeSwap implementation. [WG, REV06]

## Illustration revision 0.6.3: figure index and reading key

This illustration-only refresh replaces the eleven remaining earlier-style figures. It retains the four approved images from the previous refresh and leaves the revision-0.6 semantic text, equations, exact reference encoding and commitment bytes unchanged. Illustration revision is not an on-chain wire version or a new validation result.

The replacement figures use a shared spacing grid, thin uniform outlines, restrained line icons and soft blue, violet, green and sand cards. Labels and captions identify the applicable profile. Colour supports grouping; it does not establish authority, success, or a new protocol rule. Arrows identify the relationship named in the figure, not the provenance of individual fungible coins. Dashed treatment marks the locally stated alternative or unsupported path.

Eleven replacements are vector SVG/PDF illustrations with selectable text; the four retained approved figures are image-based. The source package identifies each format and provides the actual artwork used in the build. Logical Mermaid sources are reference outlines, not an alternate production renderer.

| Figure                                       | Placement    | Primary question                                               |
|----------------------------------------------|--------------|----------------------------------------------------------------|
| 1. Request lifecycle and economic cutover    | Section 3.3  | When do backing, supply, and ownership change?                 |
| 2. Independent request and recovery envelope | Section 4.2  | What is created without consuming State?                       |
| 3. Two-way acknowledgment and coverage       | Section 6.3  | How do State and every Request prove the same batch?           |
| 4. Mixed snapshot settlement anatomy         | Section 6.4  | What does a complete batch consume, compute, and create?       |
| 5. Funded claim versus direct delivery       | Section 7.4  | How do the two settlement dispositions differ?                 |
| 6. Recovery independent of settlement        | Section 8.1  | How can unsupported economics remain refundable?               |
| 7. Zero net mint with gross obligations      | Section 9.10 | Why does zero mint not eliminate validation?                   |
| 8. Accepted in-flight boundary               | Section 10.3 | Why can deployed assets no longer be called refundable escrow? |

The diagrams explain the written requirements. They add no compiled-validator, ledger-acceptance, resource, managed-integration or independent-review evidence. The existing implementation release gates remain blocked.

# Contents

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| <b>Abstract</b>                                                                    | <b>2</b>  |
| <b>Semantic baseline revision 0.6: common guarantees, explicit implementations</b> | <b>3</b>  |
| <b>Illustration revision 0.6.3: figure index and reading key</b>                   | <b>4</b>  |
| <b>1. Motivation and relationship to CTVS-1</b>                                    | <b>6</b>  |
| <b>2. Actors, authority, and the reference profile</b>                             | <b>7</b>  |
| <b>3. Ownership and the request lifecycle</b>                                      | <b>9</b>  |
| <b>4. Request UTxOs and controller authorization</b>                               | <b>12</b> |
| <b>5. Batch pricing and accounting</b>                                             | <b>14</b> |
| <b>6. Settlement validation and payment allocation</b>                             | <b>16</b> |
| <b>7. Settlement delivery: funded claims and a bounded native variant</b>          | <b>19</b> |
| <b>8. Cancellation, deadlines, and pause behavior</b>                              | <b>22</b> |
| <b>9. Worked UTxO transactions and datum representations</b>                       | <b>24</b> |
| <b>10. Managed NAV, protocol adapters, and in-flight exposure</b>                  | <b>28</b> |
| <b>11. Deferred features and bounded compatibility</b>                             | <b>30</b> |
| <b>12. Wire schema and infrastructure interface</b>                                | <b>31</b> |
| <b>13. Formal properties and proof sketches</b>                                    | <b>34</b> |
| <b>14. Economics, scalability, and risk disclosure</b>                             | <b>36</b> |
| <b>15. Validation and release requirements</b>                                     | <b>37</b> |
| <b>16. References</b>                                                              | <b>39</b> |
| <b>Appendix A. Revision boundary and delivery checklist</b>                        | <b>41</b> |

# 1. Motivation and relationship to CTVS-1

## 1.1 Two distinct reasons for asynchrony

First, a transaction consuming one accounting state cannot coexist with another transaction consuming the same output. Independent request creation can remove that contention from user submission, even when settlement itself is immediate once selected. Second, a vault may need liquidity realization, a valuation checkpoint, or an authorized downstream action before an economic exchange is possible. An order queue solves the first issue; it does not automatically solve the second.

CTVS-2 gives both cases an explicit boundary without standardizing a universal strategy workflow. A wallet can commit bounded funds, inspect their ownership state, see the relevant execution permissions, and determine whether cancellation or claim delivery is possible.

ERC-7540 provides request/claimable/claimed concepts and allows deposit and redemption asynchrony independently. It does not require one particular timing of economic participation for every implementation. CTVS-2 specifies that timing for its reference profile. Its out-reference identity, cancellation rules, and fixed-destination delivery are Cardano-specific choices, not a claim of literal ERC-7540 compatibility. [1]

## 1.2 Shared kernel, separate execution

Common semantics and the profile-0 mechanism are distinct. The comparison below describes the unchanged reference transaction path. A native-format mapping may implement the new Section 7.4 direct-at-settlement variant, but cannot label it as profile 0 or reinterpret a profile-0 Request. No universal execution transcript, routing system or permission language is required.

CTVS-1 defines backing  $A$ , economic supply  $S$ , accrued asset fees  $F$ , reserve  $R$ , adjusted balances  $X = A + V_a$  and  $Y = S + V_s$ , and action-specific integer quotes. CTVS-2 reuses them. An asynchronous-only direction needs the shared accounting semantics, not an enabled direct user operation.

| Concept               | CTVS-1 direct execution                      | CTVS-2 execution                                   |
|-----------------------|----------------------------------------------|----------------------------------------------------|
| User commitment       | Signed accounting transaction                | Funded request UTxO                                |
| Economic exchange     | Direct state transition                      | Validated settlement state transition              |
| Price                 | Consumed state                               | Declared settlement pricing profile                |
| Delivery              | Required direct output                       | Fully funded claim, then independent delivery      |
| Submission contention | Accounting state consumed                    | Request creation does not consume accounting state |
| Recovery              | Failed action leaves ordinary inputs unspent | Pending cancellation or funded-claim delivery      |

An indication of “pending” must therefore say whose property is locked and whether it participates in share P&L. It cannot be a generic progress label hiding different rights.

## 2. Actors, authority, and the reference profile

### 2.1 Independent roles

| Role               | Power                                                     | Not implied by that power                          |
|--------------------|-----------------------------------------------------------|----------------------------------------------------|
| Funding owner      | Authorizes funds used to create a request                 | Authority over other holders' shares               |
| Controller         | Cancels a pending request under its terms                 | Ability to reprice a funded claim                  |
| Receiver           | Receives the fixed successful output                      | Authority to rewrite the request                   |
| Settler / batcher  | Constructs an eligible settlement transaction             | Arbitrary NAV, destination, fee, or supply changes |
| NAV authority      | Provides valuation under an advertised accounting profile | Custody rights or execution membership             |
| Strategy manager   | Acts on permitted investments                             | Authority to move refundable pending funds         |
| Pauser             | Suspends specified economic transitions                   | Cancellation of already funded claims              |
| Delivery submitter | Pays to deliver a funded claim                            | Right to take its assets or reserve                |

A role may be held by a key, multisig, script, or organization. The standard defines the proof and the permitted transition, not the operator's corporate or governance form.

### 2.2 Permissioned settlement is conforming

A deployment **MUST** disclose whether settlement is open-key or authorized-key-set in profile 0; capability-authorized or governed execution requires a separately specified extension. Permissioned scoopers and batchers are not required to become permissionless. Published SundaeSwap and Minswap designs demonstrate authorized execution and script-owned orders as relevant Cardano patterns. [5, 6]

Authorization is one necessary predicate. A permitted settler still must satisfy every user limit, receiver condition, value equation, and supply rule. Membership does not establish correct valuation. Where the same entity also signs NAV or manages assets, the combined powers must be disclosed.

### 2.3 Candidate reference profile

**Normative scope.** The concrete choices below remain exact for reference profile 0. A native implementation qualifies through the common mapping and operation requirements of CTVS-1 Section 2.5 plus the applicable CTVS-2 lifecycle rules. It may not claim refundable-escrow or funded-claim guarantees it does not enforce.

The CTVS-WIRE-2 profile-0 asynchronous component, descriptively ASYNC-FULL-SNAPSHOT-CLAIM, adds the following choices to the CTVS direct-custody reference kernel:

| Axis              | Reference decision                                               |
|-------------------|------------------------------------------------------------------|
| Request types     | Exact gross-asset deposit; exact-share redemption                |
| Fill behavior     | Full only; no partial consumption or remainder request           |
| Pricing           | One authenticated pre-settlement state for all included requests |
| Economic boundary | Shares issue/extinguish at settlement                            |

| Axis                  | Reference decision                                                             |
|-----------------------|--------------------------------------------------------------------------------|
| Pending cancellation  | Controller-authorized at any time; fixed refund after expiry by anyone         |
| Delivery              | Separate fully funded claim; anyone may submit its fixed-destination delivery  |
| Settlement membership | Immutable open-signing-key or sorted authorized-key-set rule                   |
| Fees                  | Per-request economic rounding; exact fixed settlement fee within funded budget |
| Success storage       | Carried with unused budget to the declared economic receiver                   |
| Composition           | One vault settlement with a closed, validated script-input family              |
| In-flight investment  | Not permitted before deposit admission or before redemption funding            |

The profile preserves a separate claim stage. Direct delivery is an optional CTVS extension, not an assumed substitute for ERC-7540's mandatory claim flow. The reference fixed-destination delivery may be submitted by a third party, but cannot redirect property. [1]

## 2.4 Exact key-set policy and mode binding

The shared Terms profile is integer 0, using the same authenticated Config and ten-field State as CTVS-1. Async entry is mode bit 4 and async exit is bit 8; capability disclosure does not enable a disabled bit. Unknown profile/mode bits are not ignored. Full fill, consumed-state pricing, funded claims, and carry-to-receiver storage are profile rules rather than caller-selectable strings.

$\text{SettlerPolicy} = C(0, [])$  permits any explicitly signing reward key.  $C(1, [\text{keys}])$  requires a sorted, unique list of 1..16 permitted key hashes. The chosen Batch reward key must be an explicit required signatory and, in KeySet, a member. Ledger witness validation is separate from the script-visible membership test. Zero fees require no reward output; positive aggregate fees require one distinct output to that key's enterprise address with NoDatum, no reference script, ADA only, and at least the exact aggregate fee. Any extra minimum-output top-up is external, not a higher request charge. [WIRE, TX]

Neither the semantic model nor the wire-format checks execute a script-controller capability. Sending to a script destination and creating requests from a protocol's own inputs do not prove later native script authorization. These are separate integration claims.

## 2.5 Native async conformance and consent


A native mapping must identify the actual request commitment, cancellation authority, terms, receiver/refund destinations, protected value, pricing basis, economic participation, exact settlement fee and final-delivery form. Shared native inputs require an authenticated allocation of each user's property; mapping one aggregate input to several full-value claims is invalid. Profile 0 retains its stronger, simpler rule of one exact request and one whole-value refund per source output.

A direct-delivery request must commit that outcome, either in immutable request terms or a verified native operation whose signed meaning makes it unambiguous. An executor cannot replace a promised funded claim with a direct payment, or the reverse, based solely on its own preference. Native cancellation and delivery rights must match the claimed CTVS semantics; otherwise expose only the actual read-only position and list the missing execution guarantees.

As a priority acceptance case, use one real script-controlled treasury/portfolio: fund the request under its actual guard, enforce successful return to its committed destination, and permit only its actual supported fixed cancellation. Sending an output to a script does not execute that guard. Key-only profile 0 remains unchanged; no actual script-controller integration is certified here.

### 3. Ownership and the request lifecycle

#### 3.1 State machine

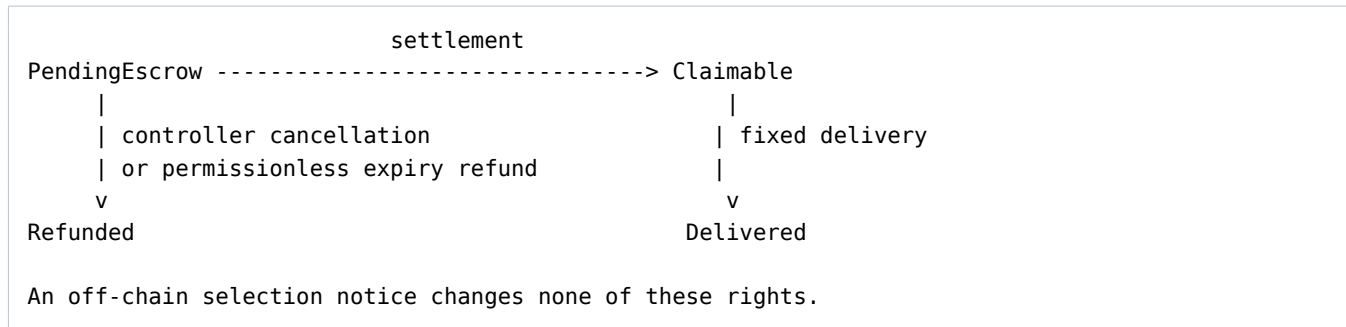

The chain’s consumption of the request is the commitment point. The words “selected,” “scheduled,” or “batcher accepted” are provider observations unless a separately defined on-chain transition has occurred.

**Native direct-delivery alternative.** Section 7.4 permits PendingEscrow -> Delivered through one validated settlement transaction. The ownership cutover and all gross economic obligations are the same; no intermediate Claimable record is emitted. The diagram above remains the reference profile-0 lifecycle. An unfunded or accepted-in-flight position does not fit either path until its separately specified rights are satisfied.

#### 3.2 Deposit ownership

While pending, the offered assets belong to the request’s contractual refund/settlement entitlement. They are not share backing and earn no vault share P&L. Settlement admits the net assets and issues shares into a fully funded claim. Those shares participate immediately, even when unclaimed. Delivery later moves already issued shares to the fixed receiver.


| Deposit stage | Backing <i>A</i>                 | Supply <i>S</i>            | User’s property                                  |
|---------------|----------------------------------|----------------------------|--------------------------------------------------|
| Pending       | Unchanged                        | Unchanged                  | Bounded, refundable asset escrow                 |
| Claimable     | Increased by admitted net assets | Increased by issued shares | Fixed share quantity, participating in vault P&L |
| Delivered     | No delivery-related change       | No delivery-related change | Those shares at receiver destination             |
| Refunded      | Unchanged                        | Unchanged                  | Original offered assets and refundable ADA       |

### 3.3 Redemption ownership

A pending redemption locks existing shares. It does not burn them or remove them from participating supply. Settlement determines gross asset value, extinguishes the shares, accrues any exit fee, and moves the net asset payout into a funded claim. That asset claim no longer participates in vault-share P&L.

| Redemption stage | Backing $A$                      | Supply $S$                     | User's property                      |
|------------------|----------------------------------|--------------------------------|--------------------------------------|
| Pending          | Unchanged                        | Unchanged                      | Locked participating shares          |
| Claimable        | Reduced by gross redeemed assets | Reduced by extinguished shares | Fixed underlying-asset claim         |
| Delivered        | No delivery-related change       | No delivery-related change     | Those assets at receiver destination |
| Refunded         | Unchanged                        | Unchanged                      | Original shares and refundable ADA   |

This profile deliberately does not burn at request creation. A different ownership model needs a separate accounting specification and cannot reuse these equations unchanged.

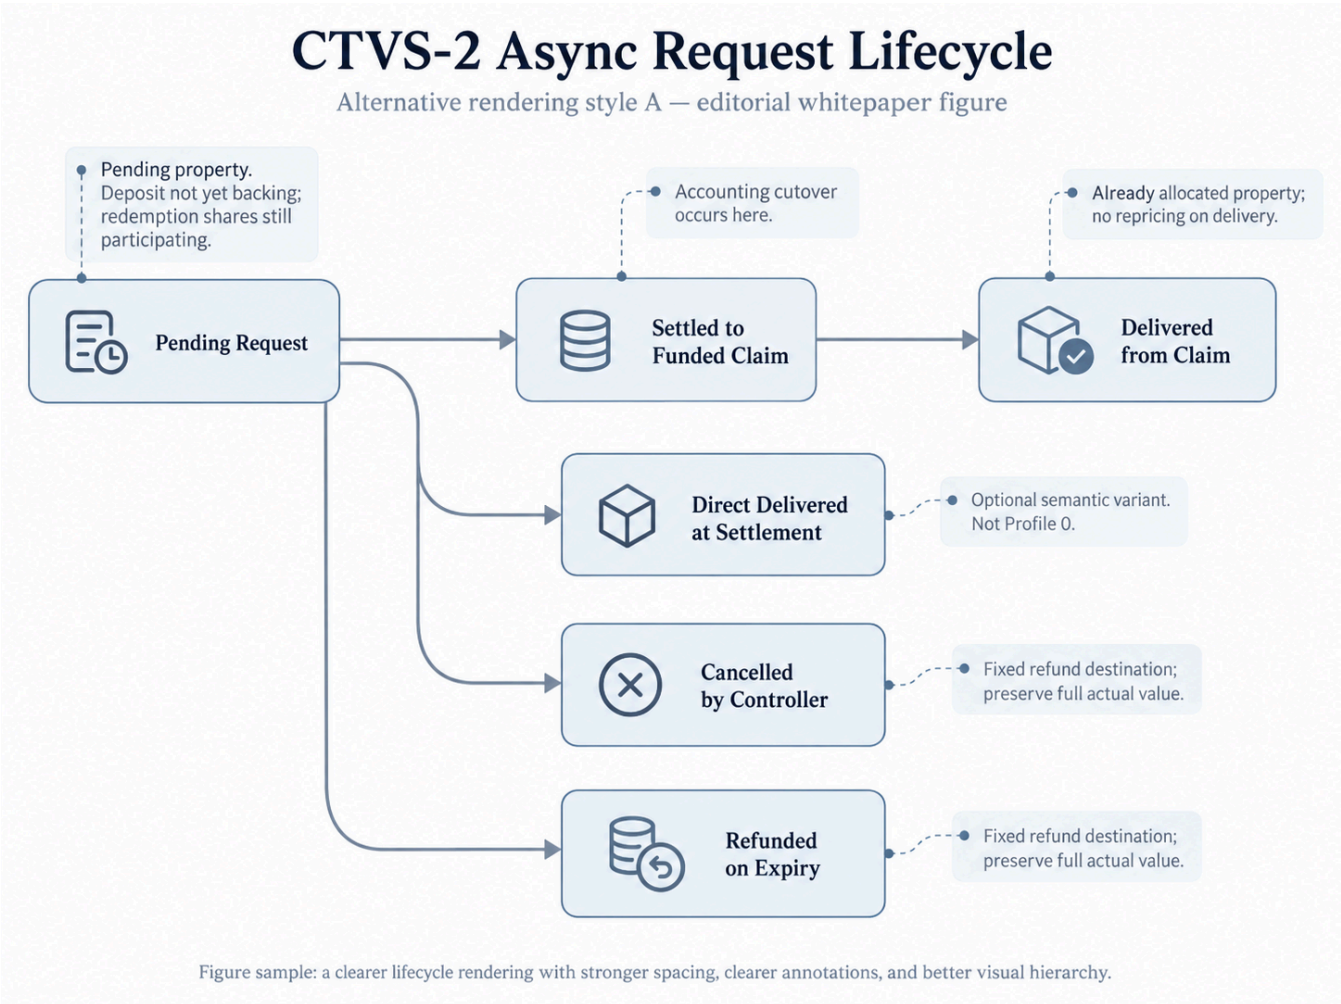

**Figure 1:** Request lifecycle and the single economic cutover. Pending requests do not change backing or supply; settlement changes participation exactly once; later claim delivery changes location only. Direct-at-settlement is a separate variant outside profile 0.

### 3.4 An economic obligation is not yet claimable

For the direct-at-settlement variant there is no claim object or claimable phase: the final protected output is already delivered. For the funded-claim variant, the requirements below are mandatory. These statuses must not be conflated by an indexer.

A vault may owe an exit while still lacking liquid underlying. That is not a funded claim under this standard. A claim **MUST** contain the exact promised economic asset and quantity, plus its protected delivery reserve. A position token, a manager's promise, or a future withdrawal right cannot be displayed as an immediately deliverable claim for another asset.

No claim delivery depends on the accounting state, current NAV, or the original batcher. Operational access to the network and funding for a valid delivery transaction are still necessary.

### 3.5 Full economic histories, not phase-only equivalence

Two histories ending in the same phase labels can have different backing, supply and claims. At  $V_a = 1, V_s = 2$ , zero fees, a reachable  $A = 2, S = 3$  follows from minting three shares for two assets at bootstrap. Consider a one-asset deposit and a three-share redemption in separate settlements:

| Order                | First result              | Second result         | Final A / S | Asset claim |
|----------------------|---------------------------|-----------------------|-------------|-------------|
| Deposit, then redeem | Issue 1 share;<br>A=3,S=4 | Redeem 3 for 2 assets | 1 / 1       | 2           |
| Redeem, then deposit | Redeem 3 for 1 asset      | Deposit 1 for 1 share | 2 / 1       | 1           |

Both requests are claimable in both histories. Snapshot pricing is not violated; different consumed states produced different quotes. A visited-state key containing only phases is nevertheless unsound for general economic exploration. The corrected state key includes phases, backing, supply, fees and claim quantities. Its three-request finite fixture reaches 96 economic states over 64 phase combinations and 213 transitions. This is not an unbounded life-cycle or changing-NAV proof. [SEMANTIC, SEMANTIC-EVID]

### 3.6 Independent objects and non-authoritative queue aggregates

Config/State authenticate the vault economy; Request uses its originating output reference and supported recovery envelope; Claim uses its own out-reference and verified settlement lineage for authentic indexing. A datum is not proof that its named controller originated the request. A valid funded candidate is not admitted backing, an execution reservation, or a global queue registration.

Independent creation cannot maintain an exact pending count in the accounting State. Derive such totals at an identified chain point or introduce a separately authenticated registration protocol. Do not close or sweep the vault merely because local supply is zero. In this reference profile, authenticating a STATE-bearing own input precedes all datum dispatch, preventing custody from being mistaken for refundable request property. [WIRE]

## 4. Request UTxOs and controller authorization

### 4.1 Request identity and creation

The initial request ID is its originating output reference, derived after the creation transaction exists. The datum **MUST NOT** contain its own transaction hash as a self-referential identity requirement. A batch refers to this stable ID, not its current position in an input array.

```
request_id = (origin_transaction_hash, origin_output_index)
```

Creating an output at a script address does not itself run that output's spending validator. Consequently, well-formed-looking requests are not automatically authenticated admissions or capacity reservations. A settler must validate the complete request and value when consuming it. A provider must distinguish a funded candidate from an authenticated statement that the alleged controller initiated it.

An optional creation beacon can validate the creation path and improve discovery, but requires its own minting/lifecycle rules. CIP-89 provides a beacon design pattern; this reference profile does not require a beacon or NFT per request. [7]

### 4.2 Stable recovery envelope and separately decoded economics

The current candidate has exactly four outer Request fields:

```
Request = C(1,[magic,wire_version,recovery,economic_body])
Recovery = C(0,[vault_policy,controller,refund,deadline_posix_ms])
RequestBody = C(0,[terms_hash,kind,offered,minimum_output,
                  receiver,storage_lovelace,
                  execution_budget,settler_fee])
```


magic is bytes CTVS and wire\_version is integer 2. Recovery contains a key-controller constructor and a complete Destination. The outer economic\_body is **Data**, not an eagerly validated RequestBody. Settlement interprets the supported eight-field body; cancellation/expiry first validates only the outer and recovery structure. This implements the separation of recovery from settlement eligibility at the datum boundary. Exact recursive primitive rules are in Section 12 and CTVS-1 Section 10. [WIRE, WIRE-DATA]

Unknown economic constructors, zero economic amounts, a bad terms hash, invalid budget or invalid success receiver can prevent settlement without disabling an otherwise valid fixed refund. Do not downcast the complete economic request before branching on Cancel. An unknown outer version, malformed recovery structure, invalid refund destination or unsupported controller has no implied recovery path.

The profile fixes FullOnly, snapshot pricing, claim delivery and CarryToReceiver. No optional epoch/pricing strings exist in this body; those require distinct reviewed encodings. For settlement, require correct vault/terms, enabled mode, supported kind, positive offered quantity and minimum, exact funding, bounded fees and full completion. For recovery, no current state, NAV, pause or batcher is required.

## CTVS-2 / REFERENCE PROFILE 0 • INDEPENDENT REQUEST CREATION

## One request, two deliberately separate validation paths

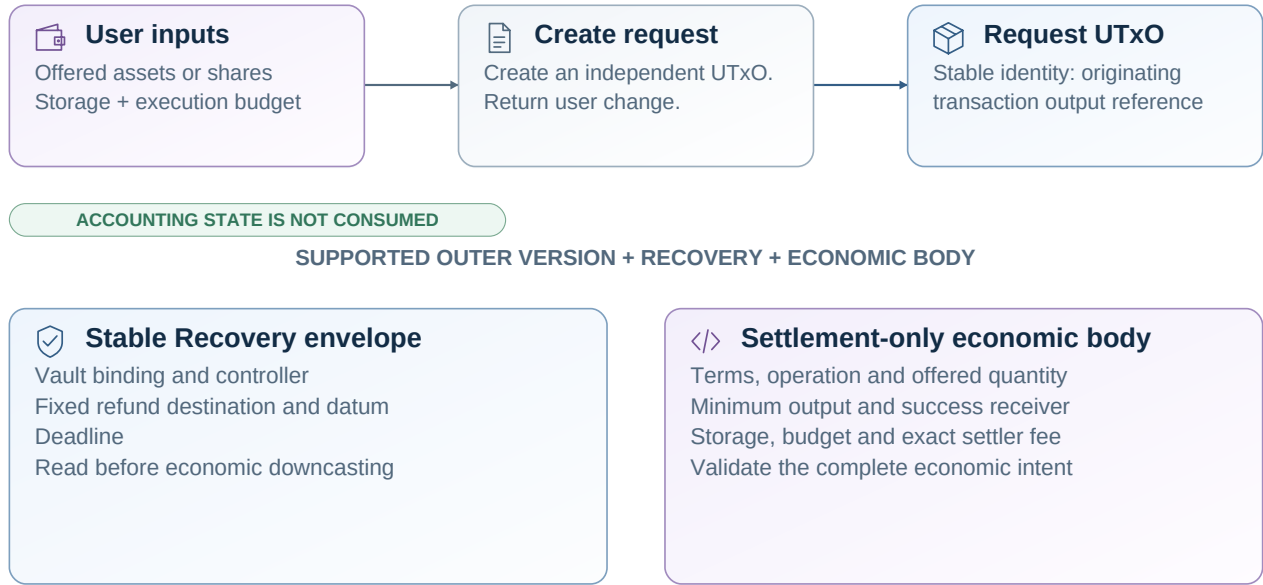

Creation does not change backing or supply, reserve capacity, or prove settlement eligibility.  
Unsupported economics can remain refundable only when the outer Recovery envelope is valid.

**Figure 2:** Independent request creation and the stable recovery envelope. No State is consumed and no shares are issued. Recovery data is decoded separately from the settlement-only economic body so unsupported economics can remain refundable under a recognized envelope.

### 4.3 Value partition

Let  $d$  be offered deposit assets,  $r$  offered redemption shares,  $R_u$  protected storage lovelace,  $B_u$  funded execution budget, and  $e_u$  the exact authorized settler fee with  $0 \leq e_u \leq B_u$ .

For a native-token deposit, the request contains exactly  $d$  underlying tokens and  $R_u + B_u$  lovelace. For an ADA deposit:

$$V_u(\text{ADA}) = d + R_u + B_u. \quad (1)$$

For a redemption, it contains exactly  $r$  shares and  $R_u + B_u$  lovelace. No other native asset is admitted in this reference request shape. The execution budget is not backing and does not buy shares.

At settlement, the economic claim carries  $R_u + B_u - e_u$  lovelace, plus any external top-up. The settlement fee is paid separately. Under the declared CarryToReceiver policy, this storage/unused-budget amount follows the successful economic receiver. On cancellation, the entire  $R_u + B_u$  follows the refund destination. A different success-refund destination requires an explicitly funded additional-output profile; the same ADA cannot be both carried to a receiver and refunded elsewhere.

**Fee/budget decision.** The existing three fields  $R_u$ ,  $B_u$  and exact  $e_u$  are retained in profile 0. Since execution is full and occurs once, the algebraic reparameterization  $r_u = R_u + B_u - e_u$  gives request funding  $r_u + e_u$ , successful

carry  $r_u$  and cancellation return  $r_u + e_u$ . It can simplify an off-chain display, but this revision does **not** remove or reinterpret the original fields. A future native mapping may use a different internal representation only after proving the same user-authorized allocations. Variable per-execution fees and replenishable lifetime budgets are not added. [REV06]

#### 4.4 Key controllers and capability extensions

The reference Controller is exactly  $C(0, [\text{key\_hash}])$ . Before expiry, controller cancellation requires that key among explicit required signatories and a valid ledger witness. The controller need not be the economic receiver or funding owner; attribution of request creation is separate from its cancellation guard. Profile 0 does not encode a generic ScriptController.

A future script-controller profile must identify the actual authorization purpose or authenticated capability, action domain, replay rules, permitted value/datum successor, and independent payout allocation. A reference input or unrelated script hash is not authority. A governance capability may legitimately evolve its datum, so exact restoration is a chosen profile rule, not a universal authorization solution. It cannot become an unreviewed exception to the restricted input family. A real protocol-owned-user test is required before claiming that support. [WIRE, TX]

#### 4.5 Own-input role checks and funding boundaries

Resolve each request from its actual spending-purpose out-reference. Inspect protected identity assets before treating a datum as Request: a STATE-bearing input must satisfy the State branch; an invalid STATE quantity or unexpected ID fails. A request-looking datum cannot send real state custody through fixed refund.

No attached reference script is allowed on protected request/claim outputs in this candidate. For settlement, extra native assets invalidate the closed Request value; for supported fixed refund, preserve every actual input asset instead of discarding the surplus. Unknown or oversized economics must not be silently admitted because the recovery envelope decodes. Full recovery still depends on constructing a valid output and transaction. [WIRE]

### 5. Batch pricing and accounting

**Reference algorithm, mandatory economic obligations.** Sections 5–6 retain the exact snapshot/full-fill/profile-0 construction and proofs. A native implementation uses its declared, independently reproducible pricing and supply algorithm under the common contract; it must not claim this snapshot profile when it reprices sequentially. The direct-delivery variant in Section 7.4 below uses the same snapshot economics in this revision; only the output disposition differs. No generic transcript interpreter is introduced.

#### 5.1 One pre-settlement snapshot

Let the consumed state be  $(A_0, S_0, F_0)$ , with  $X = A_0 + V_a$  and  $Y = S_0 + V_s$ . All included reference requests are priced against this same pair, identified by the exact consumed state reference. The ten-field direct State has no independently mutable checkpoint field. The batcher cannot choose between snapshot and sequential pricing per request.

For deposit  $i$  with gross input  $d_i$ :

$$f_i = \text{ceil} \left( \frac{d_i b_e}{10,000 + b_e} \right), \quad n_i = d_i - f_i, \quad q_i = \text{floor} \left( \frac{n_i Y}{X} \right). \quad (2)$$

For redemption  $j$  with shares  $r_j$ :

$$g_j = \text{floor} \left( \frac{r_j X}{Y} \right), \quad h_j = \text{ceil} \left( \frac{g_j b_x}{10,000 + b_x} \right), \quad w_j = g_j - h_j. \quad (3)$$

Every request enforces its minimum output and positive economic result. Rates and virtual parameters are authenticated terms. Economic fees are rounded per request, not once over an aggregate that the batcher can split differently.

## 5.2 Aggregate state transition

Let  $D$  and  $W$  denote the included deposit and redemption sets. The successor is:

$$A_1 = A_0 + \sum_{i \in D} n_i - \sum_{j \in W} g_j, \quad (4)$$

$$S_1 = S_0 + \sum_{i \in D} q_i - \sum_{j \in W} r_j, \quad F_1 = F_0 + \sum_{i \in D} f_i + \sum_{j \in W} h_j. \quad (5)$$

The mint/burn profile requires:

$$M(\text{share}) = \sum_{i \in D} q_i - \sum_{j \in W} r_j. \quad (6)$$

At the physical underlying boundary:

$$(A_1 + F_1) - (A_0 + F_0) = \sum_{i \in D} d_i - \sum_{j \in W} w_j. \quad (7)$$

The reserve of the accounting state does not change during settlement. Requests and claims retain their own ADA partitions.

## 5.3 Feasibility and netting

The batch validates nonnegative bounded successor balances, the final backing cap, aggregate participating share extinction, and full funding of all claims and fee obligations. Redemption requests must hold pre-existing shares; newly issued outputs in this transaction are not pending redemption inputs. The reference batch explicitly requires  $\sum r_j \leq S_0$ .

Deposit inflows may fund simultaneous redemptions only when all included operations settle atomically at the same authenticated pricing rule. Netting is a physical funding optimization, not permission to issue an unfunded claim. For managed profiles, physical spendable liquidity must be demonstrated; a positive  $A_1$  alone is not enough.

A final-balance cap allows deposits and redemptions to offset in one atomic transaction. A different gross-flow cap is a separate advertised policy. Limits must not be left to a batcher's undocumented interpretation.

## 5.4 Snapshot equality is not global fairness

Included requests use the same rational reference price, but per-request rounding and fees can produce different effective rates at different sizes. This is disclosed behavior. The batcher may select which eligible requests to include unless a stronger authenticated ordering profile exists.

Do not promise global FIFO or all-request pro-rata fulfillment from local validation of a chosen set. A script generally sees its transaction context, not an exhaustive proof of every older eligible request in the UTxO set. Ordering commitments and availability proofs are additional protocol machinery.

## 5.5 A zero-net-mint batch

At  $A_0 = S_0 = 1,000$ ,  $V_a = V_s = 1$ , and zero fees, a ten-asset deposit issues ten shares while a ten-share redemption pays ten assets.  $A_1 = A_0$ ,  $S_1 = S_0$ , and the net share mint is zero.

The deposit's shares can be funded from the redemption input while the redemption's assets are funded from the deposit input. Gross obligations still exist. The state and request validators must prove both, even though the ledger minting policy for the share asset may not execute for a zero-net entry. Treating “no mint” as “no issuance validation needed” is invalid.

## 5.6 Wire witnesses are not economic authorities

A Batch entry contains only `request_ref`, `claim_output`, and externally funded `claim_topup`. It does not supply an authoritative quote, gross debit, fee, or share-total field. Recompute all economic quantities from the covered `RequestBody`, authenticated Terms and consumed State. The list is sorted by transaction-ID bytes then output index for deterministic interpretation, not sequential repricing.

Verify the final backing cap, economic and physical aggregate bounds, enabled mode/pause for each direction, existing redemption inputs, positive results and every user's minimum. The maximum-deposit algorithm in CTVS-1 Section 6.4 remains an economic limit calculation; it is not a promise that this transaction fits. [WIRE]

# 6. Settlement validation and payment allocation

## 6.1 Accounting transaction and exact role envelopes

```
Reference: immutable authenticated Config
Spend:    State + all selected Request inputs + key funding
Redeemers: StateSpend(Batch), each RequestSpend(Acknowledge),
           MintPurpose(SupplyUpdate) only for nonzero SHARE mint
Produce:  State successor + one Claim per request
           + optional reward + external-funder change
```

`StateSpend`, `RequestSpend`, `ClaimSpend` and `MintPurpose` are role tags 0, 1, 2 and 3, each wrapping the three fields `magic`, `wire_version`, and `action`. Tags are scoped to their type; a request action zero is not a state action zero. The authentic input role must agree with the envelope. CTVS-1 Section 4 defines the per-vault script and protected-asset dispatch. Section 12 below defines the exact actions.

## 6.2 Two-way request/state acknowledgment

Each request's  $C(0, [state\_ref])$  acknowledgment requires an ordinary spending input containing the authentic `STATE(1)` at the expected full vault address. Locate its actual `Spend(state_ref)` redeemer and require `StateSpend` with inner Batch tag 4. Merely referencing State, naming a state reference, or consuming State for Pause or TopUp-Reserve does not authorize settlement.

The Batch branch identifies **all ordinary inputs at its vault script except its one authentic State**, before filtering by economic validity. Every such input must be a supported Request whose `RequestSpend` acknowledgment points back to this exact state. A cancellation redeemer cannot be treated as a settlement acknowledgment. A malicious self-reported Boolean is not evidence that the state validator executes. The ledger must actually run all required handlers.

### 6.3 Exhaustive request coverage


Let  $\mathcal{R}$  be those consumed request references and  $E$  the Batch entries. Require:

$$|E| = |\text{unique}(\text{refs}(E))|, \quad \text{set}(\text{refs}(E)) = \mathcal{R}. \quad (8)$$

Entries have deterministic lexicographic out-reference order, no duplicates, and count at most the authenticated `Terms.max_batch` and structural cap. Every covered candidate passes complete recovery, economic, value, version, terms, mode, expiry and quote checks. Do not drop an invalid consumed input from the list while retaining its value.

#### CTVS-2 / REFERENCE PROFILE 0 • REQUEST / STATE COUPLING

### Settlement requires agreement in both directions

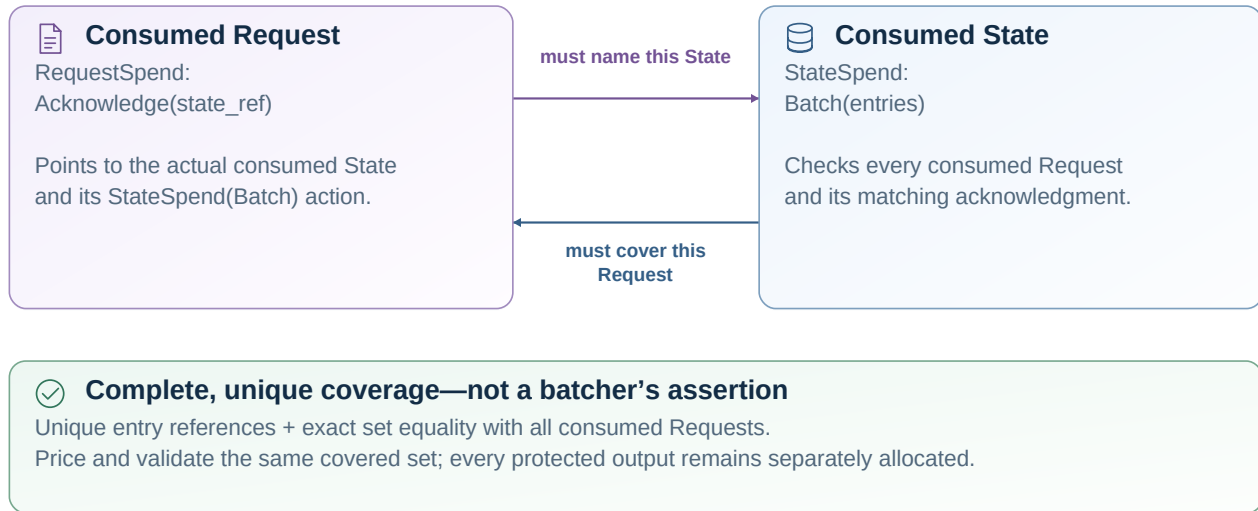

Referencing State is insufficient. Pause or reserve top-up is not Batch.  
An omitted request, duplicate entry, or Cancel branch cannot count as acknowledgment.


**Figure 3:** Two-way acknowledgment and exhaustive coverage. The State Batch entry set equals every consumed Request, and every Request points back to the same authentic State Batch action. A reference input or self-reported flag cannot substitute for these checks.

### 6.4 Gross economics, successor and output obligations

Recompute all quotes against the same old State. Check each positive input/output, minimum, exact fee and budget. Verify aggregate backing, fees, supply, existing shares and liquidity, and then the exact closed successor and net SHARE mint. A zero-net-mint batch still checks gross issuance/extinction and all claims. Config and ID/STATE supply are immutable.

Each entry constructs one Claim at the shared Q script binding `request_ref`, `state_ref`, policy, terms, asset, amount, receiver and carried ADA. The successor, every claim, and positive reward have distinct allocated indices within the actual output count. Same receivers do not merge claim obligations. Top-ups are externally funded, disclosed in the entry, and included in `Claim.carried_lovelace`; they do not buy shares or increase a request fee.

The reward key is explicitly required to sign and satisfies the configured key policy. Zero summed request fees require None reward output. Otherwise the reward output is ADA-only at that key's enterprise address, with NoDatum and no reference script, and at least the exact sum; any extra ADA is external. All protected role/output conditions and accounting partitions remain necessary even when the transaction balances.

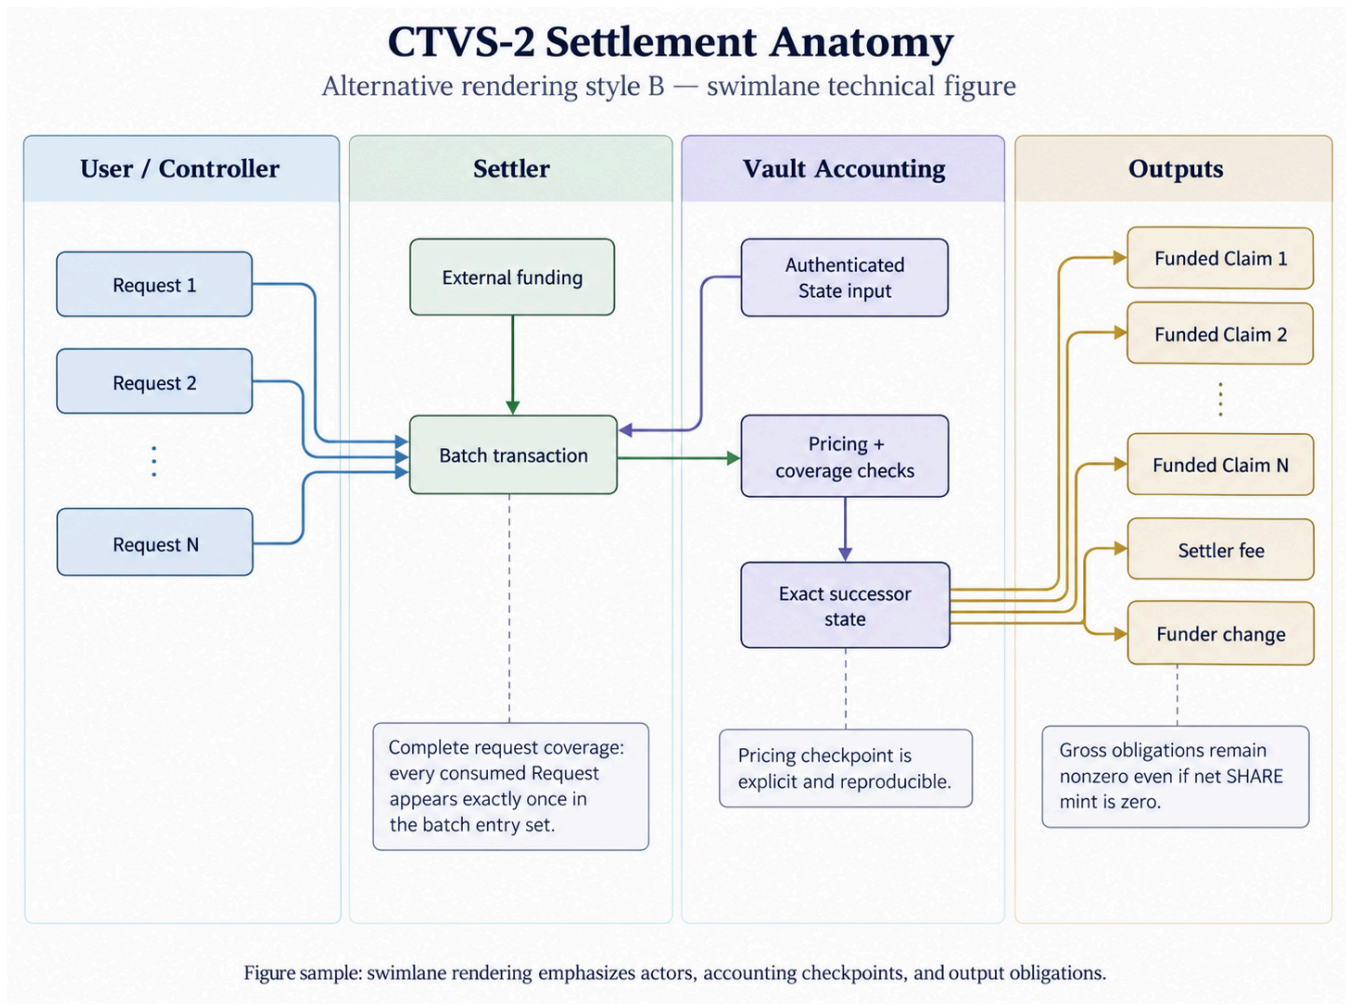

**Figure 4:** *Mixed snapshot settlement anatomy. All requests price against one old State, the transaction validates gross issue and extinction, and each request receives its own funded result. Physical netting does not remove user obligations.*

## 6.5 Closed validation domain and receiving scripts

These restrictions remain unchanged for profile 0. Alternative native compositions must prove the complete source and payout obligation domain through their actual validators. Neither a mapping label nor local output injectivity alone permits removal of the restrictions.

Profile 0 permits one vault State, its Requests, and key funding only. It rejects other script-spending families, concurrent claim delivery, unrelated mint, all withdrawals (including zero), certificates, votes, proposals and treasury fields. Local injectivity alone is not proof against an unrelated validator sharing a payout. Arbitrary cross-vault atomic composition needs a common allocation verifier or reviewed adapter.

Claims have their own datum at Q; the final receiving script retains its own exact datum. Creating a destination output does not execute the recipient script. The no-reference-script and credential/datum rules apply to all protected outputs. These restrictions do not force permissioned protocols to change their operator sets.

## 6.6 What the executed link tests establish

The local `verify_settlement_links()` function exercises linkage, role, coverage and selected boundary checks. It is **not** a full settlement validator: quote correctness, recipient amounts, successor accounting, net mint and complete value conservation remain separate obligations. The economic model and wire linkage predicates have not been compiled or proven jointly equivalent to a complete Cardano implementation. [WIRE, WIRE-EVID, SEMANTIC]

## 7. Settlement delivery: funded claims and a bounded native variant

### 7.1 Exact claim creation

**Profile 0 / funded-claim branch.** Sections 7.1–7.3 remain the exact existing rule. Section 7.4 specifies the separate direct-at-settlement semantic variant. No Claim constructor or Delivery redeemer has been changed.

A share claim contains shares already issued at settlement; an asset claim contains the exact net underlying pay-out already removed from remaining backing. The Claim record has ten fields (Section 12), including consumed request/state references, not a self-referential future transaction ID.

For a request reserve  $R_u$ , execution budget  $B_u$ , fixed fee  $e_u$  and external top-up  $t$ :

$$R_{claim} = R_u + B_u - e_u + t. \quad (9)$$

A token claim holds the exact economic token quantity and  $R_{claim}$  ADA. An ADA claim holds economic lovelace plus  $R_{claim}$ . Legitimate creation has no unexplained surplus and requires positive carried ADA. No NAV report, position token or future liquidity promise substitutes for the asset promised in a funded claim.

### 7.2 Shared fixed-delivery domain

The independently defined claim script Q has no dependency on mutable config, state, NAV or the original settler. A delivery can consume 1..16 supported claims at this same Q plus key funding. Every claim's ClaimSpend redeemer must contain the **same semantic delivery-entry list**. The list identifies every consumed Q claim exactly once and allocates distinct receiver outputs. It may include claims from different vaults at this common guard, but no other script-input family, mint, withdrawal, certificate, vote, proposal or treasury action.

For each consumed claim  $c$  and its allocated output  $o$ :

$$\text{DestinationMatches}(o, c) \wedge \forall a, V(o)[a] \geq V(c)[a]. \quad (10)$$

Matching includes full supported credentials, exact NoDatum/InlineDatum semantics, and no attached reference script. Preserve every actual asset, including surplus or externally funded value, not merely the minimum declared in the datum. Fees and submitter change cannot consume that property. Any added output value is externally funded. The public candidate has no delivery reward.

### 7.3 Delivery changes location, not economics

Delivery does not consume the accounting State, read current NAV, convert quantities, or mint/burn shares. Share claims already participate in P&L; asset claims already represent a fixed underlying quantity outside remaining share backing. Anyone can fund fixed delivery without redirecting it, subject to real transaction feasibility and network access.

A third party can voluntarily create a funded look-alike at Q. The guard can preserve its actual property without making it an authentic vault claim. Indexers authenticate genuine settlement lineage before attributing it to the vault. Q's preservation guard grants no rights to mint shares or debit another object.

The local wire-format checks cover candidate shape and selected preservation/allocation primitives. The full multi-handler rule that all claims use the same list, compiled receiving compatibility, and ledger-resource feasibility have not been demonstrated. Source and test authors are not independent. [WIRE, WIRE-EVID]

## 7.4 Direct-at-settlement delivery: a bounded semantic variant

A native implementation MAY support `delivery_at_settlement` through an authenticated Section 2.5 mapping. This is a semantic variant, **not** CTVS-WIRE-2 profile 0, not an assigned new on-chain profile integer and not a claim of literal ERC-7540 compatibility. No deployed implementation, compiled mapping or new reference-wire encoding is supplied here. [1, REV06]

The initial variant is deliberately narrow: full-fill requests, one authenticated snapshot per batch, fixed authorized request fees, the same participation cutover as Section 3, one final protected allocation per request, and the existing carry-to-receiver storage policy. Do not mix funded-claim and direct-delivery outcomes inside one batch in this initial variant. Epoch, partial-fill and in-flight semantics are not inherited.

For request  $i$ , derive the gross economic quote and all state/supply/fee deltas from Section 5 or the mapping's explicitly supported equivalent. Let  $q_i$  be deposit shares or  $w_i$  redemption assets and  $c_i = R_i + B_i - e_i + t_i$ , where  $t_i$  is externally funded output top-up. Create a final output to the exact committed receiver/datum with the economic asset/quantity and the entire  $c_i$  allocation. For ADA redemption, the required lovelace is  $w_i + c_i$ , not the maximum of the two. Native-token economic quantities are exact; all additional ADA has an explicit source and owner.


Every consumed request must be covered once. Final outputs, accounting continuations and fee outputs are disjoint under the initial allocation rule; the native transaction family must additionally prove that no external script reuses the same value as another protected payment. Complete identity/role authentication, actually executed authority, bounds, expiry, cap/liquidity, terms binding, gross share accounting and exact mint/inventory changes remain required.

Settlement creates no claim and performs no later delivery action. A wallet records one `settled_delivered` outcome with the actual final output references; it must not also credit an issued-but-unclaimed share balance or a fixed asset claim. Before consumption, the request retains its declared fixed cancellation/expiry rights. Once settled, those rights are spent and the user holds the final output. If any required predicate fails, the economic transition does not partially succeed; real ledger collateral handling remains separate.

The native request or immutable mapping-bound terms must commit this disposition before execution. Enabling it on the existing profile-0 body, whose fixed meaning is claim creation, is forbidden. A future reference implementation would need an explicit new profile/wire design, fixtures and migration assessment; this paper assigns none.

## CTVS-2 / PROFILE 0 AND A SEPARATE NATIVE SEMANTIC VARIANT

## Two delivery paths, one economic cutover

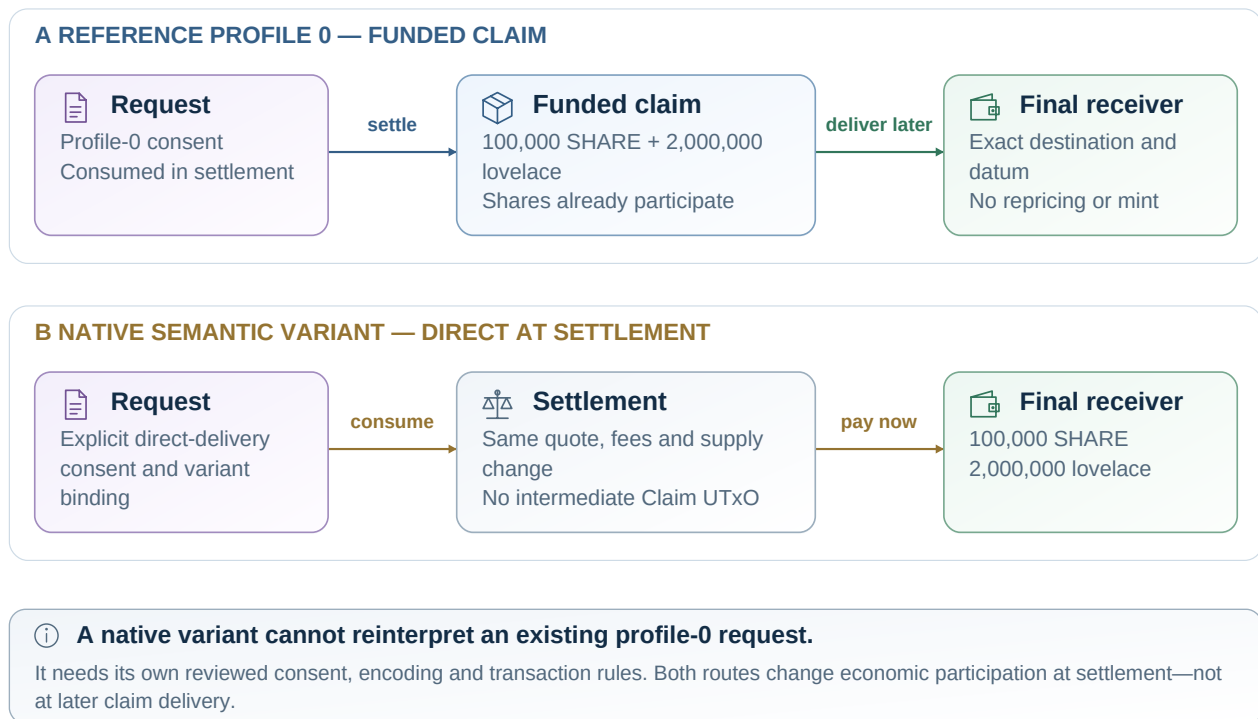

**Figure 5:** Two settlement dispositions, one economic cutover. Profile 0 creates a funded Claim for later delivery; the native direct-delivery variant pays the final receiver inside settlement. One request interpretation cannot silently switch between them.

## 7.5 Direct-delivery example and evidence gate

Use Section 9’s three-request mixed settlement and unchanged snapshot quotes. Replace only the three funded-claim outputs with final outputs at their respective committed destinations: A receives 100,000 SHARE plus 2,000,000 lovelace; B receives 50,000 SHARE plus 2,000,000; C receives 50,000 UNIT plus 2,000,000. Successor state, +99,500 net SHARE mint, 3,000,000 execution reward, 5,400,000 external-funder change and 600,000 network fee remain the same. All input/output asset totals are unchanged. There is no Claim datum, ClaimSpend action or second delivery fee.

This is a value-conservation example of the proposed native variant, **not a valid profile-0 transaction** and not an implemented native builder. Its acceptance gate requires native encoding/consent, real guard execution, compiled same-destination/reused-output negative fixtures, actual ledger acceptance, measured output costs and independent indexing that records no ghost claim. The revision checks its arithmetic only. [REV-CHECKS]

## 8. Cancellation, deadlines, and pause behavior

### 8.1 Recoverable envelope, independent of settlement economics

The fixed recovery guarantees below remain mandatory for reference profile 0 and the claimed refundable-escrow semantics. Native mappings must demonstrate equivalent protection of each user's authenticated attributable property; they cannot infer one user's entitlement to an entire shared input. A mere adapter cannot add refund rights a native guard does not enforce.

A **settlement-eligible** Request must pass the full body, funding, terms, fees, pricing, amount and mode checks. A **recoverable** Request requires only supported outer version and Recovery structure with valid fixed refund, controller and expiry. No active batcher, open pause flags, valid settlement budget, current quote or accepted terms binding is required for fixed refund.


The cancellation recipe consumes one Request plus key-controlled external funding, and no State, other script family, mint, withdrawals, certificates, governance or treasury actions. Resolve its own input and reject protected STATE/ID misuse before interpreting Recovery. Before expiry, ControllerCancel requires the committed key; afterward it remains available. ExpiryRefund permits anyone when the whole validity range lies at/after the deadline.

The fixed refund output must match the exact destination/datum, have no reference script, and satisfy  $V(o_r) \succeq V(r)$  over every actual asset. This returns storage, the entire unearned budget, surplus ADA and unexpected native assets without a settlement charge or accounting mutation. All fees/top-ups are external.

The handler **MUST** branch through raw Data to the stable envelope before economic downcasting. The `economic_body`: Data boundary is the concrete candidate mechanism, not a Python-field shortcut. An unsupported body, zero amount or invalid budget may remain refundable; an unknown outer version, undecodable Recovery, invalid refund destination or unsupported Controller has no universal rescue promise. Extremely large actual value or destination data may still prevent construction. Full-value preservation is safety, not unconditional liveness. [WIRE, SEMANTIC]

## CTVS-2 / REFERENCE PROFILE 0 • FIXED FULL-VALUE REFUND

## Recovery can succeed when settlement cannot

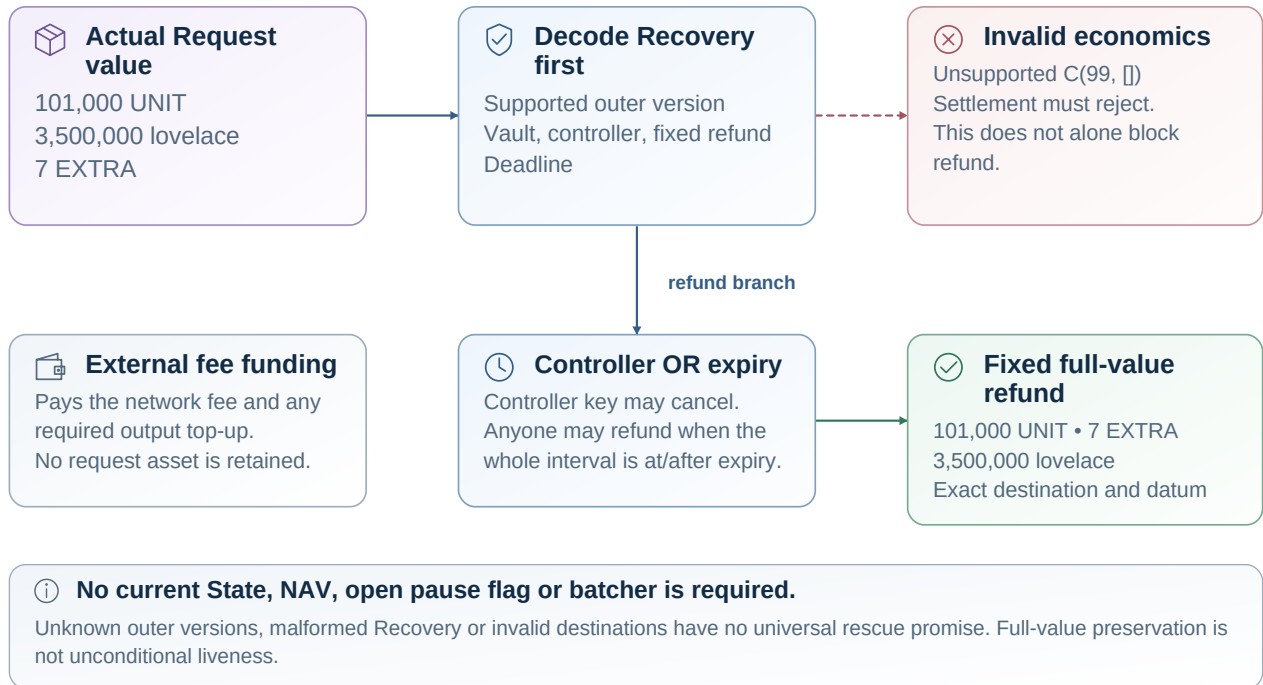

**Figure 6:** Recovery is independent of settlement eligibility. A supported Recovery envelope, authority or expiry condition, and exact full-value refund can remain valid when the economic body cannot settle. External funding pays the refund transaction fee.

## 8.2 Exact interval semantics and conflicts

Normalize the supported transaction validity interval to nonempty  $I_{tx} = [\ell, u)$  with finite bounds and  $\ell < u$ , using the actual pinned ledger/library semantics. For a deadline  $d$ :

$$\text{SettleEligible} \Rightarrow u \leq d, \quad \text{ExpiryRefundEligible} \Rightarrow \ell \geq d. \quad (11)$$

Equivalently, every permitted settlement time is before  $d$  and every expiry-refund time is at/after  $d$ . A boundary-straddling interval is not sufficient; neither is a builder's wall clock. Any enabled valuation window must contain the complete interval. Required slot/POSIX conversion and open/closed-bound correspondence remain actual-ledger evidence gates.

Controller cancellation and settlement can compete before expiry, but both spend the same request reference. At most one survives on a given accepted history. An off-chain selection notice does not reserve the input or change the datum. An indexer must reverse orphaned claims/settlements on rollback. [SEMANTIC, WIRE]

### 8.3 Pause matrix

| Action                   | Entry pause                                         | Exit pause | Requires settler               |
|--------------------------|-----------------------------------------------------|------------|--------------------------------|
| Settle deposit           | Blocked                                             | Unaffected | According to membership policy |
| Settle redemption        | Unaffected                                          | Blocked    | According to membership policy |
| Create candidate request | May still create an output; acceptance not promised | Same       | No                             |
| Controller cancellation  | Unaffected                                          | Unaffected | No                             |
| Fixed expiry refund      | Unaffected                                          | Unaffected | No                             |
| Funded-claim delivery    | Unaffected                                          | Unaffected | No                             |

Request creation cannot be advertised as admission merely because it succeeds while settlement is paused. Providers should warn users and expose the likely execution status. Pausing a vault does not confiscate existing pending escrow or funded claims.

## 9. Worked UTxO transactions and datum representations

### 9.1 Conventions and reachable reference basis

UNIT is a hypothetical native underlying, distinct from the authenticated vault policy  $p$ . All amounts are integer base units. The numbers for storage, fees and collateral funding are **arithmetic assumptions**, not measured network minima. References contribute no spendable value. All protected outputs have inline protocol data where required and no reference script.

Use  $V_a = V_s = 1$ , entry/exit markup 100 basis points, old sequence 7,  $A_0 = S_0 = 1,000,000$ ,  $F_0 = 0$ , and state reserve 4,000,000 lovelace. This mature one-to-one state is reachable through zero-yield user flows; unlike the prior edition's illustrative two-to-one managed pre-state, it needs no unsupported managed State field. Terms enables both asynchronous directions. Each request reserves 2,000,000 lovelace plus a 1,000,000 budget/fee. Let  $hK$  be the correctly committed terms hash,  $D$  a complete receiver Destination, and  $F_{\text{refund}}$  its fixed refund Destination.

### 9.2 Example A — independent deposit request

A user supplies 101,000 UNIT and 6,000,000 lovelace. Its outputs are the pending Request with 101,000 UNIT and 3,000,000 lovelace, plus 2,600,000 lovelace of change; the illustrative network fee is 400,000. No State is consumed and no SHARE is minted. Use a future positive deadline  $d$  and key  $k$ :

```
Recovery = C(0, [p, C(0, [k]), Frefund, d])
RequestBody = C(0, [hK, C(0, []), 101000, 99900,
                    D, 2000000, 1000000, 1000000])
Request = C(1, [CTVS, 2, Recovery, RequestBody])
```

The originating reference  $ra\#0$  is learned after creation; it is not stored in Request. Another deposit  $rb\#0$  independently offers 50,500 UNIT with a minimum of 49,900 shares and the same budget convention. All CTVS economic totals remain unchanged until settlement.

### 9.3 Example B — independent redemption request

A holder supplies 100,000 SHARE and 6,000,000 lovelace. It locks 50,500 SHARE and 3,000,000 lovelace in  $rc\#0$ , returns 49,500 SHARE and 2,600,000 lovelace as change, and pays the illustrative 400,000 fee. The body uses kind  $C(1, [1])$ , offered 50,500 and minimum output 49,900 UNIT. All 100,000 shares remain participating supply; no burn occurs at request creation.

### 9.4 Example C — mixed snapshot settlement

All three requests use the same old State and fixed per-request markup:

| Request    | Offered property | Asset fee | Net admission / gross debit | Funded economic claim |
|------------|------------------|-----------|-----------------------------|-----------------------|
| ra deposit | 101,000 UNIT     | 1,000     | +100,000 backing            | 100,000 SHARE         |
| rb deposit | 50,500 UNIT      | 500       | +50,000 backing             | 50,000 SHARE          |
| rc redeem  | 50,500 SHARE     | 500       | -50,500 backing             | 50,000 UNIT           |

The successor is  $A_1 = S_1 = 1,099,500$ ,  $F_1 = 2,000$ , sequence 8. Physical UNIT is 1,101,500, exactly backing plus fees. Net SHARE mint is +99,500. An eligible key settler contributes 6,000,000 lovelace; the fee is illustratively 600,000.

| Transaction object             | UNIT      | SHARE   | Lovelace  |
|--------------------------------|-----------|---------|-----------|
| Spend State + STATE(1)         | 1,000,000 | 0       | 4,000,000 |
| Spend ra                       | 101,000   | 0       | 3,000,000 |
| Spend rb                       | 50,500    | 0       | 3,000,000 |
| Spend rc                       | 0         | 50,500  | 3,000,000 |
| Spend settler funding          | 0         | 0       | 6,000,000 |
| Mint SHARE                     | 0         | +99,500 | 0         |
| Output 0: successor + STATE(1) | 1,101,500 | 0       | 4,000,000 |
| Output 1: claim A              | 0         | 100,000 | 2,000,000 |
| Output 2: claim B              | 0         | 50,000  | 2,000,000 |
| Output 3: claim C              | 50,000    | 0       | 2,000,000 |
| Output 4: exact reward         | 0         | 0       | 3,000,000 |
| Output 5: settler change       | 0         | 0       | 5,400,000 |
| Network fee                    | 0         | 0       | 600,000   |

UNIT:  $1,151,500 = 1,101,500 + 50,000$ . SHARE:  $50,500 + 99,500 = 150,000$ . ADA:  $19,000,000 = 4,000,000 + 6,000,000 + 3,000,000 + 5,400,000 + 600,000$ . State/config reference/value checks are additional to these equalities.

### 9.5 Example C — exact two-way redeemers

Let entries be sorted by their actual transaction-ID bytes, with  $ra\#0 < rb\#0 < rc\#0$  solely as an illustration. Let  $s0$  be the consumed State reference,  $kB$  the required reward key, and SHARE the full native Asset constructor:

```

entries = [C(0,[ra#0,1,0]), C(0,[rb#0,2,0]), C(0,[rc#0,3,0])]
StateRedeemer = C(0,[CTVS,2,
    C(4,[0,entries,kB,C(0,[4])])])
# Every Request input has the following purpose-bound redeemer:
RequestRedeemer = C(1,[CTVS,2,C(0,[s0])])
MintRedeemer = C(3,[CTVS,2,C(1,[s0])])
new_state = C(0,[CTVS,2,p,hK,8,
    1099500,1099500,2000,4000000,0])
claimA = C(2,[CTVS,2,p,ra#0,s0,hK,
    SHARE,100000,D_A,2000000])

```

Replace all symbolic references/hashes/destinations with their exact nested encodings before constructing a transaction. The entry carries no quoted amount: all amounts are recomputed. `claim_topup=0` means no additional ADA is assigned beyond the request remainder. Output 4 is Some reward index; zero summed fees would require None. Request acknowledgments cannot point merely to a reference input or to a State pause/top-up action.

## 9.6 Example D — independent claim delivery

Claim A already holds 100,000 SHARE and 2,000,000 lovelace. A new submitter provides 4,000,000 lovelace. Output 0 pays the exact receiver/datum all 100,000 SHARE and 2,000,000 lovelace; change is 3,600,000 and fee 400,000. `ClaimSpend` is `C(2,[CTVS,2,C(0,[C(0,[claim_ref,0])])])`. No State or config is consumed, no quote is recomputed, and no shares are minted/burned.

For claim C the delivered asset quantity is fixed at 50,000 UNIT, independent of later NAV. Multi-claim delivery uses one identical semantic list in each `ClaimSpend`, complete coverage and distinct outputs. A receiving script is not proven spendable merely by constructing its output.

## 9.7 Example E — cancellation and exact expiry refund

Instead of settling `ra`, consume it into its immutable refund with all 101,000 UNIT and 3,000,000 lovelace. With 4,000,000 external lovelace, change is 3,600,000 and fee 400,000. Controller cancellation uses `RequestSpend` inner `C(1,[refund_output])` and the required key. After expiry use inner `C(2,[refund_output])` and an interval wholly at/after `d`. No settlement reward is charged; no State is required.

## 9.8 Example F — unsupported economics, supported recovery

Retain `ra`'s valid Recovery but replace `economic_body` with `C(99,[ ])`. Suppose the actual value is 101,000 UNIT, 3,500,000 lovelace and seven EXTRA tokens. Settlement fails. Recovery must not first interpret that body as `RequestBody`: a valid controller cancellation or expiry refund returns all actual value to `Frefund`. With 4,000,000 external lovelace and fee 400,000, change is 3,600,000. No extra token is silently discarded. An unknown outer version or invalid refund destination does not receive this promise.

## 9.9 Example G — preservation includes excess claim value


A voluntarily funded supported claim-shaped output declares 100,000 SHARE and 2,000,000 carried ADA but actually holds 2,500,000 lovelace. Fixed delivery passes every share and all 2,500,000 lovelace to its destination. The submitter cannot retain the extra 500,000. With 4,000,000 external funding and 400,000 fee, change is 3,600,000, not 4,100,000. This does not establish authentic settlement lineage or imply an existing UTxO can be enlarged in place; legitimate settlement top-ups must agree with the created Claim.

## 9.10 Example H — zero net mint, nonzero gross exchange

At  $A = S = 1,000$  with virtual balances 1:1 and zero fees, deposit 10 assets and redeem 10 pre-existing shares in one snapshot batch. State backing and supply are unchanged; net SHARE mint is zero. The redemption shares can fund the depositor's claim while deposit assets fund the redeemer's claim. State/Request handlers still enforce both gross obligations; no MintPurpose invocation is assumed for zero mint.

CTVS-2 / ONE-TO-ONE SNAPSHOT • ZERO FEES

### Zero net mint does not mean zero obligations

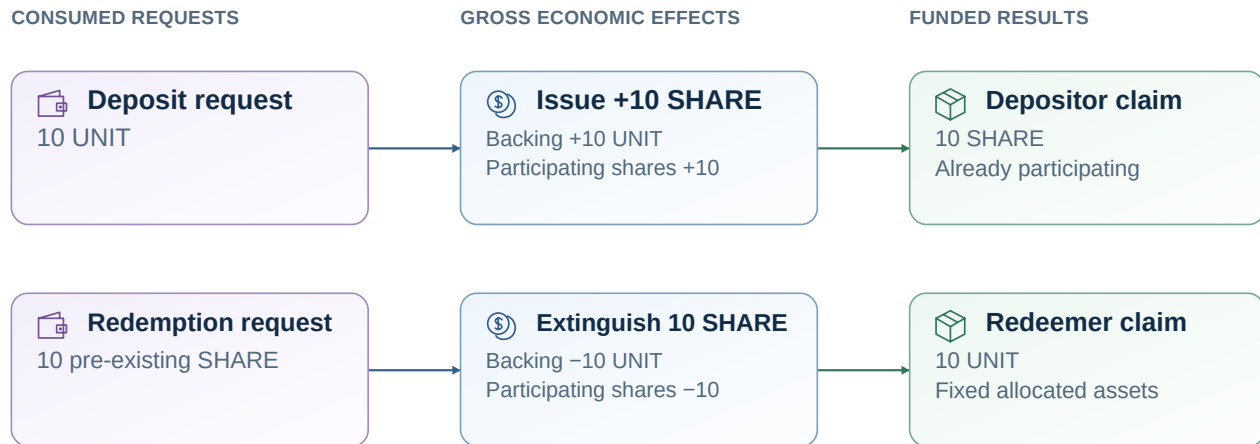

### 10 issued – 10 extinguished = 0 net SHARE mint

$A = S = 1,000$  before and after. Both economic exchanges still occur.

State and Request handlers must enforce both gross effects, exact claims and value conservation, even when no minting-policy invocation occurs for SHARE.

**Figure 7:** Zero net mint still contains two gross economic exchanges. The ledger mint field is zero, but State and Request handlers must validate ten shares issued, ten extinguished, and both funded results.

## 9.11 Managed-price illustration outside profile 0

Under a separately specified managed state, a pending 100,000-share redemption at indicative  $A=S=1,000,000$  may later face accepted backing 850,000 with unchanged supply. With  $V_a = V_s = 1$  and zero fees, the gross quote is 85,000 assets. A minimum of 90,000 blocks settlement; 84,000 permits the economic quote subject to liquidity and all guards. Once funded, an 85,000-asset claim is no longer repriced. Reference profile 0 cannot encode that discretionary NAV update; Section 10 defines the additional evidence required.

## 10. Managed NAV, protocol adapters, and in-flight exposure

### 10.1 The simple admission boundary

This is a concrete integration boundary, not a universal strategy workflow. One actual invested-vault mapping is prioritized for acceptance; lending/ALM implementations do not become conformant through a generic managed capability name.

The conservative integration path admits a deposit and issues shares before the strategy deploys capital. It realizes sufficient liquidity before settling a redemption. This keeps refundable requests and funded claims outside the strategy's internal state machine.

A permissioned DEX or lending adapter may then operate on assets already owned by the vault under the declared manager rules. The adapter specifies allowed scripts, position identity, output data, valuation evidence, liquidity constraints, and permitted authority. The standard does not force the downstream protocol to accept an unauthorized operator.

### 10.2 Exact state-basis binding and report acceptance

A managed report must identify vault, terms, position/liability perimeter, accepted report sequence, valuation time/window, backing and liquidity under a separate exact managed state. The conservative absolute-NAV candidate additionally binds the **exact consumed accounting-state reference** it values. A report for s0 at 100 must not overwrite s1 at 110 after a ten-asset deposit. Reject/revalue or implement a precisely specified and verified cash-flow reconciliation algorithm; an unnamed bridge is not a solved mechanism.

The accepted report head must be authenticated; an old signed unspent output is not proof of the latest accepted report. The whole transaction interval must fit report validity and request deadline. Exact state binding has a cost because concurrent operations can stale reports; benchmark it. Fee crystallization occurs once in its declared order before user pricing.

Reference profile 0 has no NAV field or managed update action. A Merkle root or signature proves neither complete ownership nor fair valuation without its surrounding rules. Permission to settle does not confer permission to invent NAV, and reported positive backing is not liquid assets. No managed-protocol or trusted-NAV test is included in the local wire-format results. [WIRE, SEMANTIC]

### 10.3 In-flight exposure is excluded until separately specified

If pending assets are committed downstream before final pricing or recovery ceases to be freely executable, the position is no longer PendingEscrow under this specification. It requires a distinct, explicit ownership/recovery model before any execution-conformance claim. This revision does not design that workflow. A timeout cannot reverse an investment, create liquidity or bypass a downstream operator's permissions. Retain the actual state and rights in the read view; do not label the position fully refundable or funded merely to fit a common enum.

CTVS-2 / MANAGED EXTENSION BOUNDARY • NOT A PROFILE-0 WORKFLOW

## Committed downstream is no longer pending escrow



An operator notice or timeout cannot reverse a completed investment or manufacture liquidity.  
The extension must specify the rights at every intermediate state.

**Figure 8:** Deploying pending assets creates a different ownership state. Accepted in-flight assets cannot continue to be described as fully refundable escrow; the extension must define loss, cancellation, unwind, valuation, and recovery rights.

### 10.4 Leverage and multi-step positions

A looping strategy may need several distinct transactions to borrow, exchange, and redeposit. CTVS does not promise an atomic loop or an exact completion time. The manager's intermediate custody, debt, and risk limits must be accounted for in the chosen managed profile.

The common vault interface exposes the resulting share exposure and availability; it does not erase downstream liquidation, oracle, permission, or settlement risk. A standardized share asset is not automatically suitable collateral for another lender.

### 10.5 Managed acceptance cannot be inferred from a direct trace

Before any managed-profile conformance claim, implement one real permissioned lifecycle against a pinned target protocol: deposit admission, allocation, authenticated position custody, debt and fee recognition, accepted valuation, liquidity realization, redemption and stage-specific recovery. Script-controlled user authorization requires its own real guard and successor tests. Downstream operators need not become permissionless; evidence must establish the permissions that actually exist. [REGISTER, WIRE]

## 11. Deferred features and bounded compatibility

### 11.1 Features outside the initial execution variants

| Feature                                                          | Current decision | Requirement before enabling it                                                                    |
|------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------|
| Multi-batch epoch pricing                                        | Deferred         | Authenticated rate/eligibility, capacity consumption, participation timing and residual treatment |
| Partial fills                                                    | Deferred         | Original request identity, cumulative bounds/fees, remaining ownership and cancellation           |
| Pre-pricing investment or unfunded withdrawal tickets            | Deferred         | Actual interim exposure, liability and recovery state machine                                     |
| Arbitrary routes, claim-and-redeposit and cross-vault settlement | Deferred         | Executed complete authorization/allocation across the actual script family                        |
| Transferable claim rights                                        | Deferred         | Explicit ownership transfer, replay protection and funded delivery semantics                      |

No sample algorithm in this revision is a substitute for those specifications. The eight-field reference RequestBody contains no optional epoch, partial-fill, bearer-right or generic capability fields. Its opaque economic-body boundary exists to preserve fixed recovery, not to authorize arbitrary module interpretation.

### 11.2 Inventory accounting is a common mapping obligation

A native inventory implementation must derive  $S = N - I_s$  from authenticated economic issuance and extinction. Pending-redemption shares and issued claim shares participate; they are not unissued inventory. The common gross obligation checks still apply even when no native mint occurs. The internal inventory arrangement and replenishment are implementation-specific, but their conservation and authorization require a concrete mapping and evidence. Profile 0 remains mint/burn. See CTVS-1 Section 5.3.

### 11.3 Direct delivery is not generalized routing

The narrow `delivery_at_settlement` variant is specified in Section 7.4 rather than grouped with an open-ended routing framework. It replaces an intermediate claim with the exact final output only after preserving complete accounting, authorization and attribution. It neither relaxes the profile-0 transaction family nor enables spending the receiving script in the same transaction without a separately proved composition.

### 11.4 Existing terms and user property remain protected

Native governance/update mechanisms need not copy an immutable configuration lock. They must authenticate who can update what and bind each pending request to the applicable terms or a precisely bounded authorized update rule. No silent increase of fees, receiver substitution, asset substitution or deterioration of a committed recovery right is acceptable. Funded claims remain allocated property and cannot be repriced by migration. The implementation must expose operator/manager changes affecting availability. Profile 0's immutable terms and no-close policy remain unchanged; no generic governance framework is added.

## 12. Wire schema and infrastructure interface

### 12.1 One shared primitive specification; exact async records

CTVS-1 Section 10.1 is the authoritative definition of `Credential`, `Option`, supported `Address`, `Destination`, `Asset`, `OutRef`, key-only `Controller` and `Settlers`, including bounds and datum variants. It is not duplicated here. `C(t, [...])` means Plutus constructor `Data`, not a JSON object or CBOR major type. The reference magic is bytes CTVS; its wire integer remains 2 and profile remains 0.

The following exact `Request/Recovery/Claim` records remain normative **for that reference encoding**. The native conformance route in CTVS-1 Section 2.5 requires a separately versioned, authenticated mapping of another implementation's bytes. It does not permit reinterpretation of these records or profile 0's claim-only disposition. Shared candidate files remain byte-identical to v0.5, including their commitment domain. [WIRE-DATA, REV-CHECKS]

### 12.2 Exact Recovery, Request and RequestBody

```
Recovery = C(0,[
  vault_policy, controller, refund_destination, deadline_posix_ms
])

Request = C(1,[
  magic, wire_version, recovery, economic_body
])

RequestBody = C(0,[
  terms_hash, kind, offered, minimum_output, receiver,
  storage_lovelace, execution_budget, settler_fee
])

kind = C(0,[])          -- exact-gross deposit
      | C(1,[])          -- exact-share redemption
```

The `Request` has exactly four fields. `Recovery` has four fields, and the supported economic body has eight. The body's type in the outer envelope is **Data**, not an eagerly validated `RequestBody`. Full-fill behavior, snapshot pricing, funded-claim delivery, and carry-to-receiver storage policy are fixed by profile 0 rather than represented by unconstrained strings.

The recovery branch validates the outer version and recovery structure, then the required authority/time condition and entire-value refund. It does **not** first validate economic kind, positive amount, success receiver, fee budget, terms equality, or current state. Thus an economic body with an unsupported constructor can fail settlement while remaining refundable under a supported envelope.

Do not implement this by fully deserializing a typed economic request before dispatching on `Cancel`. In an Aiken handler, accept the appropriate raw `Data` boundary and perform the recovery projection before economic downcasting. The uncompiled type declaration uses `economic_body`: `Data` explicitly. It still requires the compiler/entry-point gate. [VALIDATOR]

For settlement, additionally require the expected vault and terms; supported kind/mode; positive offered and minimum output; exact value funding; `settler_fee <= execution_budget`; and full fulfillment. Native deposit value is  $d$  units of  $u$  plus  $R_{\text{user}} + B_{\text{user}}$  ADA. ADA deposit value is  $d + R_{\text{user}} + B_{\text{user}}$  lovelace. Redemption value is  $r$  shares plus  $R_{\text{user}} + B_{\text{user}}$  ADA. No other native assets enter this closed settlement shape.

The request's own originating transaction hash does not appear in its datum. Its identity is the created output reference, learned after transaction construction. The controller need not be the funding owner or success receiver. A candidate request naming somebody does not prove they initiated it.

### 12.3 Exact Claim and creation semantics

```
Claim = C(2,[
  magic, wire_version, vault_policy,
  request_ref, state_ref, terms_hash,
  asset, economic_quantity, receiver, carried_lovelace
])
```

Exactly ten fields are required. `request_ref` and `state_ref` refer to consumed predecessors. Neither is the creating claim transaction ID. The actual creating transaction and output index are external identity, preventing a self-reference in construction.

At settlement, the asset and quantity are derived from the request and old state. Carried ADA is:

$$R_{\text{user}} + B_{\text{user}} - e_{\text{user}} + t_{\text{external}} \quad (12)$$

An ADA claim holds economic quantity plus carried ADA; a token claim holds the exact token quantity plus carried ADA. Legitimate creation has no unexplained surplus. Delivery preserves **all actual input value**, including voluntary top-ups in look-alike outputs, not only the declared quantity.

The shared claim validator requires no vault state, config, current NAV, or settler availability. Authentic settlement lineage is an indexer obligation unless a separately specified beacon provides local authentication. A claim-looking output does not prove a vault issued a receipt; it only exposes the guard governing the property actually locked there.

### 12.4 Exact execution envelopes and deterministic lists

```
StateRedeemer   = C(0,[magic,wire_version,StateAction])
RequestRedeemer = C(1,[magic,wire_version,RequestAction])
ClaimRedeemer   = C(2,[magic,wire_version,ClaimAction])
MintRedeemer    = C(3,[magic,wire_version,MintAction])

Batch = C(4,[state_output,entries,reward_key,Option<output_index>])
SettleEntry = C(0,[OutRef,claim_output,claim_topup])
RequestAction = C(0,[state_ref])      -- acknowledge Batch state spend
              | C(1,[refund_output]) -- controller cancellation
              | C(2,[refund_output]) -- expiry refund
ClaimAction = C(0,[entries])
DeliverEntry = C(0,[claim_ref,receiver_output])
MintAction = C(0,[config_output,state_output]) -- genesis
            | C(1,[state_ref])                -- nonzero supply update
```

State's direct, fee, pause and reserve action tags/fields are defined in CTVS-1 Section 10.4. Lists contain 1..16 entries, with settlement further bounded by `Terms.max_batch`; out-references are unique and lexicographically ordered. Indices are bounded integers checked against actual transaction arrays. Every consumed Q claim uses the same semantic delivery list; every consumed P request uses an acknowledgment to the selected authentic state. All amounts

are recomputed; entry.topup is external carried ADA only. Profile 0 adds no optional capability continuation or authoritative quoted totals.

## 12.5 Shared encoding rules and recovery boundary

CTVS-1 Sections 10.5–10.7 are authoritative for semantic Data equality, original versus reserialized bytes, the fixed commitment domain, recursive opaque-data limits, candidate size bounds and the remaining builtin/independent-decoder gate. They apply unchanged to the exact records here. Lists, references, amounts and their aggregates must satisfy both schema bounds and the actual transaction context.

Recovery deliberately does not first validate the complete economic body. Unknown outer versions and malformed refund/controller envelopes retain no implicit rescue path. The preserved guards reject attached reference scripts and unsupported datum/address forms under profile 0; a native mapping must explicitly specify its own accepted forms and exact destination semantics. Source-level publication cleanup must not change signed transaction bytes or on-chain commitments. [WIRE-DATA, REV-CHECKS]

## 12.6 Common request/claim response contract

Use CTVS-1 Section 13's common envelope and value-state rules, not a second transport or provider standard. For every request, the async response additionally identifies original request ID, observed source reference, native/reference implementation binding, applicable terms, controller and execution authority, economic receiver and refund destination, offered property, user bound, fee/storage partition and deadline.

| Field group     | Required interpretation                                                                                                 |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|
| Lifecycle       | pending_escrow, claimable, delivered, settled_delivered, refunded or explicit unsupported native state                  |
| Participation   | Whether offered/issued shares still participate and whether deposit assets have become backing                          |
| Recovery        | Exact controller/expiry conditions and fixed entitlement; supported, unavailable, unknown and unsupported are distinct  |
| Delivery        | funded_claim or delivery_at_settlement, committed before execution; a native mapping cannot rewrite a profile-0 request |
| Pricing         | Actual settled basis or explicitly indicative future estimate; never a reservation implied by an API response           |
| Realized output | Correct asset and quantity, reserve owner, transaction/output references and authenticated lineage                      |

A claimable response requires actual funded property and verified settlement lineage. A pending estimate cannot populate a realized amount. Direct-at-settlement completion records final outputs once and no intermediate claim. Economic input, carried ADA, refundable budget and execution charge retain their distinct meanings, even when the native representation combines fields.

An unknown outer recovery envelope, an unsupported controller, invalid economics with a valid recovery envelope, a paused settlement and unavailable liquidity must be distinguishable. A supported refund is not a guarantee that an arbitrarily large malformed input fits a transaction. A hosted builder's statement of conformance is evidence to verify, not authority. Initial machine-checkable examples are in integration/; they are publication fixtures, not deployed responses.

## 12.7 Authentic lineage and rollback

Derive originating request IDs after creation; derive claim IDs from the creating settlement transaction. Authenticate genuine claims by accepted state/request/claim lineage, not a plausible datum alone. A look-alike can lock voluntarily supplied property without representing a vault liability. No per-request NFT is required by this profile.

Snapshots must refer to a single chain point. Keep freely held shares, pending-redemption shares, issued-but-unclaimed shares, pending deposits and fixed asset claims distinct. Reversing a settlement removes its authentic claimable result and restores a request only if present on the replacement history. Reversing delivery alone restores the unspent claim. Mempool observations are provisional. The model's projected rollback does not establish production-indexer replay. Independent construction and indexing remain acceptance gates. [WIRE, SEMANTIC]

## 13. Formal properties and proof sketches

### 13.1 At-most-once transition

A pending request is an ordinary UTxO. Settlement, cancellation, and expiry refund all consume that same output reference. Under ledger no-double-spend validity, at most one such transition can occur on a single accepted history. A claim's delivery similarly consumes its unique output. An indexer must apply this property per chain history and undo orphaned transitions on rollback.

This is not sufficient by itself: each spending branch must still enforce its complete output obligations and disallow unauthorized alternative paths.

### 13.2 Ownership conservation

This argument applies both to a funded-claim settlement and to the Section 7.4 direct-at-settlement variant. In the latter, the economic result is already at the final receiver; omit the intermediate claim/delivery step and do not count another supply or backing change. The remaining formulas use the Section 5 snapshot algorithm.

For deposits, creation and refund do not change  $A$  or  $S$ . Settlement admits  $n_i$ , accrues  $f_i$ , and issues  $q_i$  to the committed final destination or funded claim, according to the supported variant. Any later claim delivery transfers  $q_i$  without issuance. For redemptions, creation locks  $r_j$  without reducing  $S$ ; settlement removes  $g_j$  from backing, accrues  $h_j$ , extinguishes  $r_j$ , and allocates the fixed  $w_j$  to the final destination or funded claim. Any later claim delivery transfers that same fixed  $w_j$ .

Consequently, settlement is the sole economic participation boundary. Delaying claim delivery cannot create extra supply or reallocate NAV between the claimant and remaining shareholders.

### 13.3 Snapshot batch rounding

Let successor adjusted balances be  $X_1 = X + \sum n_i - \sum g_j$  and  $Y_1 = Y + \sum q_i - \sum r_j$ . When the validated successor is feasible and  $Y_1 > 0$ :

$$YX_1 - XY_1 = \sum_i (n_i Y - q_i X) + \sum_j (r_j X - g_j Y) \geq 0. \quad (13)$$

Each term is nonnegative by the floor definitions. Hence  $X_1/Y_1 \geq X/Y$  for this batch under unchanged external valuation. Rounding does not dilute the adjusted price of the remaining pool. This is not a theorem about truthful NAV, future investment returns, or optimal batch selection.

### 13.4 Fully funded claim independence

This property applies only when a funded claim is created. Direct-at-settlement completion has no later claim to deliver and therefore requires evidence of the actual final payment instead.

If settlement places the exact promised quantity in a claim and its only valid spend transfers that property to its immutable destination, delivery does not require the vault's solvency at that later time. The claim's asset itself may have external risks; this property concerns allocation, not market value or issuer behavior.

The reference delivery script's common input domain and exhaustive injective mapping are essential. Without them, two claim inputs could independently count one payout and violate the claim-level conservation argument.

### 13.5 Conditional liveness

Under an available network, valid transaction funding, and the advertised controller proof, a still-pending reference request can be cancelled; after expiry, fixed refund requires no controller or batcher authorization. A funded claim can be delivered without either. These are conditional construction properties, not guaranteed inclusion times.

No unconditional settlement liveness follows from an authorized operator set. No immediate exit follows from positive managed NAV. Downstream liquidity, permissions, and oracle availability remain explicit assumptions.

### 13.6 Recovery noninterference and complete branch coupling

Conditional recovery independence: after supported outer/Recovery decoding, fixed refund eligibility must not depend on interpretation of `economic_body`. Changing a body to unsupported Data cannot change the immutable refund destination or give custody to a settler. The handler must reach the recovery branch before economic downcasting; this property remains subject to outer-version validity and actual transaction resources.

Conditional batch completeness: exact set equality, unique entries, and purpose-bound acknowledgments in both directions prevent consumed Requests from being silently ignored or treated as cancellation and settlement simultaneously. They do not alone establish prices, funding or mint. All those obligations must hold for the same covered set.

Conditional exclusive delivery: when every Q claim validates the same exhaustive entry list, allocations are disjoint, destinations match and each output preserves its source's full value, one payout cannot satisfy two claims in that domain. This is not a proof for foreign script inputs excluded by the profile. The local boundary primitives test selected parts; a complete multi-handler implementation and refinement proof remain outstanding. [WIRE]

### 13.7 Direct delivery does not remove an economic obligation

Let the funded-claim transaction allocate request  $i$  economic value  $v_i$  and carry  $c_i$  to its claim output. A permitted direct variant replaces that output with the same protected value at the committed final destination and removes only the intermediate claim datum/guard. Its state, fee and supply deltas are unchanged. Hence value balance is preserved by substitution, but safety additionally requires native authorization of the disposition, recipient/datum verification and complete non-overlapping allocation. Arithmetic substitution alone proves no validator accepts it. Section 7.5's example exercises this limited value identity, not the missing compiled obligations.

## 14. Economics, scalability, and risk disclosure

### 14.1 Costs and budgets

For  $m$  requests, an illustrative batcher reward is  $\sum_{u=1}^m e_u$ . Its realized operating margin depends on network fees, external minimum-output top-ups, infrastructure cost, failed submissions, and opportunity cost. The standard neither fixes profitability nor promises a competitive operator market.

Per-request ceilings can make splitting more expensive, and batch selection can favor requests with higher economic value to the operator. A fixed reward avoids an unbounded fee grab but does not prove fairness or availability. The user must see economic asset fees separately from ADA execution budgets and storage.

Cancellation and fixed delivery have zero protocol reward in the reference profile. Their submitter funds the network transaction. This removes a reward-theft surface but does not subsidize user recovery.

### 14.2 Throughput and resource limits

Requests can be created independently, while settlement still updates shared accounting. Practical batch size is limited by transaction bytes, execution units, output count, datum sizes, authority witnesses, and current ledger parameters. No fixed transactions-per-second or requests-per-batch figure is asserted.

A release must benchmark increasing batch sizes and worst-case destinations. A provider must not assume every request can fit in a batch merely because its economic minimum is satisfied. Oversized required data must be rejected at the schema boundary, not discovered only after a user has irrecoverably locked funds.

### 14.3 Material risks

| Risk                                      | Required protection or disclosure                                            |
|-------------------------------------------|------------------------------------------------------------------------------|
| Authorized operator censors or disappears | Pending refund and independent claim delivery; no invented forced settlement |
| False or stale NAV                        | Accepted report sequencing, interval checks, and explicit reporter trust     |
| Same output counted twice                 | Complete allocation plus a closed/common verification domain                 |
| Budget or reserve theft                   | Separate value partitions and exact success/refund destinations              |
| Claim created without funds               | Actual value check before authentic claimable status                         |
| Rounding/fragmentation abuse              | Per-request full-fill arithmetic; partial fills disabled                     |
| Terms changed after commitment            | Immutable binding or separately defined protected update rules               |
| Spoofed request or claim                  | Validate value/shape and authenticate economic lineage                       |
| Downstream execution failure              | Explicit managed/in-flight state; real recovery assumptions                  |
| Chain rollback                            | Reversible lifecycle indexing at identified chain points                     |

Compliance with the standard describes an interface and its enforced economic properties. It is not a universal safety rating for an investment strategy.

## 14.4 Actual size, encoding and signatory constraints

The wire candidate defines finite structural limits, including 1..16 entries and bounded nested recipient data; it does not benchmark a practical batch size. The representative Request/Claim fixture sizes of 310/311 bytes are datum sizes only. Complete serialized outputs, witness/reference scripts, quantities, fees, collateral, required keys and validity intervals determine actual feasibility. Top-ups can change encoding length and require iteration. [WIRE-EVID, MINADA]

Do not infer authorization from the presence of a funding witness where the validator checks explicit required signatories. Do not normalize signed transaction CBOR and keep its old ID. A future zero-withdrawal or capability optimization must explicitly revise the execution profile rather than silently bypass current restricted-purpose rules. [WIRE, TX]

## 15. Validation and release requirements

### 15.1 Required evidence

This is the concrete reference-profile acceptance matrix. A native implementation must prove the corresponding common obligations through its Section 2 mapping, not reproduce the reference factory or every reference-local mechanism. Native direct delivery must additionally satisfy its own variant requirements; claim-only tests apply to the funded-claim path. Evidence for one construction cannot be transferred by analogy to another.

| ID   | Requirement                                        | Required tests or proof artifacts                                            |
|------|----------------------------------------------------|------------------------------------------------------------------------------|
| A-01 | Independent request submission                     | Multiple creations without consuming accounting state                        |
| A-02 | Valid request values and intent                    | ADA/native/share partitions; malformed request rejection                     |
| A-03 | Key controllers; separate capability extension     | Actual key witness tests; capability guard evidence only for its own profile |
| A-04 | Full-only settlement                               | No omitted input, duplicate request, or hidden remainder                     |
| A-05 | One declared pricing snapshot                      | Mixed batch; wrong checkpoint; per-request fee rounding                      |
| A-06 | Economic/supply conservation                       | Gross issuance/redemption and zero-net-mint cases                            |
| A-07 | Complete output allocation                         | Same receiver, repeated indices, overlapping reserve obligations             |
| A-08 | Fully funded immutable claims                      | Wrong quantity/asset/datum; no repricing or mint on delivery                 |
| A-09 | Cancellation and expiry                            | Exact interval boundaries and cancel/settle races                            |
| A-10 | Permissioned settlement without custody discretion | Unauthorized operator; authorized but economically invalid transaction       |
| A-11 | Independent fixed delivery                         | Batcher/controller offline; multi-claim output uniqueness                    |
| A-12 | Coherent NAV and liabilities                       | Stale unspent report, overlapping holdings, and missing post-report flows    |
| A-13 | Rollback-aware lifecycle                           | Settlement rollback; delivery-only rollback; competing branch replay         |

| ID   | Requirement                  | Required tests or proof artifacts                                      |
|------|------------------------------|------------------------------------------------------------------------|
| A-14 | Bounded execution            | Measured worst-case batch sizes, datums, reserves, fees, and witnesses |
| A-15 | Independent interoperability | Two decoders/builders/indexers agree on the same transaction histories |

## 15.2 Recorded evidence and this revision's checks

Both papers refer to one shared evidence record in `docs/CTVS-Validation-Evidence.md`; the historical results are not new runs and are not additive across the papers. They cover bounded economic/semantic checks and separate candidate-codec/link checks, not a complete compiled validator. Tests and models share an author; two languages do not establish independent review. [EVIDENCE]

Revision 0.6 additionally checks byte-for-byte preservation of the four candidate-wire files; unchanged reference fee/conversion examples; the budget reparameterization and direct-delivery value substitution; required response examples and deliberately invalid schema fixtures; document references and rendered layout. Arithmetic/source/schema results are in `checks/revision-results.json`; render/preflight results are in `checks/pdf-qa.json`. These are publication/schema/arithmetic checks, not native-protocol, ledger, resource or security-certification evidence. No newly proposed native delivery or script-controller mapping is recorded as implemented.

Every compiled-validator and ledger gate remains blocked. The exact old result counts and recorded provenance are consolidated once rather than repeated here. Request/claim/direct effects still need a jointly enforced implementation, and authentic initial identities remain premises until compiled genesis is demonstrated.

## 15.3 Required model-to-validator refinement

Let  $\alpha(T)$  project a real transaction and its resolved ledger context into the specified semantics. The soundness target is:

$$\begin{aligned} & \text{LedgerPrerequisites}(T) \\ & \wedge \text{CompiledValidatorsAccept}(T) \\ & \implies \text{CTVSRequirements}(\alpha(T)). \end{aligned} \tag{14}$$

Define every projection: own script purpose, ordinary versus reference inputs, credential nesting, actual datum variants, required signatories, mint, auxiliary era fields, time bounds, source references and output indices. Decoding bytes and passing amounts into the semantic model by hand is not that refinement proof.

Constructive success is also required: each advertised supported operation has a valid, resource-feasible, ledger-accepted transaction with the intended effect. Reject-everything scripts are not conforming. Negative cases must fail for the intended semantic reason; phase-1-invalid witnesses must not mask missing phase-2 payout checks.

## 15.4 Compiled end-to-end acceptance trace

The trace below validates the specified **reference construction**. A native mapping supplies its own equally explicit deployment, operation and recovery trace under its actual scripts and custody assumptions; it is not required to deploy `F_lock` or `Q_claim`.

```

authenticated F_lock / Q_claim / per-vault T build and genesis
-> direct deposit with exact State/Config/Terms
-> independent deposit and redemption Request(Recovery,Data)
-> purpose-bound permissioned Batch, including zero-net mint
-> funded Claim creation and fixed delivery to key/script destinations
-> cancellation/expiry with invalid economics and batcher unavailable
-> fee collection and state-reserve top-up
-> independent construction, authentic lineage and rollback replay

```

Run the same trace against malformed encodings, equivalent Data encodings, wrong-role datums, substituted config, wrong-branch acknowledgments, omitted/duplicate requests, output reuse, balanced theft, stale references and forbidden auxiliary actions. Confirm the pinned builtin's commitment bytes and actual ledger datum/hash behavior. Record full transaction bytes, outputs, witnesses, fees, collateral/return, minimum ADA and CPU/memory under a named protocol-parameter snapshot.

The baseline recorded in the repository is Aiken v1.1.22, standard library v3.1.0 and Plutus V3. This identifies the intended baseline, not the latest tooling or a successful compilation. Pin the ledger implementation and network parameters as well. [SEMANTIC, TX]

## 15.5 Profile-specific and independent-integration gates

A managed-profile claim additionally requires a concrete permissioned position lifecycle with exact custody, liabilities, accepted NAV basis, liquidity realization and real recovery permissions. A script-controller claim requires actual guard/purpose/domain and successor tests. Neither follows from direct-custody or key-only evidence.

A second builder must construct from authenticated public data without calling the first builder's construction implementation. Separate decoder expectations and a separate indexer must agree on transactions, exact fields, origin attribution and rollback. Two wrappers around one library or two codecs by the same author are not independent external validation.

The shared evidence register records local evidence without clearing any compiled-validator or ledger gate. The reference wire remains a candidate. Publishing this document does not update GitHub, deploy a contract, or certify production security.

## 16. References

The v0.5 source basis is retained. ERC-4626, ERC-7540 and CIP-57 were rechecked on 11 September 2026 for their interface context; no fresh contract or deployed-protocol audit was performed. New scope, mapping and delivery requirements are CTVS proposals, not claims of SundaeSwap conformance. Proposed state machines, equations, schemas, profiles, and examples are CTVS design content unless explicitly attributed. Protocol examples describe published architecture, not a certification of current deployed scripts.

[R1] Steer Protocol. Cardano Tokenized Vault Standard, reviewed repository. <https://github.com/SteerProtocol/cardano-tokenized-vault-standard/tree/f5f782de9ba6a7bf6cbb8213995a31734888559c>

[R2] CTVS architecture-hardening review, 8 September 2026. User-provided planning artifact, CTVS-architecture-and-validation-review.md.

[1] ERC-7540: Asynchronous ERC-4626 Tokenized Vaults. <https://eips.ethereum.org/EIPS/eip-7540>

[2] ERC-4626: Tokenized Vaults. <https://eips.ethereum.org/EIPS/eip-4626>

[3] Cardano CIP-31: Reference inputs. <https://cips.cardano.org/cip/CIP-0031>

- [4] Cardano CIP-55: Protocol Parameters (Babbage Era). <https://cips.cardano.org/cip/CIP-0055>
- [5] SundaeSwap. Published contract architecture. <https://github.com/SundaeSwap-finance/sundae-contracts>
- [6] Minswap. AMM V2 specification. <https://github.com/minswap/minswap-dex-v2/blob/main/amm-v2-docs/amm-v2-specs.md>
- [7] Cardano CIP-89: Distributed DApps and Beacon Tokens. <https://cips.cardano.org/cip/CIP-0089>
- [8] Cardano CIP-57: Plutus Contract Blueprint. <https://cips.cardano.org/cip/CIP-0057>
- [9] Companion whitepaper. CTVS-1 — Synchronous Tokenized Vaults on Cardano, revision 0.6, 11 September 2026.
- [PRIOR1] CTVS-1, revision 0.3, supplied main whitepaper, 9 September 2026.
- [PRIOR2] CTVS-2, revision 0.3, supplied main whitepaper, 9 September 2026.
- [SEMANTIC] CTVS semantic transaction model and economic review. Scope, findings, and limitations are summarized in docs/CTVS-Validation-Evidence.md. Recorded baseline: 8 September 2026.
- [SEMANTIC-EVID] CTVS semantic verification evidence. evidence/semantic-results.json and the accompanying validation-evidence summary. Bounded symbolic/economic results; not compiled-validator or ledger evidence.
- [REGISTER] CTVS implementation assurance requirements, REQ-01 through REQ-14. docs/CTVS-Validation-Evidence.md and evidence/assurance-register.json retain a BLOCKED disposition for every implementation gate.
- [WIRE] CTVS wire-format and eUTxO specification, candidate CTVS-WIRE-2. Recursive layouts and transaction obligations are integrated in CTVS-1 Section 10 and CTVS-2 Section 12; supporting evidence is summarized in docs/CTVS-Validation-Evidence.md.
- [WIRE-DATA] CTVS-WIRE-2 candidate artifacts: candidate-wire/schema.json, wire.cddl, golden.json, and types.ak. Type declarations are uncompiled; candidate bytes have not been certified against the Plutus builtin.
- [WIRE-EVID] CTVS wire-format verification evidence, evidence/wire-results.json. Local codec/schema and selected boundary checks; not a complete economic validator. Scope and counts are recorded in the accompanying evidence summary.
- [CIP31] Cardano CIP-31, Reference Inputs. <https://cips.cardano.org/cip/CIP-0031>
- [CIP32] Cardano CIP-32, Inline Datums. <https://cips.cardano.org/cip/CIP-0032>
- [TX] Aiken standard library v3.1.0, cardano/transaction.ak. Recorded blob 12f8ec80fdfe6c9976d63f3bb701f4fd525d3ec3. <https://github.com/aiken-lang/stdlib/blob/v3.1.0/lib/cardano/transaction.ak>
- [ADDR] Aiken standard library v3.1.0, cardano/address.ak. Recorded blob 0167b90fbdb4ad063db2725c44023f8d0bab42d6. <https://github.com/aiken-lang/stdlib/blob/v3.1.0/lib/cardano/address.ak>
- [SER] Cardano CIP-42, serialiseData. <https://cips.cardano.org/cip/CIP-0042>
- [PLUTUS] IntersectMBO Plutus, PlutusCore/Data.hs. Recorded source blob: a994354fb3c87a55ed6d1b4b6b544c7cd94c1c60. <https://github.com/IntersectMBO/plutus/blob/master/plutus-core/plutus-core/src/PlutusCore/Data.hs>
- [MINADA] Cardano CIP-55, Protocol Parameters (Babbage Era). <https://cips.cardano.org/cip/CIP-0055>
- [BLUEPRINT] Cardano CIP-57, Plutus Contract Blueprint. <https://cips.cardano.org/cip/CIP-0057>
- [VALIDATOR] Aiken, Validators. <https://aiken-lang.org/language-tour/validators>
- [PATTERNS] Aiken, Common Design Patterns. <https://aiken-lang.org/fundamentals/common-design-patterns>

[BASE05] CTVS-1 and CTVS-2 revision 0.5, 9 September 2026, and the accompanying public source bundle. Direct editorial/technical baseline for this revision.

[WG] Cardano Vault Standard Working Group Kickoff, supplied transcript. In particular the opening discussion of avoiding unnecessary contract changes; the lending share-rate discussion; and the native-order/datum and controller discussion. Meeting statements are design input, not verified deployed behavior.

[REV06] Agreed scope review in the project conversation and docs/CTVS-v0.6-Change-Map.md. New recommendations are incorporated as expressly scoped proposal changes.

[REV-CHECKS] Revision 0.6 publication/arithmetic/schema checks, checks/verify\_revision.py and checks/revision-results.json. Not compiled-validator or ledger evidence.

[EVIDENCE] Shared docs/CTVS-Validation-Evidence.md and recorded evidence/ artifacts. Carries historical results with their original limitations and records this revision's separate checks.

## Appendix A. Revision boundary and delivery checklist

| Decision from the scope review                           | Result in revision 0.6                                                        |
|----------------------------------------------------------|-------------------------------------------------------------------------------|
| Preserve exact UTxO/datum hardening                      | Profile-0 reference construction and all candidate-wire files retained        |
| Stop treating one construction as universal              | Common guarantees separated; native-format conformance now explicit           |
| Avoid new transcript/module/permission frameworks        | None required by this revision                                                |
| Keep economic supply and user-bound mathematics          | Retained; native inventory/fee rules require precise mappings                 |
| Support script-controlled protocol users                 | Concrete acceptance target, not a fictitious key-only success claim           |
| Avoid mandatory intermediate claim for every native flow | Bounded direct-at-settlement semantic variant added outside profile 0         |
| Consider budget simplification                           | Algebra checked; existing fields preserved, no silent wire change             |
| Trim unfinished features and duplicated evidence         | Epoch/partial-fill workflow algorithms deferred; evidence consolidated once   |
| Make invested-vault support substantive                  | One pinned managed integration is an explicit unresolved acceptance milestone |

The source bundle includes both revised Markdown papers, the unchanged reference candidate files, common response schema and examples, a revision change map, the shared evidence record, new publication checks and the PDF build tooling. `python build_pdfs.py` typesets PDFs; `python checks/verify_revision.py` runs the stated local publication/arithmetic/schema checks. Neither compiles a contract or accepts a ledger transaction. Final publication QA must inspect rendered equations, tables, headings, cross-references and links.

Document revision 0.6 does not assign an on-chain profile to a native mapping or to `delivery_at_settlement`. The reference remains CTVS-WIRE-2, wire integer 2, profile 0, with identical committed bytes. Conformance claims must name the actual implementation, supported operation and evidence; a document version alone certifies none of them.

# Reference implementation guide

Editorial companion | 23 September 2026 | pinned commit b52962987d3d

This guide connects the CTVS-1 and CTVS-2 whitepapers to the repository's reference implementation. It is an editorial companion to the illustrated revision 0.6.3. The proposed requirements, WIRE-2 encoding, profile 0, and original publication results are unchanged.

The repository contains compiled validators, client code, and signed local tests. The validation record states the limits of that evidence. The conformance review identifies client discrepancies and an incomplete common integration layer. No public-network deployment, cardano-node acceptance, independent builder or indexer, or external audit is claimed here.

The evidence and integration JSON named in the original papers are historical publication companions. For implementation status, read the pinned source code, validation record, and conformance review below.

## Start here

- [Reference workspace](#): implementation families, packages, and verification commands.
- [Validation record](#): compiled and signed local test evidence, measurements, and remaining gates.
- [Whitepaper conformance review](#): traced requirements and observed discrepancies.
- [Integration and evidence review](#): missing authenticated reader, common response layer, and rollback-aware infrastructure.

## Shared implementation

- [On-chain wire decoder](#): candidate Data decoding and field checks.
- [Client wire encoding](#): shared TypeScript wire endpoint.
- [Integer quotes](#): shared client arithmetic.

## CTVS-1 direct operations

- [CTVS-1 vault validator](#): direct operation endpoint.
- [CTVS-1 direct client](#): deposit, mint, withdraw, and redeem construction.

## CTVS-2 asynchronous operations

- [CTVS-2 vault validator](#): request and settlement endpoint.
- [Claim validator](#): funded claim delivery guard.
- [Request client](#): request construction.
- [Settlement client](#): batch settlement construction.
- [Recovery client](#): cancellation and expiry construction.
- [Delivery client](#): funded claim delivery construction.