
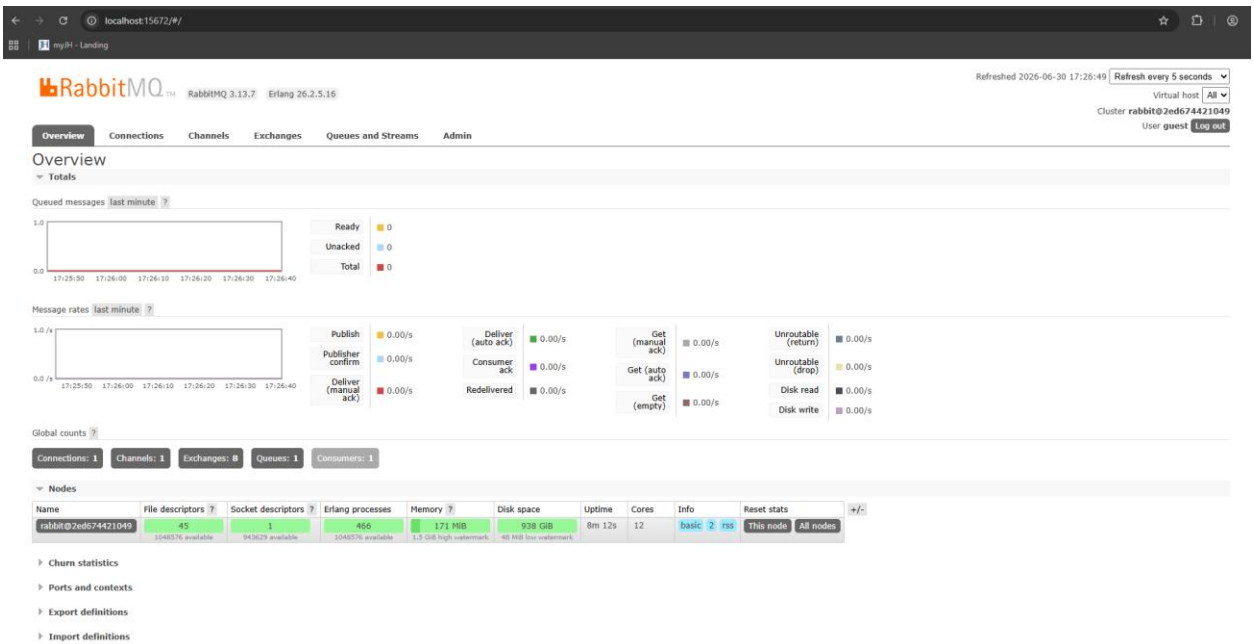


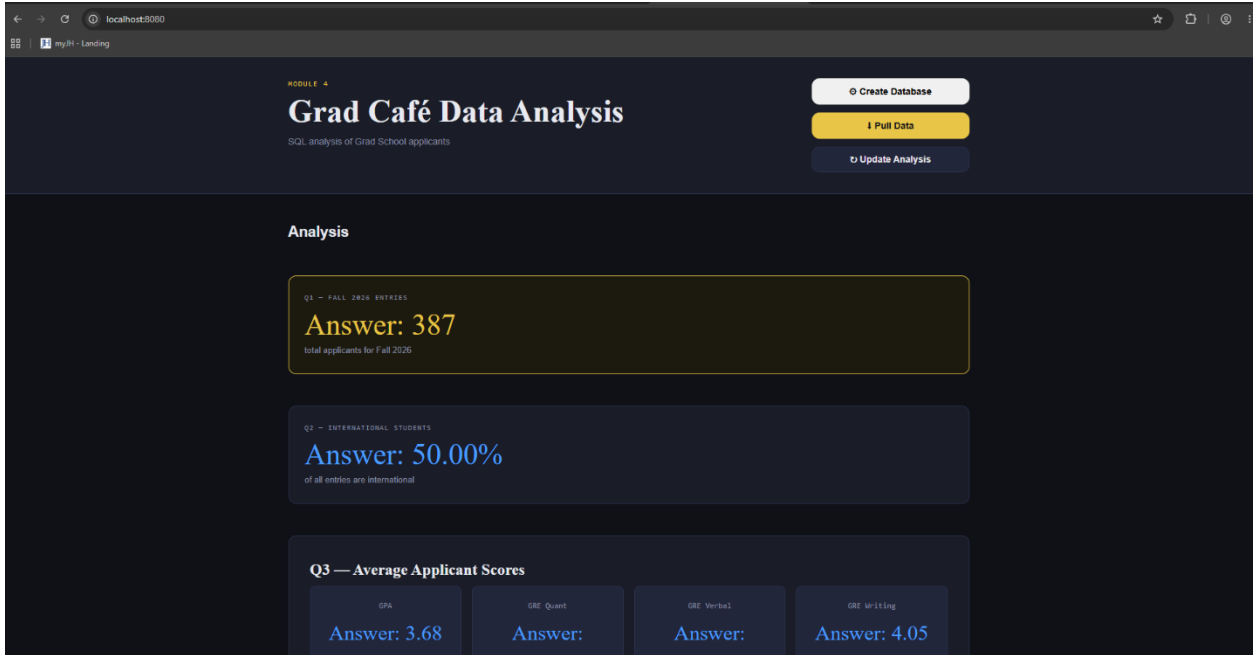

```

[...]
```

The screenshot shows the RabbitMQ Management UI. At the top, there's a navigation bar with 'Overview', 'Connections', 'Channels', 'Exchanges', 'Queues and Streams', and 'Admin'. The 'Overview' page is selected. Below the navigation bar, there's a 'Totals' section with a graph of 'Queued messages' over time. To the right of the graph, there's a summary of message rates: Ready (0), Unacked (1), and Total (1). Below this, there's a 'Message rates' section with a graph of message rates over time. To the right of the graph, there's a summary of message rates: Publish (0.00/s), Publisher confirm (0.00/s), Deliver (manual ack) (0.00/s), Deliver (auto ack) (0.00/s), Consumer ack (0.00/s), Redelivered (0.00/s), Get (manual ack) (0.00/s), Get (auto ack) (0.00/s), Get (empty) (0.00/s), Unroutable (return) (0.00/s), Unroutable (drop) (0.00/s), Disk read (0.00/s), and Disk write (0.00/s). Below the 'Message rates' section, there's a 'Global counts' section showing 1 connection, 1 channel, 0 exchanges, 1 queue, and 1 consumer. At the bottom, there's a 'Nodes' section with a table of nodes. The table has columns: Name, File descriptors, Socket descriptors, Erlang processes, Memory, Disk space, Uptime, Cores, Info, Reset state, and a toggle. The first node is 'rabbit@zede974421049' with 46 file descriptors, 1 socket descriptors, 467 Erlang processes, 171 MB memory, 938 GiB disk space, 11m 49s uptime, 12 cores, and a 'basic' info type. The 'Reset state' is 'This node' and 'All nodes'.