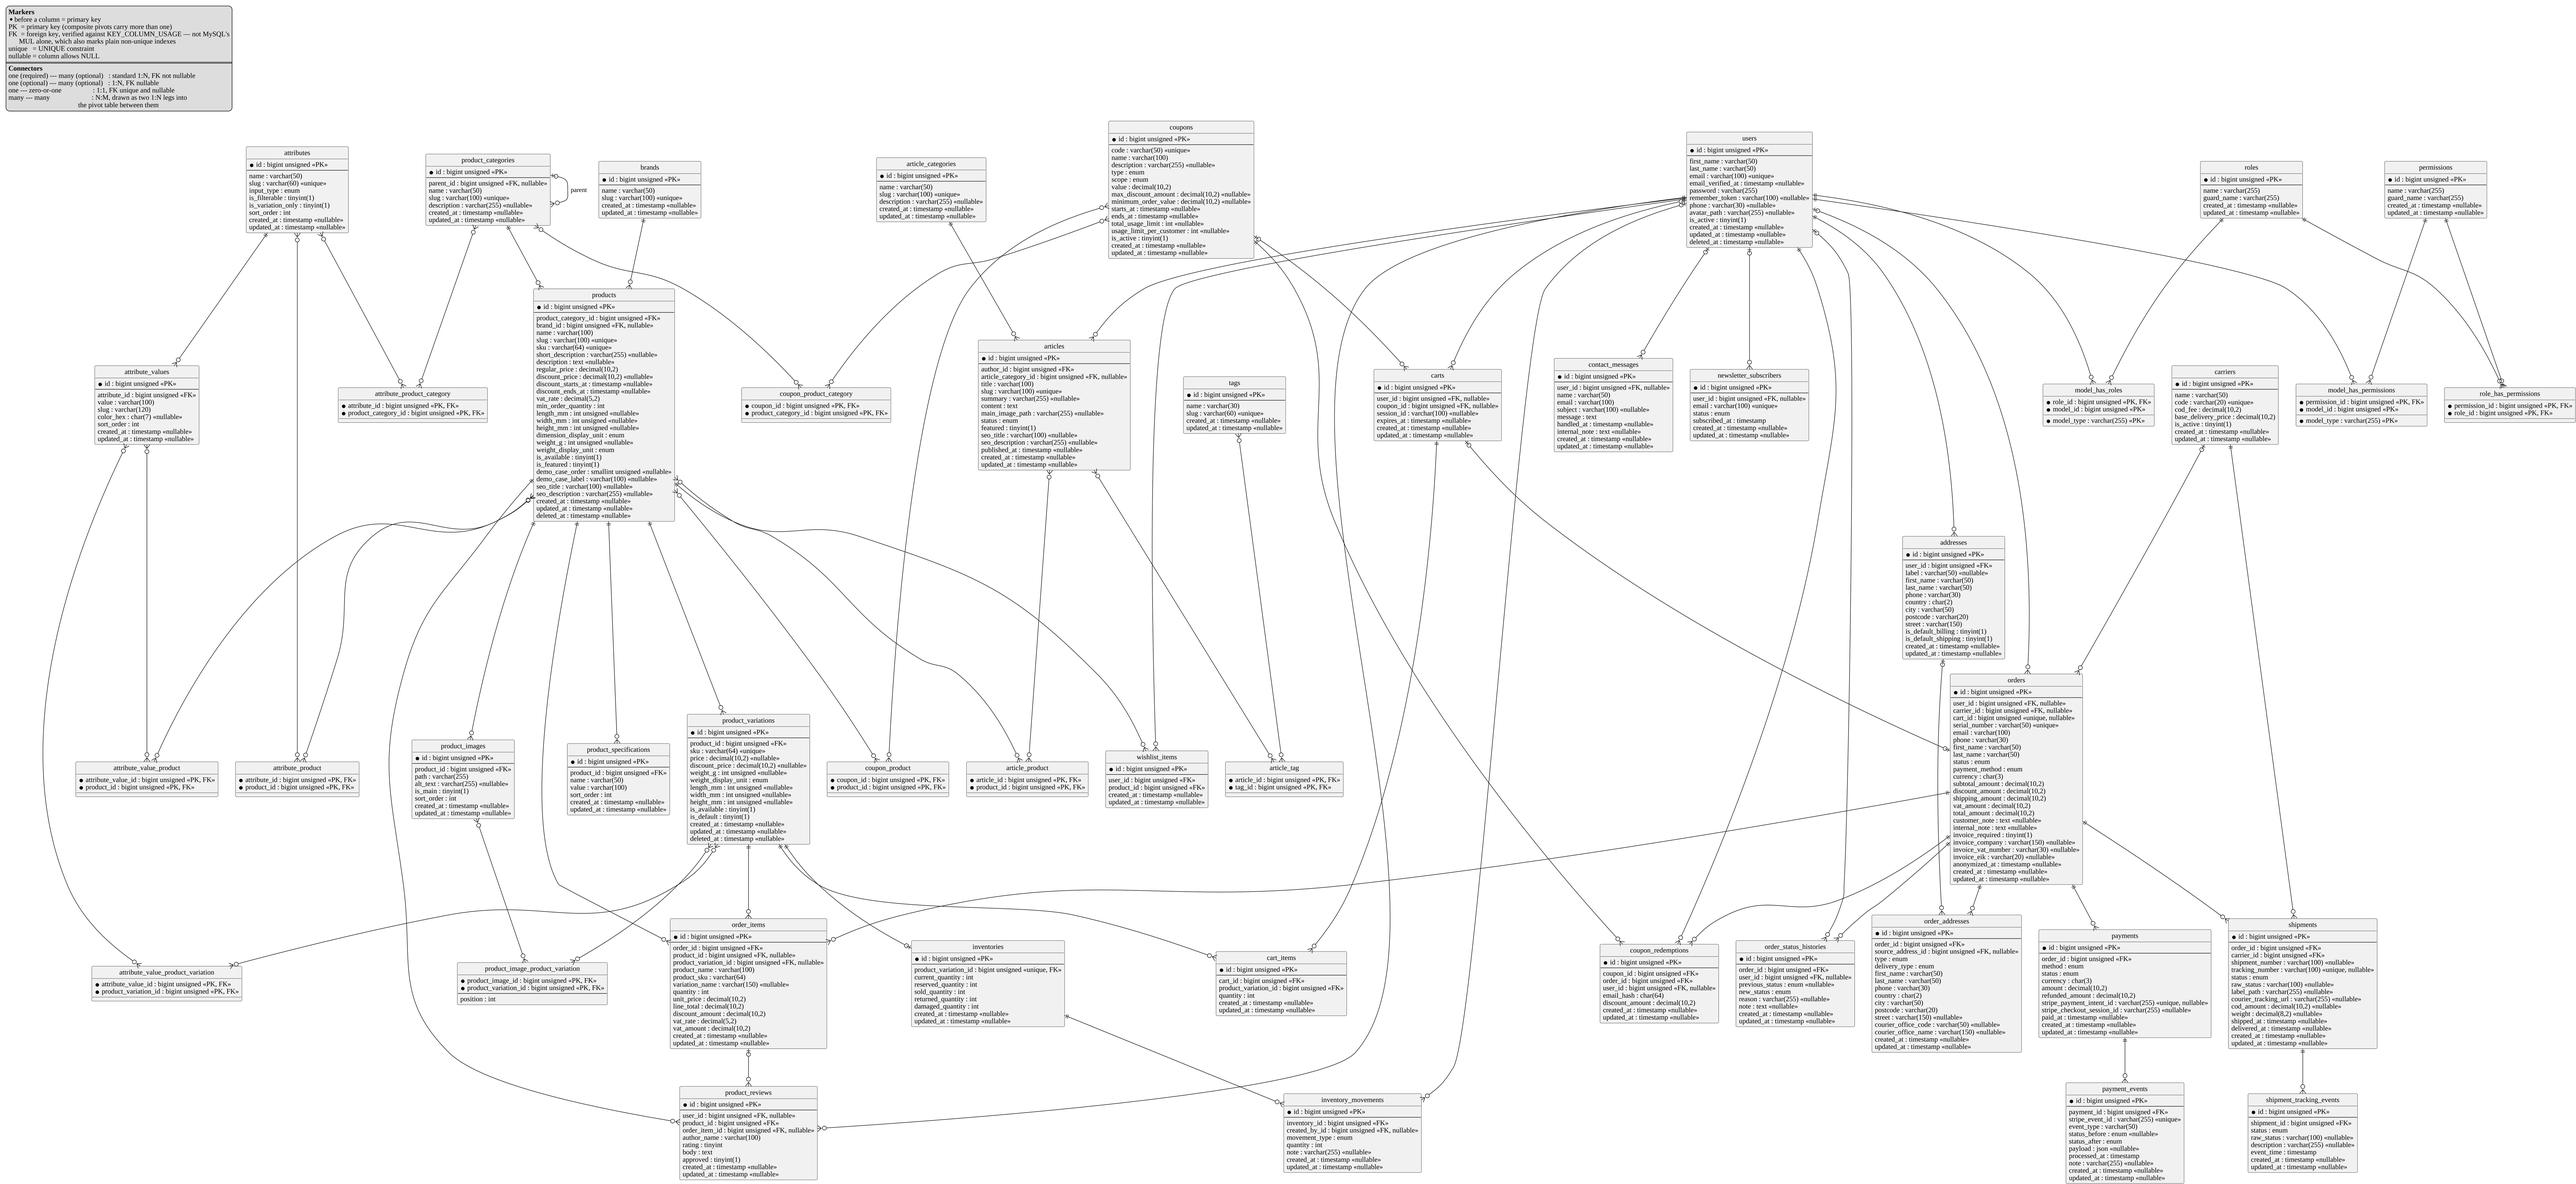

Markers
★ before a column = primary key
PK = primary key (composite pivots carry more than one)
FK = foreign key, verified against KEY_COLUMN_USAGE — not MySQL's MUL alone, which also marks plain non-unique indexes
unique = UNIQUE constraint
nullable = column allows NULL
Connectors
one (required) --- many (optional) : standard 1:N, FK not nullable
one (optional) --- many (optional) : 1:N, FK nullable
one --- zero-or-one : 1:1, FK unique and nullable
many --- many : N:M, drawn in two 1:N legs into the pivot table between them
attributes
★ id : bigint unsigned «PK»
name : varchar(50)
slug : varchar(60) «unique»
input_type : enum
is_filterable : tinyint(1)
is_variation_only : tinyint(1)
sort_order : int
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
product_categories
★ id : bigint unsigned «PK»
parent_id : bigint unsigned «FK, nullable»
name : varchar(50)
slug : varchar(100) «unique»
description : varchar(255) «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
parent
brands
★ id : bigint unsigned «PK»
name : varchar(50)
slug : varchar(100) «unique»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
article_categories
★ id : bigint unsigned «PK»
name : varchar(50)
slug : varchar(100) «unique»
description : varchar(255) «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
coupons
★ id : bigint unsigned «PK»
code : varchar(50) «unique»
name : varchar(100)
description : varchar(255) «nullable»
type : enum
scope : enum
value : decimal(10,2)
max_discount_amount : decimal(10,2) «nullable»
minimum_order_value : decimal(10,2) «nullable»
starts_at : timestamp «nullable»
ends_at : timestamp «nullable»
total_usage_limit : int «nullable»
usage_limit_per_customer : int «nullable»
is_active : tinyint(1)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
users
★ id : bigint unsigned «PK»
first_name : varchar(50)
last_name : varchar(50)
email : varchar(100) «unique»
email_verified_at : timestamp «nullable»
password : varchar(255)
remember_token : varchar(100) «nullable»
phone : varchar(30) «nullable»
avatar_path : varchar(255) «nullable»
is_active : tinyint(1)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
deleted_at : timestamp «nullable»
roles
★ id : bigint unsigned «PK»
name : varchar(255)
guard_name : varchar(255)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
permissions
★ id : bigint unsigned «PK»
name : varchar(255)
guard_name : varchar(255)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
products
★ id : bigint unsigned «PK»
product_category_id : bigint unsigned «FK»
brand_id : bigint unsigned «FK, nullable»
name : varchar(100)
slug : varchar(100) «unique»
sku : varchar(64) «unique»
short_description : varchar(255) «nullable»
description : text «nullable»
regular_price : decimal(10,2)
discount_price : decimal(10,2) «nullable»
discount_starts_at : timestamp «nullable»
discount_ends_at : timestamp «nullable»
vat_rate : decimal(5,2)
min_order_quantity : int
length_mm : int unsigned «nullable»
width_mm : int unsigned «nullable»
height_mm : int unsigned «nullable»
dimension_display_unit : enum
weight_g : int unsigned «nullable»
weight_display_unit : enum
is_available : tinyint(1)
is_featured : tinyint(1)
demo_case_order : smallint unsigned «nullable»
demo_case_label : varchar(100) «nullable»
seo_title : varchar(100) «nullable»
seo_description : varchar(255) «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
deleted_at : timestamp «nullable»
articles
★ id : bigint unsigned «PK»
author_id : bigint unsigned «FK»
article_category_id : bigint unsigned «FK, nullable»
title : varchar(100)
slug : varchar(100) «unique»
summary : varchar(255) «nullable»
content : text
main_image_path : varchar(255) «nullable»
status : enum
featured : tinyint(1)
seo_title : varchar(100) «nullable»
seo_description : varchar(255) «nullable»
published_at : timestamp «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
tags
★ id : bigint unsigned «PK»
name : varchar(30)
slug : varchar(60) «unique»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
carts
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK, nullable»
coupon_id : bigint unsigned «FK, nullable»
session_id : varchar(100) «nullable»
expires_at : timestamp «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
contact_messages
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK, nullable»
name : varchar(50)
email : varchar(100)
subject : varchar(100) «nullable»
message : text
handled_at : timestamp «nullable»
internal_note : text «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
newsletter_subscribers
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK, nullable»
email : varchar(100) «unique»
status : enum
subscribed_at : timestamp
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
model_has_roles
★ role_id : bigint unsigned «PK, FK»
★ model_id : bigint unsigned «PK»
★ model_type : varchar(255) «PK»
carriers
★ id : bigint unsigned «PK»
name : varchar(50)
code : varchar(20) «unique»
cod_fee : decimal(10,2)
base_delivery_price : decimal(10,2)
is_active : tinyint(1)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
model_has_permissions
★ permission_id : bigint unsigned «PK, FK»
★ model_id : bigint unsigned «PK»
★ model_type : varchar(255) «PK»
role_has_permissions
★ permission_id : bigint unsigned «PK, FK»
★ role_id : bigint unsigned «PK, FK»
attribute_values
★ id : bigint unsigned «PK»
attribute_id : bigint unsigned «FK»
value : varchar(100)
slug : varchar(120)
color_hex : char(7) «nullable»
sort_order : int
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
attribute_product_category
★ attribute_id : bigint unsigned «PK, FK»
★ product_category_id : bigint unsigned «PK, FK»
coupon_product_category
★ coupon_id : bigint unsigned «PK, FK»
★ product_category_id : bigint unsigned «PK, FK»
addresses
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK»
label : varchar(50) «nullable»
first_name : varchar(50)
last_name : varchar(50)
phone : varchar(30)
country : char(2)
city : varchar(50)
postcode : varchar(20)
street : varchar(150)
is_default_billing : tinyint(1)
is_default_shipping : tinyint(1)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
orders
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK, nullable»
carrier_id : bigint unsigned «FK, nullable»
cart_id : bigint unsigned «unique, nullable»
serial_number : varchar(50) «unique»
email : varchar(100)
phone : varchar(30)
first_name : varchar(50)
last_name : varchar(50)
status : enum
payment_method : enum
currency : char(3)
subtotal_amount : decimal(10,2)
discount_amount : decimal(10,2)
shipping_amount : decimal(10,2)
vat_amount : decimal(10,2)
total_amount : decimal(10,2)
customer_note : text «nullable»
internal_note : text «nullable»
invoice_required : tinyint(1)
invoice_company : varchar(150) «nullable»
invoice_vat_number : varchar(30) «nullable»
invoice_eik : varchar(20) «nullable»
anonymized_at : timestamp «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
attribute_value_product
★ attribute_value_id : bigint unsigned «PK, FK»
★ product_id : bigint unsigned «PK, FK»
attribute_product
★ attribute_id : bigint unsigned «PK, FK»
★ product_id : bigint unsigned «PK, FK»
product_images
★ id : bigint unsigned «PK»
product_id : bigint unsigned «FK»
path : varchar(255)
alt_text : varchar(255) «nullable»
is_main : tinyint(1)
sort_order : int
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
product_specifications
★ id : bigint unsigned «PK»
product_id : bigint unsigned «FK»
name : varchar(50)
value : varchar(100)
sort_order : int
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
product_variations
★ id : bigint unsigned «PK»
product_id : bigint unsigned «FK»
sku : varchar(64) «unique»
price : decimal(10,2) «nullable»
discount_price : decimal(10,2) «nullable»
weight_g : int unsigned «nullable»
weight_display_unit : enum
length_mm : int unsigned «nullable»
width_mm : int unsigned «nullable»
height_mm : int unsigned «nullable»
is_available : tinyint(1)
is_default : tinyint(1)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
deleted_at : timestamp «nullable»
coupon_product
★ coupon_id : bigint unsigned «PK, FK»
★ product_id : bigint unsigned «PK, FK»
article_product
★ article_id : bigint unsigned «PK, FK»
★ product_id : bigint unsigned «PK, FK»
wishlist_items
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK»
product_id : bigint unsigned «FK»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
article_tag
★ article_id : bigint unsigned «PK, FK»
★ tag_id : bigint unsigned «PK, FK»
attribute_value_product_variation
★ attribute_value_id : bigint unsigned «PK, FK»
★ product_variation_id : bigint unsigned «PK, FK»
product_image_product_variation
★ product_image_id : bigint unsigned «PK, FK»
★ product_variation_id : bigint unsigned «PK, FK»
position : int
order_items
★ id : bigint unsigned «PK»
order_id : bigint unsigned «FK»
product_id : bigint unsigned «FK, nullable»
product_variation_id : bigint unsigned «FK, nullable»
product_name : varchar(100)
product_sku : varchar(64)
variation_name : varchar(150) «nullable»
quantity : int
unit_price : decimal(10,2)
line_total : decimal(10,2)
discount_amount : decimal(10,2)
vat_rate : decimal(5,2)
vat_amount : decimal(10,2)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
inventories
★ id : bigint unsigned «PK»
product_variation_id : bigint unsigned «unique, FK»
current_quantity : int
reserved_quantity : int
sold_quantity : int
returned_quantity : int
damaged_quantity : int
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
cart_items
★ id : bigint unsigned «PK»
cart_id : bigint unsigned «FK»
product_variation_id : bigint unsigned «FK»
quantity : int
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
coupon_redemptions
★ id : bigint unsigned «PK»
coupon_id : bigint unsigned «FK»
order_id : bigint unsigned «FK»
user_id : bigint unsigned «FK, nullable»
email_hash : char(64)
discount_amount : decimal(10,2)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
order_status_histories
★ id : bigint unsigned «PK»
order_id : bigint unsigned «FK»
user_id : bigint unsigned «FK, nullable»
previous_status : enum «nullable»
new_status : enum
reason : varchar(255) «nullable»
note : text «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
order_addresses
★ id : bigint unsigned «PK»
order_id : bigint unsigned «FK»
source_address_id : bigint unsigned «FK, nullable»
type : enum
delivery_type : enum
first_name : varchar(50)
last_name : varchar(50)
phone : varchar(30)
country : char(2)
city : varchar(50)
postcode : varchar(20)
street : varchar(150) «nullable»
courier_office_code : varchar(50) «nullable»
courier_office_name : varchar(150) «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
payments
★ id : bigint unsigned «PK»
order_id : bigint unsigned «FK»
method : enum
status : enum
currency : char(3)
amount : decimal(10,2)
refunded_amount : decimal(10,2)
stripe_payment_intent_id : varchar(255) «unique, nullable»
stripe_checkout_session_id : varchar(255) «nullable»
paid_at : timestamp «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
shipments
★ id : bigint unsigned «PK»
order_id : bigint unsigned «FK»
carrier_id : bigint unsigned «FK»
shipment_number : varchar(100) «nullable»
tracking_number : varchar(100) «unique, nullable»
status : enum
raw_status : varchar(100) «nullable»
label_path : varchar(255) «nullable»
courier_tracking_url : varchar(255) «nullable»
cod_amount : decimal(10,2) «nullable»
weight : decimal(8,2) «nullable»
shipped_at : timestamp «nullable»
delivered_at : timestamp «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
product_reviews
★ id : bigint unsigned «PK»
user_id : bigint unsigned «FK, nullable»
product_id : bigint unsigned «FK»
order_item_id : bigint unsigned «FK, nullable»
author_name : varchar(100)
rating : tinyint
body : text
approved : tinyint(1)
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
inventory_movements
★ id : bigint unsigned «PK»
inventory_id : bigint unsigned «FK»
created_by_id : bigint unsigned «FK, nullable»
movement_type : enum
quantity : int
note : varchar(255) «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
payment_events
★ id : bigint unsigned «PK»
payment_id : bigint unsigned «FK»
stripe_event_id : varchar(255) «unique»
event_type : varchar(50)
status_before : enum «nullable»
status_after : enum
payload : json «nullable»
processed_at : timestamp
note : varchar(255) «nullable»
created_at : timestamp «nullable»
updated_at : timestamp «nullable»
shipment_tracking_events
★ id : bigint unsigned «PK»
shipment_id : bigint unsigned «FK»
status : enum
raw_status : varchar(100) «nullable»
description : varchar(255) «nullable»
event_time : timestamp
created_at : timestamp «nullable»
updated_at : timestamp «nullable»