


The Local/Forge gap is why `deploy-and-host.md`'s checklist exists for THAT pairing — anything fixed only in this repo's `docker/nginx/*.conf`, or only in the local `.env`, is invisible to a Forge VPS and has to be set again, deliberately, there.

Railway has no equivalent gap: Railpack builds its own image, so `docker/nginx/*.conf` was never relevant to it — a different reason the same file cannot be assumed to cover Railway too.

As of this diagram, Railway deploys have not yet succeeded; Forge has never been provisioned at all. Local is the only topology actually verified running end to end.


Production — Laravel Forge (ADR-0001, never provisioned)

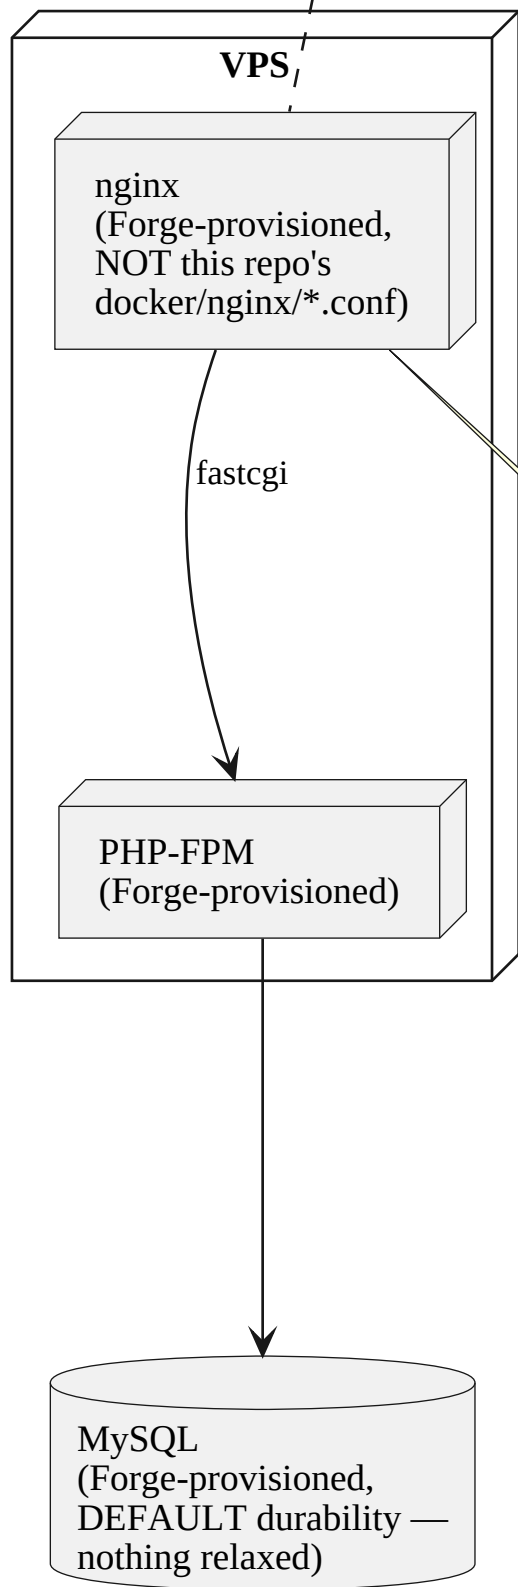

No containers here at all. Owed independently, per `how-to/deploy-and-host.md`:

- X-Content-Type-Options header (SEC-007)
- `server_tokens` off / `expose_php` Off (SEC-004)
- Stripe webhook IP allowlist
- `SESSION_SECURE_COOKIE=true`

Local development — `docker-compose.yml`

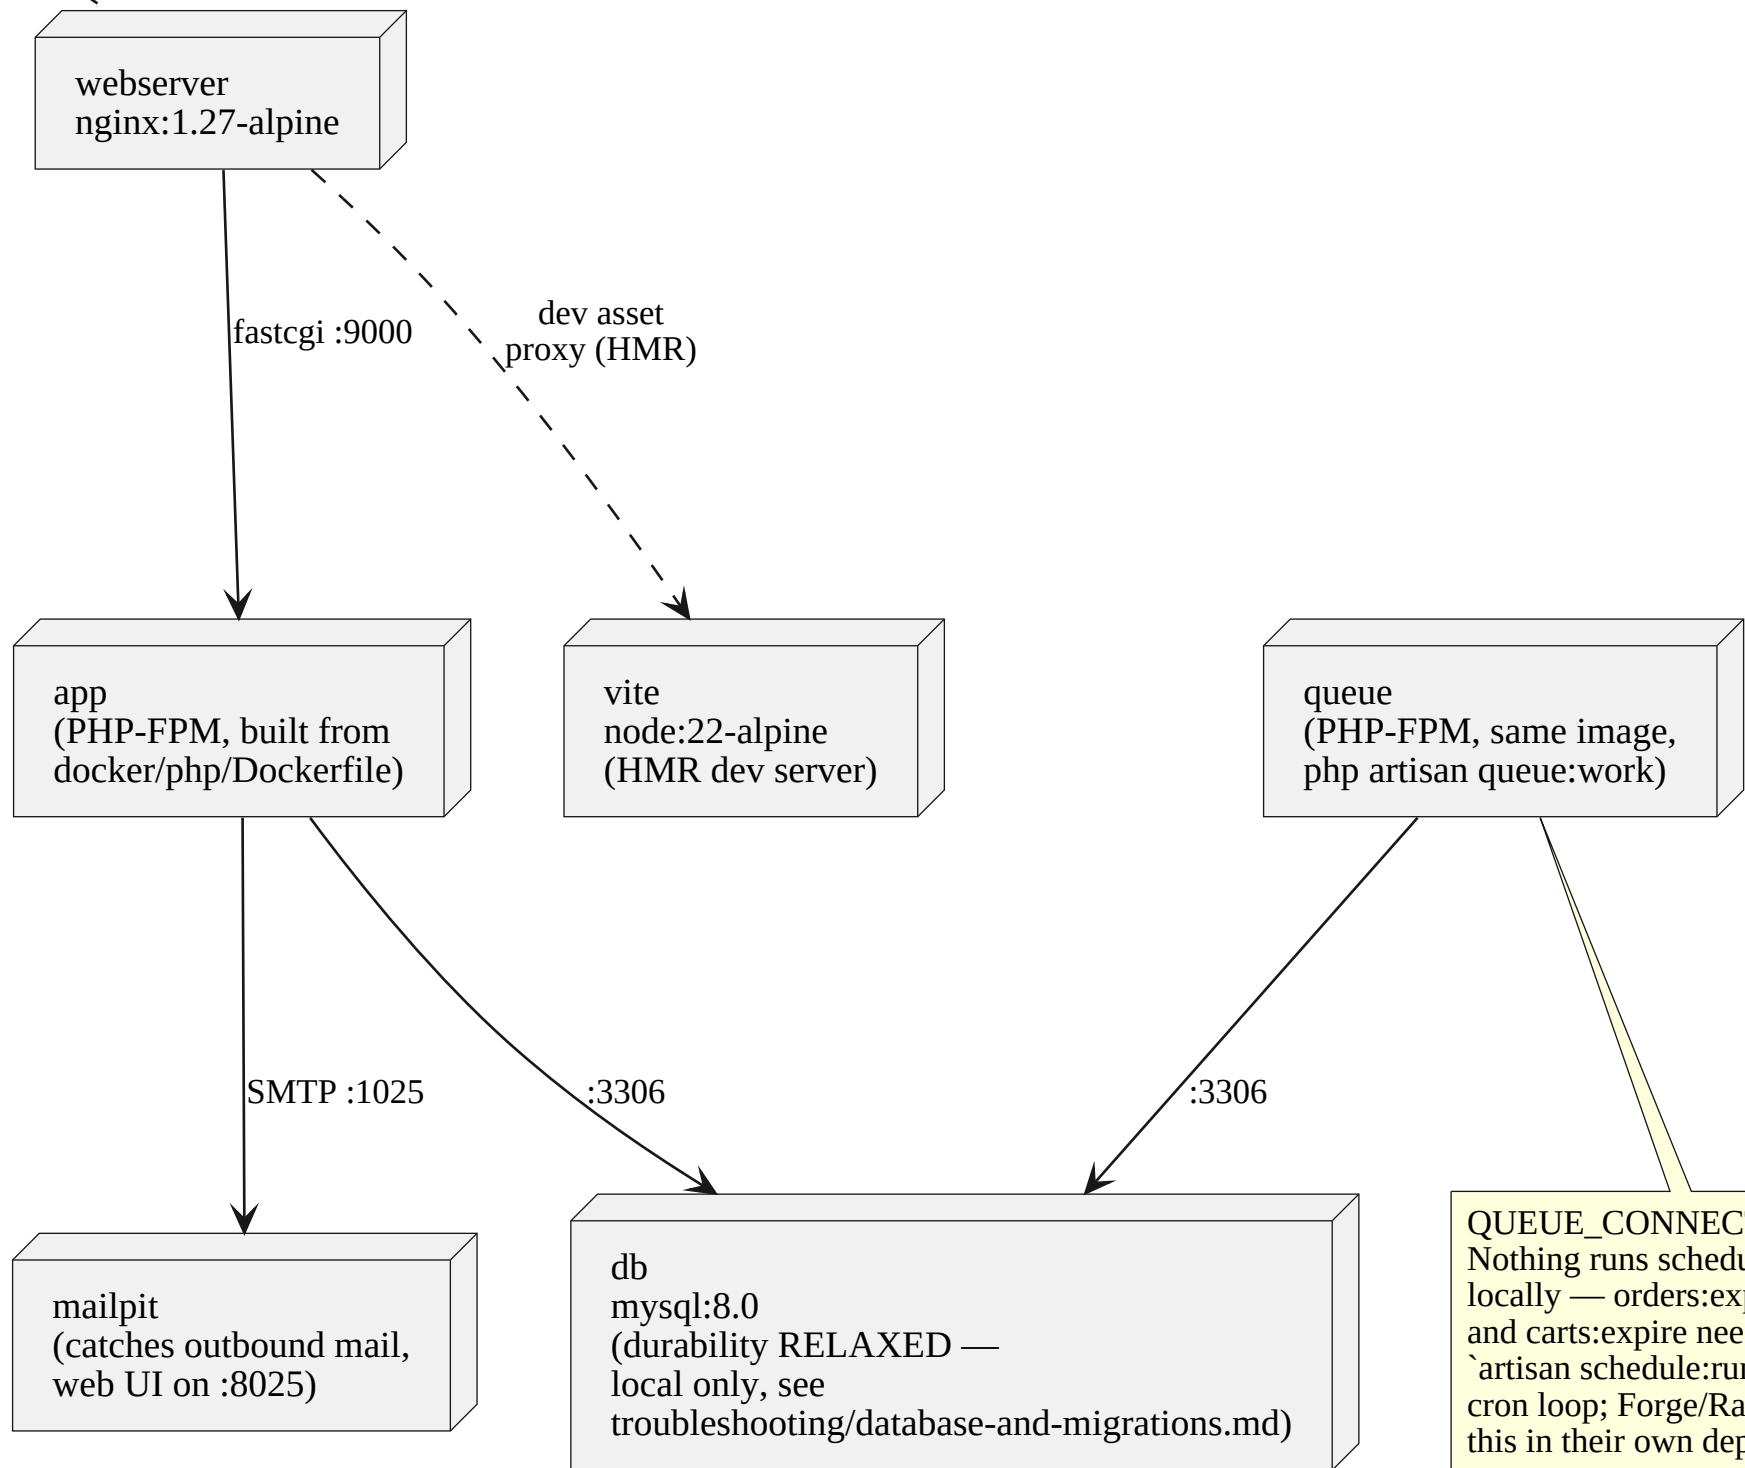

`innodb_flush_log_at_trx_commit=2`, `sync_binlog=0`, `--skip-log-bin`. Traded for speed — see the "Migrations and tests are unbearably slow" troubleshooting entry for why this exists.

`QUEUE_CONNECTION=database`. Nothing runs `schedule:run` locally — `orders:expire-unpaid` and `carts:expire` need a manual ``artisan schedule:run`` or a cron loop; Forge/Railway handle this in their own deploy target.

`trustProxies(at: '*')` in `bootstrap/app.php` is what makes `isSecure()` true past this point. Without it: `http://` links, broken image URLs (the public disk builds them from `APP_URL`), and a Secure cookie the framework thinks it cannot send. ADR-0023.

No Dockerfile: Railpack detects Laravel from `artisan` and builds FrankenPHP/Caddy itself. `RAILPACK_SKIP_MIGRATIONS=true` — migrate runs in `preDeployCommand` instead, with `--schema-path=/nonexistent` (no mysql client in this image; migrations replay over PDO). Seed via ``railway ssh``, never ``railway run`` (which executes on the operator's own machine and cannot reach `*.railway.internal`). Ephemeral filesystem: the 182 demo images survive redeloys by being IN the repo; an admin-uploaded image does not. `APP_ENV=demo`, never production — three seeders refuse when it is 'production'.

web service
Railpack: FrankenPHP + Caddy
Root Directory: `src`

plain HTTP
+ X-Forwarded-*
Caddy binds `$PORT` on all interfaces itself

Railway edge + proxy
TLS terminates HERE
reaches the container over IPv6

worker service
queue:work
(same repo, same Root Dir)

MySQL
(Railway-managed)

scheduler service
schedule:work
(same repo, same Root Dir)

`orders:expire-unpaid` runs here, every minute, via `schedule:work`. ADR-0022's stock release depends on it, and reliability here is UNVERIFIED — check on the box, do not assume.