


The Local/Forge gap is why `deploy-and-host.md`'s checklist exists for THAT pairing — anything fixed only in this repo's `docker/nginx/*.conf`, or only in the local `.env`, is invisible to a Forge VPS and has to be set again, deliberately, there.

Railway has no equivalent gap: Railpack builds its own image, so `docker/nginx/*.conf` was never relevant to it — a different reason the same file cannot be assumed to cover Railway too.

As of this diagram, Railway deploys have not yet succeeded; Forge has never been provisioned at all. Local is the only topology actually verified running end to end.


Production — Laravel Forge (ADR-0001, never provisioned)

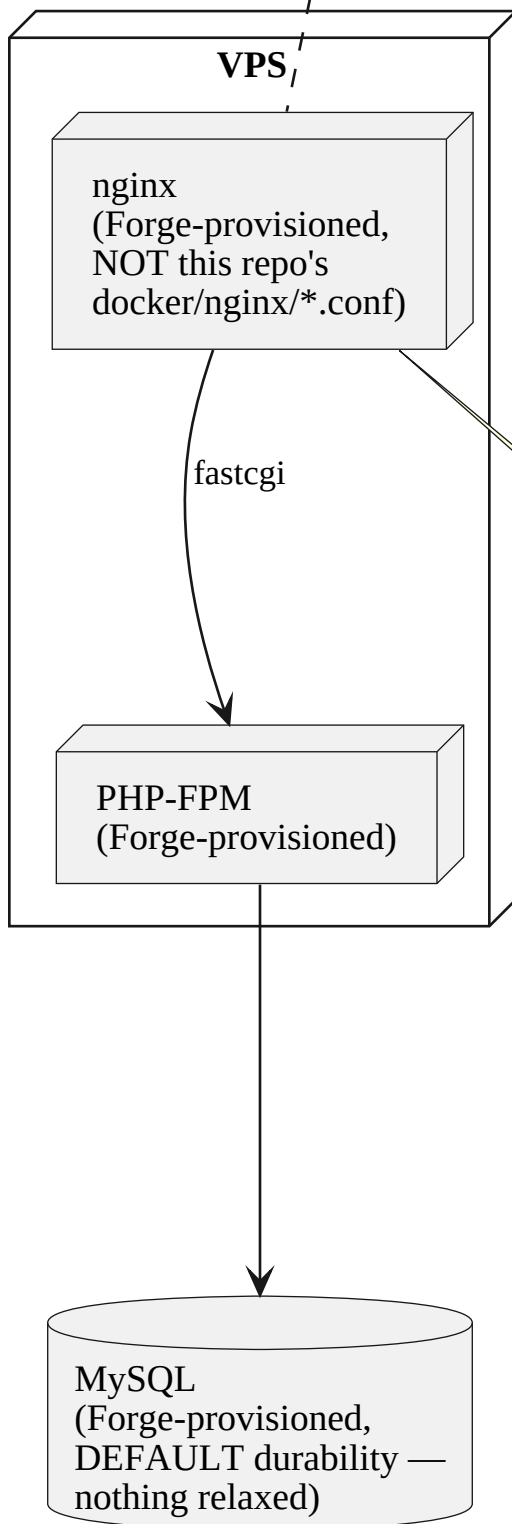

No containers here at all. Owed independently, per `how-to/deploy-and-host.md`:

- `X-Content-Type-Options` header (SEC-007)
- `server_tokens` off / `expose_php` Off (SEC-004)
- Stripe webhook IP allowlist
- `SESSION_SECURE_COOKIE=true`

Local development — `docker-compose.yml`

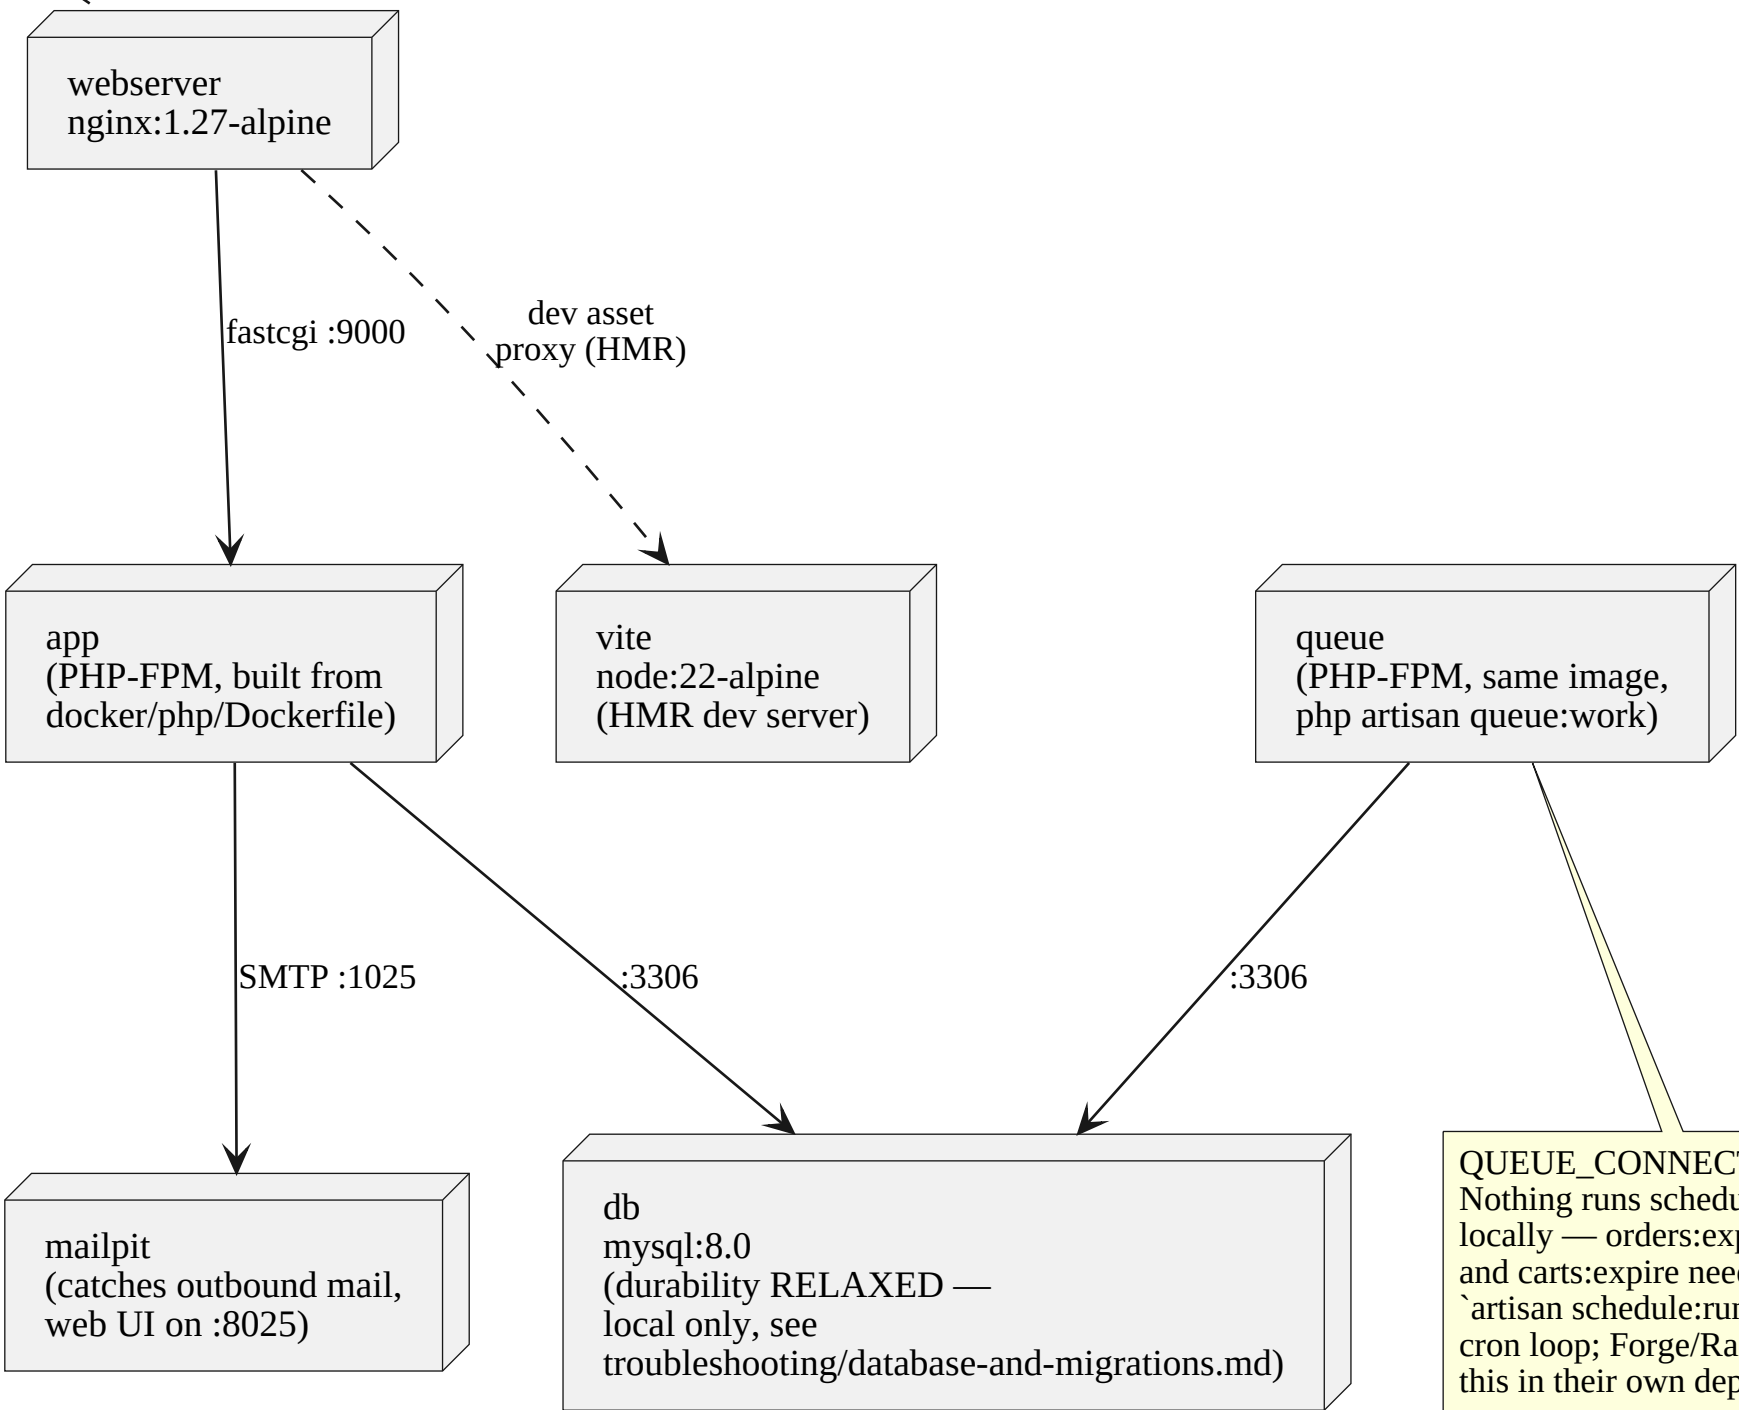

`innodb_flush_log_at_trx_commit=2`,
`sync_binlog=0`, `--skip-log-bin`.
Traded for speed — see the
"Migrations and tests are
unbearably slow" troubleshooting
entry for why this exists.

`QUEUE_CONNECTION=database`.
Nothing runs `schedule:run`
locally — `orders:expire-unpaid`
and `carts:expire` need a manual
`'artisan schedule:run'` or a
cron loop; Forge/Railway handle
this in their own deploy target.

`trustProxies(at: '*')` in `bootstrap/app.php`
is what makes `isSecure()` true past this point.
Without it: `http://` links, broken image URLs
(the public disk builds them from `APP_URL`),
and a Secure cookie the framework thinks
it cannot send. ADR-0023.

No Dockerfile: Railpack detects Laravel from
`artisan` and builds FrankenPHP/Caddy itself.
`RAILPACK_SKIP_MIGRATIONS=true` — migrate runs
in `preDeployCommand` instead, with
`--schema-path=/nonexistent` (no mysql client
in this image; migrations replay over PDO).
Seed via `'railway ssh'`, never `'railway run'`
(which executes on the operator's own
machine and cannot reach `*.railway.internal`).
`APP_ENV=demo`, never production — three
seeders refuse when it is 'production'.

ADR-0025. Seeded demo images stay OUT of
here — they ship inside the image at
`storage/app/public/demo/`, on the 'public'
disk, and survive a redeploy by being IN
the container. Only admin-uploaded media
(`ProductImage::uploadDisk()`), 'articles/'
volume, which is what makes an uploaded
image survive a redeploy for the first time.
`MEDIA_DISK=public` is the one-variable
rollback if this volume misbehaves.

`orders:expire-unpaid` runs here, every minute,
via `schedule:work`. ADR-0022's stock release
depends on it, and reliability here is
UNVERIFIED — check on the box, do not assume.

admin uploads only
(`MEDIA_DISK=media`)

web service
Railpack: FrankenPHP + Caddy
Root Directory: `src`
app root: `/app` (NOT `/var/www/html`)

plain HTTP
+ `X-Forwarded-*`
Caddy binds `$PORT` on
all interfaces itself

Railway edge + proxy
TLS terminates HERE
reaches the container over IPv6

worker service
queue:work
(same repo, same Root Dir)

scheduler service
schedule:work
(same repo, same Root Dir)

MySQL
(Railway-managed)

media volume
mounted at
`/app/storage/app/media`