


Local Docker vs. production (Forge) — two different topologies


The gap between these two boxes is why `deploy-and-host.md` exists. Anything fixed only in this repo's `docker/nginx/*.conf`, or only in the local `.env`, is invisible to the right-hand side — it has to be set again, deliberately, on the real host.

Local development — `docker-compose.yml`

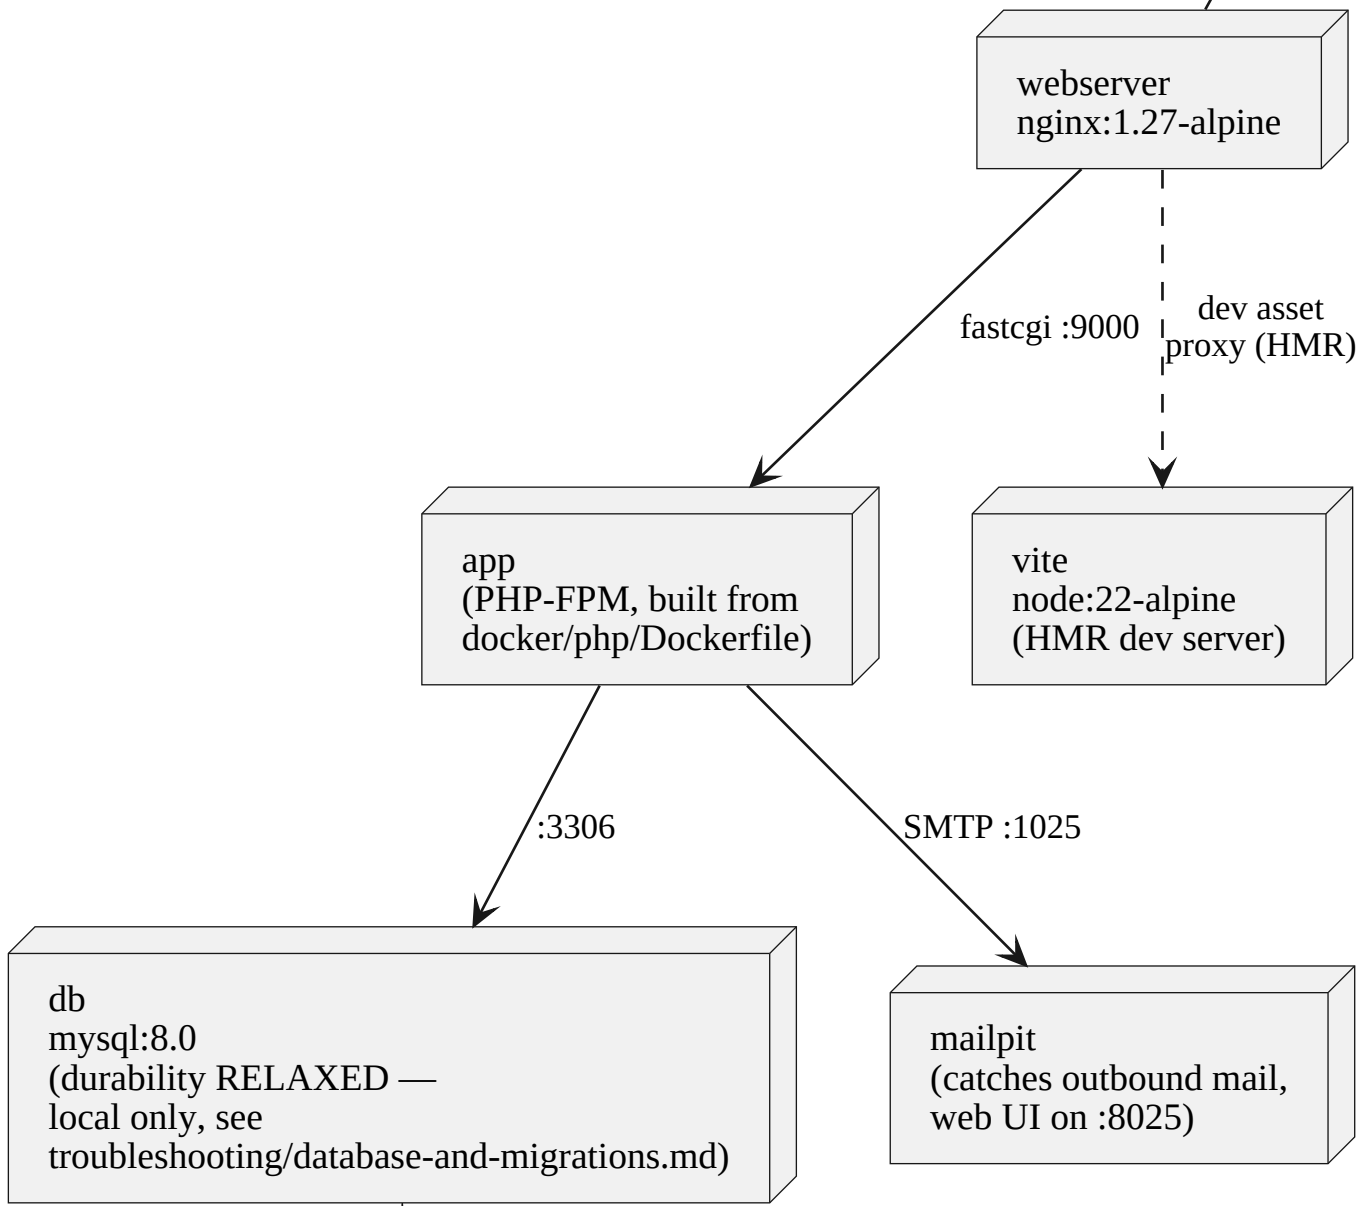

`innodb_flush_log_at_trx_commit=2`, `sync_binlog=0`, `--skip-log-bin`. Traded for speed — see the "Migrations and tests are unbearably slow" troubleshooting entry for why this exists.

Production — Laravel Forge (ADR-0001)

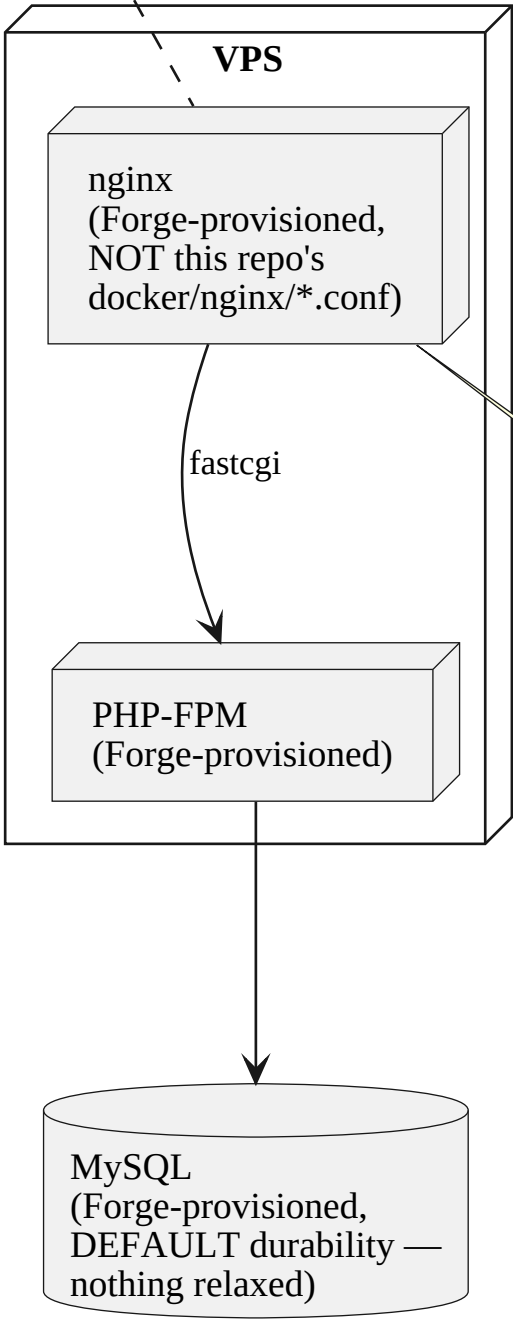

No containers here at all. Owed independently, per `how-to/deploy-and-host.md`:

- `X-Content-Type-Options` header (SEC-007)
- `server_tokens` off / `expose_php` Off (SEC-004)
- Stripe webhook IP allowlist
- `SESSION_SECURE_COOKIE=true`