


Methods to estimate a transfer function in open-loop

DRAFT

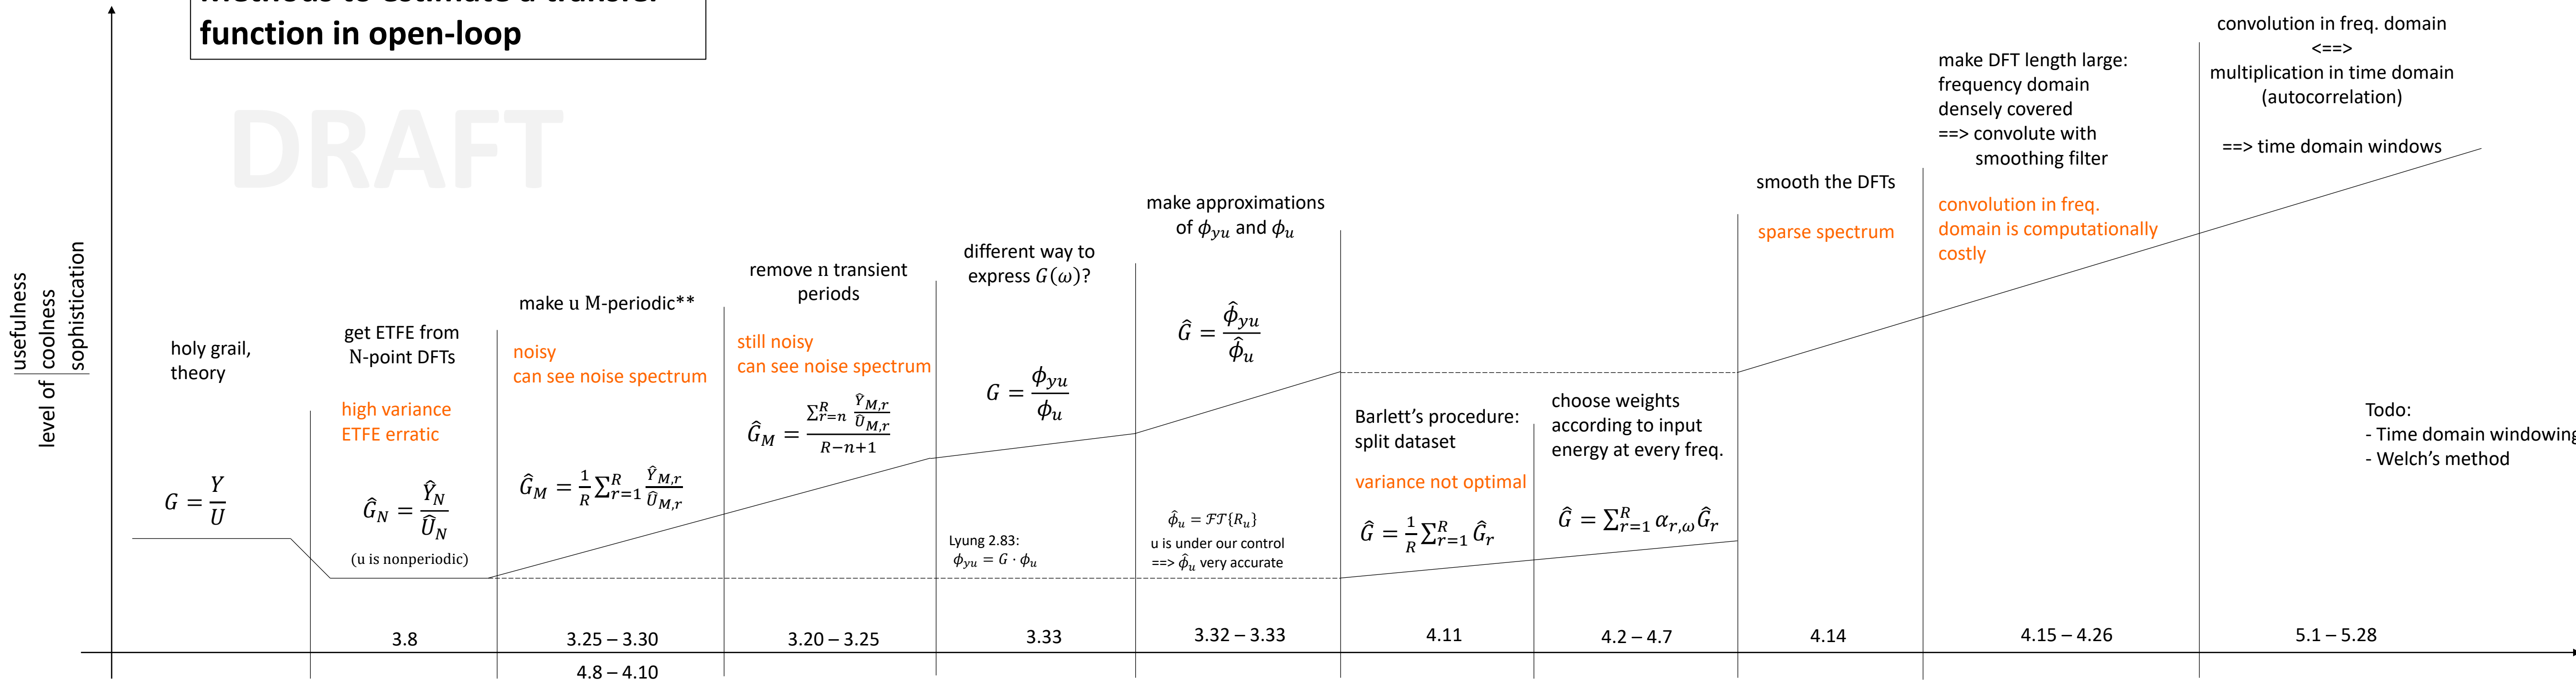

\*\*) Ch.3 uses DFTs of length  $N \cdot M$ ,  
whereas Ch. 4 uses DFTs of length M, which is usually equivalent when averaged.