


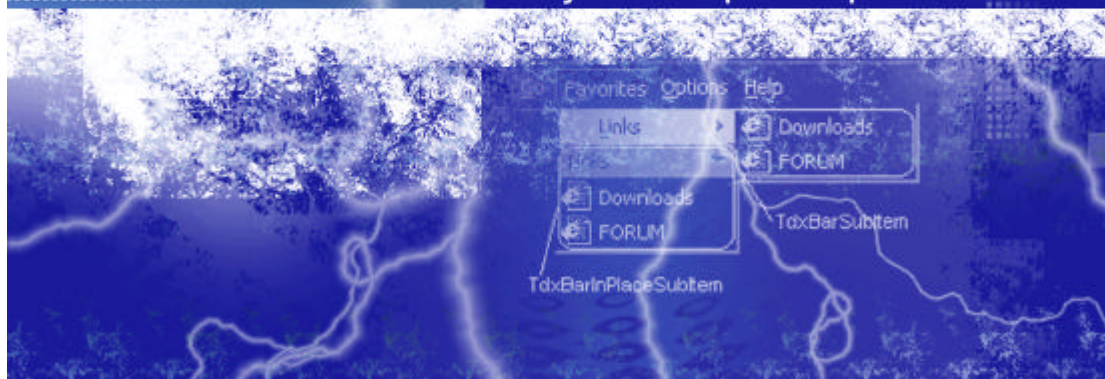

Items and Item Controls

Table of Contents

Items	9
TdxBarItem	9
TdxBarItem Properties	10
TdxBarItem Methods	19
TdxBarItem Events	27
TdxBarButton	29
TdxBarButton Properties	30
TdxBarButton Methods	35
TdxBarButton Events	37
TdxBarWindowItem	38
TdxBarWindowItem Properties	39
TdxBarWindowItem Methods	41
TdxBarWindowItem Events	45
TdxBarEdit	48
TdxBarEdit Properties	49
TdxBarEdit Methods	51
TdxBarEdit Events	52
TCustomdxBarCombo	53
TCustomdxBarCombo Properties	55
TCustomdxBarCombo Methods	57
TCustomdxBarCombo Events	60
TdxBarCustomCombo	62
TdxBarCustomCombo Properties	63
TdxBarCustomCombo Methods	67
TdxBarCustomCombo Events	70

TdxBarCombo	72
TdxBarCombo Properties	73
TdxBarCombo Methods	74
TdxBarCombo Events	75
TCustomdxBarSubItem	76
TCustomdxBarSubItem Properties	77
TCustomdxBarSubItem Methods	81
TCustomdxBarSubItem Events	83
TdxBarSubItem	86
TdxBarSubItem Properties	87
TdxBarSubItem Methods	88
TdxBarSubItem Events	88
TCustomdxBarContainerItem	89
TCustomdxBarContainerItem Properties	90
TCustomdxBarContainerItem Methods	91
TCustomdxBarContainerItem Events	93
TdxBarContainerItem	94
TdxBarContainerItem Properties	95
TdxBarContainerItem Methods	96
TdxBarContainerItem Events	98
TdxBarListItem	99
TdxBarListItem Properties	100
TdxBarListItem Methods	103
TdxBarListItem Events	103
TdxBarToolbarsListItem	104
TdxBarToolbarsListItem Properties	105

TdxBarToolbarsListItem Methods	106
TdxBarToolbarsListItem Events	106
TdxBarColorCombo	107
TdxBarColorCombo Properties	108
TdxBarColorCombo Methods	112
TdxBarColorCombo Events	114
TdxBarDateCombo	115
TdxBarDateCombo Properties	116
TdxBarDateCombo Methods	119
TdxBarDateCombo Events	121
TdxBarFontNameCombo	122
TdxBarFontNameCombo Properties	123
TdxBarFontNameCombo Methods	124
TdxBarFontNameCombo Events	126
TdxBarImageCombo	127
TdxBarImageCombo Properties	128
TdxBarImageCombo Methods	131
TdxBarImageCombo Events	133
TdxBarLookupCombo	134
TdxBarLookupCombo Properties	135
TdxBarLookupCombo Methods	140
TdxBarLookupCombo Events	142
TdxBarLargeButton	143
TdxBarLargeButton Properties	144
TdxBarLargeButton Methods	149
TdxBarLargeButton Events	150
TdxBarTreeViewCombo	151

TdxBarTreeViewCombo Properties	152
TdxBarTreeViewCombo Methods	159
TdxBarTreeViewCombo Events	162
TdxBarSpinEdit	166
TdxBarSpinEdit Properties	167
TdxBarSpinEdit Methods	172
TdxBarSpinEdit Events	173
TdxBarStatic	174
TdxBarStatic Properties	175
TdxBarStatic Events	182
TdxBarStatic Methods	180
TdxBarControlContainerItem	183
TdxBarControlContainerItem Properties	184
TdxBarControlContainerItem Methods	185
TdxBarControlContainerItem Events	186
TdxBarInPlaceSubItem	187
TdxBarInPlaceSubItem Properties	188
TdxBarInPlaceSubItem Methods	190
TdxBarInPlaceSubItem Events	191
TdxBarProgressItem	192
TdxBarProgressItem Properties	193
TdxBarProgressItem Methods	196
TdxBarProgressItem Events	198
TdxBarMRUListItem	199
TdxBarMRUListItem Properties	201
TdxBarMRUListItem Methods	203

TdxBarMRUListItem Events	205
Item Controls	182
TdxBarItemControl	207
TdxBarItemControl Properties	208
TdxBarItemControl Methods	215
TdxBarButtonControl	222
TdxBarButtonControl Properties	223
TdxBarButtonControl Methods	226
TdxBarWinControl	230
TdxBarWinControl Properties	231
TdxBarWinControl Methods	233
TdxBarEditControl	235
TdxBarEditControl Properties	236
TdxBarEditControl Methods	238
TCustomdxBarComboControl	239
TCustomdxBarComboControl Properties	240
TCustomdxBarComboControl Methods	242
TdxBarComboControl	243
TdxBarComboControl Properties	244
TdxBarComboControl Methods	247
TdxBarSubItemControl	248
TdxBarSubItemControl Properties	249
TdxBarSubItemControl Methods	250
TdxBarContainerItemControl	253
TdxBarContainerItemControl Properties	254
TdxBarContainerItemControl Methods	255
TdxBarToolbarsListItemControl	256

TdxBarToolbarsListItemControl Properties	257
TdxBarToolbarsListItemControl Methods	257
TdxBarColorComboControl	258
TdxBarColorComboControl Properties	259
TdxBarColorComboControl Methods	260
TdxBarDateComboControl	261
TdxBarDateComboControl Properties	262
TdxBarDateComboControl Methods	264
TdxBarImageComboControl	258
TdxBarImageComboControl Properties	266
TdxBarImageComboControl Methods	267
TdxBarLookupComboControl	268
TdxBarLookupComboControl Properties	269
TdxBarLookupComboControl Methods	270
TdxBarLargeButtonControl	271
TdxBarLargeButtonControl Properties	272
TdxBarLargeButtonControl Methods	274
TdxBarTreeViewComboControl	277
TdxBarTreeViewComboControl Properties	278
TdxBarTreeViewComboControl Methods	279
TdxBarSpinEditControl	281
TdxBarSpinEditControl Properties	282
TdxBarSpinEditControl Methods	286
TdxBarStaticControl	287
TdxBarStaticControl Properties	288
TdxBarStaticControl Methods	289

TdxBarControlContainerControl	291
TdxBarControlContainerControl Properties	292
TdxBarControlContainerControl Methods	293
TdxBarInPlaceSubItemControl	294
TdxBarInPlaceSubItemControl Properties	295
TdxBarInPlaceSubItemControl Methods	296
TdxBarProgressControl	297
TdxBarProgressControl Properties	298
TdxBarProgressControl Methods	299
Index	300

Items

TdxBarItem

TdxBarItem is an ancestor of all item classes.

Unit

dxBar

```
TdxBarItem = class(TComponent);
```

Description

TdxBarItem is inherited from TComponent and is the base class for all items of type TdxBarButton, TdxBarWindowItem, TdxBarEdit, TCustomdxBarCombo, TdxBarCustomCombo, TdxBarCombo, TCustomdxBarSubItem, TdxBarSubItem, TCustomdxBarContainerItem, TdxBarListItem, TdxBarContainerItem.

All items are non-visual objects. They process mouse click and keyboard events, and thus they determine actions but not look and feel. The appearance of items on screen is determined by an item control. One item may have several item controls on different toolbars. These item controls are called 'linked item controls' or 'item controls corresponding to the item'.

If a TdxBarItem instance is created at design time, it is saved in a form's resources and the form is its Owner. It is also accessible via the TdxBarManager Items property. For information regarding the creation of your own items, see dxBarRegisterItem.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem Properties

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

ActuallyVisible property

read only

Determines whether an item is accessible to a user.

property ActuallyVisible: Boolean;

Description

ActuallyVisible is True if an item is currently accessible to users in toolbars or in the customization form. Otherwise, ActuallyVisible is False.

See Also

TdxBarItem.VisibleForUser

Action property

read / write

Specifies the action associated with TdxBarItem.

property Action: TBasicAction;

Description

Action designates the action object associated with an item. Actions may be associated with an item by using the action list editor at design time. Actions are a method of centralizing user responses to commands. For more information about Actions, see Delphi's help. This property is available in Delphi 4™ only.

ActionLink property**read / write**

Specifies an associated object of TdxBarItemActionLink class.

property ActionLink : TdxBarItemActionLink;

Description

This property determines the action link between an action and TdxBarItem if such a link exists. This property is available in Delphi 4™ only.

See Also

TdxBarItemActionLink

Align property**read / write**

Defines item control alignment within a toolbar area.

type

```
TdxBarItemAlign = (iaLeft, iaCenter, iaRight, iaClient);
```

property Align: TdxBarItemAlign;

Description

Use the Align property to customize the layout of a specific bar item control. Possible values include.

Value**Description****iaLeft**

Bar item control is aligned to the left and follows the preceding bar item control. Another item control may be located after this item control.

**iaCenter**

Bar item control is centered within the remaining space of the toolbar. All other item controls are hidden.

**iaRight**

Bar item control is aligned to the right side of the appropriate toolbar. All other item controls are hidden.

**iaClient**

Bar item control is aligned to the left and follows the preceding bar item control but it covers the remaining space of the toolbar. All other item controls are hidden.



The default value of this property is **iaLeft**.

BarManager property**read only**

```
property BarManager: TdxBarManager;
```

Description

Specifies the TdxBarManager to which a given TdxBarItem belongs.

Caption property**read / write**

Specifies text which identifies an item to a user.

```
property Caption: string;
```

Description

Use Caption to associate an item with text which describes the item. To create an accelerator in the Caption, include an ampersand (&) before the character.

Category property**read / write**

Determines the category to which a given TdxBarItem belongs.

```
property Category: Integer;
```

Description

Category represents a group of items. Categories are designed to easily manage item behavior. All items of the same category may have similar properties. If the value of this property equals -1, the item does not belong to any category.

See Also

TdxBarManager.Categories

ClickItemLink property**read only**

Specifies the item link whose item control has been clicked.

```
property ClickItemLink: TdxBarItemLink;
```

Description

One item can correspond to several item controls on different toolbars. ClickItemLink specifies the TdxBarItemLink for an item control that has just been clicked.

See Also

TdxBarItem.CurlItemLink; TdxBarItemLink

CurlItemLink property**read only**

Returns the current active item link.

property CurItemLink: TdxBarItemLink;

Description

One item can correspond to several item controls on different toolbars. CurlItemLink specifies the TdxBarItemLink to the currently active item control. This item control is the same as SelectedItem of the TCustomdxBarControl object.

See Also

TdxBarItem.ClickItemLink; TdxBarItemLink

Data property**read / write**

Specifies a pointer to any data associated with an item.

property Data: Pointer;

Description

This property is a pointer used by programmers to store any information. If the pointer must be initialized before item creation and disposed of before item destruction, use the OnCreate and OnDestroy events of the item.

Description property**read / write**

Specifies an item's description.

property Description: string;

Description

Description is the text string that appears within the customizing form below the item control list. Descriptions give users more information about items.

Enabled property**read / write**

Controls whether TdxBarItem responds to mouse, keyboard, and timer events.

property Enabled: Boolean;

Description

Use Enabled to change the availability of an item control to end users. To disable a control, set Enabled to False. All item controls that correspond to a given TdxBarItem will be disabled. If False, item controls ignore mouse and keyboard events.

Glyph property**read / write**

Specifies the bitmap which appears on linked item controls.

property Glyph: TBitmap;

Note: *The suggested size of bitmaps is 16 by 16 pixels.*

HelpContext property**read / write**

Provides a context number when calling context-sensitive online Help.

property HelpContext: THelpContext;

Description

Determines which help topic appears when a user presses F1 to request online help. Each topic in a Help system should have a unique context number. When TdxBarItem is selected in an application, pressing F1 displays a Help screen. The Help screen to appear depends wholly on the value of the HelpContext property.

Hint property**read / write**

property Hint: string;

Description

Contains the text which appears when users moves a mouse over linked item controls.

ImageIndex property**read / write**

Determines index in an image list.

property ImageIndex: Integer;

Description

Set ImageIndex to associate an item with an image in the Images, LargeImages or HotImages properties of TdxBarManager.

See Also

TdxBarManager.Images

Index property**read only**

Specifies item index in the TdxBarManager list.

property Index: Integer;

Description

TdxBarManager contains a list of all available items. The index property returns the index of a given item in the TdxBarManager item list. The first item's index is 0.

See Also

TdxBarManager.Items

LinkCount property**read only**

Determines the number of item links contained in the Links property.

property LinkCount: Integer;

Description

An item control may have several item controls on different toolbars. LinkCount returns the number of current links between an item and item controls.

See Also

TdxBarItem.CurlItemLink; TdxBarItem.Links

Links property**read only**

Returns an object of type TdxBarItemLink with an Index which links to a given element.

property Links[Index: Integer]: TdxBarItemLink;

Description

One item can correspond to several item controls on different toolbars. The Links property contains the TdxBarItemLink object array which defines the links between a given TdxBarItem and item controls on the toolbars. The first element's index is 0. When creating a new item control, a new element is added to the TdxBarItem Links array to specify an item link between this TdxBarItem and the item control on the toolbar.

See Also

TdxBarItem.CurlItemLink; TdxBarItem.LinkCount; TdxBarItemLink

ShortCut property**read / write**

Contains the shortcut property for TdxBarItem.

property ShortCut: TShortcut;

Description

Shortcut represents the key combination which activates a corresponding item.

Note: *Shortcut works only if a form includes a toolbar whose IsMainMenu property is set to True.*

UnclickAfterDoing property**read / write**

property UnclickAfterDoing: Boolean;

Description

If UnclickAfterDoing is True, an item stays pressed during execution of the OnClick event handler and goes to its initial state when the OnClick event handler completes its work.

If UnclickAfterDoing is False, the button is restored to its original “uppressed” state immediately after the press event and does not wait for the OnClick event handler to complete its work.

Visible property**read / write**

Determines whether a TdxBarItem appears on screen.

property Visible: TdxBarItemVisible;

Description

Items are non-visual objects. This property defines the appearance style of these item controls:

Value	Meaning
ivAlways	Item controls are visible at design and run time.
ivNever	Item controls are not visible at run time.
ivInCustomizing	Item controls are only visible during toolbar customization.

By default, the Visible property is set to ivAlways.

The following code hides items to avoid data modification. Items are TdxBarDBNavigator buttons:

```
dxBarBDBNavEdit.Visible := ivNever;  
dxBarBDBNavInsert.Visible := ivNever;  
dxBarBDBNavDelete.Visible := ivNever;
```

See Also

TdxBarManager.CategoryItemsVisible

VisibleForUser property**read only**

Determines whether an item is visible to a user.

property VisibleForUser: Boolean;

Description

VisibleForUser returns True if an item is visible to a user.

TdxBarItem Methods

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

ActionChange method

Updates linked item controls to reflect changes in associated actions.

procedure ActionChange(Sender: TObject; CheckDefaults: Boolean); **dynamic**;

Description

ActionChange is called automatically when an associated action changes. Used for updating item controls to reflect an action's current Caption, Enabled, Hint, Visible, and HelpContext properties and its OnClick event handler. The Sender parameter is the associated action.

The CheckDefaults parameter specifies whether properties and event handlers should be changed if they differ from the default values.

When CheckDefaults is True, properties and event handlers are changed only when current values are the default values (that is, when values have not been previously changed). When CheckDefaults is False, properties and event handlers are changed, regardless of their current values. This method is available in Delphi 4™ only.

BarManagerChanged method

Called to perform operations when the TdxBarManager to which a given item belongs changes.

procedure BarManagerChanged; **virtual**;

Description

This method performs no actions. Descendants can override it to perform special operations when the BarManager property changes.

See Also

TdxBarManager

CanClicked method

Specifies whether an item responds to mouse clicks.

```
function CanClicked: Boolean; virtual;
```

Description

This function is used internally to control mouse click response. The CanClicked method returns True, if an item responds to mouse clicks. If True, an OnClick event can be generated. CanClicked always returns True for this class.

CanSelected method

Specifies whether a TdxBarItem object may be selected.

```
function CanSelected: Boolean; virtual;
```

Description

Returns True if users can select a given TdxBarItem object. For this class CanSelected always returns True.

CaptionChanged method

This method is called when TdxBarItem caption changes.

```
procedure CaptionChanged; virtual;
```

Description

This method calls the CaptionChanged method of a corresponding item control to reflect changes in TdxBarItem caption.

See Also

TdxBarItemControl.CaptionChanged

Click method

Calls the DirectClick method to respond to mouse clicks.

```
procedure Click; dynamic;
```

Description

The Click method simulates mouse clicks. This method checks whether TdxBarItem responds to mouse click events and then calls the DirectClick method.

See Also

TdxBarItem.DirectClick

Create method

Creates a TdxBarItem instance.

```
constructor Create(AOwner: TComponent); override;
```

Description

This method creates and initializes a TdxBarItem object. It sets the TdxBarItem BarManager property equal to the TdxBarManager object of the form and the Visible property is set to ivAlways.

Destroy method

Destroys a TdxBarItem instance.

```
destructor Destroy; override;
```

Description

This method destroys the TdxBarItem object and removes associated records from the customizing and toolbar popup item lists.

DirectClick method

Processes mouse click events.

```
procedure DirectClick; dynamic;
```

Description

If Enabled is True, DirectClick calls TdxBarManager DoClickItem and then calls the DoClick event. This method is one of the procedures and functions which processes mouse click events.

See Also

TdxBarItem.DoClick; TdxBarManager.DoClickItem

DoClick method

This procedure generates an OnClick event.

```
procedure DoClick; dynamic;
```

Description

Override this method to perform special operations before or after calling an OnClick event handler.

See Also

TdxBarItem.OnClick

EnabledChanged

This procedure is called when the Enabled property changes.

```
procedure EnabledChanged; virtual;
```

Description

This method is called when a user changes the Enabled property from True to False or vice versa. This method calls the EnabledChange of a corresponding item control to reflect changes.

See Also

TdxBarItemControl.EnabledChanged

GetActionLinkClass method

Returns an appropriate action link class associated with controls.

type

```
TdxBarItemActionLinkClass = class of TdxBarItemActionLink;  
function GetActionLinkClass: TdxBarItemActionLinkClass; dynamic;
```

Description

GetActionLinkClass is used internally to access the appropriate class type for an action link used with a corresponding item. This method is available in Delphi 4™ only.

See Also

TdxBarItemActionLink

GetParentComponent method

Returns the parent component of a TdxBarItem object.

```
function GetParentComponent: TComponent; override;
```

Description

This function returns the TdxBarManager to which a given TdxBarItem belongs. If there is no parent TdxBarManager, the function returns nil.

See Also

TdxBarManager

GlyphChanged method

This method is called when a TdxBarItem glyph changes.

```
procedure GlyphChanged; virtual;
```

Description

This method calls the GlyphChanged method of a corresponding item control to reflect changes in the Glyph property.

HasAccel method

Specifies if TdxBarItem includes an accelerator key.

```
function HasAccel(AItemLink: TdxBarItemLink): Boolean; virtual;
```

Description

Returns True if a given item has an accelerator key.

HasParent method

Determines if TdxBarItem belongs to a TdxBarManager category.

```
function HasParent: Boolean; override;
```

Description

Returns True if TdxBarItem belongs to a TdxBarManager category (TdxBarItem Category property is greater than -1).

HotGlyphChanged method

Called when changing the hot image list of a parent TdxBarManager object.

```
procedure HotGlyphChanged; virtual;
```

Description

Called by the TdxBarManager when the TdxBarManager HotImages property changes. The TdxBarItem HotGlyphChanged method performs no action. Descendants can override it to perform required operations when changing images.

See Also

TdxBarManager.HotImages

LargeGlyphChanged method

This method is called when a TdxBarManager large image list changes.

```
procedure LargeGlyphChanged; virtual;
```

Description

This method is called by TdxBarManager when the TdxBarManager LargeImages property changes. TdxBarItem LargeGlyphChanged method performs no action. Descendants can override it to perform required operations when changing images.

See Also

TdxBarManager.LargeImages

SetParentComponent method

Sets the parent object of TdxBarItem.

```
procedure SetParentComponent(AParent: TComponent); override;
```

Description

This method sets the TdxBarItem BarManager property to the TdxBarManager to which a given item belongs.

Note: *Owner of the item is a form, not TdxBarManager.*

ShortCutChanged method

This procedure is called when a TdxBarItem shortcut changes.

```
procedure ShortCutChanged; virtual;
```

Description

Keyboard shortcuts enable users to perform actions without directly accessing the control via key combinations. Each time a TdxBarItem shortcut changes, this method is called.

Note: *Shortcuts only work if a form includes a main menu.*

See Also

TdxBarItem.ShortCut

Update method

Repaints corresponding item controls.

```
procedure Update; virtual;
```

Description

One item can correspond to several item controls on different toolbars. This procedure repaints all item controls, except the selected, linked to a given TdxBarItem. Descendants can override it to perform their own update procedures.

See Also

TdxBarItem.UpdateEx

UpdateEx method

Repaints corresponding item controls.

```
procedure UpdateEx; virtual;
```

Description

This procedure repaints all corresponding item controls, except selected items. UpdateEx also calls the RepaintBar method for bar controls with corresponding item controls, therefore, UpdateEx is useful for repainting item controls when changing the size of TdxBarItem.

UseHotImages method

Determines if a TdxBarItem uses image from the TdxBarManager HotImages list to draw linked item controls.

```
function UseHotImages: Boolean; virtual;
```

Description

For this class UseHotImages returns False.

See Also

TdxBarItem.UseLargeImages; TdxBarManager.HotImages; TdxBarManager.Images;
TdxBarManager.LargeImages

UseLargeImages method

Determines if a control uses an image from the BarManager.LargeImages list.

```
function UseLargeImages: Boolean; virtual;
```

Description

For this class UseLargeImages returns False.

See Also

*TdxBarItem.UseHotImages; TdxBarManager.HotImages; TdxBarManager.Images;
TdxBarManager.LargeImages*

VisibleChanged method

This procedure is called when the TdxBarItem Visible property changes.

```
function VisibleChanged; virtual;
```

Description

This procedure calls the VisibleChanged method for linked item controls according to the Visible property of a given TdxBarItem.

TdxBarItem Events

OnClick	public
OnCreate	protected
OnDestroy	published

OnClick event

Occurs when clicking the control.

property OnClick: TNotifyEvent;

Description

Use the OnClick event handler to write code which responds to click events.

Note for TdxBarWindowItem: Being placed on a vertical toolbar, whose *RotateWhenVertical* is *True*, bar items such as *TdxBarEdit*, *TdxBarCombo*, etc change their appearance and become like buttons. The *OnClick* event is fired in respond to the user's click on such an item.

OnCreate event

Occurs when a form is created.

property OnCreate : TNotifyEvent;

Description

Use OnCreate to perform special processing when a TdxBarItem is created and invokes constructor. Either implement this event or override a form's constructor but do not do both. Any objects created in the OnCreate event should be freed by the OnDestroy event.

See Also

TdxBarItem.OnDestroy

OnDestroy event

This event occurs before a TdxBarItem object is destroyed.

property OnDestroy: TNotifyEvent ;

Description

Use OnDestroy to perform special processing when destroying a TdxBarItem object. Either implement this event or override the destructor of the class, but do not do both. This event should destroy any objects created in an OnCreate event.

See Also

TdxBarItem.OnCreate

TdxBarButton

The item of the TdxBarButton type represents a toolbar button.

Unit

dxBar

```
TdxBarButton = class(TdxBarItem);
```

Description

Buttons are the most common element on toolbars. The purpose of this class is to create various kinds of buttons: standard, toggle, grouped buttons, and buttons with dropdown menus. Write an OnClick event handler to define a button's action.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarButton Properties

TdxBarButton

AllowAllUp	published / read / write	DropDownMenu	published / read / write
ButtonStyle	published / read / write	GroupIndex	published / read / write
CloseSubMenuOnClick	published / read / write	Lowered	published / read / write
Down	published / read / write	PaintStyle	published / read / write
DropDownEnabled	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	published / read / write
CurItemLink	public / read only	UnclickAfterDoing	published / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

AllowAllUp property

read / write

Determines the behavior of the toggle button in a group.

property AllowAllUp: Boolean;

Description

This property is used by toggle buttons (ButtonStyle is set to bsChecked) if they are grouped with the GroupIndex property. If AllowAllUp is True, then there may not be an unselected button in a group. If AllowAllUp is False, at least one button is always selected. By default, AllowAllUp is False.

See Also

TdxBarButton.ButtonStyle

ButtonStyle property**read / write**

Determines button style.

type

```
TdxBarButtonStyle = (bsDefault, bsChecked, bsDropDown);
```

```
property ButtonStyle: TdxBarButtonStyle;
```

Description

This property determines the way a button appears on the screen and specifies a button's behavior.

Value	Meaning
-------	---------

bsDefault	A standard button.
bsChecked	A toggle button.
bsDropDown	A dropdown button with a dropdown menu.

CloseSubMenuOnClick property**read / write**

Determines whether a sub menu closes when pressing this button.

```
property CloseSubMenuOnClick: Boolean;
```

Description

If CloseSubMenuOnClick is True, the sub menu behaves as designed, i.e. it closes; if CloseSubMenuOnClick is False, it remains on screen. It can be most useful if, for example, the sub menu buttons function as check buttons. In this case, the CloseSubMenuOnClick property of these buttons should be set to False. To close a sub menu, press the mouse button somewhere outside of it.

Note: You should deactivate this option if a buttons style is not bsChecked.

See Also

TdxBarButton.ButtonStyle

Down property**read / write**

Specifies whether a toggle button has a sunken appearance.

property Down: Boolean;

Description

This property is used by toggle buttons (ButtonStyle is set to bsChecked). If True, the button appears as sunken (down), otherwise, the button appears as raised (up). The property is affected by the GroupIndex and AllowAllUp properties. The Down property is toggled automatically upon a button click event.

See Also

TdxBarButton.ButtonStyle

DropDownEnabled property**read / write**

Specifies whether the dropdown menu can be activated.

property DropDownEnabled: Boolean;

Description

DropDownEnabled is applicable only if the ButtonStyle is bsDropDown. If DropDownEnabled is False, then a user cannot activate a dropdown menu and the arrow button is disabled. To enable a dropdown menu, set DropDownEnabled to True.

See Also

TdxBarButton.ButtonStyle

DropDownMenu property**read / write**

Specifies the menu activated when users press a dropdown button.

property DropDownMenu: TdxBarPopupMenu;

Description

This property is used by dropdown buttons (ButtonStyle is set to bsDropDown). It specifies the popup menu of the TdxBarPopupMenu type that drops down when the arrow button is pressed.

See Also

TdxBarButton.ButtonStyle

GroupIndex property**read / write**

Allows buttons to work together as a group.

property GroupIndex: Integer;

Description

This property is used by toggle buttons (ButtonStyle is set to bsChecked). When GroupIndex is 0, the button behaves independently of all other toolbar buttons. If several buttons have an equal non-zero GroupIndex, they are grouped together. When a user clicks one of these buttons, it remains selected until the user clicks another button belonging to the same group. The AllowAllUp property determines whether all the buttons of the group can be unselected.

See Also

TdxBarButton.AllowAllUp

Lowered**read / write**

Specifies the appearance of a toolbar button.

property Lowered: Boolean;

Description

Set the Lowered property to **True** to depress a toolbar button. You can, for instance, use this property to keep a button pressed after a user has released it.

The default value is **False**.

PaintStyle[read / write](#)

Specifies the look of linked item controls on screen.

type

```
TdxBarPaintStyle = (psStandard, psCaption, psCaptionInMenu,  
psCaptionGlyph);
```

```
property PaintStyle: TdxBarPaintStyle;
```

Description

This property specifies the button paint style. It works with the non-dropdown buttons only (ButtonStyle is not equal to bsDropDown). Paint style can be one of the following:

Value	Meaning
psStandard	A button contains a text caption or a picture. What is exactly drawn on a button depends on the button location. If a button is placed on a toolbar, the component draws only pictures, the caption is not drawn. If a button is placed on a sub item, the component draws both a caption and a picture. The component uses the following order to draw pictures: - the glyph, if defined; - the picture, specified by the ImageIndex property. Note: if a button is located on a toolbar and no images are specified, then this button appears as an empty rectangle. In other words, when PaintStyle is psStandard, the caption is not drawn for buttons on toolbars, even if the caption was specified.
psCaption	Button's caption is used to identify the button to a user.
psCaptionGlyph	Button's caption and picture are used, the caption appears next to the glyph on the button.
psCaptionInMenu	In sub menus, the caption is drawn on the button surface. If the button is placed on the toolbar, then the image is drawn on it.

This property affects all corresponding item controls. To change the paint style of a particular item control, use the UserPaintStyle property of its item link.

See Also

TdxBarItemLink.UserPaintStyle

TdxBarButton Methods

TdxBarButton

ButtonStyleChanged	protected	DownChanged	protected
CanChangePaintStyle	protected	DropDownEnabledChanged	protected
DoDropDown	protected	PaintStyleChanged	protected

Derived from TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

ButtonStyleChanged method

This method is called on changing button style.

```
procedure ButtonStyleChanged; virtual;
```

Description

This method is called on changing the ButtonStyle property of the TdxBarButton. ButtonStyleChanged sets the Down property to False and updates the look of all linked item controls. Override this method to perform special actions when changing button styles.

See Also

TdxBarButton.ButtonStyle; TdxBarItem.Links

CanChangePaintStyle method

Specifies whether TdxBarButton styles can be changed.

```
function CanChangePaintStyle: Boolean; virtual;
```

Description

If CanChangePaintStyle returns True, the TdxBarButton paint style item can be changed from the current to another. This function always returns True for the TdxBarButton class. Descendants can

override it to prevent changing paint styles. This method is used internally and you should not need to call it.

DoDropDown method

Activates an associated dropdown menu.

```
procedure DoDropDown(X, Y: Integer; ByMouse: Boolean); dynamic;
```

Description

DoDropDown is used internally to activate a dropdown menu. This method drops down a menu only for bsDropDown ButtonStyle buttons. X and Y specify the coordinates the menu appears at. If ByMouse is True, the menu is activated by mouse click events. Descendants can override this method to perform special actions on menu activation.

See Also

TdxBarButton; TdxBarButton.ButtonStyle

DownChanged method

This method is called on changing the Down property.

```
procedure DownChanged; virtual;
```

Description

This method calls the DownChanged method of every linked item control to reflect changes. Override this method to perform special operations when changing the Down property.

See Also

TdxBarButton.Down

DropDownEnabledChanged method

This method is called on changing the DropDownEnabled property.

```
procedure DropDownEnabledChanged; virtual;
```

Description

This procedure calls the DropDownEnabledChanged property of every linked item control to reflect the changes. Override this method to perform special actions on changing the DropDownEnabled property.

See Also

TdxBarButton.DropDownEnabled; TdxBarItem.Links

PaintStyleChanged method

This method is called when the PaintStyle property changes.

```
procedure PaintStyleChanged; virtual;
```

Description

This method is used internally. It calls the PaintStyleChanged method of every linked item control to reflect changes. Descendants can override it to perform additional processing when changing the TdxBarButton PaintStyle property.

See Also

TdxBarButton.PaintStyle; TdxBarItem.Links

TdxBarButton Events

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarWindowItem

TdxBarWindowItem is the ancestor for all items whose item controls have their own window handles.

Unit

dxBar

```
TdxBarWindowItem = class(TdxBarItem);
```

Description

This class is an ancestor of items with windowed item controls.

Windowed items are item controls that can receive focus in a running application and have a window handle. This class is an ancestor of TdxBarEdit, TCustomdxBarCombo, TdxBarCustomCombo, TdxBarCombo.

Hierarchy

TObject

 TPersistent

 TComponent

 TdxBarItem

TdxBarWindowItem Properties

TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

CurText property

read / write

Specifies the text string currently edited in an item.

```
property CurText: string;
```

Description

This property stores a text string that represents the current text in an active item control. If such text does not exist, the property returns the same value as the Text property. Unlike the Text property, CurText contains text currently being edited.

See Also

TdxBarWindowItem.OnCurChange; TdxBarWindowItem.Text

EmptyWindow property**read / write**

Determines whether text editing is available within TdxBarWindowItem.

property EmptyWindow: Boolean;

Description

This property is used internally. If False, users may edit text in the window of a linked item control. If set to True, linked item controls are drawn on screen, but users cannot edit text within them. This property is similar to the ShowEditor property of combo box controls, but it is intended for all items with windowed controls.

See Also

TCustomdxBarCombo.ShowEditor

FocusedItemLink property**read only**

Returns the item link of the focused item control.

property FocusedItemLink: TdxBarItemLink;

Description

One item control can have several linked item controls. Only one of the item controls can have focus at any given point in time. This property returns the TdxBarItemLink object that links a given item with the focused linked item control.

See Also

TdxBarItemLink

Text property**read / write**

Contains the text string associated with an item.

property Text: string;

Description

This property stores the string associated with an item. It can be directly modified both programmatically and by users upon leaving the linked item control. The Text property changes only after a user finishes text editing. Changing the Text property causes repainting of all linked item controls.

See Also

TdxBarWindowItem.CurText; TdxBarWindowItem.OnChange

TdxBarWindowItem Methods

TdxBarWindowItem

Change	protected	KeyDown	protected
CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

Change method

Generates an OnChange event.

```
procedure Change; dynamic;
```

Description

Change is a protected method so that the derived classes can make additional responses to text changes beyond invoking the OnChange event handler. When overriding be sure to call the inherited method to generate the OnChange event.

See Also

TdxBarWindowItem.OnChange; TdxBarWindowItem.OnCurChange; TdxBarWindowItem.Text

CurChange method

Generates an OnCurChange event.

```
procedure CurChange; dynamic;
```

Description

The CurChange method is called every time you press an alphanumeric key. It generates an OnCurChange event every time the CurText property changes.

See Also

TdxBarWindowItem.CurText; TdxBarWindowItem.OnChange; TdxBarWindowItem.OnCurChange

DoEnter method

```
procedure DoEnter; dynamic;
```

Description

The DoEnter method is called when an item control, corresponding to an item, receives focus. The DoEnter method generates the OnEnter event.

See Also

TdxBarWindowItem.DoExit; TdxBarWindowItem.OnEnter

DoExit method

```
procedure DoExit; dynamic;
```

Description

The DoExit is called when an item control, corresponding to an item, loses focus. The DoExit method generates the OnExit event.

See Also

TdxBarWindowItem.OnEnter; TdxBarWindowItem.DoExit

KeyDown method

Generates an OnKeyDown event.

```
procedure KeyDown(var Key: Word; Shift: TShiftState); dynamic;
```

Description

This procedure is called when pressing a key in the window of a linked item control. KeyDown is called when pressing any key, including Shift, Alt, Ctrl and function keys.

For the TdxBarWindowItem class, KeyDown does nothing except call the event handler attached to the OnKeyDown event. Descendants can override KeyDown to provide other responses in addition to this event-handler call. The Key parameter specifies the pressed key on the keyboard. If you assign 0 to Key, all further key processing is canceled.

See Also

TdxBarWindowItem.KeyPress; *TdxBarWindowItem.KeyUp;* *TdxBarWindowItem.OnKeyDown;*
TdxBarWindowItem.OnKeyPress; *TdxBarWindowItem.OnKeyUp;*

KeyPress method

Generates an OnKeyPress event.

```
procedure KeyPress(var Key: Char); dynamic;
```

Description

The KeyPress method is called in response to a key-press message (WM_CHAR) from Windows. The TdxBarWindowItem KeyPress method does nothing except call the OnKeyPress event handler. Descendants override KeyPress to provide other responses in addition to this event-handler call. Both the KeyPress and OnKeyPress event handlers can suppress further key processing by setting the Key parameter to 0.

See Also

TdxBarWindowItem.KeyDown; *TdxBarWindowItem.KeyUp;* *TdxBarWindowItem.OnKeyDown;*
TdxBarWindowItem.OnKeyPress; *TdxBarWindowItem.OnKeyUp;*

KeyUp method

Generates an OnKeyUp message.

```
procedure KeyUp(var Key: Word; Shift: TShiftState); dynamic;
```

Description

The KeyUp method is called when a user releases the key in the window of a linked item control. KeyUp is called when releasing any key, including Shift, Alt, Ctrl and function keys.

The KeyUp method calls the OnKeyUp event handler if assigned. Descendants can override KeyUp to provide other responses in addition to the inherited event-handler call. If you assign 0 to Key, all further key processing is canceled.

See Also

TdxBarWindowItem.KeyDown; TdxBarWindowItem.KeyPress; TdxBarWindowItem.OnKeyDown;
TdxBarWindowItem.OnKeyPress; TdxBarWindowItem.OnKeyUp;

TdxBarWindowItem Events

TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	public	OnDestroy	published
OnCreate	protected		

OnChange event

Occurs when the text of an edit control changes.

property OnChange: TNotifyEvent;

Description

This event occurs when finishing text editing, that is, if a user presses Enter. Define the OnChange event-handler to avoid multiple event-handler calls.

See Also

TdxBarWindowItem.OnCurChange; TdxBarWindowItem.Text

OnCurChange event

Occurs on text editing.

property OnCurChange: TNotifyEvent;

Description

This event occurs after modifying text in an active item control - text is defined by the CutText property. Unlike the OnChange event, the OnCurChange occurs every time a user changes text in an item control window, that is, on alphanumeric key press events. Use OnCurChange when your application needs to process current changes of edited text.

See Also

TdxBarWindowItem.CurText; TdxBarWindowItem.OnChange

OnEnter event

Occurs when an item control, corresponding to an item, receives focus.

type

```
TNotifyEvent = procedure(Sender : TObject) of object;  
property OnEnter: TNotifyEvent;
```

Description

Write an OnEnter event handler to perform specific actions when an item control, corresponding to an item, receives focus.

OnExit event

Occurs when an item control, corresponding to an item, loses focus.

type

```
TNotifyEvent = procedure(Sender : TObject) of object;  
property OnExit : TNotifyEvent;
```

Description

Write an OnExit event handler to perform specific actions when an item control, corresponding to an item, loses focus.

OnKeyDown event

Occurs when a user presses a key in a linked item control.

type

```
TShiftState = set of (ssShift, ssAlt, ssCtrl, ssLeft, ssRight, ssMiddle,  
ssDouble);  
TKeyEvent = procedure(Sender: TObject; var Key: Word; Shift: TShiftState)  
of object;  
property OnKeyDown: TKeyEvent;
```

Description

This event occurs after pressing a key in the active TdxBarWindowItem item control. Use the OnKeyDown event handler to specify special processing for key press events. The OnKeyDown handler can respond to all keyboard keys, including function keys and keys combined with the Shift, Alt, and Ctrl keys, and those of the mouse. If you assign 0 to Key, all further key processing is cancelled.

See Also

TdxBarWindowItem.OnKeyPress; TdxBarWindowItem.OnKeyUp

OnKeyPress event

Occurs when users press a single character key.

type

```
TKeyPressEvent = procedure(Sender: TObject; var Key: Char) of object;  
property OnKeyPress: TKeyPressEvent;
```

Description

This event occurs *after* pressing an alphanumeric key in the active linked item control of the TdxBarWindowItem item as well as after the OnKeyDown. Use the OnKeyPress event handler to perform an operation as a result of a single character key press event. If the Key is equal to 0, all further key processing is canceled.

See Also

TdxBarWindowItem.OnKeyDown; TdxBarWindowItem.OnKeyUp

OnKeyUp event

Occurs when users release a key once pressed.

type

```
TKeyEvent = procedure(Sender: TObject; var Key: Word; Shift: TShiftState)  
of object;  
property OnKeyUp: TKeyEvent;
```

Description

This event occurs on releasing a key in the active item control of a TdxBarWindowItem item. Use the OnKeyUp event handler to provide special processing that occurs when a key is released. The OnKeyUp handler can respond to all keyboard keys, including function keys and keys combined with the Shift, Alt, and Ctrl keys. If you assign 0 to the Key, all further key processing is canceled.

See Also

TdxBarWindowItem.OnKeyDown; TdxBarWindowItem.OnKeyPress; TdxBarWindowItem.OnKeyUp

TdxBarEdit

The TdxBarEdit item provides a text edit field on a toolbar.

Unit

dxBar

```
TdxBarEdit = class(TdxBarWindowItem);
```

Description

TdxBarEdit encapsulates the behavior common for all text editing components. TCustomdxBarCombo and TdxBarCombo are inherited from this item. The look of the TdxBarEdit on the toolbar depends on bar control location. If the parent bar control is docked to the top or bottom side of a form, or if the toolbar is floating, TdxBarEdit items appear as ordinary edit windows. If the parent toolbar is docked to the left or right side of a form, TdxBarEdit item appears as buttons.

Hierarchy

TObject

 TPersistent

 TComponent

 TdxBarItem

 TdxBarWindowItem

TdxBarEdit Properties

TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived from TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

MaxLength property

read / write

Specifies the maximum number of characters a user can enter into the edit window.

property MaxLength: Integer;

Description

This property stores the maximum number of characters for edited text. If MaxLength is 0, the maximum value of 32,766 is used.

ReadOnly property

read / write

Determines whether users can change TdxBarEdit text.

property ReadOnly: Boolean;

Description

This property specifies whether the text in an item control can be modified. Set ReadOnly to False to enable the edit control to allow editing.

ShowCaption property**read / write**

Specifies whether the item control's caption is displayed.

property ShowCaption: Boolean;

Description

Set the ShowCaption property to **False** to hide an item control's caption. The default value for this property is **True**.

Width property**read / write**

Specifies the horizontal size of linked item controls in pixels.

property Width: Integer;

Description

This property determines the default width of linked item controls in pixels. The default value is 100. To specify the width of a particular item control, use the TdxBarItemLink UserWidth property.

See Also

Customizing Popup Menu; TdxBarItemLink.UserDefine

TdxBarEdit Methods

TdxBarEdit

WidthChanged **protected**

Derived from TdxBarWindowItem

Change	protected	KeyDown	protected
CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

WidthChanged method

This method is called when changing the TdxBarEdit Width property.

```
procedure WidthChanged; virtual;
```

Description

This method updates all linked item controls to reflect changes. Descendants override this method to perform special actions when changing the Width property. If you have specified a particular width for an item control, changes in the TdxBarEdit Width property do not affect it. Call Reset from the customizing popup menu to make linked item controls react to TdxBarEdit Width changes.

See Also

Customizing Popup Menu; TdxBarItemLink.UserWidth

TdxBarEdit Events

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TCustomdxBarCombo

This class represents a combo box with a customized dropdown window.

Unit

dxBar

```
TCustomdxBarCombo = class(TdxBarEdit);
```

Description

Items of the TCustomdxBarCombo type are intended to work with custom dropdown windows. TCustomdxBarCombo is a base class for defining item classes that represent a specialized Windows combo box.

There are certain conditions concerning the dropdown window of a TCustomdxBarCombo item. The description of the <DropDownWindowClass> class that represents the dropdown window should include at least the following (in addition to your code):

```
constructor <DropDownWindowClass>.Create(AOwner: TComponent);
begin
    inherited;
    Visible := False;
end;

procedure <DropDownWindowClass>.CreateParams(var Params: TCreateParams);
begin
    inherited;
    with Params do
        ExStyle := ExStyle or WS_EX_TOOLWINDOW or WS_EX_TOPMOST;
end;

procedure <DropDownWindowClass>.CreateWnd;
begin
    inherited;
    Windows.SetParent(Handle, 0);
    CallWindowProc(DefWndProc, Handle, WM_SETFOCUS, 0, 0);
end;
```

The OnGetDropDownWindow event handler has to return the handle of the newly created dropdown window. You may also specify its size in this event handler. The OnCheckKeyForDropDownWindow allows, if necessary, to process key press events in the dropdown window.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarWindowItem

TdxBarEdit

TCustomdxBarCombo Properties

TCustomdxBarCombo

Canvas	protected / read only	DroppedDown	public / read / write
DropDownWindow	public / read only	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

Canvas property

read only

Specifies the TCanvas object that presents a drawing surface for linked item controls.

property Canvas: TCanvas;

Description

Canvas is used internally to provide easy drawing of linked item controls. Canvas encapsulates a Windows device context, providing all the tools and methods required for drawing.

DropDownWindow property**read only**

Specifies the HWND handle of a dropdown window.

property DropDownWindow: HWND;

Description

This property stores the handle of a dropdown window. This handle is set within the OnGetDropDownWindow event handler.

See Also

TCustomdxBarCombo.OnGetDropDownWindow

DroppedDown property**read / write**

Determines whether a dropdown window is visible.

property DroppedDown: Boolean;

Description

This property specifies the visibility and activity of a dropdown window. If DroppedDown is True, the dropdown window is visible and active.

ShowEditor property**read / write**

Specifies whether the TCustomdxBarCombo text editor allows editing.

property ShowEditor: Boolean;

Description

This property determines if users can edit data in a linked item control. The value of this property is inverse to the EmptyWindow property.

See Also

TdxBarWindowItem.EmptyWindow

TCustomdxBarCombo Methods

TCustomdxBarCombo

AfterDropDown	protected	DrawInterior	protected
CheckKeyForDropDownWindow	protected	DropDown	protected
CloseUp	protected	GetDropDownWindow	protected

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

Change	protected	KeyDown	protected
CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

AfterDropDown method

```
procedure AfterDropDown; dynamic;
```

Description

Used internally. This method is called, after a dropdown window is displayed on screen. By default, AfterDropDown performs no actions.

See Also

TCustomdxBarCombo.DropDown; TCustomdxBarCombo.OnDropDown

CheckKeyForDropDownWindow method

Determines if a dropdown window processes key press events.

type

```
TShiftState = set of (ssShift, ssAlt, ssCtrl, ssLeft, ssRight, ssMiddle, ssDouble);
```

```
function CheckKeyForDropDownWindow(Key: Word; Shift: TShiftState): Boolean;  
virtual;
```

Description

The Key parameter is a Windows virtual key code. The Shift parameter indicates the Ctrl, Alt and Shift key states. The function returns True if a pressed key must be processed by the dropdown window. This function also generates an OnCheckKeyForDropDownWindow event.

See Also

TCustomdxBarCombo.OnCheckKeyForDropDownWindow

CloseUp method

Closes a dropdown window.

```
procedure CloseUp; dynamic;
```

Description

The CloseUp method hides a dropdown window, if active, and generates an OnCloseUp event.

DrawInterior method

Draws internal window contents of linked item controls.

```
procedure DrawInterior(R: TRect); virtual;
```

Description

This function is used internally to draw the contents of the windowed portion of linked item controls. R is the bound rectangle. The surface for drawing is specified by the Canvas property. Descendants can override this method to draw their own contents.

DropDown method

Displays a window specified by the DropDownWindow parameter.

```
procedure DropDown(X, Y: Integer); dynamic;
```

Description

The Dropdown method activates a dropdown window. X and Y are the left top corner coordinates of the dropdown window. This function first calls the CheckDropDownPoint to check the X and Y, then generates an OnDropDown event and finally activates the dropdown window.

See Also

TCustomdxBarCombo.OnDropDown

GetDropDownWindow method

Returns the HWND handle of a dropdown window

```
function GetDropDownWindow: HWND; virtual;
```

Description

This method generates the OnGetDropDownWindow event and returns the HWND handle of a dropdown window. Override this function to get the HWND handle of a dropdown window without writing a OnGetDropDownWindow event handler.

See Also

TCustomdxBarCombo.OnGetDropDownWindow

TCustomdxBarCombo Events

TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published	OnDropDown	published
OnCloseUp	published	OnGetDropDownWindow	published

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published	OnDestroy	published
OnCreate	protected		

OnCheckKeyForDropDownWindow event

Occurs when users press a key in a linked item control.

type

```
TdxBarCheckKeyForDropDownWindowEvent = procedure (Sender:
TCustomdxBarCombo; Key: Word; Shift: TShiftState; var AcceptKey: Boolean)
of object;
property OnCheckKeyForDropDownWindow: TdxBarCheckKeyForDropDownWindowEvent;
```

Description

This event occurs after each key press in an active linked item control. The Key parameter is a virtual key code, the Shift parameter reacts to Shift, Ctrl and Alt key press events. If AcceptKey is True, a dropdown window will process key press events, otherwise, key press events will be processed by the TCustomdxBarCombo item.

OnCloseUp event

Occurs when closing a dropdown window.

```
property OnCloseUp: TNotifyEvent;
```

Description

This event occurs when closing a visible dropdown window. It is not recommended to destroy the dropdown window in the OnCloseUp event handler in order to avoid conflicts caused by the event handler of the dropdown window class. It is better to allow the parent window to manage it.

OnDropDown event

Occurs when a dropdown window is to be displayed.

property OnDropDown: TNotifyEvent;

Description

This event occurs before displaying a dropdown window. You can initialize the data for the dropdown window within the OnDropDown event handler.

OnGetDropDownWindow event

Occurs when receiving the handle of a dropdown window.

type

TdxBarGetDropDownWindowEvent = **procedure** (Sender: TCustomdxBarCombo; **var** Window: HWND) **of object**;

property OnGetDropDownWindow: TdxBarGetDropDownWindowEvent;

Description

This event occurs when retrieving the DropDownWindow property. You must write a OnGetDropDownWindow event handler to determine the handle of your dropdown window. The Window parameter is a HWND handle of the dropdown window. The OnGetDropDownWindow event handler can create a dropdown window if it has not been created earlier and set its size. For more information about creating dropdown windows, review the section describing TCustomdxBarCombo.

See Also

TCustomdxBarCombo

TdxBarCustomCombo

TdxBarCustomCombo is a class for combobox objects with a custom dropdown list.

Unit

dxBar

```
TdxBarCustomCombo = class(TCustomdxBarCombo);
```

Description

TdxBarCustomCombo is a base class for defining items with customized dropdown lists. The TdxBarCustomCombo is an ancestor for the TdxBarFontNameCombo and TdxBarImageCombo classes. The dropdown list items of TdxBarCustomCombo are text strings. Descendants can define special types for listbox items.

Hierarchy

```

TObject
  TPersistent
    TComponent
      TdxBarItem
        TdxBarWindowItem
          TdxBarEdit
            TCustomdxBarCombo
```

TdxBarCustomCombo Properties

TdxBarCustomCombo

Canvas	public / read only	ItemIndex	public / read / write
CurlItemIndex	public / read / write	Items	public / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	Listbox	public / read only
ItemHeight	public / read / write	Sorted	public / read / write

Derived from TCustomdxBarCombo

Canvas	public / read only	DroppedDown	public / read / write
DropDownWindow	public / read only	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

Canvas property

read only

Specifies a TCanvas object that presents a drawing surface for linked item controls.

property Canvas: TCanvas;

Description

Canvas is used internally to provide easy drawing of linked item controls. Canvas encapsulates a Windows device context, providing all required tools and methods for drawing.

CurItemIndex property**read / write**

Determines the index of the currently selected dropdown list item.

property CurItemIndex: Integer;

Description

Use this property to obtain or set the index of the currently selected item in a dropdown list.

DropDownCount property**read / write**

Specifies the number of the listbox items that appear in a dropdown list.

property DropDownCount: Integer;

Description

By default, a dropdown list contains eight items. If the DropDownCount value is less, than the number of the listbox items, the dropdown list displays a vertical scroll bar.

DropDownWidth property**read / write**

Specifies dropdown window width.

property DropDownWidth: Integer;

Description

Set the value of dropdown window width using this property.

Note: *Be sure that width is large enough to display all item strings because a horizontal scroll bar is not supported.*

ItemHeight property**read / write**

Specifies listbox item height in pixels.

property ItemHeight: Integer;

Description

Use ItemHeight to control the height of an item in a dropdown listbox. If ItemHeight is 0, TdxBarCustomCombo calculates listbox item height. Set the ItemHeight greater than 0 to precisely specify listbox item height. The default ItemHeight value is 0.

Note: *You can always change the height of a particular item using the MeasureItem method or from the OnMeasureItem event handler.*

ItemIndex property**read / write**

Specifies the index of a selected listbox item in a dropdown listbox.

property ItemIndex: Integer;

Description

This property corresponds to the ItemIndex property of TCustomListBox. ItemIndex is used to select a listbox item at runtime. Set the ItemIndex value to the index of the listbox item to be selected. The ItemIndex of the first listbox item is 0. If no item is selected, ItemIndex is -1. The default value for the ItemIndex is -1.

See Also

TdxBarCustomCombo.DropDownCount; TdxBarCustomCombo.Items

Items property**read / write**

Contains the strings that appear in a dropdown listbox.

property Items: TStrings;

Description

Items is an array of strings similar to TCustomListBox. Use the Items property to add, insert, delete, and move item strings. Descendants can define special types for their own items.

See Also

TdxBarCustomCombo.ItemIndex; TdxBarCustomCombo.ItemsHeight

ItemsHeight property**read only**

Contains an array of listbox item height.

property ItemsHeight[Index: Integer]: Integer;

Description

Elements of the ItemsHeight array contain the height of a particular listbox item in pixels. ItemsHeight is similar to the TCustomListBox ItemsHeight property because the TdxBarCustomCombo object uses the list box as a dropdown window. Use the OnMeasureItem event to customize the height of a particular item in a dropdown list.

See Also

TdxBarCustomCombo; TdxBarCustomCombo

ListBox property**read only**

Specifies a list box for the dropdown window.

property ListBox: TCustomListBox;

Description

Listbox represents the window that appears as a dropdown window. The handle of the dropdown listbox window is returned by the DropDownWindow method. The Items property corresponds to the items of this listbox.

See Also

TdxBarCustomCombo.Items

Sorted property**read / write**

Specifies whether items in a list box are sorted alphabetically.

property Sorted: Boolean;

Description

This property corresponds to the TCustomListBox Sorted property. If Sorted is True, items in a dropdown list are alphabetized; Else, the items are unsorted. When Sorted is True, items are added or inserted in alphabetical order.

See Also

TdxBarCustomCombo.Items

TdxBarCustomCombo Methods

TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	GetDropDownWindow	protected
DrawItem	protected	MeasureItem	protected
GetDropDownWidth	protected	MeasureItemWidth	protected

Derived from TCustomdxBarCombo

AfterDropDown	protected	DrawInterior	protected
CheckKeyForDropDownWindow	protected	DropDown	protected
CloseUp	protected	GetDropDownWindow	protected

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

Change	protected	KeyDown	protected
CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

CheckKeyForDropDownWindow method

Specifies whether a dropdown window processes key press events.

```
function CheckKeyForDropDownWindow(Key: Word; Shift: TShiftState): Boolean;  
override;
```

Description

The function returns True if the pressed key is to be processed by the dropdown window; Else it returns False. CheckKeyForDropDownWindow returns True if the key is VK_UP, VK_DOWN, VK_PRIOR or VK_NEXT. This function overrides the TCustomdxBarCombo CheckKeyForDropDownWindow function. The Key parameter is a virtual key code. The Shift parameter indicates Ctrl, Alt and Shift key states.

See Also

TCustomdxBarCombo.CheckKeyForDropDownWindow

DrawItem method

Draws a listbox item specified by the AIndex parameter.

```
procedure DrawItem(AIndex: Integer; ARect: TRect; AState: TOwnerDrawState);  
virtual;
```

Description

AIndex is an index of listbox items in the Items array. The indexing of the listbox items starts with 0. ARect defines the rectangle wherein to place text. AState is used to determine if the listbox item has a focus. If an OnDrawItem event handler is not provided, the TdxBarCustomCombo fills the Rect parameter with current brush and writes the text value of the item specified by the Index parameter. Descendants can override this method to draw their own items.

GetDropDownWidth method

Returns dropdown window width.

```
function GetDropDownWidth: Integer; virtual;
```

Description

The result of this function is used internally to prepare dropdown window activation.

GetDropDownWindow method

Returns the HWND handle of a dropdown listbox window.

```
function GetDropDownWindow: HWND; override;
```

Description

This method overrides the TCustomdxBarCombo GetDropDownWindow method. TdxBarCustomCombo GetDropDownWindow returns the HWND handle of a dropdown listbox window.

See Also

TCustomdxBarCombo.GetDropDownWindow

MeasureItem method

Determines height of an item in a listbox.

```
procedure MeasureItem(AIndex: Integer; var AHeight: Integer); virtual;
```

Description

The MeasureItem method determines the height of a particular listbox item. AIndex specifies the listbox item index in the TdxBarCustomCombo Items array. AHeight corresponds to the height of the listbox item. This procedure also generates an OnMeasureItem event. The OnMeasureItem event handler can set appropriate values for listbox item height.

See Also

TdxBarCustomCombo.MeasureItemWidth

MeasureItemWidth method

Determines listbox item width in pixels.

```
procedure MeasureItemWidth(AIndex: Integer; var AWidth: Integer); virtual;
```

Description

Use this method to determine the length of listbox items. AIndex specifies the index of the listbox item in the TdxBarCustomCombo Items array. AWidth corresponds to the width of the listbox item. TdxBarCustomCombo MeasureItemWidth method defines the listbox item length in relation to used font. Descendants can override this method to access the proper width for their items. If a listbox item contains additional elements such as graphical lines or additional strings, the MeasureItemWidth should specify the width of the whole item, not just text width.

See Also

TdxBarCustomCombo.MeasureItem

TdxBarCustomCombo Events

TdxBarCutomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published
OnCloseUp	published
OnDropDown	published
OnGetDropDownWindow	published

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published	OnDestroy	published
OnCreate	protected		

OnDrawItem event

Occurs when a dropdown listbox item is to be displayed.

type

```
TdxBarDrawItemEvent = procedure(Sender: TdxBarCustomCombo; AIndex:
Integer; ARect: TRect; AState: TOwnerDrawState) of object;
property OnDrawItem: TdxBarDrawItemEvent;
```

Description

Write an OnDrawItem event handler to draw items in a TdxBarCustomCombo dropdown list. An OnDrawItem event handler can add graphic elements to listbox items, or replace the text of the listbox item with graphics. OnDrawItem passes parameters to its event handler: AIndex specifies the index of the item in the TdxBarCustomCombo Items array, ARect provides the coordinates for drawing, AState specifies item state.

See Also

TdxBarCustomCombo.DrawItem

OnMeasureItem event

Occurs every time users access listbox item height.

type

```
TdxBarMeasureItemEvent = procedure(Sender: TdxBarCustomCombo; AIndex:  
Integer; var AHeight: Integer) of object;  
property OnMeasureItem: TdxBarMeasureItemEvent;
```

Description

Write an OnMeasureItem event handler to specify the height, in pixels, required to draw an item in a dropdown list window. Different listbox items may have different heights. The event handler can set the AHeight parameter to the height of the proper listbox item. The AIndex parameter, passed by the OnMeasureItem, determines the listbox item index in the array, specified by the Items property. The event handler sets the proper listbox item height in the AHeight parameter.

TdxBarCombo

TdxBarCombo represents a standard combo box.

Unit

dxBar

```
TdxBarCombo = class(TdxBarCustomCombo);
```

Description

TdxBarCombo is the TdxBarCustomCombo 'published' variant. TdxBarCombo is a TdxBarCustomCombo class descendant. It inherits all its properties and methods and publishes some of them. This is the only difference between these classes. TdxBarCombo dropdown listbox contains text strings.

Hierarchy

```
Object
  TPersistent
    TComponent
      TdxBarItem
        TdxBarWindowItem
          TdxBarEdit
            TCustomdxBarCombo
              TdxBarCustomCombo
```


TdxBarCombo Properties

Derived from TdxBarCustomCombo

Canvas	public / read only	ItemIndex	published / read / write
CurlItemIndex	public / read / write	Items	published / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	Listbox	public / read only
ItemHeight	published / read / write	Sorted	published / read / write

Derived from TCustomdxBarCombo

Canvas	public / read only	DroppedDown	public / read / write
DropDownWindow	public / read only	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

TdxBarCombo Methods

Derived from TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	GetDropDownWindow	protected
DrawItem	protected	MeasureItem	protected
GetDropDownWidth	protected	MeasureItemWidth	protected

Derived from TCustomdxBarCombo

AfterDropDown	protected	DrawInterior	protected
CheckKeyForDropDownWindow	protected	DropDown	protected
CloseUp	protected	GetDropDownWindow	protected

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

Change	protected	KeyDown	protected
CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

TdxBarCombo Events

Derived from TdxBarCustomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published
OnCloseUp	published
OnDropDown	published
OnGetDropDownWindow	published

Derived from TdxBarWindowItem

OnChange	published
OnCurChange	published
OnEnter	published
OnExit	published
OnKeyDown	published
OnKeyPress	published
OnKeyUp	published

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TCustomdxBarSubItem

TCustomdxBarSubItem is the base class for items that have links to other TdxBarManager items.

Unit

dxBar

```
TCustomdxBarSubItem = class(TdxBarItem);
```

Description

TCustomdxBarSubItem is the ancestor for all subitem types. Subitems are objects that contain links to other items from the TdxBarManager list. Each subitem is visually represented either by an item control with a submenu or by a set of item controls, specified by the item links. The descendants of this class are TdxBarSubItem and TCustomdxBarContainerItem.

Hierarchy

TObject

 TPersistent

 TComponent

 TdxBarItem

TCustomdxBarSubItem Properties

TCustomdxBarSubitem

BarSize	published / read / write	ItemLinks	public / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

BarSize property

[read / write](#)


Determines bar size at the left side of a submenu.

property BarSize: Integer;

Description

Use the BarSize property to set the necessary size of a bar in pixels. The default value for this property is 0.

Use the OnPaintBar event to draw this bar based upon your specific needs.

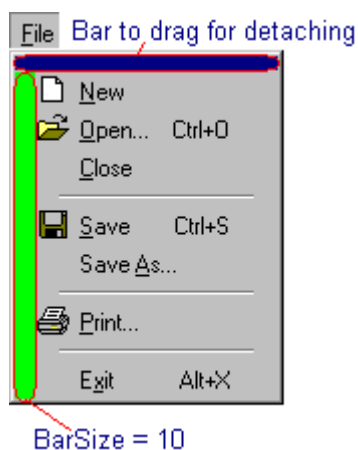

Detachable property

[read / write](#)


Specifies whether a toolbar subitem is detachable.

property Detachable: Boolean;

Description

The ExpressBars Suite allows you to implement detachable submenus in your application. Said differently, if the Detachable property is set to **True**, a bar appears at the top of the submenu list. By dragging this bar, a user can activate the toolbar assigned via the DetachingBar property.

The default value is **False**.

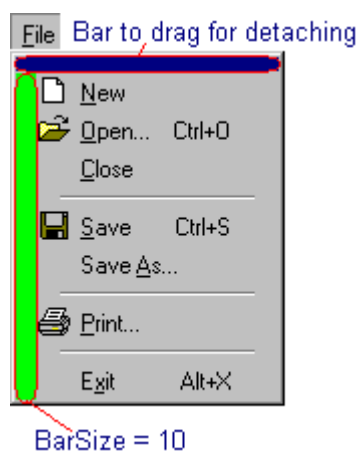

See Also

TCustomdxBarSubItem.DetachingBar; TCustomdxBarSubItem.GetDetachingBar;

TCustomdxBarSubItem.OnDetaching

DetachingBar property

[read / write](#)

Specifies a toolbar connected to a specific subitem.

property DetachingBar: Integer;

Description

The ExpressBars Suite allows you to implement detachable submenus in your application. Said differently, if the Detachable property is set to **True**, a bar appears at the top of the submenu list. By dragging this bar, a user can activate the toolbar assigned via the DetachingBar property. The DetachingBar property contains the toolbar's index. The first toolbar index is 0. The default value is **-1**.

See Also

TCustomdxBarSubItem.Detachable; TCustomdxBarSubItem.GetDetachingBar;

TCustomdxBarSubItem.OnDetaching

ItemLinks property**read / write**

ItemLinks is an array of item links to TdxBarManager items.

property ItemLinks: TdxBarItemLinks;

Description

The ItemLinks property contains a list of item links to items contained in TCustomdxBarSubItem. These item links are used when creating item controls for a given subitem. For instance, if you wish to add a new button to a subitem, add the item link for this button to the ItemLinks subitem.


ShowCaption property**read / write**

Determines whether the sub item caption is displayed.

property ShowCaption: Boolean;

Description

If ShowCaption is True, then the caption of a given sub item will be displayed on a toolbar. Otherwise, it is not displayed. Use this property if you want the sub item to be displayed as an icon without any text.

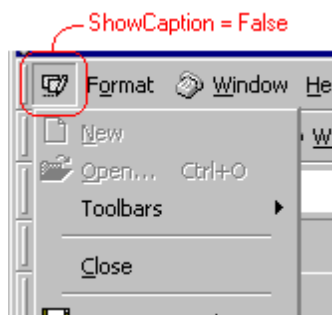

TCustomdxBarSubItem Methods

TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived from TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

CanContainItem method

Specifies whether an item link to a particular item can be added to the TCustomdxBarSubItem ItemLinks list.

```
function CanContainItem(AItem: TdxBarItem): Boolean;
```

Description

This function returns True if the item link to an item, specified by the AItem parameter, can be added to the TCustomdxBarSubItem ItemLinks property; Else, it returns False. Self-reference is not available.

DoCloseUp method

```
procedure DoCloseUp; dynamic;
```

Description

DoCloseUp is called upon closing a sub item. DoCloseUp generates the OnCloseUp event. Descendants can override this method to perform specific actions on closing a sub menu.

See Also

TCustomdxBarSubItem.DoPopup

DoPopup method

```
procedure DoPopup; dynamic;
```

Description

DoPopup is called when a sub item opens. DoPopup generates the OnPopup event. Descendants can override this method to perform specific actions on opening the a menu.

GetDetachingBar method

Returns a toolbar assigned to a specific subitem.

```
function GetDetachingBar: TdxBar;
```

Description

The ExpressBars Suite allows you to implement detachable submenus in your application. Said differently, if the Detachable property is set to **True**, a bar appears at the top of the submenu list. By dragging this bar, a user can activate the toolbar assigned via the DetachingBar property. The DetachingBar property contains the toolbar's index, therefore, call the GetDetachingBar method to obtain the appropriate TdxBar object.

See Also

TCustomdxBarSubItem.Detachable;TCustomdxBarSubItem.DetachingBar;

TCustomdxBarSubItem.OnDetaching

TCustomdxBarSubItem Events

TCustomdxBarSubItem

OnCloseUp	protected	OnPaintBar	published
OnDetaching	published	OnPopup	protected

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

OnCloseUp event

Occurs when a dropdown window closes.

type

```
TNotifyEvent = procedure(Sender : TObject) of object;  
property OnCloseUp: TNotifyEvent;
```

Description

Write an OnCloseUp event handler to perform specific actions when closing a dropdown window.

See Also

TCustomdxBarSubItem.OnPopup


OnDetaching event

Occurs when a user starts to drag the bar.

property OnDetaching: TNotifyEvent;

Description

Write an OnDetaching event handler to perform specific actions when a user starts to drag the detaching bar. For instance, you can create your own toolbar and assign it to the subitem on the fly.

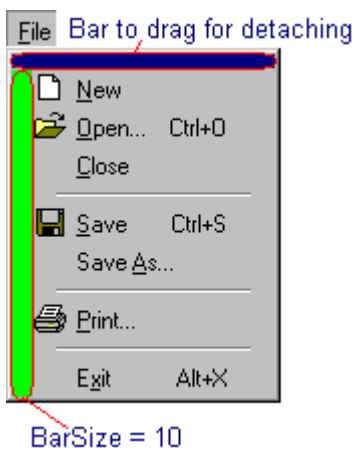

See Also

TCustomdxBarSubItem.Detachable; TCustomdxBarSubItem.DetachingBar;
TCustomdxBarSubItem.GetDetachingBar

OnPaintBar event

Occurs when drawing a bar at the left side of the submenu.

type


```
TdxBarPaintSubMenuBarEvent = procedure(Sender: TObject; Canvas:
TCanvas; const R: TRect) of object;
property OnPaintBar: TdxBarPaintSubMenuBarEvent;
```

Description

Write an OnPaintBar event handler to draw a bar based upon your specific needs. The Canvas parameter determines the drawing canvas. The R parameter specifies the drawing rectangle.

The following example illustrates how to draw a bar and fill it with a lime color.

```
Canvas.Brush.Color := clLime;
Canvas.FillRect(R);
```

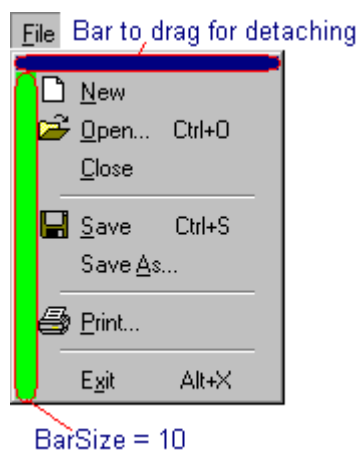

OnPopup event

Occurs when a dropdown window opens.

type

```
TNotifyEvent = procedure(Sender : TObject) of object;
property OnPopup: TNotifyEvent;
```

Description

Write an OnCloseUp event handler to perform specific actions when opening a dropdown window.

See Also

TCustomdxBarSubItem.OnCloseUp

TdxBarSubItem

This class is a direct descendant of the TCustomdxBarSubItem class.

Unit

dxBar

```
TdxBarSubItem = class(TCustomdxBarSubItem);
```

Description

Items of the TdxBarSubItem type are used to represent subitems on toolbars. Subitems are items that contain other items, specified in the TdxBarManager list. TdxBarSubItem is visually represented as a submenu. The TdxBarSubItem is a direct descendant of TCustomdxBarSubItem. The only difference between these classes is that the TdxBarSubItem has a published ItemLinks property.

Hierarchy

TObject

 TPersistent

 TComponent

 TdxBarItem

 TCustomdxBarSubItem

TdxBarSubItem Properties

TdxBarSubItem

AllowCustomizing published / read / write

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	published / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

AllowCustomizing property

read / write

Determines whether a user can customize sub items.

property AllowCustomizing: Boolean;

Description

If AllowCustomizing is True, a user can customize a given sub item. Said differently, he can add, delete, and move item links.

TdxBarSubItem Methods

Derived from TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived from TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

TdxBarSubItem Events

Derived from TCustomdxBarSubItem

OnCloseUp	published	OnPaintBar	published
OnDetaching	published	OnPopup	published

Derived from TdxBarItem

OnClick	published	OnDestroy	published
OnCreate	protected		

TCustomdxBarContainerItem

TCustomdxBarContainerItem is a base class for items with programmatically added item links.

Unit

dxBar

```
TCustomdxBarContainerItem = class(TCustomdxBarSubItem);
```

Description

Since item links are added to the TCustomdxBarContainerItem programmatically, you cannot add any item control to it at design time. Use TCustomdxBarContainerItem descendants to create sub menus with floating number of items at runtime, such as a list of recently used files or a list of child windows. TdxBarListItem and TdxBarContainerItem are inherited from this class.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TCustomdxBarSubItem

TCustomdxBarContainerItem Properties

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	public / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

TCustomdxBarContainerItem Methods

TCustomdxBarContainerItem

AddListedItemLinks	protected	ClearItemList	protected
DeleteListedItemLinks	protected		

Derived from TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived from TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

AddListedItemLinks method

Adds the item links defined in the TCustomdxBarContainerItem ItemLinks property to the item links of another object that can contain them.

procedure AddListedItemLinks(AItemLinks: TdxBarItemLinks; AIndex: Integer; FirstCall: Boolean); **virtual**;

Description

This method is used internally. It adds the item links specified by the ItemLinks property to the TdxBarItemLinks object specified by the AItemLinks parameter. The start position in the TdxBarItemLinks object wherein to add item links is specified by the AIndex parameter. FirstCall determines whether it is necessary to generate the OnGetData event. Descendants can override this method to add their own item links to the item links of toolbars or sub items.

See Also

TCustomdxBarContainerItem.DeleteListedItemLinks; TCustomdxBarSubItem.ItemLinks

DeleteListedItemLinks method

Removes item links specified by the ItemLinks property from the item links of another object containing the items.

```
procedure DeleteListedItemLinks(AItemLinks: TdxBarItemLinks; AIndex:  
Integer); virtual;
```

Description

This method is used internally. It removes item links added by the AddListedItemLinks method from the TdxBarItemLinks object specified by the AItemLinks parameter. AIndex determines the position of the first item link to delete. The DeleteListedItemLinks method for this class does nothing. Descendants can override it to remove previously added item links from toolbar item links.

See Also

TCustomdxBarContainerItem.AddListedItemLinks; TCustomdxBarSubItem.ItemLinks

ClearItemList method

Clears the item links list specified by the ItemLinks property.

```
procedure ClearItemList; virtual;
```

Description

This method is used internally. TCustomdxBarContainer ClearItemList does nothing except for setting an indicator which specifies whether it is necessary to clear the item list. Descendants can override this method to clear the item links list.

See Also

TCustomdxBarSubItem.ItemLinks

TCustomdxBarContainerItem Events

TCustomdxBarContainerItem

OnGetData published

Derived from TCustomdxBarSubItem

OnCloseUp	protected	OnPaintBar	published
OnDetaching	published	OnPopup	protected

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

OnGetData event

Occurs prior to activation of the list stored in a container item on screen.

property OnGetData: TNotifyEvent;

Description

Write an OnGetData event handler to perform specific actions before a container item activates its list on screen. For instance, the event handler can mark several items in a list as selected.

TdxBarContainerItem

TdxBarContainerItem types represent items with programmatically added links on a toolbar.

Unit

dxBar

```
TdxBarContainerItem = class(TCustomdxBarContainerItem);
```

Description

This class represents the item in which the programmer may specify links to other items of the TdxBarManager. By filling the ItemLinks property with appropriate values, you can create a structure that resembles Favorites in Microsoft(r) Internet Explorer™ 4.0. The ItemLinks property can be updated at any moment in time, however, it can be easier to perform this action in the OnGetData event handler.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarButton

TdxBarWindowItem

TdxBarEdit

TCustomdxBarCombo

TdxBarCombo

TCustomdxBarSubItem

TCustomdxBarContainerItem

TdxBarControllerItem Properties

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	public / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

TdxBarContainerItem Methods

TdxBarContainerItem

AddListedItemLinks	protected
DeleteListedItemLinks	protected

Derived form TCustomdxBarContainerItem

ClearItemList	protected
---------------	-----------

Derived from TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived from TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

AddListedItemLinks method

Adds its own item links to bar control item links.

```
procedure AddListedItemLinks(AItemLinks: TdxBarItemLinks; AIndex:
Integer; FirstCall: Boolean); override;
```

Description

This procedure adds new item links to TdxBarItemLinks objects specified by the AItemLinks parameter. AItemLinks is the ItemLinks property of the destination toolbar. This method deletes the item link from the destination item links and inserts its own item links according to the number of strings specified by the Items property. AIndex specifies the position in the destination item links at which the addition starts. FirstCall specifies whether the OnGetData event is generated. The BeginGroup property of the first added link is set to True.

See Also

TdxBarItemLink.BeginGroup; TdxBarItemLinks

DeleteListedItemLinks method

Deletes its own item links from the toolbar item links.

```
procedure DeleteListedItemLinks(AItemLinks: TdxBarItemLinks;  
AIndex: Integer); override;
```

Description

This method removes previously added item links from the TdxBarItemLink specified by the AItemLinks parameter. AIndex specifies the start position from where to remove the item links. Be sure that the AItemLinks and AIndex parameters specify the same item links that were used in the AddListedItemLinks method.

TdxBarContainerItem Events

Derived from TCustomdxBarContainerItem

OnGetData	published
-----------	-----------

Derived from TCustomdxBarSubItem

OnCloseUp	protected	OnPaintBar	published
OnDetaching	published	OnPopup	protected

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarListItem

TdxBarListItem is used to represent a list of toolbar strings.

Unit

dxBar

```
TdxBarListItem = class(TCustomdxBarContainerItem);
```

Description

The TdxBarListItem items are useful for the display of a numerated list of strings. Examples of numerated lists are lists of recently used files and lists of active windows in MDI applications. When creating numerated lists every text string is prefixed by a number. If the TdxBarListItem is placed on the toolbar, the TdxBarListItem appears as a submenu. If the TdxBarListItem is placed on a submenu, TdxBarListItems is presented as a string list.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TCustomdxBarSubItem

TCustomdxBarContainerItem

TdxBarListItem Properties

TdxBarListItem

DataIndex	published / read / write	ShowCheck	published / read / write
ItemIndex	published / read / write	ShowNumbers	published / read / write
Items	published / read / write		

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	public / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	published / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	published / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

DataIndex property

read / write

Determines an array of text strings that make up a list.

property DataIndex : Integer;

Description

Use the DataIndex property to select a list item at runtime. The DataIndex property corresponds to the item number in the list. The DataIndex of the first list item is 0. If no item is selected, the value is -1. This property works similar to the ItemIndex property but if item text is equal to dash "-", it is not considered when calculating the DataIndex.

See Also

TdxBarListItem.ItemIndex;TdxBarListItem.Items

ItemIndex property**read / write**

Specifies the index of a selected item in a list.

property ItemIndex : Integer;

Description

Use ItemIndex to select a list item at runtime. The ItemIndex corresponds to the item number in the list. The ItemIndex of the first list item is 0. If no item is selected, the value is -1.

Note: If the text of an item in the TdxBarListItem Items property is equal to dash "-", then it is not considered when the component calculates the ItemIndex.

See Also

TdxBarListItem.Items

Items property**read / write**

Determines an array of text strings that make up a list.

property Items: TStrings;

Description

Specifies the TStrings object, whose items are drawn on a bar control. During display, TdxBarListItem strings are numerated automatically. If the string is equal to '-', it is treated as a separator and the component does not create an item link and thus is not taken into consideration by the component when calculating the ItemIndex. The item control corresponding to the string next to the '-' string starts a group.

See Also

TdxBarItemLink; TdxBarItemLink.BeginGroup; TdxBarListItem.ItemIndex

ShowCheck property**read / write**

Determines whether to mark a selected item in a list.

property ShowCheck: Boolean;

Description

If True, the selected list item displays a check mark. The selected item is determined by the ItemIndex property. If ShowCheck is False, list items are displayed much like standard menu items.

See Also

TdxBarButton.ButtonStyle; TdxBarListItem.ItemIndex; TdxBarListItem.Items

ShowNumbers property**read / write**

Determines whether to display the numeration of TdxBarListItem strings.

property ShowNumbers: Boolean;

Description

If set to True (by default), numbers are displayed on the left side of TdxBarListItem strings.
Set the ShowNumbers property to False to suppress this set.

See Also

TdxBarListItem.Items

TdxBarListItem Methods

Derived form TCustomdxBarContainerItem

AddListedItemLinks	protected
DeleteListedItemLinks	protected
ClearItemList	protected

Derived form TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived from TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

TdxBarListItem Events

Derived from TCustomdxBarContainerItem

OnGetData	published
-----------	-----------

Derived from TCustomdxBarSubItem

OnCloseUp	protected	OnPaintBar	published
OnDetaching	published	OnPopup	protected

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarToolbarsListItem


Unit

dxBarExtItems

```
TdxBarToolbarsListItem = class(TCustomdxBarSubItem);
```

Description

This item is presents as a sub menu which contains a list of existing toolbars. Use it to allow users to display and hide toolbars from a menu without calling the toolbar popup list.

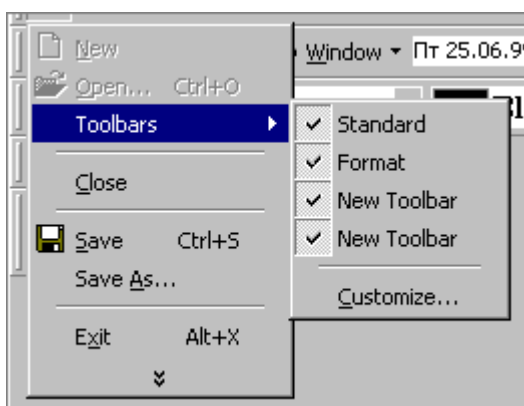

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TCustomdxBarSubItem

TdxBarToolbarsListItem Properties

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	protected / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

TdxBarToolbarsListItem Methods

Derived from TCustomdxBarSubItem

CanContainItem	public / read / write	DoPopup	protected / read / write
DoCloseUp	protected / read / write	GetDetachingBar	public

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

TdxBarToolbarsListItem Events

Derived from TCustomdxBarSubItem

OnCloseUp	protected
OnPopup	protected

Derived from TdxBarItem

OnClick	published	OnDetaching	published
OnCreate	protected	OnPaintBar	published
OnDestroy	published		

TdxBarColorCombo

Provides the ability to work with a combo box whose dropdown window contains a color list.

Unit

dxBarExtItems

```
TdxBarColorCombo = class(TdxBarCustomCombo);
```

Description

TdxBarColorCombo is used to select colors from a combo box. It provides a list of sixteen predefined colors: clBlack, clMaroon, clGreen, clOlive, clNavy, clPurple, clTeal, clGray, clSilver, clRed, clLime, clYellow, clBlue, clFuchsia, clAqua, clWhite. If DockingStyle of a toolbar to which a TdxBarColorCombo belongs is dsRight or dsLeft, TdxBarColorCombo appears as a button. When pressed, a color selection dialog appears.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarWindowItem

TdxBarEdit

TCustomdxBarCombo

TdxBarCustomCombo

TdxBarColorCombo Properties

TdxBarColorCombo

AutoColor	published / read / write	ShowAutoColor	published / read / write
AutoColorText	published / read / write	ShowCustomColorButton	published / read / write
Color	published / read / write	ShowEditor	published / read / write
CurColor	public / read / write	Text	published / read / write
CustomColorText	published / read / write		

Derived from TdxBarCustomCombo

Canvas	public / read only	ItemIndex	public / read / write
CurItemIndex	published / read / write	Items	public / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	ListBox	public / read only
ItemHeight	public / read / write	Sorted	public / read / write

Derived from TCustomdxBarCombo

Canvas	protected / read / write	DropDownWindow	public / read only
DroppedDown	public / read / write	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

AutoColor property[read / write](#)

Specifies the color to be displayed in a list as the automatic color.

```
property AutoColor: TColor;
```

Description

Use this property to specify the color to be displayed in a dropdown list as the automatic color.

Note: The automatic color item is visible if the *ShowAutoColor* property is *True*.

See Also

TdxBarColorCombo.ShowAutoColor

AutoColorText property[read / write](#)

Specifies the text of the automatic color item.

```
property AutoColorText: string;
```

Description

Use this property to indicate automatic color item text. By default, this text equals "(automatic)".

Note: The automatic color item is visible if the *ShowAutoColor* property is *True*.

See Also

TdxBarColorCombo.ShowAutoColor

Color property[read / write](#)

Specifies selected color.

```
property Color: TColor;
```

Description

This property specifies the current color. Assign a value to the Color property in the Object Inspector or in program code to set a default color when opening the color selection dialog.

CurColor property**read / write**

Specifies the color currently selected in TdxBarColorCombo.

property CurColor: TColor;

Description

Use this property to specify the current color for TdxBarColorCombo. It is used only during editing. The CurColor property is set to 0, as soon as a user presses ENTER or exits the color combo.

CustomColorText property**read / write**

Specifies the custom text to appear in a combo box.

property CustomColorText: string;

Description

If the color with the specified name in the Text property is not in the list, the value of the CustomColorText property appears in the combo box editor. The same result occurs if the selected color does not match any predefined colors.

See Also

TdxBarColorCombo.Color

ShowAutoColor property**read / write**

Determines whether the automatic color item is displayed in TdxBarColorCombo.

property ShowAutoColor: Boolean;

Description

If ShowAutoColor is True, TdxBarColorCombo includes an automatic color item.

Use the AutoColor and AutoColorText properties to determine the color and text of the automatic color item.

See Also

TdxBarColorCombo.AutoColor; TdxBarColorCombo.AutoColorText;

ShowCustomColorButton property**read / write**

Determines whether the custom color button is visible.

property ShowCustomColorButton: Boolean;

Description

If ShowCustomColorButton is True, then a custom color button is drawn to the left of TdxBarColorCombo. Press this button to activate the color dialog with which users can select any custom color not displayed in the dropdown list.



ShowEditor**read / write**

Specifies whether to allow editing within a combo box.

property ShowEditor: Boolean;

Description

If True, color name may be entered into the combo box editor by users. If this name matches a color name from the dropdown list, the selected color changes. Otherwise, the combo box has no selected color and 'no value' appears within the combo box editor.

Text property**read / write**

Specifies the text to appear in a combo box.

property Text: String;

Description

The Text property contains the generally accepted name of the current color. For instance, for the clRed color, the Text property is equal to 'Red'. If a color with the specified name is in the list, the selected color changes, otherwise, value of the CustomColorText property appears in the combo box editor. The same result occurs if the selected color does not match any predefined colors.

TdxBarColorCombo Methods

TdxBarColorCombo

Change	protected
Create	public
DoClick	public

Derived from TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	MeasureItem	protected
DrawItem	protected	MeasureItemWidth	protected
GetDropDownWidth	protected		
GetDropDownWindow	protected		

Derived from TCustomdxBarCombo

AfterDropDown	protected	DropDown	protected
CloseUp	protected		
DrawInterior	protected		

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		
KeyDown	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

Change method

Responds to the changes in a combo box.

```
procedure Change; override;
```

Description

This procedure is called when combo box contents change. Changes in the TdxBarColorCombo Color or Text properties lead to changes in selected color.

Create method

Creates an instance of the TdxBarColorCombo type.

```
constructor Create(AOwner: TComponent); override;
```

Description

This method creates and initializes the TdxBarColorCombo object. After the inherited constructor has been called, the Create method creates the dropdown list. The number of dropdown list items is sixteen. The predefined colors are the following: clBlack, clMaroon, clGreen, clOlive, clNavy, clPurple, clTeal, clGray, clSilver, clRed, clLime, clYellow, clBlue, clFuchsia, clAqua, clWhite. The Create method sets the ShowEditor to False and loads an image for the Glyph property from resources.

DoClick method

Activates the color selection dialog.

```
procedure DoClick; override;
```

Description

This procedure is called if the DockingStyle of a toolbar to which a given combo box belongs is dsRight or dsLeft. With these docking styles, the combo box appears as a toolbar button. The DoClick method is called on the button click event and displays a color selection dialog. The color selected from this dialog is stored in the Color property of the TdxBarColorCombo object.

TdxBarColorCombo Events

Derived from TdxBarCustomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published	OnGetDropDownWindow	published
OnCloseUp	published		
OnDropDown	published		

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarDateCombo

TdxBarDateCombo provides methods and properties for a quick and easy date selection.

Unit

dxBarExtItems

```
TdxBarDateCombo = class(TCustomdxBarCombo);
```

Description

TdxBarDateCombo provides users with a powerful date selection mechanism. The dropdown window of this combo box appears as a calendar. It allows selection via a visual calendar or a keyboard. The selected date is stored in the Date property as a TDateTime value and in the Text property as a string.

Hierarchy

```
graph TD
    TdxBarDateCombo --> TCustomdxBarCombo
    TCustomdxBarCombo --> TdxBarEdit
    TdxBarEdit --> TdxBarWindowItem
    TdxBarWindowItem --> TdxBarItem
    TdxBarItem --> TComponent
    TComponent --> TPersistent
    TPersistent --> TObject
```

TdxBarDateCombo Properties

TdxBarDateCombo

CurDate	public / read / write	ShowTodayButton	published / read / write
Date	public / read / write	ShowClearButton	published / read / write
DatePopup	protected / read / write		

Derived from TdxBarCustomCombo

CurItemIndex	published / read / write	Items	public / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	ListBox	public / read only
ItemHeight	public / read / write	Sorted	public / read / write
ItemIndex	public / read / write		

Derived from TCustomdxBarCombo

Canvas	protected / read / write	DropDownWindow	public / read only
DroppedDown	public / read / write	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

CurDate property**read / write**

Specifies the selected date in TdxBarDateCombo.

property CurDate: TDateTime;

Description

Use this property to obtain the selected date in a date editor. This property is only effective during editing. It is cleared upon pressing the ENTER key of TdxBarDateCombo.

Date property**read / write**

Contains the selected date.

property Date: TDateTime;

Description

Use it to set or retrieve a date. TdxBarDateCombo provides two methods of date selection: from the dropdown calendar or the keyboard. When using the keyboard, be sure to use the ENTER key to confirm data input.

DatePopup property**read only**

Specifies a dropdown calendar window.

property DatePopup: TdxBarDateNavigator;

Description

Use this property to refer to the dropdown calendar. The DatePopup property is used internally to customize calendar behavior.

See Also

TdxBarDateNavigator

ShowClearButton property**read / write**

Specifies whether to show the 'Clear' button within a dropdown calendar.

property ShowClearButton: Boolean;

Description

The ShowClearButton is True by default. If True, a 'Clear' button is drawn within the calendar. This button sets TdxBarDateCombo to a NULL date value.

ShowTodayButton property**read / write**

Specifies whether to show the 'Today' button within a dropdown calendar.

property ShowTodayButton: Boolean;

Description

The ShowTodayButton is True by default. If True, a 'Today' button is drawn within the calendar. This button sets TdxBarDateCombo to the current system date.

TdxBarDateCombo Methods

TdxBarDateCombo

Create	public	DoClick	public
Destroy	public	DropDown	protected

Derived from TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	GetDropDownWindow	protected
DrawItem	protected	MeasureItem	protected
GetDropDownWidth	protected	MeasureItemWidth	protected

Derived from TCustomdxBarCombo

AfterDropDown	protected	DrawInterior	protected
CloseUp	protected	DropDown	protected

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

CurChange	protected	KeyDown	protected
DoEnter	protected	KeyPress	protected
DoExit	protected	KeyUp	protected

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
DirectClick	protected	Update	protected
EnabledChanged	protected	UpdateEx	protected
GetActionLinkClass	protected	UseHotImages	protected
GetParentComponent	public	UseLargeImages	protected
GlyphChanged	protected	VisibleChanged	protected

Create method

Creates an instance of TdxBarDateCombo.

constructor Create(AOwner: TComponent); **override**;

Description

This method is used to create and initialize a TdxBarDateCombo object. After calling the inherited method, Create sets the Date property to the current date and sets the ShowTodayButton and ShowClearButton to True. Descendants can override this method to perform special actions with an object.

Destroy method

Destroys a TdxBarDateCombo object.

destructor Destroy; **override**;

Description

This method destroys a TdxBarDateCombo instance. Descendants can override it to perform additional actions while destroying the object.

DoClick method

Opens a dialog to select a date.

procedure DoClick; **override**;

Description

This method is only called if DockingStyle of the parent bar control is set to dsRight or dsLeft. In this instance, TdxBarDateCombo appears as a toolbar button. Press this button to call the DoClick procedure. The DoClick method opens a date selection dialog. Use the ShowTodayButton and the ShowClearButton properties to customize the look of the calendar.

See Also

TdxBarItem.OnClick

DropDown method

Displays a dropdown calendar.

procedure DropDown(X, Y: Integer); **override**;

Description

Used to initialize calendar parameters and to display a dropdown calendar. The X and Y parameters specify the left top corner coordinates of the calendar window. This procedure is called only if DockingStyle of the parent bar control is not dsRight or dsLeft.

TdxBarDateCombo Events

Derived from TdxBarCustomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published	OnGetDropDownWindow	published
OnCloseUp	published		
OnDropDown	published		

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarFontNameCombo

Represents a combo box with a list of fonts available to the system.

Unit

dxBarExtItems

```
TdxBarFontNameCombo = class(TdxBarCustomCombo);
```

Description

TdxBarFontNameCombo type items provide an easy mechanism for font selection. The selected font name is stored in the TdxBarFontNameCombo Text property. It allows selection by means of the keyboard or a dropdown list.

Hierarchy

```
Object
  TPersistent
    TComponent
      TdxBarItem
        TdxBarWindowItem
          TdxBarEdit
            TCustomdxBarCombo
              TdxBarCustomCombo
```

TdxBarFontNameCombo Properties

TdxBarFontNameCombo

ShowEditor published / read / write

Derived from TdxBarCustomCombo

Canvas	public / read only	ItemIndex	public / read / write
CurlItemIndex	published / read / write	Items	public / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	Listbox	public / read only
ItemHeight	public / read / write	Sorted	public / read / write

Derived from TCustomdxBarCombo

Canvas	protected / read / write	DropDownWindow	public / read only
DroppedDown	public / read / write	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

TdxBarFontNameCombo Methods

TdxBarFontNameCombo

Create	public
DoClick	public

Derived from TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	MeasureItem	protected
DrawItem	protected	MeasureItemWidth	protected
GetDropDownWidth	protected		
GetDropDownWindow	protected		

Derived from TCustomdxBarCombo

AfterDropDown	protected	DropDown	protected
CloseUp	protected		
DrawInterior	protected		

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		
KeyDown	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

Create method

Creates an instance of the TdxBarFontNameCombo type.

constructor Create(AOwner: TComponent); **override**;

Description

This method creates and initializes the TdxBarFontNameCombo object. After calling the inherited constructor, the Create method builds the font name list. The DropDownCount property is set to 12. By default, the font list is sorted in alphabetical order. The ShowEditor property is set to False.

DoClick method

Activates a font selection dialog.

```
procedure DoClick; override;
```

Description

This procedure is called only if DockingStyle of the toolbar to which a given combo box belongs is dsRight or dsLeft. In such an instance, the combo box appears as a button on the toolbar. Pressing this button calls the DoClick method. DoClick activates a font selection dialog. The name of the selected font is stored in the combo box Text property.

See Also

TdxBarItem.OnClick

TdxBarFontNameCombo Events

Derived from TdxBarCustomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published	OnGetDropDownWindow	published
OnCloseUp	published		
OnDropDown	published		

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarImageCombo

Provides methods and properties to create combo boxes with text and image items in the dropdown list.

Unit

dxBarExtItems

```
TdxBarImageCombo = class(TdxBarCustomCombo);
```

Description

The dropdown items list of the TdxBarImageCombo object consists of text strings and images. An application may display either text, image, or both within the combo box. The text element of the dropdown list is drawn next to the image. There are two methods of item selection from this dropdown list: Selection from the dropdown list itself or selection via the keyboard.

Hierarchy

```

TObject
  TPersistent
    TComponent
      TdxBarItem
        TdxBarWindowItem
          TdxBarEdit
            TCustomdxBarCombo
              TdxBarCustomCombo
```

TdxBarImageCombo Properties

TdxBarImageCombo

ImageIndexes	public / read / write	Sorted	published / read / write
Images	published / read / write	ItemIndex	published / read / write
Items	published / read / write	ShowText	published / read / write
ShowEditor	published / read / write		

Derived from TdxBarCustomCombo

Canvas	public / read only	ItemIndex	public / read / write
CurlItemIndex	published / read / write	Items	published / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	ListBox	public / read only
ItemHeight	public / read / write	Sorted	public / read / write

Derived from TCustomdxBarCombo

Canvas	protected / read / write	DropDownWindow	public / read only
DroppedDown	public / read / write	Show Editor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

ImageIndexes property

read / write

Contains an image index array of dropdown list items.


```
property ImageIndexes[Index: Integer]: Integer;
```

Description

Every dropdown list item is presented as a text string and as a picture. Each element of the ImageIndexes array is an index of the item image in the image list specified by the ImageList property. The Index parameter is the index of the dropdown list item in the TdxBarImageCombo Items list. If the ImageIndexes array element is -1, then the dropdown item list has no associated image.

Images property

[read / write](#)

Specifies the images list associated with a dropdown items list.

```
property Images: TImageList;
```

for Delphi 4™

```
property Images: TCustomImageList;
```

Description

Every dropdown item consists of text and an image. The ImageList contains the bitmaps to display next to text for a dropdown item.

ItemIndex property

[read / write](#)

Specifies the selected dropdown list item.

```
property ItemIndex : Integer;
```

Description

ItemIndex defines the index of a selected dropdown list item. The index of the first dropdown list item is 0.

See Also

TdxBarColorComboControl.LocalItemIndex

Items property

[read / write](#)

Specifies dropdown list items.

```
property Items: TStrings;
```

Description

Contains an array of items displayed in a dropdown list. Every item from the TdxBarImageCombo list consists of text and an image. The image is drawn to the left of text. Images are associated with items via the ImageIndexes property.

ShowEditor property**read / write**

Specifies whether to show an editor in a combo box.

property ShowEditor : Boolean;

Description

Setting the ShowEditor to True allows combo box text editing. If the text matches one of the dropdown list items, this item appears in the combo box editor. If text does not match any of the dropdown list items, the combo box displays only the text without an associated image.

ShowText property**read / write**

Specifies whether to display text within a dropdown list.

property ShowText : Boolean;

Description

Each item in a TdxBarImageCombo object consists of text and an image. The text appears next to the image in the dropdown list and in the combo box editor. If ShowText is True, TdxBarImageCombo shows both the text and the image. Set ShowText to False in order to prevent the display of item text.

Sorted property**read / write**

Specifies whether to show the dropdown list items in alphabetical order.

property Sorted : Boolean;

Description

If True, items in a drop down list are alphabetized; Else, the dropdown list items are displayed in order of creation. When the Sorted is True, a new item is set to the dropdown list according to the value of its text.

TdxBarImageCombo Methods

TdxBarImageCombo

Create	public
DoClick	public
ImagesChanged	protected

Derived from TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	MeasureItem	protected
DrawItem	protected	MeasureItemWidth	protected
GetDropDownWidth	protected		
GetDropDownWindow	protected		

Derived from TCustomdxBarCombo

AfterDropDown	protected	DropDown	protected
CloseUp	protected		
DrawInterior	protected		

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		
KeyDown	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

Create method

Creates a TdxBarImageCombo type object.

constructor Create(AOwner: TComponent); **override**;

Description

This method creates and initializes the TdxBarImageCombo object. After calling the inherited constructor, the Create method loads the default glyph from resources, sets the ShowEditor property to False and sets the ShowText property to True.

DoClick method

Activates a dialog to select a dropdown list item.

procedure DoClick; **override**;

Description

This method is called only if the DockingStyle of a bar control is dsRight or dsLeft. In this instance, TdxBarImageCombo appears as a button on the toolbar. If the OnClick event handler is assigned, the DoClick method generates the OnClick event. Otherwise, after calling the inherited method, DoClick activates a list box window.

See Also

TdxBar.DockingStyle

ImagesChanged method

Called on changing the ImageList property.

procedure ImagesChanged; **virtual**;

Description

Each time a change is made to the TdxBarImageCombo ImageList property, the ImageChanged method is called. Override it to perform special actions when changing the ImageList property.

TdxBarImageCombo Events

Derived from TdxBarCustomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published
OnCloseUp	published
OnDropDown	published
OnGetDropDownWindow	published

Derived from TdxBarWindowItem

OnChange	published
OnCurChange	published
OnEnter	published
OnExit	published
OnKeyDown	published
OnKeyPress	published
OnKeyUp	published

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarLookupCombo

TdxBarLookupCombo maintains a list of lookup values associated with a set of key field values.

Unit

dxBarExtDBItems

```
TdxBarLookupCombo = class(TCustomdxBarCombo);
```

Description

The TdxBarLookupCombo type item represents a lookup combo on a toolbar. Each lookup value is associated with a set of key fields values. The Key Field values correspond to the key field values of a dataset. When a user selects a new row from the dropdown list, the KeyValue property of the TdxBarLookupCombo object changes. You can use this changed KeyValue in further work with datasets.

Hierarchy

```
Object
  TPersistent
    TComponent
      TdxBarItem
        TdxBarWindowItem
          TdxBarEdit
            TCustomdxBarCombo
```

TdxBarLookupCombo Properties

TdxBarLookupCombo

AllowResizing	published / read / write	ListFields	protected / read only
Color	published / read / write	ListFieldIndex	published / read / write
EditText	protected / read / write	ListLink	protected / read only
ImmediateDropDown	published / read / write	ListSource	published / read / write
KeyField	published / read / write	PopupWidth	published / read / write
KeyValue	public / read / write	RowCount	published / read / write
ListField	published / read / write		

Derived from TCustomdxBarCombo

Canvas	protected / read / write	DropDownWindow	public / read only
DroppedDown	public / read / write	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		

AllowResizing property

read / write

Specifies whether dropdown window resizing is available.

property AllowResizing : Boolean;

Description

If AllowResizing is True, the dropdown window allows runtime resizing using the window grip.

Color property

[read / write](#)

Specifies the background color of a dropdown window.

property Color: TColor;

Description

By default, the color of a dropdown window's background is equal to clWindow (COLOR_WINDOW). Use the Color property to set any other color for this background.

EditText property

[read / write](#)

Contains text from the current row of a list box.

property EditText: String;

Description

This property is used internally to capture text currently edited in a combo box.

ImmediateDropDown property

[read / write](#)

Specifies how a dropdown window appears to users.

property ImmediateDropDown: Boolean;

Description

If ImmediateDropDown is True, the dropdown window activates every time users enter text in the editor of a combo box. If ImmediateDropDown is False, the dropdown window activates only when the list does not contain matches to the entered text.

KeyField property

[read / write](#)

Specifies a dataset's key field.

property KeyField: string;

Description

Use this property to set or get the name of a dataset's key field. The key field value is used for further dataset processing. Each row in a dropdown list has a corresponding key field value. The key field value corresponding to the selected value in the TdxBarLookupCombo is stored in the KeyValue property.

KeyValue property

read / write

Contains the actual value of a key field.

```
property KeyValue: Variant;
```

Description

This property contains the key field value of a selected row. Use this value to filter or locate records in a dataset. After selecting a new item from the dropdown list, the KeyValue property changes to store the key field value of the appropriate record.

ListField property

read / write

Specifies the field whose value is displayed in the dropdown window.

```
property ListField: string;
```

Description

This property specifies the field or list of fields whose values are displayed in the dropdown list. To display several fields in the list, fields names must be separated by semicolons. If a field name is not specified, TdxBarLookupCombo displays the KeyField value in the dropdown list. The field whose value is displayed in the editor of the combo box is specified by the ListFieldIndex parameter.

See Also

TdxBarLookupCombo.KeyField; TdxBarLookupCombo.ListFieldIndex

ListFieldIndex property

read / write

Specifies the field index whose value is displayed in the combo box editor.

```
property ListFieldIndex: Integer;
```

Description

A dropdown list can display values from several fields. The ListFieldIndex property specifies the field index in a field list. The value of field specified by the ListFieldIndex is displayed in the combo box editor.

See Also

TdxBarLookupCombo.ListField

ListFields property

read only

Contains field names whose values are displayed as rows in a dropdown list.

```
property ListFields: TList;
```

Description

The ListField property specifies one or more fields to be displayed in a dropdown list. The ListFields is an object of the TList type that stores the field names. TdxBarLookupCombo refers to these fields by index. The field, whose value is displayed in the editor of the combo box, is specified by the ListFieldIndex property.

ListLink**read only**

Specifies the link to data associated with a lookup combo.

property ListLink: TdxBarLookupLink;

Description

Data links to TdxBarLookupCombo via the TdxBarLookupLink object. The link defines the behavior of the lookup combo when the state of a dataset changes.

ListSource property**read / write**

Identifies the datasource for data displayed in a lookup control.

property ListSource: TDataSource;

Description

Set the ListSource property to specify the datasource that contains the KeyField and ListField.

PopupWidth property**read / write**

Specifies the width of a dropdown window.

property PopupWidth: Integer;

Description

Modify PopupWidth to increase or decrease the width of a dropdown window. If you've set PopupWidth to a value less than that of TdxBarLookupCombo, PopupWidth is automatically increased to match the width of TdxBarLookupCombo.

RowCount property**read / write**

Determines the number of rows in a dropdown window.

property RowCount: Integer;

Description

Use this property to set or get the number of dropdown rows displayed to a user. If the number of items in a list is greater than RowCount, a vertical scroll bar appears to the right side of a dropdown window.

TdxBarLookupCombo Methods

TdxBarLookupCombo

DoClick	public	KeyPress	protected
CheckKeyForDropDownWindow	protected		
KeyDown	protected		

Derived from TCustomdxBarCombo

AfterDropDown	protected	DropDown	protected
CloseUp	protected	GetDropDownWindow	protected
DrawInterior	protected		

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

Change	protected	DoExit	protected
CurChange	protected	KeyUp	protected
DoEnter	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Create	public	Update	protected
Destroy	public	UpdateEx	protected
DirectClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		
GlyphChanged	protected		

CheckKeyForDropDownWindow method

Determines whether key press events are processed by a dropdown window.

```
function CheckKeyForDropDownWindow(Key: Word; Shift: TShiftState): Boolean;
override;
```

Description

This function returns True if a dropdown window processes key press events. The Key parameter is a virtual key code. Shift specifies the Alt, Shift and Ctrl key states. The dropdown window only processes Arrow, Home, End, PgUp, and PgDn keys.

DoClick method

Opens a list box dialog.

```
procedure DoClick; override;
```

Description

This procedure is called if the DockingStyle of a parent bar control is dsRight or dsLeft. In this instance, the TdxBarLookupCombo is presented as a toolbar button and this method is called every time the user clicks the button. If the OnClick event handler has been defined, then DoClick calls it and exits. Otherwise, it creates and activates the dialog in order to select list box values. The selected data is stored in the TdxBarLookupCombo Text property.

See Also

TdxBarItem.OnClick; TdxBar.DockingStyle

KeyDown method

Called after a key has been pressed within a combo box.

```
procedure KeyDown(var Key: Word; Shift: TShiftState); override;
```

Description

This method processes key press events within the combo box. Key is a virtual key code. The Shift parameter specifies the Alt, Shift and Ctrl key states. When the ESCAPE key is pressed, the KeyDown method clears text in the combo box editor. Override this procedure to perform special actions on key press events without writing an OnKeyDown event handler.

KeyPress method

Called when pressing alphanumeric keys.

```
procedure KeyPress(var Key: Char); override;
```

Description

When a user presses alphanumeric keys within a combo box, KeyPress attempts to locate a corresponding item from the dropdown list. The Key parameter is the character represented by the key pressed, but not by the Windows virtual key code.

TdxBarLookupCombo Events

TdxBarLookupCombo

OnKeyValueChange **published**

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published	OnGetDropDownWindow	published
OnCloseUp	published		
OnDropDown	published		

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

OnKeyValueChange event

Occurs when the KeyValue property changes.

```
property OnKeyValueChange: TNotifyEvent;
```

Description

The KeyValue property changes every time a user selects a new row in a dropdown list. Unlike OnKeyValueChange, the OnChange event occurs when the contents of the combo box editor change. If the old and new items in the list have the same field values specified by the ListFieldIndex, the OnChange event is not generated.

TdxBarLargeButton

This class represents large toolbar buttons.

Unit

dxBarExtItems

```
TdxBarLargeButton = class(TdxBarButton);
```

Description

Items of the TdxBarLargeButton type provide an 'advanced' toolbar button interface. Also TdxBarLargeButton provides some new capabilities in order to create interfaces introduced in MS Internet Explorer(tm).

Hierarchy

TObject

 TdxBarItem

 TdxBarButton

TdxBarLargeButton Properties

TdxBarLargeButton

AutoGrayScale	published / read / write	LargeGlyph	published / read / write
GlyphLayout	published / read / write	LargeImageIndex	published / read / write
Height	published / read / write	ShowCaption	published / read / write
HotGlyph	published / read / write	Width	published / read / write
HotImageIndex	published / read / write		

Derived from TdxBarButton

AllowAllUp	published / read / write	DropDownEnabled	published / read / write
ButtonStyle	published / read / write	DropDownMenu	published / read / write
CloseSubMenuOnClick	published / read / write	Lowered	published / read / write
GroupIndex	published / read / write	PaintStyle	published / read / write
Down	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

AutoGrayScale property

read / write

Allows you to generate a highlighting effect on button images.

property AutoGrayScale: Boolean;

Description

If AutoGrayScale is True, button images are initially displayed as a black-and-white image, but when the mouse points to the button, the black-and-white image is colored.

See Also

TdxBarLargeButton.LargeGlyph; TdxBarLargeButton.HotGlyph; TdxBarLargeButton.HotImageIndex; TdxBarLargeButton.LargeImageIndex

GlyphLayout property**read / write**

Determines the glyph layout on a button.

type

```
TdxBarGlyphLayout = {glLeft, glRight, glTop, glBottom};
```

property GlyphLayout: TdxBarGlyphLayout;

Description

Use this property to set or get the glyph layout on a button. There are four different layouts:

Value	Meaning
glBottom	Glyph positioned under text.
glLeft	Glyph positioned to the left of the text.
glRight	Glyph positioned to the right of the text.
glTop	Glyph positioned above the text.

If the large button belongs to a sub menu or sub item, the image is always drawn to the left of the caption.

See Also

TdxBarLargeButton.ShowCaption

Height property**read / write**

Specifies button height.

property Height: Integer;

Description

Use this property to set or access the vertical size of TdxBarLargeButton. The default Height value is 0. In this instance, height of the linked item control will be calculated automatically.

Set the Height property to a value greater than 0 to specify precise height of a button. In this instance, the caption or glyph will be clipped if the height is greater than the Height property value. If the TdxBarLargeButton Height property changes, the HeightChanged method is called.

HotGlyph property**read / write**

Specifies the glyph that is drawn on the button when the button is selected.

property HotGlyph: TBitmap;

Description

The hot glyph is an image that appears on the button surface when the mouse pointer is over the button. The large image on the button is replaced by the hot image when the mouse points to the button. If the button doesn't have an associated large image, the hot image is drawn on the button.

Note: *Neither the hot image nor large image is drawn in the customizing popup or when the button belongs to a sub menu control. An image from the Image list is used instead.*

See Also

*TdxBarLargeButton.LargeGlyph; TdxBarLargeButton.HotImageIndex;
TdxBarLargeButton.LargeImageIndex*

HotImageIndex property**read / write**

Specifies the index of an associated image in the HotImages list.

property HotImageIndex: Integer;

Description

Set the HotImageIndex greater than -1 to associate an image from the TdxBarManager HotImages list. The hot image appears on the button surface when the mouse points to the button. If the button doesn't have an associated large image, the hot image is drawn on the button surface even when the mouse pointer is outside of the button area.

See Also

*TdxBarLargeButton.LargeGlyph; TdxBarLargeButton.HotGlyph; TdxBarLargeButton.HotImageIndex;
TdxBarLargeButton.LargeImageIndex*

LargeGlyph property**read / write**

Specifies the glyph drawn on a button.

property LargeGlyph: TBitmap;

Description

Large glyph is an image that appears on a button's surface. The large image on the button is replaced by the hot image (if the button has an associated hot image) when the mouse points to the button.

Note: *Neither the hot image nor large image is drawn in the customizing popup or when the button is in a sub menu. An image from the Image list is used instead.*

See Also

*TdxBarLargeButton.HotGlyph; TdxBarLargeButton.HotImageIndex;
TdxBarLargeButton.LargeImageIndex*

LargeImageIndex property**read / write**

Specifies the TdxBarManager LargeImages list associated with a button.

property LargeImageIndex: Integer;

Description

The large image is an image that appears on a button's surface. The layout of the button glyph and caption is defined by the GlyphLayout properties. Set the LargeImageIndex greater than -1 to associate an image from the TdxBarManager LargeImages list.

Note: *If a button does not have an associated large image, then hot images are drawn on a button's surface.*

See Also

TdxBarLargeButton.LargeGlyph; TdxBarLargeButton.HotGlyph; TdxBarLargeButton.HotImageIndex

TdxBarLargeButton.ShowCaption property**read / write**

Specifies whether the button displays a caption.

property ShowCaption: Boolean;

Description

If ShowCaption is True, then a button caption is displayed. The layout of the caption and the button glyph is specified in the GlyphLayout property of the TdxBarLargeButton item. Set ShowCaption to False to hide button captions.

Note: *ShowCaption has effect only if a sub item is located on a toolbar*

See Also

TdxBarLargeButton.GlyphLayout

Width property**read / write**

Specifies the width of a button.

property Width: Integer;

Description

Use this property to set or access the horizontal size of a button. The default Width value is 0. It specifies that the width of item controls are calculated automatically.

Set the Width property greater than 0 to specify the precise width of a button. In this instance, the caption or glyph will be clipped if its length is greater than the Width property value. If the Width property changes, the TdxBarLargeButton WidthChanged method is called.

TdxBarLargeButton Methods

TdxBarLargeButton

GlyphLayoutChanged	protected	WidthChanged	protected
HeightChanged	protected		
ShowCaptionChanged	protected		

Derived from TdxBarButton

ButtonStyleChanged	protected	DropDownEnabledChanged	protected
CanChangePaintStyle	protected	PaintStyleChanged	protected
DownChanged	protected		
DoDropDown	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

GlyphLayoutChanged method

```
procedure GlyphLayoutChanged; virtual;
```

Description

This method is called every time the glyph layout changes. This procedure calls the GlyphLayoutChanged methods of the linked item controls. Override the GlyphLayoutChanged to perform special actions on glyph changes.

HeightChanged method

This procedure is called on changes to button height.

```
procedure HeightChanged; virtual;
```

Description

The HeightChanged method of the TdxBarLargeButton item calls the HeightChanged methods of corresponding item controls. Override this method to perform special actions when button height is changed.

ShowCaptionChanged method

```
procedure ShowCaptionChanged; virtual;
```

Description

This procedure is called every time the ShowCaption property of TdxBarLargeButton is changed. This method calls the ShowCaptionChanged method of linked item controls. Override ShowCaptionChanged to perform special actions when changing the ShowCaption property.

See Also

TdxBarLargeButton.ShowCaption

WidthChanged method

This procedure is called on button width changes.

```
procedure WidthChanged; virtual;
```

Description

This method calls the WidthChanged methods of linked item controls.

TdxBarLargeButton Events

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

TdxBarTreeViewCombo

TdxBarTreeViewCombo is a combo box with a treeview dropdown window.

Unit

dxBarExtItems

```
TdxBarTreeViewCombo = class(TCustomdxBarCombo);
```

Description

TdxBarTreeViewCombo provides tree-structured data representation within your toolbar. TdxBarTreeViewCombo is an ancestor for all toolbar combo box elements with a dropdown tree. A TdxBarTreeViewCombo dropdown window contains a treeview.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarWindowItem

TdxBarEdit

TCustomdxBarCombo

TdxBarTreeViewCombo Properties

TdxBarTreeViewCombo

AllowResizing	published / read / write	ShowButtons	published / read / write
ChooseByDbClick	published / read / write	ShowEditor	published / read / write
DropDownHeight	published / read / write	ShowImageInEdit	published / read / write
DropDownWidth	published / read / write	ShowLines	published / read / write
FullExpand	published / read / write	ShowRoot	published / read / write
Images	published / read / write	SortType	published / read / write
Indent	published / read / write	StateImages	published / read / write
Items	published / read / write	TreeView	public / read only
SelectedNode	public / read / write		

Derived from TdxBarCustomCombo

CurItemIndex	published / read / write	Items	public / read / write
DropDownCount	published / read / write	ItemsHeight	public / read only
DropDownWidth	published / read / write	ListBox	public / read only
ItemHeight	public / read / write	Sorted	public / read / write
ItemIndex	public / read / write		

Derived from TCustomdxBarCombo

Canvas	protected / read / write	DropDownWindow	public / read only
DroppedDown	public / read / write	ShowEditor	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

AllowResizing**read / write**

Specifies whether users can resize a dropdown window.

property AllowResizing : Boolean;

Description

If AllowResizing is True, users can change dropdown window size and the dropdown window paints a window resizer grip; Else, the dropdown window does not include resizing and looks like a standard combo box list window. In this instance, you must use the DropDownWidth and DropDownHeight properties to set dropdown window size.

ChooseByDbClick property**read / write**

Specifies whether to close a dropdown window via a mouse double-click.

property ChooseByDbClick: Boolean;

Description

Use the ChooseByDbClick property to specify the manner in which a dropdown treeview window is closed. If this property is set to **True**, a mouse double-click selects the appropriate node to display within an editor and closes the dropdown window. If this property is set to **False**, these actions are performed via a single mouse click event. The default value for the ChooseByDbClick property is **True**.

DropDownHeight property**read / write**

Specifies dropdown window height.

property DropDownHeight: Integer;

Description

Use this property to set or access a dropdown window's height. If a dropdown window's height is less than the height of the expanded tree view, a vertical scroll bar appears on the left side of the dropdown window.

DropDownWidth property**read / write**

Specifies dropdown window width.

property DropDownWidth: Integer;

Description

Use this property to set or access a dropdown window's width. If a dropdown window's width is less than the width of the expanded tree view, a horizontal scroll bar appears at the bottom of the dropdown window.

FullExpand property**read / write**

Specifies whether a tree view appears fully expanded.

property FullExpand: Boolean;

Description

If True, then a tree view in a dropdown window is fully expanded.

Note: Assigning the FullExpand property to False at runtime does not generate node collapse.

Images property**read / write**

Specifies the images that appear to the left of node text.

property Images: TImageList;

for Delphi 4™

property Images: TCustomImageList;

Description

Use this property to set or access the image list whose images are associated with dropdown tree nodes. The image index, associated with the dropdown tree node, is stored in the ImageIndex property of the dropdown tree node.

See Also

*TdxBarTreeViewCombo.StateImages; TdxBarTreeViewCombo.OnGetImageIndex;
TdxBarTreeViewCombo.OnGetSelectedIndex*

Indent property**read / write**

Specifies the area to the left side of node text.

property Indent: Integer;

Description

This property is similar to the Indent property of the TTreeView object.

Items property**read / write**

Specifies the nodes of a dropdown tree.

property Items: TTreeNode;

Description

Use this property to make changes to dropdown tree nodes. Dropdown tree nodes are similar to TTreeView nodes.

ShowButtons property**read / write**

Specifies whether to display buttons to the left of tree nodes with children.

property ShowButtons: Boolean;

Description

If True, the '+' and '-' buttons are drawn to the left of each node with children. You can expand or collapse nodes by pressing these buttons.

See Also

TdxBarTreeViewCombo.ShowLines

ShowEditor property**read / write**

Specifies whether users can select a node by entering its text using the keyboard.

property ShowEditor: Boolean;

Description

If False, a node may only be selected using the dropdown tree view and the TdxBarTreeViewCombo will no respond to alphanumeric key press events. The default value of ShowEditor is False.

Note: A False ShowEditor value does not equate to a True ReadOnly value since users can change combo box text by means of the dropdown window.

ShowImageInEdit property


[read / write](#)

Specifies whether to display an image within a treeview editor.


property ShowImageInEdit: Boolean;

Description

Each dropdown treeview node has an appropriate image that is displayed when that node is selected. Set the ShowImageInEdit property to **True** to display this image within an editor. If this property is set to **False**, only text is displayed. The default value for the ShowImageInEdit property is **True**.

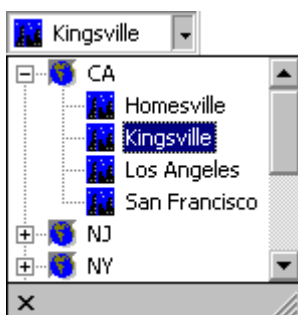

The ShowImageInEdit property is set to **True**.

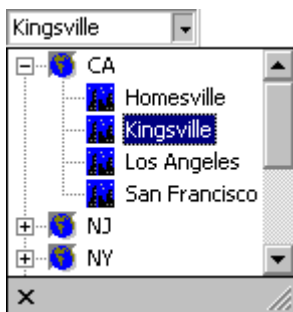

The ShowImageInEdit property is set to **False**.

ShowLines property

[read / write](#)

Specifies whether to display lines among parent and child nodes.

property ShowLines: Boolean;

Description

If True, lines between parent and linked child nodes are displayed. Set ShowLines to False to prevent the drawing of lines.

See Also

TdxBarTreeViewCombo.ShowButtons

ShowRoot property[read / write](#)

Specifies whether to draw link lines between root nodes.

```
property ShowRoot: Boolean;
```

Description

ShowRoot is False by default and root nodes appear one under another without link lines between them. Set ShowRoot to True to draw lines between root nodes.

See Also

TdxBarTreeViewCombo.ShowButtons; TdxBarTreeViewCombo.ShowLines

SortType property[read / write](#)

Specifies whether tree nodes are sorted.

```
property SortType: TSortType;
```

Description

Use this property to set sorting behavior of dropdown tree nodes. This property is similar to the TTreeView SortType property.

StateImages property[read / write](#)

Specifies the images that appears to the left of node text.

```
property StateImages: TImageList;
```

for Delphi 4™

```
property StateImages: TCustomImageList;
```

Description

Use this property to set or access an image list with images displayed to the left of node text. The index associated with the image item is stored in the StateIndex property of a dropdown tree item. The following code sets the state image for the selected node:

```
dxBarTreeViewCombo1.SelectedItem.StateIndex := 1;
```

See Also

TdxBarTreeViewCombo.Images

SelectedNode property**read / write**

Specifies a selected node.

property SelectedNode: TTreeNode;

Description

Enables you to work with the selected node of a treeview. SelectedNode is similar to that of TTreeView object.

See Also

TdxBarTreeViewCombo.OnCanSelectNode; TdxBarTreeViewCombo.OnChanging

TreeView property**read only**

Specifies the tree view that appears in a dropdown window.

property TreeView: TdxBarTreeView;

Description

Use this property to access a TdxBarTreeView tree node contained in a dropdown window.

See Also

TdxBarTreeView

TdxBarTreeViewCombo Methods

TdxBartreeViewCombo

Create	public	DoSelectedNodeChanged	protected
Destroy	public	DropDown	protected
DoClick	public		

Derived from TdxBarCustomCombo

CheckKeyForDropDownWindow	protected	MeasureItem	protected
DrawItem	protected	MeasureItemWidth	protected
GetDropDownWidth	protected		
GetDropDownWindow	protected		

Derived from TCustomdxBarCombo

AfterDropDown	protected	DropDown	protected
CloseUp	protected		
DrawInterior	protected		

Derived from TdxBarEdit

WidthChanged	protected
--------------	-----------

Derived from TdxBarWindowItem

CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		
KeyDown	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

Create method

Creates a TdxBarTreeViewCombo instance.

constructor Create(AOwner: TComponent); **override**;

Description

This method is used to create and initialize a TdxBarTreeViewCombo type object. The Create method initializes the dropdown tree view after the inherited constructor has been called. Override this method to perform additional actions on TdxBarTreeViewCombo creation; e.g. allocate additional memory.

Destroy method

destructor Destroy; **override**;

Description

Destroys the TdxBarTreeViewCombo object and the dropdown tree. Override this method to perform additional actions on TdxBarTreeViewCombo destroy; e.g. release memory allocated during TdxBarTreeViewCombo creation.

DoClick method

Activates a dialog to navigate tree view nodes.

procedure DoClick; **override**;

Description

This method is called when the DockingStyle of the parent bar object is dsRight or dsLeft. In this instance, the TdxBarTreeViewCombo appears as a toolbar button. If the OnClick event handler is not assigned, clicking the button activates a dialog.

See Also

TdxBar.DockingStyle; TdxBarItem.OnClick

DoSelectedNodeChanged method

procedure DoSelectedNodeChanged; **virtual**;

Description

Called when changing the selected dropdown tree node. The DoSelectedNodeChanged sets the combo box Text property to the text of the selected node. Override this method to perform special actions when changing the selected node without writing an OnChange event handler.

DropDown method

Activates the dropdown window.

```
procedure DropDown(X, Y: Integer); override;
```

Description

This method prepares the tree view and displays a dropdown window. The X and Y parameters specify the position of the dropdown window's left top corner.

TdxBarTreeViewCombo Events

TdxBarTreeViewCombo

OnExpanded	published	OnCollapsing	published
OnExpanding	published	OnCompare	published
OnCanSelectNode	published	OnGetImageIndex	published
OnChanging	published	OnGetSelectedIndex	published
OnCollapsed	published	OnTreeViewChange	published

Derived from TdxBarCustomCombo

OnDrawItem	published
OnMeasureItem	published

Derived from TCustomdxBarCombo

OnCheckKeyForDropDownWindow	published	OnDropDown	published
OnCloseUp	published	OnGetDropDownWindow	published

Derived from TdxBarWindowItem

OnChange	published	OnKeyDown	published
OnCurChange	published	OnKeyPress	published
OnEnter	published	OnKeyUp	published
OnExit	published		

Derived from TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

OnCanSelectNode event

Generated before setting the selected node.

type

```
TdxBarTreeViewComboCanSelectNodeEvent = procedure(Sender:  
TdxBarTreeViewCombo; Node: TTreeNode; var CanSelect: Boolean) of object;  
property OnCanSelectNode : TdxBarTreeViewComboCanSelectNodeEvent;
```

Description

This event occurs when the SelectedNode property is about to change. Write an OnCanSelectNode event handler to check if a node can be selected. The Node parameter specifies the dropdown tree node. Set CanSelect to False to prevent nodes from being selected. For example, the following code disables root node selection:

```
if Node.Level = 0 then CanSelect := False;
```

See Also

TdxBarTreeViewCombo.SelectedNode

OnChanging event

```
property OnChanging: TTVChangingEvent;
```

Description

This event occurs each time the selected node is changed. This event is generated while navigating through the dropdown tree nodes.

See Also

TdxBarTreeViewCombo.SelectedNode

OnCollapsed event

```
property OnCollapsed: TTVExpandedEvent;
```

Description

This event occurs after a dropdown tree node collapses. This event is similar to the TTreeView OnCollapse event.

See Also

TdxBarTreeViewCombo.OnExpanded; *TdxBarTreeViewCombo.OnExpanding*

OnCollapsing event

property OnCollapsing: TTVCollapsingEvent;

Description

This event occurs before a dropdown tree node collapses. This event is similar to the TTreeView OnCollapsing event.

See Also

TdxBarTreeViewCombo.OnExpanded; TdxBarTreeViewCombo.OnExpanding

OnCompare event

property OnCompare: TTVCompareEvent;

Description

This event is similar to the TTreeView OnCompare event. It occurs when two dropdown tree nodes are compared during node sort operations in a dropdown tree view. Write an OnCompare event handler to customize node sort order.

OnExpanded event

property OnExpanded: TTVExpandedEvent;

Description

This event occurs after a dropdown tree node has been expanded. This event is similar to the TTreeView OnExpanded event.

See Also

TdxBarTreeViewCombo.OnCollapsed; TdxBarTreeViewCombo.OnCollapsing

OnExpanding event

property OnExpanding: TTVExpandingEvent;

Description

This event occurs before a dropdown tree node has been expanded. This event is similar to the TTreeView OnExpanding event.

See Also

TdxBarTreeViewCombo.OnCollapsed; TdxBarTreeViewCombo.OnCollapsing

OnGetImageIndex event

property OnGetImageIndex: TTVExpandedEvent;

Description

Occurs when a tree view searches the node ImageIndex. This event is similar to the TTreeView OnGetImageIndex event. Write an OnGetImageIndex event handler to change the node ImageIndex before drawing the image.

See Also

TdxBarTreeViewCombo.Images

OnGetSelectedIndex event

property OnGetSelectedIndex: TTVExpandedEvent;

Description

Occurs when a tree view searches the node SelectedIndex. This event is similar to the TTreeView OnGetSelectedIndex event. Write an OnGetSelectedIndex event handler to change a node SelectedIndex before drawing the image.

See Also

TdxBarTreeViewCombo.Images

OnTreeViewChange event

Occurs when tree node selections change.

property OnTreeViewChange: TTVChangedEvent;

Description

This event occurs if a dropdown window is active. If a selection has changed from one tree node to another, the OnTreeviewChange event is generated. This event corresponds to the TTreeView OnChange event. Unlike the TTreeView OnChange event, the TdxBarTreeViewCombo OnChange is generated after changes are made in the combo box editor.

TdxBarSpinEdit

Unit

dxBarExtItems

```
TdxBarSpinEdit = class(TdxBarEdit);
```

Description

Use TdxBarSpinEdit to edit integer or float variables such as years, prices, percents, etc.



Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarWindowItem

TdxBarEdit

TdxBarSpinEdit Properties

TdxBarSpinEdit

CurValue	public / read / write	MaxValue	published / read / write
Increment	published / read / write	Prefix	published / read / write
IntCurValue	public / read / write	PrefixPlace	published / read / write
IntValue	public / read / write	Value	published / read / write
MinValue	published / read / write	ValueType	published / read / write

Derived from TdxBarEdit

MaxLength	published / read / write	ShowCaption	published / read / write
ReadOnly	published / read / write	Width	published / read / write

Derived form TdxBarWindowItem

CurText	public / read / write	FocusedItemLink	public / read only
EmptyWindow	protected / read / write	Text	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

CurValue property**read / write**

Specifies the current value of a spin edit.

property CurValue: Extended;

Description

Use this property to obtain and modify the current value.

The following code demonstrates how you can change the incremental step against the range of an edited value.

```
// The ValueType property should be set to svtFloat.  
  
// The OnCurChange event handler.  
procedure TForm1.TdxBarSpinEdit1CurChange(Sender: TObject);  
begin  
    with Sender as TdxBarSpinEdit do  
        if (CurValue > 3) and (CurValue < 5 ) then  
            Increment := 0.01  
        else  
            Increment := 0.1;  
end;
```

See Also

*TdxBarSpinEdit.IntCurValue; TdxBarSpinEdit.Value; TdxBarSpinEdit.MaxValue;
TdxBarSpinEdit.MinValue*

Increment property**read / write**

property Increment: Extended;

Description

Use this property to set the incrementing value for a spin edit. When a user presses the up and down edit buttons to the right of TdxBarSpinEdit, the edited value increases/decreases by the value specified for this property.

See Also

TdxBarSpinEdit.ValueType; TdxBarSpinEdit.MaxValue; TdxBarSpinEdit.MinValue

IntCurValue property**read / write**

Returns the current integer portion of an edited value.

property IntCurValue: Integer;

Description

Use this property to obtain or modify the integer portion of a given spin edit value.

See Also

*TdxBarSpinEdit.Value; TdxBarSpinEdit.CurValue; TdxBarSpinEdit.MaxValue;
TdxBarSpinEdit.MinValue*

IntValue property**read / write**

property IntValue: Integer;

Description

Returns the integer portion of a value.

Note: *This property changes upon completion of an edit operation; i.e Upon pressing ENTER or exiting the spin edit.*

See Also

*TdxBarSpinEdit.CurValue; TdxBarSpinEdit.Value; TdxBarSpinEdit.MaxValue;
TdxBarSpinEdit.MinValue*

MaxValue property**read / write**

property MaxValue: Extended;

Description

Determines the maximum value that can be edited in a spin editor.

See Also

TdxBarSpinEdit.CurValue; TdxBarSpinEdit.Value

MinValue property**read / write**

property MinValue: Extended;

Description

Determines the minimum value that can be edited in a spin editor.

See Also

TdxBarSpinEdit.CurValue; TdxBarSpinEdit.Value

Prefix property**read / write**

Specifies text to be displayed in a spin editor.

property Prefix: string;

Description

Use this property to inform a user about measurement units for an edited value. Use the PrefixPlace property to set text position relative to the edited value.

PrefixPlace property**read / write**

Defines the prefix relative to a spin editor's value.

type

TdxBarSpinEditPrefixPlace = (ppStart, ppEnd);

property PrefixPlace: TdxBarSpinEditPrefixPlace;

Description

Use the PrefixPlace property to define the position of text specified by the Prefix property within a spin editor. The following values are available:

ppStart Prefix is located before the edited value, "\$ 2.5".

ppEnd Prefix is located after the edited value, "25.5 %".

Value property**read / write**

Specifies a value displayed in a spin editor.

property Value: Extended;

Description

Use this property to get or set a value displayed in a spin editor.

Note: This property changes when pressing ENTER or exiting a spin editor.

See Also

*TdxBarSpinEdit.CurValue; TdxBarSpinEdit.IntValue; TdxBarSpinEdit.MaxValue;
TdxBarSpinEdit.MinValue*

ValueType property**read / write**

Determines edited value type.

type

`TdxBarSpinEditValueType = (svtInteger, svtFloat);`

property ValueType: TdxBarSpinEditValueType;

Description

Use this property to specify the type of object edited in a spin editor:

svtInteger An integer value. Users can edit only integer values.

svtFloat A float value. Users can edit both integer and float values.

Note: Changing this property from *svtFloat* to *svtInteger* truncates values of *Increment*, *Value*, *MaxValue* and *MinValue* properties to integer.

TdxBarSpinEdit Methods

Derived from TdxBarEdit

WidthChanged **protected**

Derived from TdxBarWindowItem

Change	protected	KeyDown	protected
CurChange	protected	KeyPress	protected
DoEnter	protected	KeyUp	protected
DoExit	protected		

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

TdxBarSpinEdit Events

TdxSpinEdit

OnButtonClick **published**

Derived from TdxBarWindowItem

OnChange **published**

OnKeyDown **published**

OnCurChange **published**

OnKeyPress **published**

OnEnter **published**

OnKeyUp **published**

OnExit **published**

Derived from TdxBarItem

OnClick **published**

OnCreate **protected**

OnDestroy **published**

OnButtonClick event

Occurs when a user presses edit buttons or up and down keyboard arrows to perform changes.

type

```
TdxBarSpinEditButton = (sbNone, sbUp, sbDown);
TdxBarSpinEditButtonClickEvent = procedure(Sender: TdxBarSpinEdit;
Button: TdxBarSpinEditButton) of object;
property OnButtonClick: TdxBarSpinEditButtonClickEvent;
```

Description

Write an OnButtonClick event handler to process edit button press events based on your specific needs. The Sender parameter specifies the TdxBarSpinEdit item whose button was pressed. The Button parameter specifies the pressed button:

sbUp	Either the up edit button or the up arrow key is pressed.
sbDown	Either the down edit button or the down arrow key is pressed.
sbNone	The Button parameter never accepts this value. It is for internal use only.

TdxBarStatic

TdxBarStatic represents static text on toolbars.

Unit

dxBarExtItems

```
TdxBarStatic = class(TdxBarItem);
```

Description

TdxBarStatic type item's intent is to enable users to place any static text on toolbars. Such items can be used as captions for any toolbar object. This item cannot be selected and has no accelerator key.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarStatic Properties

TdxBarStatic

Alignment	published / read / write	LeftIndent	published / read / write
AllowClick	published / read / write	RightIndent	published / read / write
BorderStyle	published / read / write	ShowCaption	published / read / write
Height	published / read / write	Width	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

Alignment property

[read / write](#)

Specifies the manner in which text is aligned within a static control.

property Alignment: TAlignment;

Description

Use the Alignment property to specify the horizontal placement of a text string within a static control. Text can be aligned either to the right, left or centered.

Value	Description
taLeftJustify	Text is left justified: text line begins at the left edge of a control.
taCenter	Text is centered within a control.
taRightJustify	Text is right justified: text line ends at the right edge of a control.

AllowClick property**read / write**

Specifies whether the static control processes mouse click events.

property AllowClick: Boolean;

Description

Use the AllowClick property to disable or enable mouse click processing. Set this property value to **True**, if an OnClick event is necessary within your application. The default value for this property is **False**.

See Also

TdxBarStatic.CanClicked

BorderStyle property**read / write**

Determines the appearance style of static control borders.


type

TdxBarStaticBorderStyle = (sbsNone, sbsLowered, sbsRaised, sbsEtched, sbsBump);

property BorderStyle: TdxBarStaticBorderStyle;

Description

The BorderStyle property is used to specify the border style of a static control within a toolbar. Available border styles include:

Value	Description	Example
sbsNone	No border.	
sbsLowered	Lowered border.	
sbsRaised	Raised border.	
sbsEtched	Groove border.	
sbsBump	Raised bevel border.	

The default value of the border style is sbsNone.

Height property**read / write**

Specifies the vertical size of a static control in pixels.

property Height: Integer;

Description

Use the Height property to read or change static control height within a toolbar. A control is centered vertically within a toolbar. If the Height property is set to 0, the height of a control is set automatically to fully place it within a toolbar row. The default value for this property is 0.

See Also

TdxBarStatic.Width


LeftIndent property**read / write**

Determines left indentation in pixels.


property LeftIndent: Integer;

Description


Use the LeftIndent property to determine the indentation on the left side of a control. When you set this property, the Width property value does not change, but the left side of the control moves to the right. The default value for this property is 0.



The LeftIndent property is set to 0.



The LeftIndent property is set to 5.



The LeftIndent property is set to 10.

See Also

TdxBarStatic.RightIndent;TdxBarStatic.Width


RightIndent property**read / write**

Determines right indentation in pixels.


property RightIndent: Integer;

Description


Use the RightIndent property to determine the indentation on the right side of a control. When you set this property, the Width property value does not change, but the right side of the control moves to the left. The default value for this property is 0.



The RightIndent property is set to 0.



The RightIndent property is set to 5.



The RightIndent property is set to 10.

See Also

TdxBarStatic.LeftIndent; TdxBarStatic.Width


ShowCaption property**read / write**

Specifies whether a static control caption is displayed.


property ShowCaption: Boolean;

Description

Set the ShowCaption property to **False** to hide the static control caption. The default value for this property is **True**.



The ShowCaption property is set to **True**.



The ShowCaption property is set to **False**.

See Also

TdxBarItem.Caption

Width property**read / write**

Specifies the horizontal size of a static control in pixels.

property Width: Integer;

Description

Use the Width property to read or change the width of a static control within a toolbar. If the Width property is set to 0, control width is set automatically to fully display the Caption property value. The default value for this property is 0.

See Also

TdxBarStatic.Height

TdxBarStatic Methods

TdxBarStatic

CanClicked	protected
CanSelected	protected
HasAccel	protected

Derived form TdxBarItem

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected
GlyphChanged	protected		

CanClicked method

Determines whether the TdxBarStatic item responds to mouse clicks.

```
function CanClicked: Boolean; override;
```

Description

This function always returns the value that specifies whether TdxBarStatic processes mouse click events: If **True**, an OnClick event is generated. Use the AllowClick property to disable or enable mouse click processing.

CanSelected method

Determines whether TdxBarStatic item can be selected.

```
function CanSelected: Boolean; override;
```

Description

This function always returns False for this class. TdxBarStatic items may not be selected.

HasAccel method

Determines whether the TdxBarStatic item has an accelerator key.

```
function HasAccel(AItemLink: TdxBarItemLink): Boolean; override;
```

Description

This function always returns False for this class. TdxBarStatic items do not include accelerator keys.

TdxBarStatic Events

Derived form TdxBarItem

OnClick	public
OnCreate	protected
OnDestroy	published

TdxBarControlContainerItem

TdxBarControlContainerItem is used to incorporate external controls onto toolbars.


Unit

[dxBarExtItems](#)



```
TdxBarControlContainerItem = class(TdxBarItem);
```

Description

TdxBarControlContainerItem items are used to represent different external controls on toolbars. This object acts as a container for any component supported by Delphi or C++ Builder. You can place it onto a form and assign it via the Control property.

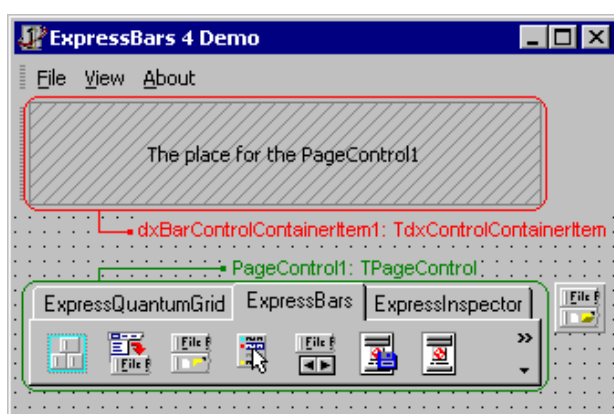

Assigning the PageControl1 object to the dxBarControlContainerItem1 at design-time.

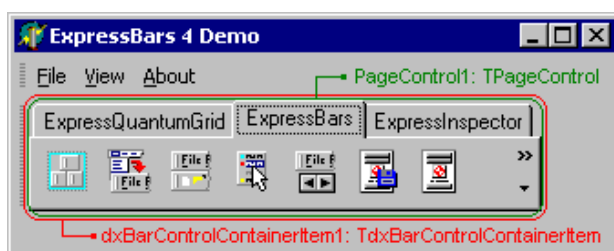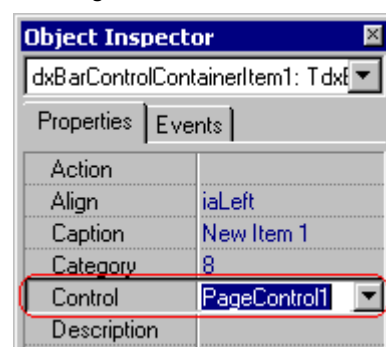

The dxBarControlContainerItem1 represents the PageControl1 object at runtime.

Note that only basic controls are eligible to be put into the submenus. In other words, those controls should not have window handles.

Only one instance of an external control should be visible when running an application, therefore set the Visible property of the external control to **False** in order to provide faultless functionality.

Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarControlContainerItem Properties

TdxBarControlContainerItem

Control published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

Control property

read / write

Determines the external control to display within a toolbar.

property Control: TControl;

Description

Use the Control property to specify a visual control to display within your toolbar. First, place the desired control onto a form and assign it to the appropriate TdxBarControlContainerItem object. Next, set the Visible property of the external control to **False**. The desired control will now be displayed as an element of the toolbar.

TdxBarControlContainerItem Methods

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

TdxBarControlContainerItem Events

Derived form TdxBarItem

OnClick	public
OnCreate	protected
OnDestroy	published

TdxBarInPlaceSubItem

TdxBarInPlaceSubItem is used to represent subitems on toolbars.


Unit

dxBarExtItems


```
TdxBarInPlaceSubItem = class(TdxBarContainerItem);
```

Description

TdxBarInPlaceSubItem is a further control expansion and collapse of your menus - Your Sub-Menus can now behave more like trees. TdxBarInPlaceSubItem items can be used to represent subitems on toolbars. Subitems are items that contain other items, specified in the TdxBarManager list. A TdxBarInPlaceSubItem item can be embedded into another submenu and when clicking this item, its own submenu will be inserted into the parent submenu - unlike an item of the TdxBarSubItem type whose submenu will be displayed as an independent menu.

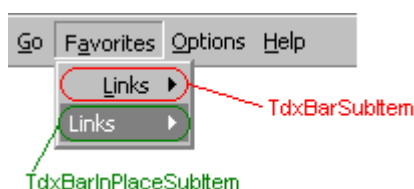

SubItems are not expanded.

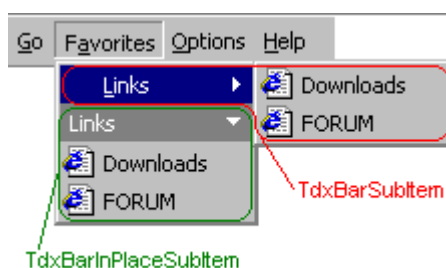

SubItems are expanded.

Hierarchy

```

TObject
  TPersistent
    TComponent
      TdxBarItem
        TCustomdxBarSubItem
          TCustomdxBarContainerItem
            TdxBarContainerItem
  
```

TdxBarInPlaceSubItem Properties

TdxBarInPlaceSubItem

Expanded	published / read / write
KeepBeginGroupWhileExpanded	published / read / write

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	published / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

Expanded property

read / write

Specifies whether the submenu of a specific in-place subitem is expanded.

property Expanded: **Boolean**;

Description

Set the Expanded property to **True** to display the submenu of a specific subitem. The default value is **False**.


KeepBeginGroupWhileExpanded property**read / write**

Specifies whether to display a group separator.

property KeepBeginGroupWhileExpanded: **Boolean**;

Description

Set the KeepBeginGroupWhileExpanded property to **True** to display a group separator after the last item in a submenu.

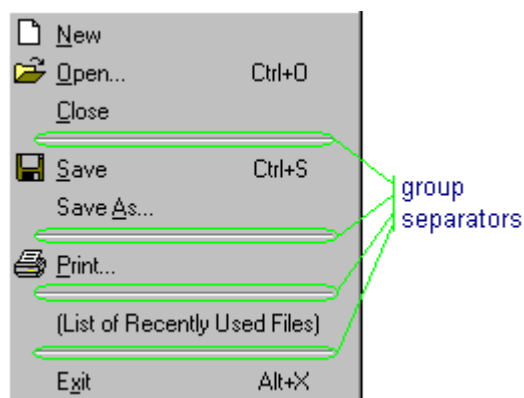

TdxBarInPlaceSubItem Methods

Derived form TdxBarContainerItem

AddListedItemLinks	protected
DeleteListedItemLinks	protected

Derived form TCustomdxBarContainerItem

ClearItemList	protected
---------------	-----------

Derived form TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	protected	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

TdxBarInPlaceSubItem Events

TdxBarInPlaceSubItem

OnAfterExpand	published
OnBeforeCollapse	published

Derived form TCustomdxBarContainerItem

OnGetData	published
-----------	-----------

Derived form TCustomdxBarSubItem

OnCloseUp	protected	OnPaintBar	published
OnDetaching	published	OnPopup	protected

Derived form TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

OnAfterExpand event

Occurs when a specific in-place subitem has expanded.

type

```
TdxBarInPlaceSubItemEvent = procedure(Sender: TdxBarInPlaceSubItem; Link:
TdxBarItemLink) of object;
property OnAfterExpand: TdxBarInPlaceSubItemEvent;
```

Description

Write an OnAfterExpand event handler to perform specific actions when a submenu has expanded. The Sender parameter determines the expanded in-place subitem. The Link parameter contains the item link to the expanded subitem control.

OnBeforeCollapse event

Occurs when a specific in-place subitem is about to collapse.

type

```
TdxBarInPlaceSubItemEvent = procedure(Sender: TdxBarInPlaceSubItem; Link:
TdxBarItemLink) of object;
property OnBeforeCollapse: TdxBarInPlaceSubItemEvent;
```

Description

Write an OnBeforeCollapse event handler to perform specific actions when the submenu is about to collapse. The Sender parameter determines the in-place subitem to collapse. The Link parameter contains the item link to the collapsed subitem control.

TdxBarProgressItem

TdxBarProgressItem is used to represent a progress bar within toolbars.

Unit

dxBarExtItems

```
TdxBarProgressItem = class(TdxBarStatic);
```

Description

TdxBarProgressItem allows you to incorporate a progress meter for lengthy application processes. You can set the possible range and current position. Range represents the duration of the actual operation.

Current position represents the progress towards the completion of this operation. You can write code to change the progress bar position in response to certain events at runtime.

For instance, if your application performs file loading operations, you can adjust the progress bar position to visualize file loading process.

File loading has started:



File loading is about to finish:



Hierarchy

TObject

TPersistent

TComponent

TdxBarItem

TdxBarStatic

TdxBarProgressItem Properties

TdxBarProgressItem

Max	published / read / write	Smooth	published / read / write
Min	published / read / write	Step	published / read / write
Position	published / read / write		

Derived from TdxBarStatic

Alignment	published / read / write	LeftIndent	published / read / write
AllowClick	published / read / write	RightIndent	published / read / write
BorderStyle	published / read / write	ShowCaption	published / read / write
Height	published / read / write	Width	published / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

Max property

[read / write](#)

Determines the maximum position of a progress bar item.

property Max: **Integer**;

Description

Use the Max property to determine the completion point of a specific operation. The default value is **100**.

See Also

TdxBarProgressItem.Min

Min property**read / write**

Determines the minimum position of a progress bar.

property Min: **Integer**;

Description

Use the Min property to determine the initial point of a specific operation. The default value is **0**.

See Also

TdxBarProgressItem.Max

Position property**read / write**

Determines the current position of a progress bar.

property Position: **Integer**;

Description

Use the Position property to determine the current progress of the actual operation. The default value is **0**.

Note: The Position property must be greater than or equal to the Min property, and less than or equal to the Max property.

See Also

TdxBarProgressItem.Max;TdxBarProgressItem.Min;TdxBarProgressItem.Step;

TdxBarProgressItem.StepBy;TdxBarProgressItem.Stept

Smooth property**read / write**

Specifies the bar drawing style of a progress indicator.

property Smooth: **Boolean**;

Description

Set the Smooth property to **True** to draw a progress indicator as a rectangle filled with a solid color. Set the Smooth property to **False** to draw a progress indicator as a rectangle filled with a solid color and divided by sections (small rectangles). The default value is **False**.



The Smooth property is set to **False**.



The Smooth property is set to **True**.

Step property**read / write**

Determines the step increment for a progress bar.

property Step: **Integer**;

Description

Use the Step property to specify the granularity of the progress bar. This property should reflect the size of each step in the process tracked by the progress bar in the logical units used by the Max and Min properties. The step increment is the value by which a progress bar increases its current position whenever the StepIt method is called. By default, the step increment is set to 10.

See Also

TdxBarProgressItem.StepIt

TdxBarProgressItem Methods

TdxBarProgressItem

SetParams	public
StepBy	public
StepIt	public

Derived form TdxBarStatic

CanClicked	protected	DoPopup	protected
HasAccel	protected	GetDetachingBar	public

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasParent	public
CaptionChanged	protected	HotGlyphChanged	protected
Click	public	LargeGlyphChanged	protected
Create	public	SetParentComponent	protected
Destroy	public	ShortCutChanged	protected
DirectClick	protected	Update	protected
DoClick	public	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected

SetParams method

Sets the initial parameters for a progress bar item.

```
procedure SetParams(AMin, AMax: Integer);
```

Description

Call the SetParams method to set a new range for a progress bar. The AMin parameter determines the initial value. The AMax parameter determines the maximum value. If the Position property value is greater than the AMax parameter, its value is set to the maximum value. If the Position property value is less than the AMin parameter, its value is set to the minimum value.

StepBy method

Expands bar indicator position.

```
procedure StepBy(Delta: Integer);
```

Description

Call the StepBy method to expand the current position of a progress bar by the value specified by the Delta parameter. Unlike the StepIt method, which expands the progress bar indicator by the value predefined via the Step property, this method can expand the bar indicator position by any value.

See Also

TdxBarProgressItem.StepIt

StepIt method

This method adjusts the progress indicator's position.

```
procedure StepIt;
```

Description

Call the StepIt method to expand the current position of a progress bar by the step increment's value and redraw the bar to reflect this new position. If step increment represents the size of one logical step in the process tracked by the progress bar, call the StepIt after each logical step. Use the Step property to set the step increment.

See Also

TdxBarProgressItem.StepBy

TdxBarProgressItemEvents

Derived form TdxBarItem

OnClick	public
OnCreate	protected
OnDestroy	published

TdxBarMRUListItem

TdxBarMRUListItem is used to represent a list of most recently used (MRU) items within toolbars.

Unit


dxBarExtItems

```
TdxBarMRUListItem = class(TdxBarListItem);
```

Description

TdxBarMRUListItem allows you to implement a list of most recently used (MRU) items into your application. This feature can dramatically extend the functionality of your application. For instance, you can use this item to display the list of recently used files in a submenu.

This list changes when you close file:

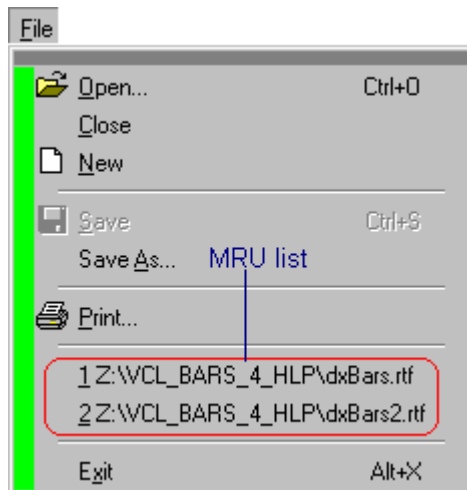

The following procedure adds the closed file to the MRU file list:

```
procedure TChildForm.FormClose(Sender: TObject; var Action: TCloseAction);
begin
    if MainForm.FileName <> '' then
        MainForm.dxBarsMRUFiles.AddItem(MainForm.FileName, nil);
        Action := caFree;
end;
```

The following procedure uses the MRU list to open one of the recently used files:

```
procedure TMainForm.dxBarsMRUFilesClick(Sender: TObject);
var
    AFileName: String;
```

```
begin
  AFileName := dxBarMRUFiles.Items[dxBarMRUFiles.ItemIndex];
  if FileExists(AFileName) then
    with TChildForm.Create(Application) do
      begin
        FileName := AFileName;
        Editor.Lines.LoadFromFile(FileName);
        SetModified(False);
      end
    else
      Application.MessageBox(PChar(AFileName+#10#13+'File not
found. '), 'Open', MB_OK or MB_ICONERROR)
    end;
```

Hierarchy

TObject

 TPersistent

 TComponent

 TdxBarItem

 TCustomdxBarSubItem

 TCustomdxBarContainerItem

 TdxBarListItem

TdxBarMRUListItem Properties

TdxBarMRUListItem

MaxItemCount	published / read / write
RemoveItemOnClick	published / read / write

Derived from TdxBarListItem

DataIndex	published / read / write	ShowCheck	published / read / write
ItemIndex	published / read / write	ShowNumbers	published / read / write
Items	published / read / write		

Derived from TCustomdxBarSubItem

BarSize	published / read / write	ItemLinks	published / read / write
Detachable	published / read / write	ShowCaption	published / read / write
DetachingBar	published / read / write		

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
Align	published / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		

MaxItemCount property

read / write

Determines the maximum number of most recently used items to display.

property MaxItemCount: **Integer**;

Description

If there is no need to display all recently used items, use the MaxItemCount property to limit the number of displayed items. The default value is **5**.

RemoveItemOnClick property**read / write**

Specifies whether to delete an item from the list of displayed items when clicked.

property RemoveItemOnClick: **Boolean**;

Description

Set the RemoveItemOnClick property to **True** to remove the clicked item from the list of the most recently used (MRU) items. The default value is **False**.

TdxBarMRUListItem Methods

TdxBarMRUListItem

AddItem	public
RemoveItem	public

Derived form TCustomdxBarContainerItem

AddListedItemLinks	protected	ClearItemList	protected
DeleteListedItemLinks	protected		

Derived form TCustomdxBarSubItem

CanContainItem	public	DoPopup	protected
DoCloseUp	protected	GetDetachingBar	public

Derived form TdxBarItem

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CaptionChanged	protected	HotGlyphChanged	protected
Click	public	LargeGlyphChanged	protected
Create	public	SetParentComponent	protected
Destroy	public	ShortCutChanged	protected
DirectClick	protected	Update	protected
DoClick	public	UpdateEx	protected
EnabledChanged	protected	UseHotImages	protected
GetActionLinkClass	protected	UseLargeImages	protected
GetParentComponent	public	VisibleChanged	protected

AddItem method

Adds a new item to the list of most recently used (MRU) items.

```
procedure AddItem(const S: string; AObject: TObject);
```

Description

Call the AddItem method to add one more item to the MRU items list. The S parameter determines text displayed within the list for this item (file name, for instance). The AObject parameter contains associated data for this item.

RemoveItem method

Deletes an item from the list of most recently used (MRU) items.

```
procedure RemoveItem(const S: string; AObject: TObject);
```

Description

Call the RemoveItem method to delete an item from the MRU items list. The S parameter determines text displayed within the list for this item (file name, for instance). The AObject parameter contains associated data for this item.

TdxBarMRUListItem Events

Derived form TCustomdxBarContainerItem

OnGetData published

Derived form TCustomdxBarSubItem

OnCloseUp	protected	OnPaintBar	published
OnDetaching	published	OnPopup	protected

Derived form TdxBarItem

OnClick	published
OnCreate	protected
OnDestroy	published

Item Controls

TdxBarItemControl

TdxBarItemControl is an abstract base class for item controls that represents toolbar items.

Unit

dxBar

```
TdxBarItemControl = class(TObject);
```

Description

TdxBarItemControl is a base class for all item controls. Item controls represent items on a toolbar. One item can have several item controls. TdxBarItemControl is an ancestor of the TdxBarButtonControl, TdxBarSubItemControl, TdxBarWinControl. TdxBarItemControl provides the basic properties and methods that item controls use to interact with users.

Hierarchy

TObject

TdxBarItemControl Properties

BarManager	public / read only	ImageIndex	protected / read only
Caption	protected / read only	Images	protected / read only
Enabled	protected / read only	Item	public / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read / write
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only
IsSelected	public / read only		

BarManager property

read only

Specifies the TdxBarManager to which a given control belongs.

```
property BarManager: TdxBarManager;
```

Description

This property returns the TdxBarManager to which a given item control belongs.

See Also

TdxBarManager

Caption property

read only

Specifies item control caption.

```
property Caption: string;
```

Description

Caption is the text that identifies an item control to the user. Use the TdxBarItemLink UserCaption property to customize the caption of a particular item control. If UserCaption is not defined, the item control Caption is the same as the Caption of the underlying item.

See Also

TdxBarItem.Caption; TdxBarItemLink.Caption; TdxBarItemLink.UserCaption

Enabled property**read only**

Determines whether an item control responds to mouse, keyboard, and timer events.

property Enabled: Boolean;

Description

Enabled refers to the Enabled property of an underlying item. Set Enabled property of the underlying item to False to disable an item control. If Enabled is False, the item control ignores mouse and keyboard events.

See Also

TdxBarItem.Enabled

Glyph property**read only**

Specifies the Glyph of an item control.

property Glyph: TBitmap;

Description

Specifies the glyph drawn on an item control's surface. The TdxBarItemControl Glyph property depends upon the Glyph property of the underlying item and the UserGlyph property of the item link between a given item control and its underlying item. The appearance of the glyph on the item control depends upon the TdxBarItemLink PaintStyle property.

See Also

TdxBarItem.Glyph; *TdxBarItemLink.PaintStyle*; *TdxBarItemLink.UserGlyph*

HasWindow property**read only**

Specifies whether a given item is a windowed control.

property HasWindow: Boolean;

Description

This property is always False for this class. Descendant windowed item controls return True.

Height property**read only**

Specifies the vertical size of an item control in pixels.

property Height: Integer;

Description

Use the Height property to get the height of an item control. The height of an item control depends on toolbar layout. For example, when changing toolbar DockingStyle from dsTop to dsLeft, the item control Height property changes.

Hint property**read only**

Specifies item control Hint.

property Hint: string;

Description

The TdxBarItemControl Hint property refers to the Hint property of an underlying item.

See Also

TdxBarItem.Hint

ImageIndex property**read only**

property ImageIndex: Integer;

Description

Returns the index of a picture associated with an item from an image list. This picture is drawn on the item control.

See Also

TdxBarItem.ImageIndex

Images property**read only**

C++Builder 4™, Delphi 4™, Delphi 5™

property Images: TCustomImageList;

Delphi 3™, C++Builder 3™

property Images: TImageList;

Description

Returns the image list associated with an item. The ImageIndex property indicates the image to be drawn on the surface of an item control.

See Also

TdxBarItemControl.ImageIndex



IsActive property**read only**

Specifies whether a mouse pointer rests over an item control.

property IsActive: Boolean;

Description

IsActive is True when the mouse pointer is over an item control. When users moves a mouse pointer away from the control, IsActive is set to False. IsActive is not the same as the IsSelected property. The following diagram outlines differences between these properties:

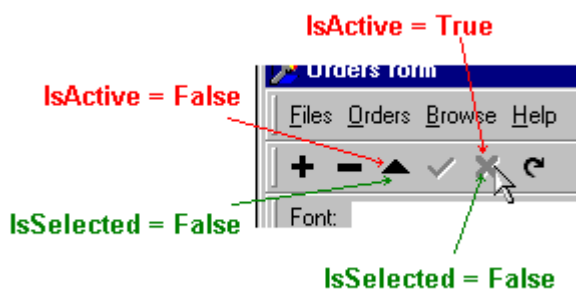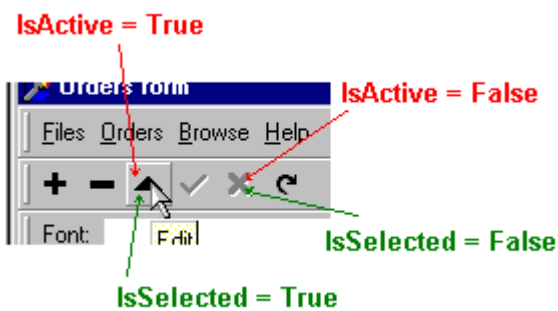


IsSelected property**read only**

Returns True if an item control is selected on a toolbar.

property IsSelected: Boolean;

Description

A toolbar usually contains several item controls and only one of them may be selected at any point in time. This property determines if the item control is selected. The item control is selected if the mouse pointer is over it and the Enabled property is True. TdxBarItemControl IsSelected is a ReadOnly property. As shown in the following diagrams, IsSelected is not the same as the IsActive property:

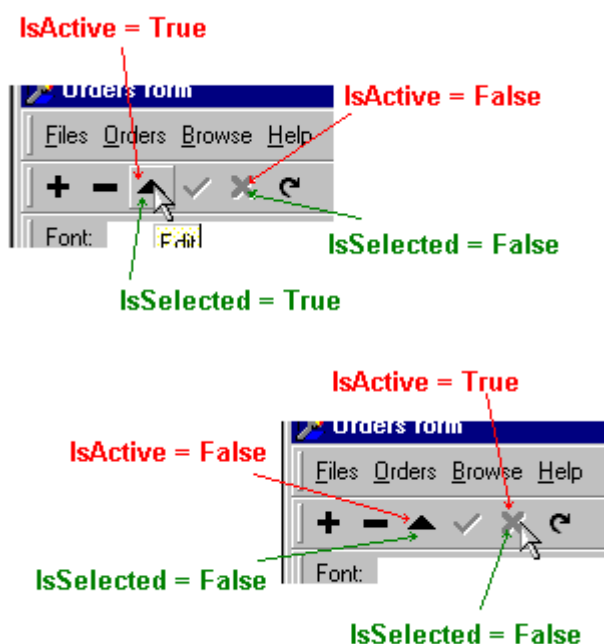**Item property****read only**

Specifies an underlying item.

property Item: TdxBarItem;

Description

This property returns the underlying item for a given item control. You can also access the underlying item by means of the ItemLink property and typecasting. For the TdxBarItemControl class these two results are the same, but for descendants it is advisable to use the Item property.

ItemLink property**read only**

Specifies the TdxBarItemLink object that links an item control to an underlying item.

property ItemLink: TdxBarItemLink;

Description

ItemLink specifies the link between a given item control and its underlying item. It also defines properties of the control such as Caption, Glyph, PaintStyle, and Width.

See Also

*TdxBarItemLink.UserCaption; TdxBarItemLink.UserGlyph; TdxBarItemLink.UserPaintStyle;
TdxBarItemLink.UserWidth*

Parent property**read only**

Specifies the bar control to which a given item control belongs.

property Parent: TCustomdxBarControl;

Description

Parent is the parent bar control of type TdxBarControl or TdxBarSubMenuControl.

See Also

TCustomdxBarControl; TCustomdxBarControl

Pressed property**read / write**

Determines whether an item control is pressed.

property Pressed: Boolean;

Description

If Pressed is True, an item control is pressed or focused. The PressChanged method is called upon changing this property.

See Also

TdxBarItemControl.PressedChanged

Shortcut property**read only**

Specifies an item control shortcut.

property Shortcut: TShortcut;

Description

Specifies the shortcut of a given item control. The Shortcut property refers to the shortcut of the underlying item.

***Note:** Users can activate an item control by using shortcuts if the form contains a toolbar whose IsMainMenu property is set to True.*

See Also

TdxBarItem.ShortCut

Width property**read only**

Returns the horizontal size of an item control in pixels.

property Width: Integer;

Description

Returns the width of a given item control. Item control width depends on the Width property of the underlying item, the item link UserWidth property, and toolbar layout.

See Also

TdxBar.DockingStyle; TdxBarItemLink.UserWidth

TdxBarItemControl Methods

BeginGroupChanged	protected	DrawSelected	protected
CanClicked	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	IsDestroyOnClick	protected
ControlClick	protected	Paint	protected
ControlInactivate	protected	PressedChanged	protected
ControlUnlick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected

BeginGroupChanged method

This method is called when changing the BeginGroup property.

```
procedure BeginGroupChanged; virtual;
```

Description

BeginGroupChanged calls the RepaintBar method of the parent toolbar to redraw all item controls. Descendants can override this method to perform special actions when changing the BeginGroup property.

See Also

TCustomdxBarControl.RepaintBar; TdxBarItemLink.BeginGroup

CanClicked method

Specifies whether an item control responds to mouse clicks.

```
function CanClicked: Boolean; virtual;
```

Description

This function always returns True for this class. That means that the item control responds to mouse clicks and the OnClick event of the underlying item is generated. Descendants can override this function to specify whether it responds to mouse clicks.

CaptionChanged method

This procedure is called when changing item control captions.

```
procedure CaptionChanged; virtual;
```

Description

This method calls the RepaintBar method of the parent toolbar. Override this method to perform special actions when changing captions.

See Also

TCustomdxBarControl.RepaintBar; TdxBarItemLink.Caption

Click method

Activates an item control.

```
procedure Click(ByMouse: Boolean); virtual;
```

Description

This procedure activates the item control. The Click method calls the ControlClick and ControlUnclick procedures. The ByMouse parameter specifies whether the item control has been activated by pressing the mouse button. If ByMouse is False, the item control has been activated by pressing a keyboard key.

ControlActivate method

Changes an item control's state to active.

```
procedure ControlActivate(Immediately: Boolean); virtual;
```

Description

The item control is active when the mouse pointer is over it; Else, the item control is inactive. The TdxBarItemControl ControlActivate method does nothing except for setting the IsActive property to True. The Immediately parameter determines the timespan before the control activates. Descendants can override the ControlActive method to perform special actions on activation of an item control.

See Also

TdxBarItemControl.ControlInactivate; TdxBarItemControl.IsActive

ControlInactivate method

Changes the control state to inactive.

```
procedure ControlInactivate(Immediately: Boolean); virtual;
```

Description

The item control is inactive if the mouse pointer is away from a control. This method performs no actions except for setting the `TdxBarItemControl.IsActive` property to `False`. The `Immediately` parameter determines the timespan before the control deactivates. Descendants can override this method to perform special actions when deactivating an item control.

See Also

TdxBarItemControl.ControlActivate; TdxBarItemControl.IsActive

ControlClick method

Simulates a mouse click.

```
procedure ControlClick(ByMouse: Boolean); virtual;
```

Description

This method activates the item control as if a user has clicked the item control. `ByMouse` specifies whether this method has been called by a mouse click. `TdxBarItemControl.ControlClick` method performs no actions. Descendants can override it to respond to mouse click events.

See Also

TdxBarItemControl.ControlUnclick

ControlUnclick method

Simulates a mouse button release event when over an item control.

```
procedure ControlUnclick(ByMouse: Boolean); virtual;
```

Description

`ByMouse` specifies whether this method has been called by a mouse click. `ControlUnclick` calls, when possible, the `DirectClick` method of the underlying item in order to generate an `OnClick` event.

See Also

TdxBarItemControl.ControlClick

Create method

Creates an instance of the TdxBarItemControl class.

constructor Create(AItemLink: TdxBarItemLink); **virtual**;

Description

This method creates and initializes the TdxBarItemControl object. AItemLink specifies the item link that describes the link between a given item control and the underlying item. The Parent property is set equal to the BarControl property of the item link.

See Also

TdxBarItemControl.Parent; TdxBarItemLink

Destroy method

Destroys a TdxBarItemControl object.

destructor Destroy; **override**;

Description

If a given item control is selected, the Destroy method sets the SelectedItems property of the parent bar control to nil.

DrawSelected method

function DrawSelected: Boolean; **virtual**;

Description

Used internally. DrawSelected returns True, if an item control is selected (the mouse is either above it or it is selected in customizing mode).

EnabledChanged method

This procedure is called when changing the Enabled property.

procedure EnabledChanged; **virtual**;

Description

If the Enabled property changes to False and the item control is selected on the toolbar, the SelectedItem property of the TdxBar object is set to nil.

See Also

TdxBarItemControl.Enabled

GlyphChanged method

This procedure is called when changing the Glyph property.

```
procedure GlyphChanged; virtual;
```

Description

GlyphChanged calls the Repaint method to redraw the item control. Descendants can override this method if they need special actions during glyph change events.

See Also

TdxBarItemControl.Glyph; TdxBarItemControl.Repaint

HasHint method

Determines whether an item control includes a hint.

```
function HasHint: Boolean; virtual;
```

Description

Returns True if the underlying item has a hint; Otherwise it returns False.

See Also

TdxBarItemControl.Hint

IsDestroyOnClick method

Specifies whether a parent bar control loses focus when a user clicks the item control.

```
function IsDestroyOnClick: Boolean; virtual;
```

Description

Determines whether a bar control loses focus after a user clicks an item control. For instance, after a user clicks a button on a toolbar, the toolbar loses focus, but if a user clicks an edit control, the toolbar will stay focused until the user leaves the edit control. If an item control loses focus after mouse click events, this function returns True. TdxBarItemControl IsDestroyOnClick method always returns True.

Paint method

Paints an item control.

type

```
TdxBarPaintType = (ptHorz, ptMenu, ptVert);
```

```
procedure Paint(ARect: TRect; PaintType: TdxBarPaintType); virtual;
```

Description

The paint method of the TdxBarItemControl class performs no actions. Descendants can override it to draw items they represent. ARect specifies the rectangle for drawing. PaintType determines the item control drawing style: ptHorz specifies that the item control is in a horizontal position, ptVert specifies a vertical position, ptMenu specifies the item control is placed onto the menu.

Repaint method

Repaints an item control on screen.

```
procedure Repaint; virtual;
```

Description

Call Repaint to reflect any changes in an item control.

PressedChanged method

```
procedure PressedChanged; virtual;
```

Description

This method is called when changing the Pressed property. Item Controls use it to perform specific actions when changing the Pressed property.

See Also

TdxBarItemControl.Pressed

ShortCutChanged method

This procedure is called when changing the ShortCut property.

```
procedure ShortCutChanged; virtual;
```

Description

ShortCutChanged calls the parents RepaintBar method to reflect changes in the ShortCut property. It is required if an item control is placed in a submenu and the ShortCut is shown next to the item control caption.

See Also

TdxBarItemControl.ShortCut

VisibleChanged method

This method is called when changing the Visible property of an underlying item.

```
procedure VisibleChanged; virtual;
```

Description

Users can change the Visible property of an underlying item to hide or display linked item controls. VisibleChanged calls the RepaintBar method of the bar control to which a given item control belongs.

TdxBarButtonControl

Represents a button control on the toolbar.

Unit

dxBar

```
TdxBarButtonControl = class(TdxBarItemControl);
```

Description

TdxBarButtonControl represents TdxBarButton items on screen. Use the TdxBarButton.ButtonStyle property to determine the type of button to be displayed. To customize the look of TdxBarButtonControl, use the PaintStyle property of the TdxBarItemLink object that links the TdxBarButton item and the given item control.

Hierarchy

TObject

 TdxBarItemControl

TdxBarButtonControl Properties

TdxBarButtonControl

ButtonStyle	protected / read only	GroupIndex	protected / read only
Down	protected / read only	Item	public / read only
DropDownEnabled	protected / read only	PaintStyle	protected / read only
DroppedDown	protected / read only		

Derived from TdxBarItemControl

BarManager	public / read only	ImageIndex	protected / read only
Caption	protected / read only	Images	protected / read only
Enabled	protected / read only	Item	public / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read / write
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only
IsSelected	public / read only		

ButtonStyle property

read only

Returns the style of a given button control.

type

```
TdxBarButtonStyle = (bsDefault, bsChecked, bsDropDown);
```

property ButtonStyle : TdxBarButtonStyle;

Description

TdxBarButtonControl ButtonStyle corresponds to the ButtonStyle of an underlying item.

See Also

TdxBarButton.ButtonStyle

Down property

read only

Determines whether a given button control has a sunken appearance.

property Down: Boolean;

Description

If ButtonStyle is bsChecked, this property returns the Down property of the underlying TdxBarButton item. If the ButtonStyle is not bsChecked, the Down property is False.

See Also

TdxBarButton.Down

DropDownEnabled property**read only**

Determines whether a dropdown menu can be activated.

property DropDownEnabled: Boolean;

Description

The DropDownEnabled property of a given item control corresponds to the DropDownEnabled property of the underlying item.

See Also

TdxBarButton.DropDownEnabled

DroppedDown property**read only**

Specifies whether a dropdown window is active.

property DroppedDown: Boolean;

Description

This property corresponds to the DroppedDown property of a TdxBarButton. This property is True, if a bsDropDown style button dropdown window is active. If ButtonStyle is not bsDropDown, then DroppedDown always returns False.

See Also

TdxBarButtonControl.DroppedDown

Item property**read only**

Specifies an underlying item.

property Item: TdxBarButton;

Description

This property returns the TdxBarButton item to which a given item control is linked. Item controls are linked to items via the TdxBarItemLink object.

See Also

TdxBarItemControl.Item; TdxBarItemControl.ItemLink; TdxBarItemLink

GroupIndex property**read only**

Determines the index of the group to which a button belongs.

property GroupIndex: Integer;

Description

This property corresponds to the GroupIndex property of an underlying item.

See Also

TdxBarButton.GroupIndex

PaintStyle property**read only**

Specifies the PaintStyle of an item control.

type

TdxBarPaintStyle = (psStandard, psCaption, psCaptionInMenu,
psCaptionGlyph);

property PaintStyle: TdxBarPaintStyle;

Description

This property returns PaintStyle specified by the TdxBarItemLink object.

TdxBarButtonControl Methods

TdxBarButtonControl

ArrowWidth	protected	GetDefaultHeight	protected
ButtonStyleChanged	protected	GetDefaultWidth	protected
DoCloseUp	protected	GetHeight	protected
DoDropDown	protected	GetWidth	protected
DownChanged	protected	PaintStyleChanged	protected
DropDownEnabledChanged	protected		

Derived from TdxBarItemControl

BeginGroupChanged	protected	DrawSelected	protected
CanClicked	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	IsDestroyOnClick	protected
ControlClick	protected	Paint	protected
ControlInactivate	protected	PressedChanged	protected
ControlUnlick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected

ArrowWidth method

Returns the width of an arrow button.

function ArrowWidth: Integer; **virtual**;

Description

If ButtonStyle is bsDropDown, then the arrow button is drawn next to the button. The ArrowWidth function returns the width of the arrow button. The size of the arrow button depends on the parent bar control type: ArrowWidth returns different results for different types of parent bar controls. ArrowWidth is different for TdxBarControl and TdxBarSubMenuControl.

ButtonStyleChanged method

This method is called when changing the ButtonStyle property of an underlying item.

procedure ButtonStyleChanged; **virtual**;

Description

This method calls the RepaintBar method of the parent bar control to reflect button style changes. Override it to perform special actions when button style has changed.

See Also

TdxBarButton.ButtonStyle

DoCloseUp method

Closes the active dropdown window.

```
procedure DoCloseUp; dynamic;
```

Description

This method closes the active dropdown window for bsDropDown style buttons. If ButtonStyle of TdxBarButtonControl differs from bsDropDown, this method does nothing.

See Also

TdxBarButtonControl.DoDropDown

DoDropDown method

Activates a dropdown window.

```
procedure DoDropDown(ByMouse: Boolean); dynamic;
```

Description

This method activates the dropdown menu associated with bsDropDown style buttons. ByMouse indicates the means by which the procedure activates. If ByMouse is True, the method has been activated by mouse click. DoDropDown determines the initial coordinates for the dropdown window and passes them to the TdxBarButton DoDropDown method.

See Also

TdxBarButton.DoDropDown; *TdxBarButtonControl.DoCloseUp*

DownChanged method

This method is called when changing the Down property of an underlying item.

```
procedure DownChanged; virtual;
```

Description

If ButtonStyle is bsChecked, this method is called when the Down property changes. If ButtonStyle is not bsChecked, this method does nothing.

See Also

TdxBarButton.ButtonStyle; *TdxBarButtonControl.Down*

DropDownEnabledChanged method

This method is called when changing the DropDownEnabled property of an underlying item.

```
procedure DropDownEnabledChanged; virtual;
```

Description

If ButtonStyle is bsDropDown, then the method is called every time the DropDownEnabled property changes.

See Also

TdxBarButtonControl.DropDownEnabled

GetDefaultHeight method

Returns the default height of a button.

```
function GetDefaultHeight: Integer; virtual;
```

Description

The default height represents the height of a button when the parent bar control has horizontal orientation.

See Also

TdxBarButtonControl.GetDefaultWidth

GetDefaultWidth method

Returns the default width of a button.

```
function GetDefaultWidth: Integer; virtual;
```

Description

The default width represents the width of a button when the parent bar control has horizontal orientation.

See Also

TdxBarButtonControl.GetDefaultHeight

GetHeight method

Returns the actual height of a button.

```
function GetHeight: Integer; virtual;
```

Description

This method returns the actual height of a button on a toolbar.

GetWidth method

Returns the actual width of a button control.

```
function GetWidth: Integer; virtual;
```

Description

This method returns the actual width of a button control on a toolbar.

PaintStyleChanged method

This method is called when changing the PaintStyle property.

```
procedure PaintStyleChanged; virtual;
```

Description

PaintStyle of the TdxBarButtonControl changes when the PaintStyle of an underlying item is changed, or the PaintStyle property of the item link of the underlying item is changed.

See Also

TdxBarButtonControl.PaintStyle

TdxBarWinControl

TdxBarWinControl is the abstract base class for all windowed item controls.

Unit

dxBar

```
TdxBarWinControl = class(TdxBarItemControl);
```

Description

Windowed item controls are item controls that:

Can receive focus in a running application. Other controls may display data, but users can use the keyboard to interact with an item control only if the item control is a windowed control.

Have a window handle. A window handle is the identifier provided by Windows(r) for a window.

All windowed item controls on toolbars are TdxBarWinControl class descendants. TdxBarEditControl, TCustomdxComboControl, TdxBarComboControl classes derive methods and properties from the TdxBarWinControl class.

Hierarchy

TObject

 TdxBarItemControl

TdxBarWinControl Properties

TdxBarWinControl

Handle	public / read only	Text	public / read / write
Item	public / read only	WindowRect	public / read / write
Focused	public / read / write		

Derived from TdxBarItemControl

BarManager	public / read only	ImageIndex	protected / read only
Caption	protected / read only	Images	protected / read only
Enabled	protected / read only	Item	public / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read / write
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only
IsSelected	public / read only		

Handle property

read only

Returns the window handle of an item control.

property Handle: HWND;

Description

This property specifies the HWND handle of an item control window.

Item property

read only

Specifies the item linked to an item control.

property Item: TdxBarWindowItem;

Description

Returns the item with which a given item is linked and which is the underlying item for a given item control. The link between the items and the item controls is defined by the TdxBarItemLink property.

See Also

TdxBarItemLink; TdxBarWindowItem

Focused property**read / write**

Specifies whether an item control has focus.

property Focused: Boolean;

Description

If True, the item control has focus. Set Focused to False to remove focus from the item.

Text property**read / write**

Contains item control text.

property Text: string;

Description

The Text property is used for reading the text of an item control or specifying a new string for the Text value. For edit controls, Text appears within the item control. For combo boxes, Text is the contents of the combo box editor.

WindowRect property**read / write**

Specifies the rectangle occupied by an item control.

property WindowRect: TRect;

Description

This property is used internally to draw an item control on screen. WindowRect specifies the rectangle in which to draw the item control.

TdxBarWinControl Methods

TdxBarWinControl

CanClicked	protected	IsDestroyOnClick	protected
ControlClick	protected	WndProc	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	DrawSelected	protected
CanClicked	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	IsDestroyOnClick	protected
ControlClick	protected	Paint	protected
ControlInactivate	protected	PressedChanged	protected
ControlUnlick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected

CanClicked method

Determines whether an item control responds to mouse clicks.

```
function CanClicked: Boolean; override;
```

Description

CanClicked returns True if an item control responds to mouse click events; False otherwise. The appearance of the windowed control depends upon the DockingStyle of the parent bar control. If the parent bar control is docked to the left or to the right side of a form, the windowed control appears as a button. In this instance, it can respond to mouse click events. If the item control has a horizontal layout, the OnClick event is not generated.

See Also

TdxBar.DockingStyle

ControlClick method

Activates an item control.

```
procedure ControlClick(ByMouse: Boolean); override;
```

Description

The ControlClick method is called when a user clicks an item control. ByMouse specifies whether an item control has been activated by a mouse click. The ControlClick method sets the Focused property to True and calls the inherited method.

See Also

TdxBarItemControl.ControlClick

IsDestroyOnClick method

Specifies whether the parent bar control loses focus.

```
function IsDestroyOnClick: Boolean; override;
```

Description

IsDestroyOnClick always returns False for this class. It means that the bar control will stay focused after a user clicks the item control.

See Also

TdxBarItemControl.IsDestroyOnClick

WndProc method

This procedure is a default window procedure of the item control.

```
procedure WndProc(var Message: TMessage); virtual;
```

Description

All window messages for a given item control are first processed by the WndProc procedure. Descendants override WndProc when they need special processing of events.

TdxBarEditControl

Represents a toolbar edit control.

Unit

dxBar

```
TdxBarEditControl = class(TdxBarWinControl);
```

Description

TdxBarEditControl represents TdxBarEdit items on toolbars. TdxBarEditControl is the ancestor for TCustomdxBarCombo.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

TdxBarEditControl Properties

TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
Item	public / read only	ShowCaption	protected / read only
MaxLength	protected / read only		

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	ImageIndex	protected / read only
Caption	protected / read only	Images	protected / read only
Enabled	protected / read only	Item	public / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read / write
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only
IsSelected	public / read only		

CaptionWidth property

read only

Returns caption text width.

property CaptionWidth: Integer;

Description

The CaptionWidth property is used internally to obtain the width of an edit item control caption in pixels.

Item property

read only

Specifies an underlying item.

property Item: TdxBarEdit;

Description

This property returns a TdxBarEdit item to which given item control is linked. Item controls are linked to items via the TdxBarItemLink object.

See Also

TdxBarItemControl.Item; TdxBarItemControl.ItemLink; TdxBarItemLink

MaxLength property**read only**

Specifies the maximum number of characters a user can enter into an edit control.

property MaxLength: Integer;

Description

MaxLength corresponds to the MaxLength property of an underlying item.

ReadOnly property**read only**

Determines whether a user may change text in an edit control.

property ReadOnly: Boolean;

Description

This property corresponds to the ReadOnly property of an underlying item.

ShowCaption property**read only**

Specifies whether an edit item control caption is displayed.

property ShowCaption: Boolean;

Description

If the ShowCaption property to **False**, the edit item control caption is hidden.

See Also

TdxBarEdit.ShowCaption

TdxBarEditControl Methods

TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked **protected** IsDestroyOnClick **protected**

ControlClick **protected** WndProc **protected**

Derived from TdxBarItemControl

BeginGroupChanged **protected** DrawSelected **protected**

CanClicked **protected** EnabledChanged **protected**

CaptionChanged **protected** GlyphChanged **protected**

Click **protected** HasHint **protected**

ControlActivate **protected** IsDestroyOnClick **protected**

ControlClick **protected** Paint **protected**

ControlInactivate **protected** PressedChanged **protected**

ControlUnclick **protected** Repaint **public**

Create **public** ShortCutChanged **protected**

Destroy **public** VisibleChanged **protected**

WidthChanged method

Called when changing an item control's width.

```
procedure WidthChanged; virtual;
```

Description

This method is called when changing the width of an item control. Item control width may be changed by setting a new value to the UserWidth property of an item link. If UserWidth has not been defined, item control width may be changed by setting a new value to the Width property of an underlying item.

See Also

TdxBarEdit.Width

TCustomdxBarComboControl

This class represents a combo box with a custom dropdown window.

Unit

dxBar

```
TCustomdxBarComboControl = class(TdxBarEditControl);
```

Description

Item controls of type TCustomdxBarComboControl represent comboboxes with a custom dropdown window on the toolbar. TCustomdxBarComboControl is a base class for all item controls both for the standard combo box with a dropdown list and combo boxes with a customized dropdown window, such as TdxBarTreeViewComboControl or TdxBarDateComboControl (item controls for the TdxBarTreeViewCombo and TdxBarDateCombo items).

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

TCustomdxBarComboControl Properties

TCustomdxBarComboControl

DropDownButtonRect	protected / read only	DroppedDown	public / read / write
DropDownWindow	protected / read only	Item	public / read only

Derived from TdxBarEditControl

CaptionWidth	protected / read only	MaxLength	protected / read only
ReadOnly	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	ImageIndex	protected / read only
Caption	protected / read only	Images	protected / read only
Enabled	protected / read only	Item	public / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read / write
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only
IsSelected	public / read only		

DropDownButtonRect property

read only

Determines the rectangle containing a dropdown button.

property DropDownButtonRect: TRect;

Description

This property is used internally to draw a dropdown button. Usually DropDownButtonRect specifies the rectangle next to the 'edit window' rectangle in an item control

DropDownWindow property

read only

Determines the HWND handle of a dropdown window.

property DropDownWindow: HWND;

Description

It returns the HWND handle of a dropdown window. This handle is used internally. To correctly define a dropdown window ,see the TCustomdxBarCombo.

See Also

TCustomdxBarCombo

DroppedDown property**read / write**

Specifies whether a dropdown window is active.

property DroppedDown: Boolean;

Description

Set DroppedDown to True to make a dropdown window visible and activate it. If you set DroppedDown to False, the dropdown window is hidden.

See Also

TCustomdxBarComboControl.DropDownWindow

Item property**read only**

Returns the item to which a given item control is linked.

property Item: TCustomdxBarCombo;

Description

It specifies the TCustomdxBarCombo item, which is the underlying item for a given item control. The links between item and item control are described by the TdxBarItemLink object.

See Also

TCustomdxBarCombo; TdxBarItemLink

TCustomdxBarComboControl Methods

TCustomdxBarColorCombo

ControlInactivate **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked	protected	IsDestroyOnClick	protected
ControlClick	protected	WndProc	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	DrawSelected	protected
CanClicked	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	IsDestroyOnClick	protected
ControlClick	protected	Paint	protected
ControlInactivate	protected	PressedChanged	protected
ControlUnlick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected

ControlInactivate method

Makes an item control inactive.

```
procedure ControlInactivate(Immediately: Boolean); override;
```

Description

This procedure makes an item control inactive. Before calling the inherited method, ControlInactivate hides a dropdown window. The Immediately parameter determines if a timeout exists before an item control deactivates. If the parameter is True, the item control deactivates immediately, otherwise there is a timespan before deactivation. Descendants can override this method to perform operations on item control deactivation.

TdxBarComboControl

This class represents a combo box with a dropdown list.

Unit

dxBar

```
TdxBarComboControl = class(TCustomdxBarComboControl);
```

Description

This item control represents a combo box with a dropdown list on a bar control. TdxBarComboControl represents such items as TdxBarCombo on a toolbar. It also represents the following items: TdxBarColorCombo, TdxBarFontNameCombo. TdxBarComboControl is an ancestor for the TdxBarImageComboControl.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

 TCustomdxBarComboControl

TdxBarComboControl Properties

TdxBarComboControl

Item	public / read only	LocalItemIndex	public / read only
ItemIndex	protected / read only	Sorted	protected / read only
Items	protected / read only		

Derived from TCustomdxBarComboControl

DropDownButtonRect	protected / read only	DroppedDown	public / read / write
DropDownWindow	protected / read only		

Derived from TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
MaxLength	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	ImageIndex	protected / read only
Caption	protected / read only	Images	protected / read only
Enabled	protected / read only	Item	public / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read / write
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only
IsSelected	public / read only		

Item property

read only

Specifies the underlying item for a given item control.

property Item: TdxBarCustomCombo;

Description

This property returns the TdxBarCustomCombo item to which a given item control is linked. The links between the item and item control are specified by the TdxBarItemLink object. If the type of the underlying item differs from TdxBarCustomCombo (e.g. TdxBarFontNameCombo or TdxBarColorCombo), you must use typecasting in order to work with the underlying item.

See Also

TdxBarCustomCombo; TdxBarItemLink

ItemIndex property**read only**

Specifies the selected item index in a dropdown list.

property ItemIndex: Integer;

Description

Refers to the ItemIndex property of a TdxBarCustomCombo item. TdxBarComboControl ItemIndex returns the index of selected items in an Items list. Unlike the LocalItemIndex property all item controls, which are based on the same item have the same ItemIndex.

See Also

TdxBarComboControl.LocalItemIndex; TdxBarCustomCombo.ItemIndex

Items property**read only**

Determines the strings that appear in a dropdown list.

property Items: TStrings;

Description

This property returns a set of strings, which is displayed in a dropdown window.

See Also

TdxBarCustomCombo.Items

LocalItemIndex property**read only**

Specifies the selected dropdown list item.

property LocalItemIndex: Integer;

Description

This property specifies the highlighted item in an active dropdown window. When a user navigates through the items in a dropdown list, the LocalItemIndex property is changed, and the value of the currently selected item appears in the edit box portion of the combo box. The first item in the list has index 0. Unlike ItemIndex, the LocalItemIndex property specifies the index in the active item control. After a user confirms changes, the ItemIndex property of the underlying item is set equal to the LocalItemIndex.

See Also

TdxBarComboControl.ItemIndex

Sorted property**read only**

Determines whether items in a dropdown list are alphabetically sorted.

property Sorted: Boolean;

Description

This property refers to the Sorted property of an underlying item and returns True if items in the dropdown list are alphabetized.

See Also

TdxBarCustomCombo.Sorted

TdxBarComboControl Methods

Derived from TCustomdxBarComboControl

ControlInactivate **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked **protected**

ControlClick **protected**

IsDestroyOnClick **protected**

WndProc **protected**

Derived from TdxBarItemControl

BeginGroupChanged **protected**

CanClicked **protected**

CaptionChanged **protected**

Click **protected**

ControlActivate **protected**

ControlClick **protected**

ControlInactivate **protected**

ControlUnlick **protected**

Create **public**

Destroy **public**

DrawSelected **protected**

EnabledChanged **protected**

GlyphChanged **protected**

HasHint **protected**

IsDestroyOnClick **protected**

Paint **protected**

PressedChanged **protected**

Repaint **public**

ShortCutChanged **protected**

VisibleChanged **protected**

TdxBarSubItemControl

Represents a subitem on a toolbar.

Unit

dxBar

```
TdxBarSubItemControl = class(TdxBarItemControl);
```

Description

This class represents TdxBarSubItem on a toolbar. When clicking the mouse, TdxBarSubItemControl creates a bar control of type TdxBarSubMenuControl with item controls, specified by the ItemLinks property. The arrow is drawn next to the TdxBarSubItemControl to indicate that the item control has a dropdown menu, but if the TdxBarSubItemControl is placed on the main menu toolbar, the arrow is not drawn. This class is an ancestor for the TdxBarContainerItemControl.

Hierarchy

TObject

 TdxBarItemControl

TdxBarSubItemControl Properties

TdxBarSubItemControl

Item	public / read only
SubMenuControl	public / read only

Derived from TdxBarItemControl

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
BarManager	public / read only	ImageIndex	public / read / write
Caption	published / read / write	Index	public / read only
Category	published / read / write	LinkCount	public / read only
ClickItemLink	public / read only	Links	public / read only
CurlItemLink	public / read only	ShortCut	public / read / write
Data	public / read / write	UnclickAfterDoing	public / read / write
Description	published / read / write	Visible	published / read / write
Enabled	published / read / write	VisibleForUser	public / read only

Item property

read only

Specifies an underlying item.

property Item: TCustomdxBarSubItem;

Description

This property returns a TCustomdxBarSubItem item to which a given item control is linked. The link between items and item controls is defined by the TdxBarItemLink.

See Also

TdxBarItemLink

SubMenuControl property

read only

Specifies the sub menu, which appears when a user clicks the TdxBarSubItemControl.

property SubMenuControl: TdxBarSubMenuControl;

Description

Use this property at run time to set the TdxBarSubMenuControl object which activates when users click a given item control.

See Also

TdxBarSubMenuControl

TdxBarSubItemControl Methods

TdxBarSubItemControl

GlyphChanged	protected	CreateSubMenuControl	protected
CanClicked	protected	GetDefaultHeight	protected
ControlClick	protected	GetDefaultWidth	protected

Derived from TdxBarItemControl

ActionChange	protected	GlyphChanged	protected
BarManagerChanged	protected	HasAccel	protected
CanClicked	protected	HasParent	public
CanSelected	protected	HotGlyphChanged	protected
CaptionChanged	protected	LargeGlyphChanged	protected
Click	public	SetParentComponent	protected
Create	public	ShortCutChanged	protected
Destroy	public	Update	protected
DirectClick	public	UpdateEx	protected
DoClick	public	UseHotImages	protected
EnabledChanged	protected	UseLargeImages	protected
GetActionLinkClass	protected	VisibleChanged	protected
GetParentComponent	public		

GlyphChanged method

This method is called when the glyph drawn on an item control is changed.

procedure GlyphChanged; **override**;

Description

The TdxBarSubItemControl Glyph property is changed when changing the Glyph property of an underlying item or when changing the UserGlyph property of the item link, specified by the ItemLink property. GlyphChanged calls the Repaint method to reflect changes in the Glyph property.

See Also

TdxBarItem.Glyph; TdxBarItemControl.Glyph

CanClicked method

Specifies an item control's response to mouse clicks.

```
function CanClicked: Boolean; override;
```

Description

This method overrides the TdxBarItemControl method. CanClicked always returns False for this class.

See Also

TdxBarItemControl.CanClicked

ControlClick method

Activates an item control.

```
procedure ControlClick(ByMouse: Boolean); override;
```

Description

ByMouse specifies whether a control has been activated by the mouse. If ByMouse is False, then the control has been activated by a key press event; If True – the item control has been activated after a mouse click.

CreateSubMenuControl method

Creates a bar control of type TdxBarSubMenuControl.

```
procedure CreateSubMenuControl; virtual;
```

Description

This method creates the TdxBarSubMenuControl. This item control appears when a user clicks the TdxBarSubItemControl. Item controls contained in the TdxBarSubMenuControl are described by the ItemLinks property of the TdxBarSubItem object to which a given TdxBarSubItemControl is linked.

See Also

TdxBarSubMenuControl

GetDefaultHeight method

Returns the default height of a given item control.

```
function GetDefaultHeight: Integer; virtual;
```

Description

This method is used internally. It returns the height of an item control assuming it has a horizontal layout.

See Also

TdxBarSubItemControl.GetDefaultWidth

GetDefaultWidth method

Returns the default width of a given item control.

```
function GetDefaultWidth: Integer; virtual;
```

Description

This method is used internally. It returns the width of an item control assuming it has a horizontal orientation.

See Also

TdxBarSubItemControl.GetDefaultHeight

TdxBarContainerItemControl

This class represents container items on toolbars.

Unit

dxBar

```
TdxBarContainerItemControl = class(TdxBarSubItemControl);
```

Description

The TdxBarContainerItemControl item control represents TdxBarListItem and TdxBarContainerItem items on screen.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarSubItemControl

TdxBarContainerItemControl Properties

TdxBarContainerItemControl

Item public / read only

Derived from TdxBarSubMenuControl

SubMenuControl public / read only

Derived from TdxBarItemControl

ActuallyVisible	public / read only	HelpContext	published / read / write
Action	published / read / write	Hint	published / read / write
ActionLink	protected / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	public / read only
Enabled	published / read / write		
Glyph	public / read / write		

Item property

read only

Specifies an associated container item.

property Item: TCustomdxBarContainerItem;

Description

The Item property specifies an underlying container item. TdxBarContainerItemControl represents TdxBarListItem and TdxBarContainerItem type items on screen. TdxBarContainerItemControl uses item links, specified by the ItemLinks property of the underlying item, for the display of contained item controls on screen.

See Also

TCustomdxBarContainerItem

TdxBarContainerItemControl Methods

TdxBarContainerItemControl

CreateSubMenuControl **protected**

Derived from TdxBarSubMenuControl

GlyphChanged	protected	GetDefaultHeight	protected
CanClicked	protected	GetDefaultWidth	protected
ControlClick	protected		
CreateSubMenuControl	protected		

Derived from TdxBarItemControl

ActionChange	protected	HasAccel	protected
BarManagerChanged	protected	HasParent	public
CanClicked	protected	HotGlyphChanged	protected
CanSelected	protected	LargeGlyphChanged	protected
CaptionChanged	protected	SetParentComponent	protected
Click	public	ShortCutChanged	protected
Create	public	Update	protected
Destroy	public	UpdateEx	protected
DirectClick	public	UseHotImages	protected
DoClick	public	UseLargeImages	protected
EnabledChanged	protected	VisibleChanged	protected
GetActionLinkClass	protected		
GetParentComponent	public		
GlyphChanged	protected		

CreateSubMenuControl method

Creates a sub menu to represent a given item control on screen.

procedure CreateSubMenuControl; **override**;

Description

The TdxBarContainerItemControl appears on screen as a sub menu. This method creates and initializes the TContainerItemSubMenuControl object that represents the container item on screen.

See Also

TdxBarSubItemControl.CreateSubMenuControl

TdxBarToolbarsListItemControl

```
TdxBarToolbarsListItemControl = class(TdxBarSubItemControl);
```

Description

TdxBarToolbarsListItemControl is an item control which represents TdxBarToolbarsListItem on toolbars and in sub menus. TdxBarToolbarsListItemControl contains a list of accessible toolbars and allows a user to hide/display a toolbar on screen.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarSubItemControl

TdxBarToolbarsListItemControl Properties

Derived from TdxBarSubItemControl

Item	public / read only
SubMenuControl	public / read only

Derived from TdxBarItem

ActuallyVisible	public / read only	HelpContext	published / read / write
Action	published / read / write	Hint	published / read / write
ActionLink	protected / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		
Glyph	public / read / write		

TdxBarToolbarsListItemControl Methods

Derived from TdxBarSubItemControl

GlyphChanged	protected	GetDefaultHeight	protected
CanClicked	protected	GetDefaultWidth	protected
ControlClick	protected		
CreateSubMenuControl	protected		

Derived from TdxBarItemControl

BeginGroupChanged	protected	GlyphChanged	protected
CaptionChanged	protected	HasHint	protected
Click	protected	Paint	protected
ControlActivate	protected	PressedChanged	protected
ControlUnclick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected
DrawSelected	protected		
EnabledChanged	protected		

TdxBarColorComboControl

Represents a toolbar color combo control.

Unit

dxBarExtItems

```
TdxBarColorComboControl = class(TdxBarComboControl);
```

Description

TdxBarColorComboControl represents TdxBarColorCombo items on toolbars. Said differently, it is responsible for the display and maintenance of color combo items on screen and allows users to select colors from a combo box.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

 TCustomdxBarComboControl

 TdxBarComboControl

TdxBarColorComboControl Properties

TdxBarColorComboControl

Item public / read only

Derived from TdxBarComboControl

ItemIndex	protected / read only	LocalItemIndex	public / read / write
Items	protected / read only	Sorted	protected / read only

Derived from TCustomdxBarComboControl

DropDownButtonRect	protected / read / write
DropDownWindow	protected / read / write
DroppedDown	public / read only

Derived from TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
MaxLength	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Item property

read only

Specifies an item linked to a color combo control.

```
property Item: TdxBarColorCombo;
```

Description

The TdxBarItemLink object defines the link between a color combo item and the color combo item control. The Item property returns the color combo item of the appropriate TdxBarItemLink object.

TdxBarColorComboControl Methods

Derived from TCustomdxBarComboControl

ControlInactivate **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked	protected	IsDestroyOnClick	protected
ControlClick	protected	WndProc	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	Paint	protected
ControlUnlick	protected	PressedChanged	protected
Create	public	Repaint	public
Destroy	public	ShortCutChanged	protected
DrawSelected	protected	VisibleChanged	protected

TdxBarDateComboControl

Represents a toolbar date combo control.

Unit

dxBarExtItems

```
TdxBarDateComboControl = class(TCustomdxBarComboControl);
```

Description

TdxBarDateComboControl represents TdxBarDateCombo items on toolbars. Said differently, it is responsible for the display and maintenance of date combo items on screen and provides users with quick and easy date selection.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

 TCustomdxBarComboControl

TdxBarDateComboControl Properties

TdxBarDateComboControl

Date	protected / read / write
Item	public / read only

Derived from TCustomdxBarComboControl

DropDownButtonRect	protected / read / write
DropDownWindow	protected / read / write
DroppedDown	public / read only

Derived from TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
MaxLength	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Date property

read / write

Contains the date to display within a control.

```
property Date: TDateTime;
```

Description

This property is used internally to provide the date to display within a date combo control.

Item property**read only**

Specifies an item linked to a date combo control.

property Item: TdxBarDateCombo;

Description

The TdxBarItemLink object defines the link between a date combo item and the date combo item control. The Item property returns the date combo item of the appropriate TdxBarItemLink object.

TdxBarDateComboControl Methods

Derived from TCustomdxBarComboControl

ControlInactivate **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked	protected	IsDestroyOnClick	protected
ControlClick	protected	WndProc	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	Paint	protected
ControlUnlick	protected	PressedChanged	protected
Create	public	Repaint	public
Destroy	public	ShortCutChanged	protected
DrawSelected	protected	VisibleChanged	protected

TdxBarImageComboControl

Unit

dxBarExtItems

```
TdxBarImageComboControl = class(TdxBarComboControl);
```

Description

This item control is used to represent the TdxBarImageCombo item on screen.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

 TCustomdxBarComboControl

 TdxBarComboControl

TdxBarImageComboControl Properties

Derived from TdxBarComboControl

ItemIndex	protected / read only	LocalItemIndex	public / read / write
Item	public / read only	Sorted	protected / read only
Items	protected / read only		

Derived from TCustomdxBarComboControl

DropDownButtonRect	protected / read / write	DroppedDown	public / read only
DropDownWindow	protected / read / write		

Derived from TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
MaxLength	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

TdxBarImageComboControl Methods

TdxBarImageComboControl

GetHeight **protected**
 ImagesChanged **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked **protected** WndProc **protected**
 ControlClick **protected**
 IsDestroyOnClick **protected**

Derived from TdxBarItemControl

BeginGroupChanged	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	Paint	protected
ControlUnlick	protected	PressedChanged	protected
Create	public	Repaint	public
Destroy	public	ShortCutChanged	protected
DrawSelected	protected	VisibleChanged	protected

GetHeight method

Returns the height of the item control.

```
function GetHeight: Integer; override;
```

Description

On calculating item control height, GetHeight takes into account the height of pictures, specified by the Images property, to calculate the correct value of the item control height.

ImagesChanged

```
procedure ImagesChanged; virtual;
```

Description

This method is called when the Images property of the underlying item is changed. The ImagesChanged calls the RepaintBar method of the parent bar control to refresh images on the screen.

TdxBarLookupComboControl

TdxBarLookupCombo maintains a list of lookup values associated with a set of key field values.

Unit

dxBarExtDBItems

```
TdxBarLookupComboControl = class(TCustomdxBarComboControl);
```

Description

This item control represents a TdxBarLookupCombo item on the screen.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

 TCustomdxBarComboControl

TdxBarLookupComboControl Properties

Derived from TCustomdxBarComboControl

DropDownButtonRect	protected / read / write	DroppedDown	public / read only
DropDownWindow	protected / read / write	Item	public / read only

Derived from TdxBarEditControl

CaptionWidth	protected / read only	MaxLength	protected / read only
ReadOnly	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

TdxBarLookupComboControl Methods

Derived from TCustomdxBarComboControl

ControlInactivate **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked	protected	WndProc	protected
ControlClick	protected		
IsDestroyOnClick	protected		

Derived from TdxBarItemControl

BeginGroupChanged	protected	GlyphChanged	protected
CaptionChanged	protected	HasHint	protected
Click	protected	Paint	protected
ControlActivate	protected	PressedChanged	protected
ControlUnclick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected
DrawSelected	protected		
EnabledChanged	protected		

TdxBarLargeButtonControl

Unit

dxBarExtItems

```
TdxBarLargeButtonControl = class(TdxBarButtonControl);
```

Description

The item control of TdxBarLargeButtonControl type represents a TdxBarLargeButton item on screen. TdxBarLargeButtonControl is responsible for TdxBarLargeButton item drawing on toolbars and sub menus.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarButtonControl

TdxBarLargeButtonControl Properties

TdxBarLargeButtonControl

HotGlyph	protected / read only
LargeGlyph	protected / read only
Item	public / read only

Derived from TdxBarButtonControl

ButtonStyle	protected / read only	GroupIndex	protected / read only
Down	protected / read only	Item	public / read only
DropDownEnabled	protected / read only	PaintStyle	protected / read only
DroppedDown	protected / read only		

Derived from TdxBarItem

ActuallyVisible	public / read only	HelpContext	published / read / write
Action	published / read / write	Hint	published / read / write
ActionLink	protected / read / write	ImageIndex	public / read / write
BarManager	public / read only	Index	public / read only
Caption	published / read / write	LinkCount	public / read only
Category	published / read / write	Links	public / read only
ClickItemLink	public / read only	ShortCut	public / read / write
CurlItemLink	public / read only	UnclickAfterDoing	public / read / write
Data	public / read / write	Visible	published / read / write
Description	published / read / write	VisibleForUser	published / read / write
Enabled	published / read / write		
Glyph	public / read / write		

HotGlyph property

read only

```
property HotGlyph: TBitmap;
```

Description

This property returns the hot image associated with an item. A hot image is an image that appears on a button's surface when the mouse points to the button. A hot image can be associated with the button via the TdxBarLargeButton HotGlyph or TdxBarLargeButton HotImageIndex properties.

See Also

TdxBarLargeButton.HotImageIndex; TdxBarManager.HotImages

Item property**read only**

property Item: TdxBarLargeButton;

Description

Returns the TdxBarLargeButton type item that is represented on the screen by a given item control. The link between the TdxBarLargeButton item and the corresponding item control is described by the TdxBarItemLink object.

See Also

TdxBarLargeButton

LargeGlyph property**read only**

Specifies the large image associated with a button.

property LargeGlyph: TBitmap;

Description

This property returns the large image associated with an item. The large image is an image that appears on a button's surface. The image can be associated with the button via the TdxBarLargeButton LargeGlyph or TdxBarLargeButton LargeImageIndex properties.

See Also

TdxBarLargeButton.LargeImageIndex; TdxBarManager.LargeImages

TdxBarLargeButtonControl Methods

TdxBarLargeButtonControl

GlyphLayoutChanged	protected	ShowCaptionChanged	protected
HeightChanged	protected	WidthChanged	protected
HotGlyphChanged	protected		
LargeGlyphChanged	protected		

Derived from TdxBarButtonControl

ArrowWidth	protected	DropDownEnabledChanged	protected
ButtonStyleChanged	protected	GetDefaultHeight	protected
DoCloseUp	protected	GetDefaultWidth	protected
DoDropDown	protected	PaintStyleChanged	protected
DownChanged	protected		

Derived from TdxBarItemControl

BeginGroupChanged	protected	GlyphChanged	protected
CaptionChanged	protected	HasHint	protected
Click	protected	Paint	protected
ControlActivate	protected	PressedChanged	protected
ControlUnlick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected
DrawSelected	protected		
EnabledChanged	protected		

GlyphLayoutChanged method

Called when glyph layouts change.

```
procedure GlyphLayoutChanged; virtual;
```

Description

The GlyphLayoutChanged method is called when changing the GlyphLayout underlying item property. GlyphLayoutChanged calls the RepaintBar method of the parent bar control, which leads to item control refresh on the screen.

HeightChanged method

Called on changing button height.

```
procedure HeightChanged; virtual;
```

Description

The HeightChanged method calls the RepaintBar method of the parent bar control, which leads to item control refresh on screen.

See Also

TdxBarLargButton.Height

HotGlyphChanged method

Called on changing the HotGlyph item property.

```
procedure HotGlyphChanged; virtual;
```

Description

The HotGlyphChanged method calls the RepaintBar method of the parent bar control, which leads to item control refresh on screen.

See Also

TdxBarLargButton.HotGlyph; TdxBarLargButton.HotImageIndex

LargeGlyphChanged method

Called on changing the LargeGlyph underlying item property.

```
procedure LargeGlyphChanged; virtual;
```

Description

The LargeGlyphChanged method calls the RepaintBar method of the parent bar control, which leads to item control refresh on screen.

See Also

TdxBarLargButton.LargeGlyph; TdxBarLargButton.LargeImageIndex

ShowCaptionChanged method

Called on changing the ShowCaption property of an underlying item.

```
procedure ShowCaptionChanged; virtual;
```

Description

The ShowCaptionChanged method calls the RepaintBar parent bar control method, which leads to item control refresh on screen.

WidthChanged method

Called on changing button width.

```
procedure WidthChanged; virtual;
```

Description

The WidthChanged method calls the RepaintBar method of the parent bar control, which leads to item control refresh on screen.

See Also

TdxBarLargeButton.Width

TdxBarTreeViewComboControl

Unit

dxBarExtItems

```
TdxBarTreeViewComboControl = class(TCustomdxBarComboControl);
```

Description

This item control is used to represent an item of the TdxBarTreeViewCombo type on the screen.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

 TCustomdxBarComboControl

TdxBarTreeViewComboControl Properties

TdxBarTreeViewComboControl

Item public / read only

Derived from TCustomdxBarComboControl

DropDownButtonRect protected / read / write
 DropDownWindow protected / read / write
 DroppedDown public / read only

Derived from TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
MaxLength	protected / read only	ShowCaption	protected / read only

Derived from TdxBarWinControl

Handle	public / read only	Text	public / read / write
Focused	public / read / write	WindowRect	public / read / write

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Item property

read only

Specifies an underlying item.

property Item: TdxBarTreeViewCombo;

Description

This property returns the Item to which a given control is linked. The link between the item and item controls is described by the TdxBarItemLink object.

TdxBarTreeViewComboControl Methods

Derived from TCustomdxBarComboControl

ControlInactivate **protected**

Derived from TdxBarEditControl

WidthChanged **protected**

Derived from TdxBarWinControl

CanClicked	protected	IsDestroyOnClick	protected
ControlClick	protected	WndProc	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	Paint	protected
ControlUnlick	protected	PressedChanged	protected
Create	public	Repaint	public
Destroy	public	ShortCutChanged	protected
DrawSelected	protected	VisibleChanged	protected

GetHeight method

Returns the height of a TdxBarTreeViewComboControl.

```
function GetHeight: Integer; override;
```

Description

This function returns the height of the item control according to image size in the StateImages and Images properties.

TdxBarSpinEditControl

```
TdxBarSpinEditControl = class(TdxBarSpinEdit);
```

Description

The TdxBarSpinEditControl item control represents the TdxBarSpinEdit item on toolbars and sub menus. TdxBarSpinEditControl contains both an edit field and edit buttons for the spin edit control.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarWinControl

 TdxBarEditControl

TdxBarSpinEditControl Properties

TdxBarSpinEditControl

ActiveButton	protected / read / write	ButtonsRect	protected / read only
ButtonPressed	protected / read / write	Item	public / read only

Derived from TdxBarEditControl

CaptionWidth	protected / read only	ReadOnly	protected / read only
Item	public / read only	ShowCaption	protected / read only
MaxLength	protected / read only	Derived from TdxBarWinControl	

Derived from TdxBarWinControl

Handle	public / read only
Focused	public / read / write
Text	public / read / write
WindowRect	public / read / write

Derived from TdxBarItem

ActuallyVisible	public / read only	Glyph	public / read / write
Action	published / read / write	HelpContext	published / read / write
ActionLink	protected / read / write	Hint	published / read / write
BarManager	public / read only	ImageIndex	public / read / write
Caption	published / read / write	Index	public / read only
Category	published / read / write	LinkCount	public / read only
ClickItemLink	public / read only	Links	public / read only
CurlItemLink	public / read only	ShortCut	public / read / write
Data	public / read / write	UnclickAfterDoing	public / read / write
Description	published / read / write	Visible	published / read / write
Enabled	published / read / write	VisibleForUser	published / read / write

ActiveButton property

read / write

type

```
TdxBarSpinEditButton = (sbNone, sbUp, sbDown);
```

property ActiveButton: TdxBarSpinEditButton;

Description

Used internally. Specifies the active edit button for a spin editor. This property can assume the following values:

- sbUp** The up edit button is active.
- sbDown** The down edit button is active.
- sbNone** No active button exists.

See Also

TdxBarSpinEditControl.ButtonPressed

ButtonPressed property

read / write

property ButtonPressed: Boolean;

Description

Used internally. Specifies whether the edit button of a spin editor is pressed.

See Also

TdxBarSpinEditControl.ActiveButton

ButtonsRect property

read only

property ButtonsRect: TRect;

Description

This property is used internally. It returns a rectangle, in parent control coordinates, occupied by spin editor's buttons.

Item property

read only

Specifies an underlying item.

property Item: TdxBarSpinEdit;

Description

This property returns a TdxBarSpinEdit item to which a given item control is linked. The link between items and item controls is defined by TdxBarItemLink.

TdxBarSpinEditControl Methods

Derived from TdxBarEditControl

WidthChanged	protected
--------------	-----------

Derived from TdxBarWinControl

CanClicked	protected	IsDestroyOnClick	protected
ControlClick	protected	WndProc	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HasHint	protected
ControlActivate	protected	Paint	protected
ControlUnlick	protected	PressedChanged	protected
Create	public	Repaint	public
Destroy	public	ShortCutChanged	protected
DrawSelected	protected	VisibleChanged	protected

TdxBarStaticControl

Unit

dxBarExtItems

```
TdxBarStaticControl = class(TdxBarItemControl);
```

Description

This control represents the TdxBarStatic type item on screen.

Hierarchy

TObject

 TdxBarItemControl

TdxBarStaticControl Properties

TdxBarStaticControl

Item public / read only

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Item property

read only

Determines the underlying item.

property Item: TdxBarStatic;

Description

This property specifies the TdxBarStatic item, which is represented on the screen by the item control of the TdxBarStaticControl type. The link between the item and item control is described by the TdxBarItemLink object. The item and item link properties are used to create the TdxBarStaticControl item control.

TdxBarStaticControl Methods

TdxBarStaticControl

CanClicked	protected	GetWidth	protected
GetHeight	protected	IsDestroyOnClick	protected

Derived from TdxBarItemControl

BeginGroupChanged	protected	DrawSelected	protected
CaptionChanged	protected	EnabledChanged	protected
Click	protected	GlyphChanged	protected
ControlActivate	protected	HasHint	protected
ControlClick	protected	Paint	protected
ControlInactivate	protected	PressedChanged	protected
ControlUnclick	protected	Repaint	public
Create	public	ShortCutChanged	protected
Destroy	public	VisibleChanged	protected

CanClicked method

Specifies whether an item control responds to mouse clicks.

```
function CanClicked: Boolean; override;
```

Description

For this class, CanClicked always returns False. The control does not respond to mouse clicks.

GetHeight method

Returns item control height.

```
function GetHeight: Integer; override;
```

Description

This method is used to get item control height. TdxBarStaticControl height depends on DockingStyle property of the parent bar.

GetWidth method

Returns item control width.

```
function GetWidth: Integer; override;
```

Description

This method is used to get item control width. TdxBarStaticControl width depends on DockingStyle property of the parent bar.

IsDestroyOnClick method

Determines whether the parent bar control loses focus when clicking a given item control.

```
function IsDestroyOnClick: Boolean; override;
```

Description

IsDestroyOnClick returns False for this class. If the parent bar control has focus, it will not lose it after clicking the TdxBarStaticControl item control.

TdxBarControlContainerControl

Represents a toolbar container control.

Unit

dxBarExtItems

```
TdxBarControlContainerControl = class(TdxBarItemControl);
```

Description

TdxBarControlContainerControl represents TdxBarControlContainerItem items on toolbars. It is responsible for the display of external controls.

Hierarchy

TObject

 TdxBarItemControl

TdxBarControlContainerControl Properties

TdxBarControlContainerControl

Item **public / read only**

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Item property

read only

Determines the underlying item.

property Item: TdxBarStatic;

Description

This property specifies the TdxBarStatic item, which is represented on the screen by the item control of the TdxBarStaticControl type. The link between the item and item control is described by the TdxBarItemLink object. The item and item link properties are used to create the TdxBarStaticControl item control.

TdxBarControlContainerControl Methods

Derived from TdxBarItemControl

BeginGroupChanged	protected	DrawSelected	protected
CanClicked	protected	EnabledChanged	protected
CaptionChanged	protected	GlyphChanged	protected
Click	protected	HashHint	protected
ControlActivate	protected	Paint	protected
ControlClick	protected	PressedChanged	protected
ControlInactivate	protected	Repaint	public
ControlUnclick	protected	ShortCutChanged	protected
Create	public	VisibleChanged	protected
Destroy	public		

TdxBarInPlaceSubItemControl

Represents a toolbar in-place subitem control.

Unit

dxBarExtItems

```
TdxBarInPlaceSubItemControl = class(TdxBarContainerItemControl);
```

Description

TdxBarInPlaceSubItemControl represents TdxBarInPlaceSubItem items on toolbars. Said differently, it is responsible for the display and maintenance of in-place subitems on screen.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarSubItemControl

 TdxBarContainerItemControl

TdxBarInPlaceSubItemControl Properties

TdxBarInPlaceSubItemControl

Item public / read only

Derived from TdxBarSubItemControl

SubMenuControl public / read only

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Item property read only

Specifies an item linked to an in-place subitem control.

property Item: TdxBarInPlaceSubItem;

Description

The TdxBarItemLink object defines the link between an in-place subitem and the in-place subitem control. The TdxBarInPlaceSubItem property returns the in-place subitem of the appropriateTdxBarItemLink object.

TdxBarInPlaceSubItemControl Methods

Derived from TdxBarContainerItemControl

CreateSubMenuControl **protected**

Derived from TdxBarSubItemControl

GlyphChanged	protected	GetDefaultHeight	protected
CanClicked	protected	GetDefaultWidth	protected
ControlClick	protected		

Derived from TdxBarItemControl

BeginGroupChanged	protected	DrawSelected	protected
CanClicked	protected	EnabledChanged	protected
CaptionChanged	protected	HasHint	protected
Click	protected	IsDestroyOnClick	protected
ControlActivate	protected	Paint	protected
ControlClick	protected	PressedChanged	protected
ControlInactivate	protected	Repaint	public
ControlUnclick	protected	ShortCutChanged	protected
Create	public	VisibleChanged	protected
Destroy	public		

TdxBarProgressControl

Represents a toolbar progress bar control.

Unit

dxBarExtItems

```
TdxBarProgressControl = class(TdxBarStaticControl);
```

Description

TdxBarProgressControl represents TdxBarProgressItem items on toolbars. It is responsible for the display and maintenance of progress bar items within a toolbar.

Hierarchy

TObject

 TdxBarItemControl

 TdxBarStaticControl

TdxBarProgressControl Properties

TdxBarProgressControl

Item public / read only

Derived from TdxBarItemControl

BarManager	public / read only	IsSelected	public / read only
Caption	protected / read only	ImageIndex	protected / read only
Enabled	protected / read only	Images	protected / read only
Glyph	protected / read only	ItemLink	public / read only
HasWindow	public / read only	Parent	public / read only
Height	protected / read only	Pressed	protected / read only
Hint	protected / read only	ShortCut	protected / read only
IsActive	public / read only	Width	protected / read only

Item property

read only

Specifies an item linked to a progress bar item control.

property Item: TdxBarProgressItem;

Description

The TdxBarItemLink object defines the link between the item and the progress bar item control. The Item property returns the progress bar item of the appropriate TdxBarItemLink object.

TdxBarProgressControl Methods

Derived from TdxBarContainerItemControl

CreateSubMenuControl **protected**

Derived from TdxBarStaticControl

CanClicked **protected** GetWidth **protected**

GetHeight **protected** IsDestroyOnClick **protected**

Derived from TdxBarItemControl

BeginGroupChanged **protected** DrawSelected **protected**

CaptionChanged **protected** EnabledChanged **protected**

Click **protected** GlyphChanged **protected**

ControlActivate **protected** HasHint **protected**

ControlClick **protected** Paint **protected**

ControlInactivate **protected** PressedChanged **protected**

ControlUnclick **protected** Repaint **public**

Create **public** ShortCutChanged **protected**

Destroy **public** VisibleChanged **protected**

Index

A

Action.....	10
ActionChange.....	19
ActionLink.....	11
ActiveButton.....	284
ActuallyVisible.....	10
AddItem.....	203
AddListedItemLinks.....	91, 96
AfterDropDown.....	57
Align.....	12
Alignment.....	175
AllowAllUp.....	30
AllowClick.....	176
AllowCustomizing.....	87
AllowResizing.....	135, 136, 153
ArrowWidth.....	226
AutoColor.....	109
AutoColorText.....	109
AutoGrayScale.....	144

B

BarManager.....	13, 208
BarManagerChanged.....	19
BarSize.....	78
BeginGroupChanged.....	215
BorderStyle.....	176
ButtonPressed.....	284
ButtonsRect.....	285
ButtonStyle.....	31, 223
ButtonStyleChanged.....	35, 226

C

CanChangePaintStyle.....	35
CanClicked.....	20, 180, 215, 233, 251, 289
CanContainItem.....	81
CanSelected.....	20, 180
Canvas.....	55, 63
Caption.....	13, 208
CaptionChanged.....	20, 216
CaptionWidth.....	236
Category.....	13
Change.....	41, 113
CheckKeyForDropDownWindow.....	58, 68, 140
ChooseByDblClick.....	153
ClearItemList.....	92
Click.....	20, 216
ClickItemLink.....	13
CloseSubMenuOnClick.....	31
CloseUp.....	58
Color.....	109, 136
Control.....	184
ControlActivate.....	216
ControlClick.....	217, 234, 251
ControlInactivate.....	217, 242
ControlUnlick.....	217

Create.....	21, 113, 119, 120, 124, 131, 160, 218
CreateSubMenuControl.....	251, 255
CurChange.....	42
CurColor.....	110
CurDate.....	117
CurItemIndex.....	64
CurItemLink.....	14
CurText.....	39
CurValue.....	168
CustomColorText.....	110

D

Data.....	14
DataIndex.....	100
Date.....	117, 262
DatePopup.....	117
DeleteListedItemLinks.....	92, 97
Description.....	14
Destroy.....	21, 120, 160, 218
Detachable.....	79
DetachingBar.....	79
DirectClick.....	21
DoClick.....	21, 113, 120, 125, 132, 141, 160
DoCloseUp.....	81, 227
DoDropDown.....	36, 227
DoEnter.....	42
DoExit.....	42
DoPopup.....	82
DoSelectedNodeChanged.....	160
Down.....	32, 223
DownChanged.....	36, 227
DrawInterior.....	58
DrawItem.....	68
DrawSelected.....	218
DropDown.....	59, 120, 161
DropDownButtonRect.....	240
DropDownCount.....	64
DropDownEnabled.....	32, 224
DropDownEnabledChanged.....	36, 228
DropDownHeight.....	153
DropDownMenu.....	32
DropDownWidth.....	64, 153
DropDownWindow.....	56, 240
DroppedDown.....	56, 224, 241

E

EditText.....	136
EmptyWindow.....	40
Enabled.....	14, 209
EnabledChanged.....	22, 218
Expanded.....	188

F

Focused.....	232
FocusedItemLink.....	40
FullExpand.....	154

G

GetActionLinkClass	22
GetDefaultHeight	228, 252
GetDefaultWidth	228, 252
GetDetachingBar	82
GetDropDownWidth	68
GetDropDownWindow	59, 69
GetHeight	228, 267, 279, 289
GetParentComponent	22
GetWidth	229, 290
Glyph	15, 209
GlyphChanged	23, 219, 250
GlyphLayout	145
GlyphLayoutChanged	149, 274
GroupIndex	33, 225

H

Handle	231
HasAccel	23, 181
HasHint	219
HasParent	23
HasWindow	209
Height	145, 177, 209
HeightChanged	150, 275
HelpContext	15
Hint	15, 210
HotGlyph	146, 272
HotGlyphChanged	23, 275
HotImageIndex	146

I

ImageIndex	15, 210
ImageIndexes	128, 129
Images	129, 154, 210
ImagesChanged	132, 267
ImmediateDropDown	136
Increment	168
Indent	154
Index	16
IntCurValue	169
IntValue	169
IsActive	211
IsDestroyOnClick	219, 234, 290
IsSelected	212
Item... ..	212, 224, 231, 236, 241, 244, 249, 254, 259, 263, 273, 278, 285, 288, 292, 295, 298
ItemHeight	64
ItemIndex	65, 101, 129, 245
ItemLink	213
ItemLinks	80
Items	65, 101, 129, 155, 245
ItemsHeight	65

K

KeepBeginGroupWhileExpanded	189
KeyDown	43, 141
KeyField	136
KeyPress	43, 141

KeyUp	44
KeyValue	137

L

LargeGlyph	147, 273
LargeGlyphChanged	24, 275
LargeImageIndex	147
LeftIndent	177
LinkCount	16
Links	16
ListBox	66
ListField	137
ListFieldIndex	137
ListFields	137, 138
ListLink	138
ListSource	138
LocalItemIndex	245
Lowered	33

M

Max	193
MaxItemCount	201
MaxLength	49, 237
MaxValue	169
MeasureItem	69
MeasureItemWidth	69
Min	194
MinValue	170

O

OnAfterExpand	191
OnBeforeCollapse	191
OnButtonClick	173
OnCanSelectNode	163
OnChange	45
OnChanging	163
OnCheckKeyForDropDownWindow	60
OnClick	27
OnCloseUp	60, 83
OnCollapsed	163
OnCollapsing	164
OnCompare	164
OnCreate	27
OnCurChange	45
OnDestroy	28
OnDetaching	84
OnDrawItem	70
OnDropDown	61
OnEnter	46
OnExit	46
OnExpanded	164
OnExpanding	164
OnGetData	93
OnGetDropDownWindow	61
OnGetImageIndex	165
OnGetSelectedIndex	165
OnKeyDown	46
OnKeyPress	47

OnKeyUp	47	CheckKeyForDropDownWindow	58
OnKeyValueChange	142	CloseUp	58
OnMeasureItem	71	DrawInterior	58
OnPaintBar	85	DropDown	59
OnPopup	85	DropDownWindow	56
OnTreeViewChange	165	DroppedDown	56
P		GetDropDownWindow	59
Paint	220	OnCheckKeyForDropDownWindow	60
PaintStyle	34, 225	OnCloseUp	60
PaintStyleChanged	37, 229	OnDropDown	61
Parent	213	OnGetDropDownWindow	61
PopupWidth	138	ShowEditor	56
Position	194	TCustomdxBarCombo Events	60
Prefix	170	TCustomdxBarCombo Methods	57
PrefixPlace	170	TCustomdxBarCombo Properties	55
Pressed	213	TCustomdxBarComboControl	239
PressedChanged	220	ControlInactivate	242
R		DropDownButtonRect	240
ReadOnly	49, 237	DropDownWindow	240
RemoveItem	204	DroppedDown	241
RemoveItemOnClick	202	Item	241
Repaint	220	TCustomdxBarComboControl Methods	242
RightIndent	178	TCustomdxBarComb oControl Properties	240
RowCount	138	TCustomdxBarContainerItem	89
S		AddListedItemLinks	91
SelectedNode	158	ClearItemList	92
SetParams	196	DeleteListedItemLinks	92
SetParentComponent	24	OnGetData	93
ShortCut	17, 214	TCustomdxBarContainerItem Events	93
ShortCutChanged	24, 220	TCustomdxBarContainerItem Methods	91
ShowAutoColor	110	TCustomdxBarContainerItem Properties	90
ShowButtons	155	TCustomdxBarSubItem	76
ShowCaption	50, 80, 148, 178, 237	BarSize	78
ShowCaptionChanged	150, 276	CanContainItem	81
ShowCheck	101	Detachable	79
ShowClearButton	117	DetachingBar	79
ShowCustomColorButton	111	DoCloseUp	81
ShowEditor	56, 111, 130, 155	DoPopup	82
ShowImageInEdit	156	GetDetachingBar	82
ShowLines	156	ItemLinks	80
ShowNumbers	102	OnCloseUp	83
ShowRoot	157	OnDetaching	84
ShowText	130	OnPaintBar	85
ShowTodayButton	118	OnPopup	85
Smooth	194	ShowCaption	80
Sorted	66, 130, 246	TCustomdxBarSubItem Events	83
SortType	157	TCustomdxBarSubItem Methods	81
StateImages	157	TCustomdxBarSubItem Properties	77
Step	195	TdxBarBu ttonControl	
StepBy	197	PaintStyle	225
StepIt	197	TdxBarButton	29
SubMenuControl	249	AllowAllUp	30
T		ButtonStyle	31
TCustomdxBarCombo	53	ButtonStyleChanged	35
AfterDropDown	57	CanChangePaintStyle	35
Canvas	55	CloseSubMenuOnClick	31
		DoDropDown	36
		Down	32
		DownChanged	36
		DropDownEnabled	32

DropDownEnabledChanged.....	36	DeleteListedItemLinks	97
DropDownMenu	32	TdxBarContainerItem Events	98
GroupIndex.....	33	TdxBarContainerItem Methods.....	96
Lowered.....	33	TdxBarContainerItem Properties	95
PaintStyle	34	TdxBarContainerItemControl.....	253
PaintStyleChanged.....	37	CreateSubMenuControl.....	255
TdxBarButton Events.....	37	Item	254
TdxBarButton Methods	35	TdxBarContainerItemControl Methods.....	255
TdxBarButton Properties	30	TdxBarContainerItemControl Properties.....	254
TdxBarButtonControl	222	TdxBarControlContainerControl	
ArrowWidth.....	226	Item	292
ButtonStyle	223	TdxBarControlContainerItem	
ButtonStyleChanged.....	226	Control.....	184
DoCloseUp	227	TdxBarControlContainerItem Events.....	186
DoDropDown	227	TdxBarCustomCombo	62
Down	223	Canvas	63
DownChanged.....	227	CheckKeyForDropDownWindow	68
DropDownEnabled.....	224	CurItemIndex.....	64
DropDownEnabledChanged.....	228	DrawItem.....	68
DroppedDown	224	DropDownCount	64
GetDefaultHeight	228	DropDownWidth	64
GetDefaultWidth	228	GetDropDownWidth.....	68
GetHeight.....	228	GetDropDownWindow.....	69
GetWidth.....	229	ItemHeight	64
GroupIndex.....	225	ItemIndex.....	65
Item	224	Items	65
PaintStyleChanged.....	229	ItemsHeight	65
TdxBarButtonControl Methods.....	226	ListBox.....	66
TdxBarButtonControl Properties	223	MeasureItem.....	69
TdxBarColorCombo	107	MeasureItemWidth.....	69
AutoColor	109	OnDrawItem.....	70
AutoColorText	109	OnMeasureItem	71
Change.....	113	Sorted.....	66
Color	109	TdxBarCustomCombo Events	70
Create	113	TdxBarCustomCombo Methods	67
CurColor.....	110	TdxBarCustomCombo Properties	63
CustomColorText	110	TdxBarDateCombo.....	115
DoClick	113	Create.....	119
ShowAutoColor	110	CurDate	117
ShowCustomColorButton	111	Date	117
ShowEditor	111	DatePopup.....	117
Text	111	Destroy	120
TdxBarColorComboControl		DoClick	120
Item	259	DropDown	120
TdxBarCombo	72	ShowClearButton	117
TdxBarCombo Events.....	75	ShowTodayButton.....	118
TdxBarCombo Methods	74	TdxBarDateComboControl	
TdxBarCombo Properties	73	Date	262
TdxBarComboControl	243	Item	263
Item	244	TdxBarEdit	48
ItemIndex.....	245	MaxLength.....	49
Items	245	ReadOnly	49
LocalItemIndex.....	245	ShowCaption	50
Sorted.....	246	Width.....	50
TdxBarComboControl Methods.....	247	WidthChanged.....	51
TdxBarComboControl Properties	244	TdxBarEdit Events	52
TdxBarContainerItem	94	TdxBarEdit Methods.....	51
AddListedItemLinks	96	TdxBarEdit Properties.....	49

TdxBarEditControl	235	Glyph.....	15
CaptionWidth	236	GlyphChanged.....	23
Item.....	236	HasAccel.....	23
MaxLength.....	237	HasParent	23
ReadOnly	237	HelpContext	15
ShowCaption	237	Hint.....	15
WidthChanged.....	238	HotGlyphChanged.....	23
TdxBarEditControl Methods.....	238	ImageIndex.....	15
TdxBarEditControl Properties	236	Index.....	16
TdxBarFontNameCombo.....	122	LargeGlyphChanged	24
Create	124	LinkCount	16
DoClick.....	125	Links.....	16
TdxBarImageCombo	127	OnClick.....	27
Create	131	OnCreate.....	27
DoClick.....	132	OnDestroy	28
ImageIndexes	128	SetParentComponent.....	24
Images.....	129	ShortCut.....	17
ImagesChanged.....	132	ShortCutChanged.....	24
ItemIndex.....	129	UnclickAfterDoing	17
Items	129	Update.....	25
ShowEditor	130	UpdateEx.....	25
ShowText	130	UseHotImages	25
Sorted.....	130	UseLargeImages.....	26
TdxBarImageComboControl.....	265	Visible	18
GetHeight.....	267	VisibleChanged	26
ImagesChanged.....	267	VisibleForUser.....	18
TdxBarInPlaceSubItem		TdxBarItem Events.....	27
Expanded.....	188	TdxBarItem Methods.....	19
KeepBeginGroupWhileExpanded.....	189	TdxBarItem Properties	10
OnAfterExpand	191	TdxBarItemControl.....	207
OnBeforeCollapse.....	191	BarManager	208
TdxBarInPlaceSubItem Events.....	191	BeginGroupChanged.....	215
TdxBarInPlaceSubItemControl		CanClicked	215
Item.....	295	Caption.....	208
TdxBarItem	9	CaptionChanged.....	216
Action.....	10	Click.....	216
ActionChange.....	19	ControlActivate	216
ActionLink.....	11	ControlClick	217
ActuallyVisible	10	ControlInactivate.....	217
Align.....	12	ControlUnclick.....	217
BarManager	13	Create	218
BarManagerChanged.....	19	Destroy.....	218
CanClicked	20	DrawSelected.....	218
CanSelected	20	Enabled	209
Caption.....	13	EnabledChanged	218
CaptionChanged.....	20	Glyph.....	209
Category	13	GlyphChanged.....	219
Click.....	20	HasHint.....	219
ClickItemLink.....	13	HasWindow	209
Create	21	Height.....	209
CurItemLink	14	Hint.....	210
Data	14	ImageIndex.....	210
Description.....	14	Images.....	210
Destroy.....	21	IsActive.....	211
DirectClick.....	21	IsDestroyOnClick.....	219
DoClick.....	21	IsSelected	212
Enabled	14	Item.....	212
EnabledChanged	22	ItemLink.....	213
GetActionLinkClass.....	22	Paint.....	220
GetParentComponent.....	22	Parent	213

Pressed.....	213	OnKeyValueChange	142
PressedChanged	220	PopupWidth.....	138
Repaint.....	220	RowCount.....	138
ShortCut	214	TdxBarLookupComboControl.....	268
ShortCutChanged	220	TdxBarMRUListItem	
VisibleChanged.....	221	AddItem.....	203
Width	214	MaxItemCount.....	201
TdxBarItemControl Methods.....	215	RemoveItem	204
TdxBarItemControl Properties	208	RemoveItemOnClick	202
TdxBarLargeButton.....	143	TdxBarMRUListItem Events.....	205
AutoGrayScale	144	TdxBarProgressControl	
GlyphLayout.....	145	Item	298
GlyphLayoutChanged.....	149	TdxBarProgressItem	
Height	145	Max	193
HeightChanged	150	Min	194
HotGlyph.....	146	Position.....	194
HotImageIndex.....	146	SetParams	196
LargeGlyph.....	147	Smooth	194
LargeImageIndex.....	147	Step	195
ShowCaption	148	StepBy	197
ShowCaptionChanged	150	StepIt.....	197
Width	148	TdxBarProgressItem Events	198
WidthChanged	150	TdxBarSpinEdit.....	166
TdxBarLargeButtonControl.....	271	CurValue	168
GlyphLayoutChanged.....	274	Increment	168
HeightChanged	275	IntCurValue	169
HotGlyph.....	272	IntValue	169
HotGlyphChanged.....	275	MaxValue.....	169
Item	273	MinValue	170
LargeGlyph.....	273	OnButtonClick.....	173
LargeGlyphChanged	275	Prefix	170
ShowCaptionChanged	276	PrefixPlace	170
WidthChanged	276	Value.....	171
TdxBarListItem.....	99	ValueType.....	171
DataIndex.....	100	TdxBarSpinEditButton	173, 284
ItemIndex.....	101	TdxBarSpinEditControl.....	281
Items	101	ActiveButton	284
ShowCheck	101	ButtonPressed.....	284
ShowNumbers	102	ButtonsRect.....	285
TdxBarListItem Events	103	Item	285
TdxBarListItem Methods.....	103	TdxBarStatic	174
TdxBarListItem Properties	100	Alignment	175
TdxBarLookupCombo	134	AllowClick.....	176
AllowResizing.....	135	BorderStyle	176
CheckKeyForDropDownWindow	140	CanClicked	180
Color	136	CanSelected.....	180
DoClick	141	HasAccel.....	181
EditText	136	Height	177
ImmediateDropDown	136	LeftIndent.....	177
KeyDown	141	RightIndent.....	178
KeyField	136	ShowCaption	178
KeyPress.....	141	Width.....	179
KeyValue	137	TdxBarStatic Events.....	182
ListField	137	TdxBarStaticControl	287
ListFieldIndex.....	137	CanClicked	289
ListFields.....	137	GetHeight.....	289
ListLink.....	138	GetWidth.....	290
ListSource.....	138	IsDestroyOnClick.....	290

Item.....	288	CanClicked.....	233
TdxBarSubItem.....	86	ControlClick.....	234
AllowCustomizing.....	87	Focused.....	232
TdxBarSubItem Events.....	88	Handle.....	231
TdxBarSubItem Methods.....	88	IsDestroyOnClick.....	234
TdxBarSubItem Properties.....	87	Item.....	231
TdxBarSubItemControl.....	248	Text.....	232
CanClicked.....	251	WindowRect.....	232
ControlClick.....	251	WndProc.....	234
CreateSubMenuControl.....	251	TdxBarWinControl Methods.....	233
GetDefaultHeight.....	252	TdxBarWinControl Properties.....	231
GetDefaultWidth.....	252	TdxBarWindowItem.....	38
GlyphChanged.....	250	Change.....	41
Item.....	249	CurChange.....	42
SubMenuControl.....	249	CurText.....	39
TdxBarSubItemControl Methods.....	250	DoEnter.....	42
TdxBarSubItemControl Properties.....	249	DoExit.....	42
TdxBarToolbarsListItem.....	104	EmptyWindow.....	40
TdxBarToolbarsListItemControl.....	256	FocusedItemLink.....	40
TdxBarTreeViewCombo.....	151	KeyDown.....	43
AllowResizing.....	153	KeyPress.....	43
ChooseByDbClick.....	153	KeyUp.....	44
Create.....	160	OnChange.....	45
Destroy.....	160	OnCurChange.....	45
DoClick.....	160	OnEnter.....	46
DoSelectedNodeChanged.....	160	OnExit.....	46
DropDown.....	161	OnKeyDown.....	46
DropDownHeight.....	153	OnKeyPress.....	47
DropDownWidth.....	153	OnKeyUp.....	47
FullExpand.....	154	Text.....	40
Images.....	154	TdxBarWindowItem Events.....	45
Indent.....	154	TdxBarWindowItem Methods.....	41
Items.....	155	TdxBarWindowItem Properties.....	39
OnCanSelectNode.....	163	Text.....	40, 111, 232
OnChanging.....	163	TreeView.....	158
OnCollapsed.....	163		
OnCollapsing.....	164	U	
OnCompare.....	164	UnclickAfterDoing.....	17
OnExpanded.....	164	Update.....	25
OnExpanding.....	164	UpdateEx.....	25
OnGetImageIndex.....	165	UseHotImages.....	25
OnGetSelectedIndex.....	165	UseLargeImages.....	26
OnTreeViewChange.....	165		
SelectedNode.....	158	V	
ShowButtons.....	155	Value.....	171
ShowEditor.....	155	ValueType.....	171
ShowImageInEdit.....	156	Visible.....	18
ShowLines.....	156	VisibleChanged.....	26, 221
ShowRoot.....	157	VisibleForUser.....	18
SortType.....	157		
StateImages.....	157	W	
TreeView.....	158	Width.....	50, 148, 179, 214
TdxBarTreeViewComboControl.....	277	WidthChanged.....	51, 150, 238, 276
GetHeight.....	279	WindowRect.....	232
Item.....	278	WndProc.....	234
TdxBarWinControl.....	230		