



ExpressSideBar v.1

Manual

Copyright (c) 1998-2001 Developer Express Inc.
ALL RIGHTS RESERVED


Contents

Overview	4
Getting Started with ExpressSideBar	6
TdxSideBar	12
TdxSideBar Properties	13
TdxSideBar Methods	24
TdxSideBar Events	30
TdxSideBarStore	35
TdxSideBarStore Properties	36
TdxSideBarStore Methods	40
TdxSideBarPopupMenu	42
TdxSideBarPopupMenu Properties	43
TdxSideBarPopupMenu Events	44
TdxStoredSideItem	45
TdxStoredSideItem Properties	46
TdxStoredSideItem Events	49
TdxSideBarItem	50
TdxSideBarItem Properties	51
TdxSideBarItem Methods	55

TdxSideBarItems	56
TdxSideBarItems Properties	57
TdxSideBarItems Methods	58
TdxSideGroup	59
TdxSideGroup Properties	60
TdxSideGroup Methods	62
TdxSideGroups	63
TdxSideGroups Properties	64
TdxSideGroups Methods	65
dxSideBarDragObject	66
Index	67

Overview


ExpressSideBar is a VCL implementation of the MS Outlook™ bar. Designed to be easy to use and built with a significant feature set...Just drop it on a form, double click the control and in a few moments, you can customize the ExpressSideBar for your needs.

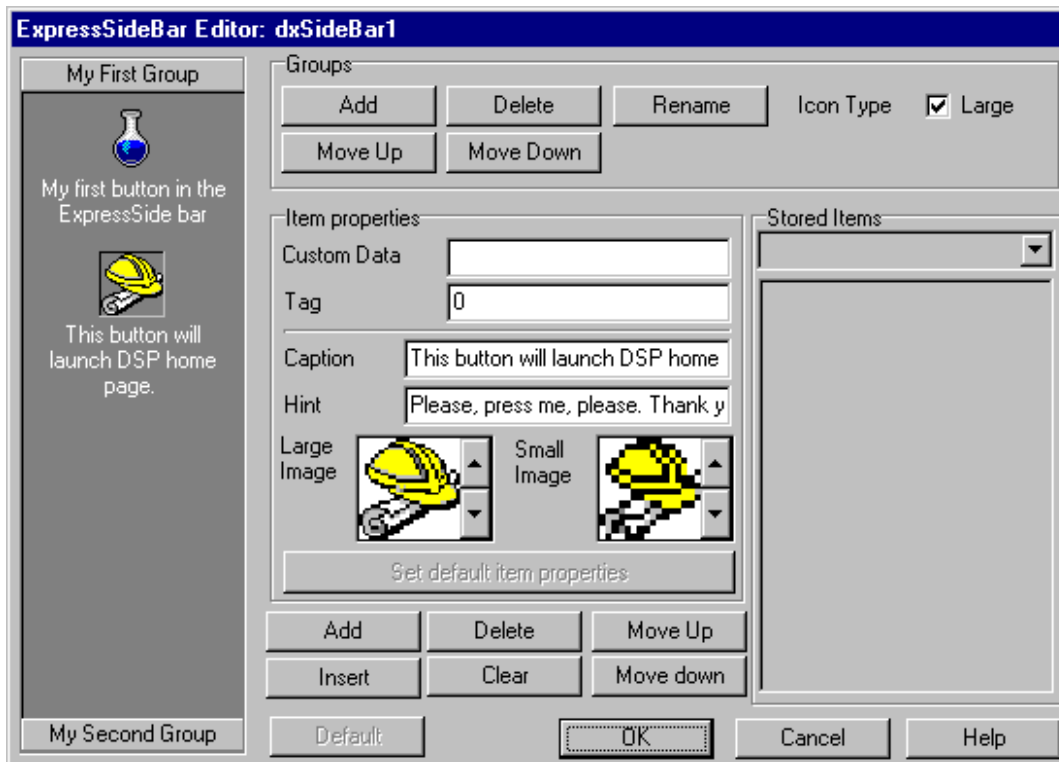

The ExpressSideBar includes a variety of features including:

- ?? Small and large icon views
- ?? Group and item customization
- ?? Full drag & drop support (including copying)
- ?? Animation on group change
- ?? Gradient color fills
- ?? Background picture
- ?? Mark sidebar items after they are clicked
- ?? Change font of group text
- ?? Change font of item text
- ?? Set the popup menu for groups and items
- ?? Change the paint style to Standard or Flat (Office 97? or Office 2000?)
- ?? Store/restore ExpressSideBar? states in the registry

And of course a runtime customization window so that your end users can manipulate the layout of the SideBar to meet specific requirements.

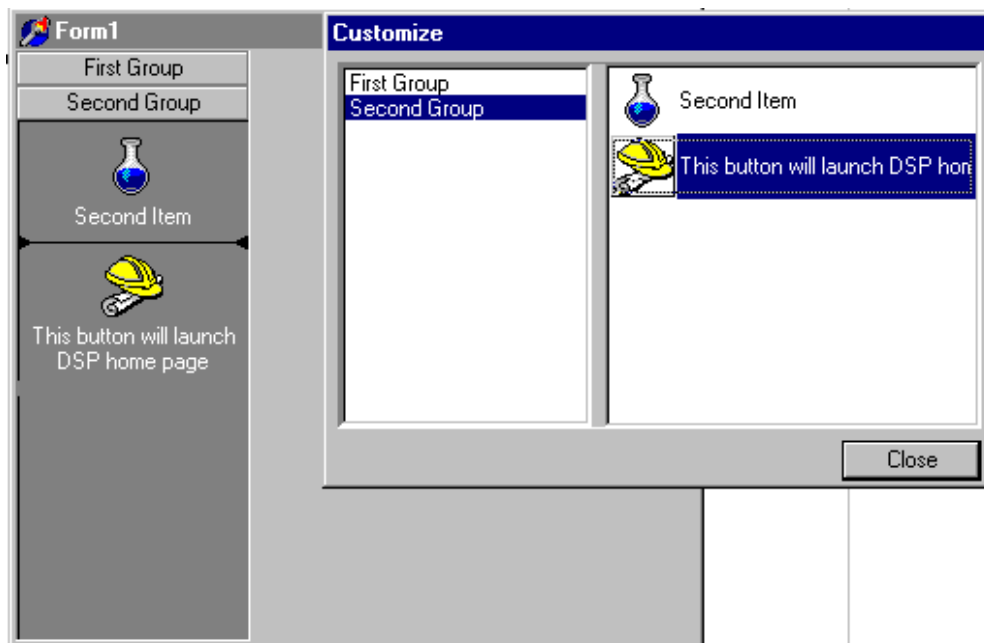

Getting Started with ExpressSideBar

Before compiling an application using the ExpressSideBar™, you must first determine whether you wish to enable runtime customization for your end-users.

Using the runtime customization capabilities of the ExpressSideBar™, your end-users can easily add/remove sidebar items by calling the ExpressSideBar customization window. You determine at design time the set of SideBar items to make available, then in turn, make only a subset visible at runtime. This provides your end users with the ability to customize the application as their needs require.


If you wish to implement SideBar customization, you must use the TdxSideBarStore component in conjunction with ExpressSideBar. Regardless of the decision to incorporate runtime customization in an application, you will ultimately write the same amount of event handlers (OnClick Event of SideBar items only).

This help file describes both variants and how to implement them in your application.

A. ExpressSideBar - Without Runtime Customization

After installing the ExpressBars package, you will find the dxSideBar component within the ExpressBars component palette tab page.

1. Drop a dxSideBar component onto a form. The control automatically aligns itself to the left edge of the form.

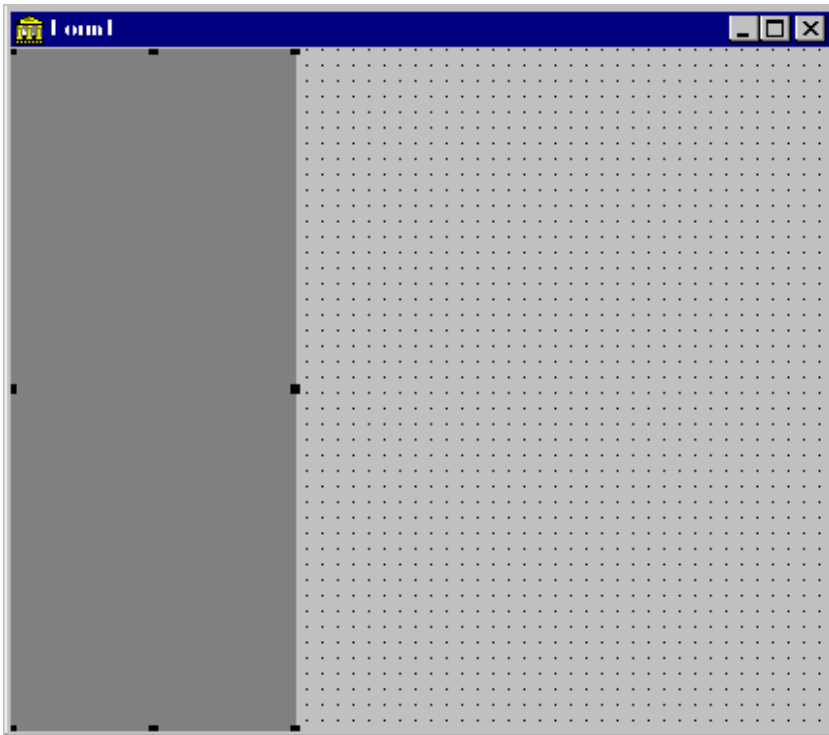


2. Drop two ImageList components on your form and set their properties: Height, Width, and Images. Rename the first image component imgSmall. Name the second image component imgLarge. We will use imgSmall to store 16X16 images and imgLarge to store 32X32 pixel images. Double click imgSmall and select the appropriate images. Repeat the same steps for imgLarge.

Note: You are free to use images of any size. We recommend these sizes as they are the most popular image sizes and meet the design guidelines set forth by Microsoft®.

3. Link the LargeImages and SmallImages properties of the dxSideBar to the newly created image lists.

4. Double click the dxSideBar control to call its component editor. Press the Add command button within the Groups panel and enter the name of your first group. You are now ready to add individual items to the active SideBar group.

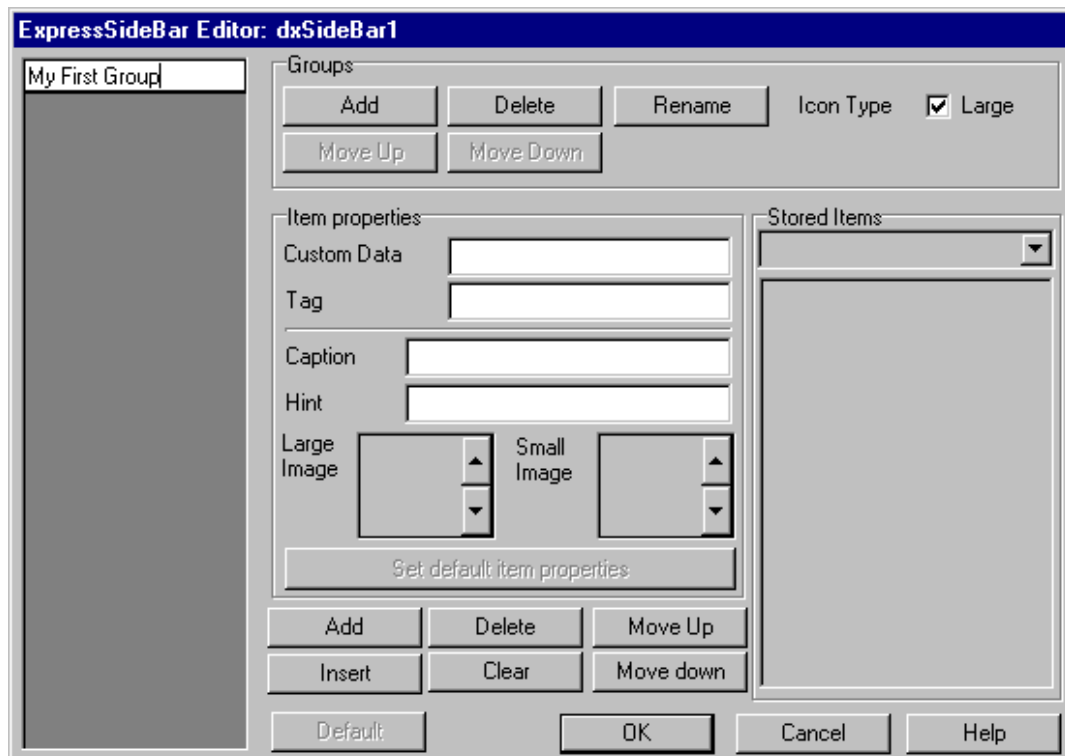

Note: The active sidebar group is the last group at the top of the ExpressSideBar group area.

5. Press the Add command button within the Item Properties panel and set its properties (Caption, Hint, Large and Small images, Custom Data and Tag). Move to the SideBar and select the newly added item. Note: A selected item will display a frame around along its edge. Use Drag & Drop to move and copy items. To change the icon type (Large/Small) of the active group, use the Icon Type check box.



6. You can now populate the ExpressSideBar with additional items and implement an OnClick event handler for each item. Write the following OnItemClick event. (You can distinguish the sidebar item by its tag property.

```
procedure TForm1.dxSideBar1ItemClick(Sender: TObject;
  Item: TdxSideBarItem);
begin
  case Item.Tag do
    0: ShowMessage('You have chosen the side item with Tag=0');
    10: ShowMessage('Hello');
    else ShowMessage('Unknown sidebar item. I'm Sorry!');
  end;
end;
```

You now have a fully functional SideBar.

B. ExpressSideBar - Full Runtime Customization

To allow end users the flexibility to modify the ExpressSideBar™ as their needs require, you must take the following steps:

1. Drop a dxSideBar component on your form. The control automatically aligns itself to the left edge of the form.
2. Drop two ImageList components on your form and set their properties: Height, Width, and Images. Rename the first image component imgSmall. Name the second image component imgLarge. We will


use `imgSmall` to store 16X16 images and `imgLarge` to store 32X32 pixel images. Double click `imgSmall` and select the appropriate images. Repeat the same step for `imgLarge`.

Note: You are free to use images of any size. We recommend these sizes as they are the most popular image sizes and meet the design guidelines set forth by Microsoft®.

3. Link the `LargelImages` and `SmallImages` of the `TdxSideBarStore` to the newly created image lists.

4. Double click on `TdxSideBarStore` to call its component editor.

Rename the default category and add a second category. Add the stored items to the active category and set appropriate properties:

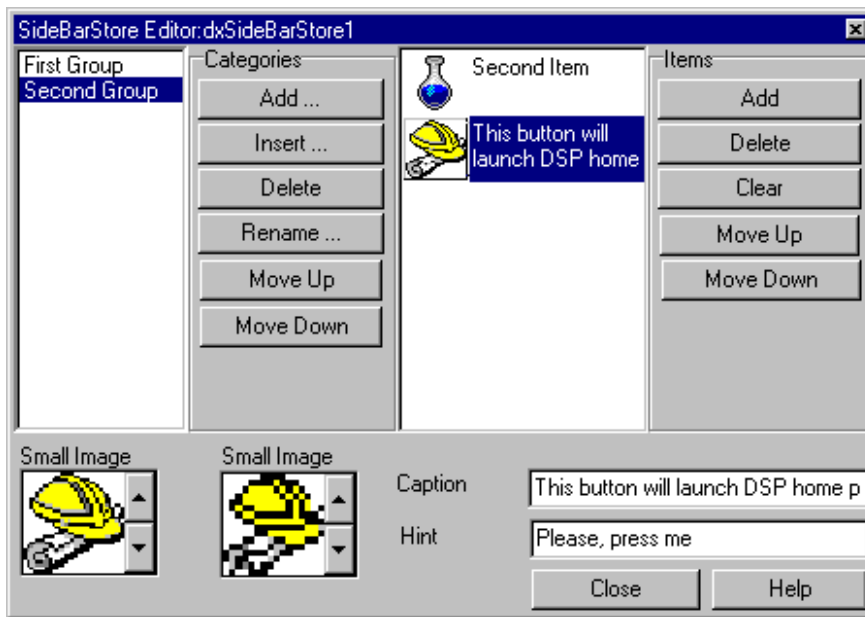


5. Write an on click event handler for the stored items by using the following code:

```
procedure TForm1.dxSideBarStore1Item3Click(Sender: TObject;
  Item: TdxSideBarItem);
begin
  ShowMessage ('Hello, thank you!');
end;
```

6. Set up the `Store` property of the `ExpressSideBar` to `TdxSideBarStore` and double click on `dxSideBar` in order to call its component editor.

7. To associate the `dxSideBar` to the modified store, press the `Default` command on the bottom portion of the component editor. This action links the `dxSideBar` to the `TdxSideBarStore` items. You may then continue to add, copy, change or modify the properties of the `SideBar` as your needs require.

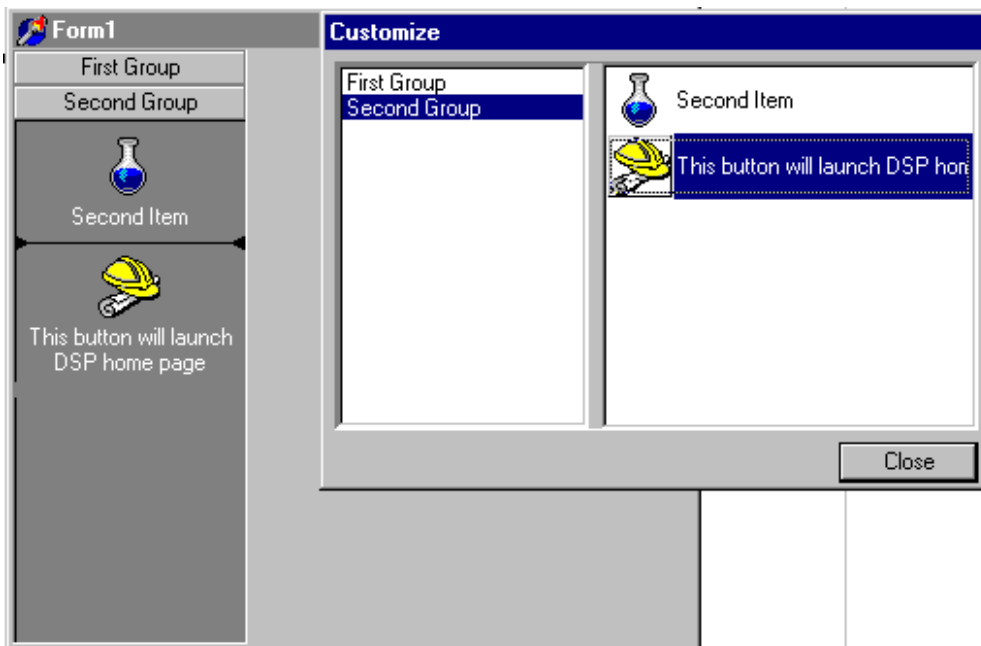

By using the TdxSideBarStore, you allow your end-users full runtime control over the behavior of the sidebar.

The ExpressSideBar was designed to allow you to have total control over your GUI design with minimal or no coding whatsoever. Here are even more features that can easily be added to your application - without writing a single line of code:

- ?? **Gradient color fills; set by using the BkGround property of the dxSideBar.**
- ?? **Background picture; set by using the BkPicture property.**
- ?? **You can display the SideBar item as selected after it has been clicked by setting the CanSelected property to True.**
- ?? **You can allow the end user to move and copy SideBar items, by using Drag & Drop. Set the DragMode property to dmAutomatic.**
- ?? **Change the font of the group text using the GroupFont property.**
- ?? **Change the font of the item text using the ItemFont property.**
- ?? **Set the popup menu for Groups and Items by using the GroupPoupMenu and ItemPopupMenu. Use the TdxSideBarPopupMenu that has the following default items (you won't need to write a single line of code to implement this - we have already done it for you): 'Add Group', 'Remove Group', 'Rename Group', 'Remove ShortCut', 'Rename ShortCut', 'Large Icons', 'Small Icons', 'Customize...'**
- ?? **Change the paint style to Standard or Flat by setting the PaintStyle property.**
- ?? **Change the scroll delay on scrolling items by adjusting the Scroll delay property. The default value is 300 (ms).**
- ?? **Change the spacing between items by adjusting the SpaceHeight property. The default value is 7 (pixels).**

-
- ?? Finally, you can store/restore the ExpressSideBar™ states in the Windows Registry, by setting the registry path in the RegistryPath property and setting the SaveToRegistry property to True.

TdxSideBar

The TdxSidbar control is a VCL implementation of the sidebar element used in many commercial software applications.

Unit

dxsbar

Description

The TdxSideBar is used to create an ExpressSideBar control. Groups of a TdxSideBar are TdxSideGroup objects. A user selects a group by clicking a group's button which appears at the top or bottom of the control.

To add a new (delete or edit an existing) group to a TdxSideBar control at design time use its component editor or TdxSideBarStore component.

TdxSideBar Properties

ActiveGroup	public/read/write
ActiveGroupIndex	published/read/write
BkGround	published/read/write
BkPicture	published/read/write
CanSelected	published/read/write
EditControl	public/read only
EditingGroup	public/read only
EditingItem	public/read only
FocusedItem	public/read only
GroupCount	public/read only
GroupFont	published/read/write
GroupHeightOffSet	published/read/write
GroupPopupMenu	published/read/write
Groups	published/read/write
IsMakingUpdate	public/read only
ItemFont	published/read/write
ItemPopupMenu	published/read/write
LargeImages	published/read/write
PaintStyle	published/read/write
RegistryPath	published/read/write
ScrollDelay	published/read/write
SelectedItem	public/read/write
SmallImages	published/read/write
SpaceHeight	published/read/write
Store	published/read/write
StoreInRegistry	published/read/write
TransparentImages	published/read/write

ActiveGroup property

read/write

Represents the group whose items are currently displayed within TdxSideBar.

property ActiveGroup: TdxSideGroup;

Description

Read `ActiveGroup` to determine which group is selected by a user. Users select groups by clicking their mouse on a group button. Set `ActiveGroup` to display the items within a group. Only one group may be active at any given time.

Example

This example allows users to select the `ActiveGroup` property by using a `ComboBox` item. During form creation, the `Combo Box` control is loaded with captions of each of the groups, as well as instance pointers to the corresponding group. When the user selects the `Combo Box` item, the associated `TdxSideGroup` object contained in the `Combo Box Objects` array is used to set the `ActiveGroup` property.

```

procedure TForm1.FormCreate(Sender: TObject);
var
    I: integer;
begin
    for I := 0 to dxSideBar1.GroupCount - 1 do
        ComboBox1.Items.AddObject(dxSideBar1.Groups[I].Caption,
            dxSideBar1.Groups[I]);
    if(dxSideBar1.GroupCount > 0) then
        ComboBox1.ItemIndex := 0;
end;

procedure TForm1.ComboBox1Change(Sender: TObject);
begin
    if (Sender is TComboBox) then
        with (Sender as TComboBox) do
            dxSideBar1.ActiveGroup := TdxSideGroup(Items.Objects[ItemIndex]);
end;

```

See Also:

TdxSideBar.ActiveGroupIndex, TdxSideBar.OnChangeActiveGroup, TdxSideGroup

ActiveGroupIndex property[read/write](#)

Represents the index of a group whose items are currently displayed in `TdxSideBar`.

property `ActiveGroupIndex`: `Integer`;

Description

Read `ActiveGroupIndex` to determine the number of a group currently selected by a user. A user selects a group by clicking the mouse on the group's button. Set `ActiveGroupIndex` to display a group's items whose indexes equal `ActiveGroupIndex`.

Example:

This example sets `ActiveGroup` to the first or last group in the `Groups` list of `TdxSideBar`.

```
procedure Form1.Button1Click(Sender : TObject);  
begin  
    if(dxSideBar1.ActiveGroupIndex = 0) then  
        dxSideBar1.ActiveGroupIndex := dxSideBar1.GroupCount - 1  
    else dxSideBar1.ActiveGroupIndex := 0;  
end;
```

See Also:

TdxSideBar.ActiveGroup, TdxSideBar.OnChangeActiveGroup, TdxSideGroup

BkGround property[read/write](#)

Specifies the background color of a TdxSideBar control.

type

TdxSideBarFillStyle = (bfsNone, bfsHorz, bfsVert);

TdxSideBarBackGround = class(TPersistent);

published

property BeginColor: TColor;

property EndColor: TColor;

property FillStyle: TdxSideBarFillStyle;

end;

property BkGround : TdxSideBarBackGround;

Description

Use BkGround to change the background color of a TdxSideBar control.

The following fill styles are available:

bfsNone	There is no background color.
bfsHorz	Background color changes horizontally from BeginColor to EndColor.
bfsVert	Background color changes vertically from BeginColor to EndColor.

Note: Use the BkPicture property to paint the picture as background of the control.

See Also:

TdxSideBar.BkPicture

BkPicture property[read/write](#)

Specifies the background picture of a TdxSideBar control.

property BkPicture: TPicture;

Description

Use BkPicture to specify the background picture of a TdxSideBar control.

Note: Use BkColor to change the background color of the control.

See Also:

TdxSideBar.BkGround

CanSelected property

read/write

Determines whether a selected item (the last shortcut pressed with a mouse) remains depressed once focus moves away from an item.

property CanSelected : Boolean;

Description

Set CanSelected to True to force a selected item to remain depressed once focus moves away from an item. Default value = False

See Also:

TdxSideBar.OnChangeSelectedItem, TdxSideBar.SelectedItem

EditControl property

read only

Represents the edit control used by TdxSideBar to edit a group or a shortcut.

property EditControl : TEdit;

Description

Use EditControl to access an instance of the edit control used by TdxSideBar to edit a group or shortcut. It is created before and disposed of after editing. Use OnBeforeEdit to perform special actions on this control, e.g. to assign the OnKeyDown or OnKeyPress handlers.

See Also:

TdxSideBar.EditGrpup, TdxSideBar.EditingItem, TdxSideBar.OnAfterEdit, TdxSideBar.OnBeforeEdit

EditingGroup property

read only

Represents the current editing group.

property EditingGroup : TdxSideGroup;

Description

Use EditingGroup to access the current editing group. If a user is not editing a group, it returns Nil.

See Also:

TdxSideBar.EditControl, TdxSideBar.EditingItem, TdxSideBar.OnAfterEdit, TdxSideBar.OnBeforeEdit

EditingItem property**read only**

Represents the current editing item.

property EditingItem : TdxSideBarItem;

Description

Use EditingItem to access the current editing item.

See Also:

TdxSideBar.EditingControl, TdxSideBar.EditingGroup, TdxSideBar.OnAfterEdit, TdxSideBar.OnBeforeEdit

FocusedItem property**read only**

Represents an item with current focus.

property FocusedItem : TdxSideBarItem;

Description

Read FocusedItem to determine the item selected by a user. A user selects an item by moving the mouse over the group region. If no items are selected, FocusedItem is Nil.

Example

This example determines which item is selected with the mouse and displays its caption as the Form Caption.

```
procedure TForm1.dxSideBar1ChangeFocusedItem (Sender: TObject);  
begin  
  if (dxSideBar1.FocusedItem <> Nil) then  
    Caption := dxSideBar1.FocusedItem.Caption  
  else Caption := '';  
end;
```

See Also:

TdxSideBar.OnChangeFocusedItem, TdxSideBarItem

GroupCount property**read only**

Represents the number of groups in a TdxSideBar object.

property GroupCount : Integer;

Description

Use GroupCount to determine the number of groups listed by the Groups property.

See Also:

TdxSideBar.Groups

GroupFont property

[read/write](#)

Represents Caption font attributes for a Group's button.

property GroupFont: TFont;

Description

To change font, specify a new TFont object. To modify a font, change the value of Color, Height, Name, Pitch, Size, or Style properties of the TFont object.

See Also:

TdxSideBar.Groups, TdxSideGroup, TdxSideGroups

GroupHeightOffSet property

[read/write](#)

Specifies the height of a group.

property GroupHeightOffSet : Integer;

Description

Use GroupHeightOffSet to specify the height of a group.

[group height] = [group font height] + 2 * GroupHeightOffSet.

If 0, group height equals [group font height] + 4 for standard paint style and [group font height] + 6 for flat paint style. Default value = 0.

See Also:

TdxSideBar.GroupFont, TdxSideBar.PaintStyle

GroupPopupMenu property

[read/write](#)

Identifies the pop-up menu associated with groups.

property GroupPopupMenu: TPopupMenu;

Description

Assign a value to GroupPopupMenu to call a pop-up menu when a user selects a group and presses the right mouse button within that group. Use the GetPopupGroup method and the OnPopup event of the popup menu to determine the group on which the popup menu appears.

Example:

This example determines the group wherein a popup menu appears.

```
procedure TForm1.PopupMenu1Popup(Sender: TObject);
begin
    ShowMessage(dxSideBar1.GetPopupGroup.Caption);
end;
```

See Als:

TdxSideBar.GetPopupGroup, TdxSideBarPopupMenu

[Groups property](#)[read/write](#)

Represent an indexed array of all groups in TdxSideBar.

property Groups: TdxSideGroups;

Description

Use Groups to directly access a particular group in a TdxSideBar control. For example, use Groups to change IconStyle of individual pages in TdxSideBar. Specify a group to access by using Index; where 0 specifies the first group, 1 specifies the second group, etc. Each group is a TdxSideGroup object.

Example

Clicking Button1 changes IconStyle of every other group to dxsgSmallIcon.

```
procedure TForm1.Button1Click (Sender: TObject);  
var  
    I : Integer;  
begin  
    for I := 0 to dxSideBar1.GroupCount - 1 do  
        if(I mod 2 = 1) then  
            dxSideBar1.Groups[I].IconStyle := dxsgSmallIcon;  
end;
```

See Also:

TdxSideGrop, TdxSideGroups

[IsMakingUpdate property](#)[read only](#)

Determines whether a TdxSideBar control is locked and not repainted.

property IsMakingUpdate : Boolean;

Description

Set IsMakingUpdate to True, to prevent repaint operations of a TdxSideBar control. Use this property when adding/deleting groups and items in TdxSideBar.

Note: Make certain to set IsMakingUpdate to False when you finish updating the control. Use a try – finally construction.

[ItemFont property](#)[read/write](#)

Represents Font attributes of an item's label.

property ItemFont : TFont;

Description

To change Font, specify a new TFont object. To modify a Font, change the values of the Color, Height, Name, Pitch, Size, or Style properties of the TFont object.

See Also:

TdxSideBar.GroupFont, TdxSideBar.Items

ItemPopupMenu property[read/write](#)

Identifies the pop-up menu associated with items.

property ItemPopupMenu : TPopupMenu;

Description

Assign a value to ItemPopupMenu to call a pop-up menu when a user selects an item and presses the right mouse button. Use FocusedItem and the OnPopup event of the popup menu to determine the item on which the popup menu appears.

Example:

This example determines the item on which a popup menu appears.

```
procedure TForm1.PopupMenu1Popup(Sender: TObject);
begin
    if (dxSideBar1.FocusedItem <> Nil) //the focused item may be Nil
        ShowMessage(dxSideBar1.FocusedItem.Caption);
end;
```

See Also:

TdxSideBar.FocusedItem, TdxSideBar.PopupMenu

LargeImages property[read/write](#)

Provides a list of images to display for each item in TdxSideBar when active group IconStyle equals dxsgLargeIcon.

property LargeImages: TImageList;

Description

Set LargeImages to specify bitmaps to display above an item's caption in TdxSideBar when the active group's IconStyle equals dxsgLargeIcon. Use the TdxSideBar component editor to associate images with specific sidebar items.

Note: If you use the TdxSideBarStore component (Store property of the TdxSideBar control for runtime customization and restoration of control properties), you must assign an ImageList to LargeImages of TdxSideBarStore and leave the LargeImages property of the TdxSideBar control empty.

See Also:

TdxSideBar.SmallImages, TdxSideBarStore.LargeImages, TdxSideGroup.IconType

PaintStyle property**read/write**

Determines the paint style of a TdxSideBar control.

type

```
TdxsbPaintStyle = (sbpsStandard, sbpsFlat);  
property PaintStyle : TdxsbPaintStyle;
```

Description

The following styles are available: sbpsStandard, sbpsFlat.

sbpsFlat

Group buttons are painted with a flatter look.

The cursor changes when moving over Group buttons.

Once pressed, Group buttons are depressed.

RegistryPath property**read/write**

Specifies the registry path wherein to save TdxSideBar configurations when the StoreInRegistry property equals True.

```
property RegistryPath : String;
```

Description

Use RegistryPath to specify a registry path for saving configurations of TdxSideBar. Activate the StoreInRegistry property to allow the saving and restoration to and from the registry for TdxSideBar.

See Also:

TdxSideBar.LoadFromRegistry, TdxSideBar.SaveToRegistry, TdxSideBar, StoreInRegistry

ScrollDelay property**read/write**

Determines, in milliseconds, the delay invoked when scrolling items in an active group when a user presses the up-down scroll buttons or performs Drag & Drop operations.

```
property ScrollDelay : Integer;
```

Description

Use ScrollDelay to determine the delay in milliseconds invoked when scrolling items in an active group. Default value = 300 (0.3 second).

SelectedItem property**read/write**

Specifies a selected item (i.e. the last shortcut clicked with a mouse).

```
property SelectedItem: TdxSideBarItem;
```

Description

Read `SelectedItem` to determine the last shortcut clicked with a mouse. `SelectedItem` remains as a flat button. If `CanSelected` is `False`, then `SelectedItem` is always `Nil`. You can also change `SelectedItem` programmatically.

See Also:

TdxSideBar.CanSelected, TdxSideBar.OnChangeSelectedItem

[SmallImages property](#)[read/write](#)

Provides a list of icon images for each item in `TdxSideBar` when an active group's `IconStyle` equals `dxsgSmallIcon`.

property `SmallImages: TImageList;`

Description

Set `SmallImages` to specify bitmaps to use above an item's caption in `TdxSideBar`.

Use the `TdxSideBar` component editor to associate images with sidebar items.

Note: If you use the `TdxSideBarStore` component (Store property of the `TdxSideBar` control for runtime customization and restoration of control properties) you must assign an `ImageList` to `SmallImages` of the `TdxSideBarStore` and leave the `SmallImages` property of the `TdxSideBar` controls empty.

See Also:

TdxSideBar.LargeImages, TdxSideBarStore.SmallImages, TdxSideGroup.IconType

[SpaceHeight property](#)[read/write](#)

Determines the distance in pixels between items.

property `SpaceHeight : Integer;`

Description

Use `SpaceHeight` to determine the distance in pixels between items. Default value = 7

[Store property](#)[read/write](#)

Determines the `TdxSideBarStore` of `TdxSideBar`.

property `Store : TdxSideBarStore;`

Description

Use `Store` to specify a `TdxSideBarStore` for `TdxSideBar`. You must use the `TdxSideBarStore` component to enable end user runtime customization within an application.

SideBar customization allows end users to easily remove and or add SideBar items at run-time, by calling the `ExpressSideBar` customization window. You can specify the set of SideBar items, but

make visible only a subset. End user may then decide which items to make available as their needs warrant.

TdxSideBar items have a StoredItem property, which determines the TdxStoredSideItem component.

Note: All groups of TdxSideBar are deleted when changing the Store property.

See Also:

TdxSideBarItem, TdxSideBarStore, TdxStoredSideItem

StoreInRegistry property

read/write

Determines whether the configurations of TdxSideBar are stored in the registry.

property StoreInRegistry : Boolean;

Description

Set the RegistryPath property and activate the StoreInRegistry property to allow a TdxSideBar to save and restore its configuration to/from the registry using RegistryPath.

See Also:

TdxSideBar.LoadFromRegistry, TdxSideBar.RegistryPath, TdxSideBar.SaveToRegistry

TransparentImages property

read/write

TransparentImages determines whether TdxSideBar draws images using a mask regardless of Color settings.

property TransparentImages : Boolean;

Description

Set TransparentImages to True to draw images using a mask regardless of Color. Default value = False

TdxSideBar Methods

GetGroupAtPos
GetItemAtPos
GetPopupGroup
IsGroupEditing
IsItemEditing
IsEditing
EditGroup
EditItem
EndEdit
GetSmallImages
GetLargeImages
LoadFromRegistry
SaveToRegistry

GetGroupAtPos method

Returns the group located at a specified position within TdxSideBar.

```
TPoint = record  
  X: Longint;  
  Y: Longint;  
end;
```

```
function GetGroupAtPos(p: TPoint): TdxSideGroup;
```

Description

Use GetGroupAtPos when you wish to know which group is at a specified location within TdxSideBar.

Specify the position in client coordinates as the value of the **p** parameter; **p** can be anywhere within the boundaries of a group. If there is no group at a specified position, GetGroupAtPos returns Nil.

See Also:

TdxSideBar.GetItemAtPos, TdxSideBar.GetPopupGroup

GetItemAtPos method

Returns an item located at a specified position within TdxSideBar.

```
TPoint = record  
  X: Longint;  
  Y: Longint;  
end;
```

```
function GetItemAtPos(p: TPoint): TdxSideBarItem;
```

Description

Use GetItemAtPos when you wish to discover which item is at a specified location within TdxSideBar.

Specify the position in client coordinates as the value of the p parameter; p can be anywhere within the boundaries of an item. If there is no item at a specified position, GetItemAtPos returns Nil.

Note: To retrieve an item from current cursor position, use the **FocusedItem** property.

See Also:

TdxSideBar.FocusedItem, TdxSideBar.GetGroupAtPos

GetPopupGroup method

Determines the currently selected group.

```
function GetPopupGroup: TdxSideGroup;
```

Description

Use GetPopupGroup to determine the currently selected group. If the mouse is in the "item's" area, the function returns ActiveGroup. Use the GetPopupGroup method and the OnPopup event of the Group popup menu to determine the group on which a popup menu appears.

See Also:

TdxSideBar.GetGroupAtPos, TdxSideBar.GroupPopupMenu

IsGroupEditing method

Determines whether a group of TdxSideBar is currently being edited.

```
function IsGroupEditing : Boolean;
```

Description

Use IsGroupEditing to determine if a group of TdxSideBar is currently being edited.

If a group is being edited IsGroupEditing returns True, otherwise returns False.

Note: Only one group or item can be edited at any given point in time.

See Also:

TdxSideBar.EditGroup, TdxSideBar.EndEdit, TdxSideBar.IsEditing, TdxSideBar.IsItemEditing

IsItemEditing method

Determines whether an item of TdxSideBar is currently being edited.

function IsItemEditing : Boolean;

Description

Use IsItemEditing to determine if an item of TdxSideBar is currently being edited.

If any item is currently being edited, IsItemEditing returns True, otherwise returns False.

Note: Only one group or item can be edited at any given point in time.

See Also:

TdxSideBar.EditGroup, TdxSideBar.EndEdit, TdxSideBar.IsEditing, TdxSideBar.IsGroupEditing

IsEditing method

Determines whether an item or group of TdxSideBar is currently being edited.

function IsEditing : Boolean;

Description

Use IsEditing to determine if an item or group of TdxSideBar is currently being edited.

If any item or group is currently being edited, IsEditing returns True, otherwise returns False.

Note: Only one group or item can be edited at any given point in time.

Example

This code will prevent a form from closing when a user presses Enter on an item being edited or on the group caption of TdxSideBar.

```
procedure TForm1.Button1Click(Sender: TObject);
begin
    if(Bar.IsEditing) then begin
        ModalResult := mrNone;
        Bar.EndEdit(True);
    end;
end;
```

See Also:

TdxSideBar.EditGroup, TdxSideBar.EndEdit, TdxSideBar.IsGroupEditing, TdxSideBar.IsItemEditing

EditGroup method

Begins editing of a TdxSideBar group.

procedure EditGroup(Group: TdxSideGroup);

Description

Use EditGroup to immediately begin editing a particular group. The Group parameter represents the group to be edited.

Example:

This code will edit a group on which a GroupPopup menu appears.

Var

```
PopupMenuGroup : TdxSideGroup;
```

```
procedure TForm1.GroupPopupMenuPopup(Sender: TObject);
```

```
begin
```

```
    PopupMenuGroup := dxSideBar1.GetPopupMenuGroup;
```

```
end;
```

```
procedure TForm1.PMIGroupEditClick(Sender: TObject);
```

```
begin
```

```
    dxSideBar1.EditGroup(PopupMenuGroup);
```

```
end;
```

See Also:

TdxSideBar.EditItem, TdxSideBar.EndEdit

[EditItem method](#)

Begins editing of a TdxSideBar item.

```
procedure EditItem(Item : TdxSideBarItem);
```

Description

Use EditItem to immediately begin editing a particular item. The Item parameter represents the item to be edited.

Note: EditItem makes the item visible if it was invisible and changes the ActiveGroup property to make the group to which the item belongs Active.

Example:

This code will edit the item on which an ItemPopup menu appears.

Var

```
PopupMenuItem : TdxSideBarItem;
```

```
procedure TForm1.ItemPopupMenuPopup(Sender: TObject);
```

```
begin
```

```
    PopupMenuItem := TdxSideBar1.FocusedItem;
```

```
end;
```

```
procedure TForm1.PMIItemEditClick(Sender: TObject);
```

```

begin
    TdxSideBarBar1.EditItem(PopupMenuItem);
end;

```

See Also:

TdxSideBar.EditGroup, TdxSideBar.EndEdit

EndEdit method

Immediately cancels editing of a TdxSideBar group or label.

```
procedure EndEdit(Accept : Boolean);
```

Description

Use EndEdit to cancel editing of a TdxSideBar group or label.

GetSmallImages method

Returns the ImageList used for small images in a TdxSideBar component.

```
function GetSmallImages : TImageList;
```

Description

Use GetSmallImages to return the ImageList used for small images in TdxSideBar. If a non null value, it returns the value of the SmallImages property or SmallImages of an associated TdxSideBarStore component.

See Also:

TdxSideBar.GetLargeImages, TdxSideBar.SmallImages, TdxSideBar.Store, TdxSideBarStore.SmallImages

GetLargeImages method

Returns the ImageList used for large images in a TdxSideBar component.

```
function GetLargeImages : TImageList;
```

Description

Use GetLargeImages to return the ImageList used as large images in TdxSideBar. If a non null value, it returns the value of the LargeImages property or LargeImages of an associated TdxSideBarStore component.

See Also:

TdxSideBar.GetSmallImages, TdxSideBar.LargeImages, TdxSideBar.Store, TdxSideBarStore.LargeImages

LoadFromRegistry method

Restores the configuration of a TdxSideBar control (items, groups) from the registry using the ARegistryPath path.

```
procedure LoadFromRegistry(ARegistryPath: string);
```

Description

Use LoadFromRegistry to restore configurations of a TdxSidebar control (item, groups) from the registry using the ARegistryPath path.

Note: Set the RegistryPath property and activate the StoreInRegistry property to allow TdxSideBar to save and restore its configuration to/from the registry using RegistryPath automatically when creating (loading data from the stream) and destroying the control.

See Also:

TdxSideBar.RegistryPath, TdxSideBar.SaveToRegistry, TdxSideBar.StoreInRegistry

SaveToRegistry method

Save the configuration of a TdxSideBar control (items, groups) to the registry using the ARegistryPath path.

```
procedure SaveToRegistry(ARegistryPath: string);
```

Description

Use SaveToRegistry to save configuration of a TdxSidebar control (item, groups) to the registry.

Notes: Set the RegistryPath property and activate the StoreInRegistry property to allow saving and restoration of a TdxSideBar's configuration automatically to/from the registry.

See Also:

TdxSideBar.RegistryPath, TdxSideBar.StoreInRegistry

TdxSideBar Events

OnClick
OnDeleteItem
OnChangeActiveGroup
OnChangeFocusedItem
OnChangeGroupCaption
OnDeleteItem
OnChangeSelectedItem
OnAfterEdit
OnBeforeEdit
OnDragDropItem

OnClick event

Occurs when a user clicks a TdxSideBar Item.

type

TdxSideBarItemClickEvent = procedure(Sender: TObject; Item: TdxSideBarItem) of object;

property OnItemClick : TdxSideBarItemClickEvent;

Description

Write an OnItemClick event handler to perform specific actions immediately after a user clicks a TdxSideBar Item.

Example

In this example, Sidebar items are distinguished by the tag property.

```
procedure TForm1.dxCtrl1ItemClick(Sender: TObject;  
    Item: TdxSideBarItem);  
begin  
    case Item.Tag do  
        0: ShowMessage('You have chosen the side item with Tag=0');  
        10: ShowMessage('Hello');  
        else ShowMessage('Unknown sidebar item. I'm Sorry, I don't implement any  
            action on this click');  
    end;  
end;
```

See Also:

TdxSideBar.Store, TdxSideBarStore, TdxStoreSideItem

[OnDeleteItem event](#)

Occurs before a TdxSideBar item is removed.

```
TdxSideBarDeleteItemEvent = procedure(Sender: TObject; Item: TdxSideBarItem)
of object;
```

```
property OnDeleteItem : TdxSideBarDeleteItemEvent;
```

Description

Write an OnDeleteItem event handler to perform specific actions before a TdxSideBar item is removed. The Item parameter represents the shortcut to be removed.

See Also:

TdxSideBarItem

[OnChangeActiveGroup event](#)

Occurs immediately after a new group is made active.

```
property OnChangeActiveGroup: TNotifyEvent;
```

Description

Write an OnChangeActiveGroup event handler to perform specific actions immediately after the active group is changed.

Example

This code fills a listbox with the item captions of the ActiveGroup.

```
procedure TForm1.dxSideBar1ChangeActiveGroup(Sender: TObject);
Var
  I : Integer;
begin
  ListBox1.Items.Clear;
  if(dxSideBar1.ActiveGroup <> Nil) then
    for I := 0 to dxSideBar1.ActiveGroup.ItemCount - 1 do
      ListBox1.Items.Add(dxSideBar1.ActiveGroup.Items[I].Caption);
end;
```

See Also:

TdxSideBar.ActiveGroup, TdxSideBar.ActiveGroupIndex

[OnChangeFocusedItem event](#)

Occurs immediately after the FocusedItem property is changed.

property OnChangeFocusedItem: TNotifyEvent;

Description

Write an OnChangeFocusedItem event handler to perform specific actions immediately after the FocusedItem is changed.

See Also:

TdxSideBar.FocusedItem

OnChangeGroupCaption event

Occurs immediately after the Caption of a particular group is changed.

type

TdxSideBarChangeGroupCaptionEvent = procedure(Sender: TObject; Group: TdxSideGroup) of object;

property OnChangeGroupCaption : TdxSideBarChangeGroupCaptionEvent;

Description

Write an OnChangeGroupCaption event handler to perform specific actions immediately after the Caption of a particular group is changed. The Group parameter is the group whose caption has been changed.

See Also:

TdxSideGroup.Caption

OnDeleteItem event

Occurs before a TdxSideBar item is removed.

TdxSideBarDeleteItemEvent = procedure(Sender: TObject; Item: TdxSideBarItem) of object;

property OnDeleteItem : TdxSideBarDeleteItemEvent;

Description

Write an OnDeleteItem event handler to perform specific actions before a TdxSideBar item is removed. The Item parameter represents the shortcut to be removed.

See Also:

TdxSideBarItem

OnChangeSelectedItem event

Occurs immediately after the SelectedItem property is changed.

property OnChangeFocusedItem: TNotifyEvent;

Description

Write an `OnChangeFocusedItem` event handler to perform specific actions immediately after the `FocusedItem` is changed.

See Also:

TdxSideBar.CanSelected, TdxSideBar.SelectedItem

OnAfterEdit event

Occurs after a user completes editing a shortcut or a group.

property `OnAfterEdit`: `TNotifyEvent`;

Description

Use `OnAfterEdit` to perform specific actions when a user finishes editing a shortcut or a group.

See Also:

TdxSideBar.EditControl, TdxSideBar.EditingGroup, TdxSideBar.EditingItem, TdxSideBar.OnBeforeEdit

OnBeforeEdit event

Occurs before a user begins editing a shortcut or a group.

property `OnBeforeEdit`: `TNotifyEvent`;

Description

Use `OnBeforeEdit` to perform specific actions using `EditControl`, for instance to assign the `OnKeyDown` or `OnKeyPress` handler events.

See Also:

TdxSideBar.EditControl, TdxSideBar.EditingGroup, TdxSideBar.EditingItem, TdxSideBar.OnAfterEdit

OnDragDropItem event

Occurs before drag & drop operations are finished successfully and a new shortcut is added or shortcut position is changed.

`TdxSideBarDragDropItemEvent` = **procedure**(Sender: `TObject`; Source, Target: `TdxSideBarItem`; IsCopy: `Boolean`) **of object**;

property `OnDragDropItem`: `TdxSideBarDragDropItemEvent`;

Description

Write an `OnDeleteItem` event handler to perform specific actions before drag & drop operations are finished successfully and a new shortcut is added or shortcut position is changed. The `Source` parameter is the drag & drop shortcut, `Target` is the newly created shortcut. The `IsCopy` parameter determines whether the user has pressed the CTRL key.

TdxSideBar.EditControl, TdxSideBar.EditingGroup, TdxSideBar.EditingItem, TdxSideBar.OnAfterEdit

TdxSideBarStore

TdxSideBarStore is used by TdxSideBar controls.

Unit

dxsbar

Description

Use the TdxSideBarStore component to allow end user runtime customization in your applications.

SideBar customization allows end users to easily remove and or add SideBar items at run-time, by calling the ExpressSideBar customization window. You can specify a set of the SideBar items, but make visible only a subset. End users may then determine the items to display to meet their specific needs.

TdxSideBarStore is the parent of TdxStoredSideItem components and contains the information about Large and Small Images.

TdxSideBar uses the information to create items and display them to the user. To create an item in a TdxSideBar control you must assign the Store property of TdxSideBar to TdxSideBarStore and TdxSideBarStore must contain at least one TdxStoredSideItem. An item of TdxSideBar includes a StoredItem property which cannot be Nil. TdxSideBarStore can work with any number of TdxSideBar controls.

To create TdxStoredSideItem at design time, double-click the TdxSideBarStore in your IDE.

For your convenience you can group TdxStoredSideItem components in a TdxSideBarStore by categories.

TdxSideBarStore Properties

Categories	published/read/write
Count	public/read only
DefaultLargeImage	published/read/write
DefaultSmallImage	published/read/write
Items	public/read only
LargeImages	published/read/write
SideBarCount	published/read/write
SideBars	public/read only
SmallImages	public/read only

Categories property

read/write

Represents a category name.

property Categories: TStrings;

Description

TdxSideBarStore contains TdxStoredSideItem components and divides them into Categories.

Use Categories to add, insert, delete, and move categories. Categories must always contain at least one category.

Note: You cannot delete a category which contains TdxStoredSideItem components.

See Also:

TdxSideBarStore.Customize, TdxSideBarStore.GetCountByCategory, TdxSideBarStore.GetItemByCategory, TdxSideBarStore.GetItemsByCategory

Count property

read only

Count is the number of TdxStoredSideItems in a TdxSideBarStore object.

property Count: Integer;

Description

Use Count to determine the number of TdxStoredSideItems listed in the Items property.

Example:

This code example fills a listbox with the captions of TdxStoredSideItems.

procedure TForm1.Form1Create(Sender : TObject);

Var

```
I : Integer;  
begin  
  for I := 0 to dxSidebarStore1.Count - 1 do  
    ListBox1.Items.Add(dxSidebarStore1.Items[I].Caption);  
end;
```

See Also:

TdxSideBarStore.Items

DefaultLargeImage property**read/write**

Used to display the image of a TdxSideBarItem in LargeIcon view if the value of the LargeImage property of a corresponding TdxStoredSideItem is -1 or incorrect.

property DefaultLargeImage: Integer;

Description

Use DefaultLargeImage to display the image of a TdxSideBarItem in LargeIcon view if the value of the LargeImage property of a corresponding TdxStoredSideItem is -1 or incorrect.

Default value = -1

See Also:

TdxSideBarStore.DefaultSmallImage, TdxSideBarStore.LargeImages

DefaultSmallImage property**read/write**

Used to display the image of a TdxSideBarItem in SmallIcon view if the value of the SmallImage property of a corresponding TdxStoredSideItem is -1 or incorrect.

property DefaultSmallImage: Integer;

Description

Use DefaultSmallImage to display the image of a TdxSideBarItem in SmallIcon view if the value of the SmallImage property of a corresponding TdxStoredSideItem is -1 or incorrect.

Default value = -1

See Also:

TdxSideBarStore.DefaultLargeImage, TdxSideBarStore.SmallImages

Items property**read only**

Represents an indexed array of all TdxStoredSideItems in TdxSideBarStore.

property Items[Index : Integer]: TdxStoredSideItem;

Description

Use `Items` to directly access a particular `Item` in a `TdxSideBarStore` component. Specify the item to access using `Index`, where 0 specifies the first item, 1 specifies the second item, etc. Each item is a `TdxStoredSideItem` component.

See Also:

TdxSideBarStore.Count

LargelImages property**read/write**

Provides a list of icons for each item in `TdxSideBar` where the `IconStyle` of an Active group equals `dxsgLargelcon`.

property `LargeImages`: `TImageList`;

Description

Each `TdxStoredSideItem` in `TdxSideBarStore` may be associated with a large bitmap in an image list by setting its `LargelImage` property.

See Also:

TdxSideBarStore.SmallImages

SideBarCount property**read/write**

Represents the number of `TdxSideBars` having a `Store` property equal to `TdxSideBarStore`.

property `SideBarCount` : `Integer`;

Description

Use `SideBarCount` to determine the number of `TdxSideBar` having a `Store` property equal to `TdxSideBarStore`.

See Also:

TdxSideBarStore.SideBars

SideBars property**read only**

Represents an indexed array of all `TdxSideBars` in a `TdxSideBarStore` having the `Store` property equal to `TdxSideBarStore`.

property `SideBars[Index : Integer]` : `TdxSideBar`;

Description

Use `SideBars` to directly access a particular `TdxSideBar` which has a `Store` property equal to `TdxSideBarStore`. Specify which `TdxSideBar` to access using `Index`, where 0 specifies the first `SideBar`, 1 specifies the second `SideBar`, etc.

See Also:

TdxSideBarStore.SideBarCount

SmallImages property**read only**

Provides a list of icons for each item in TdxSideBar where the IconStyle of an Active group equals dxsgSmallIcon.

property LargeImages: TImageList;

Description

Each TdxStoredSideItem in TdxSideBarStore may be associated with a small bitmap in an image list by setting its SmallImage property.

See Also:

TdxSideBarStore.LargeImages

TdxSideBarStore Methods

GetCountByCategory
 GetItemByCategory
 GetItemsByCategory
 Customize

GetCountByCategory method

Determines the number of TdxStoredSideItem which belong to a particular category.

```
function GetCountByCategory(St: String): Integer;
```

Description

Use GetCountByCategory to determine the number of TdxStoredSideItem which belong to a particular category. The St parameter is the name of the category.

Example

This code example fills a combobox with the names of categories and a listbox with the captions of TdxStoredSideItem belonging to the category selected in the combobox.

```
procedure TForm1.Form1Create(Sender : TObject);
Var
  I : Integer;
begin
  for I := 0 to dxSideBarStore1.Categories.Count - 1 do
    ComboBox1.Items.Add(dxSideBarStore1.Categories);
  ComboBox1.ItemIndex := 0;
  ComboBox1Click(ComboBox1);
end;
procedure TForm1.ComboBox1Click(Sender: TObject);
Var
  List : TList;
  I : Integer;
  item : TdxStoredSideItem;
begin
  ListBox1.Items.Clear;
  List := TList.Create;
  dxSideBarStore1.GetItemsByCategory(ComboBox1.Items[ComboBox1.ItemIndex],
  List);
  for I := 0 to List.Count - 1 do begin
    Item := TdxStoredSideItem(List[I]);
```

```
        ListBox1.Items.Add(Item.Caption)
    end;
    List.Free;
end;
```

See Also:

TdxSideBarStore.GetItemByCategory, TdxSideBarStore.GetItemsByCategory

[GetItemByCategory method](#)

Returns a particular TdxStoredSideItem from a TdxSideBarStore.

```
function GetItemByCategory(St: String; Index: Integer): TdxStoredSideItem;
```

Description

Use GetItemByCategory to return a particular TdxStoredSideItem from a TdxSideBarStore. The St parameter is the name of the category and Index is the number of the Item in this category (the range is from 0 to GetCountByCategory - 1).

See Also:

TdxSideBarStore.GetCountByCategory, TdxSideBarStore.GetItemByCategory

[GetItemsByCategory method](#)

Retrieves a list of TdxStoredSideItem components which belong to a particular category.

```
function GetItemsByCategory(St: String; List: TList): Integer;
```

Description

Call GetItemsByCategory to retrieve a list of TdxStoredSideItem components which belong to a particular category. List is a list object, created and maintained by the application, to which a pointer to TdxStoredSideItem components is retrieved. The function returns the number of List items.

See Also:

TdxSideBarStore.GetCountByCategory, TdxSideBarStore.GetItemByCategory

[Customize method](#)

Activates the ExpressSideBar Customizing form.

```
procedure Customize;
```

Description

Call Customize to activate the ExpressSideBar Customizing form.

TdxSideBarPopupMenu

TdxSideBarPopupMenu encapsulates the properties, methods, and events of a pop-up menu and includes predefined menu items designed to function with TdxSideBar.

Unit

dxsbar

Description

Use TdxSideBarPopupMenu to define a pop-up menu which appears when a user clicks an item or a TdxSideBar group with the right mouse button. To make a pop-up menu available, assign the TdxSideBarPopupMenu object to the TdxSideBar's GroupPopupMenu and Item PopupMenu properties.

TdxSideBarPopupMenu Properties

Options published/read/write

Options property

read/write

Specifies various predefined menu items available for all TdxSideBar popup menus.

type

```
TdxSideBarPopupMenuOption = (sbmIconType, sbmAddGroup,  
                             sbmRemoveGroup, sbmCustomize, sbmRenameGroup,  
                             sbmRenameItem, sbmRemoveItem);
```

```
property Options : TdxSideBarPopupMenuOptions;
```

Description

Set Options to select specific menu items for a TdxSideBar popup menu. Options is a set combined from the following values:

Value	Meaning
sbmIconType	Both 'Large Icon' and 'Small Icon' menu items are included. A User can change IconType of a group by selecting one of these items.
sbmAddGroup	The 'Add Group' menu item is included. A user can add a group by selecting this item.
sbmRemoveGroup	The 'Remove Group' menu item is included. A user can remove the current group by selecting this item.
sbmCustomize	The 'Customize' menu item is included. A user can activate the customization form by selecting this item.
sbmRenameGroup	The 'Rename Group' menu item is included. A user can rename the current group by selecting this item.
sbmRenameItem	The 'Rename Item' menu item is included. A user can rename the current TdxSideBar item by selecting this item.
sbmRemoveItem	The 'Remove Item' menu item is included. A user can remove the current TdxSideBar item by selecting this item.

TdxSideBarPopupMenu Events

OnAfterClick

OnPopupClose

OnAfterClick event

Occurs after a user clicks a popup menu item

property OnAfterClick: TNotifyEvent;

Description

Use the OnAfterClick event to carry out specific actions after a user clicks a popup menu item.

OnPopupClose event

Occurs after closing a popup menu.

property OnPopupClose: TNotifyEvent;

Description

Use the OnPopupClose event to carry out specific actions after closing a popup menu.

TdxStoredSidelItem

TdxStoredSidelItem is used by a TdxSideBarItem object.

Unit

dxsbar

Description

TdxStoredSidelItem is a child of TdxSideBarStore components. It contains information about Large and Small indexes of images, the default Caption, PopupMenu and the OnClick event.

TdxSideBar uses this information to create items and then display them (the Store property). Items of TdxSideBar have a StoredItem property. This allows for creation of a TdxStoredSidelItem with the same properties, and to use these predefined properties for different TdxSideBars.

For convenience, you can group TdxStoredSidelItem components in a TdxSideBarStore using categories.

TdxStoredSideltem Properties

Caption	published/read/write
Category	published/read/write
Hint	published/read/write
LargeImage	published/read/write
PopupMenu	published/read/write
SmallImage	published/read/write
Store	public/read only

Caption property

read/write

Specifies text which identifies StoredItems to users.

property Caption: String;

Description

Use Caption to associate StoredItems with text which uniquely identifies a StoredItem. This value is also copied to the Caption property of TdxSideBarItem which has a StoredItem property equal to TdxStoredSideltem.

See Also:

TdxSideBarItem.Caption, TdxSideBarItem.IdDefault, TdxSideBarItem.StoredItem

Category property

read/write

Specifies the index of a TdxSideBarStore category to which the TdxStoredSideltem belongs.

property Category : Integer;

Description

Use Category to read or change the index of a TdxSideBarStore category to which the TdxStoredSideltem belongs.

See Also:

TdxSideBarStore.Categories, TdxSideBarStore.GetItemByCategory

Hint property

read/write

Specifies the hint for a Sidebar item.

property Hint : String;

Description

Set Hint to specify a hint for a sidebar items having a StoredItem property equal to TdxStoredSideItem.

See Also:

TdxSideBarItem.Hint, TdxSideBarItem.IsDefault, TdxSideBarItem.StoredItems

LargeImage property**read/write**

Determines the image displayed as a large icon in TdxSideBar.

property LargeImage : Integer;

Description

Set LargeImage to specify the large image displayed in a TdxSideBar for items having a StoredItem property equal to TdxStoredSideItem (If IconStyle of a groups equals dxsgLargeIcon).

See Also:

TdxSideBarItem.StoredItem, TdxSideBarStore.LargeImages

PopupMenu property**read/write**

Identifies the pop-up menu associated with a TdxSideBarItem which has a StoredItem property equal to TdxStoredSideItem.

property PopupMenu : TPopupMenu;

Description

Assign a value to PopupMenu to enable a pop-up menu when a user selects an item and clicks the right mouse button over it. (For a TdxSideBarItem which has a StoredItem property equal to TdxStoredSideItem.)

See Also:

TdxSideBar.ItemPopupMenu, TdxSideBarItem.StoredItem

SmallImage property**read/write**

Determines the image displayed as a small icon in TdxSideBar.

property SmallImage : Integer;

Description

Set SmallImage to specify the small image displayed in a TdxSideBar for items having a StoredItem property equal to TdxStoredSideItem (If IconStyle of a groups equals dxsgSmallIcon).

See Also:

TdxSideBarItems.StoredItem, TdxSideBarStore.SmallImages

Store property**read only**

Specifies the TdxSideBarStore to which a TdxStoredSidelItem belongs.

property Store : TdxSideBarStore;

Description

Read Store to determine the TdxSideBarStore to which a TdxStoredSidelItem belongs.

Note: TdxSideBarStore is the parent component for TdxStoredSidelItem.

See Also:

TdxSideBarStore.Items

TdxStoredSidelItem Events

OnClick

OnClick event

Occurs when a user clicks the TdxSideBarItem having a StoredItem property equal to TdxStoredSidelItem.

```
TdxSideBarItemClickEvent = procedure(Sender: TObject; Item: TdxSideBarItem)  
of object;  
property OnClick : TdxSideBarItemClickEvent;
```

Description

Use the OnClick event handler to create a procedure which responds to the click event of a TdxSideBarItem which has a StoredItem property equal to TdxStoredSidelItem.

The Item parameter is the TdxSideBarItem that has been clicked.

See Also:

TdxSideBarItem.StoredItem

TdxSideBarItem

TdxSideBarItem represents an item in a SideBar group (TdxSideGroup).

Unit

dxsbar

Description

Each TdxSideGroup uses TdxSideBarItems to maintain a collection of TdxSideBarItem objects.

TdxSideBarItem Properties

Caption	published/read/write
CustomData	published/read/write
Enabled	public/read/write
Group	published/read only
Hint	published/read/write
IsDefault	published/read/write
ItemObject	public/read/write
LargeImage	published/read/write
SmallImage	published/read/write
StoredItem	published/read/write
Tag	published/read/write
Visible	published/read only

Caption property

[read/write](#)

Specifies the text which identifies an item to a user.

property Caption : String;

Description

Use Caption to associate an item with text which specifically identifies a TdxSideBarItem. If IsDefault equals True and StoredItem is not Nil ,Caption is not stored in the *.dfm file and its value is retrieved from the Caption property of a corresponding StoredItem.

See Also:

TdxSideBar.EditItem, TdxSideBarItem.IsDefault, TdxStoredSideItem.Caption

CustomData property

[read/write](#)

CustomData stores a string value as a part of the object.

property CustomData: String;

Description

The CustomData property is provided for convenience of storing an additional string value in the application for special needs. For example, use the Custom property to recognize the object that has been clicked and perform a particular operation on the click event of the TdxSidebar control or associated TdxStoredSideItem component.

See Also:

TdxSideBarItem.Tag

Enabled property

read/write

Controls whether a sidebar item responds to mouse events.

property Enabled : Boolean;

Description

Use Enabled to change the availability of a sidebar item to a user. To disable a sidebar item, set Enabled to False. Disabled sidebar item draws its caption in gray and ignores mouse events; Users may only drag & drop the disabled sidebar item (if dragMode is set to dmAutomatic).

To re-enable a sidebar item, set Enabled to True. Default value = True.

Group property

read only

Determines the group to which a sidebar item belongs.

property Group : TdxSideGroup;

Description

Read Group to determine the group to which a sidebar item belongs.

See Also:

TdxSideBarGroup

Hint property

read/write

Hint specifies the hint for a sidebar item.

property Hint : String;

Description

Use Hint to set a hint for an item. If IsDefault equals True and StoredItem is not Nil, Hint is not stored in the dfm file and its value is retrieved from the Hint property of the corresponding StoredItem.

See Also:

TdxStoredSideItem.Hint

IsDefault property

read/write

Determines whether the Caption, Hint, LargeImage and SmallImage properties of an item are the same as the Caption, Hint, LargeImage and SmallImage properties of a corresponding StoredItem.

property IsDefault : Boolean;

Description

Read `IsDefault` to determine whether the `Caption`, `Hint`, `LargeImage` and `SmallImage` properties of an item are the same as the `Caption`, `Hint`, `LargeImage` and `SmallImage` properties of a corresponding `StoredItem`. Set to `True` to set these properties to their default Values.

See Also:

TdxSideBarItem.Caption, *TdxSideBarItem.Hint*, *TdxSideBarItem.LargeImage*,
TdxSideBarItem.SmallImage

ItemObject property**read/write**

`ItemObject` is a pointer to an application-defined object associated with a sidebar item.

property `ItemObject`: `TObject`;

Description

Use `ItemObject` to associate an object with a sidebar item. `ItemObject` allows applications to quickly access information about an entity represented by a sidebar item.

See Also:

TdxSideBarItem.CustomData, *TdxSideBarItem.Tag*

LargeImage property**read/write**

Determines the large image displayed for a given item.

property `LargeImage` : `Integer`;

Description

Set `LargeImage` to determine the image displayed as a large icon for a specific item when `IconStyle` of a group equals `dxsgLargeIcon`.

See Also:

TdxSideBar.LargeImages, *TdxSideBarItem.SmallImage*, *TdxSideBarItem.StoredItem*,
TdxStoredSideItem.LargeImage

SmallImage property**read/write**

Determines the small image displayed for a given item.

property `SmallImage` : `Integer`;

Description

Set `SmallImage` to determine the image displayed as a small icon for a specific item when `IconStyle` of a group equals `dxsgSmallIcon`.

See Also:

TdxSideBar.SmallImages, *TdxSideBarItem.LargeImage*, *TdxSideBarItem.StoredItem*,
TdxStoredSideItem.SmallImage

StoredItem property

[read/write](#)

Specifies a TdxStoredSideItem component.

property StoredItem: TdxStoredSideItem;

Description

Set StoredItem to specify a TdxStoredSideItem component. The behavior of TdxSideBarItem depends on corresponding TdxStoredSideItem components:

Large and Small images, Item Popup Menu, Caption properties and the OnClick event.

See Also:

TdxStoredSideItem

Tag property

[read/write](#)

Stores an integer value as a part of the object.

property Tag: Longint;

Description

The Tag property is provided for the convenience of storing an additional integer value or pointer information for an application's specific needs.

See Also:

TdxSideBarItem.CustomData

Visible property

[read only](#)

Determines whether an item is currently displayed in the 'item area' of a TdxSideBar control.

property Visible : Boolean;

Description

Read Visible to determine whether an item is currently displayed in the 'item area' of a TdxSideBar control.

See Also:

TdxSideBarItem.MakeVisible, TdxSideGroup.GetVisibleCount, TdxSideGroup.TopVisibleItem

TdxSideBarItem Methods

Assign

MakeVisible

Assign method

Copies the contents of the source item to the current item.

procedure Assign(Source: TPersistent);

Description

Assign copies StoredItem, Caption, CustomData, Hint, IsDefault, LargeImage, SmallImage and Tag properties from the source object to an item.

MakeVisible method

Makes an item visible.

function MakeVisible : Boolean;

Description

Call MakeVisible to make an item Visible. If an item's group is inactive, MakeVisible activates it.

See Also:

TdxSideBarItem.Visible

TdxSideBarItems

TdxSideBarItems is a container for TdxSideBarItem objects.

Unit

dxsbar

Description

Each TdxSideBarItems holds a collection of TdxSideBarItem objects in TdxSideGroup. TdxSideBarItems maintains the index of columns in its Items array. The Count property contains the number of items in a collection. At design time, use the TdxSideBar component editor to add, remove, or modify items.

TdxSideBarItems Properties

Items public/read/write

Items property

read/write

An index of groups in a collection.

property Items[Index : Integer]: TdxSideBarItem;

Description

The value of the Index parameter corresponds to the Index property of TdxSideBarItem. It represents the position of the sidebar item in the group object.

See Also:

TdxSideBarItem, TdxSideGroup

TdxSideBarItems Methods

Add

Add method

Creates a new TdxSideBarItem instance and adds it to the Items array.

```
function Add: TdxSideBarItem;
```

Description

Add returns a new sidebar item. At design time, use the TdxSidebar component editor to add items to TdxSideBar.

TdxSideGroup

TdxSideGroup represents a group in a SideBar control (TdxSideBar).

Unit

dxsbar

Description

Each TdxSideBar uses TdxSideBarGroups to maintain a collection of TdxSideBarGroup objects.

TdxSideGroup Properties

Active	public/read only
Caption	published/read/write
ItemCount	public/read/write
IconType	published/read/write
Items	published/read/write
TopVisibleItem	public/read only

Active property

read only

Determines whether a TdxSideGroup object is active

property Active : Boolean;

Description

Read Active to determine whether a TdxSideGroup object is the active TdxSideBar group.

See Also:

TdxSideBar.ActiveGroup, TdxSideBar.ActiveGroupIndex, TdxSideGroup.MakeActive

Caption property

read/write

Caption specifies the text which identifies a group to a user.

property Caption : String;

Description

Use Caption to associate a group with unique text in order to identify it to end users. The string's value is displayed on the group button.

See Also:

TdxSideBar.GroupFont

ItemCount property

read/write

Determines the number of TdxSideBarItem(s) in a group.

property ItemCount : Integer;

Description

Use ItemCount to determine the number of TdxSideBarItem(s) in a group.

See Also:

TdxSideBarItem, TdxSideGroup.Items

IconType property

[read/write](#)

Determines whether items of a group are displayed using a LargeIcon or SmallIcon style.

`TdxSideGroupIconType = (dxsgLargeIcon, dxsgSmallIcon);`

property IconType : TdxSideGroupIconType;

Description

If IconType is dxsgLargeIcon, items of a group are displayed using LargeIcons. If IconType is dxsgSmallIcon, items of a group are displayed using SmallIcons.

Items property

[read/write](#)

Items is an indexed array of all the TdxSideBarItem objects in TdxSideGroup.

property Items : TdxSideBarItems;

Description

Use Items to have direct access to a particular Item in the TdxSideGroup component. Specify which item to access by using Index, where 0 specifies the first item, 1 specifies the second item, and so on. Each item is a TdxSideBarItem component.

See Also:

TdxSideBarItem, TdxSideGroup.ItemCount

TopVisibleItem property

[read only](#)

property TopVisibleItem : Integer;

Determines the topmost visible item index of TdxSideBarItem.

See Also:

TdxSideBarItem.MakeVisible, TdxSideBarItem.

See Also:

TdxSideBarItem.MakeVisible, TdxSideGroup.GetVisibleCount, TdxSideGroup.TopVisibleItem

TdxSideGroup Methods

Assign
MakeActive
GetVisibleCount

Assign method

Copies the contents of the source group into a group.

procedure Assign(Source: TPersistent);

Description

Assign copies Caption, Items, IconStyle from the source object to a group.

MakeActive method

Activates a group in a TdxSideBar control

procedure MakeActive;

Description

Call MakeActive to activate a group in a TdxSideBar control.

See Also:

TdxSideBar.ActiveGroup, TdxSideGroup.Active

GetVisibleCount method

Determines the number of Items currently displayed.

function GetVisibleCount : Integer;

Description

Call GetVisibleCount to determine the number of items currently displayed. Items are visible in the 'item area' of TdxSideBar.

See Also:

TdxSideBarItem.Visible, TdxSideGroup.TopVisibleItem

TdxSideGroups

TdxSideGroups is a container for TdxSideGroup objects.

Unit

dxsbar

Description

Each TdxSideGroups holds a collection of TdxSideGroup objects in a TdxSideBar. TdxSideGroups maintains an index of columns in its Items array. The Count property contains the number of columns in the collection. At design time, use the TdxSideBar component editor to add, remove, or modify groups.

TdxSideGroups Properties

Items public/read/write

Items property

read/write

An index of groups in a collection.

property Items[Index: Integer]: TdxSideGroup default;

Description

The value of the Index parameter corresponds to the Index property of TdxSideGroup. It represents the position of a group in a TdxSideBar control.

See Also:

TdxSideGroup

TdxSideGroups Methods

Add

Add method

Creates a new TdxSideGroup instance and adds it to the Items array.

```
function Add: TdxSideGroup;
```

Description

Add returns the new group. At design time, use the dxSidebar component editor to add groups to the dxSideBar.

dxSideBarDragObject

Used for generating custom Drag & Drop operations for a TdxSideBar control.

```
var dxSideBarDragObject: TdxSideBarDragObject;
```

Unit

dxsbar

Description

Employ this variable if you wish to enable custom Drag & Drop operations. You must create the variable at the beginning of the Drag event and destroy it when finished.

Example:

The following code allows you to drag a list box item (the values of the list box items are associated with TdxStoredSideItem) to TdxSideBar and create a new SideBar item with a predefined StoreItem.

```
procedure TForm1.ListBox1StartDrag(Sender: TObject;  
  var DragObject: TDragObject);  
begin  
  dxSideBarDragObject := dxSideBarDragObject.Create(ListBox1,    DragObject,  
  Nil, dxSideBarStore.Items[ListBox1.ItemIndex]);  
end;  
procedure TForm1.ListBox1EndDrag(Sender, Target: TObject; X, Y: Integer);  
begin  
  dxSideBarDragObject.EndDrag(Target, X, Y);  
end;
```

Index

A

Active.....	60
ActiveGroup.....	13
ActiveGroupIndex.....	14
Add.....	58, 65
Assign.....	55, 62

B

BkGround.....	15
BkPicture.....	15

C

CanSelected.....	16
Caption.....	46, 51, 60
Categories.....	36
Category.....	46
Count.....	36
CustomData.....	51
Customize.....	41

D

DefaultLargeImage.....	37
DefaultSmallImage.....	37
dxSideBarDragObject.....	66

E

EditControl.....	16
EditGroup.....	26
EditingGroup.....	16
EditingItem.....	17
EditItem.....	27
Enabled.....	52
EndEdit.....	28

F

FocusedItem.....	17
------------------	----

G

GetCountByCategory.....	40
GetGroupAtPos.....	24
GetItemAtPos.....	24
GetItemByCategory.....	41
GetItemsByCategory.....	41
GetLargeImages.....	28
GetPopupGroup.....	25
GetSmallImages.....	28
GetVisibleCount.....	62
Group.....	52
GroupCount.....	17
GroupFont.....	18
GroupHeightOffSet.....	18
GroupPopupMenu.....	18
Groups.....	19

H

Hint.....	46, 52
-----------	--------

I

IconType.....	61
IsDefault.....	52
IsEditing.....	26
IsGroupEditing.....	25
IsItemEditing.....	26
IsMakingUpdate.....	19
ItemCount.....	60
ItemFont.....	19
ItemObject.....	53
ItemPopupMenu.....	20
Items.....	37, 57, 61, 64

L

LargeImage.....	47, 53
LargeImages.....	20, 38
LoadFromRegistry.....	28

M

MakeActive.....	62
MakeVisible.....	55

O

OnAfterClick.....	44
OnAfterEdit.....	33
OnBeforeEdit.....	33
OnChangeActiveGroup.....	31
OnChangeFocusedItem.....	31
OnChangeGroupCaption.....	32
OnChangeSelectedItem.....	32
OnClick.....	49
OnDeleteItem.....	31, 32
OnDragDropItem.....	33
OnItemClick.....	30
OnPopupClose.....	44
Options.....	43

P

PaintStyle.....	21
PopupMenu.....	47

R

RegistryPath.....	21
-------------------	----

S

SaveToRegistry.....	29
ScrollDelay.....	21
SelectedItem.....	21

SideBarCount.....	38
SideBars	38
SmallImage	47, 53
SmallImages.....	22, 39
SpaceHeight.....	22
Store.....	22, 48
StoredItem.....	54
StoreInRegistry.....	23

T

Tag.....	54
TdxSideBar	12

TdxSideBarItem.....	50
TdxSideBarItems.....	56
TdxSideBarPopupMenu.....	42
TdxSideBarStore.....	35
TdxSideGroup.....	59
TdxSideGroups.....	63
TdxStoredSideItem.....	45
TopVisibleItem.....	61
TransparentImages	23

V

Visible	54
---------------	----