

Universität Heidelberg
Institut für Informatik
Arbeitsgruppe Datenbanksysteme

Master-Arbeit

Building an adaptable and resource constrained Conversational Information Search System

Name: Stephan Lenert
Matrikelnummer: Matrikelnummer der Autorin/des Autors
Betreuer: Name der Betreuerin / des Betreuers
Datum der Abgabe: October 1, 2023

Ich versichere, dass ich diese Master-Arbeit selbstständig verfasst und nur die angegebenen Quellen und Hilfsmittel verwendet habe und die Grundsätze und Empfehlungen “Verantwortung in der Wissenschaft” der Universität Heidelberg beachtet wurden.

Abgabedatum: October 1, 2023

Zusammenfassung

Die Zusammenfassung muss auf Deutsch **und** auf Englisch geschrieben werden. Die Zusammenfassung sollte zwischen einer halben und einer ganzen Seite lang sein. Sie soll den Kontext der Arbeit, die Problemstellung, die Zielsetzung und die entwickelten Methoden sowie Erkenntnisse beschreiben.

Abstract

The abstract has to be given in German **and** English. It should be between half a page and one page in length. It should cover in a readable and comprehensive style the context of the thesis, the problem setting, the objectives, and the methods developed in this thesis as well as key insights and results.

Contents

1	Introduction	4
2	Background and Related Work	5
2.1	Question Answering	5
2.1.1	Basics	6
2.1.2	Information Retrieval Architectures	9
2.1.3	Extraction Approaches	12
2.1.4	Retrieval Approaches	14
2.1.5	Reader Approaches	18
2.1.6	Limitations	20
2.2	Conversational Question Answering	21
2.2.1	Basics	21
2.2.2	Contextual Query Understanding	24
2.2.3	Initiative	26
2.2.4	Large Language Model based Agents / Chain of Thought ???	26
2.3	Efficient Large Language Models	26
2.3.1	Fine-Tuning	27
2.3.2	Compression	30
2.4	Related Work	30
2.4.1	Question Answering based on PDFs	30
2.4.2	Open-domain Conversational Question Answering ???	33
3	Open-domain QA Chatbot over PDFs	34
3.1	Overview and Objective	34
3.2	Question Answering over PDFs	36
3.2.1	Extract	36
3.2.2	Retrieve	38
3.2.3	Read	40
3.2.4	Orchestration	40
3.3	Conversational Question Answering System	41

Contents

4	Experimental Evaluation	42
5	Conclusions and Future Work	43

List of Acronyms

List of Figures

2.1	Adjusted Question Answering (QA) Framework Classification by Farea et al. [Farea et al., 2022]	7
2.2	Reader-Retriever-System Architecture for QA by Zhu et. al. [Zhu et al., 2021]. The dashed lines indicate optional modules.	10
2.3	Types of Dense Retriever by Zhu et. al. [Zhu et al., 2021].	16
2.4	Adjusted Graphic of the Extractive Reader by Jurafsky et al. [Jurafsky and Martin, 2023] 1	
2.5	Concepts of a Conversation in regards to a Conversational Information-System (CIS)	23
2.6	General System Architecture of a Conversational Question Answering (Conv QA) System by Gao et. al. [Gao et al., 2022]	24
2.7	Adapted Stages of Efficiency Improvement for Large Language Model (LLM) by Treviso et al. [Treviso et al., 2023]	27
2.8	Adapted Fine-Tuning Approaches for LLM by Treviso et al. [Treviso et al., 2023]	28
2.9	Low-Rank Adaptation (LoRa) by Hu et. al. [Hu et al., 2021]	30
3.1	Overview of the Example Use-Case	35
3.2	Overview of the System Architecture	36
3.3	Possible Combinations of Modules to Create an Adapted QA-System . .	36
3.4	Fine-Tuning Process for Retriever	39

List of Tables

1 Introduction

This chapter is an introduction to the topic of this thesis. It starts with a brief overview of the current state of the art in the field of question answering and chatbots. Then, it describes the motivation behind this thesis and the goals that are to be achieved. Finally, it gives an overview of the structure of this thesis.

2 Background and Related Work

This chapter provides essential background information and reviews relevant prior research. It commences with an introduction to the sub-task of Question Answering (QA), as presented in Section 2.1. As previously mentioned in the Introduction (Chapter 1), this chapter maintains a clear distinction between QA and Conv QA. Consequently, Section 2.2 extends upon the foundational knowledge of QA and introduces the requisite concepts for the transformation of a QA-System into a Conv QA-System. Section 2.4 will delve into the related work, providing a comprehensive overview of the current state-of-the-art in the field of QA and Conv QA over textual knowledge sources.

2.1 Question Answering

The evolution of QA as a research field provides a solid foundation for understanding current research initiatives and methodologies. Among the early contributions is BASEBALL, an automated QA system developed by researchers at Massachusetts Institute of Technology (MIT) in 1961. This QA system demonstrated its capability to answer questions related to baseball using natural English language [Green et al., 1961].

In 1999, Text REtrieval Conference (TREC) (Text Retrieval Conference) initiated the TREC-8 Question Answering track, which marked "the first large-scale evaluation of domain-independent question-answering systems" [Voorhees, 1999]. A more well-known QA system is *Watson* by IBM, an open-domain QA system that won the TV show Jeopardy! in 2011 [Ferrucci, 2012]. It is evident that an evolutionary process has occurred between the early research in 1961 and today's systems like *ChatGPT* by OpenAI. To understand the dimensions in which these systems differ, their components, and how to distinguish them will be introduced in Section 2.1.1, while subsequent sections will delve deeper into specific components.

In 1999, the TREC initiated the TREC-8 Question Answering track, marking "the first large-scale evaluation of domain-independent question-answering systems" [Voorhees, 1999]. A more renowned QA system is IBM's *Watson*, an open-domain QA system that famously triumphed on the television game show Jeopardy! in 2011 [Ferrucci, 2012]. It is evident that an evolutionary process has transpired between the early research in 1961

and contemporary systems such as OpenAI’s *ChatGPT*. In section 2.1.1 we will lay the groundwork by introducing the fundamental aspects of QA-Systems and the techniques used to differentiate and categorize them. Following that, subsequent sections will delve deeper into the examination of specific system components.

2.1.1 Basics

Jurafsky and Martin define a QA-System as a system “designed to satisfy human information needs” [Jurafsky and Martin, 2023]. Hence, it primarily functions as an Information Retrieval System, with its primary objective being to provide users with the desired and accurate information in response to natural language requests.

The research community has yet to establish a universally accepted classification framework for Question Answering (QA) systems. For instance, Hao et al. and Farea et al. [Hao et al., 2022, Farea et al., 2022] take a comprehensive approach to classify QA systems but differ in certain aspects, such as their treatment of question types and knowledge sources. On the other hand, other researchers [Zhu et al., 2021, Jurafsky and Martin, 2023, Etezadi and Shamsfard, 2023, Zhang et al., 2023b] employ a similar classification methodology but often focus solely on retrieval-based approaches, thereby lacking a holistic perspective.

The classification proposed by Farea et al. [Farea et al., 2022] goes a step further by distinguishing between the **QA-Framework** and **QA-Paradigms**, enhancing its versatility for comparing classical and modern QA systems. An adaptation of this classification will be utilized in this thesis. The originally proposed QA algorithms have been extended to include the Retrieval-based approach, and the Question Types have been revised based on the typology introduced by Mishra et al. in their 2016 survey [Mishra and Jain, 2016], which was further elaborated upon by Etezadi et al. [Etezadi and Shamsfard, 2023]. Also the Answer Types were adjusted to align with the classifications used in [McDonald et al., 2022, Dasigi et al., 2021]. In this context, a crucial distinction is made between a **QA** and **ConvQA** system, guided by the criteria outlined in [Zamani et al., 2023]: a QA system exclusively handles standalone questions, while any inquiry exceeding a single question and involving conversational context falls within the domain of a **ConvQA** system.

The **QA-Framework** encompasses external factors such as Question and Answer Types, while also considering system-related factors like the QA Algorithm and Knowledge Source [Farea et al., 2022, Hao et al., 2022]. Conversely, the **QA-Paradigm** defines the fundamental underlying concept of a system and can be seen as a subset of possible combinations within the **QA Framework**. Currently, three dominant paradigms

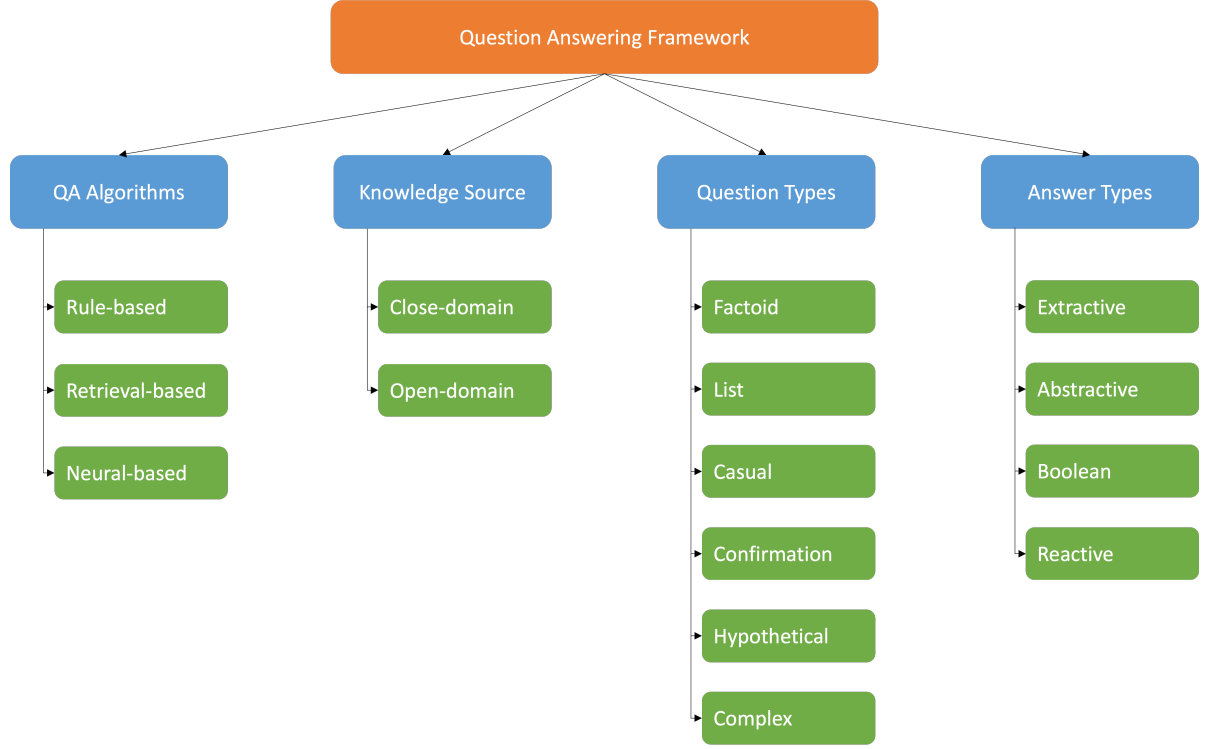


Figure 2.1: Adjusted QA Framework Classification by Farea et al. [Farea et al., 2022]

prevail:

1. **Information Retrieval (IR)-Based QA:** This paradigm involves searching through extensive multi-modal data based on a user’s question and using the retrieved passages to generate an answer.
2. **Knowledge Base (KB) QA:** In this approach, a semantic representation of the question is constructed, and a knowledge base is queried using this representation. The returned results are then used to generate an answer.
3. **Generative Question Answering:** Here, knowledge is fully implicit, and a neural network (NN) generates answers based on its trained parameters.

For visual clarity, a diagram illustrating the adjusted QA Framework Classification by Farea et al. is provided in Figure 2.1.

Figure 2.1 illustrates the aforementioned classification. The primary distinguishing factor is the employed **QA Algorithm**. Rule-based approaches involve the manual crafting of feature extractions from user questions, which are then compared to the knowledge base. Rule-based approaches are typically employed in closed-domain QA systems exclusively [Etezadi and Shamsfard, 2023].

Retrieval-based approaches are the classic Information Retrieval (IR)-based QA systems, comprising two key components: an intent classifier and a retriever. The intent classifier’s objective is to discern the question’s intent and identify important entities. Subsequently, the retriever searches the knowledge source and identifies the most relevant passages [Farea et al., 2022, Zhu et al., 2021].

The Neural-based approach, often referred to as the generative approach, utilizes a Sequence-to-Sequence (S2S) model to generate accurate answers to given questions. In this paradigm, the information is stored directly in the neural network’s parameters, otherwise the neural network is part of a Retrieval-based approach. Most datasets in these contexts consist of triples of question, context, and answer pairs [Jurafsky and Martin, 2023]. Notably, widely used datasets such as SQuAD and QASPER originally emerged from the field of machine reading comprehension, representing a foundational step in the evolution of QA systems [Rajpurkar et al., 2016, Dasigi et al., 2021, Zhu et al., 2021].

In addition to the **QA Algorithms**, the **Knowledge Source** plays a pivotal role in distinguishing various aspects of Question Answering (QA) systems. The nature of the knowledge source can range from structured to unstructured or semi-structured, and it may encompass diverse data modalities, including text, audio, and video. A common point of comparison in the QA landscape is between closed and open-domain systems.

In the broad sense, a **closed-domain** QA system operates within the confines of a specific knowledge domain, which means it has limited access to information. In contrast, **open-domain** QA systems grapple with an extensive array of knowledge sources, necessitating a more versatile approach [Farea et al., 2022].

Furthermore, a closed-domain setup often entails limitations on the types of questions it can handle, primarily focusing on factoid questions or predefined templates. Additionally, it frequently relies on structured knowledge bases like graphs or logically organized repositories [Hao et al., 2022].

Conversely, open-domain QA systems are designed to tackle a wide spectrum of user queries, ranging from factoids to more complex inquiries. They typically deal with unstructured knowledge sources, which can be substantial and diverse in content [Zhu et al., 2021, Farea et al., 2022, Jurafsky and Martin, 2023].

An alternative perspective for distinguishing QA-Systems lies in the **Question Types** that users can input into the system. Questions can fall into various categories, such as *factoid*, *list*, *casual*, *confirmation*, *hypothetical* [Mishra and Jain, 2016], or *complex* [Etezadi and Shamsfard, 2023].

- *Factoid questions*, the most common type, are typically signaled by question words (what, when, which, who, how) and yield a concise factual answer.

2 Background and Related Work

- *List questions* represent a specialized subset of factoid questions, where the answer comprises a list of facts.
- *Casual questions* encompass inquiries that deviate from the factoid format, often involving words like *how* or *why* and requiring more advanced reasoning.
- *Confirmation questions* seek simple yes or no responses, frequently employed in personal assistant applications.
- *Hypothetical questions* delve into hypothetical scenarios (e.g., "what would happen if"), aiming for plausible rather than definitive answers.
- *Complex questions* can be further categorized into *answer-retrieval-complex* and *question-understanding-complex*. In the case of question-understanding-complex questions, the complexity arises from nuances like multiple constraints, making the question itself intricate to comprehend. In contrast, answer-retrieval-complex questions involve complexities in finding the correct answer, often requiring the combination of information from multiple documents or similar sources. This is commonly referred to as long-form QA.

Lastly, a QA-System can be characterized by the **Answer Types** it offers, a concept closely intertwined with Question Types. Farea et al. [Farea et al., 2022] delineate three categories of answers: *extractive*, *abstractive*, *boolean* and *reactive*.

- *Extractive answers* represent the most common type, where the answer is a specific factual excerpt presented as a span of tokens.
- *Abstractive answers* typically correspond to complex questions that necessitate the system to consider multiple documents and information sources to formulate a response. In such cases, no predefined or annotated answer exists.
- *Boolean answers* are typically the result of confirmation questions, where the answer is either *yes* or *no*.
- *Reactive answers* often arise in response to confirmation questions and can be a system-generated reaction based on the user’s provided answer.

2.1.2 Information Retrieval Architectures

As stated in the previous section (Section 2.1.1), there are three major paradigms in QA: Information Retrieval (IR)-based QA, Knowledge Base (KB)-based QA, and Generative

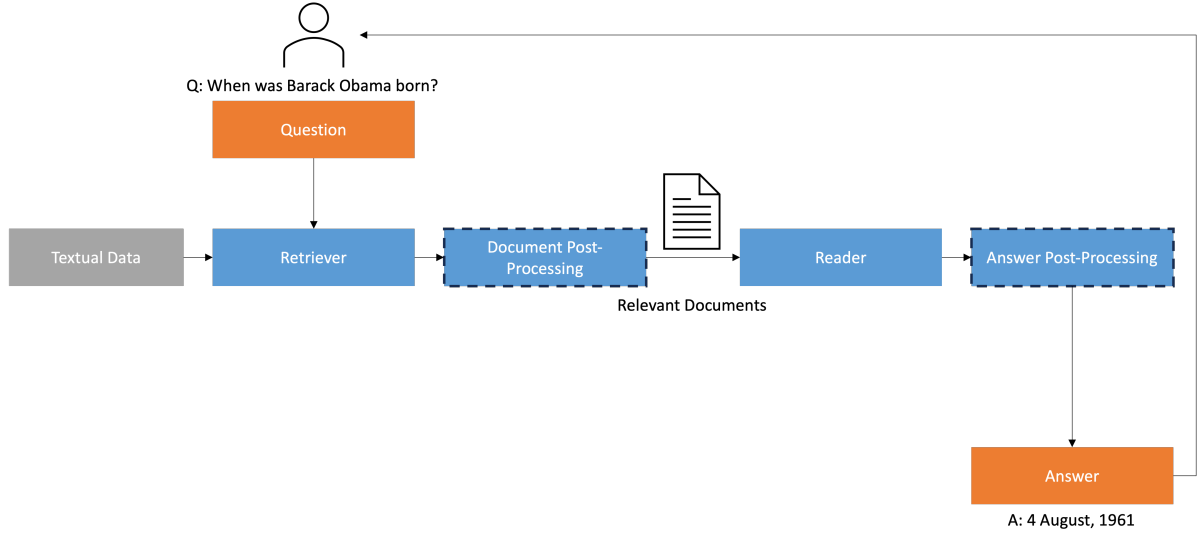


Figure 2.2: Reader-Retriever-System Architecture for QA by Zhu et al. [Zhu et al., 2021]. The dashed lines indicate optional modules.

QA. This section will primarily concentrate on the first paradigm, IR-based QA, as it holds the most promise for addressing the objectives of this thesis topic.

This thesis will not focus on KB QA, as this approach requires the mapping of the query to a structured data representation. As the task of this thesis is to develop a general system, which is adaptable to different data inputs, KB QA will be excluded [Dimitrakakis et al., 2020].

Generative QA is often denoted as *Retriever-free* or *Neural-based* approaches. The central characteristic of this paradigm is that knowledge resides within the parameters of a neural network. Consequently, the knowledge is implicit, and the QA system will not furnish a specific document, passage, or other source from which it extracted the information. Instead, it offers a textual excerpt. While these systems can achieve competitive performance compared to IR-based QA systems, they are not under consideration for this thesis due to their lack of reference, which is a crucial requirement for the system to be developed [Roberts et al., 2020].

Figure 2.2 depicts the general architecture of a **Retriever-Reader-System**, as defined by Zhu et al. [Zhu et al., 2021]. This architecture serves as the foundational framework for IR-Based QA systems and was initially introduced by Harabagiu et al. [Harabagiu et al., 2003]. In this framework, all modules operate independently, can be trained separately, and are subject to independent evaluation.

The **Retriever** module’s primary role is to retrieve relevant documents, passages, or other pertinent information from a knowledge source and rank them based on their relevance to answering the user’s query. Subsequently, the **Reader** module extracts the

answer from the retrieved documents and presents it to the user. This task bears a close resemblance to Machine Reading Comprehension (MRC), with the key distinction that in IR-Based QA, the system must handle multiple documents and comprehend them to formulate a response, unlike classical MRC tasks, which typically involve only one context document.

The **Document Post-Processor** module’s role is to curate and refine the set of documents that will be forwarded as "Relevant Documents" to the subsequent stage, the Reader. Concurrently, the **Answer Post-Processor** assists the Reader in addressing complex questions for which the answer may not be found in a single document alone [Zhu et al., 2021, Jurafsky and Martin, 2023].

It’s worth noting that some researchers include a **Question Analysis** module preceding the Retriever, which aims to preprocess the received question for more efficient query execution in the Retriever [Nassiri and Akhloufi, 2023]. However, for the purposes of this thesis, we adhere to Zhu et al.’s definition [Zhu et al., 2021], where this functionality is considered part of the Retriever.

Conceptually, there are three distinct approaches to the Retriever itself: *Sparse Retrieval*, *Dense Retrieval*, and *Iterative Retrieval*. The specifics of these approaches will be thoroughly explored in Section 2.1.4.

Document Post-Processors can be categorized into *Supervised Learning*, *Reinforcement Learning*, and *Transfer Learning*-based approaches. A detailed discussion of these approaches is also provided in Section 2.1.4.

In Section 2.1.5, we will delve into the finer details of Reader approaches and Answer Post-processing. Broadly speaking, there are two primary types of Readers: *Extractive* and *Generative* Readers. As for Answer Post-processing, it involves two key categories: *Rule-based* and *Learning-based* approaches.

There are also **End-to-End** approaches that employ a single module to execute the entire QA task. Excluding generative approaches, two common categories of such approaches are **Retriever-Reader** and **Retriever-only** models.

An End-to-End Retriever-Reader aims to train both the Retriever and Reader in a single backpropagation step, and in some cases, it introduces additional knowledge sources beyond the traditional IR framework. An illustrative example is Retrieval-Augmented Generation (RAG) [Lewis et al., 2021]. RAG consists of a pre-trained Generator with implicit knowledge encoded in its parameters and a pre-trained Retriever. For each question, the Retriever identifies the most relevant documents and generates a latent vector based on them. This latent vector, along with the original question, is fed into the Generator.

Another end-to-end approach, similar to RAG, is Retrieval-Augmented Language

Model pre-training (REALM) [Guu et al., 2020]. While these previous two approaches extended the capabilities of pre-trained Sequence-to-Sequence (seq-2-seq) models, Nishida et al. pursued a different path by training a single Neural Network (NN) to perform both tasks simultaneously: IR and MRC [Nishida et al., 2018].

It is noteworthy that all these end-to-end approaches have demonstrated competitive performance compared to state-of-the-art methods on specific QA datasets.

An essential yet often underestimated question is: What defines textual data, and how should one preprocess formats such as PDFs to extract this textual content? While many datasets already comprise small contextual snippets [Wang, 2022], it’s crucial not to overlook the entire process of extracting snippets from unstructured PDFs, for example. Approaches to tackle this challenge will be explored in detail in the upcoming Section 2.1.3.

2.1.3 Extraction Approaches

As discussed in the previous Section 2.1.1, the knowledge source for a QA-System can take the form of textual or multimodal data. The specific type of data may necessitate certain requirements or specific adjustments to the Retriever used for IR.

In the context of this thesis, the primary knowledge source to be employed is PDF documents. In the research field, three major approaches exist for extracting textual information from unstructured data types like PDFs: *visual* [Tito et al., 2021], *direct* [Wang et al., 2019], and *alternative* [Dasigi et al., 2021] extraction methods.

It’s important to note upfront that the chosen extraction method is intricately connected to the subsequent retrieval approach. The specifics, including metadata alongside pure textual data and quality requirements, may vary among different extraction and retrieval methods.

The visual approach is closely aligned with the research field of *Document Question Answering*. A well-known example dataset in this field is Document Visual Question Answering (DocVQA) [Tito et al., 2021]. The primary concept behind the visual approach to document question answering is to capture not only the text of a PDF but also additional information such as the document’s structure, various hierarchies on a page (e.g., sections, subsections), and the ability to analyze tables and figures. These hierarchical structures can be leveraged to create two-stage retrieval approaches. In these approaches, initially, a collection of relevant files is identified based on higher-level attributes like the document’s title and abstract. Subsequently, a more granular retrieval process is executed over lower-level attributes such as passages within the relevant files. These *Iterative Retrievers* will be further discussed in Section 2.1.4 [Liu et al., 2021b].

The challenge of *Visual Document Question Answering* typically involves taking images of PDF pages as inputs and mapping question-answer pairs to them. The answers are extracted from either a single paragraph or a combination of multiple paragraphs [Mathew et al., 2021]. Nonetheless, the extraction pipeline in this case usually resembles the *Retriever-Reader* architecture, where the extracted information from the visual processing is fed into such a system afterward. Researchers in this field often employ a pipeline that includes a *Document Layout Analysis* model, followed by the application of an Optical Character Recognition (OCR) tool to the detected regions [McDonald et al., 2022]. Examples of a *Document Layout Analysis* model include the Document Image Transformer by Li et al. [Li et al., 2022].

The direct approach is the most prevalent method in the field of Question Answering (QA) and Information Retrieval (IR). The primary concept behind this approach is to extract textual information from PDFs and store it in a database. The extraction process can be accomplished using various tools such as *PDFMiner* or *Adobe Extract* [Meuschke et al., 2023]. However, a lingering question is how to effectively split the extracted textual data, especially considering that they are often not cleaned after extraction.

A common practice when employing a Language Model (LLM) is to optionally cleanse the text corpus and then divide it based on a predefined token size. This approach is evident in two notable open-source LLM projects: *Langchain* and the *Retrieval Plugin for ChatGPT* by OpenAI [Langchain, 2023, OpenAI, 2023]. In the original Dense Retrieval paper by Karpukhin et al., a sliding window of token size 5 was utilized [Karpukhin et al., 2020]. Therefore, it can be assumed that for contemporary LLM applications, the precise quality of the data, ensuring that a document contains syntactically correct sentences, may not be as critical.

Apart from modern approaches involving text clipping, previous methods aimed to identify paragraphs and similar structures within the extracted texts [Zhu et al., 2021].

An alternative approach involves the methodology employed in constructing the QASPER dataset. In this case, the authors conducted a pre-filtering of scientific papers’ PDFs, selecting only those with freely accessible LaTeX files. They then utilized the S2ORC tool to extract cleaned textual data from these LaTeX files [Dasigi et al., 2021]. It’s important to note that this approach is highly specific to the QASPER dataset and cannot be universally applied. Nonetheless, it serves as an illustration of alternative methods for extracting textual data from PDFs.

2.1.4 Retrieval Approaches

The traditional state-of-the-art in IR relies on **Sparse Retrievers**, with one notable example being BM25. BM25 is renowned as "one of the most empirically successful retrieval models and is widely used in current search engines" [Zhu et al., 2021]. Nandan et al. even demonstrated that on modern Open-Domain Question Answering (ODQA) datasets, BM25 remains a viable baseline for zero-shot IR [Thakur et al., 2021].

BM25 was originally introduced by Robertson et al. [Robertson and Zaragoza, 2009]. It operates by utilizing the TF-IDF token weights between a question q containing tokens q_1, \dots, q_T and a set of passages P , where $p \in P$.

$$\mathbf{s}_{q,p}^{\text{BM25}} = \sum_{i=1}^T \log \left(\frac{|\mathcal{P}|}{N(q_i, \mathcal{P})} \right) \frac{n(q_i, p) (k_1 + 1)}{k_1 \left(1 - b + \frac{b|p|}{\text{avpl}} \right) + n(q_i, p)} \quad (2.1)$$

Equation 2.1 illustrates the BM25 score for a question q and a passage p . In this equation, $N(q_i, \mathcal{P})$ represents the count of passages in \mathcal{P} that contain the token q_i , while $n(q_i, p)$ indicates the frequency of token q_i within the passage p . The variable $|p|$ signifies the length of passage p , and avpl stands for the average passage length in \mathcal{P} . The parameters k_1 and b are free parameters, typically set to $k_1 = 0.9$ and $b = 0.4$ [McDonald et al., 2022, Robertson and Zaragoza, 2009].

Traditionally, this lexical Information Retrieval (IR) approach has been capable of providing satisfactory retrieval results. However, in 2020, Karpukhin et al. demonstrated for the first time that a **Dense Retrieval** approach could outperform the Sparse Retrieval approach across multiple ODQA datasets [Karpukhin et al., 2020]. Consequently, the search for a general Dense Retrieval model has been ongoing, as these Dense Retrieval approaches offer advantages such as semantic matching and the ability to handle lengthy documents [Zhu et al., 2021].

In general, there are three types of Dense Retrieval approaches [Zhu et al., 2021]: the **Representation-based Retriever**, often referred to as the *dual-encoder* [Karpukhin et al., 2020]; the **Interaction-based Retriever**, often referred to as the *cross-encoder*; and the **Representation-interaction Retriever**, often referred to as the *multi-stop retriever*. Figure 2.3 illustrates the general architecture of these three types of Dense Retrievers.

The **Dense Passage Retriever (DPR)** by Karpukhin et al. serves as a notable example to explain the **Representation-Based Retriever**. Given a collection M of text passages p and a question q , the objective of DPR is to identify the k most similar passages to the question. To achieve this, DPR employs two distinct **BERT** [Devlin et al., 2019] Encoders. One Encoder, denoted as $E_Q(\cdot)$, encodes the question q into a d -dimensional vector, where $d = 768$. The other Encoder, labeled as $E_P(\cdot)$,

2 Background and Related Work

encodes the passage p into a d -dimensional vector at the [CLS] token. The similarity between these two vectors is computed using the inner product:

$$\mathbf{s}_{q,p}^{DPR} = \mathbf{E}_Q(q)^\top \mathbf{E}_P(p) \quad (2.2)$$

The choice of the inner product as the similarity function is motivated by its computational efficiency and the demonstrated, comparable performance [Karpukhin et al., 2020]. It is crucial for the dot-product to yield a small value for pairs of questions and passages that are genuinely related. The training dataset D comprises m instances, where q_i represents the question, p_i^+ denotes the positive passage, and $p_{i,n-}$ represents the negative passage:

$$\mathbf{D} = \left\{ (q_i, p_i^+, p_{i,1}^-, \dots, p_{i,n}^-) \right\}_{i=1}^m \quad (2.3)$$

The loss function is optimized using the negative log likelihood of p_i^+ :

$$\mathcal{L}_{DPR} = -\log \frac{\exp(\mathbf{s}_{q_i, p_i^+}^{DPR})}{\exp(\mathbf{s}_{q_i, p_i^+}^{DPR}) + \sum_{j=1}^n \exp(\mathbf{s}_{q_i, p_{i,j}^-}^{DPR})} \quad (2.4)$$

It’s important to note that in [Karpukhin et al., 2020], the selection of negative passages was not arbitrary. Instead, two additional approaches were employed: BM25 top passages that do not contain the answer and positive passages paired with other questions.

One significant advantage of the Representation-Based Retriever is that passages can be pre-indexed locally rather than at runtime. This reduction in latency between the question and the response may, however, come with trade-offs in the quality of the retrieved passages.

The **Interaction-Based Retriever** incorporates both the question q and the passage p within a single model, separated by a [SEP] indicator. These models offer various approaches for modeling the relationship between q and p . For instance, one common method is to utilize the [CLS] classifier as an indicator of whether the passage is relevant to the question. This approach was first introduced with Bidirectional Encoder Representations from Transformers (BERT) [Devlin et al., 2019]. While these models perform competitively with previous Representation-Based Retrievers, it’s important to note that they are 100-1000 times more computationally expensive [Khattab and Zaharia, 2020].

To address this latency issue, models like ColBERT introduced the concept of **contextualized late interaction** [Khattab and Zaharia, 2020]. In this thesis and subsequently in research, it is referred to as the **Representation-Interaction Retriever** [Zhu et al., 2021].

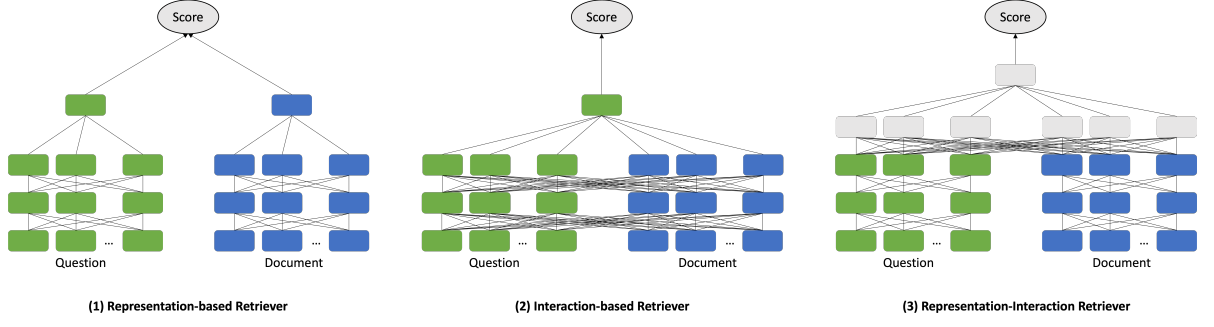


Figure 2.3: Types of Dense Retriever by Zhu et. al. [Zhu et al., 2021].

ColBERT, like Dense Passage Retrieval (DPR), employs two BERT Encoders, denoted as $E_Q(\cdot)$ and $E_P(\cdot)$. However, it introduces a late interaction mechanism. When provided with a query q , it is initially tokenized into BERT-based Wordpiece tokens, resulting in q_1, \dots, q_T . Following the [CLS] token, a [Q] token is appended to signify the question. If the length of the tokenized question is less than N_q , a predetermined token length, the remaining portion of the question is padded with BERT’s [mask] token. Otherwise, it is truncated. This process, known as *query augmentation*, allows BERT to re-weight existing terms or expand the query, and it is pivotal to ColBERT’s performance. The generated embeddings are then passed through a linear layer to reduce the output dimensions to a fixed size m , which is smaller than the original dimensions of BERT. The output is subsequently normalized to ensure that the L2 norm of each result equals one.

For each passage p , $E_P(\cdot)$ is employed for encoding. Similar to the question encoding process, p is segmented into its p_1, \dots, p_{T_d} Wordpiece tokens. The special token [D] indicates a passage. Short passages are not padded with a [mask] token. After the classical BERT output, a similar post-processing step is applied to the encoded passages, and all embeddings corresponding to punctuation are filtered out.

$$\mathbf{E}_q := \text{Normalize}(\text{CNN}(\text{BERT}("[Q]q_0q_1 \dots q_T[\text{mask}] \dots [\text{mask}]"))) \quad (2.5)$$

$$\mathbf{E}_p := \text{Filter}(\text{Normalize}(\text{CNN}(\text{BERT}("[D]p_0p_1 \dots p_{T_d}"))))) \quad (2.6)$$

The late interaction mechanism applied to the encodings involves computing the maximum similarity, which utilizes cosine similarity through dot-products. This is made possible by the earlier normalization applied to the embeddings:

$$\mathbf{s}_{q,p}^{\text{ColBERT}} = \sum_{I \in [|\mathbf{E}_q|]} \max_{j \in [|\mathbf{E}_d|]} \mathbf{E}_{q,i} \cdot \mathbf{E}_{p,j}^\top \quad (2.7)$$

The interaction mechanism has no trainable parameters. ColBERT is differentiable end-to-end. During training, for example, with a triple (q, p^+, p^-) , ColBERT independently produces a score for each passage and is subsequently optimized pairwise using softmax cross-entropy loss over the scores of p^+ and p^- [Khattab and Zaharia, 2020].

Another type of Retriever is the **Iterative Retriever**. Iterative Retrievers are necessary when dealing with questions that are more complex than simple factoid questions, which can be answered by identifying the right passage in the knowledge source. An example is the HotpotQA dataset [Yang et al., 2018], designed specifically for multi-hop questions. The fundamental concept here is that such questions cannot be answered with just one precise piece of evidence. They require multiple passages from different documents at the very least. Iterative Retrievers encompass three stages in the pipeline: (1) document retrieval, (2) query reformulation, and (3) retrieval stopping.

An example is BEAM, currently holding the title of the highest-performing¹, QA-System across multi-hop QA datasets such as HotpotQA [Zhang et al., 2023a]. The document retrieval component can take the form of any retrieval model, including options like ColBERT, BM25, or DPR. In the case of BEAM, it leverages an Interaction-Based Retriever using DeBERTa. For each candidate passage p_c , BEAM calculates a relevance score concerning this passage within the context of all previously identified relevant passages p_r and the question q , using the embeddings of the [CLS] tokens [He et al., 2020]. The second step, query reformulation, can be executed explicitly or implicitly, meaning it can either be expressed in natural language or as a dense embedding. The advantage of using natural language lies in its interpretability, while employing dense embeddings operates within a semantic space and does not lack vocabulary interpretability [Zhu et al., 2021]. BEAM adopts a natural language-based approach. Specifically, after each hop, it appends the newly identified passage to the previously identified ones and feeds this information into DeBERTa.

$$s_{q,p}^{BEAM} = \text{Classifier}(\text{DeBERTa}("[CLS]q p_{r_1} \dots p_{r_i}")) \quad | \quad p_c \in P \quad (2.8)$$

The nature of query reformulation depends on the type of retriever in use. Lastly retrieval stopping poses its own set of challenges. A common approach involves setting either a fixed number of hops or a maximum limit on the retrieved documents. Alternatively, some methods introduce a new token, such as [EOE] (End-of-Evidence), to signal the end of retrieval [Zhu et al., 2021]. BEAM, for example, employs a fixed number of hops, specifically 2, as determined through empirical evaluation.

¹Status as of September 23, 2023, according to <https://paperswithcode.com> and the authors of [Zhang et al., 2023a]

The task of **Document Post-Processing** is to reduce the number of passages forwarded to the Reader, aiming to eliminate irrelevant ones. Traditional Retrievers, like Sparse Retrievers, often required a Document Post-Processor. However, Dense Retrievers often incorporate ranking and retrieval simultaneously, rendering this module unnecessary [Zhu et al., 2021]. Nevertheless, it remains possible to construct multi-stage Retrievers to, for instance, increase latency. This can be achieved by using a simpler Dense Retriever for pre-filtering passages and subsequently applying a more accurate one [Liu et al., 2021b].

2.1.5 Reader Approaches

Readers originally emerged from the field of MRC, where the objective is to extract an answer from a given context. A well-known example is the SQuAD [Rajpurkar et al., 2016] dataset, which was mentioned in Section 2.1.1. However, unlike the original MRC task, a Reader in a Retrieval-Reader-System must process multiple passages to determine the relevant information needed to answer a given question [Zhu et al., 2021].

Modern readers rely on Transformer-based Pre-trained Language Model (PrLM)s since they establish new baselines on well-known datasets [Luo et al., 2022]. In general, there are two types of Readers that use PrLMs: **Extractive Readers** and **Generative Readers** [Jurafsky and Martin, 2023, Zhu et al., 2021, Luo et al., 2022].

In general, an **Extractive Reader** employs an encoder to identify the token sequence span that is relevant for answering a question. These encoders can be any autoencoder models, such as BERT [Devlin et al., 2019], DeBERTa [He et al., 2020], or RoBERTa [Liu et al., 2019]. Luo et al. [Luo et al., 2022] even utilized the encoder components of established encoder-decoder models like T5 [Raffel et al., 2023] and BART [Lewis et al., 2019]. They demonstrated that, after fine-tuning, these models can outperform encoder-only models on certain tasks.

Figure 2.4 illustrates the span labeling process performed by the extractive reader. The question tokens q_1, \dots, q_n and the passage tokens p_1, \dots, p_m are input into the encoder, separated by a [SEP] token. The encoder learns two new embeddings, S and E , which represent span-start and -end tokens, respectively. To obtain the span start probability for an output token p'_i , the dot product between the output token and S is computed and then normalized by a softmax function over all output tokens. The process is similar for the span-end token. The score of a span from position i to j is calculated as $S * p'_i + E * p'_j$. The span with the highest score, where $j \geq i$, is selected as the answer span. If the total length of tokens in q and p exceeds the maximum input length of the encoder, the passage is split into multiple segments, and the process is

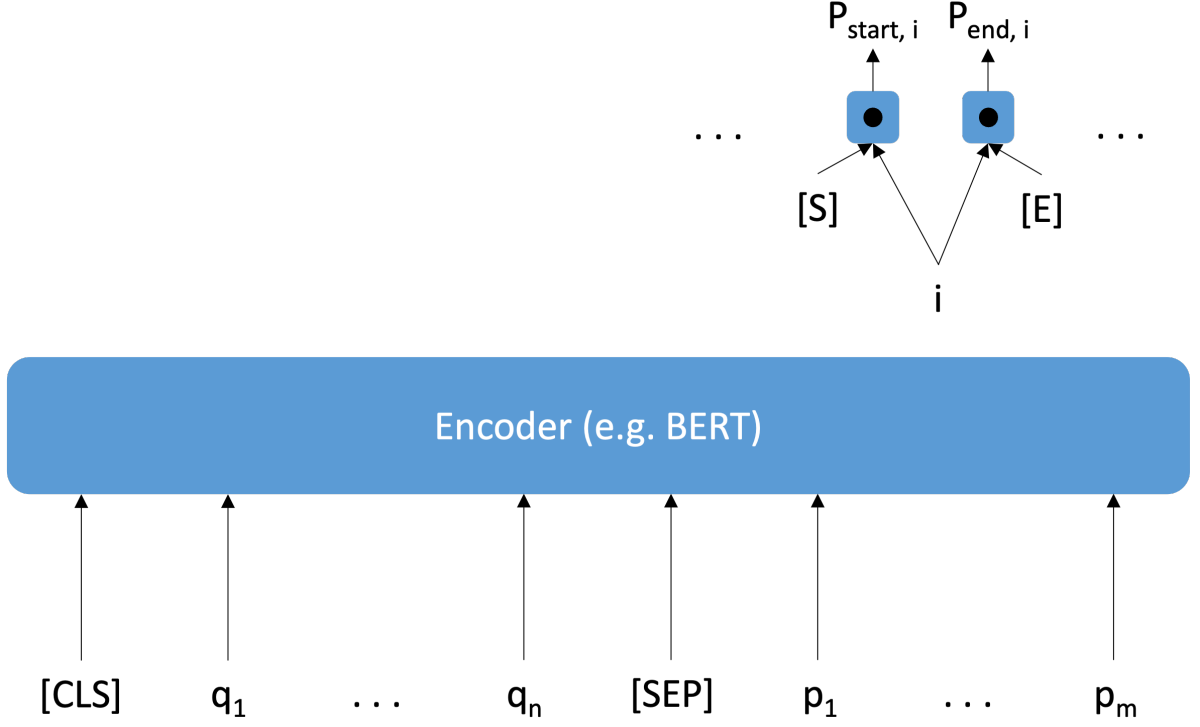


Figure 2.4: Adjusted Graphic of the Extractive Reader by Jurafsky et al. [Jurafsky and Martin, 2023]

repeated for each segment [Jurafsky and Martin, 2023, Luo et al., 2022].

The **Generative Reader** operates straightforwardly when familiar with a seq-2-seq encoder-decoder model. Given a dataset containing (q, p, a) tuples, the encoder takes q and p as input and outputs the contextual representation h . Then, it is the decoder’s task to generate a token sequence based on h and attention. The training objective can be described as minimizing the following loss function:

$$\mathcal{L}_{\text{Gen}} = \sum_{i=1}^K \log \mathbf{P}(\mathbf{a}_i | \mathbf{h}, \mathbf{a}_{:i}) \quad (2.9)$$

Here, K represents the length of tokens in a , a_i is the i^{th} token in a , and a_0 is a special beginning of sequence token. In cases where the answer is not contained within the passages, the [CLS] token indicates this situation [Luo et al., 2022, Zhu et al., 2021].

Latest research projects like Visconde [Pereira et al., 2022] even employ LLM as Generative Readers. The performance and usability of these models remain active topics of research.

Luo et al. conducted the first survey comparing state-of-the-art Extractive and Generative Readers [Luo et al., 2022]. They discovered that “on average, extractive readers

perform better than generative ones” [Luo et al., 2022], except in cases involving long context passages, where generative approaches outperform the extractive ones.

The **Answer Post-Processor** is similar to the Document Post-Processor, serving as an optional component. Its primary task is to provide support for multi-hop complex questions, helping determine the final answer from a set of answers extracted by the reader component [Zhu et al., 2021]. Depending on the implementation of the Reader, this component may become obsolete.

2.1.6 Limitations

The evaluation metrics for IR systems will be discussed in detail in Section 4. In general, selecting the components and models for an IR system always involves a trade-off between accuracy, memory consumption, and inference speed [Zhang et al., 2023b].

Accuracy is primarily determined by the chosen Retriever-Reader-System. Sparse retrievers often lack a certain degree of semantic understanding, resulting in less accurate retrieved passages. In contrast, Dense Retrievers can achieve higher levels of accuracy but require thorough evaluation and training for the desired use case. Thakur et al. demonstrated that high-accuracy Dense Retrievers like DPR can underperform in zero-shot scenarios compared to BM25 by -47.7% [Thakur et al., 2021]. This highlights another crucial limitation of all NN-based retrievers and readers: training. BM25 is, by nature, an unsupervised model for IR, while common approaches for Dense Retrieval usually belong to the group of supervised models. These models heavily depend on their training data, whereas a Sparse Retriever like BM25 can be used without any training. According to experiments conducted by Thakur et al. [Thakur et al., 2021], the best-performing out-of-distribution Retrievers are Representation-Interaction Retrievers like ColBERT.

Constructing a training dataset for a QA task can be a tedious process, as these datasets must consist of tuples in the form of (question, context, answer), which is not always feasible. One established research direction to address this issue is Automatic Question Generation (QG) [Serban et al., 2016]. In QG, a seq-2-seq model is employed to generate questions and answers based on a given passage.

Zhang et al. provide an example of DPR applied to the Natural Questions dataset in their survey on efficient ODQA [Zhang et al., 2023b]. The total processing time for a query is 0.91 seconds². This time is divided into 74.79% for evidence search and 23.95% for reading. The total memory cost is 79.32GB, with the index occupying 81.95%, the

²It’s important to mention that DPR is a Representation-based Retriever, which allows offline storage of passage embeddings. The result was obtained using an Nvidia GeForce Rtx 2080 Ti GPU, averaged over 1000 examples

raw corpus 16.39%, and the model 1.66%. Approaches to optimize this may include:

1. Reducing Processing Time: (1) Accelerating Evidence Search, (2) Accelerating Reading
2. Reducing Memory Cost: (1) Reducing Index Size, (2) Reducing Corpus Size, (3) Reducing Model Size
3. One-stage Frameworks: (1) Directly Generating Answers, (2) Directly Retrieving Answers

Techniques used in this context may include:

1. Data-based: (1) Passage Filtering, (2) Dimension Reduction, (3) Product Quantization
2. Model-based: (1) Model Pruning, (2) Knowledge Distillation, (3) Knowledge Source

A common technique, which is used in nearly every experimental setup for QA-Systems, is FAISS[Johnson et al., 2017], a GPU optimized implementation of the exact k -means clustering algorithm.

For a detailed overview of approaches towards more efficient ODQA systems, please refer to the comprehensive survey by Zhang et al. [Zhang et al., 2023b].

2.2 Conversational Question Answering

The differentiation of Conv QA towards QA will be discussed in Section 2.2.1. This Section also introduces the fundamental concepts of Conv QA which are necessary to understand challenges and necessary components compared to a regular QA-System. Section 2.2.2 will cover approaches towards the concept of query expansion. Section 2.2.3 will clampse on the concept of initiative and further approaches towards a Conversation Manager. Lastly Section 2.2.4 will cover the usability of LLMs and especially the concept of Chain of Thoughts for Conv QA.

2.2.1 Basics

Core concepts in the field of Open-Domain Conversational Question Answering (OD-CQA) towards a conversation in terms of Conv QA are: *Turns*, *Hisotry*, *Memory*, *Session* and *Dialog Features* and *Dialog State* [Zamani et al., 2023]. It’s important to mention,

that in other subdomains/-tasks of CIS more concepts are introduced, such as *State*, those are not necessary or applicable for ODCQA [Zaib et al., 2021].

Figure 2.5 shows the core concepts based on a chat. Firstly, a **Turn** is a question-response pair. Whereas a conversation usually consists of multiple turns (multi-turn). Conversational Question Answering (CoQA) is a dataset published in 2019 by researchers at Stanford in order to extend the known QA dataset SQuAD towards a conversational dataset, whereas on average one conversation session consists of 15 turns [Reddy et al., 2018]. Multi-turns are the main distinguisher between the in Section 2.1 introduced task, to a Conv QA task. In a multi-turn scenario natural language phenomena like *coreference* (multiple expressions refereing to the same thing) or *ellipsis* (omitting words or topics implied by the context) can occur. While in regular QA the System will only be challenged with single-turn scenarios, so only one question, which needs an answer, in Conv QA the systems have to face multi-turn scenarios, where a user might also ask followup question or in general mutiple questions aftereachother. A **Hisotry** is consequently a set of turns which belong to one conversation session. A **Session** is a in it completed conversation. Lastly, the **Memory** is the abstract entity in which the Conv QA-System stores knowledge related to a history, session or even user in general [Zamani et al., 2023, Gao et al., 2022]. This depends of the implementation of memory in the Conv QA pipeline, which will be discussed in Section 2.2.2.

Dialog Features need to be assesed extra to the other mentioned concepts. While the other concepts tackle the conversations frame, the dialog feature evaluates the user questions themself. Possible dialog features may include: *drilling-down* questions, *topic-shift*, *clarification* or *definition*. Different dialog features call for different responses by the system [Gupta et al., 2020]. The **Dialog State** has to be assesed similar. The dialog state represents the relation between turns. In cases of pre-defined domains methods like state slots are used, e.g. `Date _`, `Location _`, `Artist _` have to be filled during the conversation in order to retrieve the correct information from the KB [Rastogi et al., 2020]. Open-Domain Conv QA usually don't track the state *explicitly*, but rather track it *implicitly* via the type of implementation of the *Contextual Query Understanding* unit.

Regarding the System architecture of a Conv QA there is no one fits them all solution at the moment, but Gao et. al. [Gao et al., 2022] presented a modern system architecture, which represents commonly used appraoches and their corresponding components in a genral fashion. This general architecture can be observed in Figure 2.6. Modern Conv QA systems are closely realted to QA systems, but lag certain generalizing components in order to be full CIS systems [Zamani et al., 2023].

Similar to the retriever-reader architecture introduced in Section 2.1.2, a Conv QA

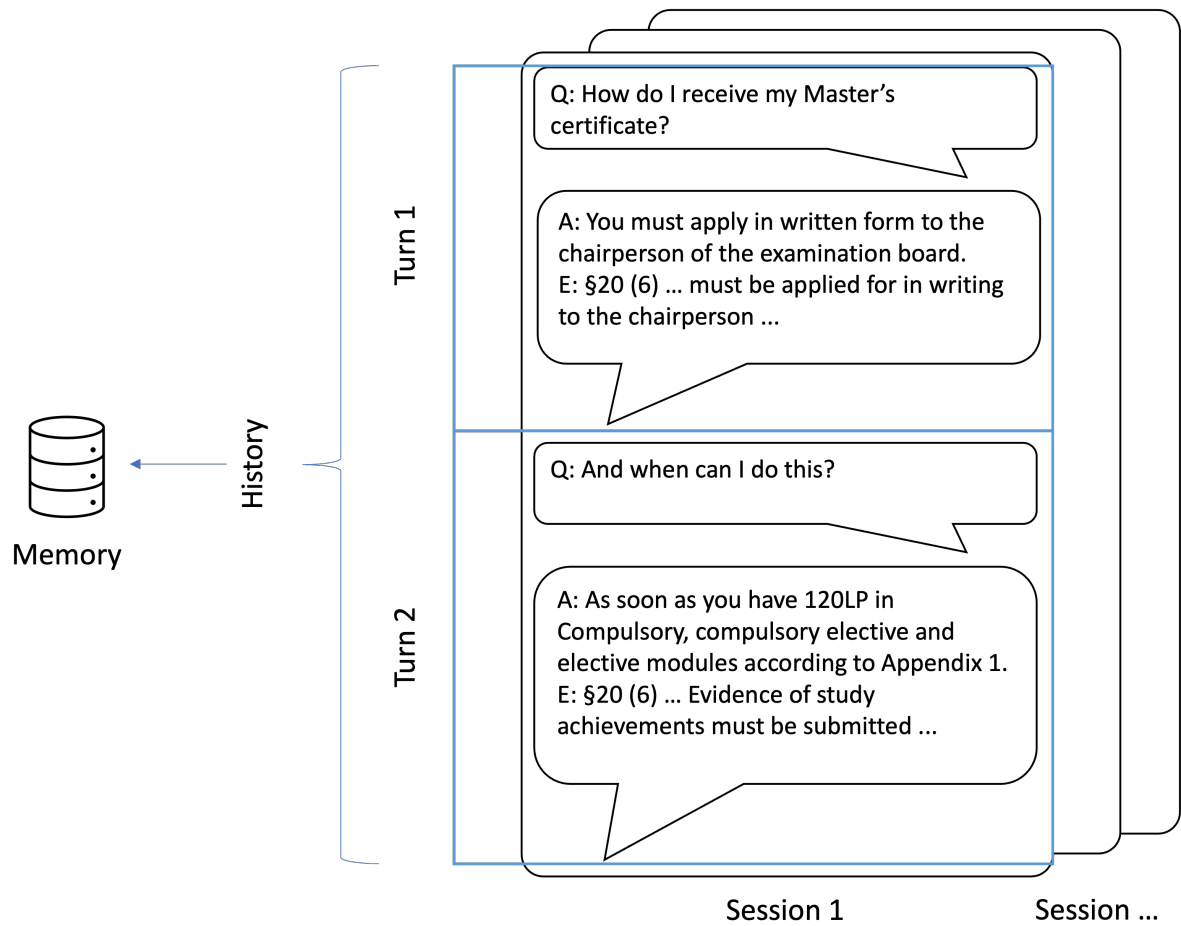


Figure 2.5: Concepts of a Conversation in regards to a CIS

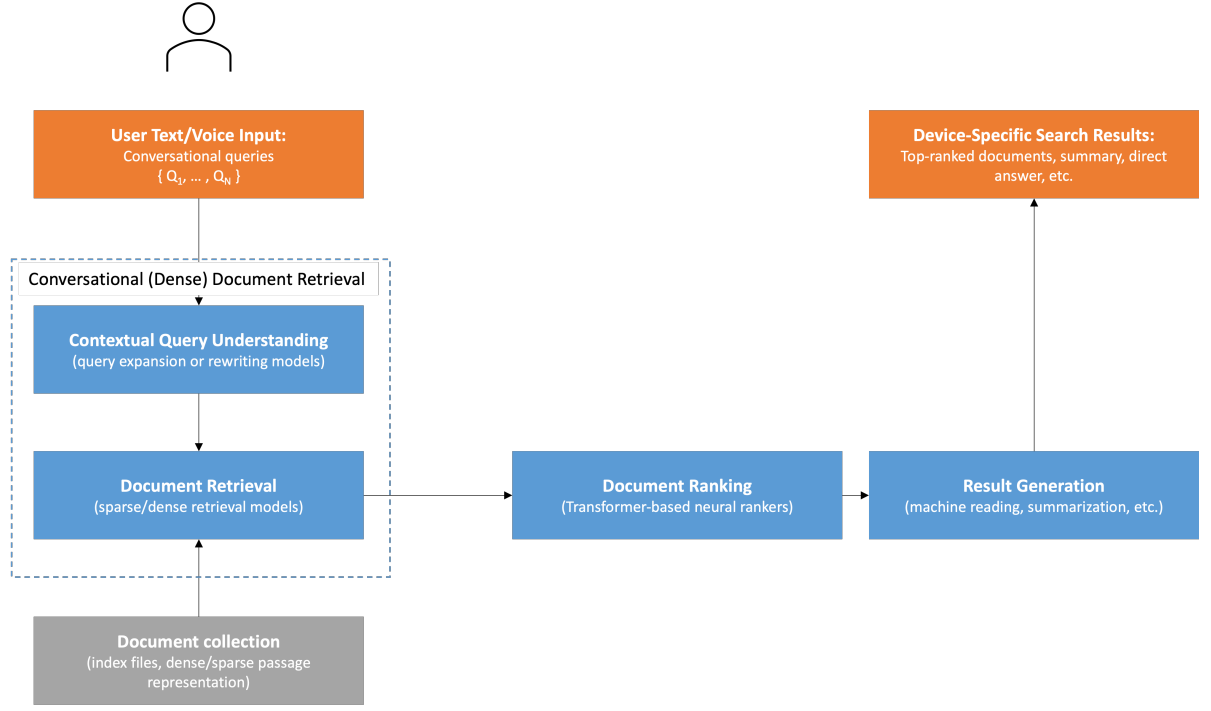


Figure 2.6: General System Architecture of a Conv QA System by Gao et. al. [Gao et al., 2022]

is made up of those two components as well, whereas in the case of a Conv QA the retrieval as also the reader component have to handle more. The retriever has to understand the context, so the history of a conversation and retrieve based on that the most relevant documents. The reader on the other hand is close related to the reader of a classic retriever-reader architecture [Zamani et al., 2023, Gao et al., 2022]. Some implementations even feed into the reader component the context in order to rank the retrieved passages better and generate a more accurate answer [Owoicho et al., 2022].

2.2.2 Contextual Query Understanding

How do we implement *Memory*? Is the core question of this Section 2.2.2.

There are two main distinguishing approaches towards history implementation. The first is a simple heuristic of using the last- k turns for **Query Expansion**, **Query Rewriting** or **Conversational Retrievers**. The second is to extract the important parts of the history in regards to a question and use them for Query Expansion or Rewriting [Gao et al., 2022].

A good example to explain the approach of the second approach towards extracting important parts of the history $H = (q_1, a_1), \dots, (q_i, a_i)$ given a new question q_{i+1} is **Query Resolution by Term Classification (QuReTeC)** [Voskarides et al., 2020]. QuReTeC

consists of two components essentially: one BERT-based model and a trainable classification layer. The H is being passed through the BERT model, whereas the following structure of concatenation is being used:

$$\text{BERT}([CLS], H, [SEP], q_{i+1}) \quad (2.10)$$

On every first sub-token of a term of the H the term classification layer is applied, which is a network consisting of a dropout layer, a linear layer and a sigmoid function. The term classification layer predicts a label between 0 – 1 indicating its importance for answering the new question q_i . This leads to a set of terms I which need to be incorporated into the retrieval [Voskarides et al., 2020]. This is generally also known as **Query Expansion**, whereas we add terms to a given query for retrieval. Next to this supervised, trained approach, there are also implementations which work unsupervised like Historical Query Expansion (HQExp) [Yang et al., 2019], which was one of the best performing models in the TREC CAsT 2019 [Dalton et al., 2020].

Modern neural approaches more often implement a **Query Rewriting** module which is built on top of seq-2-seq-models to rewrite a query q_{i+1} given a history H in order to use the generated new query for retrieval using an established QA retriever [Owoicho et al., 2022]. The main advantage of this approach is the absence of the need of large supervised datasets as for Conversational Retrievers [Dai et al., 2022a]. One of the top performing models in the TREC CAsT 2022 was HEATWAVE by a Team of the University of Cambridge England [Liusie et al., 2022]. HEATWAVE utilized a query rewriter and a classical lexical BM25 retriever in combination with a BERT-based re-ranker. The rewriter uses a T5-based Transformer model and gives as input $ctx - n - m$, where n refers to the last n -many user utterances and m to the m -many system responses. In general the task can be simply broken down to the following:

$$q_{rewritten} = \text{Rewriter}(ctx - n - m) \quad (2.11)$$

For training of this model they used the among others the canard dataset [Elgohary et al., 2019] a manually annotated version of the QuAC dataset, specifically for the task of query rewriting given a conversation history H .

State-of-the-art research utilizes more and more LLM for the task of Query Rewriting, as they can handle long context histories H and are in general strong zero- or few-shot models [Mao et al., 2023]. This is also the main approach frameworks like *Langchain* [Langchain, 2023] or *ChatGPT by OpenAI* [OpenAI, 2023] use.

Lastly the approach of **Conversational Retrievers** exists. Those use compared to classical QA retrievers not a pair of (q, p) in order to calculate a similarity $\text{sim}(q, p)$

between the question q and the passage p , but use Conv QA datapoints from conversational interactions like $(q_1, a_1, \dots, q_i, a_i, q_{i+1}, p)$, in short (H, q_{i+1}, p) , so combining a conversation history H with a new question q_{i+1} and the relevant passage p to answer this question given the history H [Gao et al., 2022, Dai et al., 2022a]. High performing zero-shot or subdomain-adapted Conversational Retrievers do not exist, as it is extremely time consuming to create a dataset for this type of Retriever. To close this gap in researchers proposed sufficient data augmentation techniques to generate those datasets, given a document. One example is the work of Dai et. al. [Dai et al., 2022a] which introduced the technique of “Dialog Inpainting” [Dai et al., 2022a].

2.2.3 Initiative

All modern human-computer interactions follow a one-sided initiative model, where either the user- or the system-initiative is given. In mixed-initiative scenarios of Conv QA the system can take initiative without explicit commands of the user. Examples for initiative are: *Topic Shifts*, *Clarification Questions* or *Question Recommendations* [Zamani et al., 2023]. In this thesis we will focus on *Clarification Questions* only.

2.2.4 Large Language Model based Agents / Chain of Thought ???

2.3 Efficient Large Language Models

With the increasing size of large language models (LLM), **Large Language Models with Adapters** (Llama) 2 offers models ranging from 7 billion to 70 billion parameters [Touvron et al., 2023]. Even these models are considered relatively small compared to the largest models like PaLM 2 [Anil et al., 2023] with 340 billion parameters. The challenge arises when running such models in scenarios with limited computational resources, especially on smaller domains or tasks. This challenge is particularly relevant to the task presented in this thesis, which involves building a Conv QA system for a custom set of PDFs.

While several surveys [Ling et al., 2023, Zhao et al., 2023] have explored the topic of efficient LLM usage in resource-constrained systems, Treviso et al. [Treviso et al., 2023] present the most comprehensive taxonomy of methods and approaches in this context. Figure 2.7 provides a high-level overview of the stages at which efficiency-improving methods can be implemented in LLMs. Given the specific focus of this thesis, not all stages will be discussed in detail. For more comprehensive insights, please refer to the

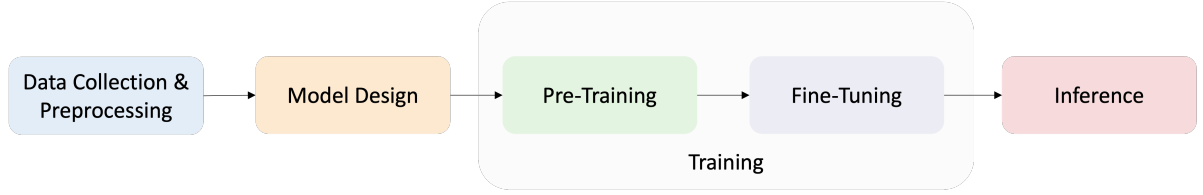


Figure 2.7: Adapted Stages of Efficiency Improvement for LLM by Treviso et al. [Treviso et al., 2023]

original survey by Treviso et al. [Treviso et al., 2023].

Section 2.3.1 will explore possibilities to enhance efficiency during the fine-tuning process, while Section 2.3.2 will delve into the topic of model compression, which is applicable to the *Inference* step in Figure 2.7.

2.3.1 Fine-Tuning

Hu et al. [Hu et al., 2021] demonstrated the significant benefits of fine-tuning GPT-3 for few-shot applications, highlighting the remarkable improvements it can achieve. This is further supported by the experiments conducted by Chung et al. [Chung et al., 2022].

Efficient fine-tuning of LLMs can be categorized into three distinct approaches: *Parameter Efficiency*, *Multi-task Learning*, and *Prompting*. Figure 2.8 provides an overview of these approaches along with their corresponding methods.

Parameter Efficiency is commonly referred to as **Parameter-efficient Fine-tuning (PEFT)** [Huggingface, 2023]. A notable PEFT approach is LoRa, developed by Hu et al. [Hu et al., 2021]. LoRa falls under the category of Adapters, a term coined because it revolves around the concept of freezing the parameters of the LLM and fine-tuning only a small set of task-specific parameters, which can be swapped depending on the desired downstream task. Unlike some other Adapter-based methods [Houlsby et al., 2019], LoRa does not introduce additional inference latency due to the merging of trainable matrices with frozen weights. Moreover, LoRa can be seamlessly combined with many other PEFT methods.

In practice, given a pre-trained weight matrix $W_0 \in \mathbb{R}^{d \times k}$, which is typically full-rank between layers, the update can be constrained to be a low-rank composition: $W_0 + \Delta W = W_0 + BA$, where $B \in \mathbb{R}^{d \times r}$, $A \in \mathbb{R}^{r \times k}$, and the rank $r \ll \min(d, k)$. While W_0 remains frozen during training, A and B become trainable parameters. The forward pass $h = W_0x$ can be represented as the following sum:

$$h = W_0x + \Delta Wx = W_0x + BAx \quad (2.12)$$

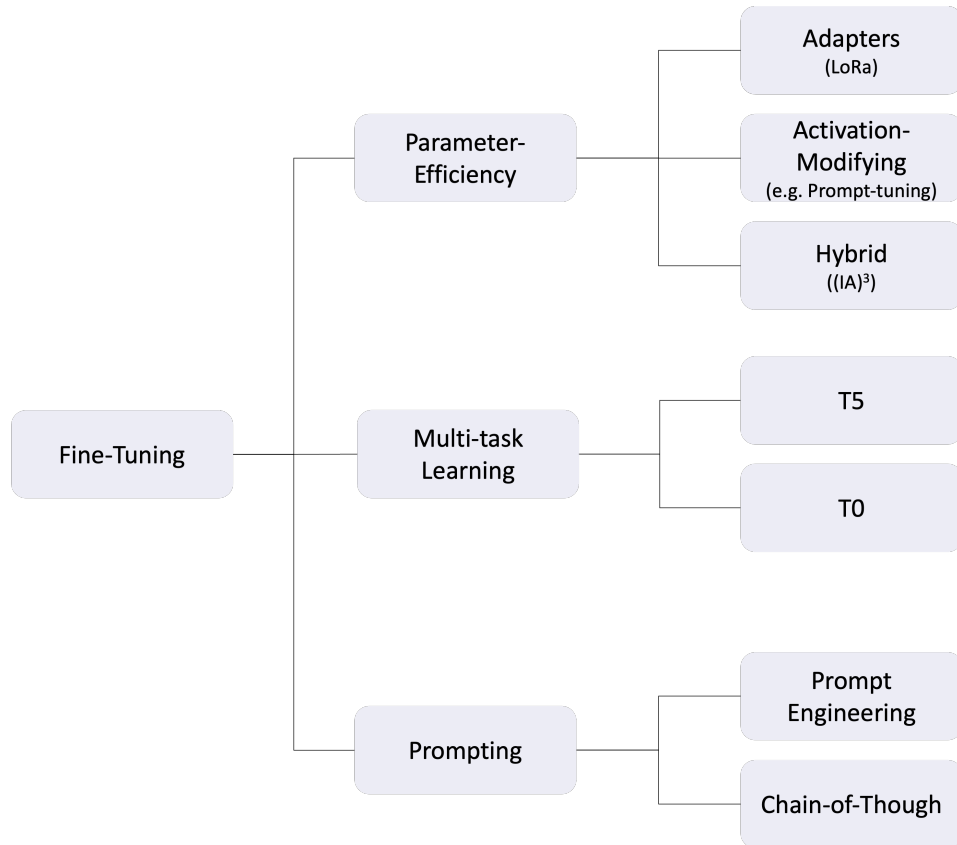


Figure 2.8: Adapted Fine-Tuning Approaches for LLM by Treviso et al. [Treviso et al., 2023]

Figure 2.9 illustrates the architecture and initialization during training. The parameters of A are randomly sampled using Gaussian initialization, while B is initialized to 0.

Other PEFT techniques include **prompt-tuning** [Lester et al., 2021] and **prefix-tuning** [Li and Liang, 2021]. Both approaches are similar in the way they leverage task-specific modifications to the input to guide the model’s behavior. They involve concatenating learned vectors to activations or embedding sequences, making them activation-modifying PEFT methods.

A PEFT approach that can be considered a hybrid between LoRa and activation-modifying techniques is **(IA)³** [Liu et al., 2022]. What sets (IA)³ apart is its focus on LLMs designed explicitly for multi-task learning, as all existing PEFT techniques significantly underperformed in experiments conducted by Liu et al. [Liu et al., 2022]. In (IA)³, the model’s activations are rescaled using element-wise multiplication with learned vectors, known as adaptors. Specifically, (IA)³ employs three learned vectors: $l_k \in \mathbb{R}^{d_k}$ for keys and $l_v \in \mathbb{R}^{d_v}$ for values in self-attention and encoder-decoder attention mechanisms, as well as $l_{ff} \in \mathbb{R}^{d_{ff}}$ for the feed-forward network. The rescaling is incorporated into the attention mechanism as follows:

$$\text{softmax} \left(\frac{Q(l_k \odot K^T)}{\sqrt{d_k}} \right) (l_v \odot V) \quad (2.13)$$

For the feed-forward network, the rescaling is implemented as follows, where γ represents the feed-forward activation:

$$(l_{ff} \odot \gamma(W_1 x)) W_2 \quad (2.14)$$

In summary, **(IA)³** is a PEFT approach specifically designed for multi-task learning, and it appears to outperform LoRa in terms of the number of parameters added and training computation costs.

Multi-task Learning refers to the concept of fine-tuning a PrLM on various tasks to achieve better zero-shot and fine-tuning performance. One of the most prominent PrLMs trained on multiple NLP tasks is T5 [Raffel et al., 2023]. Liu et al. [Liu et al., 2022] demonstrated that a generically trained T5 model can be few-shot fine-tuned with approximately 10% of the parameters of LoRa, at a lower computational cost, while achieving higher accuracy in classification tasks³. This is made possible, due to using (IA)³ as PEFT.

Prompting refers to the general concept of presenting a task as a textual instruction

³Currently, there is no experiment comparing LoRa and (IA)³ on QA tasks

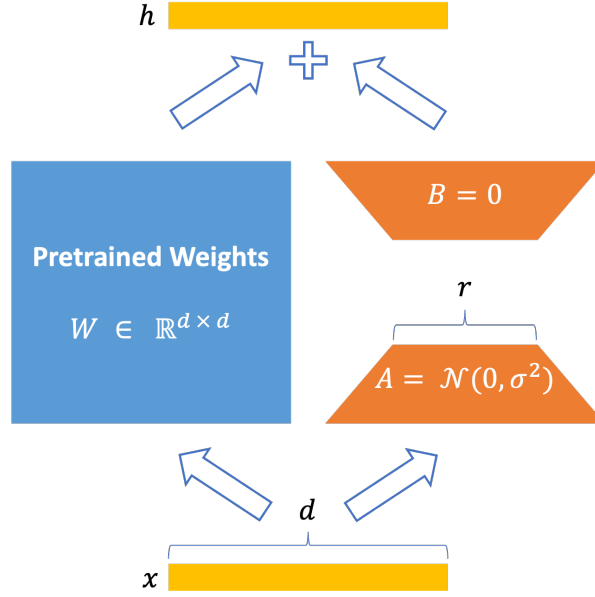


Figure 2.9: LoRa by Hu et. al. [Hu et al., 2021]

to a LLM [Brown et al., 2020]. Recent advances have even led to the development of a new sub-task and job role called *Prompt Engineering* [White et al., 2023]. It’s worth noting that different prompts with the same intent can yield different results, making the selection of the right prompt a challenge in itself [Liu et al., 2021a]. Furthermore, concepts like chain-of-thought (CoT) prompts have been developed. In CoT prompts, the given example in a Few-shot prompt is redesigned to mimic step-by-step reasoning and conclusions known from the way humans think, aiming to achieve higher performance in Zero- and Few-shot scenarios simply by adjusting the explicit natural language prompt [Wei et al., 2023].

2.3.2 Compression

2.4 Related Work

2.4.1 Question Answering based on PDFs

PDF Question Answering is the task of providing answers to questions related to the content of one or multiple documents [Mathew et al., 2021]. The field of research which actively explores this the closest is Visual Document Question Answering. It works on the development of an IR-QA system that operates on images of documents. An exemplary architecture and a general pipeline for transforming PDFs into an IR-QA system is presented by McDonald et al. [McDonald et al., 2022]. They developed their

zero-shot framework around the QASPER dataset but used the original PDFs instead of extracted text via LaTeX. Moreover, readily available open-source tools like V-Doc [Ding et al., 2022] simplify the deployment and testing of datasets, models, and IR-QA systems of the Visual Document Question Answering domain.

More recently, the open-source framework *Langchain* has gained tremendous attention⁴. Langchain focuses on harnessing LLMs using chains, which are essentially prompts for an LLM that can be chained together [Langchain, 2023]. They also provide documentation on building a QA system based on PDFs [Langchain, 2023]. Similarly, *OpenAI* offers a Retrieval Plugin for *ChatGPT* [OpenAI, 2023], also an open-source repository. These QA systems adhere to the paradigms established in previous works such as [Karpukhin et al., 2020, Ni et al., 2021, Neelakantan et al., 2022, Lewis et al., 2021]. Specifically, this entails:

- Given a text corpus, documents can be retrieved by extracting relevant passages. Data cleaning of the corpus is optional but not necessary. Therefore, these systems employ a *direct extraction* approach, especially when dealing with PDFs.
- Utilizing large-scale, diversely trained encoders. Representation-based Retrievers, when equipped with sufficient trainable parameters and diverse training datasets, often yield comparable results to fine-tuned, more complex retrieval models [Ni et al., 2021, Neelakantan et al., 2022].
- Using the LLM as a generative reader for QA, as demonstrated in the work of Izacard et al. [Izacard and Grave, 2021].

Non-LLM research for QA based on PDFs is notably scarce. In the field of ODQA, discussions regarding applicable frameworks that encompass the entire pipeline from PDFs to QA are infrequent. Instead, the focus often revolves around constructing QA systems using predefined and well-supervised datasets. However, there is some research that explores the feasibility of deploying high-performing QA systems in out-of-domain scenarios, bypassing the initial stage of data preprocessing (from PDFs to passages). This research strives to outline possibilities for using a QA system in real-world passage collections.

Applying Dense Retrievers Out-of-Domain: As emphasized by Thakur et al. in their “Heterogeneous Benchmark for Zero-shot Evaluation of Information Retrieval Models” (BEIR) [Thakur et al., 2021], dense retrievers exhibit weak out-of-domain performance. Lyu et al. [Farea et al., 2022] also demonstrate the limited generality of dense

⁴As of September 24, 2023, Langchain has received 63k stars on GitHub

retrievers when trained in one subdomain and subsequently applied in a different one. This underscores the conclusion that there are two approaches to employing retrievers in out-of-domain scenarios: (1) fine-tuning or (2) zero-shot, but with large encoders that have been trained on diverse datasets [Ni et al., 2021].

The challenge with fine-tuning lies in the unavailability of labeled data, which is typically required for supervised models in the form of tuples such as (*question, answer, context*). Several diverse approaches have been developed to address this issue. One approach employs QG techniques, as exemplified by Promptagator [Dai et al., 2022b], which utilizes LLMs. Another strategy involves the use of Mixture-of-Experts and meta-learning algorithms [Chen, 2021]. Some researchers have explored semi-supervised training datasets, as demonstrated by Sachan et al. [Sachan et al., 2023], who developed ART, a training framework for dense retrievers that only requires questions and surpasses the standard DPR training implementation. At the current point in time there is no state-of-the-art approach to fine-tune a dense retriever on a small subdomain dataset.

In their study, Reddy et al. [Reddy et al., 2022] addressed the challenge of creating a QA-System for Covid-19-related documents, where no supervised QA dataset was available. Consequently, they conducted a comparison between the performance of zero-shot BM25 and DPR. Their findings revealed that BM25 outperformed DPR on the BiosQA QA dataset, closely related to the Covid-19 domain. Throughout their experiments, they evaluated various approaches, including simple zero-shot techniques, fine-tuning of DPR using QG via BART, which yielded superior results. Notably, the most effective retriever for unsupervised domain adaptation was a combination of BM25 and unsupervised fine-tuned DPR.

Furthermore, Gururangan et al. [Gururangan et al., 2020] demonstrated in their experiments that fine-tuning PrLMs on domain-specific language or, even better, task-specific data led to a significant performance boost.

Gholami et al. [Gholami and Noori, 2021] experimented with non-fine-tuned dense retrievers on a non-QA dataset, specifically a collection of AWS documentations. Their results, particularly for the retrieval component, were sobering, aligning with the findings of benchmark studies by Thakur et al. [Thakur et al., 2021] and Lyu et al. [Farea et al., 2022].

On the other hand, there exist reader components with a high degree of generalizability, as demonstrated by UnifiedQA-v2 [Khashabi et al., 2022], an extractive reader, and T5 [Raffel et al., 2023], a generative reader. So the main challenge, when building a IR-QA-System, lays within the implementation and adaptation of the retriever component.

2.4.2 Open-domain Conversational Question Answering ???

**From single-turn Question Answering to Conversation
Synthetic Datageneration**

3 Open-domain QA Chatbot over PDFs

This chapter outlines the methods and techniques employed in the development of a conversational question-answering system designed for PDFs. The chapter is structured as follows: Section 3.1 provides an overview of the system and its objectives. As previously discussed in Chapters 1 and 2, the system is divided into two main components: an IR-QA System and a Conv QA System. Section 3.2 delves into the presented approaches for an out-of-domain adoption pipeline for QA systems tailored to PDFs, while Section 3.3 details the Conv QA System built upon the presented QA System.

3.1 Overview and Objective

The primary use-case addressed in this thesis can be summarized as follows: Suppose there is a collection of PDF files, and we aim to create a chatbot capable of engaging in conversations about the knowledge within these PDFs. This chatbot should provide accurate answers to our questions based on the content of the PDFs and furnish supporting evidence from these documents. Furthermore, it should enable users to have a conversational query experience, allowing them to ask follow-up questions and engage in dialogue with the chatbot based on its previous responses. Figure 3.1 illustrates an example of this use-case.

Presently, there is no scientific paper or similar resource that offers a comprehensive framework or pipeline to address this use-case. This thesis aims to bridge this gap by presenting a framework and pipeline designed to tackle this specific scenario. An overview of the system architecture is provided in Figure 3.2. Concerning the QA-System, the system developed in this thesis follows a typical Retriever-Reader architecture, with an additional *extract* module in the pipeline. The *extract* module’s role is to extract passages from unstructured PDFs, prepare them for the QA-System by performing cleaning and QG in order to generate traings data, which is detailed in Section 3.2.1 and 2.1.6. This component sets this research apart from others in the field, as many studies rely on existing supervised datasets and skip this crucial step. The *retrieve* component,

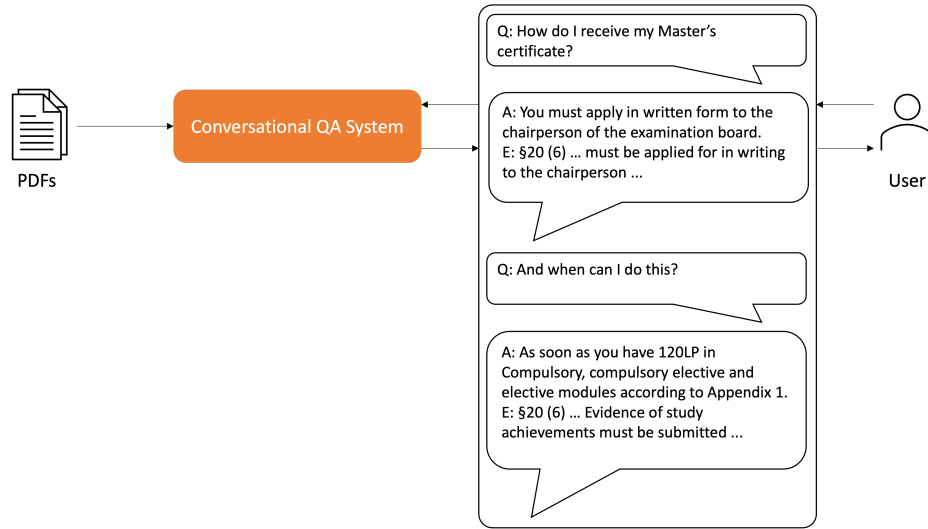


Figure 3.1: Overview of the Example Use-Case

described in Section 2.1.4, functions as a Retriever, aiming to provide evidence for the provided answers, thus relying on explicit knowledge. The *read* component will be implemented as a Reader, as outlined in Section 2.1.5. The Conv QA-System will follow the typical Conv QA-System characteristics, as explained in Section 2.2.

To summarize, the objectives of the QA-System are as follows:

1. Utilize PDFs as the primary knowledge source.
2. Enable the QA-System to handle a variety of question types, including extractive, abstractive, and boolean questions.
3. Ensure the pipeline's generalizability, allowing it to adapt to new domains or knowledge sources with minimal or no supervision.
4. Design the pipeline to be feasible without the need for datacenter-grade hardware resources, making it accessible for development on standard research hardware.
5. Prioritize accuracy as the primary objective, as constraining memory consumption is indirectly covered in point (4). Latency is not a primary concern, as the system is not intended for real-time use.

Regarding the ConvQA-System, the objectives are as follows:

1. Enable the ConvQA-System to handle follow-up questions effectively.
2. Allow the ConvQA-System to manage multiple questions within a single conversation seamlessly.

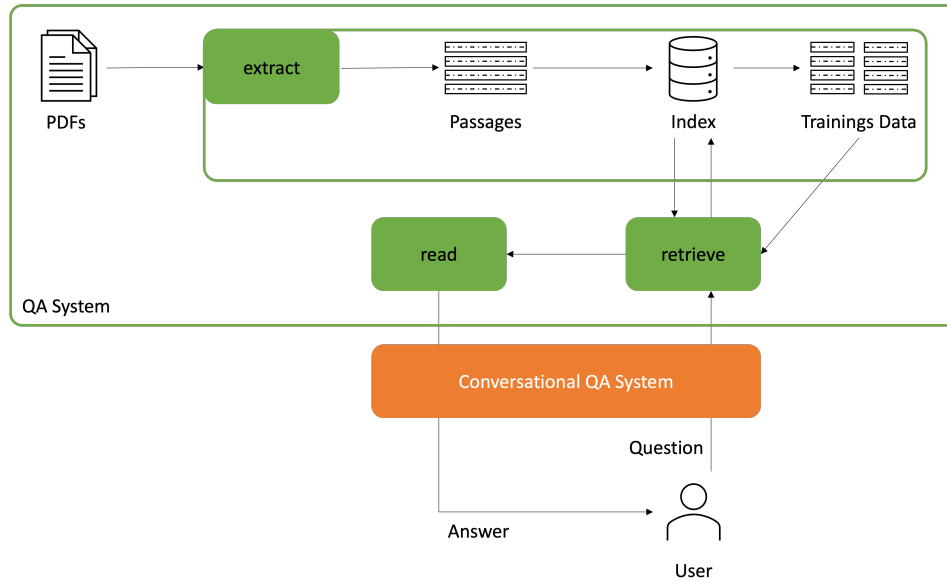


Figure 3.2: Overview of the System Architecture

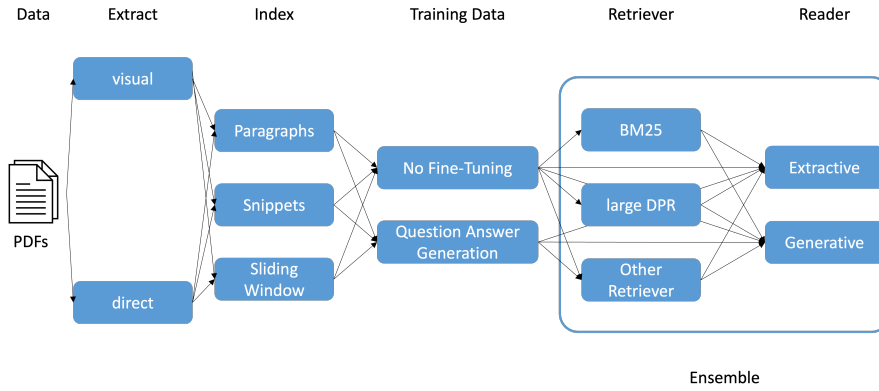


Figure 3.3: Possible Combinations of Modules to Create an Adapted QA-System

3.2 Question Answering over PDFs

The possible combinations of modules to create an adapted QA-System can be seen in Figure 3.3.

3.2.1 Extract

Information Extraction: When it comes to extracting text from PDFs, you have two approaches to choose from: the *visual* approach and the *direct* approach, each with its own advantages. In the *visual* approach, you can create a model for document layout analysis combined with an OCR tool. Ideally, this approach yields a collection, denoted as M , comprising paragraphs m . These paragraphs vary in length but represent

self-contained semantic units from the underlying PDF. On the other hand, the *direct* approach is suitable only for digitally-born PDFs. For such PDFs, you can employ a tool like Py2PDF [PyPDF2,]. This results in a corpus M that requires processing to achieve the desired granularity.

Indexing: The implementation of indexing depends on the nature of M and the desired granularity of the output. In general, there are three approaches to constructing passages p in the index P :

1. *Paragraphs:* In this approach, P comprises passages p_i such as $P = \{p_1, p_2, \dots, p_n\}$, where each p_i is derived from M and represents semantic paragraphs from the original document. The length l of each p_i is not fixed, and the number of paragraphs $|P|$ can also vary.
2. *Snippets:* When you have a fixed passage length l , the concatenated text corpus M is divided into $|M| \bmod l + 1$ passages p . Alternative approaches may involve specifying minimum and maximum lengths, denoted as l_{\min} and l_{\max} . The exact point of division depends on whether a sentence ends within the specified window or not. If a sentence ending is found within the window, the snippet concludes at that point; otherwise, it concludes at the end of the window.
3. *Sliding Windows:* This approach utilizes a window size l , a concatenated text corpus M , and a step size s . The window slides over the text corpus M , and the text within the window is used as a passage p . This results in $\frac{|M|-l}{s}$ passages, denoted as $P = \{p_1, p_2, \dots, p_n\}$.

Paragraphs may seem like the most intuitive choice, but the indefinite length of passages, denoted as p , can be an issue. *Snippets* have the advantage of having almost uniform lengths. However, a downside could be that important connections between sentences are lost, potentially leading to the loss of information. *Sliding Windows* offer the advantage of uniform lengths and the ability to capture connections between sentences. However, the downside is the high number of passages, denoted as p , that need to be indexed, along with potential issues related to data cleanliness.

Synthetic Training Data Generation: In this pipeline, the prompt-based QG method known as PROMPTAGATOR [Dai et al., 2022b] is used to generate a synthetic QA dataset for ColBERTv2 [Santhanam et al., 2022] based on P . The goal is to create triples of (q, p^+, p^-) , similar to those found in datasets like MS MACRO [Bajaj et al., 2018]. For the task of $E_{qg}(p) := q$, a seq-2-seq model, specifically a LLM, will be employed. This technique can be interpreted as knowledge distillation from the LLM to the later trained retriever. Similar to PROMPTAGATOR, there are two approaches to consider:

1. *Zero-Shot*: In this approach, a single prompt is executed to generate a question q_i corresponding to a passage p_i , all without the need for any supervised dataset.
2. *Few-Shot*: This approach uses k supervised pairs $(q_j, p_j^+)^k$ to generate a question q_i corresponding to a passage $p_i \in P$.

The prompt used for **zero-shot QG**, where p_i represents a passage from P , is:

f'{'p_i} Read the passage and generate a corresponding query.'

The prompt used for **few-shot QG**, where q_j represents a question, p_j the corresponding passage, and p the passage for which a question is being generated, is:

f'Passage: {p_1} Question: {q_1} XXX Passage: {p_2} Question: {q_2}
XXX ... XXX Passage: {p} Question:'

The result of either of these approaches will be a synthetic training dataset of (q_s, p^+) tuples. This dataset can be used for fine-tuning the retriever.

A major issue associated with this form of **QG** is its strict limitation to extractive questions, where the evidence can be derived from a single passage only. This limitation significantly constrains this pipeline. However, it does not necessarily prevent the system from answering more complex questions, such as multi-hop questions. These can be addressed by the *retriever* and *reader* modules.

3.2.2 Retrieve

Out-of-Domain Retrievers: The easiest implementation is the out-of-domain usage of retrievers without fine-tuning and the need for generating a training dataset. Three major retrievers seem promising due to their performance on the BEIR [Thakur et al., 2021] out-of-domain benchmark for retrievers:

1. *BM25* is the standard Sparse Retriever based on lexical probabilistic matching between the query q and passages p .
2. *Large DPRs* are Dense Retrievers based on large encoders. They utilize typical dense retrieval paradigms and are a primary approach in open-source projects like *Langchain* [Langchain, 2023].
3. *LaPraDoR* is a hybrid retriever based on a broadly trained Representation-based Retriever, similar to (2), combined with lexical weighting (1).

The **Large-scale Pretrained Dense Zero-shot Retriever** (LaPraDoR) utilizes the advantages of both lexical and semantic search. Given a question q and a passage p , the

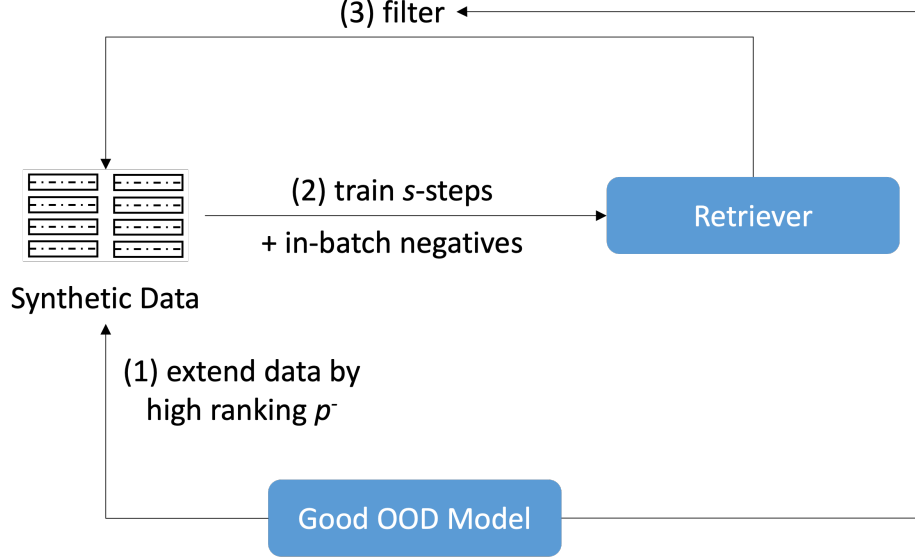


Figure 3.4: Fine-Tuning Process for Retriever

semantic similarity $\text{sim}(q, d)$ is calculated using a DPR model. In addition, the lexical similarity $\text{BM25}(q, d)$ is calculated. The final score $\text{score}(q, d)$ is computed as follows:

$$\text{score}(q, d) = \text{sim}(q, d) \cdot \text{BM25}(q, d) \quad (3.1)$$

This approach achieves state-of-the-art performance on the BEIR benchmark without the need for fine-tuning. It serves as the ideal off-the-shelf component for the desired QA-System.

Fine-Tuning Retrievers: Fine-tuning is a challenging task in the absence of a supervised dataset, especially when dealing with a Representation-Interaction Retriever like ColBERTv2. Currently, there is no clear reference on how to fine-tune a Representation-Interaction Retriever like ColBERTv2 on synthetic data. To address this gap, this thesis proposes the approach depicted in Figure 3.4, which combines elements from the training processes of PROMPTAGATOR [Dai et al., 2022b], the original DPR [Karpukhin et al., 2020], and ColBERTv2 [Santhanam et al., 2022].

A crucial aspect of this fine-tuning approach is the utilization of an already well-performing out-of-domain retriever as a baseline. This baseline retriever can distill its knowledge into the retriever undergoing training. For example, DPR used BM25, while ColBERTv2 employed MiniLM [Wang et al., 2019], a 22M-parameter Interaction-based retriever. A useful guideline for selecting the model is to consult the BEIR leaderboard.

In the first step, the Out-of-Domain (OOD) model must retrieve the top k passages, denoted as p_i , for each synthetic (q_s, p^+) pair. To generate numerous high-quality negative triples, denoted as (q_s, p^+, p^-) , for every retrieved passage p_i (where $p_i \neq p^+$), the

triple (q_s, p^+, p_i) is added to the training dataset.

In the second step, the target retriever is trained for s iterations. The loss function employed is the negative log likelihood, as defined in Section 2.1.4. During training, in-batch negatives are utilized. Let Q and P represent the $(B \times d)$ matrices of question and passage embeddings in a batch of size B . The matrix $S = QP^T$ contains rows where each corresponds to a question paired with all other passages in the batch. The passages from all the other data points act as negatives for the question q .

In the third step, the synthetic dataset is subjected to filtering. PROMPTAGATOR demonstrated promising results of filtering data by a network trained on the data. For this filtering process, retrieval is performed using both the newly trained model and the OOD model for a question q_s . If neither model retrieves the corresponding passage p^+ for the synthetic question within their top k , that question is removed from the dataset.

Steps two and three are repeated once during fine-tuning.

3.2.3 Read

Out-of-Domain Readers: There exists no benchmark for the application of zero-shot or OOD Readers. As Pereira et. al. [Pereira et al., 2022] point out in their experimental results, the zero-shot performance of LLMs as Generative Readers is state-of-the-art and thus needs no fine-tuning and can even perform in a zero-shot setting. Luo et. al. [Luo et al., 2022] also pointed out, that the OOD performance of Extractive Readers is higher than the of Generative ones, when it comes to PrLM. Therefore a good OOD model choice is UnifiedQA-v2 [Khashabi et al., 2022], which is based on T5 [Raffel et al., 2023] and was trained on 20 diverse datasets.

Fine-Tuning Readers: Extractive Readers depend on datasets of the form (q, c, a_{span}) , whereas q is a question, c the context and a_{span} an indication of which tokens of c correspond to the desired answer. Similar for Generative Readers, which need (q, c, a) datasets, whereas a is just a text based answer to question q . The training process for the reader is easier and more straightforward as for the retriever. Given the already filtered synthetic trainings dataset, this can be used for training of the reader.

3.2.4 Orchestration

Similar to **Rank Twice, Read Twice (R2-D2)** [Fajcik et al., 2021] and **LaPraDoR** [Xu et al., 2022] and others, an orchestration of retrievers and readers will be adopted in order to achieve highest OOD performance. This involves the following steps:

1. *Retrieval:* The k -top identified passages $P = \{p_1, p_2, \dots, p_k\}$ are retrieved for a

given question q receive a similarity indication $\text{sim}(q, p_k)$ by the retriever. Next to this score, the BM25 score is calculated $BM25(q, p_k)$. The final score is calculated as the weighting of the similarity by BM25: $\text{score}(q, d) = \text{sim}(q, d) \cdot BM25(q, d)$

2. *Reader:* As for the Reader two readers will be executed at the same time: An extractive and one generative reader. Both

3.3 Conversational Question Answering System

4 Experimental Evaluation

This chapter is the evaluation of the proposed solution. It consists of laying out different possible solutions to the given problem.

5 Conclusions and Future Work

This chapter is the conclusion of the thesis.

Bibliography

- [Anil et al., 2023] Anil, R., Dai, A. M., Firat, O., Johnson, M., Lepikhin, D., Passos, A., Shakeri, S., Taropa, E., Bailey, P., Chen, Z., Chu, E., Clark, J. H., Shafey, L. E., Huang, Y., Meier-Hellstern, K., Mishra, G., Moreira, E., Omernick, M., Robinson, K., Ruder, S., Tay, Y., Xiao, K., Xu, Y., Zhang, Y., Abrego, G. H., Ahn, J., Austin, J., Barham, P., Botha, J., Bradbury, J., Brahma, S., Brooks, K., Catasta, M., Cheng, Y., Cherry, C., Choquette-Choo, C. A., Chowdhery, A., Crepy, C., Dave, S., Dehghani, M., Dev, S., Devlin, J., Díaz, M., Du, N., Dyer, E., Feinberg, V., Feng, F., Fienber, V., Freitag, M., Garcia, X., Gehrmann, S., Gonzalez, L., Gur-Ari, G., Hand, S., Hashemi, H., Hou, L., Howland, J., Hu, A., Hui, J., Hurwitz, J., Isard, M., Ittycheriah, A., Jagielski, M., Jia, W., Kenealy, K., Krikun, M., Kudugunta, S., Lan, C., Lee, K., Lee, B., Li, E., Li, M., Li, W., Li, Y., Li, J., Lim, H., Lin, H., Liu, Z., Liu, F., Maggioni, M., Mahendru, A., Maynez, J., Misra, V., Moussalem, M., Nado, Z., Nham, J., Ni, E., Nystrom, A., Parrish, A., Pellat, M., Polacek, M., Polozov, A., Pope, R., Qiao, S., Reif, E., Richter, B., Riley, P., Ros, A. C., Roy, A., Saeta, B., Samuel, R., Shelby, R., Slone, A., Smilkov, D., So, D. R., Sohn, D., Tokumine, S., Valter, D., Vasudevan, V., Vodrahalli, K., Wang, X., Wang, P., Wang, Z., Wang, T., Wieting, J., Wu, Y., Xu, K., Xu, Y., Xue, L., Yin, P., Yu, J., Zhang, Q., Zheng, S., Zheng, C., Zhou, W., Zhou, D., Petrov, S., and Wu, Y. (2023). PaLM 2 Technical Report. arXiv:2305.10403 [cs].
- [Bajaj et al., 2018] Bajaj, P., Campos, D., Craswell, N., Deng, L., Gao, J., Liu, X., Majumder, R., McNamara, A., Mitra, B., Nguyen, T., Rosenberg, M., Song, X., Stoica, A., Tiwary, S., and Wang, T. (2018). MS MARCO: A Human Generated MACHine Reading COMprehension Dataset. arXiv:1611.09268 [cs].
- [Brown et al., 2020] Brown, T. B., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G., Henighan, T., Child, R., Ramesh, A., Ziegler, D. M., Wu, J., Winter, C., Hesse, C., Chen, M., Sigler, E., Litwin, M., Gray, S., Chess, B., Clark, J., Berner, C., McCandlish, S., Radford, A., Sutskever, I., and Amodei, D. (2020). Language Models are Few-Shot Learners. arXiv:2005.14165 [cs].

- [Chen, 2021] Chen, H. (2021). Improving Out-of-Domain Question Answering with Mixture of Experts.
- [Chung et al., 2022] Chung, H. W., Hou, L., Longpre, S., Zoph, B., Tay, Y., Fedus, W., Li, Y., Wang, X., Dehghani, M., Brahma, S., Webson, A., Gu, S. S., Dai, Z., Suzgun, M., Chen, X., Chowdhery, A., Castro-Ros, A., Pellat, M., Robinson, K., Valter, D., Narang, S., Mishra, G., Yu, A., Zhao, V., Huang, Y., Dai, A., Yu, H., Petrov, S., Chi, E. H., Dean, J., Devlin, J., Roberts, A., Zhou, D., Le, Q. V., and Wei, J. (2022). Scaling Instruction-Finetuned Language Models. arXiv:2210.11416 [cs].
- [Dai et al., 2022a] Dai, Z., Chaganty, A. T., Zhao, V., Amini, A., Rashid, Q. M., Green, M., and Guu, K. (2022a). Dialog Inpainting: Turning Documents into Dialogs. Publisher: arXiv Version Number: 2.
- [Dai et al., 2022b] Dai, Z., Zhao, V. Y., Ma, J., Luan, Y., Ni, J., Lu, J., Bakalov, A., Guu, K., Hall, K. B., and Chang, M.-W. (2022b). Promptagator: Few-shot Dense Retrieval From 8 Examples. arXiv:2209.11755 [cs].
- [Dalton et al., 2020] Dalton, J., Xiong, C., and Callan, J. (2020). TREC CAsT 2019: The Conversational Assistance Track Overview. arXiv:2003.13624 [cs].
- [Dasigi et al., 2021] Dasigi, P., Lo, K., Beltagy, I., Cohan, A., Smith, N. A., and Gardner, M. (2021). A Dataset of Information-Seeking Questions and Answers Anchored in Research Papers. arXiv:2105.03011 [cs].
- [Devlin et al., 2019] Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2019). BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. arXiv:1810.04805 [cs].
- [Dimitrakis et al., 2020] Dimitrakis, E., Sgontzos, K., and Tzitzikas, Y. (2020). A survey on question answering systems over linked data and documents. *Journal of Intelligent Information Systems*, 55(2):233–259.
- [Ding et al., 2022] Ding, Y., Huang, Z., Wang, R., Zhang, Y., Chen, X., Ma, Y., Chung, H., and Han, S. C. (2022). V-Doc : Visual questions answers with Documents. arXiv:2205.13724 [cs].
- [Elgohary et al., 2019] Elgohary, A., Peskov, D., and Boyd-Graber, J. (2019). Can You Unpack That? Learning to Rewrite Questions-in-Context. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 5918–5924, Hong Kong, China. Association for Computational Linguistics.

- [Etezadi and Shamsfard, 2023] Etezadi, R. and Shamsfard, M. (2023). The state of the art in open domain complex question answering: a survey. *Applied Intelligence*, 53(4):4124–4144.
- [Fajcik et al., 2021] Fajcik, M., Docekal, M., Ondrej, K., and Smrz, P. (2021). R2-D2: A Modular Baseline for Open-Domain Question Answering. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 854–870, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- [Farea et al., 2022] Farea, A., Yang, Z., Duong, K., Perera, N., and Emmert-Streib, F. (2022). Evaluation of Question Answering Systems: Complexity of judging a natural language. arXiv:2209.12617 [cs].
- [Ferrucci, 2012] Ferrucci, D. A. (2012). Introduction to “This is Watson”. *IBM Journal of Research and Development*, 56(3.4):1:1–1:15. Conference Name: IBM Journal of Research and Development.
- [Gao et al., 2022] Gao, J., Xiong, C., Bennett, P., and Craswell, N. (2022). Neural Approaches to Conversational Information Retrieval. arXiv:2201.05176 [cs].
- [Gholami and Noori, 2021] Gholami, S. and Noori, M. (2021). Zero-Shot Open-Book Question Answering. arXiv:2111.11520 [cs].
- [Green et al., 1961] Green, B. F., Wolf, A. K., Chomsky, C., and Laughery, K. (1961). Baseball: an automatic question-answerer. In *Papers presented at the May 9-11, 1961, western joint IRE-AIEE-ACM computer conference*, IRE-AIEE-ACM ’61 (Western), pages 219–224, New York, NY, USA. Association for Computing Machinery.
- [Gupta et al., 2020] Gupta, S., Rawat, B. P. S., and Yu, H. (2020). Conversational Machine Comprehension: a Literature Review. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 2739–2753, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- [Gururangan et al., 2020] Gururangan, S., Marasović, A., Swayamdipta, S., Lo, K., Beltagy, I., Downey, D., and Smith, N. A. (2020). Don’t Stop Pretraining: Adapt Language Models to Domains and Tasks. *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8342–8360. Conference Name: Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics Place: Online Publisher: Association for Computational Linguistics.
- [Guu et al., 2020] Guu, K., Lee, K., Tung, Z., Pasupat, P., and Chang, M.-W. (2020). REALM: Retrieval-Augmented Language Model Pre-Training. arXiv:2002.08909 [cs].

- [Hao et al., 2022] Hao, T., Li, X., He, Y., Wang, F. L., and Qu, Y. (2022). Recent progress in leveraging deep learning methods for question answering. *Neural Computing and Applications*, 34(4):2765–2783.
- [Harabagiu et al., 2003] Harabagiu, S. M., Maiorano, S. J., and Paşca, M. A. (2003). Open-domain textual question answering techniques. *Natural Language Engineering*, 9(3):231–267. Publisher: Cambridge University Press.
- [He et al., 2020] He, P., Liu, X., Gao, J., and Chen, W. (2020). DEBERTA: DECODING-ENHANCED BERT WITH DISENTANGLED ATTENTION.
- [Houlsby et al., 2019] Houlsby, N., Giurghi, A., Jastrzebski, S., Morrone, B., de Larousilhe, Q., Gesmundo, A., Attariyan, M., and Gelly, S. (2019). Parameter-Efficient Transfer Learning for NLP. arXiv:1902.00751 [cs, stat].
- [Hu et al., 2021] Hu, E., Shen, Y., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., and Chen, W. (2021). LORA: LOW-RANK ADAPTATION OF LARGE LANGUAGE MODELS.
- [Huggingface, 2023] Huggingface (2023). PEFT.
- [Izacard and Grave, 2021] Izacard, G. and Grave, E. (2021). Leveraging Passage Retrieval with Generative Models for Open Domain Question Answering. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 874–880, Online. Association for Computational Linguistics.
- [Johnson et al., 2017] Johnson, J., Douze, M., and Jégou, H. (2017). Billion-scale similarity search with GPUs. arXiv:1702.08734 [cs].
- [Jurafsky and Martin, 2023] Jurafsky, D. and Martin, J. H. (2023). *Speech and Language Processing*. Palo Alto, 3 edition.
- [Karpukhin et al., 2020] Karpukhin, V., Oğuz, B., Min, S., Lewis, P., Wu, L., Edunov, S., Chen, D., and Yih, W.-t. (2020). Dense Passage Retrieval for Open-Domain Question Answering. arXiv:2004.04906 [cs].
- [Khashabi et al., 2022] Khashabi, D., Kordi, Y., and Hajishirzi, H. (2022). UnifiedQA-v2: Stronger Generalization via Broader Cross-Format Training. arXiv:2202.12359 [cs].

- [Khattab and Zaharia, 2020] Khattab, O. and Zaharia, M. (2020). ColBERT: Efficient and Effective Passage Search via Contextualized Late Interaction over BERT. arXiv:2004.12832 [cs].
- [Langchain, 2023] Langchain (2023). langchain-ai/langchain: Building applications with LLMs through composability.
- [Langchain, 2023] Langchain (2023). Question Answering | Langchain.
- [Lester et al., 2021] Lester, B., Al-Rfou, R., and Constant, N. (2021). The Power of Scale for Parameter-Efficient Prompt Tuning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 3045–3059, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- [Lewis et al., 2019] Lewis, M., Liu, Y., Goyal, N., Ghazvininejad, M., Mohamed, A., Levy, O., Stoyanov, V., and Zettlemoyer, L. (2019). BART: Denoising Sequence-to-Sequence Pre-training for Natural Language Generation, Translation, and Comprehension.
- [Lewis et al., 2021] Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., Küttler, H., Lewis, M., Yih, W.-t., Rocktäschel, T., Riedel, S., and Kiela, D. (2021). Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. arXiv:2005.11401 [cs].
- [Li et al., 2022] Li, J., Xu, Y., Lv, T., Cui, L., Zhang, C., and Wei, F. (2022). DiT: Self-supervised Pre-training for Document Image Transformer. arXiv:2203.02378 [cs].
- [Li and Liang, 2021] Li, X. L. and Liang, P. (2021). Prefix-Tuning: Optimizing Continuous Prompts for Generation. arXiv:2101.00190 [cs].
- [Ling et al., 2023] Ling, C., Zhao, X., Lu, J., Deng, C., Zheng, C., Wang, J., Chowdhury, T., Li, Y., Cui, H., Zhang, X., Zhao, T., Panalkar, A., Cheng, W., Wang, H., Liu, Y., Chen, Z., Chen, H., White, C., Gu, Q., Pei, J., and Zhao, L. (2023). Domain Specialization as the Key to Make Large Language Models Disruptive: A Comprehensive Survey. arXiv:2305.18703 [cs].
- [Liu et al., 2022] Liu, H., Tam, D., Muqeeth, M., Mohta, J., Huang, T., Bansal, M., and Raffel, C. (2022). Few-Shot Parameter-Efficient Fine-Tuning is Better and Cheaper than In-Context Learning. Publisher: arXiv Version Number: 2.
- [Liu et al., 2021a] Liu, X., Zheng, Y., Du, Z., Ding, M., Qian, Y., Yang, Z., and Tang, J. (2021a). GPT Understands, Too. arXiv:2103.10385 [cs].

- [Liu et al., 2021b] Liu, Y., Hashimoto, K., Zhou, Y., Yavuz, S., Xiong, C., and Yu, P. S. (2021b). Dense Hierarchical Retrieval for Open-Domain Question Answering. arXiv:2110.15439 [cs].
- [Liu et al., 2019] Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., and Stoyanov, V. (2019). RoBERTa: A Robustly Optimized BERT Pretraining Approach.
- [Liusie et al., 2022] Liusie, A., Qian, M., Li, X., and Gales, M. (2022). UNIVERSITY OF CAMBRIDGE AT TREC CAST 2022.
- [Luo et al., 2022] Luo, M., Hashimoto, K., Yavuz, S., Liu, Z., Baral, C., and Zhou, Y. (2022). Choose Your QA Model Wisely: A Systematic Study of Generative and Extractive Readers for Question Answering. arXiv:2203.07522 [cs].
- [Mao et al., 2023] Mao, K., Dou, Z., Chen, H., Mo, F., and Qian, H. (2023). Large Language Models Know Your Contextual Search Intent: A Prompting Framework for Conversational Search. Publisher: arXiv Version Number: 1.
- [Mathew et al., 2021] Mathew, M., Tito, R., Karatzas, D., Manmatha, R., and Jawahar, C. V. (2021). Document Visual Question Answering Challenge 2020. arXiv:2008.08899 [cs].
- [McDonald et al., 2022] McDonald, T., Tsan, B., Saini, A., Ordonez, J., Gutierrez, L., Nguyen, P., Mason, B., and Ng, B. (2022). Detect, Retrieve, Comprehend: A Flexible Framework for Zero-Shot Document-Level Question Answering. arXiv:2210.01959 [cs].
- [Meuschke et al., 2023] Meuschke, N., Jagdale, A., Spinde, T., Mitrović, J., and Gipp, B. (2023). A Benchmark of PDF Information Extraction Tools using a Multi-Task and Multi-Domain Evaluation Framework for Academic Documents. volume 13972, pages 383–405. arXiv:2303.09957 [cs].
- [Mishra and Jain, 2016] Mishra, A. and Jain, S. K. (2016). A survey on question answering systems with classification. *Journal of King Saud University - Computer and Information Sciences*, 28(3):345–361.
- [Nassiri and Akhloufi, 2023] Nassiri, K. and Akhloufi, M. (2023). Transformer models used for text-based question answering systems. *Applied Intelligence*, 53(9):10602–10635.
- [Neelakantan et al., 2022] Neelakantan, A., Xu, T., Puri, R., Radford, A., Han, J. M., Tworek, J., Yuan, Q., Tezak, N., Kim, J. W., Hallacy, C., Heidecke, J., Shyam, P.,

- Power, B., Nekoul, T. E., Sastry, G., Krueger, G., Schnurr, D., Such, F. P., Hsu, K., Thompson, M., Khan, T., Sherbakov, T., Jang, J., Welinder, P., and Weng, L. (2022). Text and Code Embeddings by Contrastive Pre-Training. arXiv:2201.10005 [cs].
- [Ni et al., 2021] Ni, J., Qu, C., Lu, J., Dai, Z., Ábrego, G. H., Ma, J., Zhao, V. Y., Luan, Y., Hall, K. B., Chang, M.-W., and Yang, Y. (2021). Large Dual Encoders Are Generalizable Retrievers. arXiv:2112.07899 [cs].
- [Nishida et al., 2018] Nishida, K., Saito, I., Otsuka, A., Asano, H., and Tomita, J. (2018). Retrieve-and-Read: Multi-task Learning of Information Retrieval and Reading Comprehension. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management*, pages 647–656. arXiv:1808.10628 [cs].
- [OpenAI, 2023] OpenAI (2023). ChatGPT Retrieval Plugin. original-date: 2023-03-23T06:06:22Z.
- [Owoicho et al., 2022] Owoicho, P., Dalton, J., Aliannejadi, M., Azzopardi, L., Trippas, J. R., and Vakulenko, S. (2022). TREC CAsT 2022: Going Beyond User Ask and System Retrieve with Initiative and Response Generation.
- [Pereira et al., 2022] Pereira, J., Fidalgo, R., Lotufo, R., and Nogueira, R. (2022). Visconde: Multi-document QA with GPT-3 and Neural Reranking.
- [PyPDF2,] PyPDF2. Welcome to PyPDF2 — PyPDF2 documentation.
- [Raffel et al., 2023] Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., and Liu, P. J. (2023). Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer. arXiv:1910.10683 [cs, stat].
- [Rajpurkar et al., 2016] Rajpurkar, P., Zhang, J., Lopyrev, K., and Liang, P. (2016). SQuAD: 100,000+ Questions for Machine Comprehension of Text. arXiv:1606.05250 [cs].
- [Rastogi et al., 2020] Rastogi, A., Zang, X., Sunkara, S., Gupta, R., and Khaitan, P. (2020). Schema-Guided Dialogue State Tracking Task at DSTC8.
- [Reddy et al., 2022] Reddy, R. G., Iyer, B., Sultan, M. A., Zhang, R., Sil, A., Castelli, V., Florian, R., and Roukos, S. (2022). Synthetic Target Domain Supervision for Open Retrieval QA. arXiv:2204.09248 [cs].
- [Reddy et al., 2018] Reddy, S., Chen, D., and Manning, C. D. (2018). CoQA: A Conversational Question Answering Challenge.

- [Roberts et al., 2020] Roberts, A., Raffel, C., and Shazeer, N. (2020). How Much Knowledge Can You Pack Into the Parameters of a Language Model? In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5418–5426, Online. Association for Computational Linguistics.
- [Robertson and Zaragoza, 2009] Robertson, S. and Zaragoza, H. (2009). The Probabilistic Relevance Framework: BM25 and Beyond. *Foundations and Trends in Information Retrieval*, 3:333–389.
- [Sachan et al., 2023] Sachan, D. S., Lewis, M., Yogatama, D., Zettlemoyer, L., Pineau, J., and Zaheer, M. (2023). Questions Are All You Need to Train a Dense Passage Retriever. arXiv:2206.10658 [cs].
- [Santhanam et al., 2022] Santhanam, K., Khattab, O., Saad-Falcon, J., Potts, C., and Zaharia, M. (2022). ColBERTv2: Effective and Efficient Retrieval via Lightweight Late Interaction. arXiv:2112.01488 [cs].
- [Serban et al., 2016] Serban, I. V., García-Durán, A., Gulcehre, C., Ahn, S., Chandar, S., Courville, A., and Bengio, Y. (2016). Generating Factoid Questions With Recurrent Neural Networks: The 30M Factoid Question-Answer Corpus. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 588–598, Berlin, Germany. Association for Computational Linguistics.
- [Thakur et al., 2021] Thakur, N., Reimers, N., Rücklé, A., Srivastava, A., and Gurevych, I. (2021). BEIR: A Heterogenous Benchmark for Zero-shot Evaluation of Information Retrieval Models. arXiv:2104.08663 [cs].
- [Tito et al., 2021] Tito, R., Karatzas, D., and Valveny, E. (2021). Document Collection Visual Question Answering. volume 12822, pages 778–792. arXiv:2104.14336 [cs].
- [Touvron et al., 2023] Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., Bikel, D., Blecher, L., Ferrer, C. C., Chen, M., Cucurull, G., Esiobu, D., Fernandes, J., Fu, J., Fu, W., Fuller, B., Gao, C., Goswami, V., Goyal, N., Hartshorn, A., Hosseini, S., Hou, R., Inan, H., Kardas, M., Kerkez, V., Khabsa, M., Kloumann, I., Korenev, A., Koura, P. S., Lachaux, M.-A., Lavril, T., Lee, J., Liskovich, D., Lu, Y., Mao, Y., Martinet, X., Mihaylov, T., Mishra, P., Molybog, I., Nie, Y., Poulton, A., Reizenstein, J., Rungta, R., Saladi, K., Schelten, A., Silva, R., Smith, E. M., Subramanian, R., Tan, X. E., Tang, B., Taylor, R., Williams, A., Kuan, J. X., Xu, P., Yan, Z., Zarov, I.,

- Zhang, Y., Fan, A., Kambadur, M., Narang, S., Rodriguez, A., Stojnic, R., Edunov, S., and Scialom, T. (2023). Llama 2: Open Foundation and Fine-Tuned Chat Models. arXiv:2307.09288 [cs].
- [Treviso et al., 2023] Treviso, M., Lee, J.-U., Ji, T., Aken, B. V., Cao, Q., Ciosici, M. R., Hassid, M., Heafield, K., Hooker, S., Raffel, C., Martins, P. H., Martins, A. F. T., Forde, J. Z., Milder, P., Simpson, E., Slonim, N., Dodge, J., Strubell, E., Balasubramanian, N., Derczynski, L., Gurevych, I., and Schwartz, R. (2023). Efficient Methods for Natural Language Processing: A Survey. *Transactions of the Association for Computational Linguistics*, 11:826–860.
- [Voorhees, 1999] Voorhees, E. (1999). The TREC-8 Question Answering Track Report.
- [Voskarides et al., 2020] Voskarides, N., Li, D., Ren, P., Kanoulas, E., and de Rijke, M. (2020). Query Resolution for Conversational Search with Limited Supervision. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 921–930. arXiv:2005.11723 [cs].
- [Wang, 2022] Wang, Z. (2022). Modern Question Answering Datasets and Benchmarks: A Survey. Publisher: arXiv Version Number: 1.
- [Wang et al., 2019] Wang, Z., Ng, P., Ma, X., Nallapati, R., and Xiang, B. (2019). Multi-passage BERT: A Globally Normalized BERT Model for Open-domain Question Answering. arXiv:1908.08167 [cs].
- [Wei et al., 2023] Wei, J., Wang, X., Schuurmans, D., Bosma, M., Ichter, B., Xia, F., Chi, E., Le, Q., and Zhou, D. (2023). Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. arXiv:2201.11903 [cs].
- [White et al., 2023] White, J., Fu, Q., Hays, S., Sandborn, M., Olea, C., Gilbert, H., Elnashar, A., Spencer-Smith, J., and Schmidt, D. C. (2023). A Prompt Pattern Catalog to Enhance Prompt Engineering with ChatGPT. arXiv:2302.11382 [cs].
- [Xu et al., 2022] Xu, C., Guo, D., Duan, N., and McAuley, J. (2022). LaPraDoR: Unsupervised Pretrained Dense Retriever for Zero-Shot Text Retrieval. arXiv. Version Number: 2.
- [Yang et al., 2019] Yang, J.-H., Lin, S.-C., Lin, J., Tsai, M.-F., and Wang, C.-J. (2019). Query and Answer Expansion from Conversation History.

- [Yang et al., 2018] Yang, Z., Qi, P., Zhang, S., Bengio, Y., Cohen, W. W., Salakhutdinov, R., and Manning, C. D. (2018). HotpotQA: A Dataset for Diverse, Explainable Multi-hop Question Answering. arXiv:1809.09600 [cs].
- [Zaib et al., 2021] Zaib, M., Zhang, W. E., Sheng, Q. Z., Mahmood, A., and Zhang, Y. (2021). Conversational Question Answering: A Survey.
- [Zamani et al., 2023] Zamani, H., Trippas, J. R., Dalton, J., and Radlinski, F. (2023). Conversational Information Seeking. arXiv:2201.08808 [cs].
- [Zhang et al., 2023a] Zhang, J., Zhang, H., Zhang, D., Liu, Y., and Huang, S. (2023a). Beam Retrieval: General End-to-End Retrieval for Multi-Hop Question Answering. arXiv:2308.08973 [cs].
- [Zhang et al., 2023b] Zhang, Q., Chen, S., Xu, D., Cao, Q., Chen, X., Cohn, T., and Fang, M. (2023b). A Survey for Efficient Open Domain Question Answering. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14447–14465, Toronto, Canada. Association for Computational Linguistics.
- [Zhao et al., 2023] Zhao, W. X., Zhou, K., Li, J., Tang, T., Wang, X., Hou, Y., Min, Y., Zhang, B., Zhang, J., Dong, Z., Du, Y., Yang, C., Chen, Y., Chen, Z., Jiang, J., Ren, R., Li, Y., Tang, X., Liu, Z., Liu, P., Nie, J.-Y., and Wen, J.-R. (2023). A Survey of Large Language Models. arXiv:2303.18223 [cs].
- [Zhu et al., 2021] Zhu, F., Lei, W., Wang, C., Zheng, J., Poria, S., and Chua, T.-S. (2021). Retrieving and Reading: A Comprehensive Survey on Open-domain Question Answering. arXiv:2101.00774 [cs].