

## Scan results for stephenc808.github.io/front-end-project




Congratulations! Our scan indicates that your webpage is accessible. We're thrilled you chose to be inclusive and comply with legislation.

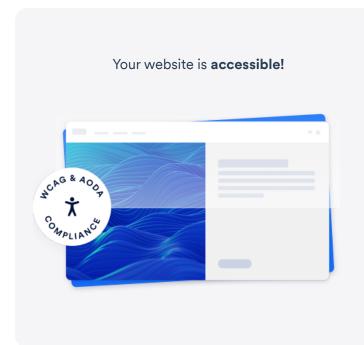


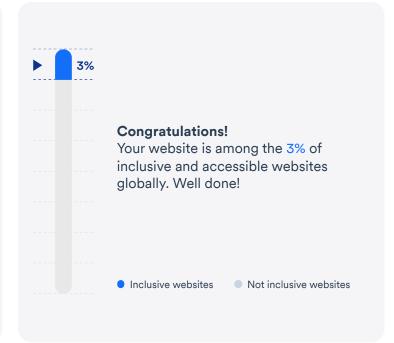

In the report you'll find the results for dozens of tests focusing mainly on these categories:

- ✓ Screen-reader adjustments (blind users)
- Keyboard navigation adjustments (motor impaired)
- UI, design and readability adjustments (vision impaired)

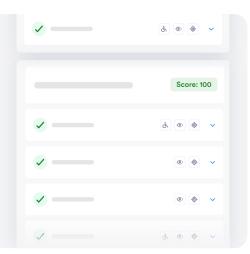

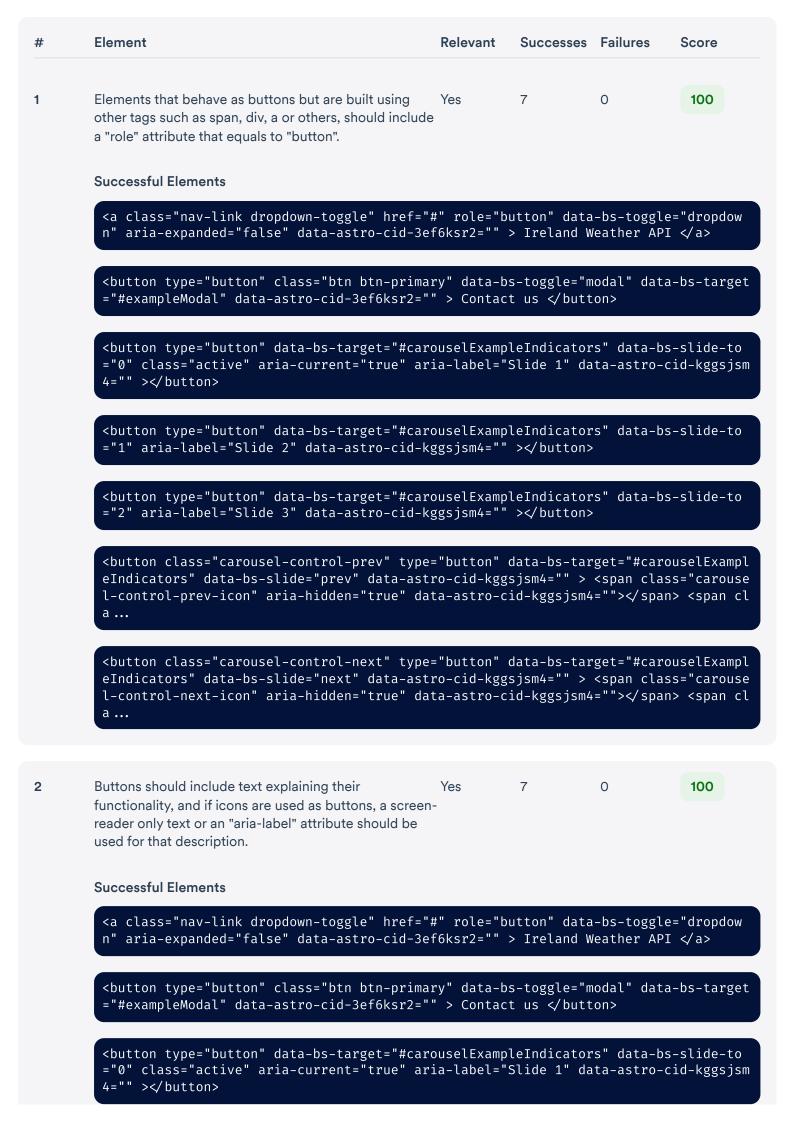

<button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide-to
="1" aria-label="Slide 2" data-astro-cid-kggsjsm4="" ></button>

<button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide-to ="2" aria-label="Slide 3" data-astro-cid-kggsjsm4="" ></button>

<button class="carousel-control-prev" type="button" data-bs-target="#carouselExampl
eIndicators" data-bs-slide="prev" data-astro-cid-kggsjsm4="" > <span class="carouse
l-control-prev-icon" aria-hidden="true" data-astro-cid-kggsjsm4=""></span> <span cl
a ...</pre>

<button class="carousel-control-next" type="button" data-bs-target="#carouselExampl
eIndicators" data-bs-slide="next" data-astro-cid-kggsjsm4="" > <span class="carouse
l-control-next-icon" aria-hidden="true" data-astro-cid-kggsjsm4=""></span> <span cl
a...</pre>

Links should include text that is setting expectations to Yes what page they are leading to. If empty links are used as layout wrapping elements, a screen-reader only text or an "aria-label" attribute should be used for that description.

0 100

16

## Successful Elements

<a class="nav-link" aria-current="page" href="/front-end-project" data-astro-cid-3e
f6ksr2="" >Home</a>

<a class="nav-link" href="/front-end-project/historic-data" data-astro-cid-3ef6ksr2
="" >Historical Data</a>

<a class="nav-link" href="/front-end-project/search-weather" data-astro-cid-3ef6ksr
2="" >Search Weather</a>

<a href="/front-end-project/Ulster" class="btn btn-primary" data-astro-cid-kggsjsm4
="" >Ulster</a>

<a href="/front-end-project/Munster" class="btn btn-primary" data-astro-cid-kggsjsm
4="" >Munster</a>

<a href="/front-end-project/Leinster" class="btn btn-primary" data-astro-cid-kggsjs
m4="" >Leinster</a>

<a href="/front-end-project/Connacht" class="btn btn-primary" data-astro-cid-kggsjs
m4="" >Connacht</a>

<a class="card-link" href="/front-end-project/Ulster" title="Ireland Weather API" d
ata-astro-cid-25j5uwpb="" >Ulster</a>


<a class="card-link" href="/front-end-project/Munster" title="Ireland Weather API"
data-astro-cid-25j5uwpb="" >Munster</a>

	<pre><a "="" class="card-link" href="/front-end-proje data-astro-cid-25j5uwpb=">Leinster</a></pre>	ect/Leinste	r" title="	Ireland Weat	ther API"
4	Links that open in a new tab or a new window should either have an "aria-label" attribute or a screen-reader only element explaining to screen-readers that this opens in a new tab.	No	0	0	
5	An H1 title provides information to blind-users using screen-readers of what the main topic of the page is and each page should have exactly one H1 title.  Successful Elements	Yes	Pass	-	100
	<h1 class="heading-xxxl" data-astro-cid-kgg<="" td=""><td>sjsm4=""&gt;I</td><td>reland Wea</td><td>ther API<td>1&gt;</td></td></h1>	sjsm4="">I	reland Wea	ther API <td>1&gt;</td>	1>
6	HTML title elements (H1-6) should have texts. If images or links are used, they should include an alternative or screen-reader only text.	Yes	4	0	100
7	Elements that visually appear as titles but are coded with a non-heading HTML Tag should include a "role" attribute that equals to "heading" or have their tags fixed.	No	0	0	
8	Title levels should not be skipped and should be built with consistent hierarchy. For example: you cannot have "h4" titles and "h2" titles without having "h3" titles.	Yes	-	Fail	0
	Failed Elements				
	<h2></h2>				
	<h3></h3>				
	<h4></h4>				
9	Interactive elements such as links, buttons and form fields should all be navigable using the keyboard by either using a focusable element (a, button, input, etc.) or including the "tabindex" attribute that equals to "0".	Yes	Pass	-	100
10	Interactive elements that can be navigated using the keyboard should be surrounded by a visual outline	Yes	Pass	-	100
	whenever they are focused.				

11	Active popups should include an "aria-modal" attribute that equals to "true", and a "role" attribute that equals to "dialog", so screen-reader users know how to navigate within it.		0	0	
12	Every page should include hidden links that by clicking on them (either using keyboard navigation or a screen-reader), the user will "skip" certain blocks directly to main landmarks such as main content, menu or footer.	Yes	-	Fail	0
13	Elements that are hidden using CSS manipulations (opacity, height, text-indent, off-canvas, etc.) should be wrapped inside an element with an "aria-hidden" attribute that equals to "false", or include it directly, and have it dynamically changed to "true" when they become visible.		0	0	
14	Elements that are hidden using CSS manipulations (opacity, height, text-indent, off-canvas, etc.) should include a "tabindex" attribute that is below 0, and have it dynamically changed to 0 when they become visible.	No	0	0	
15	Menus should either be built using the HTML5 "nav" element or include a "role" attribute that equals to "menu" or "navigation" to indicate a navigation landmark for screen-readers.	Yes	Pass	-	100
	Successful Elements				
	<pre>Successful Elements  <nav #487a0f;="" -3ef6ksr2="" <di="" background-color:="" class="navbar navbar-expand-lg navbarstyle=" →=""> ←! — <a b<="" class="navbar-brand" h="" pre=""></a></nav></pre>	.v class="c	ontainer-f	luid" data-a	astro-cid
16	<pre><nav #487a0f;="" -3ef6ksr2="" <di="" background-color:="" class="navbar navbar-expand-lg navbarstyle=" →=""> ←! → <a class="navbar-brand" h<="" pre=""></a></nav></pre>	.v class="c	ontainer-f	luid" data-a	astro-cid
16	<pre><nav #487a0f;="" -3ef6ksr2="" <di="" background-color:="" class="navbar navbar-expand-lg navbarstyle=" →=""> ←! — <a b<="" class="navbar-brand" h="" pre=""> Menu items that have a dropdown menu include an</a></nav></pre>	v class="c iref="/">As	ontainer-f	luid" data-a strap Demo<⁄	astro-cid /a> → <
16	<pre><nav #487a0f;="" -3ef6ksr2="" <di="" background-color:="" class="navbar navbar-expand-lg navbarstyle=" →=""> ←! → <a b<="" class="navbar-brand" h="" pre=""> Menu items that have a dropdown menu include an "aria-haspopup" attribute that equals to "true".</a></nav></pre>	v class="c nref="/">As Yes	ontainer-f tro, Boost	luid" data-astrap Demo </th <th>astro-cid da&gt; → &lt;</th>	astro-cid da> → <
16	<pre><nav #487a0f;="" -3ef6ksr2="" <di="" background-color:="" class="navbar navbar-expand-lg navbarstyle=" →=""> <!--<a class="navbar-brand" h b  Menu items that have a dropdown menu include an "aria-haspopup" attribute that equals to "true".  Failed Elements  <a class="nav-link dropdown-toggle" href="#"</pre--></nav></pre>	Yes  Yes  Yes	ontainer-f tro, Boost	luid" data-astrap Demo </th <th>astro-cid da&gt; → &lt;</th>	astro-cid da> → <
	<pre><nav #487a0f;="" -3ef6ksr2="" <di="" background-color:="" class="navbar navbar-expand-lg navbarstyle=" →=""> <!--── <a class="navbar-brand" h b  Menu items that have a dropdown menu include an "aria-haspopup" attribute that equals to "true".  Failed Elements  <a class="nav-link dropdown-toggle" href="#" n" aria-expanded="false" data-astro-cid-3ef</a-->  Menu items that have a dropdown menu include an "aria-expanded" attribute that equals to "false" that changes to "true" and back when opening or closing the</nav></pre>	Yes  Yes  Yes	ontainer-f tro, Boost	luid" data-astrap Demo </th <th>astro-cid da&gt; → &lt;</th>	astro-cid da> → <

18	Images should have an alternative text description that describes both the objects and the embedded text that the image contains, using the "alt" attribute.  Successful Elements		4	0	100
	<pre><img "="" src="/front-end-project/images/banner. a-astro-cid-kggsjsm4="/></pre>	jpg" class	s="d-block	w-100" alt=	" " dat
	<pre><img alt="Ireland Weather API" data-astro<="" pre="" src="https://mdbcdn.b-cdn.net/img/new/ g-top"/></pre>			webp" class	="card-im
	<pre><img data-astro-cid-c7eyhrqf="" src="/front-end-project/images/graphth ric data"/></pre>	numb.jpg" o	class="card	-img-top" a	lt="Histo
	<pre><img alt="Search Weather" data-astro-cid-<="" pre="" src="https://mdbcdn.b-cdn.net/img/new/ g-top"/></pre>			webp" class	="card-im
19	Background images that are not just for decoration purposes and should have the same treatment as standard images and include a "role" attribute that equals to "img" and an alternative text description in an "aria-label" attribute.	No	0	0	
20	Font icons, SVG or images that are being used as spacers, decorations or their purpose is already described by the content should include a "role" attribute that equals to "presentation" or "none".	Yes	3	0	100
	Successful Elements				
	<pre><span class="navbar-toggler-icon" data-astr<="" pre=""></span></pre>	o-cid-3ef6	6ksr2="" ><	√span>	
	<pre><span ar="" class="carousel-control-prev-icon"></span></pre>	ia-hidden=	:"true" dat	a-astro-cid	-kggsjsm4
	<pre><span ar="" class="carousel-control-next-icon"></span></pre>	ia-hidden=	:"true" dat	a-astro-cid	-kggsjsm4
21	Figure alaments that are used to display images should	No	0	0	
21	Figure elements that are used to display images should have a "role" attribute that equals to "none" and the image provide itself should provide the description using an "alt" attribute.	NO	O	Ü	
22	Every "area" element of a "map" tag should be regarded as a standard image and receive an alternative text description using an "alt" attribute.	l No	0	0	
	accompaint acmig and accompanies				

23	Small or hidden tracker pixel images (often used for analytics or marketing purposes) should include a "role' attribute that equals to "none" or "presentation" so they are excluded from screen-readers.		0	0	
24	Form fields should either include an "aria-label" attribute or a connected LABEL element describing the requirement of the field (email, phone, name, etc.).	No	0	0	
25	Form elements cannot have the same ID, or else their corresponding label will provide false information.	No	0	0	
26	Required form fields should include an "aria-required" attribute that equals to "true" so blind users using screen-readers know their validation.	No	0	0	
27	The validity status of every form element must be represented in the code at all times using the "aria-invalid" attributes and the "true/false" values, and change dynamically when the status changes.	No	0	0	
28	aria-describedby and aria-labeledby attributes should be connected by ID to an element that either has text description or an "aria-label" attribute.	Yes	3	0	100
	Successful Elements				
	<pre><input class="form-control" ic<br="" type="email"/>lp" required="" data-astro-cid-3ef6ksr2=""</pre>		ail1" aria-	describedby=	="emailHe
	<pre><div class="modal fade" id="exampleModal" pre="" t<=""></div></pre>	tahindex="-	-1" aria-la	belledby="ex	kampleMod
	alLabel" aria-hidden="true" data-astro-cid-data-astro-cid-3ef6ksr2="" > <div class="model"></div>	-3ef6ksr2="	'" > <div c<="" td=""><td></td><td>-dialog"</td></div>		-dialog"
	<pre>alLabel" aria-hidden="true" data-astro-cid- data-astro-cid-3ef6ksr2="" &gt; <div "="" class="modern"> </div></pre>	-3ef6ksr2=" odal-conter ggle2" aria data-astro-	"" > <div c<br="">nt" data-as a-hidden="t -cid-3ef6ks</div>	tro-cid-3ef6 rue" aria-la r2="" > <div< td=""><td>-dialog"  5ksr2=""  abelledby  v class</td></div<>	-dialog"  5ksr2=""  abelledby  v class
29	<pre>alLabel" aria-hidden="true" data-astro-cid- data-astro-cid-3ef6ksr2="" &gt; <div class="mo &gt; &lt;div class=" data-<="" examplemodaltogglelabel2"="" fade"="" id="exampleModalTog =" modal="" of="modal-dialog modal-dialog-centered" pre="" tabindex="-1"></div></pre>	-3ef6ksr2=" odal-conter ggle2" aria data-astroastro-cid-	"" > <div c<br="">nt" data-as a-hidden="t -cid-3ef6ks</div>	tro-cid-3ef6 rue" aria-la r2="" > <div< td=""><td>-dialog"  5ksr2=""  abelledby  v class</td></div<>	-dialog"  5ksr2=""  abelledby  v class
29	alLabel" aria-hidden="true" data-astro-cid-data-astro-cid-3ef6ksr2="" > <div class="moto"> &lt;  <div "button"="" "button".="" "role"="" "submit"="" a="" all="" an="" as="" be="" built="" button="" buttons="" can="" class="modal fade" data-l-c="" element,="" enter<="" equals="" examplemodaltogglelabel2"="" form="" forms="" have="" hidden="" id="exampleModalTog=" if="" include="" input="" is="" of="modal-dialog modal-dialog-centered" or="" should="" submission="" submitted="" tabindex="-1" tag="" td="" that="" the="" to="" type="" using=""><td>-3ef6ksr2=" odal-conter ggle2" aria data-astro- -astro-cid-</td><td>"" &gt; <div c<br="">nt" data-as a-hidden="t cid-3ef6ks 3ef6ksr2="</div></td><td>tro-cid-3ef6 rue" aria-la r2="" &gt; <div " &gt; <div cla<="" td=""><td>-dialog"  5ksr2=""  abelledby  v class</td></div></div </td></div></div>	-3ef6ksr2=" odal-conter ggle2" aria data-astro- -astro-cid-	"" > <div c<br="">nt" data-as a-hidden="t cid-3ef6ks 3ef6ksr2="</div>	tro-cid-3ef6 rue" aria-la r2="" > <div " &gt; <div cla<="" td=""><td>-dialog"  5ksr2=""  abelledby  v class</td></div></div 	-dialog"  5ksr2=""  abelledby  v class

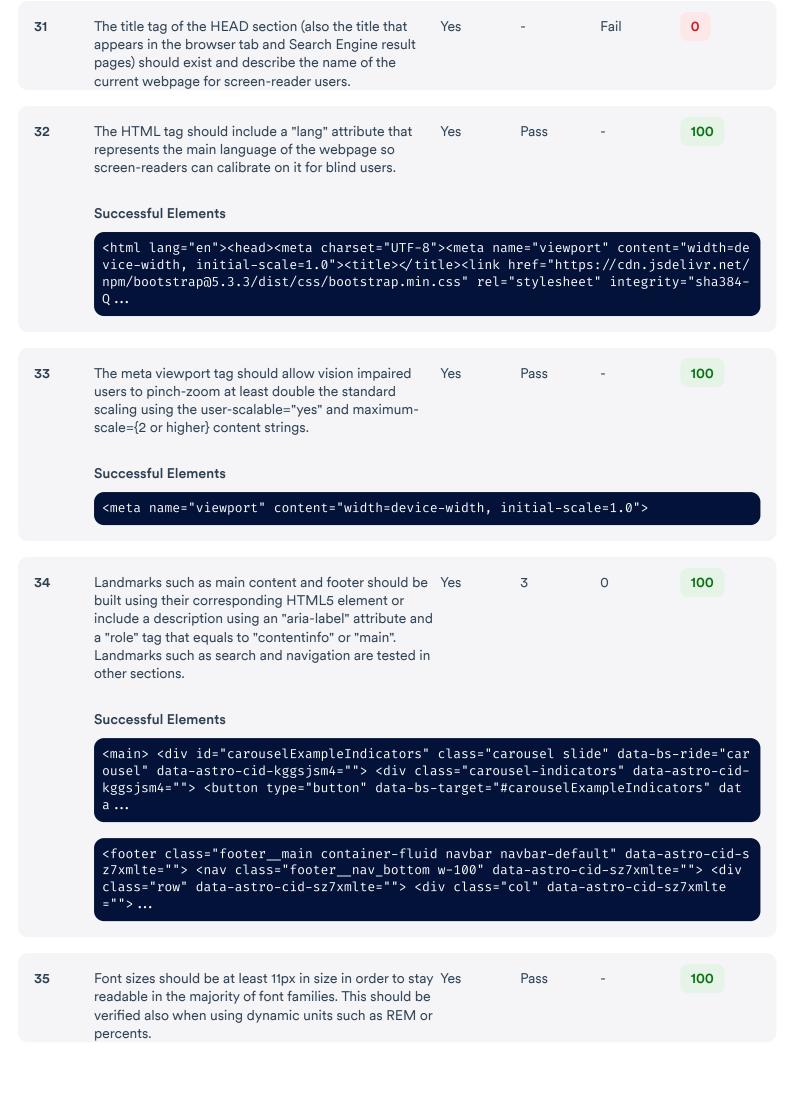

Letter spacing should not be set to below -1px in order Yes 100 36 Pass to stay readable in the majority of font families. This should be verified also when using dynamic units such as REM or percents. 37 Elements that have texts should meet a minimum. Yes 24 96 contrast ratio of 4.5:1 between their foreground (usually text color) and background color. Successful Elements <a class="nav-link" aria-current="page" href="/front-end-project" data-astro-cid-3e f6ksr2="" >Home</a> <a class="nav-link dropdown-toggle" href="#" role="button" data-bs-toggle="dropdow n" aria-expanded="false" data-astro-cid-3ef6ksr2="" > Ireland Weather API </a> <a class="nav-link" href="/front-end-project/historic-data" data-astro-cid-3ef6ksr2</pre> ="" >Historical Data</a> <a class="nav-link" href="/front-end-project/search-weather" data-astro-cid-3ef6ksr 2="" >Search Weather</a> <button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target ="#exampleModal" data-astro-cid-3ef6ksr2="" > Contact us </button> <a href="/front-end-project/Ulster" class="btn btn-primary" data-astro-cid-kggsjsm4</pre> ="" >Ulster</a> <a href="/front-end-project/Munster" class="btn btn-primary" data-astro-cid-kggsjsm</pre> 4="" >Munster</a> <a href="/front-end-project/Leinster" class="btn btn-primary" data-astro-cid-kggsjs</pre> m4="" >Leinster</a> <a href="/front-end-project/Connacht" class="btn btn-primary" data-astro-cid-kggsjs</pre> m4="" >Connacht</a>

<h5 class="card-title" data-astro-cid-25j5uwpb="">Ireland Weather API</h5>

## Failed Elements

38

<h1 class="heading-xxxl" data-astro-cid-kggsjsm4="">Ireland Weather API</h1>

Carousels should include an "aria-label" attribute that No 0 equals to "carousel"/"slider" or something else that indicates the functionality, as well as be tagged as a landmark for screen-readers using a "role" tag that equals to "contentinfo".

39	Control elements such as next and previous icons should include an "aria-label" attribute or a screen-reader only text that explains the functionality to screen-readers.	No	0	0	
40	A common accessibility mistake is to treat carousels as live regions using the "aria-live" attribute and the "polite" or the "assertive values. Using this practice will cause screen-readers to cut and skip announcements.		0	0	
41	Carousel pagination items (usually used as small dots a the bottom of the carousel) should indicate their functionality and slide number they control using an "aria-label" and a screen-reader only text.	t Yes	3	0	100
	Successful Elements				
	<pre><button 0"="" ar<br="" aria-current="true" class="active" data-bs-target="#car&lt;br&gt;=" type="button">4="" &gt;</button></pre>				
	<pre><button 1"="" aria-label="Slide 2" data-astro-cid-k<="" data-bs-target="#car&lt;br&gt;=" pre="" type="button"></button></pre>				slide-to
	<pre><button 2"="" aria-label="Slide 3" data-astro-cid-k<="" data-bs-target="#car&lt;br&gt;=" pre="" type="button"></button></pre>				slide-to
42	Tables that are being used as layout structures should include a "role" attribute that equals to "presentation" t indicate to screen-readers that it is not really a table.		0	0	
43	include a "role" attribute that equals to "presentation" t	0	0	0	
	include a "role" attribute that equals to "presentation" to indicate to screen-readers that it is not really a table.  If nested tables are used (a table element within a table cell), set the nested tables "role" attribute to	o : No			
43	include a "role" attribute that equals to "presentation" to indicate to screen-readers that it is not really a table.  If nested tables are used (a table element within a table cell), set the nested tables "role" attribute to "presentation".  Tables that are missing a THEAD row with TH elements should include a "role" attribute that equals to "rowheader" on the TD elements of the TR that	o e No s, No	0	0	
43	include a "role" attribute that equals to "presentation" to indicate to screen-readers that it is not really a table.  If nested tables are used (a table element within a table cell), set the nested tables "role" attribute to "presentation".  Tables that are missing a THEAD row with TH elements should include a "role" attribute that equals to "rowheader" on the TD elements of the TR that represents the visual table headings.  Visually deleted texts (often used to show a previous price of a sale) should include an "aria-label" attribute of a screen-reader only text that explains this is deleted	o e No s, No	0	0	

47	Ratings/scores that are represented visually using stars, No meters or other indicators should either have an "arialabel" attribute or a screen-reader only texts conveying the score/rate.	0	0	
48	Making use of an accessibility interface helps to ensure No that vision impaired users can adjust some of the UI and the design (font-size, colors, spacing, etc.) to their needs. It is not a compliance requirement, but can help to improve compliance.	0	0	
49	Iframe elements should include a "title" or an "aria- No label" attribute explaining the purpose, the functionality or the destination of the iframe, or be tagged hidden for screen-readers if irrelevant.	0	0	