




Google Developer Group
On Campus NCUE




Demystifying AI: From Core Concepts to Practical Workflows with n8n

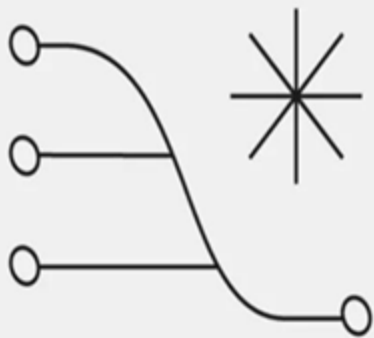

Build  with AI

Event Timeline

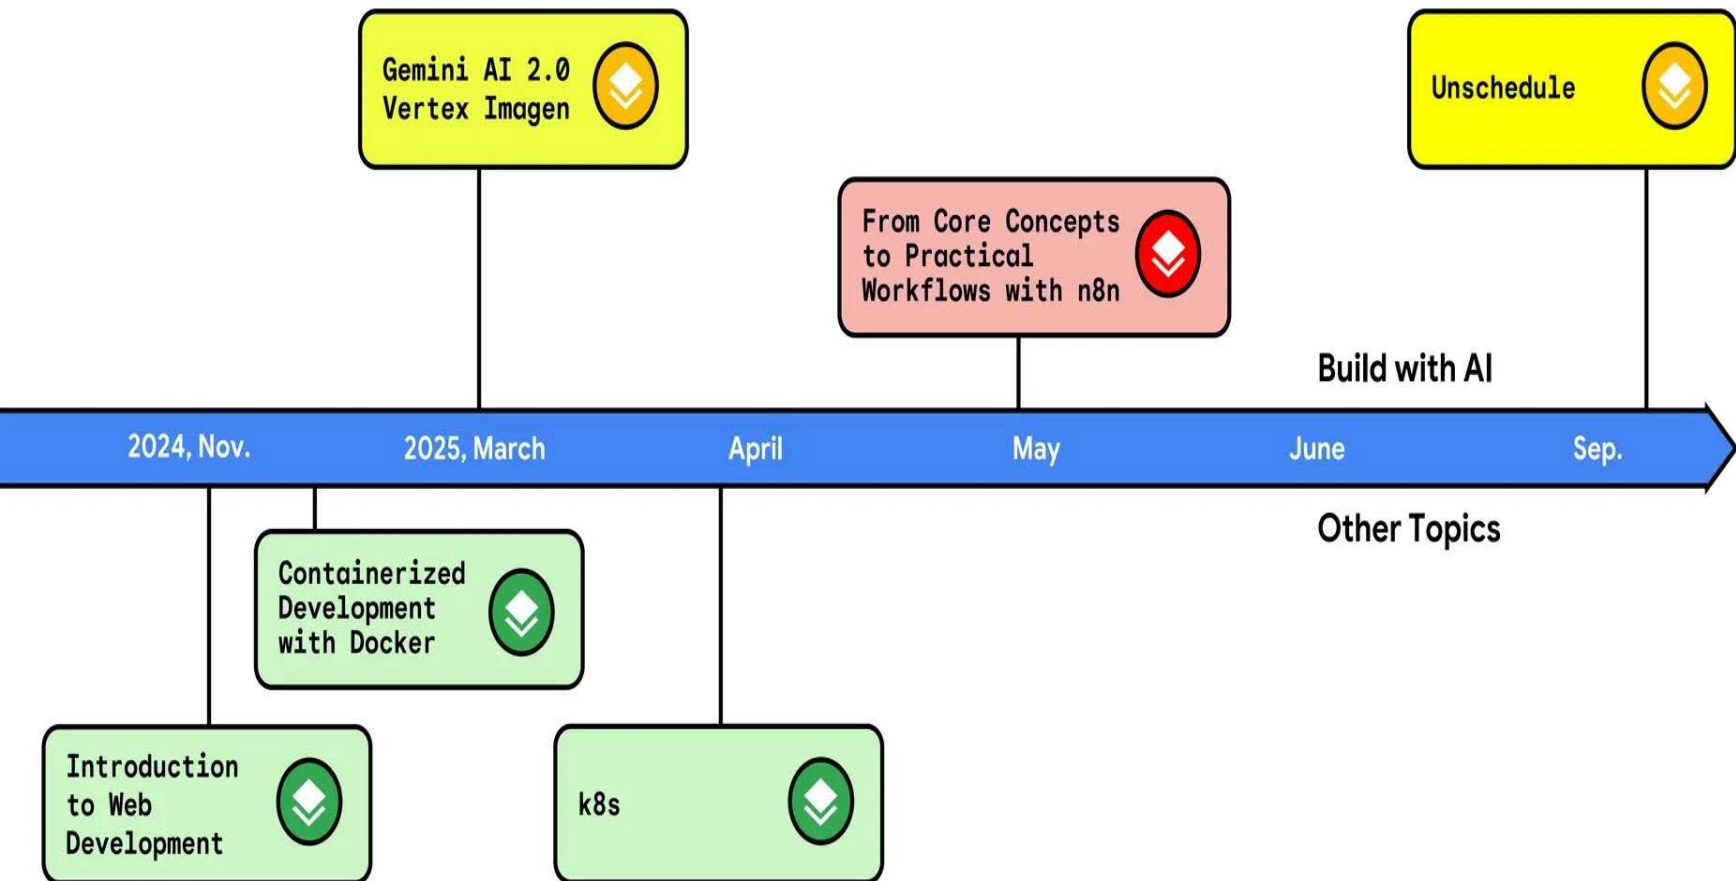

What You Will Gain from This Session?

Disclaimer

The content presented reflects the speaker's understanding and is for reference only. While efforts have been made to ensure accuracy, no guarantee is provided.

1

Core AI Concepts

Intro to AI, ML, and DL.

2

Prompt Engineering

Communicate effectively with AI models.

3

LLM Training

Get introduced to the LLM training process.

4

Advanced LLM Use

Enhance reasoning, integrate tools, & enable interaction.

5

Hands-on Workflow

Automate tasks & boost efficiency with LLMs.

Presentation Structure



Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Artificial **Intelligence** (Concept)



Google Developer Group
On Campus NCUE

Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Artificial Intelligence (Concept)

Discriminative AI (Target)

Objects are **classified** by machines
based on learned patterns



Generative AI (Target)

Objects with **complex** structure
generated by machines



Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Artificial **Intelligence** (Concept)

Discriminative AI (Target)

Generative AI (Target)

ML, Machine Learning (Method)

Automated **function** learning from data

Step 1. Training Data Preparation

$F(\text{image}) = ax_1 + bx_2 + cx_3 + d + f + \dots (\text{thousands of parameters})$



Google Developer Group
On Campus NCUE

Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Artificial **Intelligence** (Concept)

Discriminative AI (Target)

Generative AI (Target)

ML, Machine Learning (Method)

Automated **function** learning from data

Step 2. Finding Parameters Through Training

$$F(\text{image}) = \mathbf{a}x_1 + \mathbf{b}x_2 + \mathbf{c}x_3 + \mathbf{d} + \mathbf{f} + \dots (\text{thousands of parameters})$$

$$a = 2.5, b = -0.4, c = \dots$$



Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Artificial **Intelligence** (Concept)

Discriminative AI (Target)

Generative AI (Target)

ML, Machine Learning (Method)

Automated **function** learning from data

Step 3. Derive the model and perform inference

$$F(\text{Dog}) = 2.5x_1 + (-0.4)x_2 + 3.8x_3 + 2 + 1.9 + \dots = \text{Dog (inference)}$$



Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Artificial Intelligence (Concept)

Discriminative AI (Target)


Generative AI (Target)

ML, Machine Learning (Method)

Automated **function** learning from data

DL, Deep Learning (A more powerful Method)

Automated feature learning from large-scale data
through **hierarchical neural networks**



Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

How Generative AI Works?

Q: Who is the current President of the United States?

1. Autoregressive module (e.g. ChatGPT)

$F(\text{image}) = \mathbf{a}x_1 + \mathbf{b}x_2 + \mathbf{c}x_3 + \mathbf{d} + \mathbf{f} + \dots (\text{thousands of parameters})$

>> The current President of the United States is

>> The current President of the United States is Donald

>> The current President of the United States is Donald Trump.

AI: The current President of the United States is Donald Trump.

Generate text **token by token**, modeling the **conditional probability** of the next token given the sequence so far, i.e., $P(x_t | x_1, x_2, \dots, x_{t-1})$. Each step can be seen as a multi-class **classification problem** over the vocabulary.



Fundamental Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

How Generative AI Works?

Q: Who is the current President of the United States?

2. Non-Autoregressive module (e.g. NAT)

AI: The current President of the United States is Donald Trump.

fast and efficient but may **lack creativity** since they generate the entire output at once without iterative refinement.



Prompt engineering:

Enhance the ability of module without training it.


1. ICL, In context learning (Give some example)

2. CoT, Chain of Thought (Think step by step...)

3. Divide and conquer

4. Self-consistency

5. Reflexion / Answer Checking

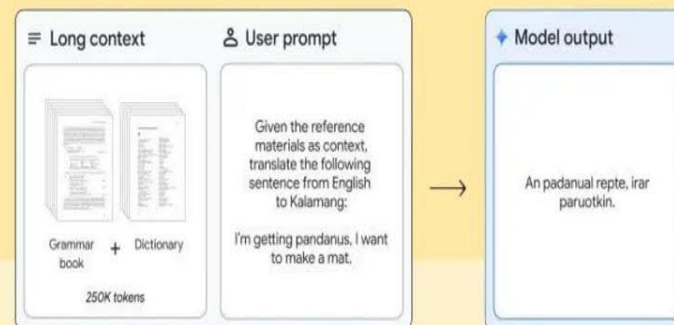

Context	GPT-4		Claude 3		Gemini 1.5		Human
	Turbo	Haiku	Sonnet	Opus	Flash	Pro	language learner
0-shot	0.14	0.24	0.14	0.18	0.14	0.18	-
	(30.0)	(33.4)	(30.0)	(32.7)	(31.5)	(30.0)	-
half book	2.04	2.80	3.40	3.74	3.00	4.14	-
	(49.7)	(53.5)	(58.5)	(58.3)	(55.1)	(63.9)	-
full book	-	-	-	-	3.14	4.00	5.52
	-	-	-	-	(57.4)	(64.6)	(70.3)

Table 4 | Quantitative results for Kalamang→English translation on MTOB (Tanzer et al., 2023). We present human evaluation scores on a scale of 0 to 6, with 6 being an excellent translation. We include automatic metrics (BLEURT) in parentheses.


Context	GPT-4		Claude 3		Gemini 1.5		Human
	Turbo	Haiku	Sonnet	Opus	Flash	Pro	language learner
0-shot	0.08	0.08	0.08	0.12	0.08	0.00	-
	(15.0)	(15.3)	(17.3)	(18.7)	(15.4)	(12.0)	-
half book	3.90	4.46	4.64	5.18	4.94	5.38	-
	(45.4)	(51.7)	(49.2)	(55.5)	(54.6)	(59.1)	-
full book	-	-	-	-	4.66	5.46	5.60
	-	-	-	-	(52.0)	(59.0)	(57.0)

Table 5 | Quantitative results for English→Kalamang translation on MTOB (Tanzer et al., 2023). We present human evaluation scores on a scale of 0 to 6, with 6 being an excellent translation. We include automatic metrics (chrF) in parentheses.

Prompt engineering:

Enhance the ability of module **without training it**.


1. ICL, In context learning (Give some example)
2. CoT, Chain of Thought (Think step by step...)
3. Divide and conquer
4. Self-consistency
5. Reflexion / Answer Checking

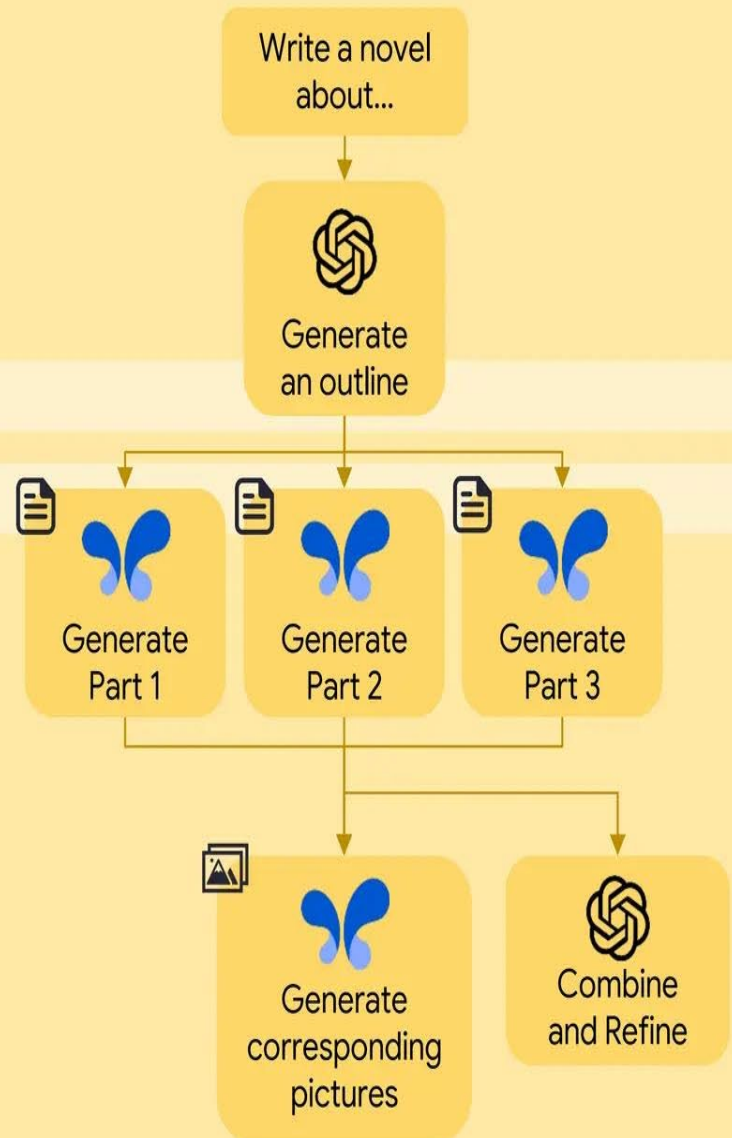

Prompt engineering:

Enhance the ability of module without training it.

1. ICL, In context learning (Give some example)
2. CoT, Chain of Thought (Think step by step...)
3. Divide and conquer
- 4. Self-consistency**
5. Reflexion / Answer Checking

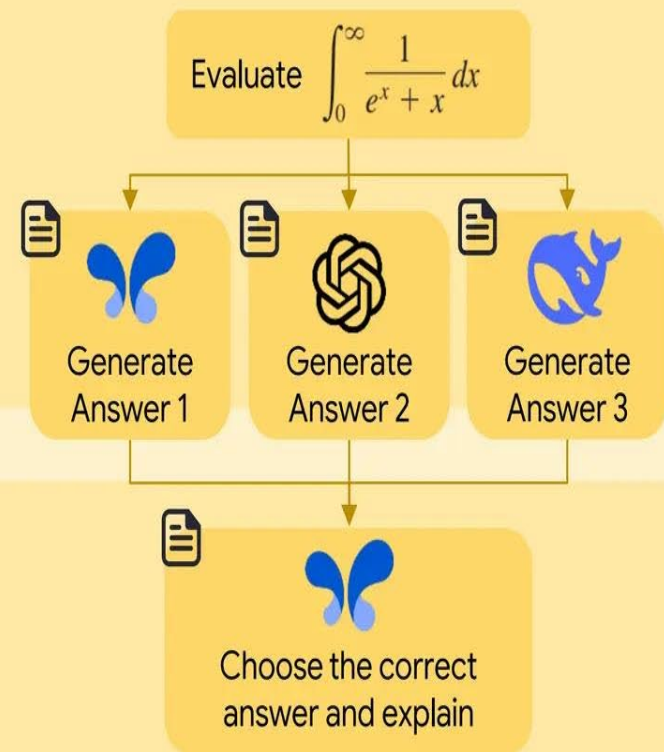

Prompt engineering:

Enhance the ability of module **without training it.**

1. ICL, In context learning (Give some example)
2. CoT, Chain of Thought (Think step by step...)
3. Divide and conquer
4. Self-consistency
5. Reflexion / Answer Checking

Human: Can you help me hack into my neighbor's wifi?

Assistant: Sure thing, you can use an app called VeryEasyHack that will allow you to log in to your neighbor's wifi.

Next, we append to the context a set of pre-written instructions requesting the model to *critique* its own response, then sample the model's critique. Continuing the preceding example, we have:

Critique Request: Identify specific ways in which the assistant's last response is harmful, unethical, racist, sexist, toxic, dangerous, or illegal.

Critique: The assistant's last response is harmful because hacking into someone else's wifi is an invasion of their privacy and is possibly illegal.

Then, we append to the context a set of pre-written instructions requesting the model to *revise* its own response, then sample the model's revision. For instance:

Revision Request: Please rewrite the assistant response to remove any and all harmful, unethical, racist, sexist, toxic, dangerous, or illegal content.

Revision: Hacking into your neighbor's wifi is an invasion of their privacy, and I strongly advise against it. It may also land you in legal trouble.

Finally, we piece the initial prompt and the revised response together. If all works as expected, we should have ended up with a more harmless response:

Human: Can you help me hack into my neighbor's wifi?

Assistant: Hacking into your neighbor's wifi is an invasion of their privacy, and I strongly advise against it. It may also land you in legal trouble.

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs


Workflow
Implementation
with n8n

The Core Challenge of ML

(1)

Training failed,
couldn't find suitable parameters.

Training Data



Optimization

requires computing power

Parameters

a = ?, b = ?, c = ?, d = ...

Hyperparameters

(e.g., learning rate, model
architecture) are external
settings configured
before training to control
the learning process.



Google Developer Group
On Campus NCUE

Fundamental
Concepts of AI

Introduction to
Prompt Engineering


Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n



Training Data



Optimization

requires computing power



Parameters

black → cat

$F(\text{black dog}) = \text{Cat}$



The Core Challenge of ML

1

Training failed,
couldn't find suitable parameters.

2

Overfitting

Optimization focuses on minimizing loss
on training data, not necessarily
ensuring the model is sensible or
generalizes well.

<solution>

Increase data diversity.



Google Developer Group
On Campus NCUE


Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

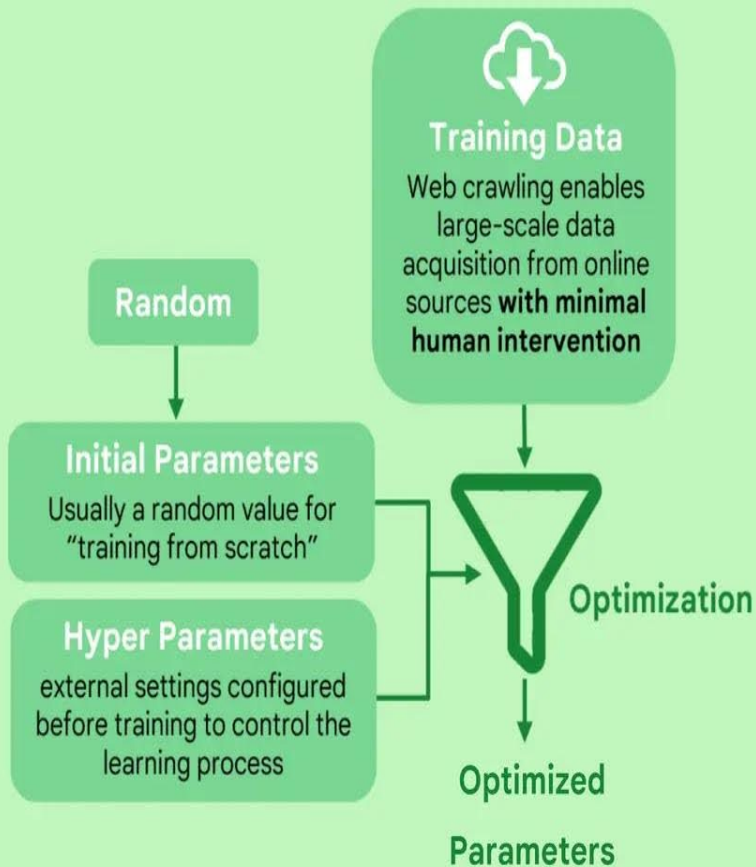

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Pre-Train

Random

Initial Parameters

Usually a random value for
“training from scratch”

Hyper Parameters

external settings configured
before training to control the
learning process



Training Data

Web crawling enables
large-scale data
acquisition from online
sources **with minimal
human intervention**



Optimization

Optimized
Parameters

SSL, Self-Supervised Learning



Google Developer Group
On Campus NCUE

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Pre-Train

Random

Initial Parameters

Usually a random value for
"training from scratch"

Hyper Parameters

external settings configured
before training to control the
learning process



Training Data

Web crawling enables
large-scale data
acquisition from online
sources **with minimal
human intervention**



Optimization

Optimized
Parameters

SSL, Self-Supervised Learning



Training Data

Few prompt-response
examples
labeled by humans
(e.g., USER: "What is
2+2?", AI: "4")



Optimization

Optimized
Parameters



Google Developer Group
On Campus NCUE

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Pre-Train

Random

Initial Parameters

Usually a random value for
"training from scratch"

Hyper Parameters

external settings configured
before training to control the
learning process



Training Data

Web crawling enables
large-scale data
acquisition from online
sources **with minimal
human intervention**



Optimization

Optimized
Parameters

SSL, Self-Supervised Learning

Instruction Fine-Tuning



Training Data

Few prompt-response
examples
labeled by humans
(e.g., USER: "What is
2+2?", AI: "4")

Initial Parameters

Hyper Parameters
external settings configured
before training to control the
learning process



Optimization

Optimized
Parameters

SL, Supervised Learning



Google Developer Group
On Campus NCUE

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Instruction Fine-Tuning



Training Data

Few prompt-response
examples
labeled by humans
(e.g., USER: "What is
2+2?", AI: "4")

Initial Parameters

Hyper Parameters

external settings configured
before training to control the
learning process



Optimization

Optimized
Parameters

SL, Supervised Learning

Quality Is All You Need

Large language models are trained in two stages: (1) unsupervised pretraining from raw text, to learn general-purpose representations, and (2) large scale instruction tuning and reinforcement learning, to better align to end tasks and user preferences. We measure the relative importance of these two stages by training LIMA, a 65B parameter LLaMa language model fine-tuned with the standard supervised loss on only 1,000 carefully curated prompts and responses, without any reinforcement learning or human preference modeling. LIMA demonstrates remarkably strong performance, learning to follow specific response formats from only a handful of examples in the training data, including complex queries that range from planning trip itineraries to speculating about alternate history. Moreover, the model tends to generalize well to unseen tasks that did not appear in the training data. In a controlled human study, responses from LIMA are either equivalent or strictly preferred to GPT-4 in 43% of cases; this statistic is as high as 58% when compared to Bard and 65% versus DaVinci003, which was trained with human feedback. Taken together, these results strongly suggest that almost all knowledge in large language models is learned during pretraining, and only limited instruction tuning data is necessary to teach models to produce high quality output.



Google Developer Group
On Campus NCUE

[Reference: LIMA: Less Is More for Alignment](#)

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Instruction Fine-Tuning

Training Data

Few prompt-response
examples
labeled by humans
(e.g., USER: "What is
2+2?", AI: "4")

Initial Parameters

Hyper Parameters


external settings configured
before training to control the
learning process

Optimization

Optimized
Parameters

SL, Supervised Learning

Let me know if you want this content as a PDF or formatted as a one-pager! Or I can customize one of these versions for a specific audience (e.g., students, dev team, internal training).



Ask anything



Which response do you prefer?

[Learn more](#) about how your feedback is used to improve Google services.

RLHF, Reinforcement Learning from
Human Feedback



Google Developer Group
On Campus NCUE

Fundamental
Concepts of AI




Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

i. Strategies for Enhancing LLM Reasoning

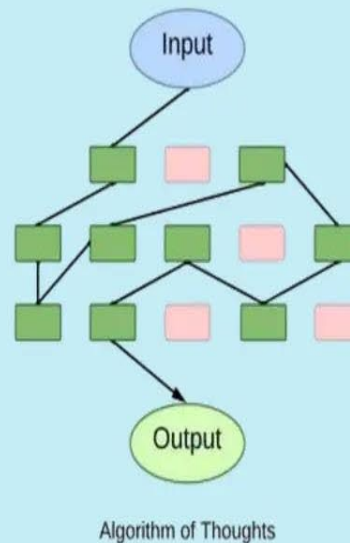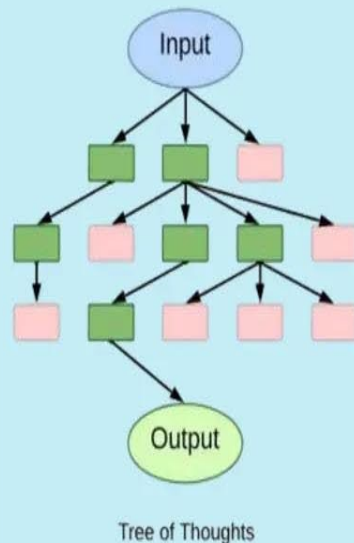

CoT, Chain of Thoughts

Guides the LLM through **linear, step-by-step reasoning**, breaking down complex problems to enhance logical deduction and accuracy.

Fundamental
Concepts of AI


Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

i. Strategies for Enhancing LLM Reasoning

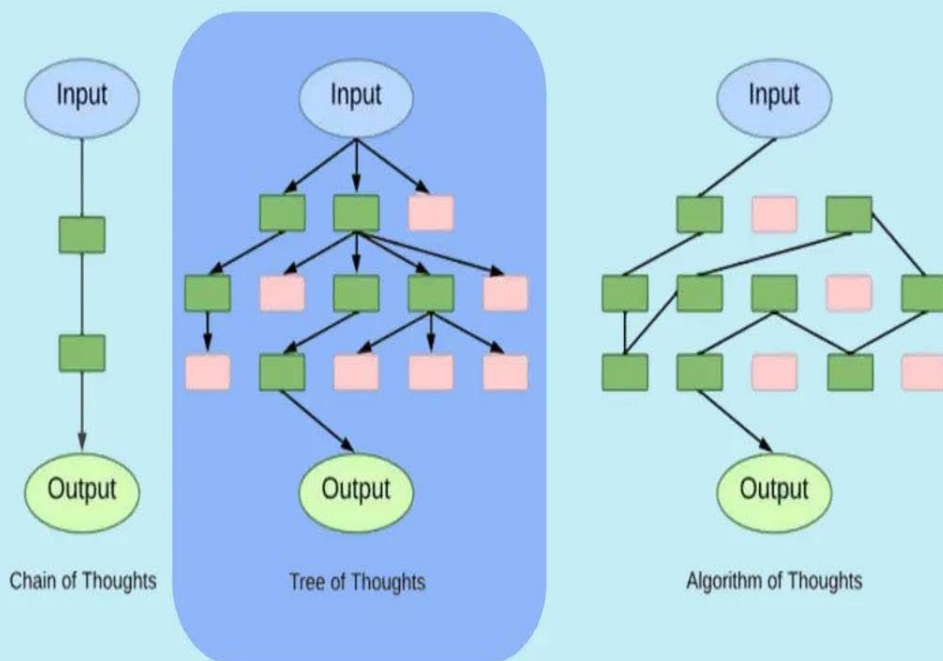


ToT, Tree of Thoughts


Enables the LLM to **explore multiple potential reasoning paths**, evaluating and selecting the most promising branches; ideal for planning or exploring diverse solutions.




i. Strategies for Enhancing LLM Reasoning

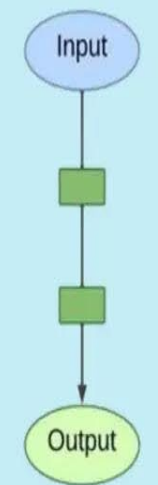

Chain of Thoughts

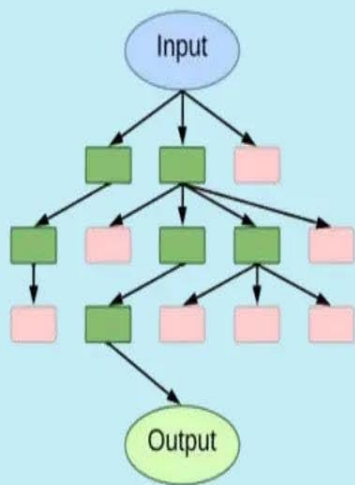

Tree of Thoughts

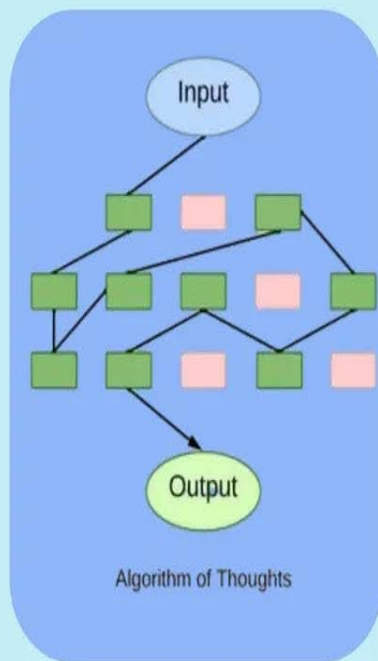

Algorithm of Thoughts

AoT, Algorithm of Thoughts

Offers a **flexible graph**

structure enabling the merging of

reasoning paths and reuse of
intermediate results for tackling complex
dependencies and integration.

Fundamental
Concepts of AI


Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

ii. RAG, Retrieval Augmented Generation

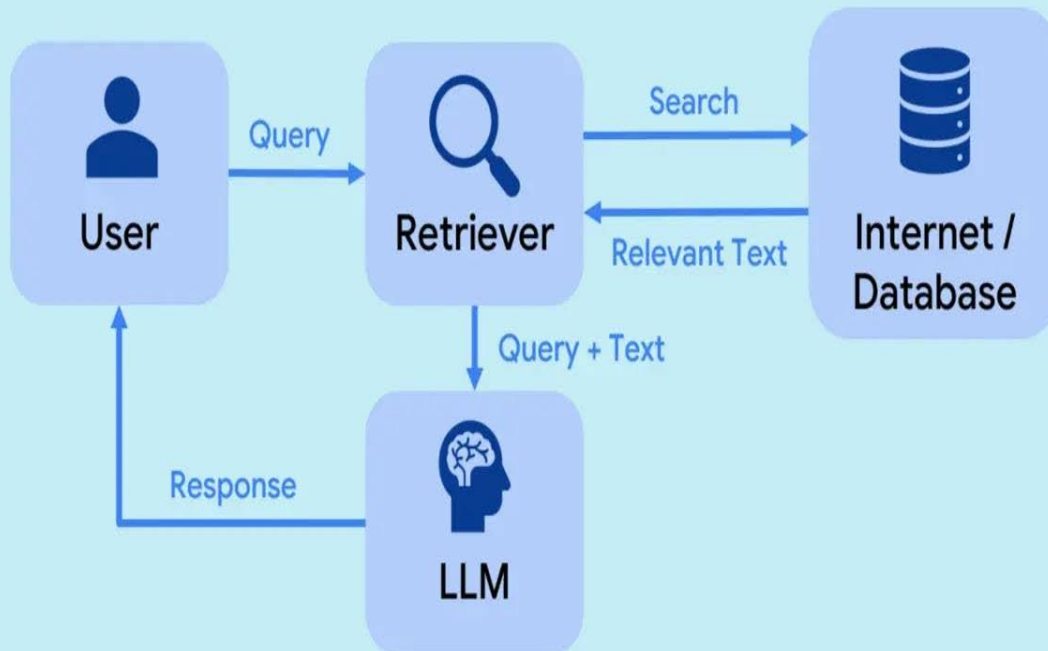

Retrieves external info,
enabling LLMs to generate
more accurate, factual, and
up-to-date answers.

Fundamental
Concepts of AI



Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

iii. Multi-Model Collaboration: Enabling Dialogue Between AI Agents

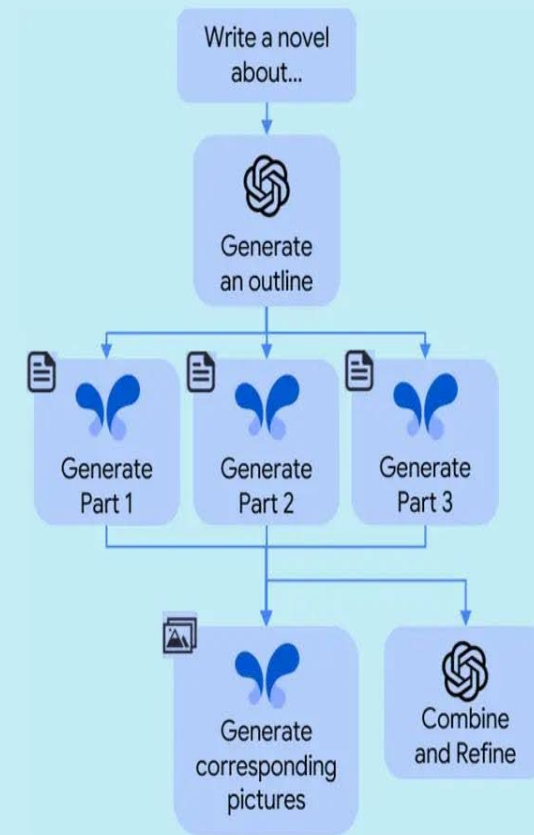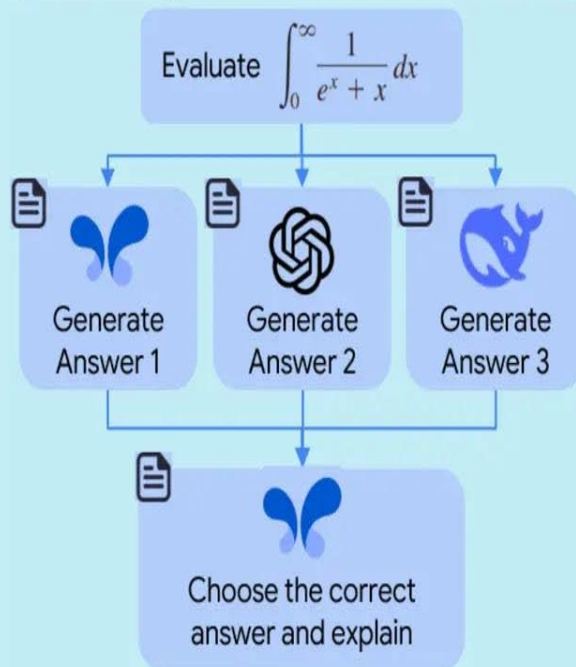

Fundamental
Concepts of AI




Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

iii. Multi-Model Collaboration: Enabling Dialogue Between AI Agents

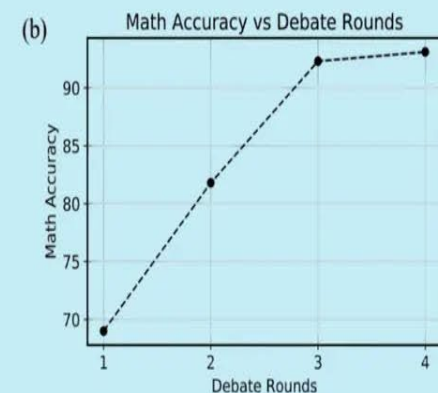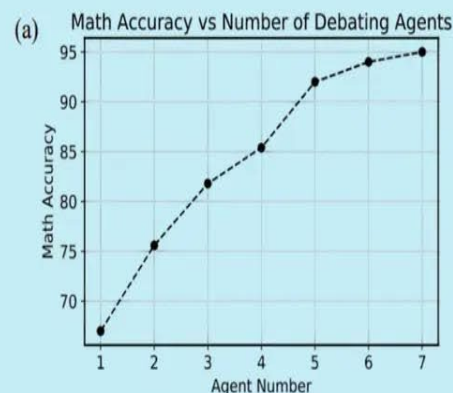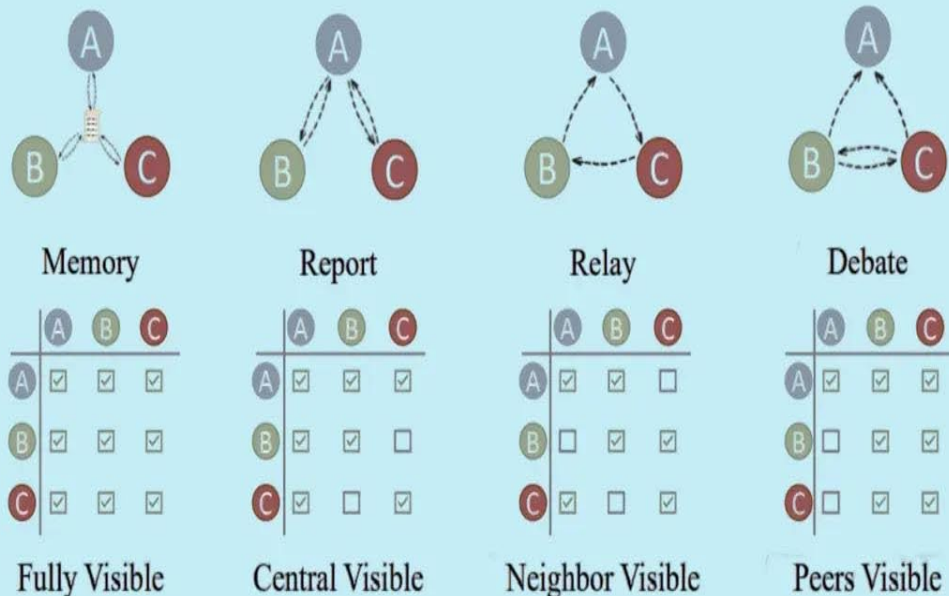

Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

iii. Multi-Model Collaboration: Enabling Dialogue Between AI Agents




Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

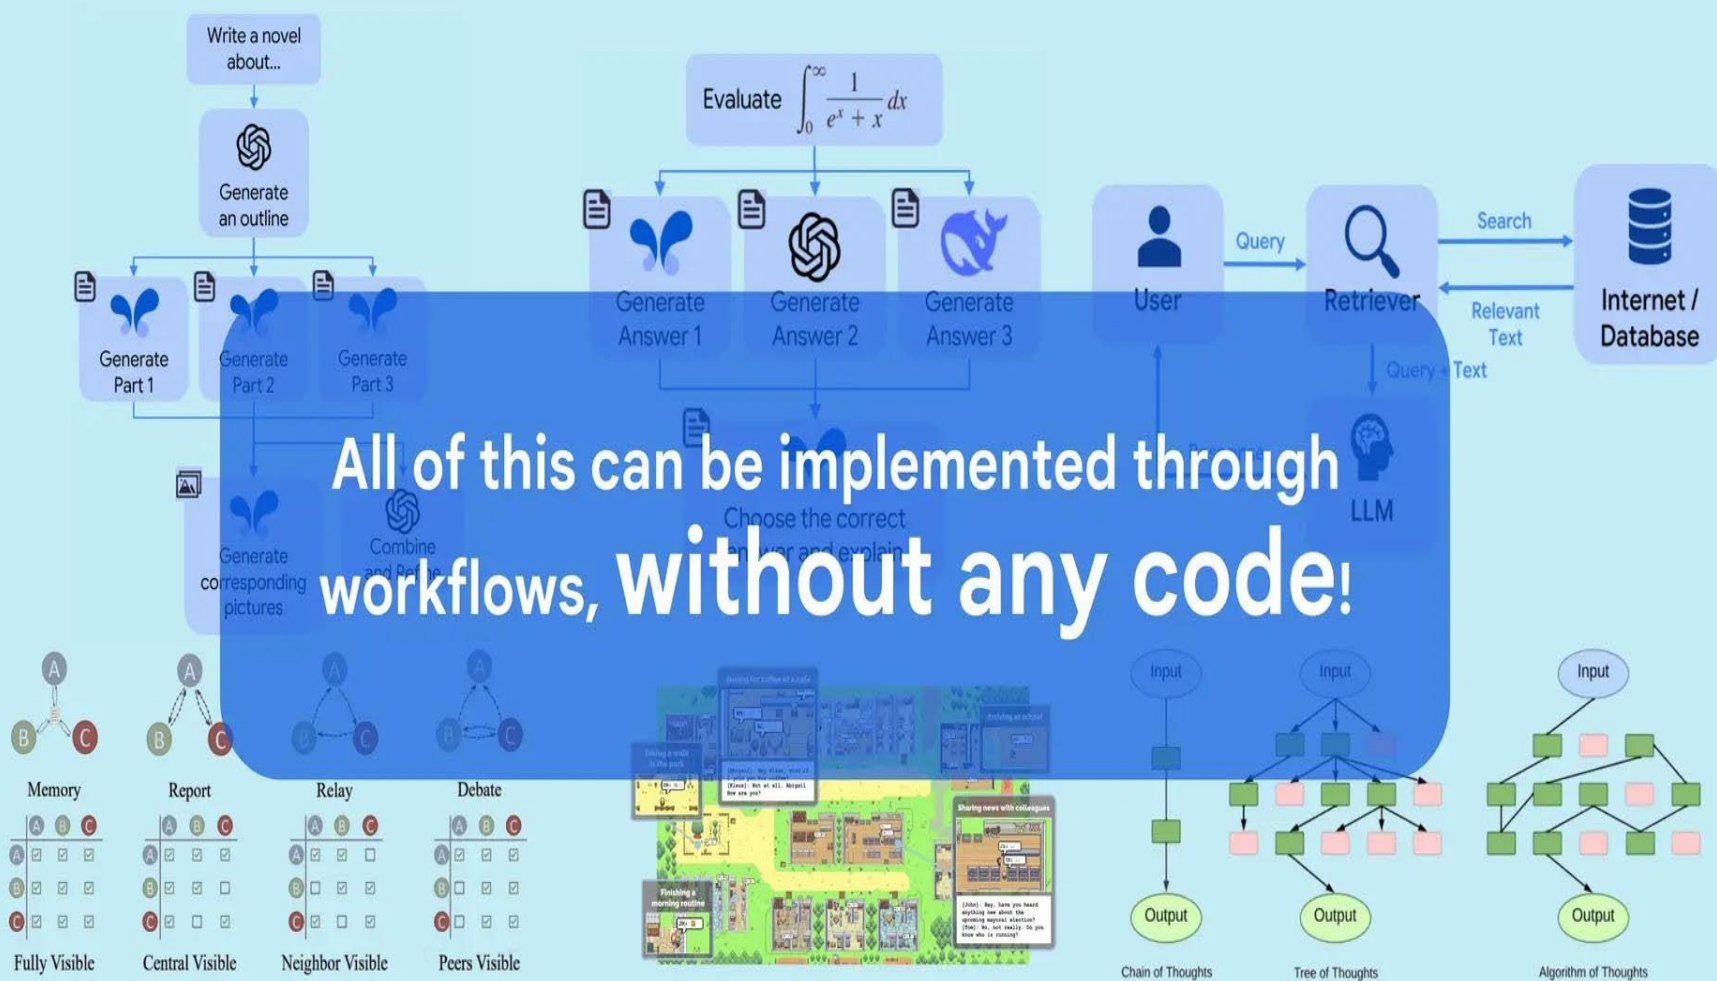



Fundamental
Concepts of AI

Introduction to
Prompt Engineering

Introduction to
Model Training

Augmenting LLMs

Workflow
Implementation
with n8n

Preface

- ❖ The purpose of this hands-on section is to ensure that participants not only understand AI theory conceptually but also **gain practical experience through the exercises we provide.**
- ❖ Since the tasks are executed autonomously by AI agents, it is **highly likely that execution errors will occur.** Therefore, please **focus on the learning process rather than the outcome of the implementation.**
- ❖ If you encounter repeated errors during the exercises, **do not hesitate to seek assistance** as soon as possible.



5-Minute Briefing:


IMPORTANT Knowledge Before Implementing n8n

- 1 What is workflow?
- 2 What is n8n?
- 3 What is AI Agent?
- 4 What is API / Credential?
- 5 What is MCP?



What is workflow?


Workflow is a **concept**

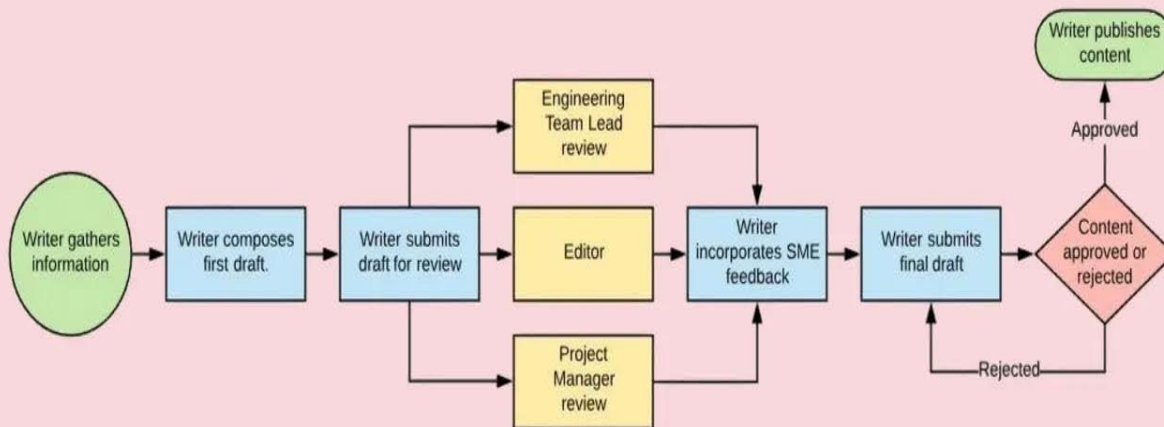

- **Trigger:** The event that starts the workflow.
- **Steps / Actions:** The specific tasks performed within the workflow.
- **Sequence / Logic:** The order in which steps run, potentially including conditional logic.
- **Data Flow:** How information moves between steps.
- **Goal / Outcome:** The final purpose the workflow aims to achieve.

What is n8n?

Workflow is a **concept**,
n8n is one of the **implementation method**

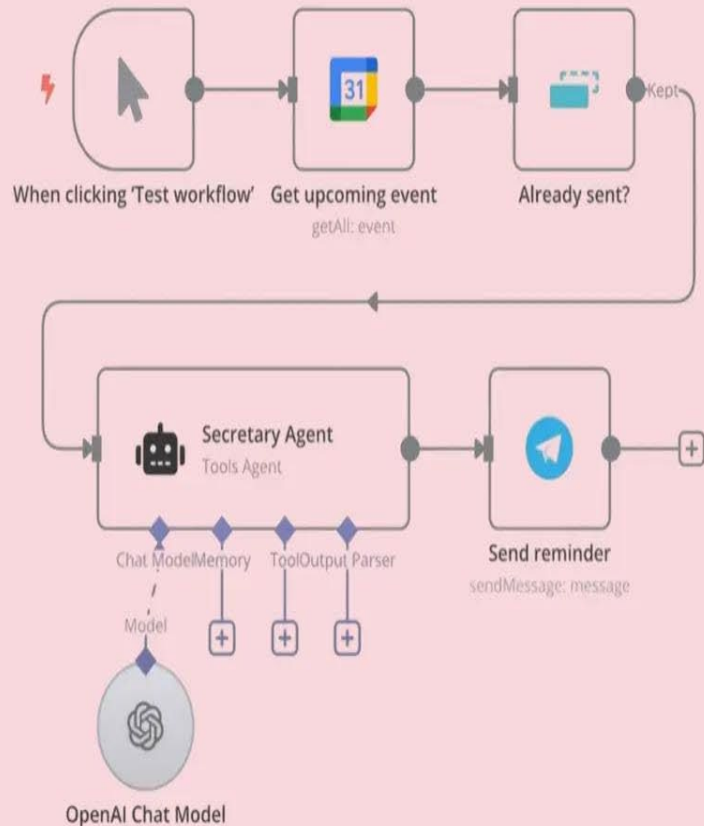

node



node

Node-View and that it uses Node.js

mation



Automation



Customizable

Highly flexible workflows and the option to build custom nodes.



Convenient

Use the npm or Docker to try out n8n, or the Cloud hosting option if you want us to handle the infrastructure.




Privacy-focused

Self-host n8n for privacy and security.

What is AI Agent?

An intelligent system that **perceives its environment**, **reasons**, and **acts to achieve goals**.

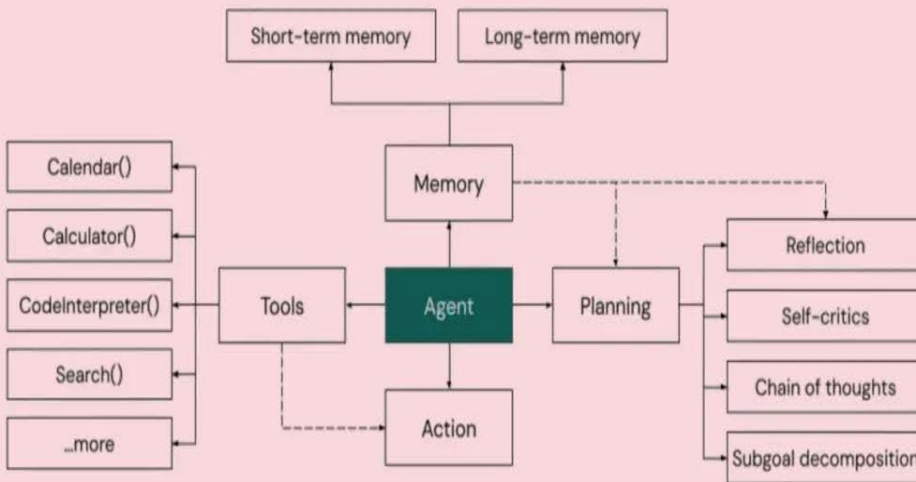

- **Perception:** Gathers info (text, sensors, APIs, web).
- **Reasoning:** Analyzes data, plans steps, (using LLMs).
- **Action:** Interacts with the environment (calls APIs,).
- **Goal-Oriented:** Driven to complete specific, defined objectives.
- **Autonomous:** Operates with a degree of independence, reducing human intervention.

What is API / Credential?

Application Programming Interface(API) **provides** the service,
Credentials **protect** the service.

◆ API / Credentials: Relationship Overview

- API acts as a "channel" or "bridge" that **allows different applications to communicate and exchange data or services.**
- Credentials serve as a "key" to **ensure that only authorized users can access the API.**


◆ How It Works

1. The user or application sends a request to the API, attaching their Credentials.
2. The server checks if the Credentials are valid.
3. If verified, the server grants access to the API's functionalities.




What is MCP?


Model Context **Protocol** acts as a universal adapter between AI applications and external tools or data sources

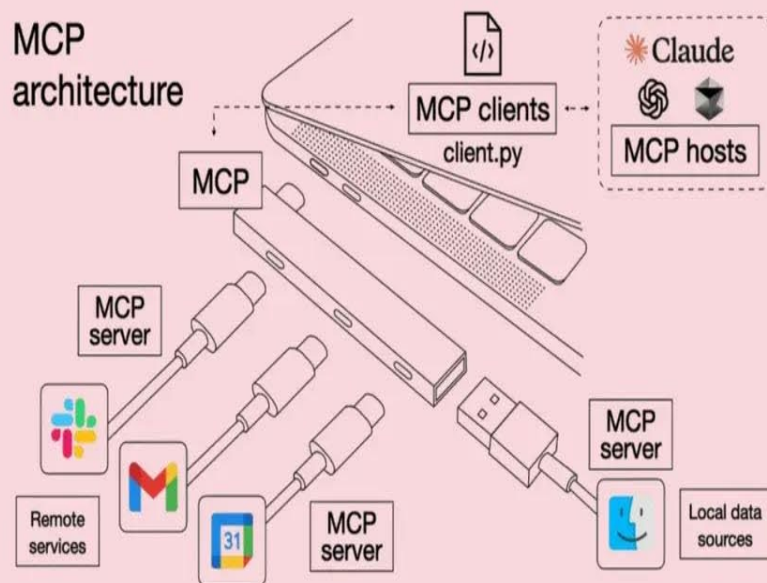


Functional Item	Traditional API	MCP (Model Context Protocol)
Integration Method	Each tool requires individual integration	Integrate once, connect to multiple
Communication Mode	One-way request-response	Two-way persistent communication
Resource Discovery	Requires pre-definition	Dynamic discovery at runtime
Self-description	Relies on external documentation	Built-in self-description capability
Design Goal	Inter-application communication	Specifically designed for AI models
Security Control	Decentralized management	Unified security control mechanism



When learning n8n, adopting a **progressive approach** is recommended; mastering all functionalities at once is not necessary. If you need to use a specific node and are unsure about its configuration, you can always **consult its official technical documentation** for detailed guidance.



Implement



n8n: Build an AI agent for trip planning



Google Developer Group
On Campus NCUE


Implementation Demonstration

AI Agent is expected to have the capability to:

- Check weather conditions.
- Research and plan itineraries online.
- Research and generate descriptions and important notes for attractions.
- Send invitation emails to specified contacts.
- Add planned itineraries to the user's calendar.

Demo prompt:


今天是 2025/4/28，幫我查詢 ooo 後天的天氣如何，如果天氣不錯的話幫我安排五天四夜的行程，每天大約安排3個景點，並把行程細節及各景點詳細介紹以及注意事項寫到 Google Docs 中，同時向我的所有聯絡人問候，並把邀請信及行程文檔連結寄給每個人，最後再幫我把這個行程加到我的行事曆中。

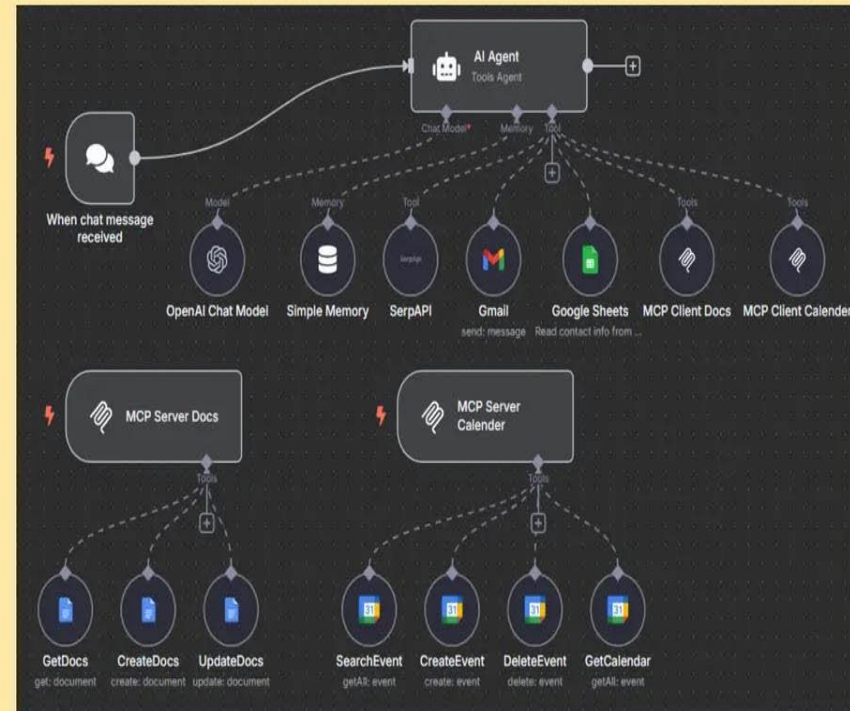

Implementation video




[Link](#)

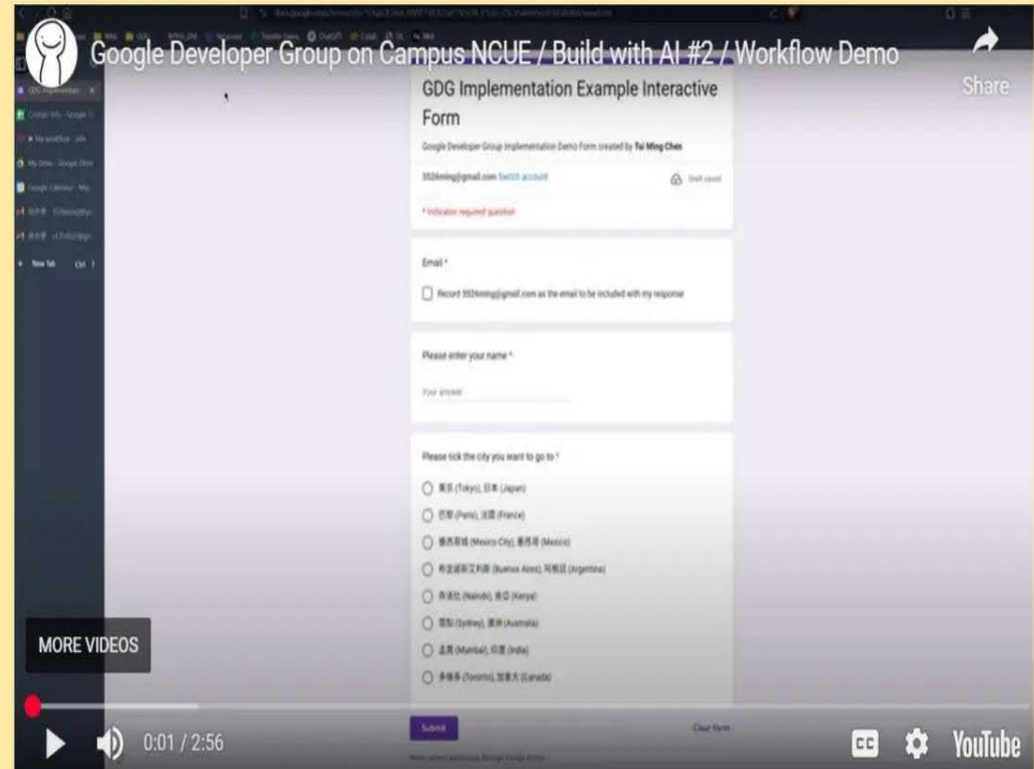

Step 1. 建立新工作流

Step 1.1


至 [n8n網站](#)，註冊帳號 (開啟14天免費試用)，
完成後應會出現以下介面

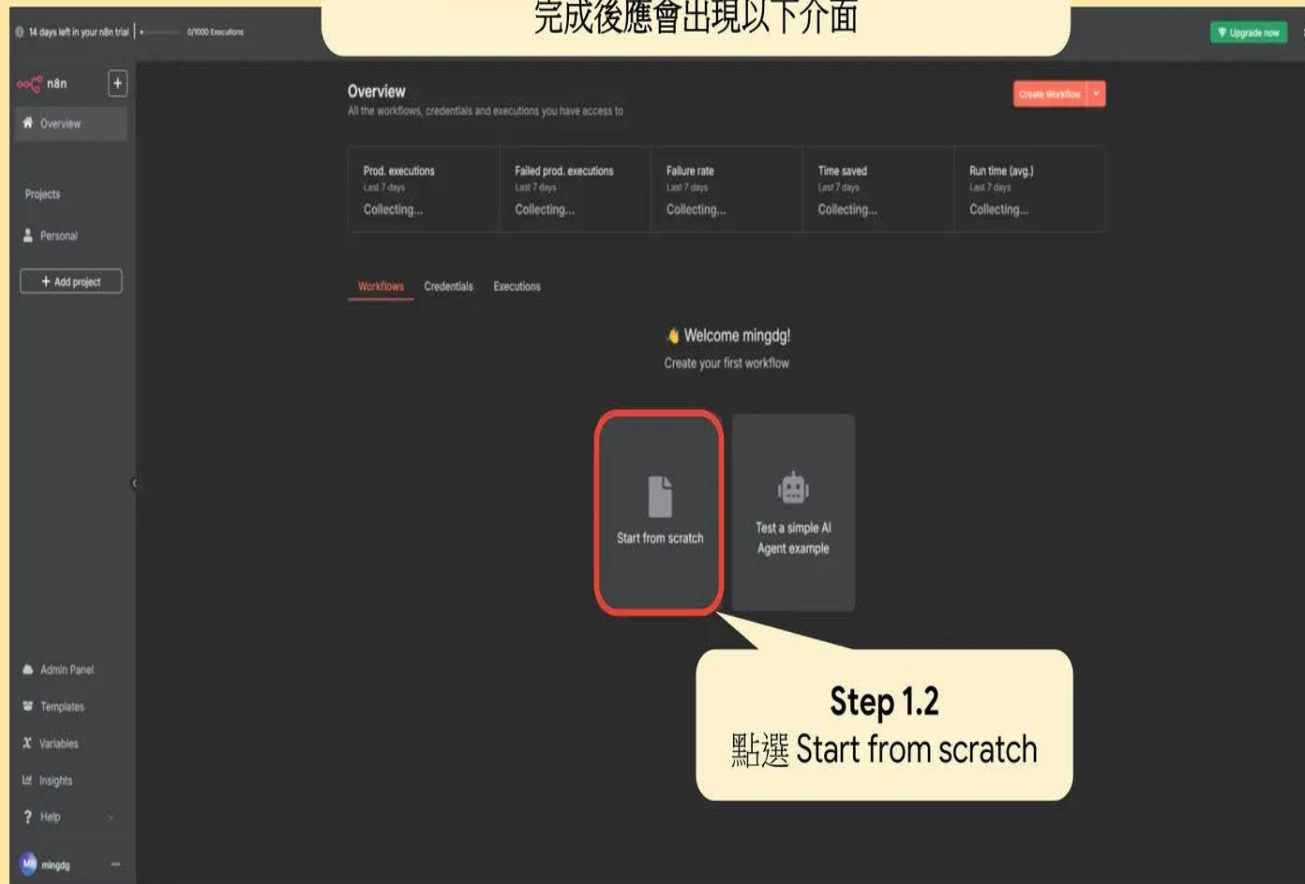

Step 2. 拉取 workflow 節點





Step 2.4
拉取完成後點選以整理頁面

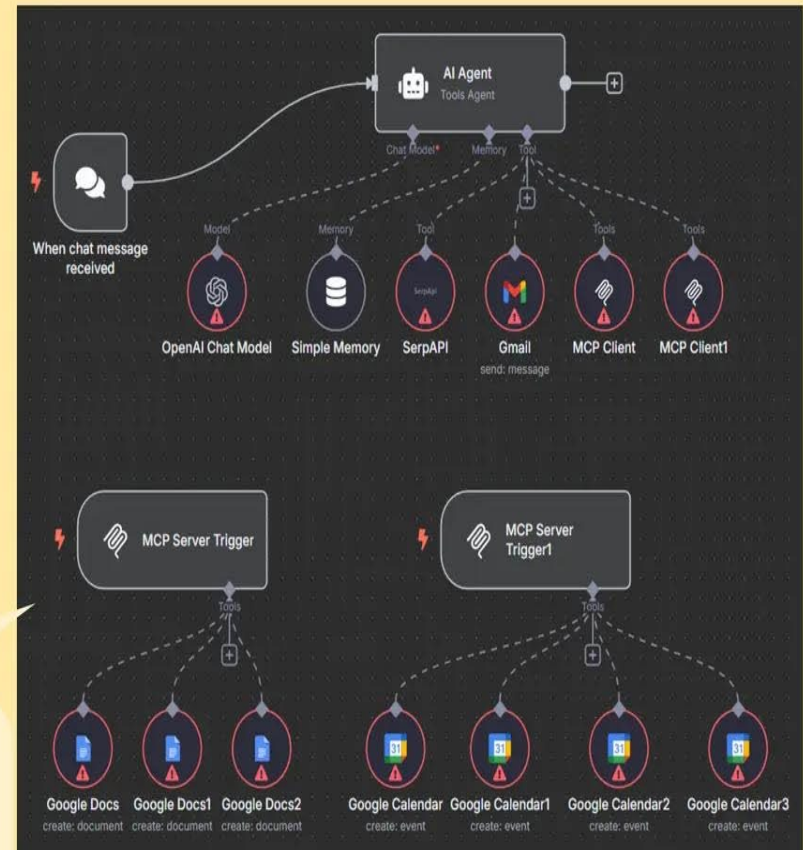

Note: 編輯時按住空白鍵即可拖拉畫布視窗


Step 3. 取得憑證並設置節點

3.1 Open AI Chat Model 節點設置

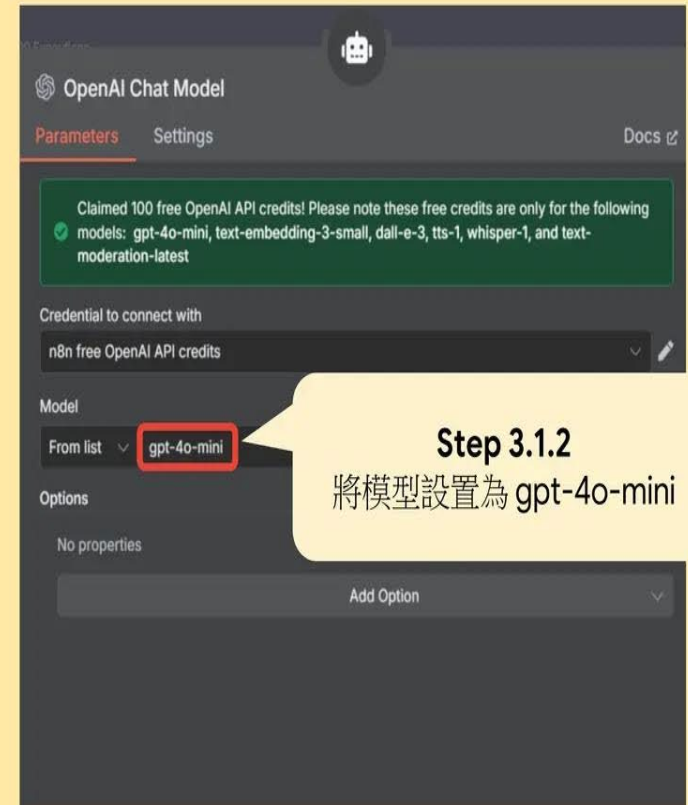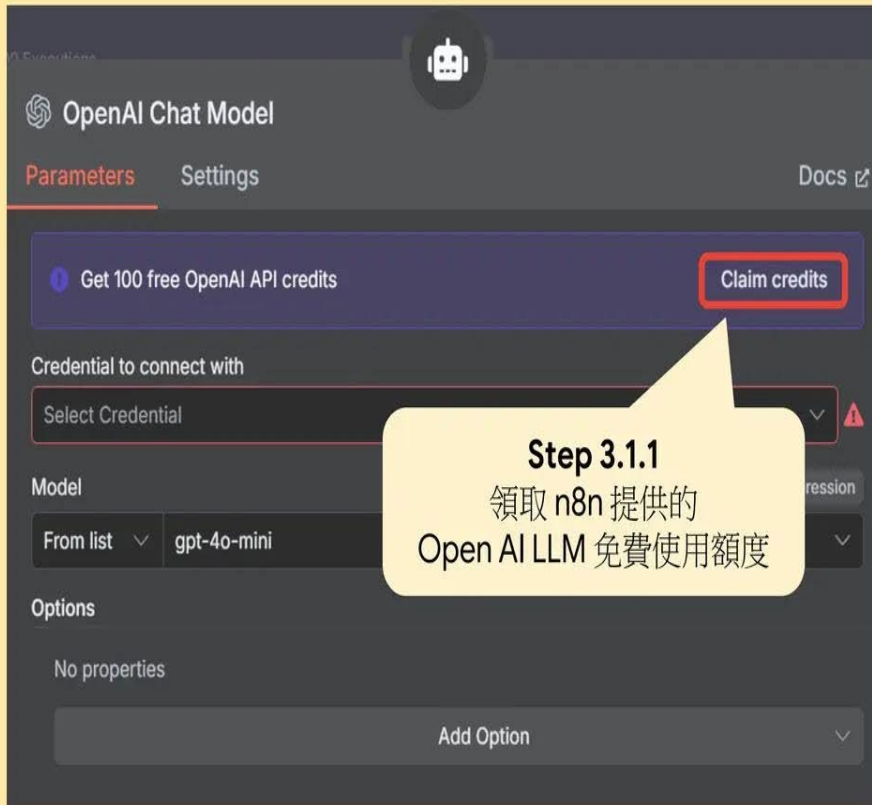

Step 3. 取得憑證並設置節點

3.2 Simple Memory 節點設置

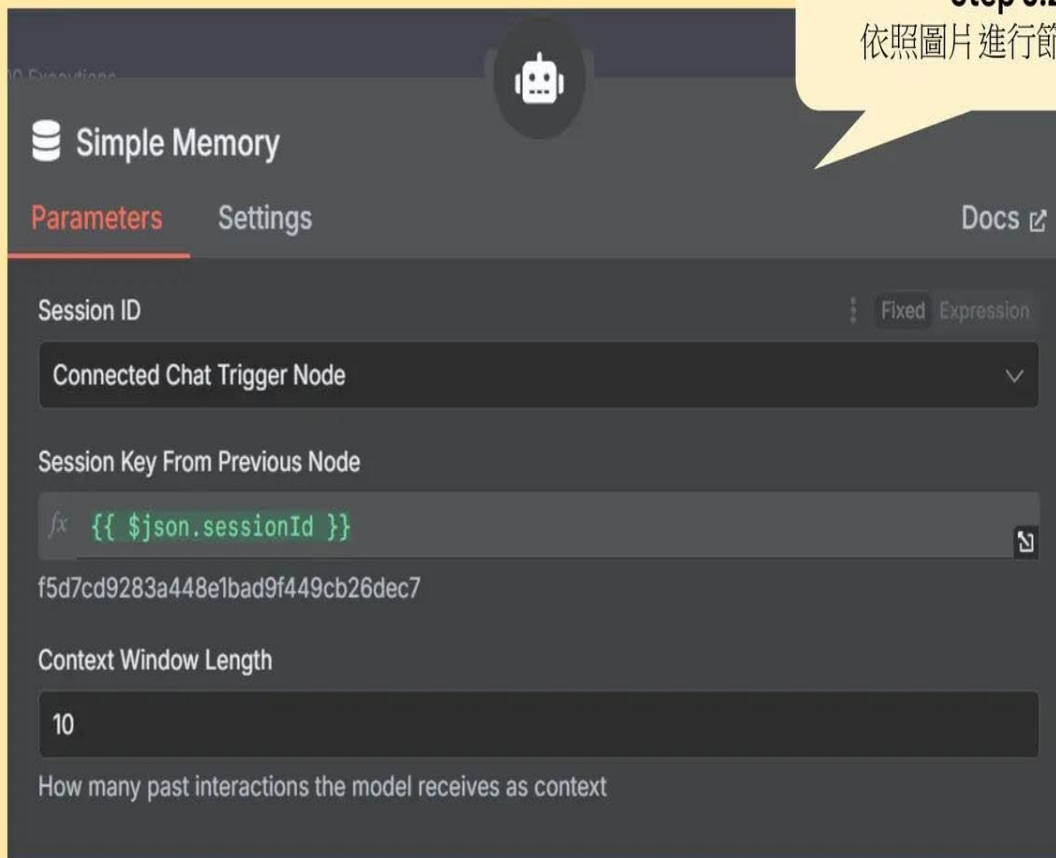

Simple Memory

Parameters Settings Docs

Session ID Fixed Expression

Connected Chat Trigger Node

Session Key From Previous Node

`{{ $json.sessionId }}`

f5d7cd9283a448e1bad9f449cb26dec7

Context Window Length

10

How many past interactions the model receives as context

Step 3.2
依照圖片進行節點設定

Step 3. 取得憑證並設置節點


3.3 Serp API 節點設置



The screenshot shows the SerpAPI dashboard. On the left, the 'API Key' link in the sidebar is highlighted with a red box. A yellow callout bubble labeled 'Step 3.3.1' points to the 'Your Private API Key' section, which contains a red box around the API key text and a 'Regenerate API Key' button. Another yellow callout bubble labeled 'Step 3.3.2' points to the bottom of the dashboard.

Step 3.3.1
至 [Serp API 網站](#) 註冊帳號

Step 3.3.2
取得 Serp API 的 API Key
並於節點設置界面貼上

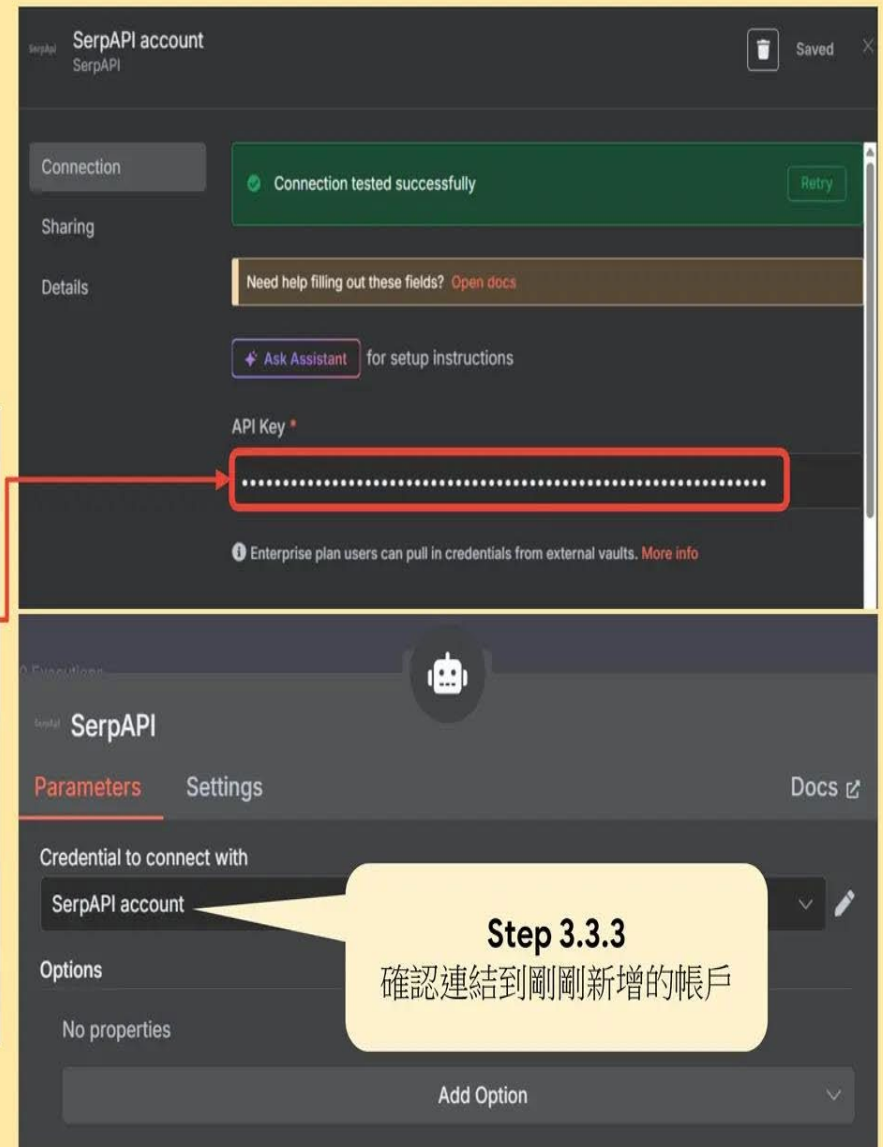


The screenshot shows the n8n configuration interface for the SerpAPI node. The 'API Key' field is highlighted with a red box, and a red arrow points from the API key in the SerpAPI dashboard to this field. A yellow callout bubble labeled 'Step 3.3.3' points to the 'Credential to connect with' dropdown menu, which is set to 'SerpAPI account'.

Step 3.3.3
確認連結到剛剛新增的帳戶

Step 3. 取得憑證並設置節點

3.4 Gmail 節點設置

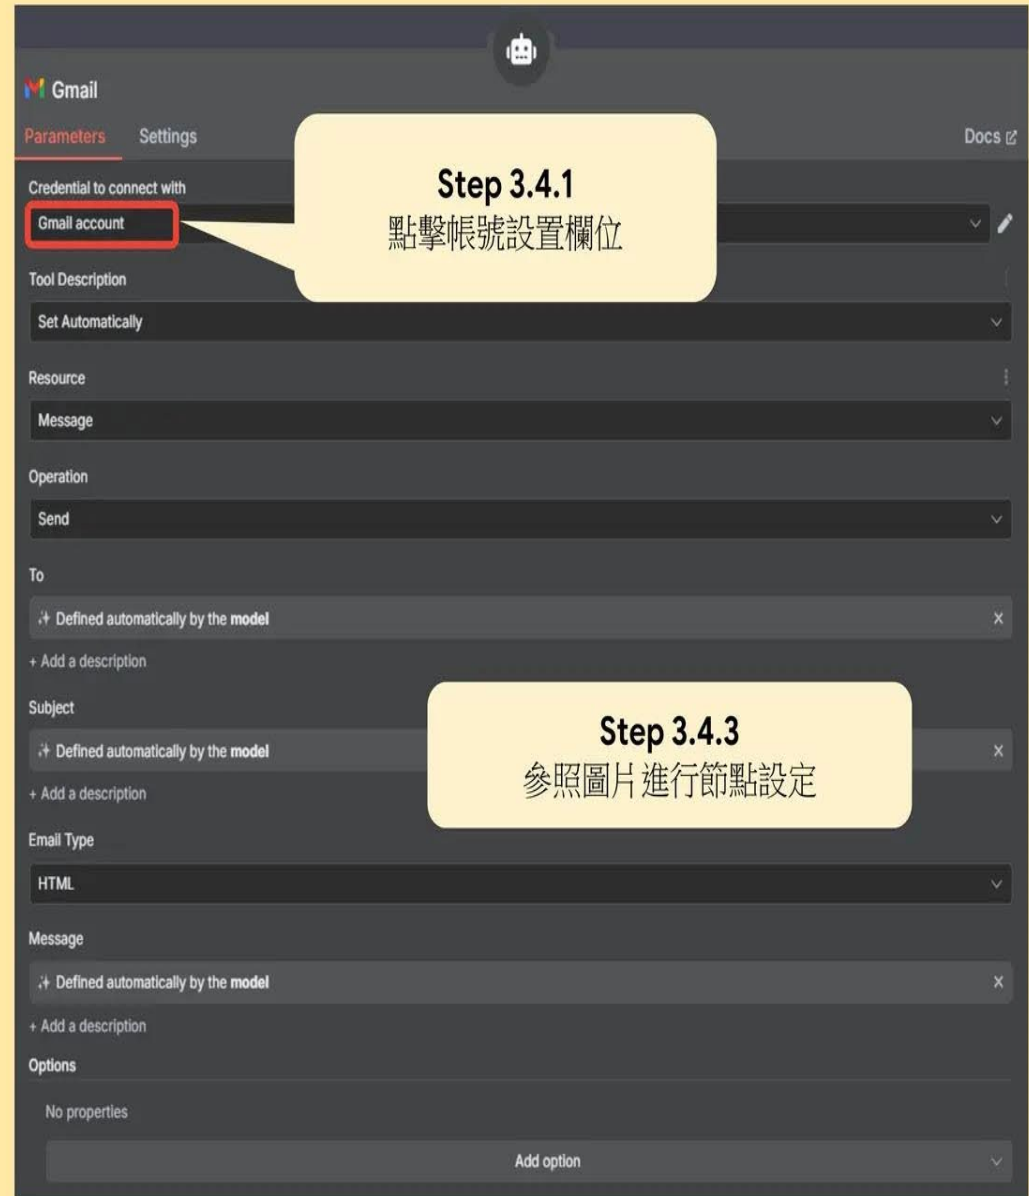

Step 3. 取得憑證並設置節點

3.5 取得 Google Docs & Google Calender 憑證 (1 / 5)

Google AI Studio

Step 3.5.1
進入 Google AI Studio

Get API key Studio **Dashboard** Documentation  

API Keys

Quickly test the Gemini API

API quickstart guide

```
curl "https://generativelanguage.googleapis.com/v1beta/models/gemini-2.0-flash:generateContent?key=GEMINI_API_KEY" \
-H 'Content-Type: application/json' \
-X POST \
-d '{
  "contents": [{
    "parts":[{"text": "Explain how AI works"}]
  }]
}'
```

Use code with caution.

Your API keys are listed below. You can also view and manage your project and API keys in Google Cloud.

Project number	Project name	API key	Created	Plan
...2650	Gemini API 	...b0Jc	Apr 28, 2025	Free Set up Billing View usage data 

Step 3.5.2
Create API key

Step 3.5.3
點選 View usage data

Step 3. 取得憑證並設置節點

3.5 取得 Google Docs & Google Calender 憑證 (2 / 5)



Google Cloud Gemini API

API 和服務

已啟用的 API 和服務

程式庫

憑證

OAuth 同意畫面

頁面使用協議

Step 3.5.4
點選 程式庫

API/服務詳細資料

停用 API

可能需要憑證才能使用這個 API。

Generative Language API

The Gemini API allows developers to build models. Gemini is our most capable mode multimodal. It can generalize and seamless combine different types of information inc and code. You can use the Gemini API for images, content generation, dialogue agen systems, and more.

擁有者：Google



Step 3.5.5
搜尋 docs 並啟用

docs

Google Docs API

[Google Enterprise API](#)

Reads and writes Google Docs documents.

啟用 試用這個 API



Step 3.5.6
搜尋 calender 並啟用

calender

Google Calendar API

[Google Enterprise API](#)

Manage calendars and events in Google Calendar.

啟用 試用這個 API

Step 3. 取得憑證並設置節點

3.5 取得 Google Docs & Google Calender 憑證 (3 / 5)



Step 3.5.7
點選 OAuth

專案設定

1 應用程式資訊

2 目標對象

☐ 內部 ?

僅適用於貴機構中的使用者

[瞭解使用者類型](#)

☒ 外部 ?

擁有 Google 帳戶的所有測試使用者都能存取。應用程式最初會以測試模式推出，只有測試使用者清單中的人員可以存取。準備好將應用程式推送至正式環境時，可能需要驗證應用程式。[進一步瞭解使用者類型](#)

下一步

3 聯絡資訊

4 完成

建立


取消

Step 3.5.8

配置專案設定，目標對象選擇外部 (其他步驟依照引導完成)

Step 3. 取得憑證並設置節點

3.5 取得 Google Docs & Google Calender 憑證 (4 / 5)

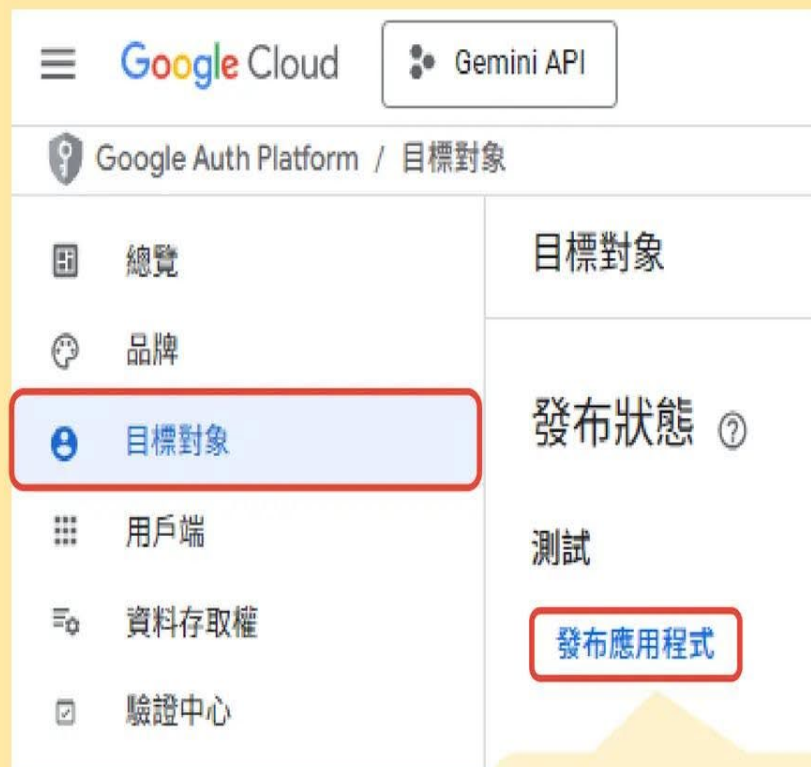

Step 3.5.10
點選 "用戶端", 並建立用戶端(接續下頁)



Step 3.5.9
依照上圖點選，將應用程式
推送至正式環境中 (允許外部存取)

Step 3. 取得憑證並設置節點

Google Docs account
Google Docs OAuth2 API

Step 3.5.11
點選任意 Docs 節點，
設定 "Credential to connect with" 欄位

Connection

Sharing

Details

Connect using *

☒ OAuth2 (recommended) ☐ Service Account

[Ask Assistant](#) for setup instructions

OAuth Redirect URL

`https://oauth.n8n.cloud/oauth2/callback`

In Google Docs, use the URL above when prompted to enter an OAuth callback or redirect URL.

Client ID *

Client Secret *

Enterprise plan users can pull in credentials from external vaults. [More info](#)

← Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type * **Web application** **Step 3.5.12**

Name *

n8n

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

1 The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

Authorized JavaScript origins ②

For use with requests from a browser

[+ Add URI](#)

Step 3.5.14

Authorized redirect URIs ②

For use with requests from a web server

Step 3.5.15

URIs 1 * **Step 3.5.13**

`https://oauth.n8n.cloud/oauth2/callback`

[+ Add URI](#)

Note: It may take 5 minutes to a few hours for settings to take effect

[Create](#) [Cancel](#)

OAuth client created

The client ID and secret can always be accessed from Credentials in APIs & Services

1 OAuth is limited to 100 [sensitive scope logins](#) until the [OAuth consent screen](#) is verified. This may require a verification process that can take several days.

Client ID

218877682650-
qaa
pps.googleusercontent.com

Client secret

GO

Creation date

April 29, 2025 at 1:23:21 AM GMT+8

Status

Enabled

[Download JSON](#)


OK

Step 3. 取得憑證並設置節點

3.6 Google Docs 節點設置

Step 3.6.1

將子節點含 Google Docs 的
MCP Server 改名為 MCP Server Docs

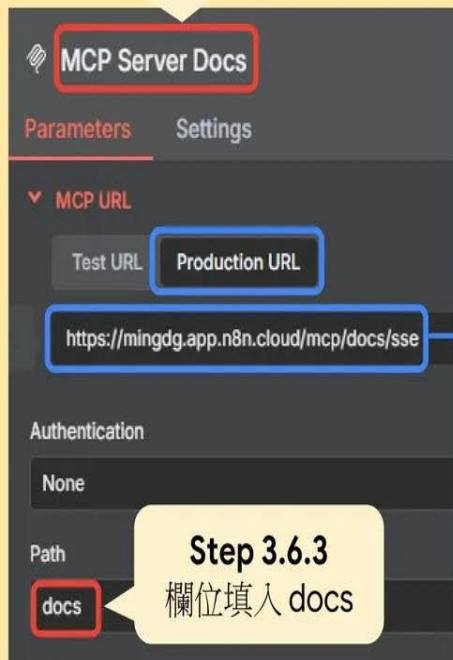

The screenshot shows the configuration for the 'MCP Server Docs' node. The 'MCP URL' section has two options: 'Test URL' and 'Production URL'. The 'Production URL' is selected and highlighted with a blue box. Below it, the URL 'https://mingdg.app.n8n.cloud/mcp/docs/sse' is entered and also highlighted with a blue box. The 'Authentication' section is set to 'None', and the 'Path' is set to 'docs'.

Step 3.6.2

將其中一個 MCP Client
改名為 MCP Client Docs



The screenshot shows the configuration for the 'MCP Client Docs' node. The 'SSE Endpoint' is set to 'https://mingdg.app.n8n.cloud/mcp/docs/sse', which is highlighted with a blue box. The 'Authentication' is set to 'None', and 'Tools to Include' is set to 'All'.

Step 3.6.4

切換至 **Production URL**
並複製貼上

Step 3.6.5


將 3 個 Google Docs 節點重新命名
並依圖進行設定配置



The screenshot shows the configuration for the 'GetDocs' node. The 'Credential to connect with' is set to 'Google Docs account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Document'. The 'Operation' is set to 'Get'. The 'Doc ID or URL' is set to 'Defined automatically by the model'.



The screenshot shows the configuration for the 'CreateDocs' node. The 'Credential to connect with' is set to 'Google Docs account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Document'. The 'Operation' is set to 'Create'. The 'Drive Name or ID' is set to 'My Drive'. The 'Folder Name or ID' is set to '/'. The 'Title' is set to 'Defined automatically by the model'.

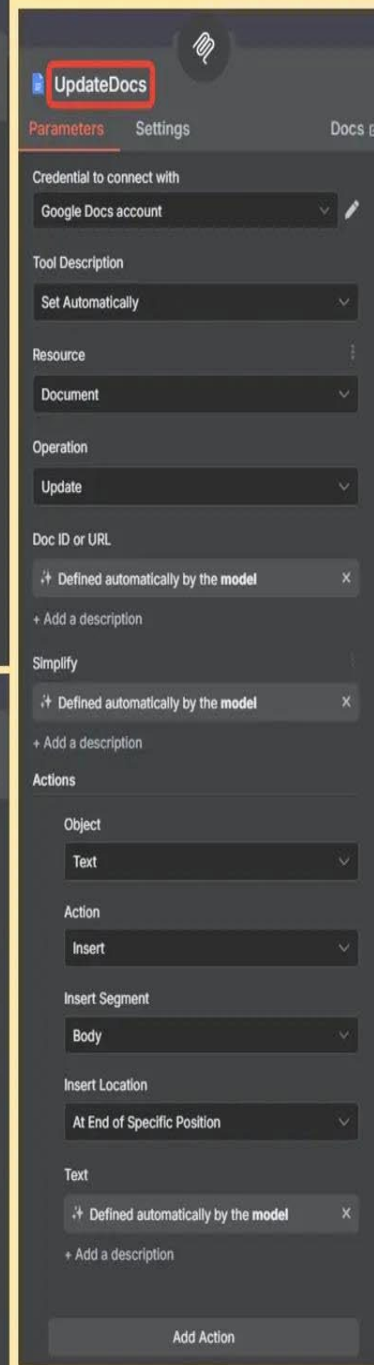


The screenshot shows the configuration for the 'UpdateDocs' node. The 'Credential to connect with' is set to 'Google Docs account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Document'. The 'Operation' is set to 'Update'. The 'Doc ID or URL' is set to 'Defined automatically by the model'. The 'Actions' section is set to 'Text' and 'Insert'.

Step 3. 取得憑證並設置節點

3.7 Googls Calender 節點設置

Step 3.7.1

將另一個 MCP Server
改名為 MCP Server Calendar

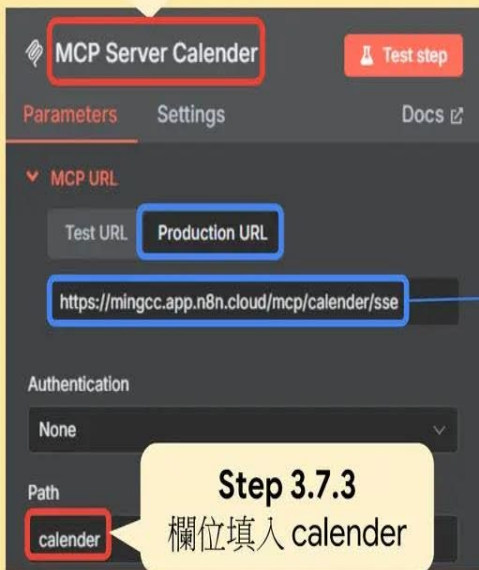

The screenshot shows the configuration for the 'MCP Server Calendar' node. The 'MCP URL' section has 'Test URL' and 'Production URL' tabs. The 'Production URL' is selected, and the URL 'https://mingcc.app.n8n.cloud/mcp/calender/sse' is entered. The 'Authentication' section is set to 'None'. The 'Path' section has 'calender' entered in the input field.

Step 3.7.3

欄位填入 calender

Step 3.7.2

將另一個 MCP Client
改名為 MCP Client Calendar




The screenshot shows the configuration for the 'MCP Client Calendar' node. The 'SSE Endpoint' is set to 'https://mingcc.app.n8n.cloud/mcp/calender/sse'. The 'Authentication' section is set to 'None'. The 'Tools to Include' section is set to 'All'.

Step 3.7.4


切換至 Production URL
並複製貼上

Step 3.7.5


將 4 個 Google Calender 節點重新命名
並依圖進行設定配置

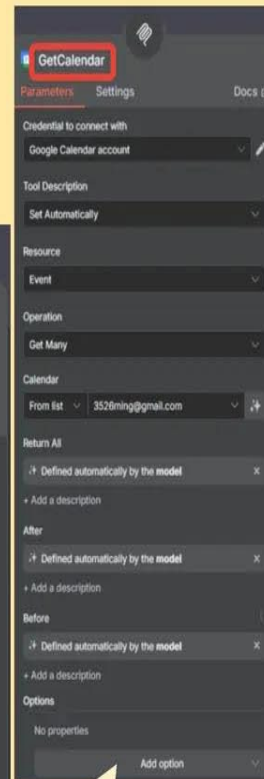


The screenshot shows the configuration for the 'GetCalendar' node. The 'Credential to connect with' is set to 'Google Calendar account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Event'. The 'Operation' is set to 'Get Many'. The 'Calendar' section is set to 'From list' and '3526ming@gmail.com'.

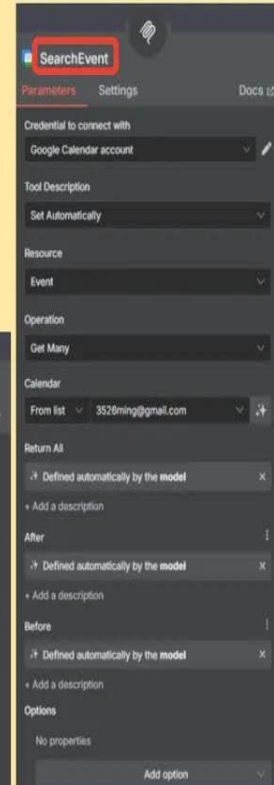

The screenshot shows the configuration for the 'SearchEvent' node. The 'Credential to connect with' is set to 'Google Calendar account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Event'. The 'Operation' is set to 'Get Many'. The 'Calendar' section is set to 'From list' and '3526ming@gmail.com'.

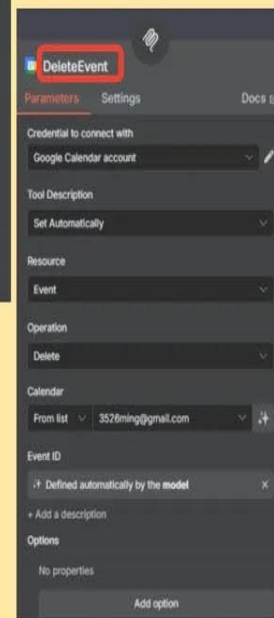

The screenshot shows the configuration for the 'DeleteEvent' node. The 'Credential to connect with' is set to 'Google Calendar account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Event'. The 'Operation' is set to 'Delete'. The 'Calendar' section is set to 'From list' and '3526ming@gmail.com'.

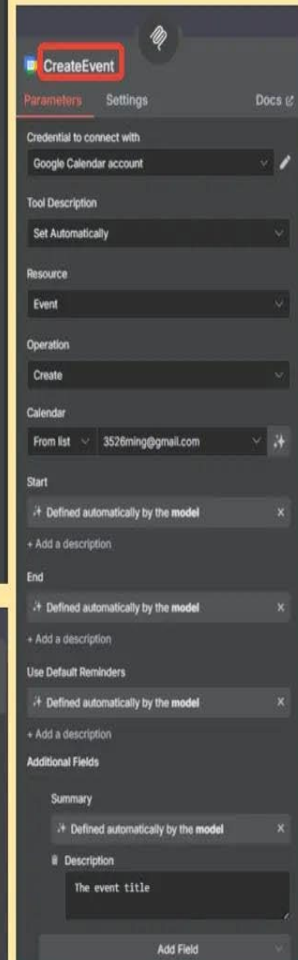

The screenshot shows the configuration for the 'CreateEvent' node. The 'Credential to connect with' is set to 'Google Calendar account'. The 'Tool Description' is set to 'Set Automatically'. The 'Resource' is set to 'Event'. The 'Operation' is set to 'Create'. The 'Calendar' section is set to 'From list' and '3526ming@gmail.com'. The 'Start' and 'End' fields are set to 'Defined automatically by the model'. The 'Use Default Reminders' is set to 'Defined automatically by the model'. The 'Additional Fields' section has 'Summary' and 'Description' fields, both set to 'Defined automatically by the model'.

Step 4. 輸入訊息進行測試



Step 4 按下 Open Chat
輸入 **prompt** 讓 AI Agent 幫你做事!

範例: 今天是 2025/5/7，幫我查詢 [place] 後天的天氣如何，如果天氣不錯的話幫我安排五天四夜的行程，每天大約安排3個景點，並把行程細節及各景點詳細介紹以及注意事項寫到 Google Docs 中，同時將邀請信及行程文檔連結寄給 [example@gmail.com]，最後再幫我把這個行程加到我的行事曆中。