


KENAN FX 3.0

KENAN BP 13.0

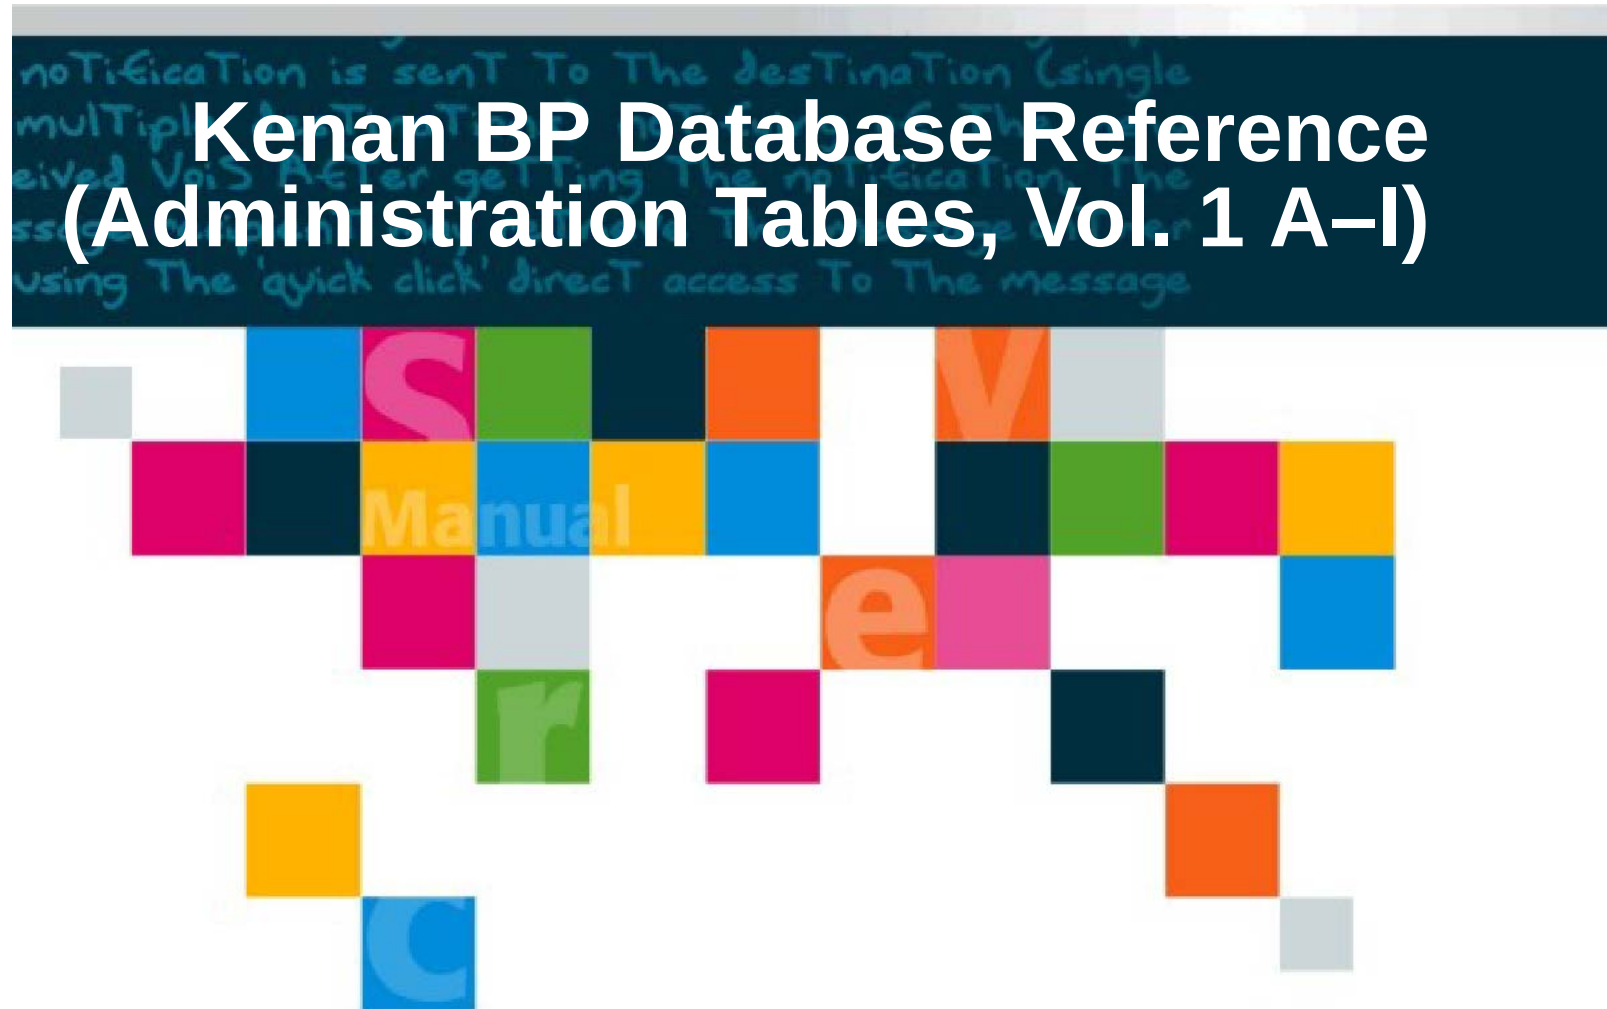

Kenan BP Database Reference (Administration Tables, Vol. 1 A–I)

Notice

This document contains proprietary and confidential material of Comverse, Inc. Any unauthorized reproduction, use, or disclosure of this material, or any part thereof, is strictly prohibited. This document is solely for the use of Comverse, Inc. employees and authorized Comverse, Inc. customers.

The material furnished in this document is believed to be accurate and reliable. However, no responsibility is assumed by Comverse, Inc. for the use of this material. Comverse, Inc. reserves the right to make changes to the material at any time and without notice.

This document is intended for information and operational purposes only. No part of this document shall constitute any contractual commitment whatsoever by Comverse, Inc.

© 2015 Comverse, Inc. All rights reserved.

Portions of this documentation and of the software herein described are used by permission of their copyright owners.

Comverse, its logo, the spark design, Kenan, and Netcentrex are registered trademarks of Comverse Technology, Inc. or its subsidiaries in the United States and may also be registered in other countries.

Other denoted product names of Comverse or other companies may be trademarks or registered trademarks of Comverse, Inc. or its subsidiaries, or their respective owners.

Corporate Headquarters
100 Quannapowitt Parkway
Wakefield, MA 01880 USA
Tel: (781) 246-9000
Fax: (781) 224-8143
www.comverse.com

Contents

Tables	9
Notational Conventions	11
 Chapter 1 Introduction	 1
What's New in This Manual.....	3
 Chapter 2 Administration Tables	 11
ABI_ACCOUNT_TEMPLATE.....	16
ABI_FIELD_MAPPING.....	21
ABI_HISTORY.....	22
ABI_PRODUCT_CATALOG_TEMPLATE.....	23
ABI_RECORD_FIELDS	24
ABI_RECORD_TYPE.....	25
ABI_SERVICE_TEMPLATE.....	26
ABI_SOURCE_RECORD_TYPES.....	29
ABI_SOURCE_REF	30
ABI_SOURCE_VALUES	31
ACCESS_REGION_REF	32
ACCESS_REGION_VALUES	33
ACCOUNT_CATEGORY_REF	34
ACCOUNT_CATEGORY_VALUES	35
ACCOUNT_MOVE_TABLES	36
ACCT_SEG_MAP	37
ACCT_SEG_REF.....	38
ACCT_SEG_VALUES.....	39
ADDRESS_CATEGORY_REF.....	40
ADDRESS_CATEGORY_VALUES.....	41
ADDRESS_TYPE_REF	42
ADDRESS_TYPE_VALUES	44
ADJ_REASON_CODE_REF.....	45
ADJ_REASON_CODE_VALUES.....	46
ADJ_TRANS_DESCR.....	47
ADJ_TRANS_GROUPS.....	50
ADJ_TRANS_GROUP_REF.....	51
ADJ_TRANS_GROUP_VALUES	52
ADR_SECONDARY_UNIT_TYPE	53
ADR_STREET_DIRECTIONAL	54
ADR_STREET_SUFFIX.....	55
AGGR_USAGE_DEFINITIONS_REF	56
AGGR_USAGE_DEFINITIONS_VALUES	57
AGGR_USAGE_RESTRICTIONS	58
AMP_MODE_REF.....	60
AMP_MODE_VALUES.....	61
ARB_TAB_DEPENDS.....	62

ARCH_MODE_REF	63
ARCH_MODE_VALUES	64
ARCH_TABLE_DEPENDS_REF	65
ARCH_TYPE_REF.....	66
ARCH_TYPE_VALUES.....	67
ATM_CUSTOM_TABLE_DEF.....	68
ATM_FIELD_DEF	69
ATM_POPLIST_REF	70
ATM_POPLIST_VALUES	71
BALANCE_XFER_DIFF_REF.....	72
BALANCE_XFER_DIFF_VALUES.....	73
BAM_ERROR_CODE_REF	74
BAM_ERROR_CODE_VALUES	75
BILLING_FREQUENCY_REF.....	76
BILLING_FREQUENCY_VALUES.....	77
BILL_ADDRESS.....	78
BILL_CLASS_REF	79
BILL_CLASS_VALUES	80
BILL_CYCLE.....	81
BILL_DISP_METH_REF	82
BILL_DISP_METH_VALUES	83
BILL_FMT_OPT_REF	84
BILL_FMT_OPT_VALUES	85
BILL_FMT_SECTION_EXCL_REF.....	86
BILL_FMT_SECTION_EXCL_VALUES	87
BILL_FMT_SECTION_TYPE_REF	88
BILL_FMT_SECTION_TYPE_VALUES	89
BILL_FMT_TEMPLATE_CODE_REF	90
BILL_FMT_TEMPLATE_CODE_VALUES	91
BILL_FORMAT_CODE_TYPE_REF.....	92
BILL_FORMAT_CODE_TYPE_VALUES.....	93
BILL_FORMAT_DISPLAY_TYPES.....	94
BILL_FORMAT_PRODUCTS.....	95
BILL_FORMAT_TEMPLATE.....	96
BILL_INSERTS	98
BILL_INSERT_GROUPS	99
BILL_MESSAGES.....	101
BILL_MESSAGE_GROUPS.....	102
BILL_PERIOD_REF	103
BILL_PERIOD_VALUES	104
BILL_REF_NO_MASTER	105
BILL_SECTIONS.....	106
BILL_SIZE.....	107
BMF_TRANS_DESCR	108
BONUS_POINT_ID_REF.....	111
BONUS_POINT_ID_VALUES.....	113
BONUS_POINT_TRANS_TYPE_REF.....	114
BONUS_POINT_TRANS_TYPE_VALUES.....	116
BP_SERVER_TO_RPAC_MAP	117
BUSINESS_DAY_DEFINITION	118
BUSINESS_DAY_REF.....	119

BUSINESS_DAY_VALUES.....	120
.....	121
CARD_TYPE_CODE_RANGE.....	122
CARD_TYPE_CODE_REF	123
CARD_TYPE_CODE_VALUES	125
CCARD_AVS_RESPONSE_CODES.....	126
CCARD_RESPONSE_CODE_REF	127
CCARD_RESPONSE_CODE_VALUES	128
CC_ATTRIBUTES_DEF.....	129
CC_BALANCE	130
CC_VANITY_CODE_CHARGE_MAP.....	131
CC_VIEW_ATTRIBUTES.....	132
CC_VIEW_DEF.....	133
CDR_ADJ_ERROR_REF.....	134
CDR_ADJ_ERROR_VALUES.....	135
CDR_CHECK_SUM_1..92.....	136
CDR_COMP_STATUS_REF	137
CDR_COMP_STATUS_VALUES	138
CDR_CONSOLIDATION_KEYS	139
CDR_DATA_WORK.....	140
CDR_DATA_WORK_TAX.....	145
CDR_DUP_CHECK_FIELDS.....	147
CDR_OUTCOLLECTS.....	148
CDR_RAW_USAGE.....	151
CELL_ID_REF.....	152
CELL_ID_VALUES.....	153
CELL_ID_ZONE_ID_MAP	154
CIBER_ARBOR_USAGE_TYPE_XREF	155
CIBER_FLD_ERROR_CODES.....	156
CIBER_INCOLLECTS.....	157
CIBER_INCOLLECTS_ERROR.....	161
CIBER_LINE_RANGES	165
CIBER_OPERATOR_SID_BID	166
CIBER_ROAMING_AGREEMENT	167
CIBER_SID_BID_DEF	169
CIBER_SID_BID_MARKET	170
CLASS_OF_SERVICE_CODE_REF	171
CLASS_OF_SERVICE_CODE_VALUES	172
CLEARING_HOUSE_CONTACTS	173
CLEARING_HOUSE_DIVISION	175
CLEARING_HOUSE_ID_REF	176
CLEARING_HOUSE_ID_VALUES	177
CLEARING_HOUSE_INFO.....	178
CMF_STATUS_CHG_REASON_REF	180
CMF_STATUS_CHG_REASON_VALUES	181
CMF_STATUS_REF	182
CMF_STATUS_VALUES	183
COMPONENT_DEFINITION_REF	184
COMPONENT_DEFINITION_VALUES	185
COMPONENT_POLICY_MAP	186
COMPONENT_NRCS.....	187

CONNECT_REASON_CODES_REF	188
CONNECT_REASON_CODES_VALUES	189
CONNECT_TERM_SOAP	190
CONTRACT_TYPES.....	191
CORRIDOR_PLAN_GROUPS.....	196
CORRIDOR_PLAN_ID_REF.....	197
CORRIDOR_PLAN_ID_VALUES.....	199
COUNTRY_CODE_REF	200
COUNTRY_CODE_VALUES	201
COUNTRY_DIAL_CODES.....	202
COUNTRY_JURISDICTION	203
CSR_ACCT_SEG	204
CSR_INFORMATION.....	205
CSR_SUPERVISORS.....	206
CURRENCY_TYPE_REF	207
CURRENCY_TYPE_VALUES	208
CUSTOMER_LIFETIME_ID_REF.....	209
CUSTOMER_LIFETIME_ID_VALUES.....	210
DB_MESSAGES	211
DENIAL_REASON_REF.....	212
DENIAL_REASON_VALUES	213
DEPENDENCY	214
DEPOSIT_TYPE_REF	216
DEPOSIT_TYPE_VALUES	217
DESCRIPTIONS	218
DEVICES.....	219
DISCONNECT_REASON_REF	220
DISCONNECT_REASON_VALUES	221
DISCOUNT_DEFINITIONS.....	222
DISCOUNT_PLANS.....	225
DISCOUNT_RESTRICTIONS.....	226
DISCOUNT_TARGETS.....	229
DISCOUNT_THRESH_TIER_ID_REF.....	232
DISCOUNT_THRESH_TIER_ID_VALUES.....	233
DISTANCE_BANDS.....	234
DISTANCE_BANDS_ID_REF.....	235
DISTANCE_BANDS_ID_VALUES	236
DYNAMIC_USER_LIBS	237
EFT_CONTROL	238
EFT_RESPONSE_CODE_REF.....	239
EFT_RESPONSE_CODE_VALUES.....	240
ELEMENT_CORRIDOR_MAP	241
EMF_CONFIGURATION.....	242
EMF_CONFIG_ADDR_CATEGORY_MAP	244
EMF_CONFIG_ID_REF	245
EMF_CONFIG_ID_VALUES.....	246
EMF_STATUS_CHG_REASON_REF	247
EMF_STATUS_CHG_REASON_VALUES	248
EMF_STATUS_REF	249
EMF_STATUS_VALUES	250
EMF_SUSPENSION_REASON_REF	251

EMF_SUSPENSION_REASON_VALUES.....	252
ENTITY_TYPE_GROUP_MEMBER	253
ENTITY_TYPE_GROUP_REF.....	254
ENTITY_TYPE_GROUP_VALUES.....	255
ENTITY_TYPE_REF.....	256
ENTITY_TYPE_VALUES.....	258
ENUMERATION_DEF.....	259
EPI_ASSIGNMENT.....	260
EPI_REF	261
EPI_VALUE.....	262
EPR_BATCH_WORK.....	263
EPR_ERROR.....	264
EQUIP_CLASS_CODE_REF.....	265
EQUIP_CLASS_CODE_VALUES.....	266
EQUIP_TYPE_CODE_REF	267
EQUIP_TYPE_CODE_VALUES	268
ERROR_SEVERITIES	269
EXCLUSION.....	270
EXRATE_CLASS_REF.....	271
EXRATE_CLASS_VALUES.....	272
EXTERNAL_ENTITY_MAPPING	273
EXTERNAL_ENTITY_MAPPING_TYPE.....	274
EXTERNAL_ID_TYPE_REF	275
EXTERNAL_ID_TYPE_VALUES	276
EXT_ACCESS_METHOD_REF.....	277
EXT_ACCESS_METHOD_VALUES.....	278
EXT_CONTACTS.....	279
EXT_CONTACTS_STATUS	282
EXT_FTP_ACCESS.....	283
EXT_IPDR_FS_ACCESS	284
EXT_IPDR_FS_STATUS.....	285
EXT_LOCAL_DIR_ACCESS.....	286
EXT_PARAM_TYPE_ASSOC.....	287
EXT_SOURCE_ID_REF	289
EXT_SOURCE_ID_VALUES	290
EXT_SOURCE_TYPE_REF	291
EXT_SOURCE_TYPE_VALUES	292
FILES_IN_PROCESS.....	293
FILES_TO_PROCESS.....	294
FILE_STATUS.....	295
FILE_TYPE_REF	298
FILE_TYPE_VALUES	299
FRANCHISE_CODE_REF	300
FRANCHISE_CODE_VALUES	301
GENDER_REF.....	302
GENDER_VALUES.....	303
GENERIC_ENUMERATION_REF	304
GENERIC_ENUMERATION_VALUES	305
GEOCODE_OVERRIDES.....	306
GLOBAL_ACCOUNT_BALANCES	308
GLOBAL_OPEN_ITEM_ID_MAP	309

GROUP_AMOUNT.....	311
GROUP_FUNCTION.....	312
GROUP_TYPE_REF.....	313
GROUP_TYPE_VALUES.....	314
GRS_ACTION_DEFINITION.....	315
GRS_ACTION_OPERATIONS	316
GRS_ACTION_REF.....	317
GRS_ACTION_VALUES.....	318
GRS_OPERATION_REF	319
GRS_OPERATION_VALUES	320
GSM_ROAMING_AGREEMENT	321
GUI_INDICATOR_REF.....	323
GUI_INDICATOR_VALUES	325
GUI_MESSAGES.....	326
GUI_VERSION.....	327
INDUSTRY_TYPE_REF	328
INDUSTRY_TYPE_VALUES	329
INSERT_FOREIGN_KEY_REF	330
INSERT_FOREIGN_KEY_VALUES	331
INSERT_GRP_ID_REF.....	332
INSERT_GRP_ID_VALUES.....	333
IO_DEVICES.....	334
ITEM_CATEGORY_REF	335
ITEM_CATEGORY_VALUES	336
ITEM_CATG_INDUSTRY_ASSOC.....	337
ITEM_CATG_MKTG_ASSOC.....	338
ITEM_MARKETING_DATA_LINKS	339
ITEM_MARKETING_DATA_REF.....	340
ITEM_MARKETING_DATA_VALUES.....	342
Master Index.....	343
Fields Index	351

Tables

Table 1	Notational Conventions.....	11
Table 2	Field Types	14
Table 3	Sample Row	15

Notational Conventions



NOTE

Important notes appear in this format.



CAUTION

Indicates possible danger to data, software, or hardware.



WARNING!

Indicates serious risk of damage to data, software, or hardware.

Table 1 Notational Conventions

Notation	Explanation of Convention
<i>References to printed documents</i>	<i>Helvetica italic</i> Example: See <i>Database Reference Volume 2</i> .
<KEYS>	UPPERCASE HELVETICA, in angle brackets Example: Press <CTRL><Q><SHIFT><P> to create an em dash.
User-entered text	Courier bold Example: Enter Total Charges in the field.
<i>Placeholders for user-determined text</i>	<i>Courier italic</i> , in angle brackets Example: Enter your <password>.
Code samples, TABLE_NAMES, field_names, file and directory names, file contents, user names, passwords, UNIX ENVIRONMENT_VARIABLES	Courier
<i>Placeholders for system-generated text</i>	<i>Helvetica italic</i> Example: Messages appear in this form: <i>timestamp messageID >> text</i> .
Buttons, Icon Names, and Menu items	Helvetica bold Example: Choose Reports from the main menu.

Chapter 1

Introduction

1

orded (sender
The desti
notifying
ng The noti
ieve The m
cT access To

e

Welcome to the *Database Reference*. This document contains a description of every table used by Kenan BP, with descriptions of fields, rules, triggers, indexes, and related information.

This is a reference document intended for use by individuals who are already familiar with the architecture and data model for the Kenan BP billing system.

This document is published in three volumes:

- *Database Reference (Administration Tables, Vol. 1 A-I)*
- *Database Reference (Administration Tables, Vol. 2 J-Z)*
- *Database Reference (Catalog and Customer Tables)*

An index of fields and a master index of tables appear at the end of each volume.



Until the software has been revised, some references to CSG or CSG Systems may remain in this documentation in areas such as Java package names, scripts, log files, and filenames.

What's New in This Manual

If you are familiar with the Kenan BP Database Reference (Administration Tables, Vol. 1 A–I) for Kenan BP release 13.0, please be aware of the following changes.

- **DR-2-025-156: Search Extended Data**

EXT_PARAM_TYPE_ASSOC

Field Name	Data Type		Comments	Val- ues	Null	Description of change
is_searchable	bit		1= Kenan BP module is able to search based on the extended data. 0= Kenan BP module is not able to search based on the extended data.	(D: 0)		New field due to DR-2-025-156 . Go to table “EXT_PARAM_TYPE_ASSOC” on page 287 and go to field “is_searchable” on page 288 .

- **DR-2-024-978: Reuse default external ID for subscriber disconnection**

EXTERNAL_ID_TYPE_REF

Field Name	Data Type	Comments	Values	Null	Description of change
uniqueness_type	tinyint	How are external_id fields of this type mapped to internal IDs? 0 = one external ID is mapped to many internal IDs (one-to-many). 1 = unique; one external ID is mapped to one internal ID (one-to-one). 2 = more than one external ID is mapped to one internal ID (many-to-one). 3 = reuse default external ID for subscriber disconnection.	(R: 0, 1, 2, 3)		New uniqueness type (3) due to DR-2-024-978 . Go to table “EXTERNAL_ID_TYPE_REF” on page 275 and go to field “uniqueness_type” on page 275.

- **DR-2-025-146: Implement SLA credits in Kenan FX**

DISCOUNT_RESTRICTIONS

Field Name	Data Type	Comments	Values	Null	Description of change
restriction_type	tinyint	Identifies the restriction parameter type: 15= SLA discount restriction.	(R: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15)		New restriction type (15) due to DR-2-025-146 . Go to table “DISCOUNT_RESTRICTIONS” on page 226 and go to field “restriction_type” on page 227.

- **DR-2-024-136: Integrate Kenan FX3.0 with the Converse Policy Management product**

- The following table is added to the Kenan BP schema: COMPONENT_POLICY_MAP.

Please see [“COMPONENT_POLICY_MAP”](#) on page 186.

GUI_INDICATOR_REF

Field Name	Data Type	Comments	Val- ues	Null	Description of change
policy_period	tinyint	The calendar period for the policy: 1= daily 2= weekly 3= monthly 4= quarterly 5= yearly 6= bill cycle		Null	New field due to DR-2-024-136 . Go to table “GUI_INDICATOR_REF” on page 323 and go to field “policy_period” on page 323 .
cycle_day	smallint	Day of the week for the cycle: 1= Sunday 2= Monday 3= Tuesday 4= Wednesday 5= Thursday 6= Friday 7= Saturday		Null	New field due to DR-2-024-136 . Go to table “GUI_INDICATOR_REF” on page 323 and go to field “cycle_day” on page 325 .
policy_type	tinyint	The level of the policy: 0= Primary 1= Supplementary	(D: 0)		New field due to DR-2-024-136 . Go to table “GUI_INDICATOR_REF” on page 323 and go to field “policy_type” on page 324 .

GUI_INDICATOR_VALUES

Field Name	Data Type	Comments	Val- ues	Null	Description of change
policy_period	tinyint	The calendar period for the policy: 1= daily 2= weekly 3= monthly 4= quarterly 5= yearly 6= bill cycle		Null	New field due to DR-2-024-136 . Go to table “GUI_INDICATOR_VALUES” on page 325 and go to field “policy_period” on page 325 .
cycle_day	smallint	Day of the week for the cycle: 1= Sunday 2= Monday 3= Tuesday 4= Wednesday 5= Thursday 6= Friday 7= Saturday		Null	New field due to DR-2-024-136 . Go to table “GUI_INDICATOR_VALUES” on page 325 and go to field “cycle_day” on page 325 .
policy_type	tinyint	The level of the policy: 0= Primary 1= Supplementary	(D: 0)		New field due to DR-2-024-136 . Go to table “GUI_INDICATOR_VALUES” on page 325 and go to field “policy_type” on page 325 .

- The following table is added to the Kenan BP schema: CONNECT_TERM_SOAP.

Please see [“CONNECT TERM SOAP”](#) on [page 190](#).

- **DR-2-025-128: Introduction of the Charge Transfer Module to decode records in support of capabilities:**

- SLA/QoS Charging
- Degree of Project Completion Charging &
- Invoice Aggregation

- The following table is added to the Kenan BP schema: ABI_RECORD_TYPE.

Please see [“ABI RECORD TYPE”](#) on [page 25](#).

- The following table is added to the Kenan BP schema: ABI_RECORD_FIELDS.

Please see [“ABI RECORD FIELDS”](#) on [page 24](#).

- The following table is added to the Kenan BP schema: ABI_FIELD_MAPPING.

Please see [“ABI FIELD MAPPING”](#) on [page 21](#).

- The following table is added to the Kenan BP schema: EXTERNAL_ENTITY_MAPPING_TYPE.

Please see [“EXTERNAL ENTITY MAPPING TYPE” on page 274.](#)

- The following table is added to the Kenan BP schema: EXTERNAL_ENTITY_MAPPING.

Please see [“EXTERNAL ENTITY MAPPING” on page 273.](#)

- The following table is added to the Kenan BP schema: ABI_ACCOUNT_TEMPLATE.

Please see [“ABI ACCOUNT TEMPLATE” on page 16.](#)

- The following table is added to the Kenan BP schema: ABI_SERVICE_TEMPLATE.

Please see [“ABI SERVICE TEMPLATE” on page 26.](#)

- The following table is added to the Kenan BP schema: ABI_PRODUCT_CATALOG_TEMPLATE.

Please see [“ABI PRODUCT CATALOG TEMPLATE” on page 23.](#)

- **DR-2-025-151: Early Payment Incentive**

- The following table is added to the Kenan BP schema: EPI_ASSIGNMENT.

Please see [“EPI ASSIGNMENT” on page 260.](#)

- The following table is added to the Kenan BP schema: EPI_REF.

Please see [“EPI REF” on page 261.](#)

- The following table is added to the Kenan BP schema: EPI_VALUE.

Please see [“EPI VALUE” on page 262.](#)

- **DR-2-025-133: Tagging of catalogue entities: Provide a basis for external manipulation of Admin database entities through an agnostic tagging mechanism**

Field `config_tag_id` is added to all non-dynamic Admin tables.

See each separate table below for the revised schema.

- **DR-2-025-661: Version Control for FX Launcher and Subsystems**

- The following table is added to the Kenan BP schema: GUI_VERSION.

Please see [“GUI VERSION” on page 327.](#)

■ **DR-0-214-287: Shared Business Day Calendar**

- The following table is added to the Kenan BP schema: BUSINESS_DAY_DEFINITION.

Please see [“BUSINESS_DAY_DEFINITION” on page 118.](#)

- The following table is added to the Kenan BP schema: BUSINESS_DAY_REF.

Please see [“BUSINESS_DAY_REF” on page 119.](#)

- The following table is added to the Kenan BP schema: BUSINESS_DAY_VALUES.

Please see [“BUSINESS_DAY_VALUES” on page 120.](#)

■ **DR-2-025-154: Include Customer Center flag representing the Customer Lifetime Value**

- The following table is added to the Kenan BP schema: CUSTOMER_LIFETIME_ID_REF.

Please see [“CUSTOMER_LIFETIME_ID_REF” on page 209.](#)

- The following table is added to the Kenan BP schema: CUSTOMER_LIFETIME_ID_VALUES.

Please see [“CUSTOMER_LIFETIME_ID_VALUES” on page 210.](#)

■ **DR-2-024-979: Enhanced Customer Center Application Audit Trails Logging**

- The following table is added to the Kenan BP schema: CC_ATTRIBUTES_DEF.

Please see [“CC_ATTRIBUTES_DEF” on page 129.](#)

- The following table is added to the Kenan BP schema: CC_VIEW_ATTRIBUTES.

Please see [“CC_VIEW_ATTRIBUTES” on page 132.](#)

- The following table is added to the Kenan BP schema: CC_VIEW_DEF.

Please see [“CC_VIEW_DEF” on page 133.](#)

■ **DR-2-027-085: Daily ETUC and 24-hours for ETUC**

- The following values are added to CONTRACT_TYPES.contract_category:
17 = midnight to midnight daily RC
27 = 24 hours after transaction date of first CDR.

Please see [“CONTRACT_TYPES” on page 191.](#)

■ **DR-2-025-134: Add Time-Sensitivity to Ordering and Usage Processing**

- The following fields are added to the CONTRACT_TYPES table:
start_dt_rounding_method
end_dt_rounding_method

Please see [“CONTRACT TYPES” on page 191](#).

■ **DR-2-025-149: ARCH Enhancements**

- The following table has been modified in the Kenan BP schema: ARCH_TYPE_REF, with these columns added: is_active, is_legacy, output_mode, and master_table_query.

Please see [“ARCH TYPE REF” on page 66](#).

- The following table has been modified in the Kenan BP schema: ARCH_TABLE_DEPENDS_REF, with these columns added: arch_key_resets_flg_nm, del_seq, deletion_detection_query, drop_detection_query, archive_and_delete_query, partition_drop_query, and unprocessed_data_err_msg.

Please see [“ARCH TABLE DEPENDS REF” on page 65](#).

Chapter 2

Administration Tables

2

orded (sender
The desti
notifying
ng The noti
ieve The m
cT access To

e

This chapter contains a detailed description of every table in the Kenan BP Admin database, in alphabetical order. Each table description includes the following information:

- table name and brief description of table
- list of Kenan BP modules that use the table
- list of tables that depend on the table
- descriptions of triggers, check constraints, foreign keys, and indexes defined on the table
- descriptions of every field in the table

Each field description includes the following information:

- field name
- data type and size (see below)
- comments — brief field description
- values — rules that constrain field values (preceded by R:) and default values for the field (preceded by D:)
- null — indicates whether a Null value is allowed in the field

The data type associated with each field depends on the relational database (RDB) system your deployment uses. For example, the `is_default` field in `ACCESS_REGION_REF` is a Number (1) field in an Oracle database and a bit field in a Sybase database.



Oracle deployments have rules restricting the domain of Number fields (in Admin tables) to the range of the equivalent Sybase data type, as listed in table 2.



When you insert data, including a single quote (') in a text string can cause an error.



Active date ranges are always inclusive of the endpoints, and inactive date ranges are always exclusive.

Every field description in this document contains a single documented data type. Table 2, “Field Types,” on page 14 lists the valid documented data types and their corresponding RDB data types for Oracle and Sybase.

Table 2 Field Types

Documented Type	Oracle Type	Sybase Type	Minimum Value	Maximum Value
bit	Number(1,0)	bit (1 byte)	0	1
char[N]	char(N)	char[N]	N characters	N characters
Fixed-length string, padded with blanks if smaller than N. N cannot exceed 255.				
datetime	date	datetime (8 bytes)	varies	varies
For Oracle, stores date/time between January 1, 4712 B.C. and December 31, 4712. For Sybase, stores date/time between January 1, 1753 and December 31, 9999.				
image	blob	image (16 bytes)	—	—
For Oracle, stores variable-length binary data up to 2 GB. For Sybase, stores a pointer to a memory space allocated in multiples of 2 KB that cannot exceed 2 GB.				
int	Number(10,0)	int (4 bytes)	-2,147,483,648 (-2 ³¹)	2,147,483,647 (2 ³¹ - 1)
numeric	Number(18,0)	numeric (10) (8 bytes)	-999,999,999, 999,999,999	999,999,999, 999,999,999
smalldt	date	smalldatetime (4 bytes)	varies	varies
For Oracle, stores date/time between January 1, 4712 (B.C.) and December 31, 4712. For Sybase, stores date/time between January 1, 1900 and June 6, 2079.				
smallint	Number(6,0)	smallint (2 bytes)	-32,768 (-2 ¹⁵)	32,767 (2 ¹⁵ - 1)
text	varchar2(4000)	text (16 bytes)	—	—
For Oracle, stores variable-length character data up to 4000 bytes. For Sybase, stores a pointer to a memory space allocated in multiples of 2 KB that cannot exceed 2 GB.				
tinyint	Number(3,0)	tinyint (1 byte)	0	255
varchar[N]	varchar2(N)	varchar[N]	0 characters	N characters
Variable-length string. N cannot exceed 255.				

Table 2 also includes minimum and maximum values for each documented type. These are not necessarily the minimum and maximum supported by your database; rather, they are the minimum and maximum values supported by Kenan BP for fields of this type. Therefore, you should not enter field values that exceed the minimum or maximum values documented here, even if the corresponding RDB data type allows those values.

The data type column for char and varchar fields can display two values:

- the character limit
- the physical size

The value on the right is the character limit of the field. The character limit of the field indicates the maximum number of characters the field can hold.



Do not enter values with sizes larger than the character limit listed. Doing so may result in corrupt data.

The value in parentheses is the physical size of the field. The physical size of the field is the number of bytes needed to store a field.

In the example below, the character limit for short_display is 5 characters and the physical size of the field is 15 bytes.

Table 3 Sample Row

Field Name	Data Type	Comments	Values	Null
short_display	varchar (15) 5	Short text description for ABI source.		Null

ABI_ACCOUNT_TEMPLATE

Configurable. Defines the attributes of the account. Read-only copy exists on Customer database.

Indexes: primary-key on lob_id, external_id_type

Foreign Keys lob_id must exist in LINE_OF_BUSINESS_REF
external_id_type must exist in EXTERNAL_ID_TYPE_REF

Field Name	Data Type		Comments	Values	Null
lob_id	int		Line of business identifier.		Null
external_id_type	smallint		External id source identifier.		Null
tie_code	smallint		Code used to link multiple accounts.		Null
bill_sequence_num	int		Sequence number of most recent invoice. See BILL_INVOICE.bill_sequence_num.		
currency_code	smallint		Currency code, defined in RATE_CURRENCY_REF.	(D: 1)	
language_code	smallint		Language code, defined in LANGUAGE_CODE_REF.	(D: 1)	
account_type	tinyint		Indicates whether or not the account should be billed? (1 = yes)	(D: 1) (R: 0, 1)	
account_category	tinyint		Account category identifier, defined in ACCOUNT_CATEGORY_REF.		
bill_name_pre	nvarchar	4	Name prefix (Mr., Mrs., Ms., and so on).		Null
bill_fname	nvarchar	28	Customer first name.		Null
bill_minit	nvarchar	30	Customer middle initial.		Null
bill_lname	nvarchar	56	Customer last name.		Null
bill_name_generation	nvarchar	4	Name suffix (Sr., Jr., III, and so on).		Null
bill_title	nvarchar	40	Customer title.		Null
bill_company	nvarchar	56	Customer company name.		Null
cust_address1	nvarchar	75	First line of the customer address.		Null
cust_address2	nvarchar	75	Second line of the customer address.		Null
cust_address3	nvarchar	75	Third line of the customer address.		Null
cust_city	nvarchar	35	Customer city.		Null
cust_state	nvarchar	28	Customer region.		Null
cust_zip	varchar	16	Customer zip code.		Null
cust_country_code	smallint		Country for customer address, defined in COUNTRY_CODE_REF.	(D: 840) (R: > 0)	Null
cust_franchise_tax_code	smallint		Franchise tax code for this customer.		Null
cust_geocode	varchar	15	Defines authorities on which customer is taxed based on the address.		Null

Field Name	Data Type		Comments	Values	Null
cust_county	nvarchar	28	Customer county.		Null
cust_phone1	varchar	20	Customer daytime phone number.		Null
cust_phone2	varchar	20	Customer evening phone number.		Null
bill_address1	nvarchar	75	First line of master bill address.		Null
bill_address2	nvarchar	75	Second line of master bill address.		Null
bill_address3	nvarchar	75	Third line of master bill address.		Null
bill_city	nvarchar	35	City for master bill address.		Null
bill_state	nvarchar	28	State for master bill address.		Null
bill_zip	varchar	16	Zip code for master bill address.		Null
bill_country_code	smallint		Country for master bill address, defined in COUNTRY_CODE_REF.	(D: 840) (R: > 0)	Null
bill_franchise_tax_code	smallint		Franchise tax code for master bill.		Null
bill_county	nvarchar	28	County for master bill address.		Null
bill_geocode	varchar	15	Defines authorities at which account will be taxed on master bill.		Null
ssn	varchar	20	Customer social security number.		Null
contact1_name	nvarchar	60	Name of first contact.		Null
contact2_name	nvarchar	60	Name of second contact.		Null
contact1_phone	varchar	20	Phone number for first contact.		Null
contact2_phone	varchar	20	Phone number for second contact.		Null
cust_faxno	varchar	20	Customer fax number.		Null
statement_to_faxno	varchar	20	Fax number to receive the bill.		Null
credit_thresh	numeric	18	Maximum amount of the accumulated charges allowed before the action is initiated (not used).		Null
cred_status	smallint		Account's current credit status.		Null
credit_rating	smallint		Account credit rating, used to determine collections scenario.	(D: 0)	
disconnect_reason	smallint		Disconnect reason code, defined in DISCONNECT_REASON_REF.		Null
disc_rcv_opt	smallint		Disconnect recovery option (not used).		Null
thresh_ref	int		Code to determine action if amount is greater than credit threshold (not used).		Null
bill_period	varchar	3	Bill cycle identifier, defined in BILL_PERIOD_REF.		Null
billing_frequency	tinyint		Billing frequency code, defined in BILLING_FREQUENCY_REF.		Null
bill_fmt_opt	int		Bill format option, defined in BILL_FMT_OPT_REF.		Null

Field Name	Data Type		Comments	Values	Null
bill_disp_meth	smallint		Bill dispatch method, defined in BILL_DISP_METH_REF.		Null
bill_hold_code	tinyint		Type of bill hold: 1 = temporary bill hold 2 = permanent bill hold	(R: 1, 2)	Null
msg_grp_id	smallint		Customer group ID that controls messages included on bill, defined in MSG_GRP_ID_REF and BILL_MESSAGES.		Null
insert_grp_id	smallint		Customer group ID that controls inserts included with bill, defined in INSERT_GRP_ID_REF.		Null
rate_class_default	smallint		Default account-level rating component identifier, from RATE_CLASS_DESCR.		Null
rate_class_special	smallint		Reserved for future use.		Null
exrate_class	smallint		Exchange rate class, defined in EXRATE_CLASS_REF.		Null
plan_id_discount	int		Discount plan ID, defined in PLAN_ID_DISCOUNT_REF.		Null
plan_id_credit	int		Credit plan ID, defined in PLAN_ID_CREDIT_REF.		Null
account_status	smallint		Account status: -2 = DISC_DONE -1 = NEW 0 = CURRENT >0 = DISC_REQ	(R: >= -3)	
account_status_dt	smalldt		Date and time the account status field was changed.		
distr_chan	nvarchar	10	Account channel (not used).		Null
sales_code	nvarchar	13	Sales representative ID.		Null
mkt_code	smallint		Market code of market segment the account is associated with, or 3 (individual), defined in MKT_CODE_REF.		Null
sic_code	smallint		Customer Standard Industry Code identifier.		Null
in_use	varchar	8	Process name of BIP process billing the account.		Null
no_bill	bit		Is this record billable? (1 = no)	(D: 0)	
collection_indicator	tinyint		Indicates whether an account is in collections: 0 = not in collections 1 = automatically placed into collections	(R: 0, 1)	
collection_status	tinyint		Current collection status of the account.	(D: 0)	
collection_history	varchar	12	A rolling history for past 12 bill periods showing the most serious collection activity that occurred that month.		Null
vip_code	tinyint		VIP code, defined in VIP_CODE_REF.	(D: 0)	

Field Name	Data Type		Comments	Values	Null
purchase_order	nvarchar	16	Purchase order number.		Null
codeword	nvarchar	20	Customer security identifier.		Null
remark	nvarchar	80	Free form text or comments.		Null
cust_email	varchar	144	Customer e-mail address.		Null
statement_to_email	varchar	144	E-mail address to receive the bill.		Null
date_created	smalldt		Date and time when the record was created.		
date_inactive	smalldt		Date and time when the account is inactive.		Null
rev_rcv_cost_ctr	smallint		Revenue receiving cost center ID, defined in REV_RCV_COST_CENTER_REF.		
owning_cost_ctr	smallint		Owning cost center ID, defined in OWNING_COST_CTR_REF.		
acct_seg_id	int		Segment of customer accounts to which this account belongs, defined in ACCT_SEG_REF, or 0 for "no segment."	(D: 0)	
converted	tinyint		Conversion flag for use during database upgrades: 0 = not converted 1 = modified since last conversion (if any) 2 = converted	(D: 0) (R: 0, 1, 2)	
charge_threshold	numeric	18	Invoices less than this amount are suppressed for this account.	(D: 0) (R: >= 0)	
threshold	numeric	18	Reserved for future use.	(D: 0)	
cyclical_threshold	numeric	18	Reserved for future use.	(D: 0)	
usg_amt_limit	numeric	18	Reserved for future use.		Null
usg_units_limit	numeric	18	Reserved for future use.		Null
regulatory_id	smallint		Identifies the jurisdiction to which this account is subject.		
global_contract_status	tinyint		Whether the global contract applies to the account: 0 = no global contracts apply 1 = all global contracts apply	(D: 1) (R: 0, 1)	
alt_lname	nvarchar	60	Alternate last name; requires LOCATION sysparm = 1		Null
alt_fname	nvarchar	30	Alternate first name; requires LOCATION sysparm = 1		Null
alt_company_name	nvarchar	60	Alternate company name; requires LOCATION sysparm = 1		Null
gender	smallint		Gender of customer; requires LOCATION sysparm = 1 ; from GENDER_REF. Valid genders are Male, Female, Company, and Unknown.		Null
dept	nvarchar	40	Department name; requires LOCATION sysparm = 1		Null
title	nvarchar	40	Title; requires LOCATION sysparm = 1		Null

Field Name	Data Type		Comments	Values	Null
payment_profile_id	numeric	18	Payment profile ID, from PAYMENT_PROFILE.		
account_process_flag	int		Determines if it is a big account or small account. For small account, BIP process tasks in main thread. For large account, BIP divide tasks into threads to improve performance. RC thread and NRC thread are always created for Big account. Usage threads, backout threads, insert CDR_BILLED threads are decided by seperate system parameters (MT_***).	(0, 1) Where, 0:Smallaccount(default value) 1: Big account	
auto_writeoff_status	tinyint		Records the write-off status.		Null
sd_agency_id	varchar	20	SD agency Identifier.		
customer_lifetime_id	tinyint		Customer lifetime Identifier.		Null
customer_lifetime_id2	tinyint		Customer lifetime value override field.		Null
is_enable	bit		0= disables the auto creation for new account 1= enables the auto creation for new account		

ABI_FIELD_MAPPING

Configurable. Defines the mapping between a field in an input file record and a field in a DB record. Configures the init file to supply an “out of the box” preconfigured format. Read-only copy exists on Customer database.

Used by the following modules: ABI

Indexes: primary-key on record_type_id_from, record_type_id_to, field_name_from, field_to_name

Foreign Keys
 (record_type_id_from) must exist in ABI_RECORD_FIELDS(record_type_id)
 (record_type_id_to) must exist in ABI_RECORD_FIELDS(record_type_id)
 (field_name_from) must exist in ABI_RECORD_FIELDS(field_name)
 (field_name_to) must exist in ABI_RECORD_FIELDS(field_name)

Field Name	Data Type		Comments	Values	Null
record_type_id_from	int		Record type Identifier from the Input file record from which to map.		
field_name_from	varchar	50	Field name from the Input file record from which to map.		
record_type_id_to	int		Record type Identifier from the DB record to which to map.		
field_to_name	varchar	50	Field name from the DB record to which to map.		
entity_mapping_type	int		Mapping domain.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ABI_HISTORY

Configurable. Stores CTM history information. Read-only copy exists on Customer database.

Used by the following modules: ABI

Indexes: primary-key on file_id, file_id_serv, external_invoice_id

Field Name	Data Type		Comments	Values	Null
file_id	int		Record type Identifier, from the Input file record. The file has been processed or partially processed for FILE_STATUS.		
file_id_serv	tinyint		Server ID.		
file_name	varchar	80	The file name has been processed or partial processed, from FILE_STATUS .		
external_invoice_id	int		The invoice_id processed in this file.		
invoice_record_count	int		The number of records in this invoice.		
ext_contact_id	smallint		External data source identifier, from EXT_CONTACTS.		

ABI_PRODUCT_CATALOG_TEMPLATE

Configurable. This is a look up table to check the key1,key2,key3 for the tables PRODUCT_ELEMENTS and DESCRIPTIONS. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on table_name, key1, key2, key3

Field Name	Data Type		Comments	Values	Null
table_name	varchar	50	Kenan tablesfor product catalog data. {USAGE_TYPE, RATE_CURRENCY_REF, RATE_CURRENCY_VALUES, NRC_TRANS_DESCR, DESCRIPTIONS, OPEN_ITEM_ID_REF, OPEN_ITEM_ID_VALUES}		
key1	int		The first key of this template.		
key2	int		The second key of this template.		Null
key3	int		The third key of this template.		Null
description_code	int		Internal identifier of a description.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
is_enable	int		If is_enable = 0, disable this template If is_enable > 0, the priority of the template		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ABI_RECORD_FIELDS

Configurable. Defines the ABI record format of the file and configures the init file to supply an “out of the box” preconfigured format.

Used by the following modules: ABI

Indexes: primary key on record_type_id, field_name

Foreign Keys (record_type_id) must exist in ABI_RECORD_TYPE

Field Name	Data Type		Comments	Values	Null
record_type_id	int		Identifier of the record type.		
field_name	varchar	50	Name of this field.		
field_order	int		Order in which this field appears in the file.		
default_value	varchar	4000	Value to be used if the field is NULL.		Null
data_type	int		Data type for this field: 1 = integer 2 = string 3 = date 4 = subrecords		Null
format	varchar	30	Format for this field. For example, if the field represents a date: DD-MM-YY, or if the field represent a monetary amount: a negative integer or a positive integer.		Null
notes	varchar	30	Description for this field		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ABI_RECORD_TYPE

Configurable. Defines the ABI record type; includes two subclasses: file record type and DB record type; each file record type is associated with a DB record type. Read-only copy exists on Customer database.

Used by the following modules: ABI

Indexes: primary-key on record_type_id

Foreign Keys (record_type_id_tgt) must exist in ABI_RECORD_TYPE (record_type_id)

Field Name	Data Type		Comments	Values	Null
record_type_id	int		Identifier for record type.		
external_id	int		The identifier of the record type expected in the input record.		
record_type	smallint		Record type: 1= File record type 2= DB record type		
description	varchar	30	Description text for the ABI record type.		Null
record_type_id_tgt	int		The identifier for the DB record to which to map.		
priority	tinyint		The priority for the map between record_type_id and record_type_id_tgt; The value of highest priority is 'one'.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ABI_SERVICE_TEMPLATE

Configurable. Specifies the attributes of the service. Read-only copy exists on Customer database.

Used by the following modules: ABI

Indexes: primary-key on lob_id, external_id_type

Foreign Keys (lob_id) must exist in LINE_OF_BUSINESS_REF (lob_id)
(external_id_type) must exist in EXTERNAL_ID_TYPE_REF (external_id_type)

Field Name	Data Type		Comments	Values	Null
lob_id	int		Line of business Identifier.		
external_id_type	smallint		External id source identifier.		
b_rev_rcv_cost_ctr	smallint		Revenue receiving cost center ID for the b-end of a leased line, defined in REV_RCV_COST_CENTER_REF.		Null
b_service_fname	varchar (84)	28	First name of contact for second service address.		Null
b_service_minit	varchar (90)	30	Middle initial of contact for second service address.		Null
b_service_lname	varchar (168)	56	Last name of contact for second service address.		Null
b_service_company	varchar (168)	56	Company name for second service address.		Null
b_service_phone	varchar	20	Second service address; daytime phone.		Null
b_service_phone2	varchar	20	Second service address; evening phone.		Null
codeword	varchar (60)	20	Security word or code for the service instance.		Null
converted	tinyint		Conversion flag for use during database upgrades: 0 = not converted 1 = modified since last conversion (if any) 2 = converted	(D: 0) (R: 0, 1, 2)	
currency_code	smallint		Currency code, defined in RATE_CURRENCY_REF.		
display_external_id_type	smallint		External ID type (from EXTERNAL_ID_TYPE_REF) used on invoices for this subscription.		
elig_key1	int		Reserved for future use.		Null
elig_key2	int		Reserved for future use.		Null
elig_key3	int		Reserved for future use.		Null
emf_config_id	smallint		Default configuration, defined in EMF_CONFIG_ID_REF.		
exrate_class	smallint		Exchange rate class, defined in EXRATE_CLASS_REF.		Null
ixc_provider_id	smallint		Used by Kenan/OM system.		Null

Field Name	Data Type		Comments	Values	Null
lec_provider_id	smallint		Used by Kenan/OM system.		Null
no_bill	bit		Is this record billable? (1 = no)		
nonpub_nonlist	smallint		Used by Kenan/OM system.		Null
pic_date_active	datetime		Used by Kenan/OM system.		Null
pop_units	int		Number of units for units-based RC rating.		Null
privacy_level	smallint		B-number truncation level, defined in PRIVACY_LEVEL_REF.		
rate_class	smallint		Rate class, from RATE_CLASS_DESCR.		Null
restricted_pic	smallint		Used by Kenan/OM system.		Null
rev_rcv_cost_ctr	smallint		Revenue receiving cost center ID, defined in REV_RCV_COST_CENTER_REF.		
service_name_pre	varchar (12)	4	Prefix for contact's name (for example, Mr., Mrs., Ms.).		Null
service_fname	varchar (84)	28	First name of contact.		Null
service_minit	varchar (90)	30	Middle initial of contact.		Null
service_lname	varchar (168)	56	Last name of contact.		Null
service_name_generation	varchar (12)	4	Contact's generation identifier (for example, Jr., Sr.).		Null
service_name_company	varchar	56	Company name of contact		Null
service_phone	varchar	20	Service address; daytime phone.		Null
service_phone2	varchar	20	Service address; evening phone.		Null
sales_channel_id	smallint		Reserved for future use.		Null
sim_serial_number	varchar	20	Reserved for future use.		Null
switch_id	varchar (72)	24	ID of the switch, platform, or node.		Null
timezone	tinyint		Time zone identifier, defined in TIMEZONE_REF.		Null
is_prepaid	bit		Is this prepaid? (1=yes)		
service_address1	varchar	75	Service address, line 1.		Null
service_address2	varchar	75	Service address, line 2.		Null
service_address3	varchar	75	Service address, line 3.		Null
service_city	varchar	35	Service address; city.		Null
service_state	varchar	28	Service address; state.		Null
service_zip	varchar	16	Service address; zip code		Null

Field Name	Data Type		Comments	Values	Null
converted	tinyint		Conversion flag for use during database upgrades: 0 = not converted 1 = modified since last conversion (if any) 2 = converted	(D: 0) (R: 0, 1, 2)	
service_inactive_dt	datetime		Date and time the service instance was removed from service.		Null
is_enable	bit		0= disable the auto creation for a new service 1= enable the auto creation for a new account		
active_dt	datetime		Date and time that the service started.		Null

ABI_SOURCE_RECORD_TYPES

Configurable. Reserved for future use. Admin table. Read-only copy exists on Customer database.

Used by the following modules: ABI

Triggers: target_type has a valid type code that corresponds to the value of target_table.

Indexes: unique on target_table, target_type
primary-key on source_id, abi_source_record_type

Field Name	Data Type		Comments	Values	Null
source_id	int		Data source ID, from ABI_SOURCE_REF.		
abi_source_record_type	tinyint		Type of record from source biller: 1 = credit invoice record 2 = debit invoice 3 = postbill adjustment 4 = non-recurring charge	(R: 1, 2, 3, 4)	
target_table	tinyint		Table to which Kenan/BP should write record based on record type: 1 = ADJ 2 = NRC 3 = BMF	(R: 1, 2, 3)	
target_type	smallint		Corresponding type code for the NRC, ADJ, or BMF record.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ABI_SOURCE_REF

Configurable. Reserved for future use. Describes valid billing sources. Admin table. Read-only copy exists on Customer database.

Used by the following modules: ABI

Dependents: ABI_SOURCE_VALUES, CMF_ABI_SOURCES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `source_id`

Field Name	Data Type		Comments	Values	Null
source_id	int		Unique internal ID for ABI source.		
missed_bill_code	tinyint		Indicates behavior if records from this billing source are missing at billing time: 1 = create bill showing zero due for source 2 = create bill omitting section associated with source 3 = hold the bill until data received	(R: 1, 2, 3)	
revenue_owner	tinyint		Defines who owns the revenue associated with this billing source: 1 = Kenan/BP 2 = someone else	(R: 1, 2)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ABI_SOURCE_VALUES

Configurable. Reserved for future use. Describes billing sources defined in ABI_SOURCE_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: ABI

Indexes: primary-key on source_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(source_id) must exist in ABI_SOURCE_REF(source_id)

Field Name	Data Type		Comments	Values	Null
source_id	int		Source ID, from ABI_SOURCE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Short text description for ABI source.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCESS_REGION_REF

Static. Defines valid access regions for vertical and horizontal rating. Populated via the LOAD_USG_PTS utility. Admin table. Read-only copy exists on Customer database.

Dependents: ACCESS_REGION_VALUES, DISTANCE_BANDS

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `access_region`

Field Name	Data Type		Comments	Values	Null
access_region	varchar (15)	5	Unique identifier of an access region (LATA).		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCESS_REGION_VALUES

Configurable. Describes access regions defined in ACCESS_REGION_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on access_region, language_code

Foreign Keys (access_region) must exist in ACCESS_REGION_REF(access_region)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
access_region	varchar (15)	5	Access region, from ACCESS_REGION_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCOUNT_CATEGORY_REF

Configurable. Defines all account categories (for example, business or residential) for this deployment. Admin table. Copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: ACCOUNT_CATEGORY_VALUES, CMF, LATE_FEE_ASSIGNMENT, RE_CHARGE_MODIFIER, TAX_ASSIGNMENTS

Triggers: Only one row can have `is_default = 1`.
On insert, check that `is_prepaid` is 0 unless the `PREPAY_VERSION` system parameter is set.

Indexes: This table has no indexes.

Field Name	Data Type		Comments	Values	Null
account_category	tinyint		Unique identifier of an account category.	(R: != 255)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
is_reseller	bit		Are accounts of this category resellers? (1=yes)		
is_business	tinyint		Is the account a business (1) or residential (0) account? This used only by Kenan/BP in CommTax or CTM taxation.	(R: 0, 1)	
interim_due_days	smallint		Number of days after <code>interim_bill_date</code> to set <code>ppdd_date</code> for interim bills for accounts of this category. If -1 (default), use <code>ppdd_date</code> from customer's next bill cycle.	(D: -1) (R: >= -1)	
consolidate_usage	bit		Does the account category allow CAP to summarize usage? (1 = yes)	(D: 0)	
is_prepaid	tinyint		Identifies whether account is prepaid: 0 = Does not allow prepaid (postpaid only) 1 = Only allows prepaid 2 = Allows either prepaid or postpaid or both 3 = Anonymous prepaid	(D: 0) (R: 0, 1, 2, 3)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCOUNT_CATEGORY_VALUES

Configurable. Describes account categories defined in ACCOUNT_CATEGORY_REF. Admin table. Copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on account_category, language_code

Foreign Keys (account_category) must exist in ACCOUNT_CATEGORY_REF(account_category)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
account_category	tinyint		Account category identifier, from ACCOUNT_CATEGORY_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCOUNT_MOVE_TABLES

Configurable. Contains information about what data in which tables must be moved. Admin table. Read-only copy exists on Customer database.

Used by the following modules: AMP

Triggers: table_move_id cannot be updated.

Indexes: primary-key on table_move_id

Field Name	Data Type		Comments	Values	Null
table_move_id	numeric	18	Unique ID of the move. Automatically generated.		IDENTITY
table_name	varchar	30	Name of the table.		
table_alias	varchar (30)	10	Alias for the table name. It can be Null if no aliases are used in from_tables.		Null
from_tables	varchar	255	The FROM clause of the SQL query used to find the information to move.		
where_clause	varchar	511	The WHERE conditions of the SQL query used to find the information to move.		
run_order	smallint		Order in the execution sequence for insert. Tables with lower order will be inserted first. If Null, the order is not important.		Null
delete_order	smallint		Order in the execution sequence for delete. Normally the same as run_order. Tables with higher order will be deleted first. If Null, the order is not important.		Null
distinct_flag	bit		Indicates that only distinct values are copied.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCT_SEG_MAP

Configurable. Maps customer segments to other branding fields. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on acct_seg_id

Field Name	Data Type		Comments	Values	Null
acct_seg_id	int		Account segment ID, from ACCT_SEG_REF.		
mkt_code	smallint		Market code, from MKT_CODE_REF.		
franchise_code	smallint		Franchise code, from FRANCHISE_CODE_REF.		
rev_rcv_cost_ctr	smallint		Revenue receivable cost center ID, from REV_RCV_COST_CENTER_REF.		
remit_service_center	smallint		Remittance service center ID, from SERVICE_CENTERS.		
billing_service_center	smallint		Billing service center ID, from SERVICE_CENTERS.		
service_inquiry_center	smallint		Inquiry service center ID, from SERVICE_CENTERS.		
collections_center	smallint		Collections service center ID, from SERVICE_CENTERS.		
msg_grp_id	smallint		Message group ID, from MSG_GRP_ID_REF.		
insert_grp_id	smallint		Insert group ID, from INSERT_GRP_ID_REF.		
vip_code	tinyint		VIP code, from VIP_CODE_REF.		
rate_class	smallint		Rate class, from RATE_CLASS_DESCR.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCT_SEG_REF

Configurable. Describes customer account segments. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Copy exists on Catalog database. Copy exists on Customer database.

Used by the following modules: Customer Center, API

Dependents: ACCT_SEG_VALUES, CMF, SERVER_LOOKUP

Triggers: No row can have `is_default = 1`.

Indexes: primary-key on `acct_seg_id`

Field Name	Data Type		Comments	Values	Null
acct_seg_id	int		Unique internal ID for a segment of accounts.	(R: >= 0)	
is_default	bit		Must be 0.	(D: 0)	
is_internal	bit		If 1, Kenan BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ACCT_SEG_VALUES

Configurable. Describes account segments defined in ACCT_SEG_REF. Run the replicate.ksh script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about replicate.ksh. Admin table. Copy exists on Catalog database. Copy exists on Customer database.

Used by the following modules: Customer Center, API

Indexes: primary-key on acct_seg_id, language_code

Foreign Keys (acct_seg_id) must exist in ACCT_SEG_REF(acct_seg_id)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
acct_seg_id	int		Account segment ID, from ACCT_SEG_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Short text description for account segment.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADDRESS_CATEGORY_REF

Configurable. Defines valid address categories and the properties. Admin table.

Dependents:

ADDRESS_CATEGORY_VALUES, EMF_CONFIG_ADDR_CATEGORY_MAP, SERVICE_ADDRESS_ASSOC, SERVICE_ADDRESS_ASSOC

Indexes:

primary-key on address_category_id

Field Name	Data Type		Comments	Values	Null
address_category_id	tinyint		Unique address category ID. 1 = Service Address 2 = B-end Service Address 3 = Shipping Address	(R: 1, 2, 3)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan BP modules require this record; do not delete or modify.	(D: 1)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADDRESS_CATEGORY_VALUES

Configurable. Display values for address category IDs. Admin table.

Indexes: primary-key on address_category_id, language_code

Foreign Keys (address_category_id) must exist in ADDRESS_CATEGORY_REF(address_category_id)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
address_category_id	tinyint		Address category ID, from ADDRESS_CATEGORY_REF .		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADDRESS_TYPE_REF

Configurable. Defines valid address types and their properties. Admin table.

Dependents: ADDRESS_TYPE_VALUES, EMF_CONFIG_ADDR_CATEGORY_MAP, LOCAL_ADDRESS, MASTER_ADDRESS

Triggers:

If is_freeform is 1, is_csr_entrable must be 1.
 If is_freeform_indicator is 1, all address_lineX_format_string fields must be NULL.
 If is_freeform_indicator is 1, then is_streetnumber_required must be 0.
 If is_freeform_indicator is 1, then is_streetname_required must be 0.

Indexes:

primary-key on address_type_id

Field Name	Data Type		Comments	Values	Null
address_type_id	tinyint		Unique address type ID. 1 = not a freeform address 2 = freeform address 3 = temporary address	(R: 1, 2, 3)	
is_freeform	bit		Is the address freeform? (1 = yes)		
is_csr_entrable	bit		Can a CSR enter this address type? (1 = yes)		
address_line1_format_string	varchar (765)	255	Address line 1 format string, such as: '{house_number}+{house_number_suffix}+' '\'+{prefix_directional}+' '\'+{street_name}+' '\'+{street_suffix}+' '\'+{postfix_ directional}'\		Null
address_line2_format_string	varchar (765)	255	Address line 2 format string, such as: '{city}+' '\'+{state}'		Null
address_line3_format_string	varchar (765)	255	Address line 3 format string, such as: '{country_code}+' '\'+{postal_code}'		Null
address_line4_format_string	varchar (765)	255	Address line 4 format string.		Null
is_streetname_required	bit		Is a street name required? (1 = yes)		
is_housenumber_required	bit		Is a house number required? (1 = yes)		
is_city_required	bit		Is a city required? (1 = yes)		
is_state_required	bit		Is a state required? (1 = yes)		
is_postalcode_required	bit		Is a postal code required? (1 = yes)		
is_fxgeocode_required	bit		Is a geocode required? (1 = yes)		
is_serviceable	bit		Is the address serviceable? (1 = yes)		

Field Name	Data Type		Comments	Values	Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADDRESS_TYPE_VALUES

Configurable. Display values for address type IDs. Admin table.

Indexes: primary-key on address_type_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(address_type_id) must exist in ADDRESS_TYPE_REF(address_type_id)

Field Name	Data Type		Comments	Values	Null
address_type_id	tinyint		Address type ID, from ADDRESS_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADJ_REASON_CODE_REF

Configurable. Defines valid adjustment reasons, which are included in pop-up selection lists in the GUI and used for booking adjustments. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, JNL

Dependents: ADJ, ADJ_REASON_CODE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `adj_reason_code`

Field Name	Data Type		Comments	Values	Null
adj_reason_code	smallint		Unique internal identifier of a reason for an adjustment: -2 = bill backout -1 = service termination		
journal_code	smallint		Indicates the classification of the revenue. Use this to book to the proper journal account.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADJ_REASON_CODE_VALUES

Configurable. Describes adjustment reason codes defined in ADJ_REASON_CODE_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on adj_reason_code, language_code

Foreign Keys
 (adj_reason_code) must exist in ADJ_REASON_CODE_REF(adj_reason_code)
 (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
adj_reason_code	smallint		Adjustment reason code, from ADJ_REASON_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADJ_TRANS_DESCR

Configurable. Defines valid adjustment types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIP, BIF, JNL

Dependents: ADJ, ADJ_TRANS_GROUPS

Triggers:

If trans_target_id is not zero, it must exist in PRODUCT_ELEMENTS, NRC_TRANS_DESCR, USAGE_TYPES, OPEN_ITEM_ID_REF, or PRODUCT_LINES tables. Its value is determined by trans_target_type.

System parameter PREPAID_OPEN_ITEM_THRESHOLD must be set and must be less than trans_target_id if trans_target_type = 4 and trans_target_id is not in OPEN_ITEM_ID_REF.open_item_id.

description_code must exist in DESCRIPTIONS.

If is_refinance = 1, trans_target_type must be 4 (misc. adjustment).

If tax_on_invoice = 1, billing_category must be 3.

If adj_trans_category = 1 and trans_sign = -1, billing_category must be 2 or 3 (credit adjustments to post-billed charges go against past charges or credit notes).

If adj_trans_category = 1 and trans_sign = 1, billing_category must be 1 (Debit adjustments to post-billed charges go against current charges).

If adj_trans_category = 5, trans_target_type must be 3 and billing_category must be 1 (ensure category 5 can only be used only for prebilled usage ads).

Only one row can have trans_target_type = 9 and trans_sign = 1.

Only one row can have trans_target_type = 9 and trans_sign = -1.

Reversal adjustments (adj_trans_category = 6 or 7) can only be applied to past charges or credit note reversals (billing_category = 2 or 4).

On insert or update of tax_class, either tax_class exists in TAX_RATES_VAT or is = -1, -2, or Null.

Two rows with is_negative_bill_adj = 1 cannot have the same trans_target_id.

is_journalable must be 0 when trans_category is 6 or 7.

billing_level must be 0 if trans_target_type is 4 and adj_trans_category is 1.

If is_negative_bill_adj = 1, trans_target_type must be 4, adj_trans_category, trans_sign, and billing_category must be 1, and billing_level must be 0.

Indexes: primary-key on adj_trans_code

Field Name	Data Type	Comments	Values	Null
adj_trans_code	int	Unique internal ID of an adjustment type.		
trans_target_type	smallint	Transaction target type: 1 = recurring charge for a product defined in PRODUCT_ELEMENTS 2 = non-recurring charge defined in NRC_TRANS_DESCR 3 = usage charge defined in USAGE_TYPES 4 = open item ID, defined in OPEN_ITEM_ID_REF 5 = recurring charge for product line, from PRODUCT_LINE 6 = reserved for future use 9 = system-generated reversal, in other words, not in a specific table.	(R: 1, 2, 3, 4, 5, 6, 9)	
trans_target_id	int	Identifier of transaction target type. This is to cross-reference the appropriate table. For transaction type 9 this field is zero. Otherwise, it should be a valid open_item_id.		
adj_trans_category	tinyint	Category of adjustment transaction: 1 = pre-rated 5 = prebilled usage adjustment 6 = adj backout for new charges 7 = backout for adjustments	(R: 1, 5, 6, 7)	
trans_sign	smallint	Indicates whether adjustment is a debit or a credit: 1 = debit -1 = credit	(R: -1, 1)	
billing_category	smallint	Category for billing: 1 = apply to current charges 2 = apply to past charges 3 = apply to credit note 4 = apply to credit note reversals. Non-balance affecting, usually generated during invoice backout.	(R: 1, 2, 3, 4)	
billing_level	smallint	Billing level: 0 = account level 1 = service instance level	(R: 0, 1)	
description_code	int	Description from DESCRIPTIONS table.		
tax_class	int	Tax class from TAX_RATES_VAT, or -1 = exempt -2 = outside scope of law Null = the deployment does not require VAT or Vertex Quantum taxation. Set this field to -3 if and only if the universal tax has only one active rate available.		Null
is_viewable	bit	Is the adjustment type viewable through the GUI? (1 = yes)	(D: 1)	
is_modifiable	bit	Is the adjustment type modifiable through the GUI? (1 = yes)	(D: 1)	

Field Name	Data Type		Comments	Values	Null
is_adjustable	bit		Can the adjustment type be adjusted? (1 = yes)	(D: 1)	
is_journalable	bit		Should the adjustment type be booked? (1 = yes) Set to 1 unless booked by another system.	(D: 1)	
is_displayed_onbill	bit		Is the adjustment type displayed on the bill? (1 = yes)	(D: 1)	
is_disconnect_credit	bit		Is this adjustment type a disconnect credit? (1 = yes)	(D: 0)	
is_refinance	bit		Is this adjustment a refinancing adjustment? (1 = yes)	(D: 0)	
annotation_type	tinyint		Defines which adjustment description will be shown on the invoice. 1 = use ADJ.annotation 2 = use ADJ.description_code 3 = use "Credit" and PRODUCT_ELEMENTS.description_code (used for disconnect credits)	(R: 1, 2, 3)	Null
tax_on_invoice	bit		Is the tax on this adjustment type is calculated on the next invoice? (1 = yes)	(D: 0)	
is_late_fee_exempt	bit		Is this adjustment exempt from late fees? (1 = yes)	(D: 0)	
allow_interim_bill	bit		Can this adjustment appear on interim bills? (1 = yes)	(D: 0)	
is_negative_bill_adj	bit		Is this an adjustment on a negative invoice? (1 = yes)	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADJ_TRANS_GROUPS

Configurable. Admin table. Contains the set of valid adj_trans_code values for each adjustment group.

Indexes:

primary-key on adj_trans_group, adj_trans_code
unique on adj_trans_group, priority

Foreign Keys

(adj_trans_group) must exist in ADJ_TRANS_GROUP_REF(adj_trans_group)
(adj_trans_code) must exist in ADJ_TRANS_DESCR(adj_trans_code)

Field Name	Data Type		Comments	Values	Null
adj_trans_group	smallint		Unique ID for adjustment group, from ADJ_TRANS_GROUP_REF.		
adj_trans_code	smallint		Unique internal ID of an adjustment type, from ADJ_TRANS_DESCR. Every adj_trans_code in an adj_trans_group must have the same ADJ_TRANS_DESCR.trans_target_type.		
priority	smallint		Priority. Defaults to the order of row creation within each adj_trans_group.		
trans_group_type	smallint		Must be set to the default, 1, BulkAdjRequest.	(D: 1)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADJ_TRANS_GROUP_REF

Configurable. Admin table. Defines Adjustment groups available for Bulk Financial Transactions.

Dependents: ADJ_TRANS_GROUPS, ADJ_TRANS_GROUP_VALUES

Triggers: Only 1 row can have is_default = 1.

Indexes: primary-key on adj_trans_group

Field Name	Data Type		Comments	Values	Null
adj_trans_group	smallint		Unique ID for adjustment group.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADJ_TRANS_GROUP_VALUES

Configurable. Admin table.Contains descriptions for adjustment groups.

Indexes: primary-key on adj_trans_group, language_code

Foreign Keys (adj_trans_group) must exist in ADJ_TRANS_GROUP_REF(adj_trans_group)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
adj_trans_group	smallint		Unique ID for adjustment group, from ADJ_TRANS_GROUP_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADR_SECONDARY_UNIT_TYPE

Configurable. Defines valid secondary units for addresses. Admin table.

Dependents: LOCAL_ADDRESS, MASTER_ADDRESS

Indexes: primary-key on secondary_unit_type

Field Name	Data Type		Comments	Values	Null
secondary_unit_type	varchar (18)	6	Unique secondary unit ID, such as "APT" or "DEPT". American installations should include all secondary units listed in the Geographic Directional table in Appendix C, Section C2 of the Postal Addressing Standards. http://pe.usps.gov/cpim/ftp/pubs/Pub28/pub28.pdf		
secondary_unit_type_desc	varchar (240)	80	Secondary unit description, such as "Apartment" or "Department".		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADR_STREET_DIRECTIONAL

Configurable. Defines valid street directionals for addresses. Admin table.

Dependents: LOCAL_ADDRESS, LOCAL_ADDRESS, MASTER_ADDRESS, MASTER_ADDRESS

Indexes: primary-key on street_directional

Field Name	Data Type		Comments	Values	Null
street_directional	varchar (6)	2	Unique street directional, such as "N" or "NW". American installations should include all directionals listed in the Geographic Directional table in Appendix B of the Postal Addressing Standards. http://pe.usps.gov/cpim/ftp/pubs/Pub28/pub28.pdf		
street_directional_desc	varchar (240)	80	Street directional description, such as "North" or "Northwest".		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ADR_STREET_SUFFIX

Configurable. Defines valid street suffixes for addresses. Admin table.

Dependents: LOCAL_ADDRESS, MASTER_ADDRESS

Indexes: primary-key on street_suffix

Field Name	Data Type		Comments	Values	Null
street_suffix	varchar (18)	6	Unique street suffix, such as "ST" or "DR". American installations should include all suffixes listed in the Geographic Directional table in Appendix C, Section Ca of the Postal Addressing Standards. http://pe.usps.gov/cpim/ftp/pubs/Pub28/pub28.pdf		
street_suffix_desc	varchar (240)	80	Street suffix description, such as "Street" or "Drive".		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

AGGR_USAGE_DEFINITIONS_REF

Configurable. Defines aggregate usage rate structures. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, BIP, Customer Center

Dependents: AGGR_USAGE_DEFINITIONS_VALUES, AGGR_USAGE_RESTRICTIONS, RATE_AGGR_USAGE

Triggers: active_dt cannot be updated.
If def_order is Null, it defaults to aggr_usage_id.

Indexes: primary-key on aggr_usage_id

Check Constraints: active_dt <= inactive_dt

Field Name	Data Type		Comments	Values	Null
aggr_usage_id	int		Unique ID of an aggregate usage rate structure. Should be greater than 0.	(R: > 0)	
aggr_usage_type	tinyint		Specifies the type of aggregate usage rate: 2 = incremental 6 = bulk	(R: 2, 6)	
aggr_usage_level	tinyint		Specifies hierarchy-related span of aggregation: 1 = Equipment level 2 = Billed to account 3 = Subscription owning account within billed to account	(R: 1, 2, 3)	
aggr_threshold_quantum	tinyint		Specifies quantum of rate thresholds in RATE_AGGR_USAGE: 2 = Units 3 = Items	(R: 2, 3)	
def_order	int		Application order when multiple rates apply to the same usage event. Defaults to aggr_usage_id value.	(R: > 0)	Null
active_dt	smalldt		Date the rate structure becomes active.		
inactive_dt	smalldt		Date the rate structure becomes inactive.		Null
create_dt	smalldt		Date the rate structure was defined.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

AGGR_USAGE_DEFINITIONS_VALUES

Configurable. Describes aggregate usage definitions defined in AGGR_USAGE_DEFINITIONS_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF, Customer Center

Indexes: primary-key on aggr_usage_id, language_code

Foreign Keys (aggr_usage_id) must exist in AGGR_USAGE_DEFINITIONS_REF(aggr_usage_id)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
aggr_usage_id	int		Aggregate rate ID, from AGGR_USAGE_DEFINITIONS_REF.	(R: > 0)	
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

AGGR_USAGE_RESTRICTIONS

Configurable. Controls which entities have their usage aggregated by each aggregate usage rate structure. Admin table. Read-only copy exists on Customer database.

Used by the following modules:

CAP

Triggers:

restricted_id exists in appropriate table, based on restriction_type (see below).
Rows with the same aggr_usage_id and restriction_type should have the same is_exclusion value.
If restriction_type is 5, restricted_id must be in USAGE_TYPES.type_id_usg and use_element_id cannot be 0.

Indexes:

non-unique on aggr_usage_id
unique on aggr_usage_id, restriction_type, restricted_id

Foreign Keys

(aggr_usage_id) must exist in AGGR_USAGE_DEFINITIONS_REF(aggr_usage_id)

Field Name	Data Type		Comments	Values	Null
aggr_usage_id	int		Aggregate rate ID, from AGGR_USAGE_DEFINITIONS_REF.	(R: > 0)	
restriction_type	tinyint		Specified the type of restriction: 2 = product 4 = service_provider 5 = usage type 6 = jurisdiction 7 = rate period 8 = rate class 9 = bill class 10 = point class origin 11 = point class target 12 = equip type code 13 = equip class code 14 = class of service code	(R: 2, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14)	
restricted_id	int		If restriction_type = 2, PRODUCT_ELEMENTS.element_id. If restriction_type = 4, SERVICE_PROVIDERS_REF.provider_id If restriction_type = 5, USAGE_TYPES.type_id_usg. If restriction_type = 6, JURISDICTIONS.jurisdiction If restriction_type = 7, RATE_PERIODS.seq_num If restriction_type = 8, RATE_CLASS_DESCR.rate_class If restriction_type = 9, BILL_CLASS_REF.bill_class If restriction_type = 10 or 11, POINT_CLASS_REF.point_class If restriction_type = 12, EQUIP_TYPE_CODE_REF.equip_type_code If restriction_type = 13, EQUIP_CLASS_CODE_REF.equip_class_code If restriction_type = 14, CLASS_OF_SERVICE_CODE_REF.class_of_service_code		Null
is_exclusion	bit		0 = apply the aggregate rate only to the restricted entity. 1 = apply the aggregate rate to everything except the restricted entity.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

AMP_MODE_REF

Configurable. Defines different AMP modes. Admin table. Read-only copy exists on Customer database.

Dependents: AMP_MODE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `amp_mode_id`

Field Name	Data Type		Comments	Values	Null
amp_mode_id	smallint		AMP mode ID. 0 = Full move 1 = Move only 2 = Delete only		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

AMP_MODE_VALUES

Configurable. Describes values defined in AMP_MODE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on amp_mode_id, language_code

Foreign Keys (amp_mode_id) must exist in AMP_MODE_REF(amp_mode_id)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
amp_mode_id	smallint		AMP mode ID, from AMP_MODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ARB_TAB_DEPENDS

Dynamic. Lists table constraints in the database. Populated by scripts that require dropping and reapplying constraints in the database. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Read-only copy exists on Catalog database. Read-only copy exists on Customer database.

Used by the following modules: DBA

Indexes: primary-key on `depend_id`

Field Name	Data Type		Comments	Values	Null
<code>depend_id</code>	smallint		Unique identifier of constraint.		
<code>key_nm</code>	varchar	255	Name of key.		
<code>parent_nm</code>	varchar	255	Name of the parent table.		
<code>child_nm</code>	varchar	255	Name of the child table.		
<code>parent_cols</code>	varchar	255	Columns referenced in the parent table.		
<code>child_cols</code>	varchar	255	Columns restrained in the child table.		

ARCH_MODE_REF

Static. Defines valid archive modes. Populated by scripts during installation. Do not modify. Admin table. Read-only copy on customer.

Used by the following modules: ARCH

Dependents: ARCH_MODE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `arch_mode_id`

Field Name	Data Type		Comments	Values	Null
arch_mode_id	smallint		Unique archive mode ID: 1 = Count only 2 = Archive and delete 3 = Delete only 4 = Full archive restore 5 = Individual-level restore		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	

ARCH_MODE_VALUES

Configurable. Describes archive modes. Populated by scripts during installation. Do not modify. Admin table. Read-only copy on customer.

Used by the following modules: ARCH

Indexes: primary-key on arch_mode_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(arch_mode_id) must exist in ARCH_MODE_REF(arch_mode_id)

Field Name	Data Type		Comments	Values	Null
arch_mode_id	smallint		Archive mode ID, from ARCH_MODE_REF		
language_code	smallint		Language code, from LANGUAGE_CODE_REF		
short_display	varchar (15)	5	Short text description		
display_value	varchar (240)	80	Text description to display on screen		

ARCH_TABLE_DEPENDS_REF

Static. Identifies the tables associated with each archive type. Populated by scripts during installation. Do not modify. Admin table. Read-only copy on customer.

Used by the following modules: ARCH

Dependents: ARCH_FILE_LOG, ARCH_FILE_LOG, ARCH_TABLE_STAT, ARCH_TABLE_STAT

Indexes: primary-key on arch_table_id

Foreign Keys (arch_type_id) must exist in ARCH_TYPE_REF(arch_type_id)

Field Name	Data Type		Comments	Values	Null
arch_table_id	smallint		Unique table ID. Values 1 to 27 are reserved.		
arch_type_id	smallint		Archive type used to archive this table, from ARCH_TYPE_REF. A given table can only be archived by one archive type. Values 1 to 6 are reserved.		
is_master	bit		Is this the master table? (1 = yes, 0 = no) Only one master table is allowed per archive type.	(D: 0)	
is_deletable	bit		Delete records from this table after archiving? (1 = yes, 0 = no)	(D: 0)	
arch_table_nm	varchar	255	Table name		
arch_key_fld_nm	varchar	64	Key field for this table (for example, index_bill_ref for BILL_INVOICE)		
arch_key_resets_fld_nm	varchar	64	Key resets field for this table (for example, index_bill_ref_resets for BILL_INVOICE)		
is_active	bit		Indicates if the table is loaded into the database.		
del_seq	smallint		Delete sequence.		
deletion_detection_query	varchar	4000	SQL query for deletion detection.		
drop_detection_query	varchar	4000	SQL query for drop detection.		
archive_and_delete_query	varchar	4000	SQL query for archive and delete.		
partition_drop_query	varchar	4000	SQL query for partition drop.		
unprocessed_data_err_msg	varchar	500	Error message for unprocessed data.		

ARCH_TYPE_REF

Static. Defines valid archive types. Populated by scripts during installation. Do not modify. Admin table. Read-only copy on customer.

Used by the following modules: ARCH

Dependents: ARCH_TABLE_DEPENDS_REF, ARCH_TYPE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `arch_type_id`

Field Name	Data Type		Comments	Values	Null
arch_type_id	smallint		Archive type: 1 = Archive old invoices (BILL_INVOICE table) and CDR data 2 = Archive bill images (BILL_IMAGE table) 3 = Archive CDR data (CDR_DATA table) 4 = Archive JNL detail (JNL_RUNS_STATUS table) 5 = Archive JNL writeoff (JNL_WRITEOFF table) 6 = Archive evaluated contribution > invoice (HISTORIC_CONTRIBUTION table) 7 = Archive bill invoice entity (BILL_INVOICE table) 8 = Archive Workpoint (WP_PROCI table) 9 = Archive non-billed SLA measurement data (SLA_MEASUREMENT_DATA table) 20 = Archive Customer Interaction Tracking (CIT_INTERACTION table) 21 = Archive Content Catalog EVENT (CTC_ITEM table) 22 = Archive Content Catalog ITEM (CTC_ITEM table) 23 = Archive Content Catalog OFFER BUY (CTC_OFFER_BUY table) 24 = Archive Content Catalog OFFER (CTC_OFFER table) 25 = Archive Content Catalog FF (CTC_FF table)		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_active	bit		Indicates whether the table is loaded into the database		
is_legacy	bit				
output_mode	smallint		The value of OUTPUT_MODE system parameter.		
master_table_query	varchar	1000	SQL query statement for master table.		Null

ARCH_TYPE_VALUES

Configurable. Describes archive types. Populated by scripts during installation. Do not modify. Admin table. Read-only copy on customer.

Used by the following modules: ARCH

Indexes: primary-key on arch_type_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(arch_type_id) must exist in ARCH_TYPE_REF(arch_type_id)

Field Name	Data Type		Comments	Values	Null
arch_type_id	smallint		Archive type ID, from ARCH_TYPE_REF		
language_code	smallint		Language code, from LANGUAGE_CODE_REF		
short_display	varchar (15)	5	Short text description		
display_value	varchar (240)	80	Text description to display on screen		

ATM_CUSTOM_TABLE_DEF

Configurable. Identifies deployment-specific tables for inclusion in the ACE interface. Admin table.

Used by the following modules: ACE

Indexes: primary-key on table_name

Field Name	Data Type		Comments	Values	Null
table_name	char	30	Name of deployment-specific table.		
server_type	tinyint		Type of server on which the table resides.	(R: 1, 2, 3)	Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ATM_FIELD_DEF

Configurable, static. Defines field information used by ACE. Edit this table for custom tables defined in ATM_CUSTOM_TABLE_DEF; otherwise, do not edit. This table cannot be modified through ACE. Admin table.

Used by the following modules: ACE

Indexes: primary-key on table_name, field_name

Field Name	Data Type		Comments	Values	Null
table_name	varchar	30	Table in whose maintenance windows a pop-up list exists.		
field_name	varchar	30	Field name in the given table for which the pop-up list exists.		
field_type	tinyint		Reserved for future use; leave Null.		Null
cross_table_name	varchar	30	Table from which pop-up list values come.		Null
cross_field_name	varchar	30	Field from which pop-up list values come.		Null
poplist_type	tinyint		Indicates where cross_field_name is described: 1 = cross_field_name is described in DESCRIPTIONS. 2 = cross_field_name is described in a *_VALUES table. 3 = cross_field_name is not described in the database.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ATM_POPLIST_REF

Static, configurable. Holds values for certain pop-up selection lists in ATM. Edit this table for custom tables defined in ATM_CUSTOM_TABLE_DEF; otherwise, do not edit. This table cannot be modified through ACE. Admin table.

Used by the following modules: ACE

Triggers: Only one row per table/field group can have is_default = 1.

Indexes: clustered, unique on table_name, field_name, int_value, char_value

Field Name	Data Type		Comments	Values	Null
table_name	varchar	32	Table in whose maintenance windows a pop-up list exists.		
field_name	varchar	32	Field name in the given table for which the pop-up list exists.		
int_value	int		Field value (if int, smallint, tinyint or numeric).		Null
char_value	varchar	30	Field value (if char or varchar).		Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ATM_POPLIST_VALUES

Configurable. Describes values defined in ATM_POPLIST_REF. Admin table.

Triggers: table_name, field_name, char_value, and int_value must exist in ATM_POPLIST_REF. int_value and char_value can be Null instead.

Indexes: clustered, unique on table_name, field_name, language_code, char_value, int_value

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
table_name	varchar	30	Table in whose maintenance windows a pop-up list exists.		
field_name	varchar	30	Field name in the given table for which the pop-up list exists.		
int_value	int		Field value (if int, smallint, tinyint or numeric).		Null
char_value	varchar	30	Field value (if char or varchar).		Null
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Leave blank.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BALANCE_XFER_DIFF_REF

Configurable. Describes reasons the BAM module transferred a different amount than requested between prepaid balances. Admin table. Read-only copy exists on Customer database.

Dependents: BALANCE_XFER_DIFF_VALUES

Indexes: primary-key on balance_xfer_diff

Field Name	Data Type		Comments	Values	Null
balance_xfer_diff	tinyint		Transfer difference code: 0 = Requested amount transferred 1 = All available amount transferred 2 = Less than available amount transferred, target at maximum allowed balance 3 = Requested amount exceeds available amount 4 = Requested amount exceeds available amount, but less than available transferred, target at maximum allowed balance		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BALANCE_XFER_DIFF_VALUES

Configurable. Describes transfer differentials defined in BALANCE_XFER_DIFF_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on balance_xfer_diff, language_code

Foreign Keys (balance_xfer_diff) must exist in BALANCE_XFER_DIFF_REF(balance_xfer_diff)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
balance_xfer_diff	tinyint		Transfer difference code, from BALANCE_XFER_DIFF_REF		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BAM_ERROR_CODE_REF

Configurable. Describes the valid error codes used by the BAM module. Admin table. Read-only copy exists on Customer database.

Dependents: BAM_ERROR_CODE_VALUES

Indexes: primary-key on bam_error_code

Field Name	Data Type		Comments	Values	Null
bam_error_code	int		Unique ID for BAM error code.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BAM_ERROR_CODE_VALUES

Configurable. Describes BAM error codes defined in BAM_ERROR_CODE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on bam_error_code, language_code

Foreign Keys (bam_error_code) must exist in BAM_ERROR_CODE_REF(bam_error_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
bam_error_code	int		Error code, from BAM_ERROR_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILLING_FREQUENCY_REF

Configurable. Describes the valid billing frequencies (daily, monthly, and so on). Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIP

Dependents: BILLING_FREQUENCY_VALUES, BILL_CYCLE, CMF, RATE_DISCOUNT, RATE_LATE_FEE, RATE_RC, RATE_UNIT_CR, TAX_RATES_VAT

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `billing_frequency`

Field Name	Data Type		Comments	Values	Null
billing_frequency	tinyint		Billing frequency code: 1 = daily 2 = weekly 3 = monthly 4 = quarterly 6 = annually		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILLING_FREQUENCY_VALUES

Configurable. Describes billing frequencies defined in BILLING_FREQUENCY_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on billing_frequency, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(billing_frequency) must exist in BILLING_FREQUENCY_REF(billing_frequency)

Field Name	Data Type		Comments	Values	Null
billing_frequency	tinyint		Billing frequency, from BILLING_FREQUENCY_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_ADDRESS

Configurable. Provides support for deployment-specific bill formatting for front-page address. Admin table. Copy exists on Customer database.

Used by the following modules: BIF

Triggers: Only one row can have `is_default = 1`.

Indexes: unique on `bill_fmt_opt`, `country_code`, `address_line`, `address_line_order`
primary-key on `bill_fmt_opt`, `country_code`, `address_field`

Foreign Keys (bill_fmt_opt) must exist in BILL_FMT_OPT_REF(bill_fmt_opt)
(country_code) must exist in COUNTRY_CODE_REF(country_code)

Field Name	Data Type		Comments	Values	Null
bill_fmt_opt	int		Bill format option, from BILL_FMT_OPT_REF.		
country_code	smallint		Country code, from COUNTRY_CODE_REF.		
address_field	smallint		Specifies for which field this record specifies formatting: 1 = prefix6 = title11 = city 2 = first name7 = company12 = county 3 = middle initial8 = address (line 1)13 = state 4 = last name9 = address (line 2)14 = zip 5 = suffix10 = address (line 3) 15 = COUNTRY_CODE_VALUES.display_value	(R: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15)	
address_line	tinyint		Line of address on which this field appears.	(R: 1, 2, 3, 4, 5, 6)	
address_line_order	tinyint		Order within the address line where this field falls.	(R: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15)	
field_status	tinyint		Status of this address field: 1 = required2 = optional3 = ignored	(R: 1, 2, 3)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_CLASS_REF

Configurable. Associates usage record types with each bill class (for example, priority or grade of service). Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, RAP, MIU, BIP

Dependents: BILL_CLASS_VALUES, RATE_PERIODS, UNIT_CR_RATE_LIMIT

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `bill_class`

Field Name	Data Type		Comments	Values	Null
bill_class	smallint		Unique internal identifier of the bill class, priority, or grade of service.	(R: != 0)	
bill_class_type	tinyint		Defines the overall type of the usage record: 0 = normal; record to be guided and rated normally 1 = free; record will not be guided or rated. Record started in CDR_FREE instead of CDR_DATA.	(R: 0, 1)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_CLASS_VALUES

Configurable. Describes bill classes defined in BILL_CLASS_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on bill_class, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(bill_class) must exist in BILL_CLASS_REF(bill_class)

Field Name	Data Type		Comments	Values	Null
bill_class	smallint		Bill class, priority, or grade of service identifier, from BILL_CLASS_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_CYCLE

Configurable. Defines the dates and cycles when bills should be prepared, formatted, and dispatched. Contains one row for each defined billing cycle. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIP

Triggers:
 bill_period must not end with 00.
 Only one value for billing_frequency exists for a given bill_period value.
 Automatically set ppdd_date equal to next_ppdd_date of previous record.
 Automatically set prep_date to cutoff_date + prep_delay / 24(in hours).

Indexes:
 primary-key on bill_period, ppdd_date
 non-unique on billing_frequency
 unique on bill_period, cutoff_date

Foreign Keys
 (billing_frequency) must exist in BILLING_FREQUENCY_REF(billing_frequency)
 (bill_period) must exist in BILL_PERIOD_REF(bill_period)

Check Constraints: ppdd_date <= next_ppdd_date

Field Name	Data Type		Comments	Values	Null
bill_period	varchar	3	Bill cycle identifier, from BILL_PERIOD_REF.		
billing_frequency	tinyint		Billing frequency code, from BILLING_FREQUENCY_REF.		
ppdd_date	datetime		Date on which the payment is due for this cycle.		
next_ppdd_date	datetime		Date on which payment is due for the following cycle.		
statement_date	datetime		Statement date to print on the bill for this cycle.		
cutoff_date	datetime		Cutoff date for transactions appearing on the bill.		
prep_delay	smallint		Number of hours BIP delays after cutoff time before processing invoices for this cycle. Used to ensure that all usage for the cycle is able to be processed.		
prep_date	datetime		Modified cutoff date, calculated by: cutoff_date + (prep_delay/24).		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_DISP_METH_REF

Configurable. Defines valid bill dispatch methods, which are included in pop-up selection lists in Customer Center. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIF, BID

Dependents: BILL_DISP_METH_VALUES, CMF

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `bill_disp_meth`

Field Name	Data Type		Comments	Values	Null
bill_disp_meth	smallint		Internal identifier of bill dispatch methods: 0 = no dispatching 1 = print on paper (P) (Individual deployments may support additional values.)	(R: >= 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_DISP_METH_VALUES

Configurable. Describes bill dispatch methods defined in BILL_DISP_METH_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on bill_disp_meth, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(bill_disp_meth) must exist in BILL_DISP_METH_REF(bill_disp_meth)

Field Name	Data Type		Comments	Values	Null
bill_disp_meth	smallint		Bill dispatch method, from BILL_DISP_METH_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_OPT_REF

Configurable. Lists valid bill format options (for example, summary or detail). Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIF

Dependents: BILL_ADDRESS, BILL_FMT_OPT_VALUES, BILL_SECTIONS, BILL_SIZE, CMF

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `bill_fmt_opt`

Field Name	Data Type		Comments	Values	Null
bill_fmt_opt	int		External bill format option ID.		
format_code	int		Internal bill format option ID, defined and used by BIF. Deployment-specific.	(R: 1, 2)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_OPT_VALUES

Configurable. Describes bill format options defined in BILL_FMT_OPT_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on bill_fmt_opt, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(bill_fmt_opt) must exist in BILL_FMT_OPT_REF(bill_fmt_opt)

Field Name	Data Type		Comments	Values	Null
bill_fmt_opt	int		Bill format option identifier, from BILL_FMT_OPT_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_SECTION_EXCL_REF

Configurable. Defines valid bill sections. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Dependents: BILL_FMT_SECTION_EXCL_VALUES, BILL_SECTIONS

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `section_exclude`

Field Name	Data Type		Comments	Values	Null
section_exclude	int		Unique bill section ID. Some standard values include: 1 = Balance brought forward section 5 = Usage charges detail section 7 = Remittance coupon section 10 = All charges detail section 11 = Charges detail by owning account Additional values may be available; see client-specific bill format documentation for more information.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_SECTION_EXCL_VALUES

Configurable. Describes bill section IDs. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on section_exclude, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(section_exclude) must exist in BILL_FMT_SECTION_EXCL_REF(section_exclude)

Field Name	Data Type		Comments	Values	Null
section_exclude	int		Bill section ID, from BILL_FMT_SECTION_EXCL_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (15)	5	Short text description of the bill section.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_SECTION_TYPE_REF

Configurable. Defines valid bill section types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Dependents: BILL_FMT_SECTION_TYPE_VALUES, BILL_FORMAT_TEMPLATE

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `section_type`

Field Name	Data Type		Comments	Values	Null
section_type	tinyint		Unique bill section type ID. Some standard values include: 1 = Usage charges detail 2 = Recurring charges detail Additional values may be available; see client-specific bill format documentation for more information.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_SECTION_TYPE_VALUES

Configurable. Describes bill section type IDs. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on section_type, language_code

Foreign Keys (section_type) must exist in BILL_FMT_SECTION_TYPE_REF(section_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
section_type	tinyint		Bill section type ID, from BILL_FMT_SECTION_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (15)	5	Short text description of the bill section type.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_TEMPLATE_CODE_REF

Configurable. Defines valid bill format templates. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Dependents: BILL_FMT_TEMPLATE_CODE_VALUES, BILL_FORMAT_TEMPLATE

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `template_code`

Field Name	Data Type		Comments	Values	Null
template_code	smallint		Unique template ID. Some standard values include: 16 = Usage charges detail 17 = Recurring charges detail 18 = Recurring charges detail for leased line circuits 19 = Recurring charges detail in multiple currencies 20 = Usage charge detail in multiple currencies Additional values may be available; see client-specific bill format documentation for more information.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FMT_TEMPLATE_CODE_VALUES

Configurable. Describes template IDs. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on template_code, language_code

Foreign Keys (template_code) must exist in BILL_FMT_TEMPLATE_CODE_REF(template_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
template_code	smallint		Template ID, from BILL_FMT_TEMPLATE_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (15)	5	Short text description of the template.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FORMAT_CODE_TYPE_REF

Configurable. Defines valid bill format code type IDs. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Dependents: BILL_FORMAT_CODE_TYPE_VALUES, BILL_FORMAT_TEMPLATE

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `code_type`

Field Name	Data Type		Comments	Values	Null
code_type	tinyint		Unique code type ID. Some standard values include: 1 = product line (PRODUCT_LINES.product_line_id). 2 = usage type (USAGE_TYPES.type_id_usg). 7 = jurisdiction (JURISDICTIONS.jurisdiction). Additional values may be available; see client-specific bill format documentation for more information.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FORMAT_CODE_TYPE_VALUES

Configurable. Describes format code type IDs. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on code_type, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(code_type) must exist in BILL_FORMAT_CODE_TYPE_REF(code_type)

Field Name	Data Type		Comments	Values	Null
code_type	tinyint		Code type ID, from BILL_FORMAT_CODE_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (15)	5	Short text description of the code type.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FORMAT_DISPLAY_TYPES

Configurable. Contains invoice display information for specific charge types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Indexes: primary-key on format_code, type_code, subtype_code, billing_category, billing_level

Field Name	Data Type		Comments	Values	Null
format_code	int		Format ID, from BILL_FMT_OPT_REF.		
type_code	smallint		Charge type identifier. If positive, matches BILL_INVOICE_DETAIL.type_code. Otherwise, can be -4 (discount summary) or -5 (taxation summary) to match BILL_INVOICE_DETAIL.subtype_code.		
subtype_code	int		If type_code is positive, this field matches BILL_INVOICE_DETAIL.subtype_code. Otherwise, this field matches the BILL_INVOICE_DETAIL.tracking_id.		
billing_category	smallint		Does this record apply to current, past, or all charges? 1 = current charges 2 = past charges 3 = credit notes 4 = no charges 100 = all charges.		
billing_level	smallint		Does this record apply to account-level or subscription-level charges? 0 = account charges 1 = subscription charges 100 = all charges		
display_type	tinyint		How should the charge be displayed? 1 = Display charge normally. 2 = Display charge as a fixed string (default is "Free") if amount is zero.	(R: 1, 2)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FORMAT_PRODUCTS

Configurable. Contains bill formatting information for each product line. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Triggers: format_code exists in BILL_FMT_OPT_REF.
msg_trigger_id exists in BILL_MESSAGE_GROUPS, if not Null.

Indexes: unique on sort_priority, format_code
primary-key on product_line_id, format_code

Foreign Keys (product_line_id) must exist in PRODUCT_LINES(product_line_id)

Field Name	Data Type		Comments	Values	Null
format_code	int		Format option, from BILL_FMT_OPT_REF.		
product_line_id	smallint		Product line ID, from PRODUCT_LINES.		
msg_trigger_id	smallint		Bill message ID for message displayed on bill (from BILL_MESSAGES).		Null
printer_text	varchar (120)	40	Resource name for logo or icon printed on bill.		Null
sort_priority	smallint		Sort order of product line on bill.		
alt_printer_text	varchar (120)	40	Resource name for alternate logo or icon printed on bill.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_FORMAT_TEMPLATE

Configurable. Specifies a formatting template for each charge type area on a bill. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Triggers: code_type is unique for every combination of format_code and section_type.
If code_type = 1, code_value exists as PRODUCT_LINES.product_line_id; if code_type = 2, code_value exists as USAGE_TYPES.type_id_usg; if code_type = 7, jurisdiction exists in JURISDICTIONS.

Indexes: clustered, unique on section_type, code_value, equip_type_code, format_code
primary-key on sort_priority, section_type, code_value, format_code

Foreign Keys

(equip_type_code) must exist in EQUIP_TYPE_CODE_REF(equip_type_code)
(template_code) must exist in BILL_FMT_TEMPLATE_CODE_REF(template_code)
(class_of_service_code) must exist in CLASS_OF_SERVICE_CODE_REF(class_of_service_code)
(code_type) must exist in BILL_FORMAT_CODE_TYPE_REF(code_type)
(jurisdiction) must exist in JURISDICTIONS(jurisdiction)
(provider_id) must exist in SERVICE_PROVIDERS_REF(provider_id)
(equip_class_code) must exist in EQUIP_CLASS_CODE_REF(equip_class_code)
(section_type) must exist in BILL_FMT_SECTION_TYPE_REF(section_type)
(element_id) must exist in PRODUCT_ELEMENTS(element_id)

Field Name	Data Type	Comments	Values	Null
format_code	int	Format option, from BILL_FMT_OPT_REF.		
section_type	tinyint	Invoice section, from BILL_FMT_SECTION_TYPE_REF.		
code_type	tinyint	Charge domain included in section, from BILL_FORMAT_CODE_TYPE_REF.		
code_value	int	Specific charge type (product, usage type, and so on), based on code_type.		
equip_type_code	smallint	Service instance type, from EQUIP_TYPE_CODE_REF.		Null
template_code	smallint	Invoice template code, from BILL_FMT_TEMPLATE_CODE_REF.		
sort_priority	smallint	Sort order of product lines and usage information on bill.		
equip_class_code	smallint	Service instance class, from EQUIP_CLASS_CODE_REF.		Null
class_of_service_code	smallint	Equipment service class identifier, from CLASS_OF_SERVICE_CODE_REF.		Null
provider_id	int	Service provider identifier, from SERVICE_PROVIDERS_REF.		Null
jurisdiction	int	Territorial division, from JURISDICTIONS.		Null
element_id	int	Product identifier from PRODUCT_ELEMENTS.		Null

Field Name	Data Type		Comments	Values	Null
table_order	smallint		Order in which sections appear if they have the same template_code.		
format_display	varchar (240)	80	Text description for bill format display.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_INSERTS

Configurable. Defines the characteristics of a specific bill insert. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Indexes: primary-key on insert_id, language_code

Field Name	Data Type		Comments	Values	Null
insert_id	smallint		Unique internal ID of a specific bill insert. The insert code is translated into OMR marks to be printed on the bill.		
insert_pages	tinyint		Indicates the number of bill pages that are equivalent to the weight of the bill insert. BIF uses this data in order to calculate the weight of the invoice.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
description	varchar (120)	40	Description of bill insert (for example, envelope, special promotion, and so on).		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_INSERT_GROUPS

Configurable. Defines the bill inserts to be received by each customer group. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Triggers: insert_id exists in BILL_INSERTS.
There can be no overlapping active_dt and inactive_dt ranges.

Indexes: unique on insert_grp_id, insert_bin_num
unique on insert_grp_id, insert_id, priority, active_dt, geo_key, mkt_code
primary-key on insert_grp_id, insert_id, geo_key, mkt_code

Foreign Keys (insert_grp_id) must exist in INSERT_GRP_ID_REF(insert_grp_id)
(insert_foreign_key) must exist in INSERT_FOREIGN_KEY_REF(insert_foreign_key)
(mkt_code) must exist in MKT_CODE_REF(mkt_code)

Check Constraints: active_dt <= inactive_dt

Field Name	Data Type		Comments	Values	Null
insert_grp_id	smallint		Customer group ID, from INSERT_GRP_ID_REF, to receive insert.		
insert_id	smallint		Bill insert ID from BILL_INSERTS, to be printed as OMR marks on the bill.		
insert_trigger_id	smallint		Used for selection of event-driven bill inserts.		
insert_bin_num	tinyint		Position of OMR mark on printed bill. It tells the insert machine which inserts to pull.	(R: 3, 4, 5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22, 23, 24, 25)	
geo_key	char	8	Internal Kenan/BP code representing geographical region, for grouping insert recipients, composed of 2-character state abbreviation plus zip code. "00000" indicates all regions.		
mkt_code	smallint		Market code identifier, from MKT_CODE_REF, of market segment to receive insert.		
is_required	bit		Set to 1 if the insert is required, set to 0 if it is not required or INSERT_GRP_ID_REF.max_inserts is set to Null.		
priority	smallint		Priority of the insert within the group when the account qualifies for more than the maximum number of inserts. Set to Null if INSERT_GRP_ID_REF.max_inserts is set to Null.		Null
active_dt	smalldt		Date when the insert becomes applicable.		

Field Name	Data Type		Comments	Values	Null
inactive_dt	smalldt		Date when the insert is no longer applicable.		Null
insert_foreign_key	int		Client-specific key value, from INSERT_FOREIGN_KEY_REF.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_MESSAGES

Configurable. Defines text messages that can appear in bill images. CMF.msg_grp_id and CMF.mkt_code determine which messages appear on the customer bill. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Indexes: primary-key on message_id, language_code, line_num

Field Name	Data Type		Comments	Values	Null
message_id	smallint		Unique identifier for bill message.		
line_num	smallint		Line number for non-word wrapped messages.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
message_text	text		Message text.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_MESSAGE_GROUPS

Configurable. Maps message groups to bill messages and other customer segment information. Admin table. Read-only copy exists on Customer database.

Triggers:

There can be no overlapping active_dt and inactive_dt ranges.
message_id must exist in BILL_MESSAGES.

Indexes:

clustered, unique on msg_grp_id, message_id, msg_sequence_num, active_dt, geo_key, mkt_code, service_center_id, msg_foreign_key

Foreign Keys

(msg_trigger_id) must exist in MSG_TRIGGER_ID_REF(msg_trigger_id)
(msg_grp_id) must exist in MSG_GRP_ID_REF(msg_grp_id)
(mkt_code) must exist in MKT_CODE_REF(mkt_code)

Check Constraints:

active_dt <= inactive_dt

Field Name	Data Type		Comments	Values	Null
msg_grp_id	smallint		Bill message group ID, from MSG_GRP_ID_REF.		
message_id	smallint		Message ID, from BILL_MESSAGES.		
msg_trigger_id	smallint		Message trigger ID, from MSG_TRIGGER_ID_REF.		
msg_sequence_num	smallint		Priority of the message within the group when account qualifies for more than one message for the same message_trigger_id.	(R: > 0)	
geo_key	char	8	Initial non-zero digits of a zip code to match the corresponding initial digits of CMF.bill_zip, or 00000000 for all regions.		
mkt_code	smallint		Market code, from MKT_CODE_REF, for group to receive message (or 0).		
active_dt	smalldt		Date on which the message can first appear.		
inactive_dt	smalldt		Date on which the message can no longer appear.		Null
service_center_id	smallint		Bill message service center ID, from SERVICE_CENTERS.		Null
msg_foreign_key	int		Deployment-specific key field.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_PERIOD_REF

Configurable. Defines valid bill periods. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP, Customer Center

Dependents: BILL_CYCLE, BILL_PERIOD_VALUES, CMF, CONTRACT_TYPES, CUSTOMER_CONTRACT, CUSTOMER_CONTRACT_VIEW, PRODUCT, PRODUCT_CHARGE_MAP, PRODUCT_VIEW

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `bill_period`

Field Name	Data Type		Comments	Values	Null
bill_period	varchar	3	Identifier of a bill cycle.		
contract_use_code	tinyint		Indicates whether the bill period can be used in a contract: 0 = provision directly or through contract 1 = provision only through contract 2 = cannot provision through contract	(D: 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_PERIOD_VALUES

Configurable. Describes bill periods defined in BILL_PERIOD_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on bill_period, language_code

Foreign Keys (bill_period) must exist in BILL_PERIOD_REF(bill_period)
(language_code) must exist in LANGUAGE_CODE_REF(Language_code)

Field Name	Data Type		Comments	Values	Null
bill_period	varchar	3	Bill period, from BILL_PERIOD_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_REF_NO_MASTER

Dynamic. Allots groups of unique invoice identifiers to each server. Must always have exactly 1 row. Admin table.

Used by the following modules: BIP

Triggers: This table can only have one row.

Indexes: This table has no indexes.

Field Name	Data Type		Comments	Values	Null
bill_ref_no	int		Invoice identifier.		
bill_ref_resets	tinyint		Reset counter value for bill_ref_no.		

BILL_SECTIONS

Configurable. Associates sections of a bill with existing bill formats. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF

Indexes: primary-key on bill_fmt_opt, section_exclude

Foreign Keys (section_exclude) must exist in BILL_FMT_SECTION_EXCL_REF(section_exclude)
(bill_fmt_opt) must exist in BILL_FMT_OPT_REF(bill_fmt_opt)

Field Name	Data Type		Comments	Values	Null
bill_fmt_opt	int		Bill format code, from BILL_FMT_OPT_REF.		
section_exclude	int		Section (from BILL_FMT_SECTION_EXCL_REF) to exclude from bills with a given bill_fmt_opt.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BILL_SIZE

Configurable. Specifies paper size for various bill formats. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIF, ACE

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `bill_fmt_opt`, `paper_size`

Foreign Keys (bill_fmt_opt) must exist in BILL_FMT_OPT_REF(bill_fmt_opt)

Field Name	Data Type		Comments	Values	Null
bill_fmt_opt	int		Identifier of bill format option, from BILL_FMT_OPT_REF.		
paper_size	smallint		Indicates paper size: 0 = US Letter Size 1 = A4	(R: 0, 1)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BMF_TRANS_DESCR

Configurable. Describes valid payment and refund types for BMF and REFUND. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP, Customer Center, JNL, CPM, LBX, EFT

Dependents: BMF, BMF_UNAPPLIED, LBX_PAYMENT_TYPES

Triggers: description_code exists in DESCRIPTIONS.
If bmf_trans_category = 12, ensure that billing_category, allow_suspense_acnt, and allow_autotransfer are 1, and allow_manual_entry, is_displayed_onbill, and is_journalable are 0.

Indexes: primary-key on bmf_trans_type

Field Name	Data Type	Comments	Values	Null
bmf_trans_type	int	Type of transaction (client-defined transaction types have negative values): 1 = payment 27 = refund 2 = prepayment 28 = refund reversal 3 = correction payment 29 = IDB credit/payment 4 = OCA payment 30 = refund by check 11 = payment reversal 31 = refund by credit card 12 = prepayment reversal 32 = refund by electronic funds transfer 13 = correction reversal 33 = negative balance payment 14 = OCA payment reversal 40 = writeoff payment 15 = dishonored check reversal 41 = writeoff payment reversal 16 = Tax portion of prepayment 51 = backout payment reversal (credit) 21 = deposit payment 52 = backout payment (debit) 22 = deposit interest 53 = currency rounding adjustment 23 = tax liability 54 = credit note payment 24 = deposit payment reversal 80 = system payment 25 = deposit interest reversal 90 = system payment reversal 26 = tax liability reversal		
bmf_trans_category	tinyint	Transaction category: 1 = payment 2 = adjustment (reversal) 3 = payment (A/R but not invoice item) 4 = deposit 5 = deposit refund 6 = bill backout 9 = system generated payments 11 = credit note 12 = rounding payment	(R: 1, 2, 3, 4, 5, 6, 9, 11, 12, 13)	
trans_sign	smallint	Sign of the transaction: 1 = debit -1 = credit	(R: -1, 1)	
billing_category	smallint	Category for billing: 1 = apply to current charges 2 = apply to past charges 3,4 = not used	(R: 1, 2, 3, 4)	
description_code	int	Description from DESCRIPTIONS.		

Field Name	Data Type		Comments	Values	Null
allow_manual_entry	bit		Can payments of this type be entered manually? (1 = yes) If set to 0 the CSR cannot enter payments manually, but can still use the "Transfer" function in the Payments GUI to redirect CPM and EFT payments that have been sent to the wrong account.		
allow_suspense_acnt	bit		Can payments of this type be applied to the suspense account (invoice 0)? (1 = yes). Should be 1 for prepayments.		
is_displayed_onbill	bit		Is the record displayed on the bill? (1 = yes)	(D: 1)	
is_journalable	bit		Should the transaction be booked? (1 = yes)	(D: 1)	
allow_autotransfer	bit		Can a payment of this type be allocated to an invoice other than the one specified? (1 = yes)	(D: 1)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BONUS_POINT_ID_REF

Configurable. Defines bonus points. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP

Dependents: BONUS_POINT_ID_VALUES, CMF_BONUS_POINT, CONTRACT_TYPES

Triggers: Both `use_by` and `use_by_units` must have values or both must be Null.
Cannot populate `use_by`, `use_by_units`, and `use_by_date` in one record.
Only one row can have `is_default` = 1.

Indexes: primary-key on `bonus_point_id`

Field Name	Data Type	Comments	Values	Null
<code>bonus_point_id</code>	smallint	Bonus point identifier.		
<code>rounding_method</code>	tinyint	Rounding method for the bonus points. 0 = no rounding method (in other words truncate) 1 = always round to the next lowest value 2 = round to next highest value 3 = round to nearest value (round up if exactly half) 4 = round to nearest value (round down if exactly half)	(D: 3) (R: 0, 1, 2, 3, 4)	
<code>use_by</code>	smallint	Interval after which the bonus points expire if not used, measured in <code>use_by_units</code> , figured from date of provisioning. Populate this or <code>use_by_date</code> , but not both.		Null
<code>use_by_units</code>	smallint	Units in which <code>use_by</code> is measured: -1=none 140 = days 150 = weeks 160 = months 170 = quarters 180 = years	(D: -1) (R: -1, 140, 150, 160, 170, 180)	
<code>use_by_date</code>	datetime	Date by which the bonus points must be used. Populate this or <code>use_by</code> , but not both.		Null

Field Name	Data Type		Comments	Values	Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BONUS_POINT_ID_VALUES

Configurable. Describes bonus points defined in BONUS_POINT_ID_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP

Indexes: primary-key on bonus_point_id, language_code

Foreign Keys
(language_code) must exist in LANGUAGE_CODE_REF(language_code)
(bonus_point_id) must exist in BONUS_POINT_ID_REF(bonus_point_id)

Field Name	Data Type		Comments	Values	Null
bonus_point_id	smallint		Bonus point identifier, from BONUS_POINT_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BONUS_POINT_TRANS_TYPE_REF

Configurable. Defines bonus point transaction types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP

Dependents: BONUS_POINT_TRANS_TYPE_VALUES, CMF_BONUS_POINT

Triggers:

Cannot update trans_sign.

There can be only one row where bonus_point_trans_category is 1, trans_sign is -1, and is_system_generated is 1.

There can be only one row where bonus_point_trans_category is 3, trans_sign is -1, and is_system_generated is 1.

There can be only one row where bonus_point_trans_category is 3, trans_sign is 1, and is_system_generated is 1.

Indexes:

primary-key on bonus_point_trans_type

Field Name	Data Type	Comments	Values	Null
bonus_point_trans_type	smallint	Bonus point transaction type identifier.		
bonus_point_trans_category	smallint	Bonus point transaction category: 1 = Earnings / earnings adjustment 2 = Spending / spending adjustment 3 = Transfer in / out	(R: 1, 2, 3)	
trans_sign	smallint	Transaction sign: -1 = credit 0 = warning / non-balance affecting transaction 1 = debit	(R: -1, 0, 1)	
is_displayed_onbill	bit	Is the record displayed on the bill? (1 = yes)	(D: 1)	
is_viewable_on_gui	bit	Can this bonus point transaction type be viewed with a customer care interface? (1 = yes) This field applies only to custom-built interfaces.	(D: 0)	
is_external	bit	Was this bonus point transaction created outside Kenan/BP? (1 = yes)		
is_system_generated	bit	Was this bonus point transaction created by Kenan/BP? (1 = yes)		

Field Name	Data Type		Comments	Values	Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BONUS_POINT_TRANS_TYPE_VALUES

Configurable. Describes bonus point transaction types defined in BONUS_POINT_TRANS_TYPE_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP

Indexes: primary-key on bonus_point_trans_type, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(bonus_point_trans_type) must exist in BONUS_POINT_TRANS_TYPE_REF(bonus_point_trans_type)

Field Name	Data Type		Comments	Values	Null
bonus_point_trans_type	smallint		Bonus point transaction type, from BONUS_POINT_TRANS_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BP_SERVER_TO_RPAC_MAP

Configurable. Maps Kenan/BP servers to Datablitz servers. Admin table. Read-only copy exists on Catalog database.

Triggers: Each customer server can have only one prepay and only one ETUC cluster.

Indexes: primary-key on server_id, rpac_cluster_id

Foreign Keys (rpac_cluster_id) must exist in RPAC_CLUSTER_DEFINITIONS(rpac_cluster_id)
(server_id) must exist in SERVER_DEFINITION(server_id)

Field Name	Data Type		Comments	Values	Null
server_id	tinyint		Server ID, from SERVER_DEFINITION.		
rpac_cluster_id	int		RPAC cluster ID, from RPAC_CLUSTER_DEFINITIONS.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BUSINESS_DAY_DEFINITION

Configurable. Defines ARM Business days/Non Business days based on day, month, year, day of week, module, active_dt and inactive_dt. Admin table.

Check Constraints:

Constraint to check whether the value of business_period exists in the table BUSINESS_DAY_REF. Constraint to check whether dayofmonth is between 1 and 31. Constraint to check whether dayofweek is between 1 and 7. Constraint to check whether month is between 1 and 12. Constraint to check whether year >= 1990 and year < 2035. Constraint to check whether active_dt <= inactive_dt.

Field Name	Data Type		Comments	Values	Null
business_period	varchar	3	Business period identifier, from BUSINESS_DAY_REF.		
year	number	6	4-digit year or Null (all).		Null
month	number	3	Month (1-12) or Null (all).		Null
dayofmonth	number	3	Day of month (1-31) or Null (all).		Null
dayofweek	number	3	1 (Sunday) through 7 (Saturday) or Null (all).		Null
active_dt	date		Date on which business period becomes active.		
inactive_dt	date		In the case that any business day definition becomes irrelevant, it should be de-activated by setting a termination date here.		Null
module	char	4	Indicates the module using Business Calendar. Set 'ARM' or 'EFT' as the value for this field.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BUSINESS_DAY_REF

Configurable. Configured with the details of valid arm business period. Admin table.

Indexes: Primary key on business_period.

Check Constraints: Constraint to check whether the column is_default is in (0,1). Constraint to check whether the column is_internal is in (0,1).

Field Name	Data Type		Comments	Values	Null
business_period	varchar	3	Contains the values NBD (Non Business day) and BD (Business day).		
is_default	number	1	Is this value the default value? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. At present reserved for future use.		
is_internal	number	1	If 1, Kenan BP modules require this record; do not delete or modify.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

BUSINESS_DAY_VALUES

Configurable. Configured with columns `business_period`, `language_code`, `short_display` and `display_value`. Admin table.

Indexes: Primary key on `business_period`, `Language_code`.

Foreign Keys `business_period` must exists in the table `BUSINESS_DAY_REF`. `language_code` must exists in the table `LANGUAGE_CODE_REF`

Field Name	Data Type		Comments	Values	Null
<code>business_period</code>	<code>varchar</code>	3	Contains the values NBD (Non Business day) and BD (Business day).		
<code>language_code</code>	<code>number</code>	6	<code>language_code</code> exists in the table <code>LANGUAGE_CODE_REF</code> .		
<code>short_display</code>	<code>varchar</code>	15	Short text description of the event.		
<code>display_value</code>	<code>varchar</code>	240	Text description to be displayed on screen.		
<code>config_tag_id</code>	<code>varchar</code>	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CARD_TYPE_CODE_RANGE

Configurable. Defines ranges of valid account numbers for each credit card type. Admin table. Read-only copy exists on Customer database.

Triggers: maximum_range_value must be greater than minimum_range_value and cannot overlap. These date ranges are inclusive, including both the minimum and maximum value.

Indexes: primary-key on minimum_range_value
unique on card_type_code, minimum_range_value

Foreign Keys (card_type_code) must exist in CARD_TYPE_CODE_REF(card_type_code)

Field Name	Data Type		Comments	Values	Null
card_type_code	tinyint		Valid initial digit of credit card, from CARD_TYPE_CODE_REF.		
minimum_range_value	char	22	Lowest number in the range.		
maximum_range_value	char	22	Highest number in the range.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CARD_TYPE_CODE_REF

Static. Defines valid credit card types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CPM, CCIU

Dependents: CARD_TYPE_CODE_RANGE, CARD_TYPE_CODE_VALUES, PAYMENT_MERCHANT_ID_ASSIGN

Triggers: Only one row can have is_default = 1.

Indexes: unique on card_carrier
primary-key on card_type_code

Field Name	Data Type		Comments	Values	Null
card_carrier	char (12)	4	Credit card carrier.		
card_type_code	tinyint		Credit card type ID, typically first digit of credit card number. For example: 3 = American Express 4 = Visa 5 = MasterCard 6 = Discover 7 = Diners Club	(R: not in (99, 255))	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	

Field Name	Data Type		Comments	Values	Null
epg_card_type	char	3	Card type code needed by an External Payment Gateway (EPG) for credit card transactions. For the current EPG (CyberSource), see CyberSource Credit Card Implementation Guide document to configure this field. Examples are: 001: Visa 002: MasterCard, Eurocard ** (European regional brand of MasterCard) 003: American Express 004: Discover 005: Diners Club		Null
check_digit_alg	tinyint		Defines which checksum algorithm is used to validate credit card numbers. 0 = no check 1 = modulus 10 2 = AMEX 3 = Diners Club	(R: 0, 1, 2, 3)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CARD_TYPE_CODE_VALUES

Configurable. Describes credit cards defined in CARD_TYPE_CODE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on card_type_code, language_code

Foreign Keys (card_type_code) must exist in CARD_TYPE_CODE_REF(card_type_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
card_type_code	tinyint		Valid initial digit of credit card, from CARD_TYPE_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Full name of credit card type (for example, American Express).		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CCARD_AVS_RESPONSE_CODES

Static. Holds Address Verification Processing response codes and their descriptions. Admin table. Copy exists on Customer database.

Used by the following modules: CPM, CCIU

Triggers: ccard_carrier exists in CCARD_TYPE_CODE_REF.

Indexes: primary-key on clearing_house_id, ccard_carrier, avs_response_code

Foreign Keys (clearing_house_id) must exist in CLEARING_HOUSE_ID_REF(clearing_house_id)

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		
ccard_carrier	char (12)	4	Type of credit care, from CCARD_TYPE_CODE_REF.		
avs_response_code	char	4	Return code from the credit card clearinghouse.		
response_code_descr	varchar (120)	40	Description of the AVS response.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CCARD_RESPONSE_CODE_REF

Static, configurable if necessary. Describes and categorizes known credit card clearinghouse response codes. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CPM, CCIU

Dependents: CCARD_RESPONSE_CODE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `clearing_house_id`, `response_code`

Field Name	Data Type		Comments	Values	Null
response_code	char (12)	4	Return code from the clearinghouse.		
response_category	tinyint		Category of the transaction failure: 0 = success 5 = data error 1 = comm 6 = forced deposit 2 = hard decline 7 = call company 3 = soft decline 8 = do not use, treated as soft decline 4 = referral	(R: 0, 1, 2, 3, 4, 5, 6, 7)	
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		
treatment_ind	smallint		Treatment indicator: 0 = do not disconnect account 2 = suspend account	(D: 0) (R: 0, 2)	
resend_delay	tinyint		If non-zero, number of days to delay resending this transaction if errored.		Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CCARD_RESPONSE_CODE_VALUES

Configurable. Describes clearinghouse response codes defined in CCARD_RESPONSE_CODE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on clearing_house_id, response_code, language_code

Foreign Keys (clearing_house_id, response_code) must exist in CCARD_RESPONSE_CODE_REF(clearing_house_id, response_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID, from CCARD_RESPONSE_CODE_REF.		
response_code	char (12)	4	Credit card clearinghouse return code, from CCARD_RESPONSE_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CC_ATTRIBUTES_DEF

Non-configurable, read-only reference table; defines valid attribute_id. Admin table replicated on Customer databases.

Used by the following modules: Customer Center

Indexes: primary-key on attribute_id

Field Name	Data Type	Comments	Values	Null
attribute_id	int	Unique internal ID of a specific attribute.		
pii_attribute_reference	int	PII FIELD REFERENCE. The mappings are as follows: 1 = External ID, External ID Type, Account ID, Account ID Type, Account, Identifier 4 = Contact Number - Day, Contact Number - Evening, Primary Phone Secondary Phone 7 = Email 11 = Name - First, Name - Middle Initial, Name - Last, Name-Prefix, Name Name - Generation, Primary Contact, Secondary Contact 14 = MCR Bank Number, MCR Bank Check Number 15 = Credit Card Number, Credit Holder Name, Credit Card Auth Number 29 = Job Title 31 = Company Name 36 = Address 1, Address 2, Address 3, City, State, Zip, Country, Country Code 72 = VIP Code 79 = Payment Method 80 = Amount		
table_name	varchar(30)	Kenan table name containing this attribute.		
column_name	varchar(30)	Kenan column name for this attribute.		
display_value	varchar(30)	Attribute name.		

CC_BALANCE

Dynamic. Lists batch totals transmitted to and received from credit card clearinghouses. This table is no longer supported. Admin table.

Used by the following modules: CPM, LBX, CCIU

Indexes: primary-key on file_name

Field Name	Data Type		Comments	Values	Null
clearing_house	char	10	Name of the credit card clearinghouse.		
sent_receive	char	1	Identifies if the record was sent (S) or received (R).		
transaction_date	smalldt		Date of transaction.		
file_name	char	15	UNIX file name transmitted.		
visa_total	numeric	18	VISA total sent/received.		
msc_total	numeric	18	MasterCard total sent/received.		
amex_total	numeric	18	American Express total sent/received.		
disc_total	numeric	18	Discover total sent/received.		
batch_total	numeric	18	Total of all credit card transactions sent/received.		
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		

CC_VANITY_CODE_CHARGE_MAP

Configurable. Establishes a relationship between an inventory vanity_code and a charge-generating element, such as product or NRC. Admin Table.

Used by the following modules: Ordering

Triggers: element_id or type_id_nrc must be populated.
 If element_id is supplied, it must be a service level product element.
 If type_id_nrc is supplied, it must be a service level NRC.

Indexes: non-unique on type_id_nrc
 primary-key on vanity_code
 non-unique on element_id

Foreign Keys (type_id_nrc) must exist in NRC_TRANS_DESCR(type_id_nrc)
 (element_id) must exist in PRODUCT_ELEMENTS(element_id)

Field Name	Data Type		Comments	Values	Null
vanity_code	smallint		Inventory vanity code.		
element_id	int		If populated, the type of product that should also be associated to the Service when an Inventory with this Vanity Code is assigned. Must exist in PRODUCT_ELEMENTS. If NULL, type_id_nrc must have a value.		Null
type_id_nrc	int		If populated, the type of product that should also be associated to the Service when an Inventory with this VanityCode is assigned. Must exist in NRC_TRANS_DESCR. If NULL, element_id must have a value.		Null

CC_VIEW_ATTRIBUTES

Non-configurable, read-only reference table; defines the set of attributes associated with a view; view_def_id and attribute_id cannot be updated. Admin table replicated on Customer databases.

Used by the following modules: Customer Center

Indexes:
non-unique on attribute_id
primary-key on view_def_id, attribute_id

Foreign Keys
(view_def_id) must exist in CC_VIEW_DEF (view_def_id);
(attribute_id) must exist in CC_ATTRIBUTES_DEF (attribute_id)

Field Name	Data Type		Comments	Values	Null
view_def_id	int		Unique internal ID of a specific view.		
attribute_id	int		Unique internal ID of a specific attribute.		

CC_VIEW_DEF

Non-configurable, read-only reference table; defines the valid view_id. Admin table replicated on Customer databases.

Used by the following modules: Customer Center

Indexes: primary-key on view_def_id

Foreign Keys (view_def_id) must exist in CC_VIEW_DEF (view_def_id);
(attribute_id) must exist in CC_ATTRIBUTES_DEF (attribute_id)

Field Name	Data Type		Comments	Values	Null
view_def_id	int		Unique internal ID of a specific view.		
display_view	varchar(200)		View name		

CDR_ADJ_ERROR_REF

Configurable. Describes adjustment errors on unit credit adjustments. Admin table. Read-only copy exists on Customer database.

Dependents: CDR_ADJ_ERROR_VALUES

Indexes: primary-key on cdr_adj_error

Field Name	Data Type		Comments	Values	Null
cdr_adj_error	int		Unique internal identifier of adjustment error.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CDR_ADJ_ERROR_VALUES

Configurable. Describes adjustment errors defined in CC_VIEW_ATTRIBUTES. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on cdr_adj_error, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(cdr_adj_error) must exist in CC_VIEW_ATTRIBUTES(cdr_adj_error)

Field Name	Data Type		Comments	Values	Null
cdr_adj_error	int		Adjustment error ID, from CC_VIEW_ATTRIBUTES.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CDR_CHECK_SUM_1...92

For internal use only. Stores duplication checking information for CDR files. Admin tables. 92 CDR_CHECK_SUM_* tables with identical structures exist. Used only when the MCAP system parameter CDR_DUPLICATE_CHECK is set to a non-zero value.

Used by the following modules: MCAP

Indexes: This table has no indexes.

Field Name	Data Type	Comments	Values	Null
file_id	int	Unique identifier for a CDR file.		
file_id_serv	tinyint	Server ID to uniquely identify <code>file_id</code> .		
check_sum1	int	The value of the forward checksum for one of the usage records in this CDR file.		
check_sum2	int	The value of the backward checksum for one of the usage records in this CDR file.		
usage_file_seqnum	int	The sequence number from the usage file. A <code>usage_file_seqnum</code> value of 249 means that this record is the 249th record in the usage file.		

CDR_COMP_STATUS_REF

Configurable. Defines all valid completion status values that can be provided on input usage records. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, RAP, MIU

Dependents: CDR_COMP_STATUS_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `comp_status`

Field Name	Data Type		Comments	Values	Null
comp_status	tinyint		Internal identifier used by other tables to uniquely reference a completion status.		
comp_status_type	tinyint		Completion status types: 0 = Should be processed normally; will be put into CDR_DATA 1 = FREE; pass-thru; will be put into CDR_FREE 2 = External error; will be put into CDR_DATA_WORK 3 = FREE and discard. Nonbillable, not saved.	(R: 0, 1, 2, 3)	
guide_flag	bit		Should the usage be guided and rated? (0 = no) Useful for free comp_status_type.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CDR_COMP_STATUS_VALUES

Configurable. Describes completion status defined in CDR_COMP_STATUS_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on comp_status, language_code

Foreign Keys (comp_status) must exist in CDR_COMP_STATUS_REF(comp_status)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
comp_status	tinyint		Completion status identifier, from CDR_COMP_STATUS_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CDR_CONSOLIDATION_KEYS

Configurable. Indicates by which fields charges will be consolidated. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, BIP

Triggers:

Disallow rows with `is_consolidation_key = 1` and `is_empty = 1`.

`field_name` must be one of the following from `CDR_DATA`: `msg_id`, `msg_id2`, `msg_id_serv`, `ext_tracking_id`, `trans_id`, `element_id`, `type_id_usg`, `rate_class`, `bill_class`, `provider_id`, `jurisdiction`, `rate_currency_code`, `account_no`, `subscr_no`, `subscr_no_resets`, `external_id`, `external_id_type`, `point_origin`, `country_code_origin`, `country_dial_code_origin`, `point_id_origin`, `point_tax_code_origin`, `point_tax_code_type_origin`, `point_target`, `country_code_target`, `point_id_target`, `point_tax_code_target`, `point_tax_code_type_target`, `base_amt`, `rate_dt`, `trans_dt`, `second_dt`, `timezone`, `primary_units`, `second_units`, `third_units`, `units_currency_code`, `billing_units_type`, `ccard_id`, `ccard_id_serv`, `federal_tax`, `state_tax`, `county_tax`, `city_tax`, `other_tax`, `annotation`, `customer_tag`, `rated_units`, `amount`, `foreign_amount`, `rate_period`, `no_bill`, `comp_status`, `cdr_status`, `bill_ref_no`, `bill_ref_resets`, `file_id`, `file_id_serv`, `rev_rcv_cost_ctr`, `arch_flag`, `unrounded_amount`, `corridor_plan_id`, `cell_id_origin`, `split_row_num`, `orig_type_id_usg`, `access_region_origin`, `access_region_target`, `open_item_id`, `num_records`, `amount_reduction`, `amount_reduction_id`.

Disallow rows in which `is_consolidation_key = 1` and `field_name` is one of the following from `CDR_DATA`: `bill_class`, `country_code_origin`, `country_code_target`, `jurisdiction`, `point_id_target`, `point_id_origin`, `point_tax_code_origin`, `point_tax_code_target`, `point_tax_code_type_origin`, `point_tax_code_type_target`, `provider_id`, `rate_class`, `rate_currency_code`, `rate_dt`, `rate_period`.

Disallow rows in which `is_empty = 1` and `field_name` is one of the following from `CDR_DATA`: `annotation`, `bill_class`, `cell_id_origin`, `country_code_origin`, `country_code_target`, `country_dial_code_origin`, `customer_tag`, `external_id`, `external_id_type`, `ext_tracking_id`, `jurisdiction`, `point_origin`, `point_target`, `point_tax_code_origin`, `point_tax_code_target`, `point_tax_code_type_origin`, `point_tax_code_type_target`, `provider_id`, `rate_class`, `rate_period`, `timezone`, `trans_id`.

Indexes:

primary-key on `field_name`

Field Name	Data Type		Comments	Values	Null
<code>field_name</code>	<code>varchar</code>	30	One of a group of selected field names from <code>CDR_DATA</code> .		
<code>is_consolidation_key</code>	<code>bit</code>		Indicates whether a field is a consolidation key.		
<code>is_empty</code>	<code>bit</code>		Indicates whether a field will be emptied and consolidated.		
<code>config_tag_id</code>	<code>varchar</code>	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CDR_DATA_WORK

Dynamic. Holds usage detail records flagged for manual correction. Can contain multiple rows per transaction, as records are corrected or marked uncorrectable. Fields marked with an asterisk (*) come directly from the input usage record, are derived, or are not populated, depending on the MPS configuration and the usage record format. Other fields are derived or not populated. Admin table.

Used by the following modules: CAP, MIU, JNL, RAP

Indexes:
 non-unique on external_id
 non-unique on file_id, file_id_serv
 non-unique on subscr_no, subscr_no_resets, trans_dt
 non-unique on msg_id, msg_id2, msg_id_serv

Field Name	Data Type		Comments	Values	Null
msg_id	int		Unique internal record ID.		
msg_id2	tinyint		Alternate unique internal record ID.		
msg_id_serv	tinyint		Original server ID, to uniquely identify msg_id.		
ext_tracking_id *	varchar (96)	32	Audit trail tracking ID for record.		Null
trans_id *	varchar	20	Optional network transaction ID.		
element_id *	int		Product identifier, defined in PRODUCT_ELEMENTS.		
type_id_usg *	int		Usage type identifier, defined in USAGE_TYPES.		
rate_class *	smallint		Rate class, defined in RATE_CLASS_DESCR.		
bill_class *	smallint		Bill class ID, defined in BILL_CLASS_REF.		Null
provider_id *	int		Service provider, defined in SERVICE_PROVIDERS_REF.		Null
jurisdiction *	int		Territorial range of usage, defined in JURISDICTIONS.		Null
rate_currency_code *	smallint		Currency code for usage charge, defined in RATE_CURRENCY_REF.		
account_no *	int		Kenan/BP account number, from CMF.		
account_category	tinyint		Account category identifier, from ACCOUNT_CATEGORY_REF.		Null
subscr_no	int		Service instance mapped to external_id in EXTERNAL_ID_EQUIP_MAP.		
subscr_no_resets	smallint		Reset counter value for subscr_no.		
external_id *	varchar	144	External ID of subscription.		Null
external_id_type *	smallint		Type of external_id, defined in EXTERNAL_ID_TYPE_REF.		Null
point_origin *	varchar (72)	24	Origin point or prefix, defined in USAGE_POINTS. Often identical to, or determined from, subscr_no.		Null
mkt_code	smallint		Market code, from MKT_CODE_REF.		Null

Field Name	Data Type		Comments	Values	Null
country_code_origin	smallint		Identifier of origin point country, from COUNTRY_CODE_REF.		Null
country_dial_code_origin *	varchar	6	International dialing code for country_code_origin, defined in COUNTRY_DIAL_CODES.		Null
point_id_origin	int		Point ID, from USAGE_POINTS, for point_origin.		Null
point_tax_code_origin *	varchar	15	Taxing authorities for point_origin, defined in TAX_ELEM_DEFAULT_LOC, or Null (non-taxable).		Null
point_tax_code_type_origin *	tinyint		Identifies type of point_tax_code_origin. 3 = Vertex® geocode4 = Custom tax package geocode		Null
point_target *	varchar (72)	24	Target point or prefix, defined in USAGE_POINTS.		Null
country_code_target	smallint		Identifier of target point country, from COUNTRY_CODE_REF.		Null
country_dial_code_target	varchar	6	International dialing code for country_code_target, defined in COUNTRY_DIAL_CODES.		Null
point_id_target	int		Point ID for point_target, from USAGE_POINTS.		Null
point_tax_code_target *	varchar	15	Taxing authorities for point_target, defined in TAX_ELEM_DEFAULT_LOC, or Null (non-taxable).		Null
point_tax_code_type_target *	tinyint		Identifies type of point_tax_code_target: 3 = Vertex geocode4 = Custom tax package geocode		Null
base_amt *	numeric	18	Usage charge without time of day discounts applied.		
rate_dt *	char	20	Date and time the record was rated.		
trans_dt *	char	20	Date and time the usage event (transaction) took place.		
second_dt *	varchar	20	Optional date and time for reports. Not used for billing.		Null
timezone *	tinyint		Time zone identifier, defined in TIMEZONE_REF.		
primary_units *	numeric	18	Number of raw units to be rated.		
second_units *	numeric	18	Optional number of units for reports. Not used for billing.		Null
third_units *	numeric	18	Optional number of units for reports. Not used for billing.		Null
units_currency_code *	smallint		Currency code, defined in RATE_CURRENCY_REF, for prerated usage.		Null
billing_units_type	smallint		Billing units type, from USAGE_TYPES_UNITS for type_id_usg.		Null
profile_id	numeric	18			Null
miu_ccard_account	varchar (66)	22	Credit card account number, from CCARD_LIST.		Null
miu_ccard_carrier_code	tinyint		CCARD_TYPE_CODE_REF.ccard_type_code for credit card.		Null
miu_ccard_ownr_fname	varchar (120)	40	Credit card owner first name.		Null

Field Name	Data Type		Comments	Values	Null
miu_ccard_ownr_lname	varchar (120)	40	Credit card owner last name.		Null
miu_ccard_expire	varchar	4	Date the credit card expires.		Null
federal_tax *	numeric	18	Federal tax amount, for prerated usage only.		Null
state_tax *	numeric	18	State tax amount, for prerated usage only.		Null
county_tax *	numeric	18	County tax amount for prerated usage only.		Null
city_tax *	numeric	18	City tax amount, for prerated usage only.		Null
other_tax *	numeric	18	Other tax amount, for prerated usage only.		Null
annotation *	varchar	255	Free form comments. Not used for billing.		Null
customer_tag *	varchar (240)	80	Optional customer supplied data. Not used for billing.		Null
rated_units	numeric	18	Number of rated units.		
amount *	numeric	18	Amount of the transaction, must be positive.		
foreign_amount	numeric	18	Prerated GSM roaming usage amount based on rating currency and SDR amount in usage record.		
rate_period *	char	1	Rate period identifier, defined in RATE_PERIOD_REF, for the period the usage event occurred in, or "+" (multiple periods).		
no_bill *	bit		Is this record billable? (1 = no)		
comp_status *	tinyint		Completion status, defined in CDR_COMP_STATUS_REF.		
cdr_status *	tinyint		Indicates the current processing status for this record: 0 = unguided, unrated4 = do not rate 1 = guided, unrated5 = aggregate rated by BIP 2 = prerated, unguided8 = processed 3 = guided and rated9 = processed by prepaid 12, 13, 15 — like 2, 3, and 5, but included in reseller feed file.	(R: 0, 1, 2, 3, 4, 5, 8, 9, 12, 13, 15)	
file_id	int		File ID of usage file, from FILE_STATUS.		
file_id_serv	tinyint		Original server ID, to uniquely identify file_id.		Null
rev_rcv_cost_ctr	smallint		Revenue receiving cost center ID, from REV_RCV_COST_CENTER_REF.		
arch_flag	bit		Was this record archived? (1 = yes)	(D: 0)	
miu_error_code1	smallint		Error causing guiding/rating failure, from SYSTEM_MESSAGES.		
miu_error_code2	smallint		Error causing guiding/rating failure, from SYSTEM_MESSAGES.		
miu_error_code3	smallint		Error causing guiding/rating failure, from SYSTEM_MESSAGES.		
mps_miu_dt	datetime		Date and time MIU processed the usage.		Null

Field Name	Data Type		Comments	Values	Null
miu_investigator	varchar	16	Kenan/BP login of the user who last modified the record.		Null
miu_queue	varchar	16	Kenan/BP login of the user assigned to investigate record.		Null
miu_disp_status	tinyint		Has MIU completed this record? 0 = Complete; the record is no longer available for review. 1 = Incomplete; visible in MIU. No more than one incomplete record exists for a given msg_id, msg_id2, msg_id_serv combination.	(R: 0, 1, 2, 3)	Null
miu_disp_code	tinyint		MIU display code: 0 = new record 1 = attempted to correct but failed processing 2 = released for processing, after successful correction (miu_disp_status = 0) 3 = written off (deleted) (miu_disp_status = 0) 4 = put in hold queue 5 = put in work queue	(R: 0, 1, 2, 3, 4, 5)	Null
miu_locked_by	varchar	30	Username or process ID locking this record for processing.		Null
miu_notes	varchar	255	Free form text or comment.		Null
unrounded_amount *	numeric	18	Rated amount or charge for usage event, before rounding.	(D: 0)	
corridor_plan_id	int		Corridor plan ID, from CORRIDOR_PLAN_ID_REF.		Null
cell_id_origin	smallint		Originating cell ID, defined in CELL_ID_REF.		Null
cell_name_origin *	varchar	15	Alphanumeric name for the originating cell_id for the mobile telephone call.		Null
split_row_num	tinyint		Distinguishes this row from other rows split from the same usage event. 0 indicates no split usage.	(D: 0)	
orig_type_id_usg	int		Original usage type, for split usage only.		
access_region_origin	varchar (15)	5	Origin access region, from CDR_DATA.		Null
access_region_target	varchar (15)	5	Target access region, from CDR_DATA.		Null
amount_reduction	numeric	18	Amount reduced off call due to corridor plan.		
amount_reduction_id	int		Corridor discount plan ID of plan that reduces call amount, from CDR_DATA. Defined in CORRIDOR_PLAN_ID_REF.	(D: 0)	
open_item_id	int		Open item ID, from OPEN_ITEM_ID_REF.		
raw_rec_id	smallint		Identifier of raw usage record in CDR_RAW_USAGE.		Null

Field Name	Data Type		Comments	Values	Null
raw_rec_size	smallint		Size of raw usage record in CDR_RAW_USAGE.		Null
roaming_detail	varchar	255	Free form comments. Not used for billing. Passed unchanged to Roaming module.		Null
retry_count	int		Number of times this record has been processed. When this number exceeds the system parameter MAX_RETRY, CAP will not attempt to process the row.	(D: 0)	

CDR_DATA_WORK_TAX

Dynamic. Holds tax records flagged for manual correction. Can contain multiple rows per transaction, as records are corrected or marked uncorrectable. Admin table.

Indexes: non-unique on msg_id, msg_id2, msg_id_serv

Field Name	Data Type		Comments	Values	Null
msg_id	int		Unique internal record ID.		
msg_id2	tinyint		Alternate unique internal record ID.		
msg_id_serv	tinyint		Original server ID, to uniquely identify msg_id.		
split_row_num	tinyint		Distinguishes this row from other rows split from the same usage event. 0 indicates no split usage.		
tax_pkg_inst_id	int		Tax package instance ID, from TAX_PKG_INST_ID_REF.		
federal_tax	numeric	18	Federal tax amount, for prerated usage only.		Null
state_tax	numeric	18	State tax amount, for prerated usage only.		Null
county_tax	numeric	18	County tax amount for prerated usage only.		Null
city_tax	numeric	18	City tax amount, for prerated usage only.		Null
other_tax	numeric	18	Other tax amount, for prerated usage only.		Null
geocode	char	15	The taxable geocode for the record.		Null
tax_type_code	int		Universal tax type code, from TAX_RATES_VAT or CommTax type code from TAX_TYPE_COMM_REF or Sales tax type from TAX_PKG_INST_ID_REF.tax_pkg_type.		Null
aux_tax_info	varchar	15	For the Custom tax package, contains output from the "TJM" tax module, which specifies taxability of a charge based on its jurisdiction. For all other tax packages, contains a second geocode that may be used in the tax calculation.		Null
federal_rate	int		Override federal tax rate. This field has 4 implied decimal places, for example: 1% would be 10000 in this field.		Null
state_rate	int		Override state tax rate. This field has 4 implied decimal places, for example: 1% would be 10000 in this field.		Null
county_rate	int		Override county tax rate. This field has 4 implied decimal places, for example: 1% would be 10000 in this field.		Null
city_rate	int		Override city tax rate. This field has 4 implied decimal places, for example: 1% would be 10000 in this field.		Null

Field Name	Data Type		Comments	Values	Null
other_rate	int		Override other tax rate. This field has 4 implied decimal places, for example: 1% would be 10000 in this field.		Null
is_inclusive	tinyint		Allow inclusive taxes? 0 = regular tax 1 = Brazilian tax 2 = Taiwan tax		
is_late_fee_exempt	bit		Is this tax exempt from late fees? (1 = yes)		
total_rate	int		Total tax rate for this record.		
total_fixed_amt	numeric	18	Total fixed amount for this record.		

CDR_DUP_CHECK_FIELDS

Configurable. Defines the fields in a CDR to be used for duplication checks. Admin table.

Used by the following modules: MCAP

Indexes: primary-key on type_id_usg, field_name

Field Name	Data Type		Comments	Values	Null
type_id_usg	int		Type of usage to check for duplication, from USAGE_TYPES. If type_id_usg = 0, the value of field_name id used in duplication checking.		
field_name	char	30	The name of a field in a CDR to be used in duplication checking. For example, "external_id."		
field_order	tinyint		The order in which field_name is included in the duplication checking. You can associate multiple field names with a value of type_id_usg. Changing the order of fields in duplication checking invalidates the check.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CDR_OUTCOLLECTS

Dynamic. Holds usage detail records for local roaming usage. Fields marked with an asterisk (*) come directly from the input usage record, are derived, or are not populated, depending on the MPS configuration and the usage record format. Other fields are derived or not populated. Admin table.

Used by the following modules: CAP, TIP, TOP, MIU

Indexes:
 non-unique on operator_id, cdr_status
 primary-key on msg_id, msg_id2, msg_id_serv, split_row_num

Field Name	Data Type		Comments	Values	Null
msg_id	int		Unique internal record ID.		
msg_id2	tinyint		Alternate unique internal record ID.		
msg_id_serv	tinyint		Original server ID, to uniquely identify msg_id.		
split_row_num	tinyint		Distinguishes this row from other rows split from the same usage event. 0 indicates no split usage.	(D: 0)	
ext_tracking_id *	varchar	32	Audit trail tracking ID for record.		Null
trans_id *	varchar	20	Optional network transaction ID.		
element_id *	int		Product identifier, defined in PRODUCT_ELEMENTS.		
type_id_usg *	int		Usage type ID, defined in USAGE_TYPES.		
orig_type_id_usg	int		Original usage type, for split usage only.		
rate_class *	smallint		Rate class, defined in RATE_CLASS_DESCR.		
bill_class *	smallint		Bill class ID, defined in BILL_CLASS_REF.		Null
provider_id *	int		Service provider, defined in SERVICE_PROVIDERS_REF.		
jurisdiction *	int		Territorial range of usage, defined in JURISDICTIONS.		Null
rate_currency_code *	smallint		Currency code for usage charge, defined in RATE_CURRENCY_REF.		
account_no *	int		Kenan/BP account number, from CMF.		
subscr_no	int		Service instance mapped to external_id in EXTERNAL_ID_EQUIP_MAP.		
subscr_no_resets	smallint		Reset counter value for subscr_no.		
external_id *	varchar	144	External ID of subscription.		Null
external_id_type *	smallint		Type of external_id, defined in EXTERNAL_ID_TYPE_REF.		Null
point_origin *	varchar (72)	24	Origin point or prefix, defined in USAGE_LOCAL_COUNTS. Often identical to, or determined from, subscr_no.		Null
country_code_origin	smallint		Identifier of origin point country, from COUNTRY_CODE_REF.		Null

Field Name	Data Type		Comments	Values	Null
country_dial_code_origin *	varchar	6	International dialing code for country_code_origin, defined in COUNTRY_DIAL_CODES.		Null
point_id_origin	int		Point ID, from USAGE_LOCAL_COUNTS, for point_origin.		Null
point_tax_code_origin *	varchar	15	Taxing authorities for point_origin, defined in TAX_ELEM_DEFAULT_LOC, or Null (non-taxable).		Null
point_tax_code_type_origin *	tinyint		Identifies type of point_tax_code_origin: 3 = Vertex geocode 4 = Custom tax package geocode		Null
point_target *	varchar (72)	24	Target point or prefix, defined in USAGE_LOCAL_COUNTS.		Null
country_code_target	smallint		Identifier of target point country, from COUNTRY_CODE_REF.		Null
point_id_target	int		Point ID, from USAGE_LOCAL_COUNTS, for point_target.		Null
point_tax_code_target *	varchar	15	Taxing authorities for point_target, defined in TAX_ELEM_DEFAULT_LOC, or Null (non-taxable).		Null
point_tax_code_type_target *	tinyint		Identifies type of point_tax_code_target: 3 = Vertex geocode 4 = Custom tax package geocode		Null
base_amt *	numeric	18	Usage charge without time of day discounts applied.		
rate_dt *	smalldt		Date and time the record was rated.		
trans_dt *	datetime		Date and time the usage event (transaction) took place.		
second_dt *	datetime		Optional date and time for reports. Not used for billing.		Null
timezone *	tinyint		Time zone identifier, defined in TIMEZONE_REF.		
primary_units *	numeric	18	Number of raw units to be rated.		
second_units *	numeric	18	Optional number of units for reports. Not used for billing.		Null
third_units *	numeric	18	Optional number of units for reports. Not used for billing.		Null
units_currency_code *	smallint		Currency code defined in RATE_CURRENCY_REF, for prerated usage.		Null
billing_units_type	smallint		Billing units type, from USAGE_TYPES_UNITS for type_id_usg.		Null
profile_id	numeric	18			Null
federal_tax *	numeric	18	Federal tax amount, for prerated usage only.		Null
state_tax *	numeric	18	State tax amount, for prerated usage only.		Null
county_tax *	numeric	18	County tax amount for prerated usage only.		Null
city_tax *	numeric	18	City tax amount, for prerated usage only.		Null
other_tax *	numeric	18	Other tax amount, for prerated usage only.		Null
annotation *	varchar	255	Must begin with 20 or 30.		Null

Field Name	Data Type		Comments	Values	Null
customer_tag *	varchar (240)	80	Optional customer supplied data. Not used for billing.		Null
rated_units	numeric	18	Number of rated units.		
amount *	numeric	18	Amount of the transaction, must be positive.		
rate_period *	char	1	Rate period identifier, defined in RATE_PERIOD_REF, for the period the usage event occurred in, or "+" (multiple periods).		
no_bill *	bit		Is this record billable? (1 = no).		
comp_status *	tinyint		Completion status, defined in CDR_COMP_STATUS_REF.		
cdr_status *	tinyint		Indicates the current processing status for this record: 0 = unguided, unrated4 = do not rate 1 = guided, unrated5 = aggregate rated by BIP 2 = prerated, unguided8 = processed 3 = guided and rated9 = processed by prepaid 12, 13, 15 — like 2, 3, and 5, but included in reseller feed file.	(R: 0, 1, 2, 3, 4, 5, 8, 9, 12, 13, 15)	
file_id	int		File ID of usage file, from FILE_STATUS.		
file_id_serv	tinyint		Original server ID, to uniquely identify file_id.		
rev_rcv_cost_ctr	smallint		Revenue receiving cost center ID, from REV_RCV_COST_CENTER_REF.		
arch_flag	bit		Was this record archived? (1 = yes)	(D: 0)	
unrounded_amount *	numeric	18	Rated amount or charge for usage event, before rounding.	(D: 0)	
corridor_plan_id	int		Corridor plan ID, from CORRIDOR_PLAN_ID_REF.		Null
cell_id_origin	smallint		Originating cell ID, defined in CELL_ID_REF.		Null
raw_rec_id	smallint		ID of raw usage record in CDR_RAW_USAGE.		Null
raw_rec_size	smallint		Size of raw usage record in CDR_RAW_USAGE.		Null
operator_id	int		Roaming operator ID, from ROAMING_OPERATOR_REF.		
home_sid_bid	varchar	5	Home market (CIBER SID or BID) for the roaming subscriber.		Null
serving_sid_bid	varchar	5	Serving market (CIBER SID or BID) for the roaming subscriber.		Null
seq_num	int		Unique file transfer ID.		Null
roaming_detail	varchar	255	Free form comments. Not used for billing. Passed unchanged to Roaming module.		Null

CDR_RAW_USAGE

Dynamic. Reserved for future use. Admin table.

Indexes: non-unique on msg_id, msg_id2, msg_id_serv

Field Name	Data Type		Comments	Values	Null
msg_id	int		Reserved for future use.		
msg_id2	tinyint		Reserved for future use.		
msg_id_serv	tinyint		Reserved for future use.		
row_count	tinyint		Reserved for future use.		
raw_rec	varbinary	255	Reserved for future use.		

CELL_ID_REF

Configurable. Defines valid cell IDs. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, RAP, Customer Center

Dependents: CELL_ID_VALUES, CELL_ID_ZONE_ID_MAP

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `cell_id`
unique on `cell_name`

Field Name	Data Type		Comments	Values	Null
cell_id	smallint		Unique cell ID.		
cell_name	varchar	15	Description of the <code>cell_id</code> .		Null
ciber_sid_bid	varchar	5	Market (CIBER SID or BID) where the cell is located.		Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CELL_ID_VALUES

Configurable. Describes cell IDs defined in CELL_ID_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on cell_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(cell_id) must exist in CELL_ID_REF(cell_id)

Field Name	Data Type		Comments	Values	Null
cell_id	smallint		Cell ID, from CELL_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CELL_ID_ZONE_ID_MAP

Configurable. Correlates cells to zones and zone classes. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, RAP, Customer Center

Triggers: Each zone_id belongs to one and only one zone_class.

Indexes: primary-key on cell_id, zone_id

Foreign Keys

- (zone_class) must exist in ZONE_CLASS_REF(zone_class)
- (zone_id) must exist in ZONE_REF(zone_id)
- (cell_id) must exist in CELL_ID_REF(cell_id)

Field Name	Data Type		Comments	Values	Null
cell_id	smallint		Cell ID, from CELL_ID_REF.		
zone_id	smallint		Zone ID, from ZONE_REF.		
zone_class	tinyint		Zone class identifier, from ZONE_CLASS_REF.	(R: >= 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_ARBOR_USAGE_TYPE_XREF

Configurable. Stores the mapping direction between a Kenan/BP field and a CIBER record field. Admin table.

Used by the following modules: CAP, MCAP, TOP

Indexes: unique on , serving_sid_bid, orig_cell_id, ciber_call_direction
primary-key on type_id_usg

Field Name	Data Type		Comments	Values	Null
serving_sid_bid	varchar	5	Identifier for the serving SID or BID, from CIBER_SID_BID_DEF. Leave blank to match all SIDs or BIDs.		
orig_cell_id	varchar	3	Initial cell site from the incollect CIBER record. Leave blank to match all cell sites for the SID or BID.		
ciber_call_direction	varchar	1	Call direction from the incollect CIBER record. Leave blank to match all call directions.		
ciber_rec_type	varchar	2	CIBER record type.		Null
type_id_usg	int		Usage type ID, from USAGE_TYPES.		
priority	int		Priority used to determine which usage type to use when more than one is valid.		Null
mapping_direction	tinyint		Direction for mapping this cross-reference: 0 = type_id_usg to ciber_record_no (Kenan/BP to CIBER) 1 = ciber_record_no to Kenan/BP type_id_usg (CIBER to Kenan/BP) Use both cross references to map from CIBER to Kenan/BP.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_FLD_ERROR_CODES

Configurable. Stores CIBER error codes that identify why a CIBER field fails a CIBER edit. Admin table.

Used by the following modules: CAP, MCAP, TOP
Indexes: primary-key on field_name, reason_code

Field Name	Data Type		Comments	Values	Null
field_name	varchar	64	CIBER field name.		
error_code	int		CIBER error code.		
reason_code	int		Code that identifies the reason the CIBER edit on this field failed.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_INCOLLECTS

Dynamic. Not currently used. Contains wireless usage messages destined for the CIBER clearinghouse. Typically these messages have been generated by customers of another wireless carrier. Admin table.

Used by the following modules: MCAP, CAP, TOP

Indexes: primary-key on msg_id, msg_id2, msg_id_serv

Field Name	Data Type		Comments	Values	Null
msg_id	int		Unique internal ID of a message.		
msg_id2	tinyint		Second unique internal ID of a message.		
msg_id_serv	tinyint		Original server ID, to uniquely identify msg_id.		
home_carrier_sid_bid	int		System ID (SID) or CiberNet billing ID (BID) for the wireless carrier this message will be routed to, from CIBER_SID_BID.		
point_origin	varchar (72)	24	Usage point or usage point prefix, from USAGE_LOCAL_COUNTS. Usually same as, or determined from, subscr_no.		
point_origin_len	tinyint		Actual length of the number stored in point_origin.		
ext_tracking_id	varchar	32	Audit trail tracking ID for usage message, supplied by client.		
trans_dt	datetime		Date and time event took place, from usage record.		
federal_tax	numeric	18	Federal tax amount for prerated usage only.		
state_tax	numeric	18	State tax amount for prerated usage only.		
county_tax	numeric	18	County tax amount for prerated usage only.		
city_tax	numeric	18	City tax amount for prerated usage only.		
other_tax	numeric	18	Other tax amount for prerated usage only.		
call_direction	tinyint		Call direction: 1 = call originated from mobile roamer 2 = call terminated at mobile roamer 3 = mobile roamer call forward 4 = mobile roamer to mobile 6 = call originated from mobile home unit 7 = call terminated at mobile home unit 8 = mobile home call forward 9 = mobile home to mobile		

Field Name	Data Type		Comments	Values	Null
comp_status	tinyint		Completion status of call: 1 = incomplete 2 = called party answered 3 = call completed but midnight passed before called party answered		
term_status	tinyint		Termination status of call: 1 = abnormal 2 = normal 3 = unknown		
point_target	varchar (72)	24	Target usage point or prefix, from USAGE_LOCAL_COUNTS.		
point_target_len	tinyint		Actual length of the number stored in point_target.		
temp_local_dir_num	varchar	10	Temporary local directory number assigned to roamer by local carrier.		Null
rate_currency_code	smallint		Currency code of currency in which the transaction is rated, from RATE_CURRENCY_REF.		
initial_cell_site	smallint		Initial cell site of the call.		
timezone	tinyint		Time zone identifier, from TIMEZONE_REF.		
daylight_savings	bit		Is it currently daylight savings time in timezone? (0 = yes)		
msg_acct_digits	varchar	10	End-user specific accounting codes.		Null
rated_units	numeric	18	Units for amount, from USAGE_TYPES_UNITS.		
rate_period	char	1	Rate period identifier, from RATE_PERIOD_REF, for the period the usage event occurred in, or "+" (multiple rate periods).		
base_amt	numeric	18	Usage charge without time of day discounts applied.		
amount	numeric	18	Amount of the transaction, must be positive.		
misc_surcharge	numeric	18	Miscellaneous surcharge imposed on this call.		

Field Name	Data Type		Comments	Values	Null
misc_surcharge_desc	char	1	Code that describes the purpose of the surcharge: 0 = no surcharge 1 or A = airtime 4 = other charges imposed by the carrier 5 = voice mail — retrieve 6 = feature activate/deactivate via cellular networking 7 = national/regional roam network call U = call forward V = 3-way call W = call waiting X = speed calling Y = fax Z = voice mail — record		
printed_call	varchar	15	The number called, or, in some cases, a text string that is shown on the bill in place of the number called.		Null
fraud_ind	char	2	Indicates whether the usage event might be fraudulent. Values of 01-99 are assigned based on prior agreements between carriers. 00 or " " = no fraud involved 01-33 = indicators assigned by the serving carrier 34-66 = indicators assigned by the home carrier 67-99 = inter-carrier indicators		
fraud_sub_ind	char	1	Indicates that the record was fraudulent.		
special_features	char	5	Indicates what special feature was used: 0 = none A = operator assisted 1 = call forward B = other 2 = 3-way call C = activate/deactivate feature 3 = call waiting D = international call 4 = speed dialing E = national/regional roam network call 5 = switch-to-switch F = no airtime charge 6 = fax G = satellite voice service 7 = data H = satellite data transmission 8 = record voicemail I = satellite fax 9 = retrieve voicemail		
called_place	char	10	Geographic point (usually city) that is the call's destination. Contains the country name if this was an international call.		
called_state_prov	char	2	State or province of the call's destination.		
serving_place	char	10	Geographic point (usually city) where the call originated.		

Field Name	Data Type		Comments	Values	Null
serving_state_prov	char	2	State or province where the call originated.		
type_id_usg	int		Usage type ID, from USAGE_TYPES.		
rate_class	smallint		Rating component for the service instance.		
bill_class	smallint		Bill class ID, from BILL_CLASS_REF.		
provider_id	int		Service provider identifier, from SERVICE_PROVIDERS_REF.		
jurisdiction	int		Territorial range of usage, from JURISDICTIONS.		
country_code_origin	smallint		Identifier of usage origin point, from COUNTRY_CODE_REF.		
country_dial_code_origin	varchar	6	International dialing code for origin country, from COUNTRY_DIAL_CODES.		Null
country_code_target	smallint		Identifier of usage target point, from COUNTRY_CODE_REF.		
primary_units	numeric	18	Units to be billed, from USAGE_TYPES_UNITS and input usage record.		
second_units	numeric	18	Additional units for ad hoc reports. Not used for billing.		
third_units	numeric	18	Additional units for ad hoc reports. Not used for billing.		
point_id_origin	int		Origin point ID, from USAGE_LOCAL_COUNTS.		
point_id_target	int		Target point ID, from USAGE_LOCAL_COUNTS.		
rate_dt	datetime		Date and time the record was rated.		
file_id_in	int		File ID, from FILE_STATUS, of input usage file.		
file_id_serv_in	tinyint		Original server ID, to uniquely identify file_id_in.		
file_id_out	int		File ID, from FILE_STATUS, of output usage file.		Null
file_id_serv_out	tinyint		Original server ID, to uniquely identify file_id_out.		Null
arch_flag	bit		Was this record archived? (1 = yes)		
process_status	bit		Was this message processed? (1 = yes)		
chg_dt	datetime		Date and time that this record was last modified.		Null
chg_who	varchar	30	The username or process ID (for example; cap01) of the user/process that last modified this record.		Null

CIBER_INCOLLECTS_ERROR

Dynamic. This table is not used. Contains wireless usage messages flagged for manual correction. Can hold multiple rows per transaction, as records are corrected or marked uncorrectable. Admin table.

Used by the following modules: MCAP, CAP, MIU

Indexes: This table has no indexes.

Field Name	Data Type		Comments	Values	Null
msg_id	int		Unique internal ID of a message.		
msg_id2	tinyint		Second unique internal ID of a message.		
msg_id_serv	tinyint		Original server ID, to uniquely identify msg_id.		
home_carrier_sid_bid	int		System ID (SID) or CiberNet billing ID (BID) for the wireless carrier that this message will be routed to, from CIBER_SID_BID.		
point_origin	varchar (72)	24	Usage point or usage point prefix, from USAGE_LOCAL_COUNTS. Usually same as, or determined from, subscr_no.		
point_origin_len	tinyint		Actual length of the number stored in point_origin.		
ext_tracking_id	varchar	32	Audit trail tracking ID for usage message, supplied by client.		
trans_dt	datetime		Date and time the usage event (transaction) took place. From the input usage record.		
federal_tax	numeric	18	Federal tax amount for prerated usage only.		
state_tax	numeric	18	State tax amount for prerated usage only.		
county_tax	numeric	18	County tax amount for prerated usage only.		
city_tax	numeric	18	City tax amount for prerated usage only.		
other_tax	numeric	18	Other tax amount for prerated usage only.		
call_direction	tinyint		Call direction: 1 = call originated from mobile roamer 2 = call terminated at mobile roamer 3 = mobile roamer call forward 4 = mobile roamer to mobile 6 = call originated from mobile home unit 7 = call terminated at mobile home unit 8 = mobile home call forward 9 = mobile home to mobile		

Field Name	Data Type		Comments	Values	Null
comp_status	tinyint		Completion status of call: 1 = incomplete 2 = called party answered 3 = call completed but midnight passed before called party answered		
term_status	tinyint		Termination status of call: 1 = abnormal 2 = normal 3 = unknown		
point_target	varchar (72)	24	Target usage point or prefix, from USAGE_LOCAL_COUNTS.		
point_target_len	tinyint		Actual length of the number stored in point_target.		
temp_local_dir_num	varchar	10	Temporary local directory number assigned to a roamer by the local carrier.		Null
rate_currency_code	smallint		Currency code of currency in which to rate the transaction, from RATE_CURRENCY_REF.		
initial_cell_site	smallint		Initial cell site of the call.		
timezone	tinyint		Time zone identifier, from TIMEZONE_REF.		
daylight_savings	bit		Is it currently daylight savings time in timezone? (0 = yes)		
msg_acct_digits	varchar	10	End-user specific accounting codes.		Null
rated_units	numeric	18	Units for amount, from USAGE_TYPES_UNITS.		
rate_period	char	1	Rate period identifier, from RATE_PERIOD_REF, for the period the usage event occurred in, or "+" (multiple rate periods).		
base_amt	numeric	18	Rated amount or charge of the usage event without time of day discounts applied.		
amount	numeric	18	Amount of the transaction, must be positive.		
misc_surcharge	numeric	18	Miscellaneous surcharge imposed on this call.		
misc_surcharge_desc	char	1	Code that describes the purpose of the surcharge. Values for this field are the same as those in CIBER_INCOLLECTS.		
printed_call	varchar	15	The number called, or, in some cases, a text string that is shown on the bill in place of the number called.		Null
fraud_ind	char	2	Indicates whether the usage event might be fraudulent. Values of 01-99 are assigned based on prior agreements between carriers. 00 or " " = no fraud involved 01-33 = indicators assigned by the serving carrier 34-66 = indicators assigned by the home carrier 67-99 = inter-carrier indicators		

Field Name	Data Type		Comments	Values	Null
fraud_sub_ind	char	1	Indicates what action should be taken for fraudulent messages: 0 or " " = no fraud involved 1 = reporting purposes only 2 = other action		
special_features	char	5	Special features used. Values for this field are the same as those in CIBER_INCOLLECTS.		
called_place	char	10	Geographic point (usually city) that is the call's destination. Contains the country name if this was an international call.		
called_state_prov	char	2	State or province of the call's destination.		
serving_place	char	10	Geographic point (usually city) where the call originated.		
serving_state_prov	char	2	State or province where the call originated.		
type_id_usg	int		Usage type ID, from USAGE_TYPES.		
rate_class	smallint		Account-level rating component for the service instance, from SERVICE.rate_class_default.		
bill_class	smallint		Bill class, priority, or grade of service identifier, from BILL_CLASS_REF.		
provider_id	int		Service provider identifier, from SERVICE_PROVIDERS_REF.		
jurisdiction	int		Territorial range of usage, from JURISDICTIONS.		
country_code_origin	smallint		Identifier of usage origin point, from COUNTRY_CODE_REF.		
country_dial_code_origin	varchar	6	International dialing code for origin country, from COUNTRY_DIAL_CODES.		Null
country_code_target	smallint		Identifier of usage target point, from COUNTRY_CODE_REF.		
primary_units	numeric	18	Units to be billed, from USAGE_TYPES_UNITS and input usage record.		
second_units	numeric	18	Additional units for ad hoc reports. Not used for billing.		
third_units	numeric	18	Additional units for ad hoc reports. Not used for billing.		
point_id_origin	int		Origin point identifier, from USAGE_LOCAL_COUNTS.		
point_id_target	int		Target point identifier, from USAGE_LOCAL_COUNTS.		
rate_dt	datetime		Date and time the record was rated.		
file_id_in	int		File ID of input usage file, from FILE_STATUS.		
file_id_serv_in	tinyint		Original server ID, uniquely identifies file_id_in.		
file_id_out	int		File ID of output usage file, from FILE_STATUS.		Null
file_id_serv_out	tinyint		Original server ID, uniquely identifies file_id_out.		Null
arch_flag	bit		Was this record archived? (1 = yes)		

Field Name	Data Type		Comments	Values	Null
process_status	bit		Was this message processed? (1 = yes)		
chg_dt	datetime		Date and time that this record was last modified.		Null
chg_who	varchar	30	The username or process ID (for example; cap01) of the user/process that last modified this record.		Null
error_code1	smallint		Error causing failure, from SYSTEM_MESSAGES.		
error_code2	smallint		Error causing failure, from SYSTEM_MESSAGES.		
error_code3	smallint		Error causing failure, from SYSTEM_MESSAGES.		
disp_status	tinyint		Indicates the record's disposition status: 0 = the correction is completed. 1 = correction is incomplete, ready for disposition.		
disp_code	tinyint		Display code: 0 = new record 1 = attempted to correct but failed processing 2 = released for processing, after successful correction 3 = written off (deleted) 4 = put on hold 5 = placed in work queue		
notes	varchar	255	Free form text or comments.		Null
investigator	varchar	16	Kenan/BP login of the user who last modified the record.		Null

CIBER_LINE_RANGES

Configurable. MPS uses this table to check the “home” versus “roam” status of usage records. Primarily for cellular mobile telephony. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, MCAP, TOP

Indexes: primary-key on npa, nxx, line_range_low, active_dt
non-unique on , npa, nxx, line_range_low, sid_bid

Field Name	Data Type		Comments	Values	Null
sid_bid	varchar	5	SID or BID number, from CIBER_SID_BID_DEF.		
npa	smallint		NPA number (area code) for this line range, for North America deployments, or the analogous value in deployments outside North America.		
nxx	smallint		NXX number (office code) for this line range, for North America deployments, or the analogous value in deployments outside North America.		
line_range_low	smallint		Lowest number in this number range.		
line_range_high	smallint		Highest number in this line range.		
market_name	varchar	80	Geographical location for this number range.		Null
state	varchar	2	Two-character abbreviation for the state or province for this number range.		Null
carrier_code	smallint		CIBER carrier code as listed in Chapter 12-3A of the CIBER manual. Optional.		Null
arp	smallint		Designated authorized receipt point for this range, from CIBER tables. Optional.		Null
active_dt	smalldt		Date that this number range was assigned to the SID or BID.		
inactive_dt	smalldt		Date on which this number range is no longer assigned to the SID or BID.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_OPERATOR_SID_BID

Configurable. Maps CIBER roaming operators to SID or BID numbers. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, MCAP, TOP

Indexes: primary-key on sid_bid

Field Name	Data Type		Comments	Values	Null
operator_id	int		operator_id for the roaming operator for this SID or BID, from ROAMING_OPERATOR_REF.		
sid_bid	varchar	5	SID or BID number to map to this roaming operator.		
version_in	tinyint		CIBER file version number for incoming files from this roaming operator.		Null
version_out	tinyint		CIBER file version number for outgoing files to this roaming operator.		Null
max_days_in	smallint		Number of days after call date by which call data must be received by this roaming operator. Two months (~60 days) is typical.		Null
max_days_out	smallint		Number of days after call date by which call data must be sent to this roaming operator. Two months (~60 days) is typical.		Null
seq_num_in	int		Unique file transfer ID for incoming files from this roaming operator.		Null
seq_num_out	int		Unique file transfer ID for outgoing files to this roaming operator.		Null
last_file_in	smalldt		Time stamp when the last file was received.		Null
last_file_out	smalldt		Time stamp when the last file was sent out.		Null
ext_contact_id_in	int		ext_contact_id for the roaming operator sending incollect records.		Null
ext_contact_id_out	int		ext_contact_id for the roaming operator receiving outcollect records.		Null
active_dt	smalldt		Date the relationship between the roaming operator and SID or BID becomes active.		
inactive_dt	smalldt		Date the relationship between the roaming operator and SID or BID is no longer active.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_ROAMING_AGREEMENT

Configurable. Stores contact information and roaming agreement details for mobile carriers and roaming clearinghouses that use the CIBER record standard. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, MCAP, TOP

Indexes:
 primary-key on operator_id
 non-unique on active_dt

Foreign Keys (operator_id) must exist in ROAMING_OPERATOR_REF(operator_id)

Field Name	Data Type		Comments	Values	Null
operator_id	int		Roaming operator ID, from ROAMING_OPERATOR_REF.		
rate_key_id	smallint		Roaming rate key ID, from ROAMING_RATE_KEYS.		
ciber_operator_type	tinyint		Type of CIBER operator. Valid values are: 1 = Home operator 2 = Other CIBER operator 3 = Clearinghouse		
operator_address_1	varchar	75	Operator's address line 1.		Null
operator_address_2	varchar	75	Operator's address line 2.		Null
operator_address_3	varchar	75	Operator's address line 3.		Null
operator_city	varchar	35	Operator's city.		Null
operator_state	varchar	28	Operator's state.		Null
operator_county	varchar	28	Operator's county.		Null
operator_zip	varchar	16	Operator's Zip or Postal Code.		Null
operator_contact_name	varchar	60	Operator's contact name.		Null
operator_contact_phone	varchar	20	Operator's contact phone.		Null
operator_contact_faxno	varchar	20	Operator's fax telephone number.		Null
operator_description	varchar	80	Descriptive name for this operator.		Null
rate	numeric	18	Recurring charge rate for this operator. Uses RATE_CURRENCY_REF.implied_decimals for the relevant value of currency_code.		Null
rc_charge_type	tinyint		Recurring charge type for this operator.		Null
country_code	smallint		Operator country code, from COUNTRY_CODE_REF.		Null
currency_code	smallint		Operator currency code, from RATE_CURRENCY_REF. Required if ciber_operator_type is 1 (Home operator).		Null

Field Name	Data Type		Comments	Values	Null
ext_contact_id_in	smallint		External data source ID for clearinghouse (ciber_operator_type is 3), from EXT_CONTACTS, used for incollect records.		Null
ext_contact_id_out	smallint		External data source ID for clearinghouse (ciber_operator_type is 3), from EXT_CONTACTS, used for outcollect records.		Null
active_dt	smalldt		Date that this roaming agreement becomes active.		
inactive_dt	smalldt		Date that this roaming agreement becomes inactive.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_SID_BID_DEF

Configurable. For mobile telephony, specifically cellular. Stores all SID and BID numbers for CIBER data exchange. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, MCAP, TOP

Indexes: primary-key on sid_bid

Field Name	Data Type		Comments	Values	Null
sid_bid	varchar	5	SID or BID number.		
band	varchar	2	Band in which this SID or BID operates. Valid values are: A, B, C, D, E, F.		
carrier	varchar	80	Name of the carrier from the CIBER table 12-4.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CIBER_SID_BID_MARKET

Configurable. Stores one or more market names for each SID or BID in CIBER_SID_BID_DEF. Admin table.

Used by the following modules: CAP, MCAP, TOP

Indexes: non-unique on , sid_bid

Field Name	Data Type		Comments	Values	Null
sid_bid	varchar	5	SID or BID number, as defined in CIBER_SID_BID_DEF.		
market_city	varchar	35	City name for the SID's or BID's market.		
market_state_abbr	varchar	2	State name for the SID's or BID's market.		
market_country_code	smallint		country_code from COUNTRY_CODE_REF.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLASS_OF_SERVICE_CODE_REF

Configurable. Defines valid service instance classes of service (for example grades of data lines). Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIP, BIF, JNL

Dependents: BILL_FORMAT_TEMPLATE, CLASS_OF_SERVICE_CODE_VALUES, ITEM_MARKETING_DATA_REF, RATE_PERIODS, RATE_RC, RATE_USAGE, RATE_USAGE_OVERRIDES, SERVICE BILLING

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `class_of_service_code`

Field Name	Data Type		Comments	Values	Null
class_of_service_code	smallint		Unique internal identifier of a specific class of service.		
class_of_service_value	int		Reserved for future use.		
service_group	varchar	6	Reserved for future use.		Null
foreign_code	varchar (30)	10	Reserved for future use.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLASS_OF_SERVICE_CODE_VALUES

Configurable. Describes classes of service defined in CLASS_OF_SERVICE_CODE_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Indexes: primary-key on class_of_service_code, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(class_of_service_code) must exist in CLASS_OF_SERVICE_CODE_REF(class_of_service_code)

Field Name	Data Type		Comments	Values	Null
class_of_service_code	smallint		Class of service identifier, from CLASS_OF_SERVICE_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLEARING_HOUSE_CONTACTS

Configurable. Defines the external contacts associated with each clearinghouse. Used by CPM and EFT to determine where outgoing files for clearinghouses should go and to determine which incoming files are intended for them. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CPM, EFT

Triggers:
 credit_trans_type must exist in BMF_TRANS_DESCR.bmf_trans_type, where trans_sign is 1, or be 0.
 debit_trans_type must exist in BMF_TRANS_DESCR.bmf_trans_type, where trans_sign is -1, or be 0.
 suppress_prenotes must be 1 when ch_format_type = 9 (sepa format).

Indexes:
 primary-key on ext_contact_id
 unique on clearing_house_id, module, is_send

Foreign Keys
 (ext_contact_id) must exist in EXT_CONTACTS(ext_contact_id)
 (clearing_house_id) must exist in CLEARING_HOUSE_ID_REF(clearing_house_id)

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		
module	char	4	Module name, from SYSTEM_MODULES (such as CPM).		
ext_contact_id	smallint		External contact ID, from EXT_CONTACTS.		
is_send	tinyint		Is this a send contact point (1) or a receive contact point (0)?		
ch_format_type	tinyint		Clearinghouse file format type. Values are: 1 = Record Format B 2 = Record Format A 3 = Record Format C 4 = Record Format E 5 = Record Format E 6 = Record Format F 7 = Record Format D 8 = Record Format B 9 = SEPA clearing house	(R: 1, 2, 3, 4, 5, 6, 7, 8, 9)	
credit_trans_type	int		BMF_TRANS_DESCR.bmf_trans_type for credit payments, or 0 if not used.		
debit_trans_type	int		BMF_TRANS_DESCR.bmf_trans_type for debit payments, or 0 if not used.		
allow_auto_post	bit		Should automatic posting be allowed to this clearinghouse? (1 = yes, 0 = no)		
auto_post_delay	tinyint		Days to wait before automatic posting, if allow_auto_post = 1.		
chgb_resubmit_delay	tinyint		Days to wait before resubmitting a chargeback.		

Field Name	Data Type		Comments	Values	Null
collection_delay	smallint		Depends on the value of the PAYMENT_DATE_DELAY (CPM or EFT) system parameter. The number of days to wait after generating charges before contacting this clearinghouse, or the number of days to wait after the payment due date before contacting this clearinghouse. If a negative value, the number of days before the payment due date that the clearinghouse should be contacted.		
suppress_prenotes	bit		Suppress EFT prenotes for this clearinghouse? (1 = yes, 0 = no)	(D: 0)	
in_use	varchar	8	Field to indicate if the clearing_house_id is in use.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLEARING_HOUSE_DIVISION

Configurable. Defines division number codes, to support transactions in multiple currencies, and to enable service provider identification. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CPM

Indexes: primary-key on clearing_house_id, currency_code, rev_rcv_cost_ctr

Foreign Keys
(rev_rcv_cost_ctr) must exist in REV_RCV_COST_CENTER_REF(rev_rcv_cost_ctr)
(currency_code) must exist in RATE_CURRENCY_REF(currency_code)
(clearing_house_id) must exist in CLEARING_HOUSE_ID_REF(clearing_house_id)

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID ("CKF", "FUS", and so on) from CLEARING_HOUSE_ID_REF.		
currency_code	smallint		Internal currency ID, from RATE_CURRENCY_REF.		
rev_rcv_cost_ctr	smallint		Revenue receiving cost center ID, from REV_RCV_COST_CENTER_REF.		
division_number	char (36)	12	Unique division number.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLEARING_HOUSE_ID_REF

Configurable. Describes the clearinghouses supported for credit card and EFT transactions. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CCARD_AVS_RESPONSE_CODES, CLEARING_HOUSE_CONTACTS, CLEARING_HOUSE_DIVISION, CLEARING_HOUSE_ID_VALUES, EFT_RESPONSE_CODE_REF, PAYMENT_PROFILE

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `clearing_house_id`

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID ("CKF", "FUS", and so on).		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLEARING_HOUSE_ID_VALUES

Configurable. Describes clearinghouses defined in CLEARING_HOUSE_ID_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on clearing_house_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(clearing_house_id) must exist in CLEARING_HOUSE_ID_REF(clearing_house_id)

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CLEARING_HOUSE_INFO

Configurable. Stores clearinghouse-specific information for clearinghouse IDs defined in CLEARING_HOUSE_ID_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CPM, EFT

Triggers: clearing_house_id exists in CLEARING_HOUSE_CONTACTS for the module.

Indexes: primary-key on clearing_house_id, module

Field Name	Data Type		Comments	Values	Null
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		
module	char	4	Payment module using this clearinghouse.		
ckf_client_id	varchar	10	CheckFree client ID.		Null
ckf_var_descriptor	char (120)	40	CheckFree variable descriptor, which appears on the customer's credit card bill.		Null
knn_merchant_acct	varchar	12	Internal merchant account number.		Null
knn_merchant_id	varchar	4	Internal merchant ID.		Null
fus_pres_id	varchar	6	Presenter ID.		Null
fus_pres_pass	varchar	8	Presenter password.		Null
fus_sub_id	varchar	6	Submitter ID.		Null
fus_sub_pass	varchar	8	Submitter password.		Null
fus_avs_type	tinyint		First USA address verification code.		Null
frn_unique_dates	bit		Reserved for future use.		
frn_fast_mode	bit		Use fast mode? (0 = no, 1 = yes)		
frn_norm_op_id	varchar	2	Normal mode operation ID (Normal Direct Debit).		Null
frn_norm_post_delay	tinyint		Normal mode posting date delay (for example, 7 days).		Null
frn_fast_op_id	varchar	2	Fast mode operation ID (Accelerated Direct Debit).		Null
frn_fast_post_delay	tinyint		Fast mode posting date delay (for example, 3 days).		Null
frn_national_num	varchar	6	Sender national number.		Null
frn_company_name	varchar	24	Company name of sender.		Null
frn_agency_code	varchar	5	Bank agency code to be credited.		Null
frn_account_num	varchar	11	Bank account to be credited.		Null
frn_bank_code	varchar	5	Bank code to be credited.		Null

Field Name	Data Type		Comments	Values	Null
fdm_merchant_name	varchar	16	FDMS/NaBANCO merchant name.		Null
fdm_merchant_number	varchar	11	FDMS/NaBANCO merchant ID.		Null
fdm_avs_type	tinyint		FDMS/NaBANCO address verification code.		Null
dom_rcon_number	varchar	15	Reserved for future use.		Null
dom_mailbox_id	varchar	8	Reserved for future use.		Null
dom_fund_orig	varchar	10	Reserved for future use.		Null
dom_fund_dest	varchar	5	Reserved for future use.		Null
dom_visa_orig	varchar	10	Reserved for future use.		Null
dom_visa_dest	varchar	5	Reserved for future use.		Null
dom_msc_orig	varchar	10	Reserved for future use.		Null
dom_msc_dest	varchar	5	Reserved for future use.		Null
dom_amex_process_id	varchar	3	Reserved for future use.		Null
dom_amex_receiver_id	varchar	3	Reserved for future use.		Null
dom_amex_format_code	varchar	2	Reserved for future use.		Null
dom_phone_dest	varchar	5	Reserved for future use.		Null
dom_currency_ind	varchar	3	Reserved for future use.		Null
dom_fund_inst_id	varchar	9	Reserved for future use.		Null
dom_fund_acct_num	varchar	12	Reserved for future use.		Null
dom_batch_limit	int		Reserved for future use.		Null
dom_visa_merchant	varchar	8	Reserved for future use.		Null
dom_msc_merchant	varchar	8	Reserved for future use.		Null
dom_amex_merchant	varchar	10	Reserved for future use.		Null
creditor_iban	varchar	34	Iban for customer SEPA pay method.		Null
creditor_bic	varchar	11	Bic for customer SEPA pay method.		Null
creditor_id	varchar	18	Mandate ID for customer SEPA pay method.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CMF_STATUS_CHG_REASON_REF

Configurable. Describes the valid reasons that can be given for changes in account status within CMF_STATUS_HISTORY. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CMF_STATUS_CHG_REASON_VALUES, CMF_STATUS_HISTORY

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `cmf_status_chg_reason`

Field Name	Data Type		Comments	Values	Null
cmf_status_chg_reason	smallint		Unique reason identifier for the status change. 97 = Disconnect requested.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CMF_STATUS_CHG_REASON_VALUES

Configurable. Describes account status change reasons defined in CMF_STATUS_CHG_REASON_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on cmf_status_chg_reason, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(cmf_status_chg_reason) must exist in CMF_STATUS_CHG_REASON_REF(cmf_status_chg_reason)

Field Name	Data Type		Comments	Values	Null
cmf_status_chg_reason	smallint		Reason for account status change, from CMF_STATUS_CHG_REASON_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (30)	10	Abbreviated version of the display value.		
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CMF_STATUS_REF

Static. Describes the account status (suspend, active, new, and so on) that can be included in CMF_STATUS_HISTORY. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CMF_STATUS_HISTORY, CMF_STATUS_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `cmf_status`

Field Name	Data Type		Comments	Values	Null
cmf_status	smallint		Account status: 20 = active (the default) 21 = suspended 22 = terminated 23 = disconnect requested 24 = closed Individual deployments may support additional values.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CMF_STATUS_VALUES

Configurable. Describes account status defined in CMF_STATUS_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on cmf_status, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(cmf_status) must exist in CMF_STATUS_REF(cmf_status)

Field Name	Data Type		Comments	Values	Null
cmf_status	smallint		Account status, from CMF_STATUS_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (30)	10	Abbreviated version of the display value.		
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COMPONENT_DEFINITION_REF

Configurable. Describes each product package component. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CMF_COMPONENT_ELEMENT, CMF_PACKAGE_COMPONENT, COMPONENT_DEFINITION_VALUES, COMPONENT_NRCS, PACKAGE_COMPONENTS, PRODUCT, PRODUCT_VIEW, RATE_PERIODS, RATE_RC, UNIT_CR_RATE_LIMIT

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `component_id`

Check Constraints: `active_dt <= inactive_dt`

Field Name	Data Type		Comments	Values	Null
component_id	int		Unique ID for component.		
component_level	tinyint		Identifies type of package component: 1 = Account-level component. Requires entry in DEPENDENCY for this <code>component_id</code> . 2 = Service-instance-level component. Requires entry in EXCLUSION for this <code>component_id</code> .	(R: 1, 2)	
active_dt	smalldt		Date component becomes available for provisioning.		
inactive_dt	smalldt		Date component becomes unavailable for provisioning.		Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
is_serviceability_applicable	bit		Does Serviceability use this information? (1 = yes)	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COMPONENT_DEFINITION_VALUES

Configurable. Describes product package components defined in COMPONENT_DEFINITION_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on component_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(component_id) must exist in COMPONENT_DEFINITION_REF(component_id)

Field Name	Data Type		Comments	Values	Null
component_id	int		Component ID, from COMPONENT_DEFINITION_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COMPONENT_POLICY_MAP

Configurable. Component to Policy mapping from COMPONENT_DEFINITION_REF to POLICY_REF . Admin table.

Indexes: primary-key on component_id, policy_id

Foreign Keys (component_id) must exist in COMPONENT_DEFINITION_REF(component_id)
(policy_id) must exist in POLICY_REF (policy_id)

Field Name	Data Type		Comments	Values	Null
component_id	int		Component Identifier, from COMPONENT_DEFINITION_REF.		
policy_id	int		Policy Identifier, from POLICY_REF.		
active_dt	datetime		Active date of the component to policy mapping.		
inactive_dt	datetime		Inactive date of the component to policy mapping		Null

COMPONENT_NRCS

. Reserved for future use. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on component_id, action_code, type_id_nrc, active_dt

Foreign Keys (type_id_nrc) must exist in NRC_TRANS_DESCR(type_id_nrc)
(component_id) must exist in COMPONENT_DEFINITION_REF(component_id)

Field Name	Data Type		Comments	Values	Null
component_id	int		Reserved for future use.		
action_code	smallint		Reserved for future use.	(R: 0, 1, 2)	
type_id_nrc	int		Reserved for future use.		
active_dt	smalldt		Reserved for future use.		
inactive_dt	smalldt		Reserved for future use.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CONNECT_REASON_CODES_REF

Configurable. Describes each connect code reason. Used by Kenan/OM. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CMF_COMPONENT_ELEMENT, CMF_PACKAGE, CMF_PACKAGE_COMPONENT, CONNECT_REASON_CODES_VALUES, PRODUCT, PRODUCT_VIEW

Triggers: Only one row can have `is_default` is 1.

Indexes: primary-key on `connect_reason`

Field Name	Data Type		Comments	Values	Null
connect_reason	smallint		Used by Kenan/OM. The reason for the service connection.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		Used by Kenan/OM. If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CONNECT_REASON_CODES_VALUES

Configurable. Describes each connect code reason defined in CONNECT_REASON_CODES_VALUES. Used by Kenan/OM. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on connect_reason, language_code

Foreign Keys
(connect_reason) must exist in CONNECT_REASON_CODES_REF(connect_reason)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
connect_reason	smallint		Used by Kenan/OM. The reason for the service connection.		
language_code	smallint		Used by Kenan/OM. Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Used by Kenan/OM. Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Used by Kenan/OM. Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CONNECT_TERM_SOAP

Configurable. Stores the web server IP, port, user name and password for gsoap usage. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on module, term_name

Field Name	Data Type		Comments	Values	Null
module	varchar	4	Stores module name, such as ARM,THS etc.,		Null
term_name	varchar	32	The web server name, such as RH&T.		Null
ip_addr	varchar	40	The ip address for the web server.		
port	smallint		The port through which to connect to the web server.		
user_name	varchar	32	The user name for the web server.		
pwd	varchar	60	The password for the user.		

CONTRACT_TYPES

Configurable. Identifies all valid contract types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIF,BIP

Dependents: CUSTOMER_CONTRACT, CUSTOMER_CONTRACT_VIEW

Triggers:

If bonus_point_id is not Null, allow_serv_inst and allow_si_group must both be 0.
 The product must be provisionable by contract: PRODUCT_ELEMENTS.contract_use_code must not be 2 for the appropriate element_id.
 If contract_category is 7, element_id and commitment_reference cannot both be Null. allow_acct_group and allow_si_group must both be Null.
 If contract_category is not 6 or 11, bonus_point_id must be Null.
 If contract_category is 8, plan_id_credit cannot be null, and plan_id_credit can have only one unit_cr_id in UNIT_CR_PLANS.
 If contract_category is 13 or 16, rollover_order and rollover_grouping cannot be Null.
 If contract_category is 9, plan_id_discount must not be Null, DISCOUNT_DEFINITIONS.discount_level must be 2, and DISCOUNT_DEFINITIONS.discount_quantum must not be 2, 3, or 4.
 If contract_category is 11, allow_account, allow_serv_inst, allow_acct_group, allow_si_group, element_id, plan_id_credit, activation_type_id_nrc, termination_type_id_nrc, start_by, and commitment_type_id_nrc must be 0, and duration_units must not be -2 or -3.
 If contract_category is 12 or 14, DISCOUNT_DEFINITIONS.discount_type must be 6, apply_during_suspend must be 1, and bill_period cannot be Null.
 If bill_period is not Null, bill_period must be in BILL_PERIOD_REF where contract_use_code = 0 or 1.
 If contract_category is 14 or 10, allow_serv_inst and allow_si_group must not equal 1.
 If either element_id or commitment_reference exist and either allow_acct_group or allow_si_group is not 0, contract_category must be 15 or 16.
 If contract_category is 8, 13, 15, or 16, allow_acct_group must be 0.
 If contract_category is 15 or 16, element_id and plan_id_credit must exist, and PRODUCT_ELEMENTS.bill_in_arrears must not be 0.
 If commitment_reference is Null, commitment_type_id_nrc must be Null.
 commitment_type_id_nrc and the product it represents must use the same currency code for rating. Thus, their rate_currency_location must be identical in NRC_TRANS_DESCR and PRODUCT_ELEMENTS. If they are both 9, the currency_code from the corresponding NRC_TRANS_DESCR and NRC_TRANS_DESCR rows must be the same.
 commitment_type_id_nrc must exist in NRC_TRANS_DESCR.type_id_nrc or be Null.
 If activation_type_id_nrc, termination_type_id_nrc, or commitment_type_id_nrc exist, both allow_acct_group and allow_si_group must be Null.
 If element_id or commitment_reference exist and contract_category is not 15 or 16, both allow_acct_group and allow_si_group must be Null.
 Change CONTRACT_TYPES insert and update trigger so non-null commitment_type_id_nrc would be allowed when contract_category in (17, 27). Restrict contract_category 17 and 27 to subscriber level contracts. Restrict contract_category 17 and 27 when_applied =1 Restrict contract_category 17 and 27 unit_cr_distrib =2

Add overlapping detecting logic in the UNIT_CREDIT_INSTANCES insert trigger so no overlapping instances would exist for unit_cr_type = 6. The trigger for table CUSTOMER_CONTRACT_VIEW will be changed to restrict contract_category 27 to be used for rating time only, and restrict contract_category 27 to service instance level contracts.

Indexes:

This table has no indexes.

Foreign Keys

(termination_type_id_nrc) must exist in NRC_TRANS_DESCR(type_id_nrc)
 (commitment_reference) must exist in PRODUCT_ELEMENTS(element_id)
 (plan_id_credit) must exist in PLAN_ID_CREDIT_REF(plan_id_credit)
 (activation_type_id_nrc) must exist in NRC_TRANS_DESCR(type_id_nrc)
 (element_id) must exist in PRODUCT_ELEMENTS(element_id)
 (bonus_point_id) must exist in BONUS_POINT_ID_REF(bonus_point_id)
 (bill_period) must exist in BILL_PERIOD_REF(bill_period)
 (commitment_type_id_nrc) must exist in NRC_TRANS_DESCR(type_id_nrc)
 (plan_id_discount) must exist in PLAN_ID_DISCOUNT_REF(plan_id_discount)

Check Constraints:

active_date <= fixed_start_date
 fixed_start_date <= fixed_end_date
 active_date <= inactive_date

Field Name	Data Type		Comments	Values	Null
contract_type	int		Unique internal identifier of a specific type of contract.		
contract_category	smallint		Indicates the category of the contract type: 6 = standard promotion 7 = commitment 8 = free usage contract 9 = HQ discount contract 10 = hierarchy branch discount 11 = global contract (all accounts) 12 = historic discount contract 13 = rollover contract 14 = historic payback contract 15 = pay-as-you-go unit credit contract 16 = pay-as-you-go rollover UC contract 17 = midnight to midnight daily RC 21= HQ Group (account and SI) for BIP 27 = 24 hours after transaction date of first CDR 40 = Holding discount	(R: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 21, 27, 40)	
element_id	int		Associates a recurring charge with a contract. Product identifier, from PRODUCT_ELEMENTS, or Null if no recurring charge is to be associated with this contract.		Null

Field Name	Data Type		Comments	Values	Null
commitment_reference	int		If <code>contract_category = 7</code> , contains product whose recurring charge is used as the commitment fee. Otherwise Null.		Null
duration_units	smallint		Defines the units of the contract duration: 140 = days 150 = weeks 160 = months 170 = quarters 180 = years -1 = unspecified duration (no time limit) -2 = terminate on first charge reduction (obsolete) -3 = bill cycles in which contract was used	(R: -1, -2, -3, 140, 150, 160, 170, 180)	
duration	smallint		Duration of the contract in the specified <code>duration_units</code> , or -1 for contracts with infinite duration or unspecified units.		
plan_id_discount	int		Discount plan ID, from <code>PLAN_ID_DISCOUNT_REF</code> .		Null
plan_id_credit	int		Unit credit plan ID, from <code>PLAN_ID_CREDIT_REF</code> .		Null
activation_type_id_nrc	int		NRC type of activation charge, from <code>NRC_TRANS_DESCR.type_id_nrc</code> .		Null
termination_type_id_nrc	int		NRC type of early termination charge, from <code>NRC_TRANS_DESCR.type_id_nrc</code> .		Null
is_promotion	bit		Reserved for future use.	(R: = 1)	
description_code	int		Description from <code>DESCRIPTIONS</code> table.		
foreign_code	varchar (30)	10	An external system's identifier of a contract type.		Null
start_by_units	smallint		Units in which <code>start_by</code> is measured: 140 = days 150 = weeks 160 = months 170 = quarters 180 = years -1 = none	(D: -1) (R: -1, 140, 150, 160, 170, 180)	
start_by	smallint		Interval after which the contract expires if not started, measured in <code>start_by_units</code> , figured from date of provisioning.		Null
active_date	smalldt		Date this contract type becomes available for provisioning.		Null
inactive_date	smalldt		Date this contract type is no longer available for provisioning.		Null
fixed_start_date	smalldt		Date on which instances of this contract begin.		Null
fixed_end_date	smalldt		Date on which instances of this contract terminate.		Null
partial_period	bit		Reserved for future use.	(D: 0)	
commitment_type_id_nrc	int		Commitment amount/type, from <code>NRC_TRANS_DESCR.type_id_nrc</code> .		Null
discount_base_period	smallint		Period to use for discounts: 1 = use <code>bill_period</code> 2 = use 365/12 (average month length)	(D: 1) (R: 1, 2)	Null

Field Name	Data Type		Comments	Values	Null
rollover_order	tinyint		The order in which rollover credits are applied. 1 = use rolled over credits from oldest date forward 2 = use rolled over credits from newest date backward	(R: 1, 2)	Null
rollover_grouping	tinyint		Configures how rolled over credit interacts with earned credits. Apply rolled over credit: 1 = before any periodic earned credits 2 = after any periodic earned credits 3 = just before applying periodic earned credit for the same unit_cr_id value within the contract 4 = just after applying periodic earned credit for the same unit_cr_id value within the contract 5 = before the current portion of this unit_cr_id	(R: 1, 2, 3, 4, 5)	Null
bonus_point_id	smallint		Bonus point identifier, from BONUS_POINT_ID_REF.		Null
prorate_contract_start	bit		Is this contract prorated by contract start date? (1 = yes)	(D: 0)	
prorate_contract_end	bit		Is this contract prorated by contract end date? (1 = yes)	(D: 0)	
prorate_interim_bill	bit		Is this contract prorated if an interim bill is issued? (1 = yes) This also triggers proration on the next bill issued AFTER this prorated bill.	(D: 0)	
prorate_period_change	bit		Is this contract prorated if the billing period changes? (1 = yes) This also triggers proration on suppressed bills.	(D: 0)	
prorate_account_start	bit		Is this contract prorated by account start date? (1 = yes)	(D: 0)	
prorate_account_end	bit		Is this contract prorated by account end date? (1 = yes)	(D: 0)	
prorate_target_threshold	bit		Are charges prorated to determine the quantum for discounts under this contract? (1 = yes) This also triggers threshold proration on multi-tiered unit credits.	(D: 0)	
prorate_target_rebates	bit		Are rebates issued under this contract prorated? (1 = yes)	(D: 0)	
allow_account	tinyint		Indicates if the contract can be provisioned to an account.	(D: 1)	
allow_serv_inst	tinyint		Indicates if the contract can be provisioned to a service instance.	(D: 1)	
allow_acct_group	tinyint		Indicates if the contract can be provisioned to an account group.	(D: 0)	
allow_si_group	tinyint		Indicates if the contract can be provisioned to a service instance group.	(D: 0)	
bill_period	varchar	3	Bill cycle identifier, defined in BILL_PERIOD_REF. Ignored if the contract is not a historic contract.		Null
min_duration_units	smallint		Units in which min_duration is measured: 140 = days 150 = weeks 160 = months 170 = quarters 180 = years -1 = none	(D: -1) (R: IN (-1, 140, 150, 160, 170, 180))	
min_duration	smallint		Minimum duration contract must be to get some historic discounts.		Null

Field Name	Data Type		Comments	Values	Null
min_notice_units	smallint		Units in which min_notice_delay is measured: 140 = days150 = weeks160 = months170 = quarters 180 = years-1 = none	(D: -1) (R: IN (-1, 140, 150, 160, 170, 180))	
min_notice_delay	smallint		Minimum amount of notice that must be given to qualify for some historic discounts		Null
is_custom	tinyint		Indicates that the contract should be processed by the historic contract custom algorithm. Must be 0 unless system parameter CUSTOM_DISCOUNT_RATE is set.	(R: 0, 1)	Null
when_applied	tinyint		Determines when the contract is applied. 0 = bill time 1 = rate time postpaid 2 = rate time prepaid	(D: 0) (R: 0, 1, 2)	
apply_during_suspend	tinyint		Should contract apply to charges that are generated during the suspended period. 0 = do not apply 1 = apply	(R: 0, 1)	
disc_uc_time_sensitive_usg	int		Controls whether usages are time sensitive within contract uc/discount.	(Null, 0, 1)	Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null
start_dt_rounding_method	tinyint		Not NULL. Rounding method: 1 = always round to last midnight 2 = round to next midnight 3 = round to nearest midnight (round down if exactly half) 4 = round to nearest midnight (round up if exactly half)	(D: 1) (R: 1, 2, 3, 4)	
end_dt_rounding_method	tinyint		Not NULL. Rounding method: 1 = always round to last midnight 2 = round to next midnight 3 = round to nearest midnight (round down if exactly half) 4 = round to nearest midnight (round up if exactly half)	(D: 2) (R: 1, 2, 3, 4)	

CORRIDOR_PLAN_GROUPS

Configurable. Associates corridor plans with displayable corridor characteristics. See also CUSTOMER_CORRIDORS. Admin table. Copy exists on Customer database.

Triggers:

point_origin and point_target must exist in USAGE_LOCAL_COUNTS.point or be Null.

Indexes:

unique on point_origin, origin_is_xact, country_code_origin, point_target, target_is_xact, country_code_target, point_category, access_region_target, access_region_origin, corridor_plan_id
non-unique on , corridor_plan_id

Foreign Keys

(point_category) must exist in POINT_CATEGORY_REF(point_category)
(corridor_plan_id) must exist in CORRIDOR_PLAN_ID_REF(corridor_plan_id)
(country_code_target) must exist in COUNTRY_CODE_REF(country_code)
(country_code_origin) must exist in COUNTRY_CODE_REF(country_code)

Field Name	Data Type		Comments	Values	Null
corridor_plan_id	int		Corridor plan ID, from CORRIDOR_PLAN_ID_REF.		
point_origin	varchar (72)	24	Usage point or usage point prefix of origin, from USAGE_LOCAL_COUNTS.		Null
point_category	smallint		Point category, from POINT_CATEGORY_REF.	(D: 0)	
origin_is_xact	tinyint		0 indicates that point_origin is a prefix 1 indicates that point_origin is exact	(R: 0, 1)	Null
country_code_origin	smallint		Origin country, from COUNTRY_CODE_REF.		Null
point_target	varchar (72)	24	Usage point or usage point prefix of target, from USAGE_LOCAL_COUNTS.		Null
target_is_xact	tinyint		0 indicates that point_target is a prefix 1 indicates that point_target is exact	(R: 0, 1)	Null
country_code_target	smallint		Target country, from COUNTRY_CODE_REF.		Null
access_region_origin	varchar (15)	5	Origin access region, from ACCESS_REGION_REF.		Null
access_region_target	varchar (15)	5	Target access region, from ACCESS_REGION_REF.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CORRIDOR_PLAN_ID_REF

Configurable and dynamic. Defines valid corridor rate plans. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CORRIDOR_PLAN_GROUPS, CORRIDOR_PLAN_ID_VALUES, CUSTOMER_CORRIDORS, RATE_USAGE_OVERRIDES

Triggers: Only one row can have `is_default = 1`.
`discount_id` must be Null if `plan_type` is not equal to 4.
`discount_id` cannot be Null if `plan_type = 4`.
`discount_id` cannot be in `DISCOUNT_PLANS`.
`corridor_plan_id` cannot be updated.

Indexes: primary-key on `corridor_plan_id`

Field Name	Data Type	Comments	Values	Null
<code>corridor_plan_id</code>	int	Unique internal ID of the corridor plan.	(R: > 0)	
<code>is_icb_corridor</code>	bit	Is this corridor plan an Individual Case Basis plan? (1 = yes)		
<code>plan_type</code>	tinyint	Plan type: 1 = normal corridor rating plan (default) 2 = special corridor discounting plan 3 = special double rating corridor plan 4 = double-rated, booked as discount	(R: 1, 2, 3, 4, 5)	
<code>plan_level</code>	tinyint	Plan level: 1 = account-level 2 = service-instance-level	(R: 1, 2)	Null
<code>origin_restriction</code>	tinyint	Origin restriction: 1 = no restriction 2 = restricted to <code>external_ids</code> from <code>EXTERNAL_ID_EQUIP_MAP</code> 3 = restricted to usage points 4 = restricted to countries 5 = restricted to access regions	(R: 1, 2, 3, 4, 5)	

Field Name	Data Type		Comments	Values	Null
target_restriction	tinyint		Target restriction: 1 = no restriction 2 = restricted to external_ids from EXTERNAL_ID_EQUIP_MAP 3 = restricted to usage points 4 = restricted to countries 5 = restricted to access regions	(R: 1, 2, 3, 4, 5)	
discount_id	int		Unique internal ID of discount, from DISCOUNT_DEFINITIONS. Only populated if plan_type = 4.		Null
max_corridors	smallint		The maximum number of corridors of a specific type allowed in this corridor.	(R: > 0)	Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CORRIDOR_PLAN_ID_VALUES

Configurable. Describes corridor plans defined in CORRIDOR_PLAN_ID_REF. Admin table. Copy exists on Customer database.

Indexes: primary-key on corridor_plan_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(corridor_plan_id) must exist in CORRIDOR_PLAN_ID_REF(corridor_plan_id)

Field Name	Data Type		Comments	Values	Null
corridor_plan_id	int		Corridor plan ID, from CORRIDOR_PLAN_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COUNTRY_CODE_REF

Configurable. Associates country code numbers with country names. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIF, CAP, RAP, MIU

Dependents: ADDRESS, BILL_ADDRESS, CMF, CMF, CORRIDOR_PLAN_GROUPS, CORRIDOR_PLAN_GROUPS, COUNTRY_CODE_VALUES, COUNTRY_DIAL_CODES, COUNTRY_JURISDICTION, COUNTRY_JURISDICTION, CSR_INFORMATION, CUSTOMER_CORRIDORS, CUSTOMER_CORRIDORS, GSM_ROAMING_AGREEMENT, LATE_FEE_ASSIGNMENT, LOCAL_ADDRESS, MASTER_ADDRESS, PROVIDER_ADDRESS, REFUND, SERVICE_CENTERS, STATE_REF, TAX_ASSIGNMENTS

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `country_code`

Foreign Keys (default_currency_code) must exist in RATE_CURRENCY_REF(currency_code)

Field Name	Data Type		Comments	Values	Null
country_code	smallint		Unique country identifier (840 = U.S.).	(D: 840) (R: between 0 and 999)	
tax_identifer	int		Identifies special tax features for country. This value is a special internal country ID (US=1, Mexico=2, Canada=3, Luxembourg=254, additional identifiers may be supported by your deployment) plus one or more of the following additional values: If covered by Vertex Quantum, add 256. If covered by Vertex CommTax, add 512. If covered by Custom tax, add 1024. If country is in the EU, add 2048.		Null
default_currency_code	smallint		Currency code, from RATE_CURRENCY_REF.		
iso_code	varchar (6)	2	ISO country code.		Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COUNTRY_CODE_VALUES

Configurable. Describes country codes defined in COUNTRY_CODE_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Indexes: primary-key on country_code, language_code

Foreign Keys (country_code) must exist in COUNTRY_CODE_REF(country_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
country_code	smallint		Country code, from COUNTRY_CODE_REF.	(D: 840)	
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COUNTRY_DIAL_CODES

Configurable. Defines international dialing codes for countries. Enables the message-processing system to determine if a call is international, and enables different countries to use different mechanisms for international access. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, RAP, MIU

Indexes:
 non-unique on country_code, country_dial_code
 primary-key on country_dial_code, country_code

Foreign Keys (country_code) must exist in COUNTRY_CODE_REF(country_code)

Field Name	Data Type		Comments	Values	Null
country_code	smallint		Country code, from COUNTRY_CODE_REF.		
country_dial_code	char	6	Dialing code for country (for example; "44" for U.K.).		
intl_dial_code	varchar	6	This field indicates whether the intl_dial_access field is a prefix used to make an international call. If the intl_dial_code = 1 and the CDR begins with the value of intl_dial_access, then the call is international.		Null
intl_dial_access	char	6	Prefix that must be dialed within country to access international service (for example, "011" for U.S.).		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

COUNTRY_JURISDICTION

Configurable. Used to assign jurisdiction to a usage event based on the source and target countries. Admin table. Read-only copy exists on Customer database.

Used by the following modules: CAP, RAP, MIU

Indexes: primary-key on country_code_origin, country_code_target

Foreign Keys
(country_code_target) must exist in COUNTRY_CODE_REF(country_code)
(jurisdiction) must exist in JURISDICTIONS(jurisdiction)
(country_code_origin) must exist in COUNTRY_CODE_REF(country_code)

Field Name	Data Type		Comments	Values	Null
country_code_origin	smallint		Country code, from COUNTRY_CODE_REF, for origin country.		
country_code_target	smallint		Country code, from COUNTRY_CODE_REF, for target country.		
jurisdiction	int		Territorial range of usage, from JURISDICTIONS.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CSR_ACCT_SEG

Configurable. Specifies which account segments (defined in ACCT_SEG_REF) are viewable by the specified CSR. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Copy exists on Catalog database. Copy exists on Customer database.

Used by the following modules: Customer Center, API

Triggers: `acct_seg_id` exists in ACCT_SEG_REF, and cannot be zero.
For a given `csr_name`, only one row can have `is_csr_default = 1`.

Indexes: primary-key on `csr_name`, `acct_seg_id`

Field Name	Data Type		Comments	Values	Null
<code>csr_name</code>	<code>varchar (90)</code>	30	CSR username.		
<code>acct_seg_id</code>	<code>int</code>		ID of customer account segment. From ACCT_SEG_REF.		
<code>is_csr_default</code>	<code>bit</code>		Use this record as the default for a given CSR? (1 = yes)	(D: 0)	
<code>config_tag_id</code>	<code>varchar</code>	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CSR_INFORMATION

Configurable. Stores extended contact information for CSRs. Admin table. Copy exists on Customer database.

Used by the following modules: Customer Center

Triggers: user_name and supervisor_name must exist in SYBASE table, sysusers or Oracle table, ALL_USERS.
Active date ranges cannot overlap for a single user_name.

Indexes: primary-key on user_name, date_active

Foreign Keys (csr_country_code) must exist in COUNTRY_CODE_REF(country_code)

Check Constraints: date_active <= date_inactive

Field Name	Data Type		Comments	Values	Null
user_name	char	30	CSR username.		
supervisor_name	char (90)	30	CSR supervisor's username.		Null
csr_lname	varchar (168)	56	CSR last name.		
csr_fname	varchar (168)	56	CSR first name.		
csr_minit	varchar (90)	30	CSR middle initial.		Null
csr_title	varchar (120)	40	CSR job title.		Null
csr_phone	char	20	CSR telephone number.		
csr_email	varchar	60	CSR electronic mail address.		Null
csr_address1	varchar (225)	75	CSR postal address, line 1.		
csr_address2	varchar (225)	75	CSR postal address, line 2.		Null
csr_address3	varchar (225)	75	CSR postal address, line 3.		Null
csr_city	varchar (105)	35	CSR city or municipality.		
csr_state	varchar (84)	28	CSR state or province.		Null
csr_zip	varchar	16	CSR Zip or postal code.		Null
csr_country_code	smallint		CSR country code.		
csr_county	varchar (84)	28	CSR county.		Null
date_active	smalldt		Date this record becomes active.		
date_inactive	smalldt		Date this record becomes inactive.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CSR_SUPERVISORS

. Reserved for future use. Admin table. Read-only copy exists on Customer database.

Triggers: Supervisor must be able to access all account segments (in CSR_ACCT_SEG) accessible by associated users.

Indexes: primary-key on supervisor_name, user_name

Field Name	Data Type		Comments	Values	Null
supervisor_name	varchar (90)	30	Supervisor name.		
user_name	varchar	30	User name.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CURRENCY_TYPE_REF

Configurable. Describes valid types of currencies used in RATE_CURRENCY_REF (for example, hard or soft currencies). Admin table. Read-only copy exists on Customer database.

Dependents: CURRENCY_TYPE_VALUES, RATE_CURRENCY_REF

Triggers: Only one row can have is_default = 1.

Indexes: primary-key on currency_type

Field Name	Data Type		Comments	Values	Null
currency_type	char	1	Type of currency. (H = Hard currency)		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CURRENCY_TYPE_VALUES

Configurable. Describes currency types defined in CURRENCY_TYPE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on currency_type, language_code

Foreign Keys (currency_type) must exist in CURRENCY_TYPE_REF(currency_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
currency_type	char	1	Currency type, from CURRENCY_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display screen.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CUSTOMER_LIFETIME_ID_REF

Configurable. Stores the Customer lifetime Identifier. Customer table.

Indexes: primary-key on customer_lifetime_id

Field Name	Data Type		Comments	Values	Null
customer_lifetime_id	tinyint		Customer lifetime identifier.		
is_default	int		Is this the default for this account with this pay method? (1 = yes).	(D: 0)	
is_internal	int		If 1, Kenan BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

CUSTOMER_LIFETIME_ID_VALUES

Configurable. Stores the Customer lifetime values. Customer table.

Indexes: primary-key on customer_lifetime_id

Field Name	Data Type		Comments	Values	Null
customer_lifetime_id	tinyint		Customer lifetime identifier.		
active_date	datetime		Date external Id become active.		
inactive_date	datetime		Date external Id become inactive.		
language_code	int		Language code, defined in LANGUAGE_CODE_REF.		
short_display	varchar	5	Abbreviated version of the display value.		
color_code	varchar	10	Color code.		
display_value	varchar	20	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DB_MESSAGES

Static. Holds messages included in database interactions (for example, trigger warning messages). Admin table. Read-only copy exists on Customer database.

Used by the following modules: ACE, Customer Center

Indexes: primary-key on msgno, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
msgno	int		Message number; must be greater than 20,000.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
msg	varchar	255	Text of the message to display.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DENIAL_REASON_REF

Configurable. Defines valid denial reasons used by supervisors. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: DENIAL_REASON_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `denial_reason`

Field Name	Data Type		Comments	Values	Null
denial_reason	smallint		Reason for the supervisor denial.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DENIAL_REASON_VALUES

Configurable. Describes denial reasons defined in DENIAL_REASON_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on denial_reason, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(denial_reason) must exist in DENIAL_REASON_REF(denial_reason)

Field Name	Data Type		Comments	Values	Null
denial_reason	smallint		Denial reason, from DENIAL_REASON_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DEPENDENCY

Configurable. Dependency rules. All dependencies are stored in this table. Admin table.

Indexes: primary-key on dependency_id

Foreign Keys
 (dependent_entity_type_id) must exist in ENTITY_TYPE_REF(entity_type_id)
 (dependent_entity_type_group_id) must exist in ENTITY_TYPE_GROUP_REF(entity_type_group_id)
 (entity_type_group_id) must exist in ENTITY_TYPE_GROUP_REF(entity_type_group_id)
 (entity_type_id) must exist in ENTITY_TYPE_REF(entity_type_id)

Check Constraints:
 active_dt <= inactive_dt
 entity_type_id is null or entity_type_group_id is null
 dependent_entity_type_id is null or dependent_entity_type_group_id is null

Field Name	Data Type		Comments	Values	Null
dependency_id	int		Unique dependency ID.		
dependency_type	numeric	1	Dependency type: 1 = optional 2 = required		
entity_type_id	smallint		The entity type of the item the dependency rule applies to, from ENTITY_TYPE_REF.		Null
entity_pk	numeric	18	The primary key relative to entity_type_id. For example, if entity_type_id is a product element, entity_pk represents a valid element_id.		Null
dependent_entity_type_id	smallint		The entity type of the item required by the item specified by entity_type_id, from ENTITY_TYPE_REF.		Null
dependent_entity_pk	numeric	18	The primary key relative to dependent_entity_type_id. For example, if dependent_entity_type_id is a product element, dependent_entity_pk represents a valid element_id.		Null
minimum_quantity	numeric	18	Minimum number of items required.	(D: 1)	
maximum_quantity	numeric	18	Maximum number of items allowed.	(D: 1)	Null
is_grouping_dependency	bit		Indicates whether this Dependency is a grouping one. This is only valid for required Dependencies (dependency_type = 2) and implies that either the dependent_entity_type_id has the is_group flag set in ENTITY_TYPE_REF or has the grouping_id set below to link to a group of items of the same entity type.	(D: 0)	

Field Name	Data Type		Comments	Values	Null
entity_type_group_id	numeric	18	The grouping ID if this is a "Choose n of" relationship with a non-FX-grouped set of items. For example, a group of items of the same entity type, such as 3 inventory types. Only valid if <code>is_grouping_dependency</code> is 1 and the <code>dependent_entity_type_id</code> is one that has <code>is_group = 0</code> in <code>ENTITY_TYPE_REF</code> .		Null
dependent_entity_type_group_id	numeric	18	The grouping ID if this is a "Choose n of" relationship with a non-FX-grouped set of items. For example, a group of items of the same entity type, such as 3 inventory types. Only valid if <code>is_grouping_dependency</code> is 1 and the <code>dependent_entity_type_id</code> is one that has <code>is_group = 0</code> in <code>ENTITY_TYPE_REF</code> .		Null
active_dt	smalldt		Date when this rule becomes active.		
inactive_dt	smalldt		Date when this rule becomes inactive.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DEPOSIT_TYPE_REF

Configurable. Defines valid deposit types. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, JNL

Dependents: DEPOSIT, DEPOSIT_TYPE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `deposit_type`

Field Name	Data Type		Comments	Values	Null
deposit_type	smallint		Type of the deposit: 1 = general deposit		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DEPOSIT_TYPE_VALUES

Configurable. Describes deposit types defined in DEPOSIT_TYPE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on deposit_type, language_code

Foreign Keys (deposit_type) must exist in DEPOSIT_TYPE_REF(deposit_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
deposit_type	smallint		Deposit type, from DEPOSIT_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DESCRIPTIONS

Configurable. Describes products, services, charge types, and so on. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIF

Indexes: primary-key on description_code, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
description_code	int		Internal identifier of a description.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
description_group	smallint		Used to group like descriptions (not currently supported).		
description_text	varchar (240)	80	Description text for display.		
short_description_text	char (15)	5	Brief description text for the same entity.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DEVICES

Configurable, dynamic. Describes each UNIX device (in other words, actual device name) used by Kenan/BP and controls access to those devices to avoid deadlocks. (See also `IO_DEVICES`.) Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BID

Indexes:
 primary-key on `server_id`, `device_id`
 non-unique on `usage_type`
 non-unique on `task_id`

Field Name	Data Type		Comments	Values	Null
<code>server_id</code>	tinyint		Server ID, to uniquely identify <code>device_id</code> .		
<code>device_id</code>	char	32	Internal device ID for printers and the UNIX device name for other devices.		
<code>ndevice_id</code>	varchar	32	Non-rewinding device name for some devices.		Null
<code>device_name</code>	char	32	UNIX device name for printers, and a description for other devices.		
<code>device_type</code>	smallint		Type of device is 1 for tape and ignored for other devices.		
<code>usage_type</code>	char	1	Usage type code is P for printers and ignored for other devices.		
<code>device_class</code>	varchar	16	A device class description for non-printer devices.		Null
<code>oper_assist</code>	bit		Is operator assistance required? (1 = yes)		
<code>task_id</code>	varchar	8	Task that has locked this device.		Null
<code>start_time</code>	datetime		Date/time <code>task_id</code> took control of device.		
<code>end_time</code>	datetime		Date/time device was last used by a Kenan/BP task.		Null

DISCONNECT_REASON_REF

Configurable. Defines valid reason codes for disconnecting accounts, service instances, and products. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, CPM

Dependents: DISCONNECT_REASON_VALUES, PRODUCT, PRODUCT_VIEW

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `disconnect_reason`

Field Name	Data Type		Comments	Values	Null
disconnect_reason	smallint		Unique internal identifier of a disconnect reason: -88 = account termination (used by Customer Center) -99 = product disconnected by CPM		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCONNECT_REASON_VALUES

Configurable. Describes disconnect reasons defined in DISCONNECT_REASON_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on disconnect_reason, language_code

Foreign Keys (disconnect_reason) must exist in DISCONNECT_REASON_REF(disconnect_reason)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
disconnect_reason	smallint		Disconnect reason identifier, from DISCONNECT_REASON_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCOUNT_DEFINITIONS

Configurable. For each discount, defines which products or services it affects and how it reduces their cost. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP, BIF, JNL

Dependents: DISCOUNT_PLANS, DISCOUNT_RESTRICTIONS, DISCOUNT_TARGETS, HISTORIC_THRESHOLDS, RATE_DISCOUNT

Triggers:

element_id, format_code, domain_id, provider_id, corridor_plan_id, and description_code exist in the appropriate tables (see below) or are Null.
 Rows with discount_type = 5 (in other words, 4-digit usage rounding) apply only to rows where discount_domain = 3 (usage charges).
 domain_id exists in PRODUCT_ELEMENTS.element_id if discount_domain = 1.
 domain_id exists in NRC_TRANS_DESCR.type_id_nrc if discount_domain = 2.
 domain_id exists in USAGE_TYPES.type_id_usg if discount_domain = 3.
 If discount_type is 2 and discount_quantum is 2 or 3, and discount_domain must be 1, 2, or 3.
 If discount_quantum is not Null and discount_domain = 3, discount_quantum exists in USAGE_TYPES.type_id_usg.
 discount_quantum = 1 if discount_type = 5 or 8.
 When element_id is specified, product_line_id is automatically filled in. The only exception is, if element_id is set to Null, product_line_id is not automatically updated to Null.
 date_created cannot be updated
 bill_period is N-Monthly (N>1) :DISCOUNT_DEFINITIONS.late_usage_handling=1,
 DISCOUNT_DEFINITION.discount_frequency=3
 DISCOUNT_DEFINITIONS.discount_retroactive=2) OR (bill_period is monthly)
 DISCOUNT_DEFINITIONS.late_usage_handling=1)
 Bill period need to be N-Monthly (N>=1)
 N>1&&DD.late_usage_handling=1&&DD.discount_frequency=3&&DD.discount_retroactive=2
 N=1 && DD.late_usage_handling=1

Indexes:

primary-key on discount_id

Foreign Keys

(rate_period) must exist in RATE_PERIOD REF(rate_period)
 (element_id) must exist in PRODUCT_ELEMENTS(element_id)
 (product_line_id) must exist in PRODUCT_LINES(product_line_id)
 (jurisdiction) must exist in JURISDICTIONS(jurisdiction)

Check Constraints:

date_active <= date_inactive

Field Name	Data Type	Comments	Values	Null
discount_id	int	Unique internal ID of a discount.	(R: > 0)	
discount_level	smallint	Specifies the level at which the discount is valid: 1 = service instance 2 = account	(R: 1, 2)	
discount_domain	smallint	Indicates the category of charges the discount is applied against: 1 = recurring charges 3 = usage charges 2 = non-recurring charges 4 = all categories of charges	(R: 1, 2, 3, 4)	Null
discount_quantum	smallint	Item to be aggregated and compared to discount thresholds: 1 = charge amounts (money) 2 = items (usage, NRC, and RC) 3 = rated units (Only applies to CDR_DATA.rated_units) 4 = secondary units	(R: 1, 2, 3, 4)	Null
discount_type	smallint	Type of discount calculation that will be performed: 2 = incremental 3 = minimum-price discount (bulk/tiered) 4 = minimum-price discount (incremental/tapered) 5 = 4-digit usage rounding 6 = bulk 7 = guaranteed minimum discount ("customer wins" discount) 8 = incremental cross-product discount. If you enter this value, discount quantum must be 1.	(R: 2, 3, 4, 5, 6, 7, 8)	
element_id	int	Discount restricted to charges associated with this product, from PRODUCT_ELEMENTS. Leave Null for all products.		Null
product_line_id	smallint	Discount restricted to charges associated with this product line, from PRODUCT_LINES. Leave Null for all product lines.		Null
format_code	tinyint	Format option, from BILL_FMT_OPT_REF.		Null
domain_id	int	ID of particular charge or usage type to discount, or Null (all). If discount_domain = 1, PRODUCT_ELEMENTS.element_id or Null (all). If discount_domain = 2, NRC_TRANS_DESCR.type_id_nrc or Null (all). If discount_domain = 3, USAGE_TYPES.type_id_usg or Null (all). Otherwise Null (all).		Null
provider_id	int	Identifier, from SERVICE_PROVIDERS_REF, for the provider whose charges should be discounted; or Null or 0 (all).		Null
date_active	smalldt	Date and time the discount becomes available for provisioning.		
date_inactive	smalldt	System date and time when the discount is no longer available for provisioning.		Null
date_created	smalldt	System date and time when the record was created.		

Field Name	Data Type		Comments	Values	Null
description_code	int		Description from DESCRIPTIONS table.		
save_detail	bit		Should details be saved? 0 = discount is aggregated. 1 = discount is detailed: discount_id is stored in BILL_INVOICE_DETAIL and BILL_EQUIP_DETAIL. If multiple discounts, -2 is stored instead of discount_id. Set to 1 to use BILL_INVOICE_DISCOUNT details.	(D: 0)	
rate_period	char	1	Rate period identifier, from RATE_PERIOD_REF.		Null
jurisdiction	int		Jurisdiction identifier, from JURISDICTIONS.		Null
is_gross	bit		Calculate discount based on net charge, including previously applied discounts, or gross charge amount, excluding discounts? (1 = gross, 0 = net)	(D: 0)	
is_exclusive	bit		1 = Once applied to a charge, another exclusive discount cannot be applied.	(D: 0)	
corridor_plan_id	int		Corridor ID, from CORRIDOR_PLAN_ID_REF, or 0 (no plan).	(D: 0)	
icb_allow	bit		Indicates if account specific discounts are permitted. (0 = no)	(D: 0)	
discount_frequency	tinyint		Configures discount billing period at which the discount should be applied.		Null
discount_retroactive	tinyint		Determines if the discount should be applied retroactively to previously-billed charges.		Null
late_usage_handling	bit		Option for handling late usage.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCOUNT_PLANS

Configurable. Defines discount plans, which consist of one or more discounts from DISCOUNT_DEFINITIONS. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP, BIF, JNL

Triggers:
 discount_id exists in RATE_DISCOUNT.
 discount_id cannot exist in CORRIDOR_PLAN_ID_REF.
 plan_id_discount cannot be updated.
 If not otherwise set, plan_order is set to plan_id_discount and def_order to discount_id.
 All values of plan_order must be the same for a given plan_id_discount.

Indexes:
 non-unique on discount_id
 primary-key on plan_id_discount, discount_id
 unique on plan_order, def_order

Foreign Keys
 (plan_id_discount) must exist in PLAN_ID_DISCOUNT_REF(plan_id_discount)
 (discount_id) must exist in DISCOUNT_DEFINITIONS(discount_id)

Field Name	Data Type		Comments	Values	Null
plan_id_discount	int		Discount plan ID, from PLAN_ID_DISCOUNT_REF.		
discount_id	int		Discount ID, from DISCOUNT_DEFINITIONS.		
plan_order	int		Application order for discount plan. Defaults to plan_id_discount value.	(R: > 0)	Null
def_order	int		Application order for discount within the plan. Defaults to discount_id value.	(R: > 0)	Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCOUNT_RESTRICTIONS

Configurable. Associates a given discount with one or more restriction parameters, each of which defines a restriction or exclusion within a particular domain (for example, usage charges) for a particular entity receiving the discount. Admin table. Read-only copy exists on Customer database.

Used by the following modules:

BIP, BIF, JNL

Triggers:

restricted_id exists in the appropriate table (see below) or is Null.

If restriction_type is 1 or 5, restricted_domain must be 1, 2, or 3; if restriction_type is 2, 3, 4, or 7, restricted_domain must be Null.

If restriction_type is 1 and restricted_domain is 1, 2, or 3, restricted_id must be Null and cannot be updated.

restricted_id2 must be NULL unless restriction_type is 9 or 12.

is_exclusion must be constant for a single discount type.

Verify that the following DISCOUNT_DEFINITIONS fields are Null according to restriction_type: if 1, discount_domain; if 2, element_id; if 3, product_line_id; if 4, provider_id; if 5, domain_id; if 6, jurisdiction; if 7, rate_period.

If restriction_type = 5, the row cannot be created if a row exists with restriction_type = 1 and the same restricted_domain and is_exclusion values.

If restriction_type = 6, restricted_id is in JURISDICTIONS.jurisdiction. If 7, it is in RATE_PERIOD_REF.rate_period.

If restriction_type = 8, restricted_id must be Null or from CONTRACT_TYPES.contract_type with CONTRACT_TYPES.contract_category = 14. If restriction_type = 8, is_exclusion must be 0 and restricted_domain must be Null.

If restriction_type = 9, restricted_domain must be 1 and restricted_id2 must come from UNITS_TYPE_REF.units_type. If restriction_type = 10, restricted_domain must be 3 and restricted_id must come from BILL_CLASS_REF.bill_class. If restriction_type = 11, restricted_domain must be 3 and restricted_id must come from ZONE_CLASS_REF.zone_class.

If restriction_type = 12, restricted_domain must be 3, restricted_id2 must come from USAGE_TYPES.type_id_usg, and restricted_id must come from PRODUCT_ELEMENT.element_id.

Cannot update discount_id, restriction_type, or is_exclusion.

If is_exclusion = 1, **restricted_domain** cannot equal DISCOUNT_DEFINITIONS.discount_domain, unless they are both Null.

restricted_domain can only be updated when restriction_type = 1. If restriction_type = 13 restricted_domain must be usage charge, restricted_id must be from USAGE_TYPES.type_id_usg, restricted_id2 must be from JURISDICTIONS.jurisdiction, restricted_id3 must be from PRODUCT_ELEMENT.element_id, restricted_id4 must be from ZONE_CLASS_REF.zone_class, restricted_id5 must be from BILL_CLASS_REF.bill_class, restricted_id6 must be from PRODUCT_LINES.product_line_id.

Indexes:

clustered, unique on discount_id, restriction_type, restricted_domain, restricted_id, restricted_id2

Foreign Keys

(discount_id) must exist in DISCOUNT_DEFINITIONS(discount_id)

Field Name	Data Type	Comments	Values	Null
discount_id	int	Discount ID, from DISCOUNT_DEFINITIONS.		
restriction_type	tinyint	Identifies the restriction parameter type: 1 = charge domain 2 = product 3 = product line 4 = service provider 5 = charge type 6 = jurisdiction; restricted_domain cannot be 2. 7 = rate period 8 = historic payback; restricted_id must be Null or from CONTRACT_TYPES.contract_type with CONTRACT_TYPES.contract_category = 14 and restricted_domain must be Null. 9 = units/units_type; restricted_domain must be Null, restricted_id2 must be from UNITS_TYPE_REF. 10 = bill_class; restricted_domain must be Null, restricted_id must be from BILL_CLASS_REF 11 = zone_class; restricted_domain must be Null, restricted_id must be from ZONE_CLASS_REF 12 = restricted on usage by element_id; restricted_domain must be 3, restricted_id must be from PRODUCT_ELEMENT.element_id, and restricted_id2 must be from USAGE_TYPES.type_id_usg or Null. 13 = Only for usage restriction and other restrictions should not be configured if restriction_type 13 is configured. restricted_domain must be usage charge, restricted_id must be from USAGE_TYPES.type_id_usg, restricted_id2 must be from JURISDICTIONS.jurisdiction, restricted_id3 must be from PRODUCT_ELEMENT.element_id, restricted_id4 must be from ZONE_CLASS_REF.zone_class, restricted_id5 must be from BILL_CLASS_REF.bill_class, restricted_id6 must be from PRODUCT_LINES.product_line_id. 15= SLA discount restriction.	(R: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15)	
restricted_domain	tinyint	Identifies the charge domain. 1 = recurring charge 2 = non-recurring charge 3 = usage charge		Null

Field Name	Data Type		Comments	Values	Null
restricted_id	int		Restriction entity, based on restriction_type: If restriction_type = 1, leave Null. If restriction_type = 2, PRODUCT_ELEMENTS.element_id. If restriction_type = 3, PRODUCT_LINES.product_line_id. If restriction_type = 4, SERVICE_PROVIDERS_REF.provider_id. If restriction_type = 5, depends on restriction_domain: If restriction_domain = 1, PRODUCT_ELEMENTS.element_id. If restriction_domain = 2, NRC_TRANS_DESCR.type_id_nrc. If restriction_domain = 3, USAGE_TYPES.type_id_usg. If restriction_type = 6, JURISDICTIONS.jurisdiction. If restriction_type = 7, ASCII equivalent of RATE_PERIOD_REF.rate_period. The type_id_usg associated with this restriction must have USAGE_TYPES.bill_aggr_level = 255. If restriction_type = 8, CONTRACT_TYPES.contract_type with CONTRACT_TYPES.contract_category = 14 or Null If restriction_type = 9, units, from UNITS_TYPE_REF. If restriction_type = 10, BILL_CLASS_REF.bill_class. If restriction_type = 11, ZONE_CLASS_REF.zone_class. If restriction_type = 12, PRODUCT_ELEMENTS.element_id.		Null
is_exclusion	bit		If 0, discount_id is applied only to the restriction entity. If 1, it is applied to everything but the restriction entity.		
restricted_id2	int		USAGE_TYPES.type_id_usg of usage event, if restriction_type is 12. From UNITS_TYPE_REF if restriction_type is 9. Null indicates all usage.		Null
restricted_id3	int		If restriction_type = 13: PRODUCT_ELEMENT.element_id or Null.		Null
restricted_id4	int		If restriction_type = 13: ZONE_CLASS_REF.zone_class or Null.		Null
restricted_id5	int		If restriction_type = 13: BILL_CLASS_REF.bill_class, or Null.		Null
restricted_id6	int		If restriction_type = 13: PRODUCT_ELEMENT.product_line_id or Null.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCOUNT_TARGETS

Configurable. Associates cross-product discounts, defined in DISCOUNT_DEFINITIONS, with the charges to which they are applied. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BIP, BIF, JNL

Triggers:

If target_type is 1 or 5, target_domain must be 1, 2, or 3; otherwise Null.
 If target_type is 1 and target_domain is 1, 2, or 3, target_id must be Null.
 If target_type is 9, target_domain must be 1 and target_id2 must be from UNITS_TYPE_REF.units_type.
 If target_type is 10, target_domain must be 3 and target_id must be from BILL_CLASS_REF.bill_class.
 If target_type is 11, target_domain must be 3 and target_id must be from ZONE_CLASS_REF.zone_class.
 If target_type is 12, target_domain must be 3, and either (1) target_id2 is Null or matches USAGE_TYPES.type_id_usg or (2) target_id is from PRODUCT_ELEMENTS.element_id.
 target_id must exist in the appropriate table.
 is_exclusion must be constant for a given discount type.
 If target_type = 6, target_id is in JURISDICTIONS.jurisdictions. If 7, it is in RATE_PERIOD_REF.rate_period.
 target_domain can be updated only for target_type = 1.
 target_id2 must be NULL unless target_type is 9 or 12. If target_type is 13, target_domain must be usage charge, target_id must be from USAGE_TYPES.type_id_usg, target_id2 must be from JURISDICTIONS.jurisdiction_id, target_id3 must be from PRODUCT_ELEMENT.element_id, target_id4 must be from ZONE_CLASS_REF.zone_class, target_id5 must be from BILL_CLASS_REF.bill_class, target_id6 must be from PRODUCT_LINES.product_line_id.
 Cannot update discount_id, target_type, or is_exclusion.

Indexes:

clustered, unique on discount_id, target_type, target_domain, target_id, target_id2

Foreign Keys

(discount_id) must exist in DISCOUNT_DEFINITIONS(discount_id)

Field Name	Data Type	Comments	Values	Null
discount_id	int	Cross-product discount ID, from DISCOUNT_DEFINITIONS.		
target_type	tinyint	Identifies the target parameter type: 1 = charge domain 2 = product 3 = product line 4 = service provider 5 = charge type 6 = jurisdiction; restricted_domain cannot be 2. 7 = rate period 8 = historic payback; target_id must be Null or from CONTRACT_TYPES.contract_type with CONTRACT_TYPES.contract_category = 14 and target_domain must be Null. 9 = units/units_type; target_domain must be Null, target_id2 must be from UNITS_TYPE_REF. 10 = bill_class; target_domain must be Null, target_id must be from BILL_CLASS_REF 11 = zone_class; target_domain must be Null, target_id must be from ZONE_CLASS_REF 12 = restricted on usage by element_id; target_domain must be 3, target_id must be from PRODUCT_ELEMENT.element_id, and target_id2 must be from USAGE_TYPES.type_id_usg or Null. 13 = Only for usage restriction. target_domain must be usage charge, target_id must be from USAGE_TYPES.type_id_usg, target_id2 must be from JURISDICTIONS.jurisdiction_id, target_id3 must be from PRODUCT_ELEMENT.element_id, target_id4 must be from ZONE_CLASS_REF.zone_class, target_id5 must be from BILL_CLASS_REF.bill_class, target_id6 must be from PRODUCT_LINES.product_line_id.	(R: 1, 2, 3, 4, 5, 6, 7, 9, 10, 11, 12, 13)	
target_domain	smallint	Identifies the charge domain of the target, if target_type is 1 or 5. 1 = recurring charge 2 = non-recurring charge 3 = usage charge	(R: 1, 2, 3)	Null

Field Name	Data Type		Comments	Values	Null
target_id	int		Target entity, based on target_type: If target_type = 1, leave Null. If target_type = 2, PRODUCT_ELEMENTS.element_id. If target_type = 3, PRODUCT_LINES.product_line_id. If target_type = 4, SERVICE_PROVIDERS_REF.provider_id. If target_type = 5, depends on restriction_domain: If target_domain = 1, PRODUCT_ELEMENTS.element_id. If target_domain = 2, NRC_TRANS_DESCR.type_id_nrc. If target_domain = 3, USAGE_TYPES.type_id_usg. If target_type = 6, JURISDICTIONS.jurisdiction. If target_type = 7, ASCII equivalent of RATE_PERIOD_REF.rate_period. If target_type = 8, CONTRACT_TYPES.contract_type with CONTRACT_TYPES.contract_category = 14 or Null If target_type = 9, units, from UNITS_TYPE_REF. If target_type = 10, BILL_CLASS_REF.bill_class. If target_type = 11, ZONE_CLASS_REF.zone_class. If target_type = 12, PRODUCT_ELEMENTS.element_id.		Null
is_exclusion	bit		If 0, discount_id is applied only to the target entity. If 1, it is applied to everything but the target entity.		
target_id2	int		USAGE_TYPES.type_id_usg of usage event, if target_type is 12. From UNITS_TYPE_REF if target_type is 9. Null indicates all usage.		Null
target_id3	int		If target_type = 13: PRODUCT_ELEMENT.element_id or Null.		Null
target_id4	int		If target_type = 13: ZONE_CLASS_REF.zone_class or Null.		Null
target_id5	int		If target_type = 13: BILL_CLASS_REF.bill_class, or Null.		Null
target_id6	int		If target_type = 13: PRODUCT_ELEMENT.product_line_id or Null.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCOUNT_THRESH_TIER_ID_REF

Configurable. Describes multiple threshold discount plans. Admin table.

Used by the following modules: BIP

Dependents: DISCOUNT_THRESH_TIER_ID_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `discount_threshold_tier_id`

Field Name	Data Type		Comments	Values	Null
discount_threshold_tier_id	smallint		Unique identifier for a threshold tier discount.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.		
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISCOUNT_THRESH_TIER_ID_VALUES

Configurable. Describes multiple threshold discount plans defined in DISCOUNT_THRESH_TIER_ID_REF. Admin table.

Used by the following modules: BIP

Indexes: primary-key on discount_threshold_tier_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(discount_threshold_tier_id) must exist in DISCOUNT_THRESH_TIER_ID_REF(discount_threshold_tier_id)

Field Name	Data Type		Comments	Values	Null
discount_threshold_tier_id	smallint		Unique identifier for a threshold tier discount, from DISCOUNT_THRESH_TIER_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISTANCE_BANDS

Configurable. Defines distance ranges (or bands) to be used in vertical and horizontal rating. Admin table. Read-only copy exists on Customer database.

Triggers:

jurisdiction exists in JURISDICTIONS or is Null or 0.
Rows with a given set of type_id_usg, jurisdiction, and access_region_origin values must have contiguous, non-overlapping max_distance/min_distance bands.

Indexes:

clustered, unique on type_id_usg, access_region_origin, min_distance, jurisdiction, element_id

Foreign Keys

(distance_band_id) must exist in DISTANCE_BANDS_ID_REF(distance_band_id)
(element_id) must exist in PRODUCT_ELEMENTS(element_id)
(access_region_origin) must exist in ACCESS_REGION_REF(access_region)
(type_id_usg) must exist in USAGE_TYPES(type_id_usg)

Check Constraints:

min_distance <= max_distance

Field Name	Data Type		Comments	Values	Null
distance_band_id	tinyint		ID for this distance band, from DISTANCE_BANDS_ID_REF.		
type_id_usg	int		Usage type ID, from USAGE_TYPES.		
jurisdiction	int		Jurisdiction identifier, from JURISDICTIONS.		Null
access_region_origin	varchar (15)	5	Access region of the origin point, from ACCESS_REGION_REF.		Null
min_distance	int		Minimum distance for this band. When configuring multiple bands, max_distance of one band must equal min_distance of the next.		
max_distance	int		Maximum distance for this band. Null if this distance band is open-ended. When configuring multiple bands, max_distance of one band must equal min_distance of the next.		Null
element_id	int		Product element ID, from PRODUCT_ELEMENTS.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISTANCE_BANDS_ID_REF

Configurable. Defines distance band identifiers. Admin table. Read-only copy exists on Customer database.

Dependents: DISTANCE_BANDS, DISTANCE_BANDS_ID_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `distance_band_id`

Field Name	Data Type		Comments	Values	Null
distance_band_id	tinyint		Unique ID for this distance band.	(R: > 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DISTANCE_BANDS_ID_VALUES

Configurable. Describes distance bands defined in DISTANCE_BANDS_ID_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on distance_band_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(distance_band_id) must exist in DISTANCE_BANDS_ID_REF(distance_band_id)

Field Name	Data Type		Comments	Values	Null
distance_band_id	tinyint		Distance band ID, from DISTANCE_BANDS_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

DYNAMIC_USER_LIBS

Configurable. Holds details of user defined extension libraries for THS. Admin table.

Used by the following modules: MPS, THS

Indexes: primary-key on module, lib_name

Field Name	Data Type		Comments	Values	Null
module	varchar	20	Name of module that loads these libraries.		
lib_name	varchar	40	Library name to load. The path is not required.		
start_proc	varchar	60	Procedure name to run on start-up.		Null
shutdown_proc	varchar	60	Procedure name to run on shutdown.		Null
access_key	varchar	100	Security access key.		
lib_order	smallint		Library loading order. The library with the lowest lib_order loads first.		
active	tinyint		Should the library be loaded? (1 = yes.)	(R: 0, 1)	Null

EFT_CONTROL

Dynamic. Reserved for future use. Holds information about the client bank. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Read-only copy exists on Customer database.

Used by the following modules: EFT

Indexes: primary-key on `xfer_user_id`

Field Name	Data Type		Comments	Values	Null
<code>xfer_user_id</code>	char	10	Bank sort code.		
<code>xfer_sort_code</code>	varchar	6	Reserved for future use.		Null
<code>xfer_acnt_id</code>	varchar	8	Reserved for future use.		Null
<code>xfer_acnt_type</code>	smallint		Reserved for future use.		Null
<code>xfer_acnt_name</code>	varchar	18	Reserved for future use.		Null
<code>xfer_acnt_limit</code>	numeric	18	Reserved for future use.		Null
<code>xfer_acnt_limit_cycle</code>	varchar	2	Reserved for future use.		Null
<code>xfer_transact_limit</code>	numeric	18	Reserved for future use.		Null
<code>xfer_transact_delay</code>	smallint		Reserved for future use.		Null
<code>xfer_prenote_status_delay</code>	smallint		Reserved for future use.		Null
<code>expiration_date</code>	smalldt		Reserved for future use.		Null

EFT_RESPONSE_CODE_REF

Configurable. Defines valid EFT response codes. Admin table. Read-only copy exists on Customer database.

Used by the following modules: EFT, ARM

Dependents: EFT_RESPONSE_CODE_VALUES

Triggers: Only one row can have `is_default = 1`.
`reversal_trans_type` limited to values in `BMF_TRANS_DESCR.bmf_trans_type`.

Indexes: primary-key on `clearing_house_id`, `response_code`

Foreign Keys (`clearing_house_id`) must exist in `CLEARING_HOUSE_ID_REF(clearing_house_id)`

Field Name	Data Type		Comments	Values	Null
<code>response_code</code>	char (12)	4	Return code from the clearinghouse.		
<code>response_category</code>	int		Category of the transaction failure: 0 = success 5 = data error 1 = comm 6 = forced deposit 2 = hard decline 7 = call company 3 = soft decline 8 = chargeback resubmit 4 = referral	(R: 0, 1, 2, 3, 4, 5, 6, 7, 8)	
<code>clearing_house_id</code>	char	3	Clearinghouse ID, from <code>CLEARING_HOUSE_ID_REF</code> .		
<code>treatment_ind</code>	smallint		Treatment indicator: 0 = no disconnect 2 = suspend account	(R: 0, 2)	
<code>reversal_trans_type</code>	int		<code>BMF_TRANS_DESCR.bmf_trans_type</code> for payment reversal via EFT.		Null
<code>is_default</code>	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
<code>is_internal</code>	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
<code>eft_event_type</code>	smallint		Indicates to the ARM module the response code for a type of payment.		Null
<code>config_tag_id</code>	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EFT_RESPONSE_CODE_VALUES

Configurable. Describes response codes defined in EFT_RESPONSE_CODE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on clearing_house_id, response_code, language_code

Foreign Keys (clearing_house_id, response_code) must exist in EFT_RESPONSE_CODE_REF(clearing_house_id, response_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
response_code	char (12)	4	Response code, from EFT_RESPONSE_CODE_REF.		
clearing_house_id	char	3	Clearinghouse ID, from CLEARING_HOUSE_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
display_value	varchar (240)	80	Text description to display on screen.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ELEMENT_CORRIDOR_MAP

Configurable. Maps the corridor plan with element_id. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: unique on element_id, corridor_plan_id

Triggers: corridor_plan_id must be a valid corridor_plan_id in CORRIDOR_PLAN_ID_REF; Element_id must be NULL or a valid element_id in PRODUCT_ELEMENTS

Foreign Keys: (corridor_plan_id) must exist in CORRIDOR_PLAN_ID_REF (corridor_plan_id)
(element_id) must exist in PRODUCT_ELEMENTS (element_id)

Field Name	Data Type		Comments	Values	Null
element_id	smallint		Element ID in PRODUCT_ELEMENTS.		Null
corridor_plan_id	int		Corridor plan ID in CORRIDOR_PLAN_ID_REF.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_CONFIGURATION

Configurable. Defines configurations that can be assigned to service instances. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: SERVICE, SERVICE_VIEW, XFER_NRC

Triggers: equip_type_code, equip_class_code, and class_of_service_code exist in the appropriate tables (see below) or are 0.

If Serviceability is turned on, industry_type is required.

Changes in this table trigger changes in EMF_CONFIG_ADDR_CATEGORY_MAP

Indexes: primary-key on emf_config_id

Foreign Keys

(emf_book_id) must exist in JNL_EMF_BOOK_REF(emf_book_id)
 (industry_type) must exist in INDUSTRY_TYPE_REF(industry_type)
 (emf_config_id) must exist in EMF_CONFIG_ID_REF(emf_config_id)
 (rate_class) must exist in RATE_CLASS_DESCR(rate_class)

Field Name	Data Type	Comments	Values	Null
emf_config_id	smallint	Service type configuration ID, from EMF_CONFIG_ID_REF.		
emf_type	smallint	Type of service: 0 = standard service (1 service address and no circuit ID required) 1 = optional service (1 service address and circuit ID required) 2 = circuit/leased-line (2 service addresses and circuit ID required) 3 = B-end address enabled, circuit ID, description, and distance disabled	(R: 0, 1, 2, 3)	
equip_type_code	smallint	Service instance type, from EQUIP_TYPE_CODE_REF.		
equip_class_code	smallint	Service instance class, from EQUIP_CLASS_CODE_REF.		
class_of_service_code	smallint	Class of service, from CLASS_OF_SERVICE_CODE_REF.		
rate_class	smallint	Rating class, from RATE_CLASS_DESCR.		Null
active_dt	smalldt	Date configuration becomes available.		
inactive_dt	smalldt	Date configuration becomes unavailable.		Null

Field Name	Data Type		Comments	Values	Null
emf_book_id	smallint		Service instance journalizing ID, from JNL_EMF_BOOK_REF.	(D: 0)	
industry_type	smallint		Industry type.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_CONFIG_ADDR_CATEGORY_MAP

Configurable. Automatically prepopulated by EMF_CONFIGURATION. Maps address categories to emf_config_ids. Admin table.

Indexes:

non-unique on restricted_address_type
primary-key on emf_config_id, address_category_id

Foreign Keys

(emf_config_id) must exist in EMF_CONFIG_ID_REF(emf_config_id)
(restricted_address_type) must exist in ADDRESS_TYPE_REF(address_type_id)
(address_category_id) must exist in ADDRESS_CATEGORY_REF(address_category_id)

Field Name	Data Type		Comments	Values	Null
emf_config_id	smallint		Service type configuration ID, from EMF_CONFIG_ID_REF.		
address_category_id	tinyint		Address category ID, from ADDRESS_CATEGORY_REF.		
is_required	bit		Is this required? (1 = yes)	(D: 0)	
restricted_address_type	tinyint		Is this restricted to this address category type?		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_CONFIG_ID_REF

Configurable. Describes the set of configurations that are available to be assigned to a given service instance. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center

Dependents: EMF_CONFIGURATION, EMF_CONFIG_ADDR_CATEGORY_MAP, EMF_CONFIG_ID_VALUES, SERVICE_ADDRESS_ASSOC, SERVICE_ADDRESS_ASSOC

Triggers: Only one row can have `is_default = 1`.
`default_external_id_type` must correspond to an `EXTERNAL_ID_TYPE_REF.external_id_type` that has `EXTERNAL_ID_TYPE_REF.is_viewable = 1`.

Indexes: primary-key on `emf_config_id`

Field Name	Data Type		Comments	Values	Null
<code>emf_config_id</code>	smallint		Service type configuration ID.	(R: != 0)	
<code>default_external_id_type</code>	smallint		External ID type (from <code>EXTERNAL_ID_TYPE_REF</code>) used to display subscriptions of this type in Customer Center.		
<code>is_default</code>	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
<code>is_internal</code>	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
<code>is_serviceability_applicable</code>	bit		Does Serviceability use this information? (1 = yes)	(D: 0)	
<code>config_tag_id</code>	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_CONFIG_ID_VALUES

Configurable. Describes service instance configurations defined in EMF_CONFIG_ID_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Indexes: primary-key on emf_config_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(emf_config_id) must exist in EMF_CONFIG_ID_REF(emf_config_id)

Field Name	Data Type		Comments	Values	Null
emf_config_id	smallint		Service type configuration ID, from EMF_CONFIG_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
format_display	varchar (240)	80	Text description for bill format display.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_STATUS_CHG_REASON_REF

Configurable. Defines reasons for changing service instance status. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: EMF_STATUS_CHG_REASON_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `emf_status_chg_reason`

Field Name	Data Type		Comments	Values	Null
emf_status_chg_reason	smallint		Unique identifier of a reason for changing service instance status: 1 = Customer request 2 = Customer in collections 3 = Customer violated service terms 4 = Network out of service 5 = Network back in service 97 = Disconnect requested (used by BIP) -99 = Account suspended (used by BIP)		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_STATUS_CHG_REASON_VALUES

Configurable. Describes service instance status change reasons defined in EMF_STATUS_CHG_REASON_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on emf_status_chg_reason, language_code

Foreign Keys (emf_status_chg_reason) must exist in EMF_STATUS_CHG_REASON_REF(emf_status_chg_reason)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
emf_status_chg_reason	smallint		Service instance status change reason, from EMF_STATUS_CHG_REASON_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (30)	10	Abbreviated version of the display value.		
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_STATUS_REF

Configurable. Defines all service instance statuses supported in this deployment. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: EMF_STATUS_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `emf_status`

Field Name	Data Type		Comments	Values	Null
emf_status	smallint		Unique identifier of a service instance status: 10 = 30 days overdue 11 = 60 days overdue 12 = 90 days overdue 13 = 120 days overdue 14 = In collections 20 = Active 21 = Suspended 22 = Terminated 23 = Disconnect requested 24 = Account closed 25 = Account pending		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_STATUS_VALUES

Configurable. Describes service instance statuses defined in EMF_STATUS_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on emf_status, language_code

Foreign Keys
 (emf_status) must exist in EMF_STATUS_REF(emf_status)
 (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
emf_status	smallint		Service instance status identifier, from EMF_STATUS_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (30)	10	Abbreviated version of the display value.		
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_SUSPENSION_REASON_REF

Configurable. Lists suspension reasons. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: EMF_SUSPENSION_REASON_VALUES

Indexes: primary-key on emf_suspension_reason

Field Name	Data Type		Comments	Values	Null
emf_suspension_reason	smallint		Reason for suspension.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EMF_SUSPENSION_REASON_VALUES

Configurable. Describes suspension reasons. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on emf_suspension_reason, language_code

Foreign Keys (emf_suspension_reason) must exist in EMF_SUSPENSION_REASON_REF(emf_suspension_reason)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
emf_suspension_reason	smallint		Reason for suspension.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (30)	10	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ENTITY_TYPE_GROUP_MEMBER

Configurable. Assigns entity types to groups. Admin table.

Indexes: primary-key on entity_type_id, entity_pk, entity_type_group_id

Foreign Keys (entity_type_group_id) must exist in ENTITY_TYPE_GROUP_REF(entity_type_group_id)
(entity_type_id) must exist in ENTITY_TYPE_REF(entity_type_id)

Field Name	Data Type		Comments	Values	Null
entity_type_id	smallint		Entity type ID, from ENTITY_TYPE_REF.		
entity_pk	numeric	18	The primary key relative to entity_type_id. For example, if entity_type_id is a product element, entity_pk represents a valid element_id.		
entity_type_group_id	numeric	18	Entity type group ID, from ENTITY_TYPE_GROUP_REF.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ENTITY_TYPE_GROUP_REF

Configurable. Defines valid entity type groups. Admin table.

Dependents: DEPENDENCY, DEPENDENCY, ENTITY_TYPE_GROUP_MEMBER, ENTITY_TYPE_GROUP_VALUES

Indexes: primary-key on entity_type_group_id

Field Name	Data Type		Comments	Values	Null
entity_type_group_id	numeric	18	Unique entity type group ID.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ENTITY_TYPE_GROUP_VALUES

Configurable. Descriptions of entity type groups. Admin table.

Indexes: primary-key on , entity_type_group_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(entity_type_group_id) must exist in ENTITY_TYPE_GROUP_REF(entity_type_group_id)

Field Name	Data Type		Comments	Values	Null
entity_type_group_id	numeric	18	Entity type group ID, from ENTITY_TYPE_GROUP_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ENTITY_TYPE_REF

Configurable. Defines multiple object entity types used by the Qualifications, Dependencies, and Exclusions feature. This can link objects in up to 3 tables. Admin table. The field comments below contain values and explanations for this example: `equip_class_code`, which is a field of `emf_configuration`, which is tied to services through `emf_config_id_ref`.

Dependents: DEPENDENCY, DEPENDENCY, ENTITY_TYPE_GROUP_MEMBER, ENTITY_TYPE_VALUES, EXCLUSION, EXCLUSION

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `entity_type_id`

Check Constraints: (`child_table_name` is null and `child_column_name` is null) or `is_group = 1`

Field Name	Data Type		Comments	Values	Null
<code>entity_type_id</code>	smallint		Unique entity type ID.		
<code>entity_table_name</code>	varchar	50	Entity table name. This is the parent table that defines values in <code>entity_column_name</code> , such as <code>EQUIP_CLASS_CODE_REF</code> .		
<code>entity_column_name</code>	varchar	50	Entity field name. For example, <code>EMF_CONFIGURATION.equip_class_code</code> .		
<code>base_table_name</code>	varchar	50	Base table name. The base entity, such as <code>SERVICE</code> , that holds the values.		Null
<code>base_column_name</code>	varchar	50	Base field name. This is a join field from the <code>base_table_name</code> , such as <code>emf_config_id</code> from <code>SERVICE</code> .		Null
<code>child_table_name</code>	varchar	50	Child table name. For example, <code>EMF_CONFIGURATION</code> , the middle table between <code>SERVICE</code> and <code>EQUIP_CLASS_CODE_REF</code> .		Null
<code>child_column_name</code>	varchar	50	Child field name. This is a join field to the <code>base_table_name</code> , such as <code>emf_config_id</code> to <code>SERVICE</code> .		Null
<code>entity_object_name</code>	varchar	50	Entity object name. (API) This is what the code refers to the object as, such as <code>EquipClassCode</code> .		
<code>entity_attribute_name</code>	varchar	50	Entity attribute name. (API) This is what the code refers to the attribute as, such as <code>EquipClassCode</code> .		
<code>base_object_name</code>	varchar	50	Base object name. (API) This is what the code refers to the object as, such as <code>Service</code> .		Null
<code>base_attribute_name</code>	varchar	50	Base attribute name. (API) This is what the code refers to the attribute as, such as <code>Service</code> .		Null

Field Name	Data Type		Comments	Values	Null
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
is_group	bit		Is this a grouping entity type? (1 = yes) For example, product lines for products and inventory lines for inventory types are grouping entity types.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ENTITY_TYPE_VALUES

Configurable. Descriptions of entity types. Admin table.

Indexes: primary-key on entity_type_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(entity_type_id) must exist in ENTITY_TYPE_REF(entity_type_id)

Field Name	Data Type		Comments	Values	Null
entity_type_id	smallint		Entity type ID, from ENTITY_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ENUMERATION_DEF

Configurable. Allows an extended field to be tied to an enumeration. Admin table.

Dependents: PARAM_DEF

Indexes: primary-key on enumeration_id
non-unique on enumeration_name

Field Name	Data Type		Comments	Values	Null
enumeration_id	int		Unique ID to identify this enumeration.		
enumeration_name	varchar	32	Unique name to identify this enumeration.		
enumeration_key	varchar	32	Name of the field that serves as an identifier for the values for this enumeration.		
ref_table_name	varchar	30	Name of an external enumeration that is associated to this enumeration.		Null
enumeration_sort_basis	tinyint		Sort basis: 1 = Alphanumeric 2 = Numeric 3 = Use Sort Index 4 = Primary Key order	(R: 1, 2, 3, 4)	Null
enumeration_sort_order	tinyint		Sort order: 1 = Ascending 2 = Descending	(R: 1, 2)	Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EPI_ASSIGNMENT

Configurable. Stores the assignment for Early Payment Incentive. Admin table.

Indexes:

primary-key on epi_assign_id

Foreign Keys

(epi_id) must exist in EPI_REF (epi_id)

(account_category) must exist in ACCOUNT_CATEGORY_REF (account_category)

(vip_code) must exist in VIP_CODE_REF (vip_code)

(mkt_code) must exist in MKT_CODE_REF (mkt_code)

Field Name	Data Type		Comments	Values	Null
epi_assign_id	int		Early Payment Incentive assignment ID.		
epi_id	int		Unique id of an Early Payment Incentive.		
account_category	tinyint		Account category, from the ACCOUNT_CATEGORY_REF, or Null (all).		Null
vip_code	tinyint		VIP code, from the VIP_CODE_REF, or Null (all).		Null
mkt_code	smallint		Market code, from the MKT_CODE_REF, or Null (all).		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EPI_REF

Configurable. Stores the description for Early Payment Incentive. Admin table.

Indexes: primary-key on epi_id

Field Name	Data Type		Comments	Values	Null
epi_id	int		Unique id of an Early Payment Incentive.		
is_default	bit		Is this value the default value? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row.		
is_internal	bit		If 1, Kenan BP modules require this record; do not delete or modify.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EPI_VALUE

Configurable. Stores the description for Early Payment Incentive. Admin table.

Indexes: primary-key on epi_id, language_code

Foreign Keys (epi_id) must exist in EPI_REF (epi_id)
(language_code) must exist in LANGUAGE_CODE_REF (language_code)

Field Name	Data Type		Comments	Values	Null
epi_id	int		Unique id of an Early Payment Incentive.		
display_value	varchar	240	Text description to display on screen.		
short_display	varchar	15	Abbreviated version of the display value.		Null
description	varchar	240	Description text for display.		
language_code	smallint		Language code, from the LANGUAGE_CODE_REF .		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EPR_BATCH_WORK

Configurable. Specifies the names of Kenan/BP tables to be replicated to the Prepaid database. Admin table. Copy on catalog. Copy on customer.

Indexes: primary-key on table_name

Field Name	Data Type		Comments	Values	Null
table_name	varchar	30	Names of tables to be replicated to Kenan/Prepaid.		
replicate_order	smallint		Specifies in what order the tables will be replicated. Tables with smaller values are replicated first. Should be greater than zero. Admin tables must have a value smaller than 1000 and customer tables must have a value greater than or equal to 1000.		
status	tinyint		Reflects the current state of the replication process. 0 = not replicated 1 = replicated		
chg_dt	datetime		Date/time when this entry was last created/updated (date/time replicated).		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EPR_ERROR

Configurable. Stores information on messages that KPR fails to process so that the messages can be reprocessed. Admin table.

Used by the following modules: Prepaid

Indexes: primary-key on seqnum

Field Name	Data Type		Comments	Values	Null
seqnum	int		Unique row ID.		
server_id	tinyint		Server ID, from SERVER_DEFINITION.		
msg_str	varchar	1500	Text of the message.		
error_code	int		Reason for message processing failure: 1000 = invalid message type 1001 = parsing message error 1002 = socket error 1003 = no memory available 1004 = connecting BAM error 1005 = updating BAM error 1006 = initializing BAM error		
status	smallint		Current message processing status: 0 = new 1 = successfully processed		
in_use	varchar	30	Indicates if the message is locked by a process.		Null
chg_dt	datetime		Date/time this entry last created / updated (date/time replicated).		
retry_count	int		Number of times this record has been processed. When this number exceeds the system parameter MAX_RETRY, CAP will not attempt to process the row.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EQUIP_CLASS_CODE_REF

Configurable. Lists valid classes (for example, rating zones) used to specify service instances. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIP, BIF, JNL

Dependents: BILL_FORMAT_TEMPLATE, EQUIP_CLASS_CODE_VALUES, ITEM_MARKETING_DATA_REF, RATE_PERIODS, RATE_RC, RATE_USAGE, RATE_USAGE_OVERRIDES, SERVICE_BILLING, UNIT_CR_RATE_LIMIT

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `equip_class_code`

Field Name	Data Type		Comments	Values	Null
equip_class_code	smallint		Unique identifier of a service instance class, used in other tables.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EQUIP_CLASS_CODE_VALUES

Configurable. Describes service instance classes defined in EQUIP_CLASS_CODE_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Indexes: primary-key on equip_class_code, language_code

Foreign Keys (equip_class_code) must exist in EQUIP_CLASS_CODE_REF(equip_class_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
equip_class_code	smallint		Service instance class identifier, from EQUIP_CLASS_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EQUIP_TYPE_CODE_REF

Configurable. Lists all valid service instance types (for example, electronic mail account or telephone number). Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIP, BIF, JNL

Dependents: BILL_FORMAT_TEMPLATE, EQUIP_TYPE_CODE_VALUES, ITEM_MARKETING_DATA_REF, RATE_PERIODS, RATE_RC, RATE_USAGE, RATE_USAGE_OVERRIDES, SERVICE_BILLING

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `equip_type_code`

Field Name	Data Type		Comments	Values	Null
equip_type_code	smallint		Unique internal identifier of a specific type of service instance, used in other tables.		
foreign_code	varchar (30)	10	Reserved for future use.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EQUIP_TYPE_CODE_VALUES

Configurable. Describes service instance types defined in EQUIP_TYPE_CODE_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Indexes: primary-key on equip_type_code, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(equip_type_code) must exist in EQUIP_TYPE_CODE_REF(equip_type_code)

Field Name	Data Type		Comments	Values	Null
equip_type_code	smallint		Service instance type code, from EQUIP_TYPE_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ERROR_SEVERITIES

Static, for internal use only. Defines severities of messages that appear in batch process logs. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on message_language, message_severity

Field Name	Data Type		Comments	Values	Null
message_language	varchar (60)	20	Language of the severity, for example, English.		
message_severity	char (30)	10	Severity of the error.		
code	int		Coded value of severity.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXCLUSION

Configurable. Exclusion rules. All exclusions are stored in this table. Admin table.

Indexes: primary-key on exclusion_id

Foreign Keys (entity_type_id1) must exist in ENTITY_TYPE_REF(entity_type_id)
(entity_type_id2) must exist in ENTITY_TYPE_REF(entity_type_id)

Check Constraints: active_dt <= inactive_dt

Field Name	Data Type		Comments	Values	Null
exclusion_id	int		Unique exclusion ID.		
entity_type_id1	smallint		The entity type of the first item (entity_type_id from ENTITY_TYPE_REF). The lower entity_type_id should always be stored as entity_type_id1. If entity_type_id1 = entity_type_id2, then the lower primary key should be stored as entity_pk1. Rules for optional modules, such as Inventory, should not be included in this table if the optional module is not installed.		
entity_pk1	numeric	18	Primary key for entity_type_id1.		Null
entity_type_id2	smallint		The entity type of the second item (entity_type_id from ENTITY_TYPE_REF).		
entity_pk2	numeric	18	Primary key for entity_type_id2.		Null
active_dt	smalldt		Date this rule becomes active.		
inactive_dt	smalldt		Date after which this rule becomes inactive.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXRATE_CLASS_REF

Configurable. Defines valid exchange rate classes. Admin table. Read-only copy exists on Customer database.

Dependents: EXRATE_CLASS_VALUES, RATE_CURRENCY, SERVICE, SERVICE_BILLING, SERVICE_VIEW

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `exrate_class`

Field Name	Data Type		Comments	Values	Null
exrate_class	smallint		Unique exchange rate class ID.		
conversion_date	tinyint		Use which exchange rate? 1 = Use exchange rate transaction effective date. 2 = Use exchange rate for invoice statement date.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXRATE_CLASS_VALUES

Configurable. Describes exchange rate classes defined in EXRATE_CLASS_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on exrate_class, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(exrate_class) must exist in EXRATE_CLASS_REF(exrate_class)

Field Name	Data Type		Comments	Values	Null
exrate_class	smallint		Exchange rate class ID, from EXRATE_CLASS_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Short text description of the exchange rate class.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXTERNAL_ENTITY_MAPPING

Configurable. Stores the mapping relationship of entities between the external system and the Kenan system. Read-only copy exists on Customer database.

Foreign Keys

entity_mapping_type must exist in EXTERNAL_ENTITY_MAPPING_TYPE

Field Name	Data Type		Comments	Values	Null
entity_mapping_type	int		Entity Mapping type Identifier from EXTERNAL_ENTITY_MAPPING_TYPE.		
external_id1	varchar	50	Primary Entity Identifier from the external system.		
external_id2	varchar	50	Secondary Entity Identifier from the external system.		Null
external_id3	varchar	50	Third Entity Identifier from the external system.		Null
internal_id1	varchar	50	Primary Entity Identifier from the Kenan system.		
internal_id2	varchar	50	Secondary Entity Identifier from the Kenan system.		Null
annotation	varchar	255	Allows the user to keep track of the data.		
last_update_date	datetime		Date and time when the mapping was created or updated.	(D: sysdate)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXTERNAL_ENTITY_MAPPING_TYPE

Configurable. Stores the mapping type relationship of the entities between the external system and the Kenan system. Configures the init file to supply an “out of the box” preconfigured format. Read-only copy exists on Customer database.

Indexes: primary-key on entity_mapping_type

Field Name	Data Type		Comments	Values	Null
entity_mapping_type	int		Unique identifier for the mapping type.		
external_entity_type	varchar	50	Entity type in external system. For example, EXTERNAL_LOB_ID.		
internal_entity_type	varchar	50	Entity type in Kenan system. For example, FX_OPEN_ITEM_ID.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXTERNAL_ID_TYPE_REF

Configurable. Defines external ID types. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Read-only copy exists on Catalog database. Read-only copy exists on Customer database.

Used by the following modules:

Customer Center

Dependents:

CUSTOMER_ID_ACCT_MAP, CUSTOMER_ID_EQUIP_MAP, CUSTOMER_ID_EQUIP_MAP_KEY, CUSTOMER_ID_EQUIP_MAP_VIEW, CUSTOMER_ID_GROUP_MAP, EXTERNAL_ID_ACCT_MAP, EXTERNAL_ID_EQUIP_MAP, EXTERNAL_ID_EQUIP_MAP_KEY, EXTERNAL_ID_EQUIP_MAP_VIEW, EXTERNAL_ID_GROUP_MAP, EXTERNAL_ID_TYPE_VALUES, SERVICE, SERVICE_VIEW

Triggers:

Only one row can have `is_default = 1`.
`is_default` cannot be updated to 0.
`is_viewable` cannot be updated to 0.
 Rows with `is_default` set to 1 cannot have `uniqueness_type` set to 0.

Indexes:

primary-key on `external_id_type`

Check Constraints:

`is_default != 1` or `is_viewable = 1`

Field Name	Data Type		Comments	Values	Null
<code>external_id_type</code>	<code>smallint</code>		External ID type ID associated with source.	(R: != 0)	
<code>uniqueness_type</code>	<code>tinyint</code>		How are <code>external_id</code> fields of this type mapped to internal IDs? 0 = one external ID is mapped to many internal IDs (one-to-many). 1 = unique; one external ID is mapped to one internal ID (one-to-one). 2 = more than one external ID is mapped to one internal ID (many-to-one). 3 = reuse default external ID for subscriber disconnection.	(R: 0, 1, 2, 3)	
<code>is_default</code>	<code>bit</code>		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
<code>is_internal</code>	<code>bit</code>		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
<code>is_viewable</code>	<code>bit</code>		Is this value viewable through the GUI? (1 = yes) This field must be set to 1 when <code>is_default = 1</code> .	(D: 1)	
<code>config_tag_id</code>	<code>varchar</code>	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXTERNAL_ID_TYPE_VALUES

Configurable. Describes external ID types defined in EXTERNAL_ID_TYPE_REF. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Read-only copy exists on Catalog database. Read-only copy exists on Customer database.

Indexes: primary-key on external_id_type, language_code

Foreign Keys (external_id_type) must exist in EXTERNAL_ID_TYPE_REF(external_id_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
external_id_type	smallint		External ID type ID, from EXTERNAL_ID_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_ACCESS_METHOD_REF

Static. Read-only table that defines valid access methods for COM. Generally, each access method has an EXT_<method>_ACCESS table associated with it (for example, EXT_FTP_ACCESS). Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Dependents: EXT_ACCESS_METHOD_VALUES, EXT_CONTACTS

Triggers: Only one row can have is_default = 1.

Indexes: primary-key on access_method

Field Name	Data Type		Comments	Values	Null
access_method	tinyint		Access method identifier: 1 = Local directory structure 2 = FTP 4 = Reserved for future use 7 = Socket 8 = IPDR File Sharing Protocol	(R: 1, 2, 4, 7, 8)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_ACCESS_METHOD_VALUES

Configurable. Describes access methods defined in EXT_ACCESS_METHOD_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on access_method, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(access_method) must exist in EXT_ACCESS_METHOD_REF(access_method)

Field Name	Data Type		Comments	Values	Null
access_method	tinyint		Access method, from EXT_ACCESS_METHOD_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (24)	8	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_CONTACTS

Configurable. Defines the external contacts (for example, other applications) that Kenan/BP can exchange data with. Each row joins to a single row in EXT_CONTACTS_STATUS and in the external access tables (for example, EXT_FTP_ACCESS or EXT_LOCAL_DIR_ACCESS). Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Dependents: CLEARING_HOUSE_CONTACTS, EXT_FTP_ACCESS, EXT_IPDR_FS_ACCESS, EXT_IPDR_FS_STATUS, GSM_ROAMING_AGREEMENT, GSM_ROAMING_AGREEMENT, SERVICE_PROVIDERS_REF, USAGE_FILE_STATUS, USAGE_FILE_STATUS_HISTORY

Triggers: ext_contact_id cannot be updated.
description_code exists in DESCRIPTIONS.
When is_rfr_required = 1, is_send must be 0 and rfr_path and rfr_filename cannot be Null.
When a row is inserted or deleted into this table, a row is also inserted or deleted (respectively) in the EXT_CONTACTS_STATUS table. Upon insert into this table, the corresponding row in EXT_CONTACTS_STATUS has the same ext_contact_id but all other fields set to Null or 0 as appropriate.
Ensure that date bands do not overlap.

Indexes: primary-key on ext_contact_id

Foreign Keys (source_id) must exist in EXT_SOURCE_ID_REF(source_id)
(access_method) must exist in EXT_ACCESS_METHOD_REF(access_method)
(file_type) must exist in FILE_TYPE_REF(file_type)

Check Constraints: active_dt <= inactive_dt

Field Name	Data Type		Comments	Values	Null
ext_contact_id	smallint		Unique external data source identifier, used in other tables.		
is_send	tinyint		Is this an input/retrieve contact (0) or an output/send contact (1)?		
source_id	int		Source ID of the data source that COM accesses, from EXT_SOURCE_ID_REF. There can be multiple ext_contact_ids for each source_id.		
ext_client_id	varchar (96)	32	ID which identifies Kenan/BP or Kenan/BP Client to external system (for example, Client ID for credit card clearinghouse for outgoing files).		Null
description_code	int		Description of this external contact, from DESCRIPTIONS.		
access_method	tinyint		Identifier of file transfer mechanism or external system access method (for example, FTP, local...), from EXT_ACCESS_METHOD_REF.		
respond_to_id	smallint		This is the ext_contact_id that Kenan/BP will send a response file to. If Null, no response file will be sent.		Null

Field Name	Data Type		Comments	Values	Null
ext_ebcdic	bit		Reserved for future use.	(R: 0)	
prefix_match	varchar	30	File name prefix of files to be sent or retrieved.		Null
postfix_match	varchar	30	File name postfix of files to be sent or retrieved.		Null
unique_ext_name	bit		Are duplicate file names allowed from this ext_contact_id (0) or must new retrieved files have unique names (1)? (All files are renamed after retrieval to guarantee unique file names.)		
arbor_ready	varchar	80	Directory to copy files to (IN) or send files from (OUT).		
arbor_done	varchar	80	Directory to which files are moved once successfully sent to external data source (OUT) or successfully processed within Kenan/BP (IN).		
arbor_error	varchar	80	Directory to which errored files are moved.		
arbor_work	varchar	80	Directory in which file-level work is done.		Null
max_time_gap	int		Maximum number of seconds between files retrieved/sent. If no files retrieved/sent within this time period, an ALARM will be issued. Null or 0 means gap not checked. Note that this gap should not be less than the task interval time (as defined in PROCESS_SCHED) or else the max_time_gap will always be exceeded.		Null
retry_delay	int		Minimum delay (in seconds) before this ext_contact_id will be contacted after an error occurs. Delay can be longer than this based on the task schedule. Once error is cleared (after successful connection), the delay will be ignored. If retry_delay is Null or 0, COM will retry this ext_contact_id every time the corresponding task runs.		Null
retry_limit	int		Number of times to retry this ext_contact_id after a failure occurs. After this number of communication failures, COM will no longer try to access this ext_contact_id. To re-access, user must manually reset the error_code to Null and the retry_count to 0. If retry_limit is Null or 0, COM will retry this ext_contact_id indefinitely.		Null
active_dt	smalldt		Date and time this external data source becomes active.		
inactive_dt	smalldt		Date and time this external data source becomes inactive.		Null
change_who	char	30	The Kenan/BP username or process ID (for example, bip01, cap01) of the user/process that last modified the record.		
change_dt	smalldt		Date and time that this entry was last modified.		
control_file_expected	bit		Are header and trailer information included in the file (0) or in a separate control file (1)? If 1, the data file must have a .data suffix and the control file must have a .ctrl suffix. If 0, there is no restriction on the filename, except it cannot begin with a dot ".".	(D: 0)	

Field Name	Data Type		Comments	Values	Null
is_rfr_required	tinyint		Is a request for response file required by the contact? (1 = yes)	(R: >= 0 or = NULL)	Null
rfr_path	varchar	80	Path name of the request for response file.		Null
rfr_filename	varchar	40	File name of the request for response file.		Null
rfr_delay	smallint		Wait time in seconds before data can be received.		Null
file_type	smallint		File type identifier from FILE_TYPE_REF.	(D: 0)	
file_name_alter_type	tinyint		Leave Null if is_send = 0. Otherwise, set as follows: Null or 0 = Leave the filename unchanged on send. 1= Strip off numeric prefix (one or more numbers followed by ".") 2 = Strip off numeric suffix (one or more numbers preceded by ".") 3 = Strip off all leading digits before and after "."	(R: 0, 1, 2, 3)	Null
arbor_detail	varchar	80	Indicates where the output detail records/files will be written.		Null
use_raw_usage	tinyint		Is raw usage data used? 0 = raw usage is not used by this contact. 1 = raw usage data is appended when a usage event is guided. 2 = like 1, except the raw data is discarded after processing.	(D: 0) (R: 0, 1, 2)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_CONTACTS_STATUS

Dynamic. Records interactions with external contacts. Should not be modified by users. Run the `replicate.ksh` script after modifying this table if the database is in a multiserver environment. See the *System Administrator Guide* for more information about `replicate.ksh`. Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Indexes: primary-key on `ext_contact_id`

Field Name	Data Type		Comments	Values	Null
<code>ext_contact_id</code>	smallint		Joins to exactly 1 row in EXT_CONTACTS table.		
<code>error_code</code>	int		Numeric error code indicating why communication failed. Does not reflect any errors that occur during file processing. Once the contact is successfully accessed, the <code>error_code</code> is reset to Null.		Null
<code>retry_count</code>	int		Number of times COM has attempted to access this <code>ext_contact_id</code> during error condition; in other words, number of consecutive times access to this contact has errored out. Once this contact is successfully accessed, <code>retry_count</code> is reset to 0.	(D: 0)	
<code>last_access_dt</code>	datetime		Date and time this <code>ext_contact_id</code> was accessed, whether files were retrieved or sent.		Null
<code>process_name</code>	varchar	8	Name of process instance (for example, cap01, com04) that is currently processing this data source. Prevents multiple processes from accessing the same source at the same time.		Null

EXT_FTP_ACCESS

Configurable. Contains information specific to exchanging files with a remote system using FTP. Each row in this table joins to exactly one row in the EXT_CONTACTS table. Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Indexes: primary-key on ext_contact_id

Foreign Keys (ext_contact_id) must exist in EXT_CONTACTS(ext_contact_id)

Field Name	Data Type		Comments	Values	Null
ext_contact_id	smallint		External data source ID from EXT_CONTACTS.		
remote_host	char	16	Remote system (host) name.		
remote_login	char	16	Login ID on remote host.		
remote_password	char	16	Password for above login.		
remote_ready	varchar	80	Directory on remote host to retrieve files from or send files to.		
remote_done	varchar	80	IN ONLY: directory on remote host to move files to once they have been successfully retrieved.		Null
remote_work	varchar	80	OUT ONLY: directory on remote host to which to FTP files. Once FTP is complete, files will be moved to remote_ready. Directories specified by remote_ready and remote_work must be in the same file system to prevent an external process from picking up a file during the transfer process.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_IPDR_FS_ACCESS

Configurable. Contains information specific to retrieving IPDR Docs generated by an IPDR Producer (Transmitter) for a specific subscription group. Each row in this table joins to exactly one row in the EXT_CONTACTS table. Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Triggers: If ext_contact_id is in EXT_CONTACTS, EXT_CONTACTS.control_file_expected must be 0. EXT_IPDR_FS_STATUS is automatically updated.

Indexes: primary-key on ext_contact_id

Foreign Keys (ext_contact_id) must exist in EXT_CONTACTS(ext_contact_id)

Field Name	Data Type		Comments	Values	Null
ext_contact_id	smallint		External data source ID from EXT_CONTACTS.		
capability_url	varchar	255	The URL of the Capability File of an IPDR Producer.		
subscr_group_id	varchar	60	The name of a valid subscription group. Contained by the <groupId> tag in the Capability File.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_IPDR_FS_STATUS

Dynamic. Records interactions with IPDR Producers (Transmitters) in one “task cycle” for retrieving newly available IPDR Docs. A task cycle is from start to finish if a background process is started in non-recurring mode. Admin table. Read-only copy exists on Customer server.

Used by the following modules: COM

Indexes: primary-key on ext_contact_id

Foreign Keys (ext_contact_id) must exist in EXT_CONTACTS(ext_contact_id)

Field Name	Data Type		Comments	Values	Null
ext_contact_id	smallint		Joins exactly one row in EXT_CONTACTS table.		
ctrl_file_dir	varchar	255	The URL of the directory where the control files for the subscription group is located.		Null
ctrl_file_prefix	varchar	30	File name prefix of all control files for the subscription group.		Null
ctrl_file_name_policy	tinyint		Number of digits in the sequence number embedded in the name of all control files for the subscription group.	(R: >= 1 and <= 10)	Null
ctrl_file_suffix	varchar	30	File name suffix of all control files for the subscription group.		Null
ctrl_file_no	int		The sequence number of last control file processed in the task cycle.		Null
is_active	tinyint		Whether the last control file processed is “active” (1) or not (0). From BSS (IPDR Consumer) perspective, a control file ceases to be active when the BSS has reached the end marker of the control file (and hence successfully retrieved the last IPDR Doc referenced in the control file).	(R: 0, 1)	Null
ipdr_doc_no	int		The sequence number of the IPDR Docs within the last processed control file (see ctrl_file_no) that are last copied into the BSS system.		Null

EXT_LOCAL_DIR_ACCESS

Configurable. Contains information specific to exchanging files with a remote system using the local Kenan/BP file system. External processes must handle placing and/or retrieving files in the appropriate directories. Each row in this table joins to exactly one row in the EXT_CONTACTS table. Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Triggers: ext_contact_id exists in EXT_CONTACTS.
remote_ready is not the same as EXT_CONTACTS.arbor_ready for the given ext_contact_id.

Indexes: primary-key on ext_contact_id

Field Name	Data Type		Comments	Values	Null
ext_contact_id	smallint		External data source ID from EXT_CONTACTS.		
remote_ready	varchar	80	Directory on local (Kenan/BP) system from which, or to which files are to be retrieved or sent, respectively. Files are retrieved from or sent to this directory by a process external to Kenan/BP.		
remote_work	varchar	80	OUT ONLY: file is first moved to remote_work. Then file is linked to remote_ready (and unlinked from remote_work). Both remote_ready and remote_work must be in the same file system to prevent an external process from picking up file that is in the process of being copied to the remote_ready directory.		Null
remote_done	varchar	80	IN ONLY: directory on local host to move files to once they have been successfully retrieved.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_PARAM_TYPE_ASSOC

Configurable. Extended attributes are associated to entities. Admin table. Read-only copy on Customer. Read-only copy exists on Catalog database.

Triggers: Extended data parameters of datatype currency are only allowed for accounts and services.

Indexes: non-unique on param_id
primary-key on base_table, entity_type, param_id

Foreign Keys (param_id) must exist in PARAM_DEF(param_id)

Field Name	Data Type		Comments	Values	Null
base_table	varchar	30	Name of the table which the original column extended. CMF SERVICE_VIEW CUSTOMER_CONTRACT_VIEW NRC_VIEW ORD_ORDER ORD_SERVICE_ORDER PRODUCT_VIEW		
entity_type	int		The subset of the base_table to which this extension applies. Based on value of the following columns: CMF = account_category SERVICE_VIEW = emf_config_id PRODUCT_VIEW= element_id CUSTOMER_CONTRACT_VIEW = contract_type NRC_VIEW = type_id_nrc ORD_ORDER valid set to 0 ORD_SERVICE_ORDER = service_order_type		
param_id	int		parameter_id, from PARAM_DEF.		
grouping_id	varchar	32	Ties groups of related fields together.		Null
default_value	varchar	32	Default value for the original column (if it had any); NULL otherwise		Null
is_required	numeric	1	Is this required? (1 = yes)	(D: 0) (R: 0, 1)	Null

Field Name	Data Type		Comments	Values	Null
attribute_display_order	smallint		Display order: 1 = Ascending 2 = Descending	(D: 1)	Null
is_searchable	bit		1= Kenan BP module is able to search based on the extended data. 0= Kenan BP module is not able to search based on the extended data.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_SOURCE_ID_REF

Configurable. Defines external sources with which Kenan/BP exchanges files. Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Dependents: EXT_CONTACTS, EXT_SOURCE_ID_VALUES, SERVICE_PROVIDERS_REF

Triggers: Only one row can have `is_default = 1`.
`source_type` must be in EXT_SOURCE_TYPE_REF.

Indexes: primary-key on `source_id`

Foreign Keys (`source_type`) must exist in EXT_SOURCE_TYPE_REF(`source_type`)

Field Name	Data Type		Comments	Values	Null
source_id	int		External data source ID.		
source_type	smallint		Source type, from EXT_SOURCE_TYPE_REF.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_SOURCE_ID_VALUES

Configurable. Describes data sources defined in EXT_SOURCE_ID_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on source_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(source_id) must exist in EXT_SOURCE_ID_REF(source_id)

Field Name	Data Type		Comments	Values	Null
source_id	int		Data source ID, from EXT_SOURCE_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_SOURCE_TYPE_REF

Static. Describes the types of external sources supported by Kenan/BP. Read-only table; should not be modified. Admin table. Read-only copy exists on Customer database.

Used by the following modules: COM

Dependents: EXT_SOURCE_ID_REF, EXT_SOURCE_TYPE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `source_type`

Field Name	Data Type		Comments	Values	Null
source_type	smallint		Type of source: 1 = usage 3 = ABI (reserved for future use) 4 = CPM (credit card) 5 = EFT (electronic funds transfer) 6 = LBX (lockbox) 7, 8, 9 = TIP (usage preprocessor) 21 through 31 = (used by Kenan/OM) 99 = other	(R: 1, 3, 4, 5, 6, 7, 8, 9, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 99)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

EXT_SOURCE_TYPE_VALUES

Configurable. Describes source types defined in EXT_SOURCE_TYPE_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on source_type, language_code

Foreign Keys (source_type) must exist in EXT_SOURCE_TYPE_REF(source_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
source_type	smallint		Source type, from EXT_SOURCE_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

FILES_IN_PROCESS

Dynamic. Lists files being processed from FILE_STATUS. Admin table.

Indexes: clustered, unique on server_id, process_name

Foreign Keys (file_id, file_id_serv, file_type) must exist in FILE_STATUS(file_id, file_id_serv, file_type)

Field Name	Data Type		Comments	Values	Null
server_id	tinyint		Server ID, from SERVER_DEFINITION.		
process_name	char	8	Process ID (for example, cap01, com04) currently processing this file.		Null
file_id	int		Unique file ID appended to file name. Created by COM for input (is_send = 0) files and by processing modules for output (is_send = 1) files, from FILE_STATUS.		
file_id_serv	tinyint		Server the file goes to or comes from, from FILE_STATUS.		
file_type	smallint		File type identifier from FILE_TYPE_REF.	(D: 0)	

FILES_TO_PROCESS

Dynamic. Lists files to be processed from FILE_STATUS. Admin table.

Indexes: primary-key on file_id, file_id_serv, file_type

Foreign Keys (file_id, file_id_serv, file_type) must exist in FILE_STATUS(file_id, file_id_serv, file_type)

Field Name	Data Type		Comments	Values	Null
file_id	int		Unique file ID appended to file name. Created by COM for input (is_send = 0) files and by processing modules for output (is_send = 1) files, from FILE_STATUS.		
file_id_serv	tinyint		Server the file goes to or comes from, from FILE_STATUS.		
file_type	smallint		File type identifier from FILE_TYPE_REF.	(D: 0)	

FILE_STATUS

Dynamic. Used by COM to handle interactions between external files and other Kenan/BP processes (for example, payments processing). Admin table. Copy exists on Customer database.

Used by the following modules: COM

Dependents: FILES_IN_PROCESS, FILES_TO_PROCESS

Triggers: ext_contact_id exists in EXT_CONTACTS.

Indexes:
 non-unique on file_type, file_id_serv, file_status
 non-unique on ext_contact_id, file_name
 primary-key on file_id, file_id_serv, file_type
 non-unique on file_id_serv, process_name

Field Name	Data Type		Comments	Values	Null
file_id	int		Unique file ID appended to file name. Created by COM for input (is_send = 0) files and by processing modules for output (is_send = 1) files.		
file_id_serv	tinyint		Server the file goes to or comes from.		
file_group_id	int		ID to associate multiple files; for example, Kenan/BP receives a file and assigns it file_id X. The appropriate Kenan/BP module creates a result file to be sent back to the external system and assigns it file_id Y. Both files receive a common file_group_id to tie together the original and resulting files. file_group_id is determined by Kenan/BP processing module, COM ignores this field.		Null
file_name	char	80	Simple file name. Directory is in EXT_CONTACTS.arbor_ready, and file_id is appended to the disk file name (for example, if file_name is foo.950704 and file_id is 12, data file name is foo.950704.12).		
ctrl_file_name	varchar	80	Name of control file, if used. In MPS, the header and trailer records may be in a separate control file, instead of being the first and last record of data file. In this case, data file must have a .data suffix and ctrl file must have a .ctrl suffix. Like the file_name, the ctrl_file_name also consists of the file_id appended to the disk file name.		Null
ext_contact_id	smallint		External file source and destination, from EXT_CONTACTS. Must be non-Null for output files (is_send = 1).		
ext_file_id	varchar	16	Code or grouping ID used by the external file source to identify the file (other than the file name).		Null
is_send	tinyint		Is this an input/retrieve file (0) or an output/send file (1)? If 1, ext_contact_id for this record should be an output contact.		

Field Name	Data Type	Comments	Values	Null
file_type	smallint	File type identifier from FILE_TYPE_REF.	(D: 0)	
file_status	tinyint	File status: 1 (retrieved files) = New file from external contact, ready to be processed. (send files) = New file created by Kenan/BP module, ready to send. 2 = A Kenan/BP module is currently processing the file. 3 (send files only) = File successfully sent to external contact. 4 (retrieved files only) = File successfully processed by Kenan/BP module. 5 = Error during file transfer. 6 = Transfer successful, but error during processing. 7 = File has been identified for type. 9 = Transfer failed, no further attempts will be made. 10 = File processed successfully (MCAP/CAP). 11, 12, 16 = Record written out by CAP to be consolidated separately	(R: 1, 2, 3, 4, 5, 6, 7, 9, 10, 11, 12, 16)	
error_code	int	Error causing file processing failure, from SYSTEM_MESSAGES.		Null
entry_create_dt	datetime	For input files, this is roughly the date and time the file was retrieved. For output files, this is roughly the date and time the file was created.		
file_process_dt	datetime	Date and time file was last processed, even if processing errored out.		Null
file_byte_count	int	File info to help verify success/failure of file transfer. This is populated when COM or Kenan/BP processing module creates this entry.		
num_failed_attempts	int	Number of times this file has failed processing.		
current_rec_no	int	Last record processed within file; enables modules to continue processing after a failure without having to reprocess the entire file.		
total_records	int	Total number of data records in file.		Null
num_good	int	Total number of good records.		Null
num_soft_errors	int	Number of "soft," or correctable errors.		Null
num_hard_errors	int	Number of "hard," or non-correctable errors.		Null
num_discarded	int	Number of records discarded (not saved in database). Includes incomplete calls, non-billing status info, and so on.		Null
num_pass_thru	int	Number of pass-through or non-billable records that have no billing implication but are saved in the database anyway (for example, CDR_FREE records).		Null
checksum1	int	Sum of primary_units fields on incoming usage.		Null
checksum2	int	Sum of secondary_units fields on incoming usage.		Null

Field Name	Data Type		Comments	Values	Null
checksum3	int		Sum of <code>third_units</code> fields on incoming usage.		Null
corrected_records	int		Number of errored records (soft or hard) that have been corrected.		
written_off_records	int		Number of errored records (soft or hard) that have been written off (in other words, no further processing will be attempted).		
process_name	varchar	8	Process ID (for example, cap01, com04) currently processing this file.		Null
change_dt	smalldt		Date and time this entry was last modified.		
change_who	char	30	Process ID (for example, bip01, cap01) of the process that last modified the record.		

FILE_TYPE_REF

Configurable. Stores the different outcollect file types (for example, TAP2, EMR, or MPS Centex) as well as file types corresponding to FILE_STATUS.file_type. Admin table.

Used by the following modules: TOP

Dependents: EXT_CONTACTS, FILE_TYPE_VALUES

Indexes: primary-key on file_type

Field Name	Data Type		Comments	Values	Null
file_type	smallint		Unique identifier of an outcollect file type.	(D: 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

FILE_TYPE_VALUES

Configurable. Describes file types defined in FILE_TYPE_REF. Admin table.

Indexes: primary-key on file_type, language_code

Foreign Keys (file_type) must exist in FILE_TYPE_REF(file_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
file_type	smallint		File type identifier, from FILE_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

FRANCHISE_CODE_REF

Configurable. Defines franchise code numbers. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIF

Dependents: ADDRESS, FRANCHISE_CODE_VALUES, LOCAL_ADDRESS, MASTER_ADDRESS, RATE_LATE_FEE, TAX_ASSIGNMENTS

Triggers: Only one row can have `is_default = 1`.

Indexes: This table has no indexes.

Field Name	Data Type		Comments	Values	Null
franchise_code	smallint		Unique franchise identifier.	(R: != 0)	
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
tax_exception	int		Applies to Canadian provinces and territories. Does the political unit represented by this franchise code participate in the two-out-of-three rule determining the origin of toll calls for calculating GST (Federal Goods and Services Tax) and PST (Provincial Sales Tax)? (1 = yes) Null or 0 mean no.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

FRANCHISE_CODE_VALUES

Configurable. Describes franchise codes defined in FRANCHISE_CODE_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Indexes: primary-key on franchise_code, language_code

Foreign Keys (franchise_code) must exist in FRANCHISE_CODE_REF(franchise_code)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
franchise_code	smallint		Franchise code, from FRANCHISE_CODE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GENDER_REF

Configurable. Defines gender code numbers. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: CMF, CONTACTS, GENDER_VALUES

Indexes: primary-key on gender

Field Name	Data Type		Comments	Values	Null
gender	smallint		Gender of customer; requires LOCATION sysparm = 1. Valid genders are Male, Female, Company, and Unknown.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GENDER_VALUES

Configurable. Describes gender codes defined in GENDER_REF. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on gender, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(gender) must exist in GENDER_REF(gender)

Field Name	Data Type		Comments	Values	Null
gender	smallint		Gender of customer; requires LOCATION sysparm = 1. Valid genders are Male, Female, Company, and Unknown.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GENERIC_ENUMERATION_REF

Configurable. Allows for the creation of new enumerations, eliminating the need to create new table definitions. Admin table. Read-only copy exists on Customer database.

Dependents: GENERIC_ENUMERATION_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `enumeration_key`, `value`

Field Name	Data Type		Comments	Values	Null
enumeration_key	varchar	32	Unique identifier for this enumeration.		
value	varchar	32	One possible internal value for this key, as a string.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
sort_index	int		Sort order: 1 = Ascending 2 = Descending		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GENERIC_ENUMERATION_VALUES

Configurable. Describes enumerations defined in GENERIC_ENUMERATION_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on enumeration_key, value, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(enumeration_key, value) must exist in GENERIC_ENUMERATION_REF(enumeration_key, value)

Field Name	Data Type		Comments	Values	Null
enumeration_key	varchar	32	Identifier for this enumeration, from GENERIC_ENUMERATION_REF.		
value	varchar	32	One possible internal value for this key, as a string.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GEOCODE_OVERRIDES

Configurable. Stores custom geocode or taxable location for specific charge types and/or regions. Admin table. Read-only copy exists on Customer database.

Triggers:

Ensure that `country_code` and `franchise_code` exist in appropriate tables or are 0.
 If `charge_elt_type` is not equal to 3, `tax_location` cannot be 4, 5, 7, 8, 9, or 13.
 If `charge_elt_type` is 0, `charge_elt_id` must be 0.
 Ensure that `tax_location` and `charge_elt_id` are appropriate for `charge_elt_type`.
`franchise_code` and `state_code` must be 0 when `country_code` is 0.
`county_code` must be 0 when `state_code` is 0.
`city_code` must be 0 when `county_code` is 0.
`charge_elt_id` must be 0 when `charge_elt_type` is 0.
 Ensure that one and only one of `tax_location` or `override_geocode` is set.

Indexes:

primary-key on `charge_elt_type`, `charge_elt_id`, `country_code`, `franchise_code`, `state_code`, `county_code`, `city_code`

Field Name	Data Type	Comments	Values	Null
<code>charge_elt_type</code>	smallint	Type of charge for which the geocode applies: 0 = all charges 1 = recurring charge 2 = non-recurring charge 3 = usage charge	(D: 0) (R: 0, 1, 2, 3)	
<code>charge_elt_id</code>	int	From <code>PRODUCT_ELEMENTS.element_id</code> if <code>charge_elt_type</code> = 1. From <code>NRC_TRANS_DESCR.type_id_nrc</code> if <code>charge_elt_type</code> = 2. From <code>USAGE_TYPES.type_id_usg</code> if <code>charge_elt_type</code> = 3. 0 (all charge types) if <code>charge_elt_type</code> = 0.	(D: 0)	
<code>country_code</code>	smallint	Country component of original geocode (from <code>COUNTRY_CODE_REF</code>), or 0 (all countries).	(D: 0)	
<code>franchise_code</code>	smallint	Franchise component of original geocode (from <code>FRANCHISE_CODE_REF</code>), or 0 (all franchises).	(D: 0)	
<code>state_code</code>	smallint	<code>CMF.cust_state</code> component of geocode, or 0 (all).	(D: 0)	
<code>county_code</code>	smallint	<code>CMF.cust_county</code> componet of geocode, or 0 (all).	(D: 0)	
<code>city_code</code>	smallint	<code>CMF.cust_city</code> component of geocode, or 0 (all).	(D: 0)	
<code>priority</code>	tinyint	Higher values indicate higher priorities.	(D: 0)	

Field Name	Data Type		Comments	Values	Null
tax_location	tinyint		New taxable location for charge: 0 = non-taxable 1 = CMF.bill_geocode 2 = CMF.cust_geocode 3 = SERVICE_BILLING.service_geocode 4 = CDR_DATA.point_tax_code_origin (usage only) 5 = CDR_DATA.point_tax_code_target (usage only) 7 = composite (2 out of 3 rule) from 1, 4, and 5 (usage only) 8 = composite (2 out of 3 rule) from 2, 4, and 5 (usage only) 9 = composite (2 out of 3 rule) from 3, 4, and 5 (usage only) 13 = based on CMF.bill_geocode and the billing address, supported only by certain Custom tax packages (usage only) 14 = SERVICE_BILLING.b_service_geocode 15 = composite (2 out of 3 rule) from 1, 4, and 5; if no match and the franchise code has a tax_exception value 1, use franchise code of the origin geocode 16 = composite (2 out of 3 rule) from 3, 4, and 5; if not match and the franchise code has a tax_exception value 1, use franchise code of the origin geocode 17 = 2 out of 3 rule applied to CMF.bill_geocode, SERVICE_BILLING.service_geocode, and SERVICE_BILLING.b_service_geocode 18 = 2 out of 3 rule applied to CMF.cust_geocode, SERVICE_BILLING.service_geocode, and SERVICE_BILLING.b_service_geocode	(R: != 11)	Null
override_geocode	varchar	15	Hardcoded geocode to use as taxable location.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GLOBAL_ACCOUNT_BALANCES

Configurable. Defines balances owned by a given account. Admin table. Read-only copy exists on Customer database.

Triggers:

A row for this table must exist in SEQ_NUM.
 SEQ_NUM is automatically updated.
 Active and inactive date ranges cannot overlap.
 open_item_id must be from OPEN_ITEM_ID_REF.

Indexes:

primary-key on balance_tracking_id
 unique on open_item_id, regulatory_id, active_dt

Field Name	Data Type		Comments	Values	Null
balance_tracking_id	int		Tracking ID of account balance.	(D: 0)	
balance_tracking_id_serv	smallint		Not used; always 0.	(D: 0) (R: = 0)	
balance_account_no	int		Not used; always 0.	(D: 0) (R: = 0)	
open_item_id	int		Open item ID, defined in OPEN_ITEM_ID_REF.		Null
is_balance_prepaid	tinyint		Not used, always 0.	(D: 0) (R: = 0)	
authorization_flag	tinyint		Not used, always 0.	(D: 0) (R: = 0)	
regulatory_id	smallint		Identifies the jurisdiction to which this account is subject.		Null
priority	smallint		Higher value indicates higher priority. Controls how undesignated payments and credits are applied to balances.		
balance_desc	varchar (255)	85	Not used, always Null.	(R: is null)	Null
language_code	smallint		Not used, always Null.	(R: is null)	Null
create_dt	datetime		Date and time the balance was created.		
active_dt	datetime		Date and time the balance became inactive.		
inactive_dt	datetime		Date and time the balance became active.		Null
chg_dt	datetime		Date and time this record was last modified.		
chg_who	varchar	30	The username or process ID (for example, bip01, cap01) of the user/process that last modified this record.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GLOBAL_OPEN_ITEM_ID_MAP

Configurable. Defines the balances against which various charges exist on the Customer database. Admin table. Read-only copy exists on Customer database.

Triggers:

active_dt cannot be updated.

charge_element_value must have the proper value according to charge_element_type, as described below.
Active and inactive date ranges cannot overlap.

On insert, a row must exist in SEQ_NUM for this table.

SEQ_NUM is automatically updated.

Indexes:

non-unique on balance_account_no, open_item_id, charge_element_type, charge_element_value
non-unique on account_no, subscr_no, subscr_no_resets, charge_element_type, charge_element_value

primary-key on tracking_id, tracking_id_serv

Foreign Keys

(open_item_id) must exist in OPEN_ITEM_ID_REF(open_item_id)

Check Constraints:

active_dt <= inactive_dt

Field Name	Data Type		Comments	Values	Null
tracking_id	int		Tracking ID, unique with tracking_id_serv for this mapping.	(D: 0)	
tracking_id_serv	smallint		Not used, always 0.	(D: 0) (R: = 0)	
account_no	int		Not used, always 0.	(D: 0) (R: = 0)	
subscr_no	int		Not used, always 0.	(D: 0) (R: = 0)	
subscr_no_resets	smallint		Not used, always 0.	(D: 0) (R: = 0)	
charge_element_type	tinyint		Type of charge element in this mapping: 0 = All 1 = Recurring charge 2 = Non-recurring charge 3 = Usage	(R: 0, 1, 2, 3)	
charge_element_value	int		Value of the charge element: 0 if charge_element_type is 0 element_id if charge_element_type is 1 type_id_nrc if charge_element_type is 2 type_id_usg if charge_element_type is 3 0 matches all values.		
balance_account_no	int		Not used, always 0.	(D: 0) (R: = 0)	
open_item_id	int		Open item ID, from OPEN_ITEM_ID_REF.		

Field Name	Data Type		Comments	Values	Null
active_dt	datetime		Date when this mapping becomes active.		
inactive_dt	datetime		Date when this mapping becomes inactive.		Null
chg_dt	datetime		Date and time this record was last modified.		
chg_who	varchar	30	Username or process ID (for example, bip01, cap01) that last modified record.		
order_level	int		Order in which rows are processed.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GROUP_AMOUNT

Configurable. Defines the maximum currency amounts of an adjustment or refund that each user group is authorized to make. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Indexes: primary-key on group_name, currency_code, module_name

Foreign Keys (currency_code) must exist in RATE_CURRENCY_REF(currency_code)

Field Name	Data Type		Comments	Values	Null
group_name	char	30	User group name.		
currency_code	smallint		Currency code, from RATE_CURRENCY_REF.		
max_amount	numeric	18	Maximum amount of adjustment/refund members of the group can make, or -1 (no limit).		
module_name	smallint		Function this amount is associated with: 0 = adjustment 1 = refund 2 = bonus point 3 = credit nrc	(R: 0, 1, 2, 3)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GROUP_FUNCTION

Configurable. Controls the Kenan/BP functions that each user group has permission to access. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, EFT, COL

Indexes: primary-key on group_name, module_name

Field Name	Data Type		Comments	Values	Null
group_name	varchar	30	User group name.		
module_name	char	30	Function that users within the Sybase group are allowed to access through the Kenan/BP GUI. See the Kenan/BP <i>System Administrator Guide</i> for more information.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GROUP_TYPE_REF

Configurable. Defines valid group types. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIP

Dependents: EXTERNAL_ID_GROUP_MAP, GROUP_TYPE_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `group_type`

Check Constraints: `group_level` in (2,3) or `group_type_restrictions = 0`

Field Name	Data Type		Comments	Values	Null
group_type	smallint		Unique identifier of a group type.		
group_level	smallint		Level of group: 1 = Account level. 2 = Service instance level. 3 = Either account or service level.	(R: 1, 2, 3)	
allow_contracts	bit		Indicate if a contract can be provisioned to the group type. (0 = yes)	(D: 0)	
group_type_restrictions	smallint		Restrictions on the group type: 0 = No restrictions. 1 = All members must share the same owning account.	(R: 0, 1, 2)	
converted	bit		Conversion flag for use during database upgrades: 0 = not converted 1 = converted		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GROUP_TYPE_VALUES

Configurable. Describes group types defined in GROUP_TYPE_REF. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center, BIP

Indexes: primary-key on group_type, language_code

Foreign Keys
 (group_type) must exist in GROUP_TYPE_REF(group_type)
 (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
group_type	smallint		Unique identifier of a group type, from GROUP_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GRS_ACTION_DEFINITION

Configurable. Stores the source XML action definition. Admin table.

Used by the following modules: RHT, BSD

Indexes: primary-key on action_id, line_number

Foreign Keys (action_id) must exist in GRS_ACTION_REF(action_id)

Field Name	Data Type		Comments	Values	Null
action_id	int		Unique action ID		
line_number	int		Sequential xml line number, starts with 1.		
xml_line	varchar	1024	Source XML action definition.		

GRS_ACTION_OPERATIONS

Configurable. Stores the internal action definition (IAD) output by the Action Definition Transformer (ADT) after processing a source XML action definition. Admin table.

Used by the following modules: RHT, BSD

Triggers: action_id values must exist in GRS_ACTION_DEFINITION.

Indexes: non-unique on operation_id
primary-key on action_id, operation_no

Foreign Keys (operation_id) must exist in GRS_OPERATION_REF(operation_id)
(action_id) must exist in GRS_ACTION_REF(action_id)

Field Name	Data Type		Comments	Values	Null
action_id	int		Unique action ID.		
operation_no	int		Sequential operation number, starts with 1.		
operation_id	int		Operation ID.		
name	varchar	148	Name, extracted from the source XML action definition.		Null
object_id	int		Object ID, extracted from the source XML action definition.		
element_id	int		Element ID, extracted from the source XML action definition.		Null
parent_name	varchar	148	Parent name, extracted from the source XML action definition.		Null
parent_id	int		Parent ID, extracted from the source XML action definition.		Null
parent_element	int		Parent element, extracted from the source XML action definition.		Null
value	varchar	1024	Value, extracted from the source XML action definition.		Null

GRS_ACTION_REF

Configurable. Stores default and internal statuses for action IDs.Admin table.

Used by the following modules: RHT, BSD

Dependents: GRS_ACTION_DEFINITION, GRS_ACTION_OPERATIONS, GRS_ACTION_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `action_id`

Field Name	Data Type		Comments	Values	Null
action_id	int		Unique action ID.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, this record is required by system modules; do not delete or modify.	(D: 0)	

GRS_ACTION_VALUES

Configurable. Stores display values for action IDs.Admin table.

Used by the following modules: RHT, BSD

Indexes: primary-key on action_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(action_id) must exist in GRS_ACTION_REF(action_id)

Field Name	Data Type		Comments	Values	Null
action_id	int		Action ID		
language_code	smallint		Language code from LANGUAGE_CODE_REF.		
short_display	varchar (30)	10	Short display value.		Null
display_value	varchar (240)	80	Long display value.		

GRS_OPERATION_REF

Configurable. Stores default and internal statuses for operation IDs.Admin table.

Used by the following modules: RHT, BSD

Dependents: GRS_ACTION_OPERATIONS, GRS_OPERATION_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `operation_id`

Field Name	Data Type		Comments	Values	Null
operation_id	int		Unique operation ID.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, this record is required by system modules; do not delete or modify.	(D: 0)	

GRS_OPERATION_VALUES

Configurable. Stores display values for operation IDs.Admin table.

Used by the following modules: RHT, BSD

Indexes: primary-key on operation_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(operation_id) must exist in GRS_OPERATION_REF(operation_id)

Field Name	Data Type		Comments	Values	Null
operation_id	int		Operation ID from GRS_OPERATION_REF.		
language_code	smallint		Language code from LANGUAGE_CODE_REF.		
short_display	varchar (30)	10	Short display value.		Null
display_value	varchar (240)	80	Long display value.		

GSM_ROAMING_AGREEMENT

Configurable. Stores contact information and roaming agreement details for mobile carriers. Admin table. Read-only copy exists on Customer database.

Triggers:

currency_code exists in RATE_CURRENCY_REF if not Null or 0.
 currency_code cannot be Null or 0 if plmn_type = 1.
 If plmn_type = 3, ext_contact_id_out cannot be Null. If plmn_type = 2, ext_contact_id_out must be Null.
 Ensure that only one operator_id exists for each ext_contact_id_in and each ext_contact_id_out value.

Indexes:

primary-key on operator_id
 unique on plmn_name, active_dt

Foreign Keys

(rate_key_id) must exist in ROAMING_RATE_KEYS(rate_key_id)
 (ext_contact_id_in) must exist in EXT_CONTACTS(ext_contact_id)
 (ext_contact_id_out) must exist in EXT_CONTACTS(ext_contact_id)
 (operator_id) must exist in ROAMING_OPERATOR_REF(operator_id)
 (country_code) must exist in COUNTRY_CODE_REF(country_code)

Field Name	Data Type		Comments	Values	Null
operator_id	int		Roaming operator ID, from ROAMING_OPERATOR_REF.		
rate_key_id	smallint		Roaming rate key ID, from ROAMING_RATE_KEYS.		
plmn_name	char	5	Official PLMN name in file names, headers, trailers, and delivery notes.		
mobile_country_code	smallint		Mobile Country Code component of the IMSI.		Null
mobile_network_code	smallint		Mobile Network Code component of the IMSI.		Null
national_destination_code	int		National destination code of the MSISDN that belongs to the PLMN.		
version_in	char	5	TAP file version number for incoming files from this PLMN.		
version_out	char	5	TAP file version number for outgoing files to this PLMN.		
tax_treatment	char	1	Tax treatment: Y: Tax included in the charge. N: Tax not included. X: Tax not applicable (also used for clearinghouses).	(R: 'Y','N','X')	
max_days_in	smallint		Number of days after call date by which call data must be received from this PLMN. Two months (~60) is a typical value.		
max_days_out	smallint		Number of days after call date by which call data must be sent to this PLMN. Two months (~60) is typical.		
plmn_tape_volser_name	varchar	3	Used on tape labels to identify the PLMN.		Null
plmn_type	tinyint		PLMN type: 1: Home operator.2: Other PLMN. 3: Clearinghouse.	(R: 1, 2, 3)	

Field Name	Data Type		Comments	Values	Null
plmn_address1	varchar	75	Contact information for PLMN.		Null
plmn_address2	varchar	75	Contact address for PLMN.		Null
plmn_address3	varchar	75	Contact address for PLMN.		Null
plmn_city	varchar	35	Contact city for PLMN.		Null
plmn_state	varchar	28	Contact state for PLMN.		Null
plmn_zip	varchar	16	Contact zip code for PLMN.		Null
plmn_contact_name	varchar	60	Contact name for PLMN.		Null
plmn_contact_phone	varchar	20	Contact phone number for PLMN.		Null
plmn_contact_faxno	varchar	20	Contact fax number for PLMN.		Null
plmn_description	varchar	80	Description of PLMN.		Null
country_code	smallint		PLMN country code, from COUNTRY_CODE_REF.		
currency_code	smallint		PLMN currency code, from RATE_CURRENCY_REF. Required if plmn_type = 1.		Null
ext_contact_id_in	smallint		External source ID for foreign roaming usage, from EXT_CONTACTS.		Null
ext_contact_id_out	smallint		External source ID for local roaming usage, from EXT_CONTACTS.		Null
active_dt	smalldt		Date when this roaming agreement becomes active.		
inactive_dt	smalldt		Date when this agreement becomes inactive.		Null
composite_file	tinyint		Flag. If set to yes (1), indicates that TOP is exchanging composite TAP2 files with GSM roaming clearinghouses. TOP assembles individual files that are destined for multiple VPLMNs into a single composite file, and appends a superheader and supertrailer record. If set to no (0), indicates that TOP is exchanging a single TAP file with GSM roaming partner.	(D: 1)	
notification_interval	tinyint		Maximum number of days this contact can remain uncontacted.		Null
newline_terminate_records	tinyint		Indicates whether TOP will end lines in the output file with newline characters. 1 = TOP will add a newline character to the end of each output record. 0 = TOP will not add a newline character to the end of each output record.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GUI_INDICATOR_REF

Configurable. Maps tables and fields in the databases to text elements and value ranges to be included in the user interface. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center

Dependents: GUI_INDICATOR_VALUES

Triggers: Only one row can have `is_default = 1` for a given `table_name/field_name` combination.

Indexes: primary-key on `table_name, field_name, integer_value`

Field Name	Data Type		Comments	Values	Null
field_name	char	30	Database attribute name to be converted to a text value for display by the GUI.		
table_name	char	30	Database table name.		
integer_value	smallint		Possible values of the <code>field_name</code> .		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
policy_period	tinyint		The calendar period for the policy: 1= daily 2= weekly 3= monthly 4= quarterly 5= yearly 6= bill cycle		Null

Field Name	Data Type		Comments	Values	Null
cycle_day	smallint		Day of the week for the cycle: 1= Sunday 2= Monday 3= Tuesday 4= Wednesday 5= Thursday 6= Friday 7= Saturday		Null
policy_type	tinyint		The level of the policy: 0= Primary 1= Supplementary	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GUI_INDICATOR_VALUES

Configurable. Describes entities defined in GUI_INDICATOR_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on table_name, field_name, integer_value, language_code

Foreign Keys (table_name, field_name, integer_value) must exist in GUI_INDICATOR_REF(table_name, field_name, integer_value)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
table_name	char	30	Database attribute name, from GUI_INDICATOR_REF.		
field_name	char	30	Database table name, from GUI_INDICATOR_REF.		
integer_value	smallint		Value for field_name, from GUI_INDICATOR_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
policy_period	tinyint		The calendar period for the policy: 1= daily 2= weekly 3= monthly 4= quarterly 5= yearly 6= bill cycle		Null
cycle_day	smallint		Day of the week for the cycle: 1= Sunday 2= Monday 3= Tuesday 4= Wednesday 5= Thursday 6= Friday 7= Saturday		Null
policy_type	tinyint		The level of the policy: 0= Primary 1= Supplementary	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GUI_MESSAGES

Static. Holds messages that are included in the Windows NT user interface. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center (NT)

Indexes: primary-key on msg_no, msg_type, language_code, msg_name

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
msg_no	int		Message number, must be greater than 20,000.		
msg_type	tinyint		Message type.	(R: 1, 2, 3)	
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
msg_name	varchar	60	A brief description or title for the message.		
msg_text	varchar	255	Text of the message to display.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

GUI_VERSION

Static. This table stores the version check information of FXLauncher and Subsystems. Admin table. Read-only copy exists on Customer database.

Field Name	Data Type		Comments	Values	Null
identifier	tinyint		Unique Identifier. Cannot be updated.		
subsystem	varchar	100	Display Name of FXLauncher or any Subsystem.		
version	varchar	100	GUI version present in About Dialog Box.		
is_current	bit		For a subsystem only one line can have this field set to 1.		Null
filename	varchar	100	Executable file name.		Null
location	varchar	500	Location where the executable file is found.		Null

INDUSTRY_TYPE_REF

Configurable. Defines valid industry types. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center

Dependents: EMF_CONFIGURATION, INDUSTRY_TYPE_VALUES, ITEM_CATG_INDUSTRY_ASSOC

Triggers: Only one row can have `is_default = 1`.
`use_address_server` cannot be set to 0 if any rows in `ADR_ADDRESS_ATTR` depend on it.

Indexes: primary-key on `industry_type`

Field Name	Data Type		Comments	Values	Null
industry_type	smallint		Unique identifier of an industry type.	(R: != 0)	
use_address_server	bit		Used by Kenan/OM.		
is_e911_required	bit		Should the e911 information screens be accessed? (1 = yes)		
is_lidb_required	bit		Should the input screens for the Line Information Database be accessed? (1 = yes)		
is_pic_required	bit		Should the input screens associated with Primary Interexchange Carrier be accessed? (1 = yes)		
is_dadl_used	bit		Should the input screens associated with Directory Assistance Directory Listing be accessed? (1 = yes)		
is_calling_card_used	bit		Should the input screens associated with a calling card be accessed? (1 = yes)		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

INDUSTRY_TYPE_VALUES

Configurable. Contains language-dependent description information for industry types. Admin table. Read-only copy exists on Customer database. Read-only copy exists on Catalog database.

Used by the following modules: Customer Center

Indexes: primary-key on industry_type, language_code

Foreign Keys (industry_type) must exist in INDUSTRY_TYPE_REF(industry_type)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
industry_type	smallint		Industry type, from INDUSTRY_TYPE_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (15)	5	Short text description.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

INSERT_FOREIGN_KEY_REF

Configurable. Defines valid client-specific key field values for BILL_INSERT_GROUPS table. Admin table. Read-only copy exists on Customer database.

Dependents: BILL_INSERT_GROUPS, INSERT_FOREIGN_KEY_VALUES

Triggers: Only one row can have is_default = 1.

Indexes: primary-key on insert_foreign_key

Field Name	Data Type		Comments	Values	Null
insert_foreign_key	int		Unique client-specific key field value.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

INSERT_FOREIGN_KEY_VALUES

Configurable. Describes key fields defined in INSERT_FOREIGN_KEY_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on insert_foreign_key, language_code

Foreign Keys (insert_foreign_key) must exist in INSERT_FOREIGN_KEY_REF(insert_foreign_key)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
insert_foreign_key	int		Key field value, from INSERT_FOREIGN_KEY_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.	(D: 1)	
short_display	varchar (15)	5	Short text description of the key field value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

INSERT_GRP_ID_REF

Configurable. Defines customer groups used to control who receives specific bill inserts. The groups listed in this table are included in a selection list of valid insert groups within the user interface. Admin table. Read-only copy exists on Customer database.

Used by the following modules: Customer Center, BIF

Dependents: BILL_INSERT_GROUPS, CMF_INSERTS, INSERT_GRP_ID_VALUES

Triggers: Only one row can have `is_default = 1`.

Indexes: primary-key on `insert_grp_id`

Field Name	Data Type		Comments	Values	Null
insert_grp_id	smallint		Unique internal ID of a specific insert group.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
max_inserts	smallint		The maximum number of inserts allowed to be included with a single invoice. Set to Null if all inserts in the group are included in every bill for accounts that are assigned to that group.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

INSERT_GRP_ID_VALUES

Configurable. Describes insert groups defined in INSERT_GRP_ID_REF. Admin table. Read-only copy exists on Customer database.

Indexes: primary-key on insert_grp_id, language_code

Foreign Keys (language_code) must exist in LANGUAGE_CODE_REF(language_code)
(insert_grp_id) must exist in INSERT_GRP_ID_REF(insert_grp_id)

Field Name	Data Type		Comments	Values	Null
insert_grp_id	smallint		Insert group ID, from INSERT_GRP_ID_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

IO_DEVICES

Configurable. Associates internal usage type identifiers (for example, print, tape output, and so on) with actual UNIX devices, defined in DEVICES. Admin table. Read-only copy exists on Customer database.

Used by the following modules: BID

Triggers: If usage_type = P, device_id must be in DEVICES.

Indexes: primary-key on usage_type, server_id

Field Name	Data Type		Comments	Values	Null
server_id	tinyint		Server ID, to uniquely identify row.		
usage_type	char	1	Usage type code: P = print F = FTP		
usage_desc	char (96)	32	If usage_type = f, stores remote machine name. If usage_type = P, stores device description.		
device_id	char	32	If usage_type = f, stores remote username. If usage_type = P, stores internal ID from DEVICES.		
device_class	varchar	16	If usage_type = f, stores remote password. If usage_type = P, not used.		Null
device_options	varchar	80	If usage_type = f, stores destination directory name. If usage_type = P, stores printer command-line options.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_CATEGORY_REF

Configurable. Defines valid item categories. Admin table.

Dependents: ITEM_CATEGORY_REF, ITEM_CATEGORY_VALUES, ITEM_CATG_INDUSTRY_ASSOC, ITEM_CATG_MKTG_ASSOC

Indexes: non-unique on parent_category_id
primary-key on item_category_id

Foreign Keys (parent_category_id) must exist in ITEM_CATEGORY_REF(item_category_id)

Field Name	Data Type		Comments	Values	Null
item_category_id	smallint		Unique item category ID.		
is_default	bit		Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit		If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
parent_category_id	smallint		item_category_id of parent node. Only one row can have a null parent_category_id.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_CATEGORY_VALUES

Configurable. Text descriptions and images of item categories. Admin table.

Indexes: primary-key on item_category_id, language_code

Foreign Keys (item_category_id) must exist in ITEM_CATEGORY_REF(item_category_id)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
item_category_id	smallint		Item category ID, from ITEM_CATEGORY_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
item_thumbnail	varchar (768)	256	URL for thumbnail image of item. Used when item is displayed with other items.		Null
item_primary_image	varchar (768)	256	URL for image of item. Used when item is displayed alone.		Null
item_secondary_image	varchar (768)	256	URL for alternate image of item. Used when item is displayed alone.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_CATG_INDUSTRY_ASSOC

Configurable. Links item categories and industry types. Admin table.

Indexes: primary-key on item_category_id, industry_type

Foreign Keys (item_category_id) must exist in ITEM_CATEGORY_REF(item_category_id)
(industry_type) must exist in INDUSTRY_TYPE_REF(industry_type)

Field Name	Data Type		Comments	Values	Null
item_category_id	smallint		Item category ID, from ITEM_CATEGORY_REF.		
industry_type	smallint		Industry type, from INDUSTRY_TYPE_REF.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_CATG_MKTG_ASSOC

Configurable. Links item categories and item marketing data. Admin table.

Indexes: primary-key on item_category_id, item_marketing_data_id

Foreign Keys (item_category_id) must exist in ITEM_CATEGORY_REF(item_category_id)
(item_marketing_data_id) must exist in ITEM_MARKETING_DATA_REF(item_marketing_data_id)

Field Name	Data Type		Comments	Values	Null
item_category_id	smallint		Item category ID, from ITEM_CATEGORY_REF.		
item_marketing_data_id	smallint		Item marketing data ID, from ITEM_MARKETING_DATA_REF.		
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_MARKETING_DATA_LINKS

Configurable. Links to more marketing information on items. Admin table.

Indexes: non-unique on item_marketing_data_id, language_code
primary-key on item_marketing_data_links_id

Foreign Keys (item_marketing_data_id, language_code) must exist in ITEM_MARKETING_DATA_VALUES(item_marketing_data_id, language_code)

Field Name	Data Type		Comments	Values	Null
item_marketing_data_links_id	smallint		Unique item marketing data link ID. Automatically generated for new rows.		
item_marketing_data_id	smallint		Item marketing data ID, from ITEM_MARKETING_DATA_VALUES .		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_content_desc	varchar (15)	5	Abbreviated version of the display value.		Null
long_content_desc	varchar (240)	80	Text description to display on screen.		
link_type	tinyint		Type of content referenced by item_link: 1 = URL 2 = small image 3 = large image 4 = thumbnail	(R: 1, 2, 3, 4)	
item_link	varchar (768)	256	Link to more information on the item.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_MARKETING_DATA_REF

Configurable. Admin table. Defines valid item marketing data sets.

Dependents: ITEM_CATG_MKTG_ASSOC, ITEM_MARKETING_DATA_VALUES

Indexes:

- primary-key on item_marketing_data_id
- non-unique on default_jurisdiction
- non-unique on default_equip_type_code
- non-unique on default_equip_class_code
- non-unique on item_type, item_type_id
- non-unique on default_rate_class
- non-unique on default_units_type
- non-unique on default_class_of_service_code

Foreign Keys

- (default_equip_type_code) must exist in EQUIP_TYPE_CODE_REF(equip_type_code)
- (default_class_of_service_code) must exist in CLASS_OF_SERVICE_CODE_REF(class_of_service_code)
- (default_equip_class_code) must exist in EQUIP_CLASS_CODE_REF(equip_class_code)
- (default_jurisdiction) must exist in JURISDICTIONS(jurisdiction)
- (default_rate_class) must exist in RATE_CLASS_DESCR(rate_class)
- (shipping_weight_units) must exist in UNITS_TYPE_REF(units_type)
- (default_units_type) must exist in UNITS_TYPE_REF(units_type)
- (measure_units) must exist in UNITS_TYPE_REF(units_type)

Field Name	Data Type	Comments	Values	Null
item_marketing_data_id	smallint	Unique item marketing data ID.		
is_default	bit	Is this value default? (1 = yes) Only one row can be default. When a module needs an unspecified row from this table it uses the default row. See the <i>Module Configuration Guide</i> and the <i>Technical Reference</i> for more information.	(D: 0)	
is_internal	bit	If 1, Kenan/BP modules require this record; do not delete or modify.	(D: 0)	
item_type	smallint	Orderable item type. 10 = PRODUCT 20 = NRC 30 = CONTRACT 40 = PACKAGE COMPONENT 50 = PACKAGE 70 = INVENTORY	(R: 10, 20, 30, 40, 50, 70)	
item_type_id	int	Order item type ID.		

Field Name	Data Type		Comments	Values	Null
default_rate_class	smallint		Default rate class, from RATE_CLASS_DESCR. Only used if not already set for the item elsewhere.		Null
default_equip_type_code	smallint		Default equipment type code, from EQUIP_TYPE_CODE_REF. Only used if not already set for the item elsewhere.		Null
default_equip_class_code	smallint		Default equipment class code, from EQUIP_CLASS_CODE_REF. Only used if not already set for the item elsewhere.		Null
default_class_of_service_code	smallint		Default class of service code, from CLASS_OF_SERVICE_CODE_REF. Only used if not already set for the item elsewhere.		Null
default_jurisdiction	int		Default jurisdiction, from JURISDICTIONS. Only used if not already set for the item elsewhere.		Null
default_units_type	smallint		Default units type, from UNITS_TYPE_REF. Only used if not already set for the item elsewhere.		Null
immediate_payment	bit		If 1, the item must be paid for at order time.		
shipping_item	bit		If 1, the item must be shipped to the customer.		
shipping_weight	int		The weight of the item.		Null
shipping_weight_units	smallint		The units for the above weight, from UNITS_TYPE_REF.		Null
shipping_height	int		The height of the item.		Null
shipping_width	int		The width of the item.		Null
shipping_depth	int		The depth of the item.		Null
measure_units	smallint		The units for the above lengths, from UNITS_TYPE_REF.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

ITEM_MARKETING_DATA_VALUES

Configurable. Descriptions for item marketing IDs. Admin table.

Dependents: ITEM_MARKETING_DATA_LINKS

Indexes: primary-key on item_marketing_data_id, language_code

Foreign Keys (item_marketing_data_id) must exist in ITEM_MARKETING_DATA_REF(item_marketing_data_id)
(language_code) must exist in LANGUAGE_CODE_REF(language_code)

Field Name	Data Type		Comments	Values	Null
item_marketing_data_id	smallint		Item marketing data ID, from ITEM_MARKETING_DATA_REF.		
language_code	smallint		Language code, from LANGUAGE_CODE_REF.		
short_display	varchar (15)	5	Abbreviated version of the display value.		Null
display_value	varchar (240)	80	Text description to display on screen.		
price_description	varchar (240)	80	Text description of item price.		Null
config_tag_id	varchar	32	This column is client specific and not used by Kenan processes.	(D: Kenan FX 3.0)	Null

Master Index

[A1] = in Admin Vol 1; [A2] = in Admin Vol 2;
[CC] = in Cat/Cust

ABI_INVOICE:	112 [CC]	ATM_FIELD_DEF:	50 [A1]
ABI_RECORD_MAP:	114 [CC]	ATM_POPLIST_REF:	51 [A1]
ABI_SOURCE_RECORD_TYPES:	10 [A1]	ATM_POPLIST_VALUES:	52 [A1]
ABI_SOURCE_REF:	11 [A1]	BALANCE_XFER_DIFF_REF:	53 [A1]
ABI_SOURCE_VALUES:	12 [A1]	BALANCE_XFER_DIFF_VALUES:	54 [A1]
ABI_TEXT:	115 [CC]	BAM_ERROR_CODE_REF:	55 [A1]
ACCESS_REGION_REF:	13 [A1]	BAM_ERROR_CODE_VALUES:	56 [A1]
ACCESS_REGION_VALUES:	14 [A1]	BATCH_CATEGORY_REF:	12 [CC]
ACCOUNT_BALANCES:	116 [CC]	BATCH_CATEGORY_VALUES:	13 [CC]
ACCOUNT_BILLED_SERVICES:	118 [CC]	BATCH_EXECUTABLE:	14 [CC]
ACCOUNT_CATEGORY_REF:	15 [A1]	BATCH_EXECUTABLE_ENV:	15 [CC]
ACCOUNT_CATEGORY_VALUES:	16 [A1]	BATCH_INV_SOURCE_REF:	16 [CC]
ACCOUNT_ID_SEQ_NUM:	10 [CC]	BATCH_INV_SOURCE_VALUES:	17 [CC]
ACCOUNT_MOVE_STATUS:	11 [CC]	BATCH_NOTIFY_EVENT_TYPE_REF:	18 [CC]
ACCOUNT_MOVE_TABLES:	17 [A1]	BATCH_NOTIFY_EVENT_TYPE_VALUES:	19 [CC]
ACCT_SEG_MAP:	18 [A1]	BATCH_NOTIFY_TYPE_REF:	20 [CC]
ACCT_SEG_REF:	19 [A1]	BATCH_NOTIFY_TYPE_VALUES:	21 [CC]
ACCT_SEG_VALUES:	20 [A1]	BATCH_PARTICIPANT_DEF:	22 [CC]
ADDRESS:	119 [CC]	BATCH_PARTICIPANT_TYPE_REF:	23 [CC]
ADDRESS_CATEGORY_REF:	21 [A1]	BATCH_PARTICIPANT_TYPE_VALUES:	24 [CC]
ADDRESS_CATEGORY_VALUES:	22 [A1]	BATCH_REPORT:	25 [CC]
ADDRESS_TYPE_REF:	23 [A1]	BATCH_REPORT_LINES:	26 [CC]
ADDRESS_TYPE_VALUES:	25 [A1]	BATCH_REPORT_TYPE_REF:	27 [CC]
ADJ:	120 [CC]	BATCH_REPORT_TYPE_VALUES:	28 [CC]
ADJ_REASON_CODE_REF:	26 [A1]	BATCH_REQUEST:	29 [CC]
ADJ_REASON_CODE_VALUES:	27 [A1]	BATCH_REQUEST_ACTIVITY_LOG:	31 [CC]
ADJ_TAX:	124 [CC]	BATCH_REQUEST_ERROR_LOG:	32 [CC]
ADJ_TRANS_DESCR:	28 [A1]	BATCH_REQUEST_EXECUTE_LOG:	33 [CC]
ADJ_TRANS_GROUP_REF:	32 [A1]	BATCH_REQUEST_NOTIFY_MESSAGE:	34 [CC]
ADJ_TRANS_GROUP_VALUES:	33 [A1]	BATCH_REQUEST_NOTIFY_PARAMETER:	35 [CC]
ADJ_TRANS_GROUPS:	31 [A1]	BATCH_REQUEST_PARAM:	36 [CC]
ADR_SECONDARY_UNIT_TYPE:	34 [A1]	BATCH_REQUEST_PARTICIPANT:	37 [CC]
ADR_STREET_DIRECTIONAL:	35 [A1]	BATCH_REQUEST_SEGMENT:	38 [CC]
ADR_STREET_SUFFIX:	36 [A1]	BATCH_STATUS_REF:	40 [CC]
AGED_BALANCES:	125 [CC]	BATCH_STATUS_VALUES:	41 [CC]
AGGR_USAGE_DEFINITIONS_REF:	37 [A1]	BATCH_TEMPLATE_DEF:	42 [CC]
AGGR_USAGE_DEFINITIONS_VALUES:	38 [A1]	BATCH_TEMPLATE_TYPE_REF:	43 [CC]
AGGR_USAGE_RESTRICTIONS:	39 [A1]	BATCH_TEMPLATE_TYPE_VALUES:	44 [CC]
AMP_CONSTRAINT_TEMP:	126 [CC]	BATCH_TYPE_PARAMETER_REF:	45 [CC]
AMP_MODE_REF:	41 [A1]	BATCH_TYPE_PARAMETER_VALUES:	46 [CC]
AMP_MODE_VALUES:	42 [A1]	BATCH_TYPE_REF:	47 [CC]
ARB_TAB_DEPENDS:	43 [A1]	BATCH_TYPE_STAGE_REF:	48 [CC]
ARCH_FILE_LOG:	127 [CC]	BATCH_TYPE_STAGE_VALUES:	49 [CC]
ARCH_MODE_REF:	44 [A1]	BATCH_TYPE_VALUES:	50 [CC]
ARCH_MODE_VALUES:	45 [A1]	BILL_ADDRESS:	59 [A1]
ARCH_RECORD_DETAIL:	128 [CC]	BILL_BATCHES:	131 [CC]
ARCH_RUN_BATCH:	129 [CC]	BILL_CLASS_REF:	60 [A1]
ARCH_TABLE_DEPENDS_REF:	46 [A1]	BILL_CLASS_VALUES:	61 [A1]
ARCH_TABLE_STAT:	130 [CC]	BILL_CYCLE:	62 [A1]
ARCH_TYPE_REF:	47 [A1]	BILL_DISP_METH_REF:	63 [A1]
ARCH_TYPE_VALUES:	48 [A1]	BILL_DISP_METH_VALUES:	64 [A1]
ATM_CUSTOM_TABLE_DEF:	49 [A1]	BILL_FILES:	132 [CC]
		BILL_FMT_OPT_REF:	65 [A1]
		BILL_FMT_OPT_VALUES:	66 [A1]
		BILL_FMT_SECTION_EXCL_REF:	67 [A1]

BILL_FMT_SECTION_EXCL_VALUES:	68 [A1]	BSD_EXCEPTION:	166 [CC]
BILL_FMT_SECTION_TYPE_REF:	69 [A1]	BSD_LOCALE_LANG:	71 [CC]
BILL_FMT_SECTION_TYPE_VALUES:	70 [A1]	BSD_OBJECT_ATTRIBUTES:	73 [CC]
BILL_FMT_TEMPLATE_CODE_REF:	71 [A1]	BSD_OBJECTS:	72 [CC]
BILL_FMT_TEMPLATE_CODE_VALUES:	72 [A1]	BSD_QUEUE:	74 [CC]
BILL_FORMAT_CODE_TYPE_REF:	73 [A1]	BSD_QUEUE_AUTO_RETRY:	76 [CC]
BILL_FORMAT_CODE_TYPE_VALUES:	74 [A1]	BSD_QUEUE_GROUP:	77 [CC]
BILL_FORMAT_DISPLAY_TYPES:	75 [A1]	BSD_QUEUE_PAYLOAD_OVERFLOW:	78 [CC]
BILL_FORMAT_PRODUCTS:	76 [A1]	BSD_QUEUE_WORK:	79 [CC]
BILL_FORMAT_TEMPLATE:	77 [A1]	BSD_REL_CONSTRNT_CONDITIONS:	84 [CC]
BILL_IMAGE:	134 [CC]	BSD_REL_CONSTRNT_TYPE_REF:	85 [CC]
BILL_INSERT_GROUPS:	79 [A1]	BSD_REL_CONSTRNT_TYPE_VALUES:	86 [CC]
BILL_INSERTS:	78 [A1]	BSD_RELATIONAL_CONSTRAINTS:	80 [CC]
BILL_INVOICE:	135 [CC]	BSD_RELATIONAL_DEFAULTS:	82 [CC]
BILL_INVOICE_DETAIL:	139 [CC]	CARD_TYPE_CODE_RANGE:	96 [A1]
BILL_INVOICE_DISCOUNT:	151 [CC]	CARD_TYPE_CODE_REF:	97 [A1]
BILL_INVOICE_TAX:	152 [CC]	CARD_TYPE_CODE_VALUES:	98 [A1]
BILL_MESSAGE_GROUPS:	81 [A1]	CC_BALANCE:	102 [A1]
BILL_MESSAGES:	80 [A1]	CC_VANITY_CODE_CHARGE_MAP:	103 [A1]
BILL_PERIOD_REF:	82 [A1]	CCARD_AVS_RESPONSE_CODES:	99 [A1]
BILL_PERIOD_VALUES:	83 [A1]	CCARD_RESPONSE_CODE_REF:	100 [A1]
BILL_REF_NO:	154 [CC]	CCARD_RESPONSE_CODE_VALUES:	101 [A1]
BILL_REF_NO_MASTER:	84 [A1]	CDR_ADJ_ERROR_REF:	104 [A1]
BILL_SECTIONS:	85 [A1]	CDR_ADJ_ERROR_VALUES:	105 [A1]
BILL_SIZE:	86 [A1]	CDR_BILLED:	167 [CC]
BILL_TAPES:	155 [CC]	CDR_CHECK_SUM_1...92:	106 [A1]
BILLING_FREQUENCY_REF:	57 [A1]	CDR_COMP_STATUS_REF:	107 [A1]
BILLING_FREQUENCY_VALUES:	58 [A1]	CDR_COMP_STATUS_VALUES:	108 [A1]
BILLRUN_LIMBOED_ACCTS:	51 [CC]	CDR_CONSOLIDATION_KEYS:	109 [A1]
BIP_ACCOUNT_TIME_STATS:	52 [CC]	CDR_DATA:	169 [CC]
BMF:	156 [CC]	CDR_DATA_DUC:	173 [CC]
BMF_BATCH:	160 [CC]	CDR_DATA_TAX:	175 [CC]
BMF_DISTRIBUTION:	161 [CC]	CDR_DATA_WORK:	110 [A1]
BMF_TRANS_DESCR:	87 [A1]	CDR_DATA_WORK_TAX:	115 [A1]
BMF_UNAPPLIED:	163 [CC]	CDR_DUP_CHECK_FIELDS:	117 [A1]
BONUS_POINT_ID_REF:	90 [A1]	CDR_FREE:	177 [CC]
BONUS_POINT_ID_VALUES:	91 [A1]	CDR_OUTCOLLECTS:	118 [A1]
BONUS_POINT_TRANS_TYPE_REF:	92 [A1]	CDR_RAW_USAGE:	121 [A1]
BONUS_POINT_TRANS_TYPE_VALUES:	94 [A1]	CDR_RERATED:	180 [CC]
BP_SERVER_TO_RPAC_MAP:	95 [A1]	CDR_UNBILLED:	181 [CC]
BSD_ACTIONS:	53 [CC]	CELL_ID_REF:	122 [A1]
BSD_APPLICATION_CONSTRAINTS:	54 [CC]	CELL_ID_VALUES:	123 [A1]
BSD_APPLICATION_DEFAULTS:	55 [CC]	CELL_ID_ZONE_ID_MAP:	124 [A1]
BSD_APPLICATION_REF:	56 [CC]	CIBER_ARBOR_USAGE_TYPE_XREF:	125 [A1]
BSD_APPLICATION_VALUES:	57 [CC]	CIBER_FLD_ERROR_CODES:	126 [A1]
BSD_ATTR_CONSTRNT_CONDITIONS:	62 [CC]	CIBER_INCOLLECTS:	127 [A1]
BSD_ATTR_CONSTRNT_TYPE_REF:	63 [CC]	CIBER_INCOLLECTS_ERROR:	131 [A1]
BSD_ATTR_CONSTRNT_TYPE_VALUES:	64 [CC]	CIBER_LINE_RANGES:	135 [A1]
BSD_ATTRIBUTE_CONSTRAINTS:	59 [CC]	CIBER_OPERATOR_SID_BID:	136 [A1]
BSD_ATTRIBUTE_DEFAULTS:	61 [CC]	CIBER_ROAMING_AGREEMENT:	137 [A1]
BSD_ATTRIBUTES:	58 [CC]	CIBER_SID_BID_DEF:	139 [A1]
BSD_BUSINESS_UNIT_REF:	65 [CC]	CIBER_SID_BID_MARKET:	140 [A1]
BSD_BUSINESS_UNIT_VALUES:	66 [CC]	CLASS_OF_SERVICE_CODE_REF:	141 [A1]
BSD_CONSTRAINT_DESC_REF:	67 [CC]	CLASS_OF_SERVICE_CODE_VALUES:	142 [A1]
BSD_CONSTRAINT_DESC_VALUES:	68 [CC]	CLEARING_HOUSE_CONTACTS:	143 [A1]
BSD_CONSTRAINT_MESSAGE_REF:	69 [CC]	CLEARING_HOUSE_DIVISION:	145 [A1]
BSD_CONSTRAINT_MESSAGE_VALUES:	70 [CC]	CLEARING_HOUSE_ID_REF:	146 [A1]

CLEARING_HOUSE_ID_VALUES:	147 [A1]	CUSTOMER_SERVICE_CENTERS:	237 [CC]
CLEARING_HOUSE_INFO:	148 [A1]	DB_MESSAGES:	177 [A1]
CMF:	182 [CC]	DENIAL_REASON_REF:	178 [A1]
CMF_ABI_SOURCES:	188 [CC]	DENIAL_REASON_VALUES:	179 [A1]
CMF_ACCOUNT_CODE_GROUPS:	190 [CC]	DEPENDENCY:	180 [A1]
CMF_ACCOUNT_CODES:	189 [CC]	DEPOSIT:	238 [CC]
CMF_BALANCE:	191 [CC]	DEPOSIT_TYPE_REF:	182 [A1]
CMF_BALANCE_DETAIL:	193 [CC]	DEPOSIT_TYPE_VALUES:	183 [A1]
CMF_BALANCE_TAX:	195 [CC]	DESCRIPTIONS:	184 [A1]
CMF_BONUS_POINT:	196 [CC]	DEVICES:	185 [A1]
CMF_COMPONENT_ELEMENT:	198 [CC]	DISCONNECT_REASON_REF:	186 [A1]
CMF_EXEMPT:	200 [CC]	DISCONNECT_REASON_VALUES:	187 [A1]
CMF_EXT_DATA:	202 [CC]	DISCOUNT_DEFINITIONS:	188 [A1]
CMF_INSERTS:	203 [CC]	DISCOUNT_PLANS:	191 [A1]
CMF_INTERIM_BILLS:	204 [CC]	DISCOUNT_RESTRICTIONS:	192 [A1]
CMF_JOIN:	205 [CC]	DISCOUNT_TARGETS:	195 [A1]
CMF_MESSAGES:	206 [CC]	DISCOUNT_THRESH_TIER_ID_REF:	198 [A1]
CMF_PACKAGE:	207 [CC]	DISCOUNT_THRESH_TIER_ID_VALUES:	199 [A1]
CMF_PACKAGE_COMPONENT:	208 [CC]	DISTANCE_BANDS:	200 [A1]
CMF_STATUS_CHG_REASON_REF:	150 [A1]	DISTANCE_BANDS_ID_REF:	201 [A1]
CMF_STATUS_CHG_REASON_VALUES:	151 [A1]	DISTANCE_BANDS_ID_VALUES:	202 [A1]
CMF_STATUS_HISTORY:	211 [CC]	DYNAMIC_USER_LIBS:	203 [A1]
CMF_STATUS_REF:	152 [A1]	EFT_CONTROL:	204 [A1]
CMF_STATUS_VALUES:	153 [A1]	EFT_CYCLE_STATUS:	240 [CC]
COMPONENT_DEFINITION_REF:	154 [A1]	EFT_RESPONSE_CODE_REF:	205 [A1]
COMPONENT_DEFINITION_VALUES:	155 [A1]	EFT_RESPONSE_CODE_VALUES:	206 [A1]
COMPONENT_NRCS:	156 [A1]	ELEMENT_CORRIDOR_MAP:	207 [A1]
CONNECT_REASON_CODES_REF:	157 [A1]	EMF_CONFIG_ADDR_CATEGORY_MAP:	208 [A1]
CONNECT_REASON_CODES_VALUES:	158 [A1]	EMF_CONFIG_ID_REF:	209 [A1]
CONTACTS:	212 [CC]	EMF_CONFIG_ID_VALUES:	210 [A1]
CONTRACT_ASSIGNMENTS_HQ:	213 [CC]	EMF_CONFIGURATION:	207 [A1]
CONTRACT_TYPES:	159 [A1]	EMF_JOIN:	241 [CC]
CONTRACT_UNIT_CR:	215 [CC]	EMF_MASTER_GROUPS:	242 [CC]
CORRIDOR_PLAN_GROUPS:	164 [A1]	EMF_NRC_REEST_DATES:	243 [CC]
CORRIDOR_PLAN_ID_REF:	165 [A1]	EMF_RC_REEST_DATES:	244 [CC]
CORRIDOR_PLAN_ID_VALUES:	167 [A1]	EMF_STATUS_CHG_REASON_REF:	211 [A1]
COUNTRY_CODE_REF:	168 [A1]	EMF_STATUS_CHG_REASON_VALUES:	212 [A1]
COUNTRY_CODE_VALUES:	169 [A1]	EMF_STATUS_REF:	213 [A1]
COUNTRY_DIAL_CODES:	170 [A1]	EMF_STATUS_VALUES:	214 [A1]
COUNTRY_JURISDICTION:	171 [A1]	EMF_SUSPENSION_REASON_REF:	215 [A1]
CPM_CYCLE_STATUS:	217 [CC]	EMF_SUSPENSION_REASON_VALUES:	216 [A1]
CSR_ACCT_SEG:	172 [A1]	ENTITY_TYPE_GROUP_MEMBER:	217 [A1]
CSR_AUDIT:	218 [CC]	ENTITY_TYPE_GROUP_REF:	218 [A1]
CSR_INFORMATION:	173 [A1]	ENTITY_TYPE_GROUP_VALUES:	219 [A1]
CSR_SUPERVISORS:	174 [A1]	ENTITY_TYPE_REF:	220 [A1]
CURRENCY_TYPE_REF:	175 [A1]	ENTITY_TYPE_VALUES:	222 [A1]
CURRENCY_TYPE_VALUES:	176 [A1]	ENUMERATION_DEF:	223 [A1]
CUSTOMER_CONTRACT:	219 [CC]	EPR_BATCH_WORK:	224 [A1]
CUSTOMER_CONTRACT_EXT_DATA:	222 [CC]	EPR_ERROR:	225 [A1]
CUSTOMER_CONTRACT_KEY:	223 [CC]	EQUIP_CLASS_CODE_REF:	226 [A1]
CUSTOMER_CONTRACT_VIEW:	224 [CC]	EQUIP_CLASS_CODE_VALUES:	227 [A1]
CUSTOMER_CORRIDORS:	229 [CC]	EQUIP_TYPE_CODE_REF:	228 [A1]
CUSTOMER_ID_ACCT_MAP:	231 [CC]	EQUIP_TYPE_CODE_VALUES:	229 [A1]
CUSTOMER_ID_EQUIP_MAP:	232 [CC]	ERROR_BILL:	245 [CC]
CUSTOMER_ID_EQUIP_MAP_KEY:	233 [CC]	ERROR_SEVERITIES:	230 [A1]
CUSTOMER_ID_EQUIP_MAP_VIEW:	234 [CC]	ETUC_UPDATES:	246 [CC]
CUSTOMER_ID_GROUP_MAP:	236 [CC]	EXCLUSION:	231 [A1]

EXRATE_CLASS_REF:	232 [A1]	INDUSTRY_TYPE_VALUES:	285 [A1]
EXRATE_CLASS_VALUES:	233 [A1]	INSERT_FOREIGN_KEY_REF:	286 [A1]
EXT_ACCESS_METHOD_REF:	236 [A1]	INSERT_FOREIGN_KEY_VALUES:	287 [A1]
EXT_ACCESS_METHOD_VALUES:	237 [A1]	INSERT_GRP_ID_REF:	288 [A1]
EXT_CONTACTS:	238 [A1]	INSERT_GRP_ID_VALUES:	289 [A1]
EXT_CONTACTS_STATUS:	241 [A1]	IO_DEVICES:	290 [A1]
EXT_FTP_ACCESS:	242 [A1]	ITEM_CATEGORY_REF:	291 [A1]
EXT_IPDR_FS_ACCESS:	243 [A1]	ITEM_CATEGORY_VALUES:	292 [A1]
EXT_IPDR_FS_STATUS:	244 [A1]	ITEM_CATG_INDUSTRY_ASSOC:	293 [A1]
EXT_LOCAL_DIR_ACCESS:	245 [A1]	ITEM_CATG_MKTG_ASSOC:	294 [A1]
EXT_PARAM_TYPE_ASSOC:	246 [A1]	ITEM_MARKETING_DATA_LINKS:	295 [A1]
EXT_SOURCE_ID_REF:	247 [A1]	ITEM_MARKETING_DATA_REF:	296 [A1]
EXT_SOURCE_ID_VALUES:	248 [A1]	ITEM_MARKETING_DATA_VALUES:	298 [A1]
EXT_SOURCE_TYPE_REF:	249 [A1]	JNL_CUSTOM:	10 [A2]
EXT_SOURCE_TYPE_VALUES:	250 [A1]	JNL_CYCLE:	11 [A2]
EXTERNAL_ID_ACCT_MAP:	87 [CC]	JNL_DETAIL:	257 [CC]
EXTERNAL_ID_EQUIP_MAP:	88 [CC]	JNL_EMF_BOOK_REF:	12 [A2]
EXTERNAL_ID_EQUIP_MAP_KEY:	89 [CC]	JNL_EMF_BOOK_VALUES:	13 [A2]
EXTERNAL_ID_EQUIP_MAP_VIEW:	90 [CC]	JNL_ERRORS:	260 [CC]
EXTERNAL_ID_GROUP_MAP:	92 [CC]	JNL_FEED_HEADER:	14 [A2]
EXTERNAL_ID_TYPE_REF:	234 [A1]	JNL_FEED_LAYOUT:	15 [A2]
EXTERNAL_ID_TYPE_VALUES:	235 [A1]	JNL_FEED_TRAILER:	18 [A2]
FILE_STATUS:	253 [A1]	JNL_INVOICE_AUDIT:	261 [CC]
FILE_TYPE_REF:	256 [A1]	JNL_KEYS:	19 [A2]
FILE_TYPE_VALUES:	257 [A1]	JNL_KEYS_DEFAULT:	25 [A2]
FILES_IN_PROCESS:	251 [A1]	JNL_KEYS_MASK:	31 [A2]
FILES_TO_PROCESS:	252 [A1]	JNL_RUNS:	33 [A2]
FRANCHISE_CODE_REF:	258 [A1]	JNL_RUNS_STATUS:	262 [CC]
FRANCHISE_CODE_VALUES:	259 [A1]	JNL_SUBCYCLE:	34 [A2]
GENDER_REF:	260 [A1]	JNL_TRANS:	263 [CC]
GENDER_VALUES:	261 [A1]	JNL_WORK_LIST:	265 [CC]
GENERIC_ENUMERATION_REF:	262 [A1]	JNL_WRITEOFF:	266 [CC]
GENERIC_ENUMERATION_VALUES:	263 [A1]	JNL_WRITEOFF_TAX:	267 [CC]
GEOCODE_OVERRIDES:	264 [A1]	JURISDICTION_CLASS_REF:	36 [A2]
GLOBAL_ACCOUNT_BALANCES:	266 [A1]	JURISDICTION_CLASS_VALUES:	37 [A2]
GLOBAL_OPEN_ITEM_ID_MAP:	267 [A1]	JURISDICTIONS:	35 [A2]
GROUP_AMOUNT:	269 [A1]	KEY_DOMAIN:	38 [A2]
GROUP_FUNCTION:	270 [A1]	KEY_DOMAIN_SYMBOL_REF:	39 [A2]
GROUP_MEMBER:	249 [CC]	KEY_DOMAIN_SYMBOL_VALUES:	40 [A2]
GROUP_TYPE_REF:	271 [A1]	LANGUAGE_CODE_REF:	41 [A2]
GROUP_TYPE_VALUES:	272 [A1]	LANGUAGE_CODE_VALUES:	43 [A2]
GROUPS:	248 [CC]	LATE_FEE_ASSIGNMENT:	44 [A2]
GRS_ACTION_DEFINITION:	273 [A1]	LATE_FEE_GROUPS:	45 [A2]
GRS_ACTION_OPERATIONS:	274 [A1]	LATE_FEE_RATES:	46 [A2]
GRS_ACTION_REF:	275 [A1]	LATE_FEE_TYPES:	47 [A2]
GRS_ACTION_VALUES:	276 [A1]	LBX_ERROR:	48 [A2]
GRS_OPERATION_REF:	277 [A1]	LBX_ERROR_STATUS_REF:	50 [A2]
GRS_OPERATION_VALUES:	278 [A1]	LBX_ERROR_STATUS_VALUES:	51 [A2]
GSM_ROAMING_AGREEMENT:	279 [A1]	LBX_FILE_STATUS:	52 [A2]
GUI_INDICATOR_REF:	281 [A1]	LBX_PAYMENT_TYPES:	53 [A2]
GUI_INDICATOR_VALUES:	282 [A1]	LBX_POST_DATED:	54 [A2]
GUI_MESSAGES:	283 [A1]	LBX_SOURCE_ID_REF:	56 [A2]
HISTORIC_CONTRIBUTION:	251 [CC]	LBX_SOURCE_ID_VALUES:	57 [A2]
HISTORIC_CONTRIBUTION_TAX:	253 [CC]	LCT_METRICS:	58 [A2]
HISTORIC_DISCOUNT_TRANS_MAP:	254 [CC]	LOCAL_ADDRESS:	268 [CC]
HISTORIC_THRESHOLDS:	255 [CC]	LOCAL_ADDRESS_EXT_DATA:	270 [CC]
INDUSTRY_TYPE_REF:	284 [A1]	LOCAL_SERVER_ID:	59 [A2]

LOCATION_CODE_REF:	60 [A2]	ORD_ITEM_MAP:	96 [CC]
LOCATION_CODE_VALUES:	61 [A2]	ORD_ITEM_MEMBER_TYPE_REF:	108 [A2]
MASTER_ADDRESS:	93 [CC]	ORD_ITEM_MEMBER_TYPE_VALUES:	109 [A2]
MASTER_ADDRESS_EXT_DATA:	95 [CC]	ORD_ITEM_ROUTE:	110 [A2]
MCAP_FLASH_SEQUENCE_NUMBERS:	62 [A2]	ORD_ITEM_TYPE_ASSOC:	111 [A2]
MCAP_RUN_DATE:	63 [A2]	ORD_ITEM_TYPE_REF:	113 [A2]
MCC_COUNTRY_CODES:	64 [A2]	ORD_ITEM_TYPE_VALUES:	114 [A2]
MKT_CODE_REF:	65 [A2]	ORD_LOGICAL_SERVICE_ORDER:	290 [CC]
MKT_CODE_VALUES:	66 [A2]	ORD_ORDER:	292 [CC]
MOBILE_GLOBAL_CELL_ID:	67 [A2]	ORD_ORDER_EXT_DATA:	294 [CC]
MOBILE_SERVICE_ZONES:	271 [CC]	ORD_ORDER_LOOKUP:	97 [CC]
MOBILE_ZONE_REF:	68 [A2]	ORD_ORDER_STATUS_REF:	115 [A2]
MOBILE_ZONE_TYPE_REF:	69 [A2]	ORD_ORDER_STATUS_VALUES:	116 [A2]
MOBILE_ZONE_TYPE_VALUES:	70 [A2]	ORD_SERVICE_ORDER:	295 [CC]
MOBILE_ZONE_VALUES:	71 [A2]	ORD_SERVICE_ORDER_DEPENDENCY:	298 [CC]
MSG_GRP_ID_REF:	72 [A2]	ORD_SERVICE_ORDER_EXT_DATA:	299 [CC]
MSG_GRP_ID_VALUES:	73 [A2]	ORD_SERVICE_ORDER_TYPE_REF:	117 [A2]
MSG_TRIGGER_ID_REF:	74 [A2]	ORD_SERVICE_ORDER_TYPE_VALUES:	118 [A2]
MSG_TRIGGER_ID_VALUES:	75 [A2]	ORD_SERVICE_ORDER_WORKFLOW_MAP:	119 [A2]
NCE_ACCOUNT_REEST:	272 [CC]	OUTCOLLECT_BATCH:	120 [A2]
NET_ACTION_REF:	76 [A2]	OUTCOLLECT_BATCH_DETAIL:	121 [A2]
NET_ACTION_VALUES:	77 [A2]	OUTCOLLECT_BATCH_SEQ_NUM:	122 [A2]
NET_INTERFACE_ACTIONS:	78 [A2]	OUTCOLLECT_BATCH_TAX:	123 [A2]
NET_INTERFACE_ELIGIBILITY:	79 [A2]	OWNING_COST_CTR_REF:	124 [A2]
NET_INTERFACE_REF:	80 [A2]	OWNING_COST_CTR_VALUES:	125 [A2]
NET_INTERFACE_VALUES:	81 [A2]	PACKAGE_COMPONENT_MEMBERS:	127 [A2]
NOTE:	273 [CC]	PACKAGE_COMPONENTS:	126 [A2]
NOTE_REASON_REF:	82 [A2]	PACKAGE_DEFINITION_REF:	129 [A2]
NOTE_REASON_VALUES:	83 [A2]	PACKAGE_DEFINITION_VALUES:	130 [A2]
NOTE_TEMPLATE_REF:	84 [A2]	PACKAGE_GROUP_REF:	131 [A2]
NOTE_TEMPLATE_VALUES:	85 [A2]	PACKAGE_GROUP_VALUES:	132 [A2]
NOTE_TYPE_REASON_MAP:	86 [A2]	PACKAGE_NRCS:	133 [A2]
NOTE_TYPE_REF:	87 [A2]	PARAM_DEF:	134 [A2]
NOTE_TYPE_VALUES:	88 [A2]	PARAM_VALUES:	135 [A2]
NRC:	274 [CC]	PARENT_CODE_XREF:	136 [A2]
NRC_EXT_DATA:	277 [CC]	PAYMENT_FILE_DETAIL:	137 [A2]
NRC_KEY:	278 [CC]	PAYMENT_FILE_HEADER:	138 [A2]
NRC_LINE_REF:	89 [A2]	PAYMENT_FILE_TRAILER:	139 [A2]
NRC_LINE_VALUES:	90 [A2]	PAYMENT_MERCHANT_ID_ASSIGN:	140 [A2]
NRC_TRANS_DESCR:	91 [A2]	PAYMENT_MERCHANT_ID_REF:	141 [A2]
NRC_TYPE_GROUPS:	94 [A2]	PAYMENT_MERCHANT_ID_VALUES:	142 [A2]
NRC_VIEW:	279 [CC]	PAYMENT_PROFILE:	300 [CC]
OPEN_ITEM_ID_MAP:	283 [CC]	PAYMENT_TRANS:	303 [CC]
OPEN_ITEM_ID_REF:	95 [A2]	PLAN_ID_CREDIT_REF:	143 [A2]
OPEN_ITEM_ID_VALUES:	96 [A2]	PLAN_ID_CREDIT_VALUES:	144 [A2]
OPEN_ITEM_PRIORITY_MAP:	97 [A2]	PLAN_ID_DISCOUNT_REF:	145 [A2]
ORD_CONDITION:	98 [A2]	PLAN_ID_DISCOUNT_VALUES:	146 [A2]
ORD_CONDITION_EXPRESSION:	99 [A2]	POINT_CATEGORY_REF:	147 [A2]
ORD_CONDITION_EXPRESSION_GRP:	100 [A2]	POINT_CATEGORY_VALUES:	148 [A2]
ORD_CONDITION_GRP:	101 [A2]	POINT_CLASS_REF:	149 [A2]
ORD_DEPENDENCY_TYPE_REF:	102 [A2]	POINT_CLASS_VALUES:	150 [A2]
ORD_DEPENDENCY_TYPE_VALUES:	103 [A2]	POINT_REGION_REF:	151 [A2]
ORD_EXPRESSION:	104 [A2]	POINT_REGION_VALUES:	152 [A2]
ORD_INV_PLACEHOLDER:	285 [CC]	PREPAYMENT:	307 [CC]
ORD_ITEM:	286 [CC]	PREPAYMENT_DISTRIBUTION:	310 [CC]
ORD_ITEM_ACTION_REF:	106 [A2]	PRIVACY_LEVEL_REF:	153 [A2]
ORD_ITEM_ACTION_VALUES:	107 [A2]	PRIVACY_LEVEL_VALUES:	154 [A2]

PROCESS_QUEUE:	155 [A2]	RECORD_FIELD_MAP:	221 [A2]
PROCESS_RUN:	156 [A2]	RECORD_TYPE_MAP:	223 [A2]
PROCESS_SCHED:	157 [A2]	RECORD_TYPE_REF:	224 [A2]
PROCESS_SOCKET:	159 [A2]	RECORD_TYPE_SEQ_NUM:	226 [A2]
PROCESS_STATUS:	160 [A2]	RECORD_TYPE_VALUES:	227 [A2]
PROCESS_WORK:	162 [A2]	REFINANCE_PLAN:	329 [CC]
PROCESS_WORK_CARDINAL_REF:	163 [A2]	REFUND:	330 [CC]
PROCESS_WORK_CARDINAL_VALUES:	164 [A2]	REFUND_REASON_CODE_REF:	228 [A2]
PROCESS_WORK_CM_NAME_PREFIX:	165 [A2]	REFUND_REASON_CODE_VALUES:	229 [A2]
PROCESS_WORK_RATE_SUCCESS_DEF:	166 [A2]	REGULATORY_ID_REF:	230 [A2]
PROCESS_WORK_STATUS:	167 [A2]	REGULATORY_ID_VALUES:	231 [A2]
PROCESS_WORK_STATUS_DEF:	169 [A2]	REPLICATION_TABLES:	232 [A2]
PROCESS_WORK_UNIT_SUCCESS_DEF:	171 [A2]	REPORT_ACCT_VOL:	332 [CC]
PRODUCT:	311 [CC]	REPORT_ADJ:	333 [CC]
PRODUCT_CHARGE_MAP:	314 [CC]	REPORT_AGED_BALANCES:	335 [CC]
PRODUCT_ELEMENTS:	172 [A2]	REPORT_BED:	336 [CC]
PRODUCT_EXT_DATA:	316 [CC]	REPORT_BILLED_REV:	337 [CC]
PRODUCT_GROUPS:	176 [A2]	REPORT_COL:	338 [CC]
PRODUCT_JURISDICTION:	177 [A2]	REPORT_COL_ACT_LIST:	339 [CC]
PRODUCT_KEY:	317 [CC]	REPORT_DISCOUNT:	341 [CC]
PRODUCT_LINES:	178 [A2]	REPORT_EQUIP_VOL:	342 [CC]
PRODUCT_RATE_KEY:	318 [CC]	REPORT_INVOICE:	343 [CC]
PRODUCT_RATE_OVERRIDE:	319 [CC]	REPORT_LOOKUP:	345 [CC]
PRODUCT_VIEW:	320 [CC]	REPORT_PAY_DETAIL:	346 [CC]
PROVIDER_ADDRESS:	179 [A2]	REV_RCV_COST_CENTER_REF:	233 [A2]
PROVIDER_CLASS_REF:	180 [A2]	REV_RCV_COST_CENTER_VALUES:	234 [A2]
PROVIDER_CLASS_VALUES:	181 [A2]	ROAMING_INVOICE_SUMMARY:	236 [A2]
RATABLE_UNIT_CLASS_REF:	182 [A2]	ROAMING_OPERATOR_REF:	237 [A2]
RATABLE_UNIT_CLASS_VALUES:	183 [A2]	ROAMING_OPERATOR_VALUES:	238 [A2]
RATE_AGGR_USAGE:	184 [A2]	ROAMING_RATE_KEYS:	239 [A2]
RATE_BONUS_POINT:	186 [A2]	ROAMING_TRANSFER_DETAIL:	240 [A2]
RATE_CLASS_DESCR:	187 [A2]	ROAMING_TRANSFER_TAX_DETAIL:	243 [A2]
RATE_CURRENCY:	188 [A2]	RPAC_CLUSTER_DEFINITIONS:	244 [A2]
RATE_CURRENCY_GROUP:	189 [A2]	RPAC_DEFINITIONS:	245 [A2]
RATE_CURRENCY_GROUP_REF:	190 [A2]	RPU_WORK:	347 [CC]
RATE_CURRENCY_GROUP_VALUES:	191 [A2]	RT_PAYMENT_RESP_REF:	246 [A2]
RATE_CURRENCY_REF:	192 [A2]	RT_PAYMENT_RESP_VALUES:	247 [A2]
RATE_CURRENCY_VALUES:	194 [A2]	SALES_CHANNEL_REF:	248 [A2]
RATE_DISCOUNT:	195 [A2]	SALES_CHANNEL_VALUES:	250 [A2]
RATE_DISCOUNT_OVERRIDES:	324 [CC]	SDR_EXCHANGE_RATES:	251 [A2]
RATE_LATE_FEE:	197 [A2]	SEQ_NUM:	252 [A2]
RATE_NRC:	199 [A2]	SERVER_CATEGORY_REF:	253 [A2]
RATE_PERIOD_REF:	202 [A2]	SERVER_CATEGORY_VALUES:	254 [A2]
RATE_PERIOD_VALUES:	203 [A2]	SERVER_DEFINITION:	98 [CC]
RATE_PERIODS:	200 [A2]	SERVER_LOOKUP:	99 [CC]
RATE_RC:	204 [A2]	SERVICE:	348 [CC]
RATE_UNIT_CR:	206 [A2]	SERVICE_ADDRESS_ASSOC:	101 [CC]
RATE_UNIT_CR_OVERRIDES:	326 [CC]	SERVICE BILLING:	351 [CC]
RATE_USAGE:	208 [A2]	SERVICE_CENTER_TYPE_REF:	258 [A2]
RATE_USAGE_BANDS:	211 [A2]	SERVICE_CENTER_TYPE_VALUES:	259 [A2]
RATE_USAGE_BANDS_OVERRIDES:	212 [A2]	SERVICE_CENTER_TYPES:	257 [A2]
RATE_USAGE IMPLIED DECIMALS:	213 [A2]	SERVICE_CENTERS:	255 [A2]
RATE_USAGE_OVERRIDES:	214 [A2]	SERVICE_EXT_DATA:	353 [CC]
RAW_USAGE_FIELD_MAPPING:	216 [A2]	SERVICE_KEY:	354 [CC]
RCE_ACCOUNT_REEST:	328 [CC]	SERVICE_PROVIDERS_REF:	260 [A2]
RE_CHARGE_MODIFIER:	235 [A2]	SERVICE_PROVIDERS_VALUES:	262 [A2]
RECORD_FIELD_DEF:	219 [A2]	SERVICE_STATUS:	355 [CC]

SERVICE_VIEW:	356 [CC]	USAGE_FILE_COUNTS_HISTORY:	329 [A2]
SERVICE_ZONE:	360 [CC]	USAGE_FILE_INSERTS:	330 [A2]
STATE_REF:	263 [A2]	USAGE_FILE_PROCESS_STATE:	331 [A2]
STATE_VALUES:	264 [A2]	USAGE_FILE_STATUS:	332 [A2]
STATUS_REASON_MAP:	265 [A2]	USAGE_FILE_STATUS_HISTORY:	334 [A2]
STATUS_REASON_REF:	266 [A2]	USAGE_FILES_TO_PROCESS:	325 [A2]
STATUS_REASON_VALUES:	267 [A2]	USAGE_JURISDICTION:	336 [A2]
STATUS_REF:	268 [A2]	USAGE_LOCAL_COUNTS:	338 [A2]
STATUS_TYPE_MAP:	269 [A2]	USAGE_MASTER_FILE_STATUS:	367 [CC]
STATUS_TYPE_REF:	270 [A2]	USAGE_POINTS:	340 [A2]
STATUS_TYPE_VALUES:	271 [A2]	USAGE_POINTS_TEXT:	342 [A2]
STATUS_VALUES:	272 [A2]	USAGE_PROCESS_FILE_STATUS:	368 [CC]
SUBSCRIBER_ID_SEQ_NUM:	102 [CC]	USAGE_TYPE_GROUPS:	355 [A2]
SUSPENDED_REASON_REF:	273 [A2]	USAGE_TYPES:	343 [A2]
SUSPENDED_REASON_VALUES:	274 [A2]	USAGE_TYPES_FEATURES:	352 [A2]
SYSTEM_MESSAGES:	275 [A2]	USAGE_TYPES_SPLIT:	353 [A2]
SYSTEM_MODULES:	276 [A2]	USAGE_TYPES_UNITS:	354 [A2]
SYSTEM_PARAMETERS:	277 [A2]	USAGE_UNITS_CONVERT:	356 [A2]
TAP_MAPPING:	278 [A2]	UTL_TASK_STATUS:	369 [CC]
TAX_ASSIGNMENTS:	282 [A2]	VIP_CODE_REF:	357 [A2]
TAX_CHARGE_ELEMENTS:	284 [A2]	VIP_CODE_VALUES:	358 [A2]
TAX_CODES_COMM:	286 [A2]	What's New in This Manual:	3 [A1]
TAX_ELEM_DEFAULT_LOC:	290 [A2]	What's New in This Manual:	3 [A2]
TAX_OVERRIDES:	292 [A2]	What's New in This Manual:	3 [CC]
TAX_PKG_INST_ID_REF:	294 [A2]	XFER_HISTORY:	105 [CC]
TAX_PKG_INST_ID_VALUES:	297 [A2]	XFER_NRC:	359 [A2]
TAX_RATES_VAT:	298 [A2]	XFER_REASON_ACTIONS:	360 [A2]
TAX_STATUS_REF:	300 [A2]	XFER_REASON_CODES_REF:	361 [A2]
TAX_STATUS_VALUES:	301 [A2]	XFER_REASON_CODES_VALUES:	362 [A2]
TAX_THRESHOLD_REF:	304 [A2]	XFER_STATUS:	370 [CC]
TAX_THRESHOLD_VALUES:	305 [A2]	ZIPCODE:	363 [A2]
TAX_THRESHOLDS:	302 [A2]	ZONE_CLASS_REF:	364 [A2]
TAX_TYPE_COMM_REF:	306 [A2]	ZONE_CLASS_VALUES:	365 [A2]
TAX_TYPE_COMM_VALUES:	307 [A2]	ZONE_REF:	366 [A2]
TAX_UNIV_ICB:	361 [CC]	ZONE_VALUES:	367 [A2]
TCU_DET_REP:	362 [CC]		
TICKLER:	308 [A2]		
TIMEZONE_REF:	309 [A2]		
TIMEZONE_VALUES:	310 [A2]		
TMP_ENTITY:	103 [CC]		
TMP_PENDING:	104 [CC]		
TRANS_SOURCE_REF:	312 [A2]		
TRANS_SOURCE_VALUES:	313 [A2]		
TRANSLATION:	311 [A2]		
TREP_WORK:	364 [CC]		
UI_CHARGE_DISPLAY_FORMAT:	314 [A2]		
UNIT_CR_DEFINITIONS:	317 [A2]		
UNIT_CR_PLANS:	319 [A2]		
UNIT_CR_RATE_LIMIT:	320 [A2]		
UNIT_CR_RATE_LIMIT_KEYS:	322 [A2]		
UNIT_CR_RESTRICTIONS:	323 [A2]		
UNIT_CREDIT_PROFILES:	365 [CC]		
UNITS_TYPE_REF:	315 [A2]		
UNITS_TYPE_VALUES:	316 [A2]		
USAGE_FILE_CLASS_REF:	326 [A2]		
USAGE_FILE_CLASS_VALUES:	327 [A2]		
USAGE_FILE_COUNTS:	328 [A2]		

Fields Index

[A1] = in Admin Vol 1; [A2] = in Admin Vol 2;
[CC] = in Cat/Cust

A

<i>a_external_id</i>	
REPORT_EQUIP_VOL	342[CC]
<i>abi_effective_date</i>	
ABI_INVOICE	112[CC]
<i>abi_level_code</i>	
ABI_TEXT	115[CC]
<i>abi_line_num</i>	
ABI_INVOICE	112[CC]
ABI_TEXT	115[CC]
<i>abi_record_id</i>	
ABI_RECORD_MAP	114[CC]
<i>abi_record_type</i>	
ABI_TEXT	115[CC]
<i>abi_source_record_type</i>	
ABI_SOURCE_RECORD_TYPES	10[A1]
<i>abi_tracking_id</i>	
ABI_INVOICE	112[CC]
ABI_TEXT	115[CC]
<i>abi_tracking_id_serv</i>	
ABI_INVOICE	112[CC]
ABI_TEXT	115[CC]
<i>access_carrier_name_abbr</i>	
SERVICE_PROVIDERS_REF	262[A2]
<i>access_key</i>	
DYNAMIC_USER_LIBS	203[A1]
<i>access_method</i>	
EXT_ACCESS_METHOD_REF	236[A1]
EXT_ACCESS_METHOD_VALUES	237[A1]
EXT_CONTACTS	238[A1]
<i>access_region</i>	
ACCESS_REGION_REF	13[A1]
ACCESS_REGION_VALUES	14[A1]
USAGE_POINTS	342[A2]
<i>access_region_origin</i>	
CDR_DATA	171[CC]
CDR_DATA_WORK	113[A1]
CDR_FREE	179[CC]
CORRIDOR_PLAN_GROUPS	164[A1]
CUSTOMER_CORRIDORS	230[CC]
DISTANCE_BANDS	200[A1]
USAGE_JURISDICTION	338[A2]
<i>access_region_target</i>	
CDR_DATA	171[CC]
CDR_DATA_WORK	113[A1]
CDR_FREE	179[CC]
CORRIDOR_PLAN_GROUPS	164[A1]
CUSTOMER_CORRIDORS	230[CC]
USAGE_JURISDICTION	338[A2]

<i>account_category</i>	
ACCOUNT_CATEGORY_REF	15[A1]
ACCOUNT_CATEGORY_VALUES	16[A1]
CDR_DATA_WORK	110[A1]
CMF	183[CC]
JNL_DETAIL	257[CC]
JNL_KEYS	24[A2]
JNL_KEYS_DEFAULT	30[A2]
JNL_TRANS	263[CC]
JNL_WORK_LIST	265[CC]
LATE_FEE_ASSIGNMENT	44[A2]
LBX_ERROR	48[A2]
LBX_POST_DATED	54[A2]
RE_CHARGE_MODIFIER	236[A2]
REPORT_ACCT_VOL	332[CC]
REPORT_COL	338[CC]
REPORT_COL_ACT_LIST	339[CC]
SERVER_LOOKUP	99[CC]
TAX_ASSIGNMENTS	283[A2]
TAX_THRESHOLDS	303[A2]
<i>account_category_mask</i>	
JNL_KEYS_MASK	31[A2]
<i>account_code</i>	
CMF_ACCOUNT_CODES	189[CC]
<i>account_code_group</i>	
CMF_ACCOUNT_CODE_GROUPS	190[CC]
<i>account_no</i>	
ABI_INVOICE	112[CC]
ACCOUNT_MOVE_STATUS	11[CC]
ADJ	120[CC]
AGED_BALANCES	125[CC]
BILL_IMAGE	134[CC]
BILL_INVOICE	135[CC]
BILL_TAPES	155[CC]
BILLRUN_LIMBOED_ACCTS	51[CC]
BIP_ACCOUNT_TIME_STATS	52[CC]
BMF	157[CC]
BMF_DISTRIBUTION	161[CC]
BMF_UNAPPLIED	163[CC]
CDR_BILLED	167[CC]
CDR_DATA	169[CC]
CDR_DATA_WORK	110[A1]
CDR_FREE	177[CC]
CDR_OUTCOLLECTS	118[A1]
CDR_RERATED	180[CC]
CDR_UNBILLED	181[CC]
CMF	183[CC]
CMF_ABI_SOURCES	188[CC]
CMF_ACCOUNT_CODE_GROUPS	190[CC]
CMF_BALANCE	191[CC]
CMF_BALANCE_DETAIL	193[CC]
CMF_BONUS_POINT	196[CC]
CMF_EXEMPT	200[CC]
CMF_EXT_DATA	202[CC]

CMF_INSERTS	203[CC]	<i>account_status_dt</i>	
CMF_INTERIM_BILLS	204[CC]	CMF	186[CC]
CMF_JOIN	205[CC]	REPORT_ACCT_VOL	332[CC]
CMF_MESSAGES	206[CC]	<i>account_type</i>	
CMF_STATUS_HISTORY	211[CC]	CMF	183[CC]
CONTRACT_ASSIGNMENTS_HQ	213[CC]	REPORT_ACCT_VOL	332[CC]
CSR_AUDIT	218[CC]	<i>accrued_dt</i>	
CUSTOMER_CORRIDORS	229[CC]	JNL_DETAIL	257[CC]
CUSTOMER_ID_ACCT_MAP	231[CC]	<i>acct_level_external_id</i>	
CUSTOMER_SERVICE_CENTERS	237[CC]	TICKLER	309[A2]
DEPOSIT	238[CC]	<i>acct_seg_id</i>	
EMF_MASTER_GROUPS	242[CC]	ACCT_SEG_MAP	18[A1]
EMF_NRC_REEST_DATES	243[CC]	ACCT_SEG_REF	19[A1]
EMF_RC_REEST_DATES	244[CC]	ACCT_SEG_VALUES	20[A1]
ERROR_BILL	245[CC]	CMF	187[CC]
EXTERNAL_ID_ACCT_MAP	87[CC]	CSR_ACCT_SEG	172[A1]
EXTERNAL_ID_EQUIP_MAP	88[CC]	SERVER_LOOKUP	99[CC]
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]	<i>accumulation_tracking_id</i>	
GLOBAL_OPEN_ITEM_ID_MAP	267[A1]	HISTORIC_CONTRIBUTION	251[CC]
GROUP_MEMBER	249[CC]	HISTORIC_CONTRIBUTION_TAX	253[CC]
GROUPS	248[CC]	<i>accumulation_tracking_id_serv</i>	
HISTORIC_CONTRIBUTION	252[CC]	HISTORIC_CONTRIBUTION	251[CC]
JNL_DETAIL	257[CC]	HISTORIC_CONTRIBUTION_TAX	253[CC]
JNL_WORK_LIST	265[CC]	<i>acg_tracking_id</i>	
JNL_WRITEOFF	266[CC]	CMF_ACCOUNT_CODE_GROUPS	190[CC]
LBX_ERROR	48[A2]	CMF_ACCOUNT_CODES	189[CC]
LBX_POST_DATED	54[A2]	<i>acg_tracking_id_serv</i>	
NCE_ACCOUNT_REEST	272[CC]	CMF_ACCOUNT_CODE_GROUPS	190[CC]
OPEN_ITEM_ID_MAP	283[CC]	CMF_ACCOUNT_CODES	189[CC]
ORD_ORDER	292[CC]	<i>action</i>	
ORD_ORDER_LOOKUP	97[CC]	SYSTEM_MESSAGES	276[A2]
ORD_SERVICE_ORDER	296[CC]	<i>action_code</i>	
PAYMENT_PROFILE	300[CC]	BMF	158[CC]
PAYMENT_TRANS	303[CC]	BMF_UNAPPLIED	165[CC]
PREPAYMENT	307[CC]	COMPONENT_NRCS	156[A1]
RCE_ACCOUNT_REEST	328[CC]	PACKAGE_NRCS	133[A2]
REFINANCE_PLAN	329[CC]	<i>action_id</i>	
REFUND	330[CC]	BSD_ACTIONS	53[CC]
REPORT_ACCT_VOL	332[CC]	BSD_ATTRIBUTE_CONSTRAINTS	59[CC]
REPORT_ADJ	333[CC]	BSD_ATTRIBUTE_DEFAULTS	61[CC]
REPORT_AGED_BALANCES	335[CC]	BSD_RELATIONAL_CONSTRAINTS	80[CC]
REPORT_COL	338[CC]	BSD_RELATIONAL_DEFAULTS	82[CC]
REPORT_COL_ACT_LIST	339[CC]	GRS_ACTION_DEFINITION	273[A1]
REPORT_EQUIP_VOL	342[CC]	GRS_ACTION_OPERATIONS	274[A1]
REPORT_INVOICE	343[CC]	GRS_ACTION_REF	275[A1]
RPU_WORK	347[CC]	GRS_ACTION_VALUES	276[A1]
SERVER_LOOKUP	99[CC]	ORD_CONDITION_GRP	101[A2]
SERVICE_ADDRESS_ASSOC	101[CC]	<i>action_name</i>	
TAX_UNIV_ICB	362[CC]	BSD_ACTIONS	53[CC]
TREP_WORK	365[CC]	<i>activation_code</i>	
USAGE_MASTER_FILE_STATUS	368[CC]	PRODUCT_CHARGE_MAP	315[CC]
USAGE_PROCESS_FILE_STATUS	369[CC]	PRODUCT_ELEMENTS	174[A2]
<i>account_status</i>		<i>activation_type_id_nrc</i>	
BILL_INVOICE	136[CC]	CONTRACT_TYPES	161[A1]
CMF	186[CC]		
REPORT_ACCT_VOL	332[CC]		

<i>active</i>			
DYNAMIC_USER_LIBS	203	[A1]	
<i>active_date</i>			
CONTRACT_TYPES	161	[A1]	
CUSTOMER_ID_ACCT_MAP	231	[CC]	
CUSTOMER_ID_EQUIP_MAP	232	[CC]	
CUSTOMER_ID_EQUIP_MAP_KEY	233	[CC]	
CUSTOMER_ID_EQUIP_MAP_VIEW	235	[CC]	
EXTERNAL_ID_ACCT_MAP	87	[CC]	
EXTERNAL_ID_EQUIP_MAP	88	[CC]	
EXTERNAL_ID_EQUIP_MAP_KEY	89	[CC]	
EXTERNAL_ID_EQUIP_MAP_VIEW	91	[CC]	
JNL_KEYS	24	[A2]	
JNL_KEYS_DEFAULT	30	[A2]	
RATE_CURRENCY_REF	192	[A2]	
RATE_NRC	200	[A2]	
RATE_RC	206	[A2]	
TAX_RATES_VAT	299	[A2]	
TAX_THRESHOLDS	304	[A2]	
TAX_UNIV_ICB	362	[CC]	
<i>active_dt</i>			
ACCOUNT_BALANCES	117	[CC]	
ACCOUNT_BILLED_SERVICES	118	[CC]	
AGGR_USAGE_DEFINITIONS_REF	37	[A1]	
BILL_INSERT_GROUPS	79	[A1]	
BILL_MESSAGE_GROUPS	81	[A1]	
BSD_ATTRIBUTE_CONSTRAINTS	59	[CC]	
BSD_ATTRIBUTE_DEFAULTS	61	[CC]	
BSD_RELATIONAL_CONSTRAINTS	80	[CC]	
BSD_RELATIONAL_DEFAULTS	83	[CC]	
CIBER_LINE_RANGES	135	[A1]	
CIBER_OPERATOR_SID_BID	136	[A1]	
CIBER_ROAMING_AGREEMENT	138	[A1]	
CMF_ABI_SOURCES	188	[CC]	
CMF_COMPONENT_ELEMENT	198	[CC]	
CMF_INSERTS	203	[CC]	
CMF_MESSAGES	206	[CC]	
CMF_PACKAGE	207	[CC]	
CMF_PACKAGE_COMPONENT	209	[CC]	
CMF_STATUS_HISTORY	211	[CC]	
COMPONENT_DEFINITION_REF	154	[A1]	
COMPONENT_NRCS	156	[A1]	
CUSTOMER_CORRIDORS	230	[CC]	
DEPENDENCY	181	[A1]	
EMF_CONFIGURATION	207	[A1]	
EXCLUSION	231	[A1]	
EXT_CONTACTS	239	[A1]	
GLOBAL_ACCOUNT_BALANCES	266	[A1]	
GLOBAL_OPEN_ITEM_ID_MAP	268	[A1]	
GROUP_MEMBER	249	[CC]	
GSM_ROAMING_AGREEMENT	280	[A1]	
HISTORIC_THRESHOLDS	255	[CC]	
LATE_FEE_GROUPS	45	[A2]	
LATE_FEE_RATES	46	[A2]	
LATE_FEE_TYPES	47	[A2]	
MOBILE_GLOBAL_CELL_ID	67	[A2]	
MOBILE_SERVICE_ZONES	271	[CC]	
OPEN_ITEM_ID_MAP	284	[CC]	
ORD_SERVICE_ORDER_WORKFLOW_MAP	119	[A2]	
PACKAGE_COMPONENT_MEMBERS	128	[A2]	
PACKAGE_COMPONENTS	126	[A2]	
PACKAGE_DEFINITION_REF	129	[A2]	
PACKAGE_NRCS	133	[A2]	
PRODUCT_CHARGE_MAP	314	[CC]	
PRODUCT_JURISDICTION	177	[A2]	
PRODUCT_RATE_KEY	318	[CC]	
PRODUCT_RATE_OVERRIDE	319	[CC]	
RATE_AGGR_USAGE	184	[A2]	
RATE_CURRENCY	188	[A2]	
RATE_PERIODS	202	[A2]	
RATE_USAGE	210	[A2]	
RATE_USAGE_OVERRIDES	216	[A2]	
RE_CHARGE_MODIFIER	236	[A2]	
RECORD_TYPE_REF	225	[A2]	
REPLICATION_TABLES	233	[A2]	
SDR_EXCHANGE_RATES	252	[A2]	
SERVICE_ADDRESS_ASSOC	101	[CC]	
SERVICE_BILLING	352	[CC]	
SERVICE_STATUS	356	[CC]	
SERVICE_ZONE	361	[CC]	
UNIT_CR_RATE_LIMIT	322	[A2]	
UNIT_CR_RATE_LIMIT_KEYS	323	[A2]	
USAGE_JURISDICTION	338	[A2]	
USAGE_POINTS	342	[A2]	
<i>active_flag</i>			
SERVER_DEFINITION	98	[CC]	
<i>activity_description</i>			
BATCH_REQUEST_ACTIVITY_LOG	31	[CC]	
<i>activity_status</i>			
PROCESS_WORK_STATUS	168	[A2]	
<i>add_fixed_amt</i>			
RATE_USAGE	210	[A2]	
RATE_USAGE_OVERRIDES	216	[A2]	
<i>add_implied_decimal</i>			
CDR_DATA	172	[CC]	
RATE_AGGR_USAGE	184	[A2]	
RATE_USAGE	210	[A2]	
RATE_USAGE_IMPLIED_DECIMALS	214	[A2]	
RATE_USAGE_OVERRIDES	216	[A2]	
<i>add_implied_decimals</i>			
LATE_FEE_RATES	46	[A2]	
RATE_RC	206	[A2]	
<i>add_min_amt</i>			
RATE_USAGE	211	[A2]	
<i>add_unit_rate</i>			
RATE_USAGE	210	[A2]	
RATE_USAGE_OVERRIDES	216	[A2]	
<i>address_1</i>			
LOCAL_ADDRESS	269	[CC]	
MASTER_ADDRESS	94	[CC]	
<i>address_2</i>			
LOCAL_ADDRESS	269	[CC]	

MASTER_ADDRESS	94[CC]	<i>adj_reason_code</i>	
<i>address_3</i>		ADJ	123[CC]
LOCAL_ADDRESS	269[CC]	ADJ_REASON_CODE_REF	26[A1]
MASTER_ADDRESS	94[CC]	ADJ_REASON_CODE_VALUES	27[A1]
<i>address_4</i>		REPORT_ADJ	333[CC]
LOCAL_ADDRESS	269[CC]	<i>adj_tracking_id</i>	
MASTER_ADDRESS	94[CC]	REFINANCE_PLAN	329[CC]
<i>address_category_id</i>		<i>adj_tracking_id_serv</i>	
ADDRESS_CATEGORY_REF	21[A1]	REFINANCE_PLAN	329[CC]
ADDRESS_CATEGORY_VALUES	22[A1]	<i>adj_trans_category</i>	
EMF_CONFIG_ADDR_CATEGORY_MAP	208[A1]	ADJ_TRANS_DESCR	29[A1]
SERVICE_ADDRESS_ASSOC	101[CC]	<i>adj_trans_code</i>	
<i>address_field</i>		ADJ	120[CC]
BILL_ADDRESS	59[A1]	ADJ_TRANS_DESCR	29[A1]
<i>address_id</i>		ADJ_TRANS_GROUPS	31[A1]
ADDRESS	119[CC]	REPORT_ADJ	333[CC]
CONTACTS	212[CC]	<i>adj_trans_group</i>	
LOCAL_ADDRESS	268[CC]	ADJ_TRANS_GROUP_REF	32[A1]
LOCAL_ADDRESS_EXT_DATA	270[CC]	ADJ_TRANS_GROUP_VALUES	33[A1]
MASTER_ADDRESS	93[CC]	ADJ_TRANS_GROUPS	31[A1]
MASTER_ADDRESS_EXT_DATA	95[CC]	<i>advance_periods</i>	
SERVICE_ADDRESS_ASSOC	101[CC]	PRODUCT_ELEMENTS	174[A2]
<i>address_line</i>		<i>ae</i>	
BILL_ADDRESS	59[A1]	JNL_CUSTOM	10[A2]
<i>address_line_order</i>		<i>affected</i>	
BILL_ADDRESS	59[A1]	CMF_BALANCE_TAX	195[CC]
<i>address_line1</i>		<i>aggr_threshold_quantum</i>	
ADDRESS	119[CC]	AGGR_USAGE_DEFINITIONS_REF	37[A1]
<i>address_line1_format_string</i>		<i>aggr_usage_id</i>	
ADDRESS_TYPE_REF	23[A1]	AGGR_USAGE_DEFINITIONS_REF	37[A1]
<i>address_line2</i>		AGGR_USAGE_DEFINITIONS_VALUES	38[A1]
ADDRESS	119[CC]	AGGR_USAGE_RESTRICTIONS	40[A1]
<i>address_line2_format_string</i>		BILL_INVOICE_DETAIL	149[CC]
ADDRESS_TYPE_REF	23[A1]	CDR_DATA	172[CC]
<i>address_line3</i>		RATE_AGGR_USAGE	184[A2]
ADDRESS	119[CC]	<i>aggr_usage_level</i>	
<i>address_line3_format_string</i>		AGGR_USAGE_DEFINITIONS_REF	37[A1]
ADDRESS_TYPE_REF	23[A1]	<i>aggr_usage_type</i>	
<i>address_line4</i>		AGGR_USAGE_DEFINITIONS_REF	37[A1]
ADDRESS	119[CC]	<i>align_start</i>	
<i>address_line4_format_string</i>		ORD_SERVICE_ORDER	296[CC]
ADDRESS_TYPE_REF	23[A1]	ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]
<i>address_type_id</i>		<i>allocated_tax</i>	
ADDRESS_TYPE_REF	23[A1]	PREPAYMENT	308[CC]
ADDRESS_TYPE_VALUES	25[A1]	<i>allocated_undesignated</i>	
LOCAL_ADDRESS	269[CC]	PREPAYMENT	308[CC]
MASTER_ADDRESS	94[CC]	<i>allow_account</i>	
<i>adj_category</i>		CONTRACT_TYPES	162[A1]
JNL_DETAIL	258[CC]	<i>allow_acct_group</i>	
JNL_KEYS	24[A2]	CONTRACT_TYPES	162[A1]
JNL_KEYS_DEFAULT	30[A2]	<i>allow_alternative_bill_period</i>	
JNL_TRANS	264[CC]	PRODUCT_ELEMENTS	174[A2]
<i>adj_category_mask</i>		<i>allow_auto_post</i>	
JNL_KEYS_MASK	32[A2]	CLEARING_HOUSE_CONTACTS	143[A1]

<i>allow_autotransfer</i>		PREPAYMENT_DISTRIBUTION	310[CC]
BMF_TRANS_DESCR	89[A1]	REFINANCE_PLAN	329[CC]
<i>allow_contracts</i>		REFUND	330[CC]
GROUP_TYPE_REF	271[A1]	REPORT_BED	336[CC]
<i>allow_interim_bill</i>		REPORT_BILLED_REV	337[CC]
ADJ_TRANS_DESCR	30[A1]	REPORT_INVOICE	343[CC]
<i>allow_manual_entry</i>		TCU_DET_REP	363[CC]
BMF_TRANS_DESCR	88[A1]	<i>amount_credited</i>	
<i>allow_serv_inst</i>		CDR_BILLED	168[CC]
CONTRACT_TYPES	162[A1]	<i>amount_free</i>	
<i>allow_si_group</i>		RATE_UNIT_CR	207[A2]
CONTRACT_TYPES	162[A1]	RATE_UNIT_CR_OVERRIDES	326[CC]
<i>allow_suspense_acnt</i>		<i>amount_reduction</i>	
BMF_TRANS_DESCR	89[A1]	BILL_INVOICE_DETAIL	149[CC]
<i>allow_terminate_for_complete</i>		CDR_DATA	172[CC]
BATCH_TYPE_REF	47[CC]	CDR_DATA_WORK	113[A1]
<i>alt_bank_acc_num</i>		CDR_FREE	179[CC]
PAYMENT_PROFILE	300[CC]	<i>amount_reduction_id</i>	
<i>alt_company</i>		BILL_INVOICE_DETAIL	149[CC]
CONTACTS	212[CC]	CDR_DATA	172[CC]
<i>alt_company_name</i>		CDR_DATA_WORK	113[A1]
CMF	187[CC]	CDR_FREE	179[CC]
SERVER_LOOKUP	100[CC]	<i>amp_mode_id</i>	
<i>alt_contact_id</i>		AMP_MODE_REF	41[A1]
REFUND	331[CC]	AMP_MODE_VALUES	42[A1]
<i>alt_currency_code</i>		<i>annotation</i>	
REFUND	331[CC]	ADJ	121[CC]
<i>alt_fname</i>		BILL_INVOICE_DETAIL	147[CC]
CMF	187[CC]	BMF	159[CC]
CONTACTS	212[CC]	BMF_BATCH	160[CC]
SERVER_LOOKUP	99[CC]	BMF_UNAPPLIED	165[CC]
<i>alt_lname</i>		CDR_DATA	171[CC]
CMF	187[CC]	CDR_DATA_WORK	112[A1]
CONTACTS	212[CC]	CDR_FREE	178[CC]
SERVER_LOOKUP	99[CC]	CDR_OUTCOLLECTS	119[A1]
<i>alt_printer_text</i>		LBX_ERROR	49[A2]
BILL_FORMAT_PRODUCTS	76[A1]	LBX_POST_DATED	55[A2]
<i>amex_descriptor</i>		NRC	275[CC]
SERVICE_PROVIDERS_REF	262[A2]	NRC_VIEW	281[CC]
<i>amex_flag</i>		ORD_LOGICAL_SERVICE_ORDER	291[CC]
SERVICE_PROVIDERS_REF	261[A2]	PAYMENT_TRANS	305[CC]
<i>amex_total</i>		XFER_HISTORY	105[CC]
CC_BALANCE	102[A1]	<i>annotation_type</i>	
<i>amount</i>		ADJ_TRANS_DESCR	30[A1]
BILL_INVOICE_DETAIL	143[CC]	<i>annotation2</i>	
BMF_DISTRIBUTION	161[CC]	NRC	275[CC]
CDR_DATA	171[CC]	NRC_VIEW	281[CC]
CDR_DATA_WORK	112[A1]	<i>application_id</i>	
CDR_FREE	179[CC]	BSD_APPLICATION_CONSTRAINTS	54[CC]
CDR_OUTCOLLECTS	120[A1]	BSD_APPLICATION_DEFAULTS	55[CC]
CIBER_INCOLLECTS	128[A1]	BSD_APPLICATION_REF	56[CC]
CIBER_INCOLLECTS_ERROR	132[A1]	BSD_APPLICATION_VALUES	57[CC]
CMF_BONUS_POINT	197[CC]	<i>application_name</i>	
JNL_WRITEOFF	266[CC]	BSD_EXCEPTION	166[CC]
PAYMENT_TRANS	303[CC]	<i>applied_status</i>	
		BMF_UNAPPLIED	163[CC]

<i>apply_during_suspend</i>		JNL_KEYS	24[A2]
CONTRACT_TYPES	163[A1]	JNL_KEYS_DEFAULT	30[A2]
<i>arbor_detail</i>		JNL_TRANS	264[CC]
EXT_CONTACTS	240[A1]	LBX_ERROR	49[A2]
<i>arbor_done</i>		LBX_POST_DATED	55[A2]
EXT_CONTACTS	239[A1]	NRC_KEY	278[CC]
<i>arbor_error</i>		PRODUCT_KEY	317[CC]
EXT_CONTACTS	239[A1]	USAGE_POINTS	342[A2]
<i>arbor_ready</i>		<i>arch_granularity</i>	
EXT_CONTACTS	239[A1]	ARCH_RUN_BATCH	129[CC]
<i>arbor_work</i>		<i>arch_key</i>	
EXT_CONTACTS	239[A1]	ARCH_RECORD_DETAIL	128[CC]
<i>arbordata</i>		<i>arch_key_fld_nm</i>	
SERVER_DEFINITION	98[CC]	ARCH_TABLE_DEPENDS_REF	46[A1]
<i>arch_archived</i>		<i>arch_key_resets</i>	
ARCH_RECORD_DETAIL	128[CC]	ARCH_RECORD_DETAIL	128[CC]
<i>arch_deleted</i>		<i>arch_key_resets_fld_nm</i>	
ARCH_RECORD_DETAIL	128[CC]	ARCH_TABLE_DEPENDS_REF	46[A1]
<i>arch_dest_file_directory</i>		<i>arch_keys_archived</i>	
ARCH_RUN_BATCH	129[CC]	ARCH_RUN_BATCH	129[CC]
<i>arch_dt</i>		<i>arch_keys_counted</i>	
ARCH_RECORD_DETAIL	128[CC]	ARCH_RUN_BATCH	129[CC]
<i>arch_end_dt</i>		<i>arch_keys_deleted</i>	
ARCH_RUN_BATCH	129[CC]	ARCH_RUN_BATCH	129[CC]
<i>arch_field_seperator</i>		<i>arch_keys_restored</i>	
ARCH_RUN_BATCH	129[CC]	ARCH_RUN_BATCH	129[CC]
<i>arch_file_id</i>		<i>arch_last_seq</i>	
ARCH_FILE_LOG	127[CC]	ARCH_FILE_LOG	127[CC]
<i>arch_file_nm</i>		<i>arch_lock</i>	
ARCH_FILE_LOG	127[CC]	ARCH_RECORD_DETAIL	128[CC]
<i>arch_first_seq</i>		<i>arch_mode_id</i>	
ARCH_FILE_LOG	127[CC]	ARCH_MODE_REF	44[A1]
<i>arch_flag</i>		ARCH_MODE_VALUES	45[A1]
ADJ	121[CC]	ARCH_RUN_BATCH	129[CC]
ADJ_TAX	124[CC]	<i>arch_output_mode</i>	
BILL_BATCHES	131[CC]	ARCH_RUN_BATCH	129[CC]
BILL_FILES	133[CC]	<i>arch_owner</i>	
BILL_IMAGE	134[CC]	ARCH_RECORD_DETAIL	128[CC]
BILL_INVOICE	138[CC]	<i>arch_restored</i>	
BILL_INVOICE_DETAIL	149[CC]	ARCH_RECORD_DETAIL	128[CC]
BILL_INVOICE_TAX	152[CC]	<i>arch_rows_archived</i>	
BMF	158[CC]	ARCH_TABLE_STAT	130[CC]
BMF_UNAPPLIED	165[CC]	<i>arch_rows_counted</i>	
CDR_BILLED	168[CC]	ARCH_TABLE_STAT	130[CC]
CDR_DATA	171[CC]	<i>arch_rows_deleted</i>	
CDR_DATA_WORK	112[A1]	ARCH_TABLE_STAT	130[CC]
CDR_FREE	179[CC]	<i>arch_rows_restored</i>	
CDR_OUTCOLLECTS	120[A1]	ARCH_TABLE_STAT	130[CC]
CIBER_INCOLLECTS	130[A1]	<i>arch_run_criteria</i>	
CIBER_INCOLLECTS_ERROR	133[A1]	ARCH_RUN_BATCH	129[CC]
CONTRACT_UNIT_CR	215[CC]	<i>arch_run_id</i>	
CUSTOMER_CONTRACT_KEY	223[CC]	ARCH_FILE_LOG	127[CC]
ETUC_UPDATES	247[CC]	ARCH_RECORD_DETAIL	128[CC]
JNL_DETAIL	258[CC]	ARCH_RUN_BATCH	129[CC]
JNL_INVOICE_AUDIT	261[CC]	ARCH_TABLE_STAT	130[CC]

<i>arch_run_id_serv</i>		BSD_ATTRIBUTES	58[CC]
ARCH_FILE_LOG	127[CC]	BSD_OBJECT_ATTRIBUTES	73[CC]
ARCH_RECORD_DETAIL	128[CC]	<i>attribute_id1</i>	
ARCH_RUN_BATCH	129[CC]	BSD_RELATIONAL_DEFAULTS	82[CC]
ARCH_TABLE_STAT	130[CC]	<i>attribute_id2</i>	
<i>arch_seq</i>		BSD_RELATIONAL_DEFAULTS	82[CC]
ARCH_RECORD_DETAIL	128[CC]	<i>attribute_length</i>	
<i>arch_start_dt</i>		BSD_ATTRIBUTES	58[CC]
ARCH_RUN_BATCH	129[CC]	<i>attribute_name</i>	
<i>arch_status</i>		BSD_ATTRIBUTES	58[CC]
ARCH_RUN_BATCH	129[CC]	<i>attribute_type</i>	
<i>arch_table_id</i>		BSD_ATTRIBUTES	58[CC]
ARCH_FILE_LOG	127[CC]	<i>authorization_flag</i>	
ARCH_TABLE_DEPENDS_REF	46[A1]	ACCOUNT_BALANCES	116[CC]
ARCH_TABLE_STAT	130[CC]	GLOBAL_ACCOUNT_BALANCES	266[A1]
<i>arch_table_nm</i>		<i>auto_activation</i>	
ARCH_TABLE_DEPENDS_REF	46[A1]	PRODUCT	311[CC]
<i>arch_type_id</i>		PRODUCT_ELEMENTS	175[A2]
ARCH_RUN_BATCH	129[CC]	PRODUCT_VIEW	321[CC]
ARCH_TABLE_DEPENDS_REF	46[A1]	<i>auto_credit_code</i>	
ARCH_TYPE_REF	47[A1]	PRODUCT_ELEMENTS	174[A2]
ARCH_TYPE_VALUES	48[A1]	<i>auto_post_delay</i>	
<i>arp</i>		CLEARING_HOUSE_CONTACTS	143[A1]
CIBER_LINE_RANGES	135[A1]	<i>aux_tax_info</i>	
<i>assignment_annotation</i>		ADJ	122[CC]
ORD_INV_PLACEHOLDER	285[CC]	ADJ_TAX	124[CC]
<i>assoc_enumeration_id</i>		BILL_INVOICE_DETAIL	147[CC]
PARAM_DEF	134[A2]	BILL_INVOICE_TAX	152[CC]
<i>assoc_id</i>		CDR_BILLED	168[CC]
ORD_ITEM_TYPE_ASSOC	112[A2]	CDR_DATA	170[CC]
<i>association_id</i>		CDR_DATA_TAX	175[CC]
CMF_COMPONENT_ELEMENT	198[CC]	CDR_DATA_WORK_TAX	115[A1]
<i>association_id_serv</i>		<i>avail_amount</i>	
CMF_COMPONENT_ELEMENT	198[CC]	CONTRACT_UNIT_CR	216[CC]
<i>association_status</i>		<i>avail_periods</i>	
SERVICE_ADDRESS_ASSOC	101[CC]	CUSTOMER_CONTRACT_KEY	223[CC]
<i>association_type</i>		<i>avail_units</i>	
CMF_COMPONENT_ELEMENT	198[CC]	CONTRACT_UNIT_CR	215[CC]
<i>att_expected_date</i>		<i>avs_address_id</i>	
ABI_INVOICE	112[CC]	PAYMENT_PROFILE	301[CC]
<i>attr_constraint_cond_id</i>		<i>avs_response_code</i>	
BSD_ATTR_CONSTRNT_CONDITIONS	62[CC]	CCARD_AVS_RESPONSE_CODES	99[A1]
<i>attr_constraint_id</i>		PAYMENT_PROFILE	301[CC]
BSD_ATTR_CONSTRNT_CONDITIONS	62[CC]	<i>awarded_quantum_type</i>	
BSD_ATTRIBUTE_CONSTRAINTS	59[CC]	CDR_DATA_DUC	173[CC]
<i>attr_constraint_type_id</i>		B	
BSD_ATTR_CONSTRNT_TYPE_REF	63[CC]	<i>b_end_address_id</i>	
BSD_ATTR_CONSTRNT_TYPE_VALUES	64[CC]	SERVICE_KEY	355[CC]
BSD_ATTRIBUTE_CONSTRAINTS	59[CC]	<i>b_rev_rcv_cost_ctr</i>	
<i>attribute_default_id</i>		ADJ	123[CC]
BSD_ATTRIBUTE_DEFAULTS	61[CC]	BILL_INVOICE_DETAIL	149[CC]
<i>attribute_display_order</i>		SERVICE	349[CC]
EXT_PARAM_TYPE_ASSOC	246[A1]	SERVICE BILLING	352[CC]
<i>attribute_id</i>		SERVICE_VIEW	358[CC]
BSD_ATTRIBUTE_DEFAULTS	61[CC]		

<i>b_service_company</i>		REPORT_COL_ACT_LIST	339[CC]
SERVICE	349[CC]	<i>balance_gt_180_day</i>	
SERVICE_VIEW	358[CC]	AGED_BALANCES	125[CC]
<i>b_service_fname</i>		<i>balance_tracking_id</i>	
SERVICE	349[CC]	ACCOUNT_BALANCES	116[CC]
SERVICE_VIEW	358[CC]	GLOBAL_ACCOUNT_BALANCES	266[A1]
<i>b_service_franchise_tax_code</i>		<i>balance_tracking_id_serv</i>	
SERVICE_BILLING	352[CC]	ACCOUNT_BALANCES	116[CC]
SERVICE_KEY	355[CC]	GLOBAL_ACCOUNT_BALANCES	266[A1]
<i>b_service_geocode</i>		<i>balance_xfer_diff</i>	
SERVICE_BILLING	352[CC]	BALANCE_XFER_DIFF_REF	53[A1]
SERVICE_KEY	355[CC]	BALANCE_XFER_DIFF_VALUES	54[A1]
<i>b_service_lname</i>		<i>bam_error_code</i>	
SERVICE	349[CC]	BAM_ERROR_CODE_REF	55[A1]
SERVICE_VIEW	358[CC]	BAM_ERROR_CODE_VALUES	56[A1]
<i>b_service_init</i>		<i>band</i>	
SERVICE	349[CC]	CIBER_SID_BID_DEF	139[A1]
SERVICE_VIEW	358[CC]	<i>bank_account_type</i>	
<i>b_service_phone</i>		PAYMENT_PROFILE	300[CC]
SERVICE	349[CC]	<i>bank_agency_code</i>	
SERVICE_VIEW	358[CC]	PAYMENT_PROFILE	300[CC]
<i>b_service_phone2</i>		<i>bank_agency_name</i>	
SERVICE	349[CC]	PAYMENT_PROFILE	300[CC]
SERVICE_VIEW	358[CC]	<i>bank_code</i>	
<i>backout_status</i>		PAYMENT_PROFILE	300[CC]
BILL_INVOICE	137[CC]	<i>base_amt</i>	
<i>balance_120_day</i>		CDR_DATA	170[CC]
AGED_BALANCES	125[CC]	CDR_DATA_WORK	111[A1]
REPORT_AGED_BALANCES	335[CC]	CDR_FREE	178[CC]
<i>balance_150_day</i>		CDR_OUTCOLLECTS	119[A1]
AGED_BALANCES	125[CC]	CIBER_INCOLLECTS	128[A1]
<i>balance_180_day</i>		CIBER_INCOLLECTS_ERROR	132[A1]
AGED_BALANCES	125[CC]	<i>base_attribute_name</i>	
<i>balance_30_day</i>		ENTITY_TYPE_REF	220[A1]
AGED_BALANCES	125[CC]	<i>base_column_name</i>	
REPORT_AGED_BALANCES	335[CC]	ENTITY_TYPE_REF	220[A1]
<i>balance_60_day</i>		<i>base_currency</i>	
AGED_BALANCES	125[CC]	RATE_CURRENCY	188[A2]
REPORT_AGED_BALANCES	335[CC]	<i>base_object_name</i>	
<i>balance_90_day</i>		ENTITY_TYPE_REF	220[A1]
AGED_BALANCES	125[CC]	<i>base_table</i>	
REPORT_AGED_BALANCES	335[CC]	EXT_PARAM_TYPE_ASSOC	246[A1]
<i>balance_account_no</i>		<i>base_table_name</i>	
ACCOUNT_BALANCES	116[CC]	ENTITY_TYPE_REF	220[A1]
GLOBAL_ACCOUNT_BALANCES	266[A1]	<i>basic_days</i>	
GLOBAL_OPEN_ITEM_ID_MAP	267[A1]	TAX_PKG_INST_ID_REF	295[A2]
OPEN_ITEM_ID_MAP	284[CC]	<i>basis</i>	
<i>balance_chg_date</i>		HISTORIC_CONTRIBUTION_TAX	253[CC]
ADJ	123[CC]	<i>batch_balance</i>	
<i>balance_desc</i>		BMF_BATCH	160[CC]
ACCOUNT_BALANCES	117[CC]	<i>batch_category_id</i>	
GLOBAL_ACCOUNT_BALANCES	266[A1]	BATCH_CATEGORY_REF	12[CC]
<i>balance_due</i>		BATCH_CATEGORY_VALUES	13[CC]
CMF_BALANCE	192[CC]	BATCH_TYPE_REF	47[CC]
CMF_BALANCE_DETAIL	194[CC]		

batch_description

BATCH_REQUEST 29[CC]

batch_id

BATCH_REPORT 25[CC]

BATCH_REQUEST 29[CC]

BATCH_REQUEST_ACTIVITY_LOG 31[CC]

BATCH_REQUEST_ERROR_LOG 32[CC]

BATCH_REQUEST_EXECUTE_LOG 33[CC]

BATCH_REQUEST_NOTIFY_MESSAGE 34[CC]

BATCH_REQUEST_NOTIFY_PARAMETER 35[CC]

BATCH_REQUEST_PARAM 36[CC]

BATCH_REQUEST_SEGMENT 38[CC]

BILL_BATCHES 131[CC]

BILL_FILES 132[CC]

BILL_TAPES 155[CC]

BMF 158[CC]

BMF_BATCH 160[CC]

BMF_UNAPPLIED 164[CC]

LBX_ERROR 49[A2]

LBX_POST_DATED 55[A2]

ORD_ORDER 293[CC]

ORD_ORDER_LOOKUP 97[CC]

ORD_SERVICE_ORDER 297[CC]

REPORT_PAY_DETAIL 346[CC]

batch_id_serv

BMF 158[CC]

BMF_BATCH 160[CC]

BMF_UNAPPLIED 164[CC]

LBX_ERROR 49[A2]

LBX_POST_DATED 55[A2]

batch_inv_source_id

BATCH_INV_SOURCE_REF 16[CC]

BATCH_INV_SOURCE_VALUES 17[CC]

batch_name

BATCH_REQUEST 29[CC]

batch_seq_num

ROAMING_TRANSFER_DETAIL 241[A2]

ROAMING_TRANSFER_TAX_DETAIL 244[A2]

batch_seq_num_in

SERVICE_PROVIDERS_REF 262[A2]

batch_seq_num_out

SERVICE_PROVIDERS_REF 262[A2]

batch_status

BMF_BATCH 160[CC]

batch_status_id

BATCH_REQUEST 29[CC]

BATCH_REQUEST_ACTIVITY_LOG 31[CC]

BATCH_STATUS_REF 40[CC]

BATCH_STATUS_VALUES 41[CC]

batch_total

CC_BALANCE 102[A1]

batch_type

LBX_ERROR 48[A2]

LBX_POST_DATED 54[A2]

OUTCOLLECT_BATCH_SEQ_NUM 122[A2]

batch_type_id

BATCH_REQUEST 29[CC]

BATCH_TYPE_PARAMETER_REF 45[CC]

BATCH_TYPE_REF 47[CC]

BATCH_TYPE_STAGE_REF 48[CC]

BATCH_TYPE_VALUES 50[CC]

batch_type_stage_id

BATCH_REQUEST_SEGMENT 38[CC]

BATCH_TYPE_STAGE_REF 48[CC]

BATCH_TYPE_STAGE_VALUES 49[CC]

bi_currency_code

REPORT_BILLED_REV 337[CC]

bill_address1

CMF 184[CC]

SERVER_LOOKUP 99[CC]

bill_address2

CMF 184[CC]

bill_address3

CMF 184[CC]

bill_aggr_level

USAGE_TYPES 347[A2]

bill_category_type

ABI_TEXT 115[CC]

bill_city

CMF 184[CC]

SERVER_LOOKUP 99[CC]

bill_class

BILL_CLASS_REF 60[A1]

BILL_CLASS_VALUES 61[A1]

BILL_INVOICE_DETAIL 149[CC]

CDR_DATA 169[CC]

CDR_DATA_WORK 110[A1]

CDR_FREE 177[CC]

CDR_OUTCOLLECTS 118[A1]

CIBER_INCOLLECTS 130[A1]

CIBER_INCOLLECTS_ERROR 133[A1]

RATE_PERIODS 201[A2]

RATE_USAGE 209[A2]

RATE_USAGE_OVERRIDES 216[A2]

UNIT_CR_RATE_LIMIT 321[A2]

USAGE_JURISDICTION 338[A2]

bill_class_type

BILL_CLASS_REF 60[A1]

bill_company

BILL_IMAGE 134[CC]

CMF 184[CC]

REPORT_ACCT_VOL 332[CC]

REPORT_COL 338[CC]

REPORT_COL_ACT_LIST 339[CC]

SERVER_LOOKUP 99[CC]

bill_company_find

SERVER_LOOKUP 99[CC]

bill_company_tax_id

PAYMENT_PROFILE 301[CC]

<i>bill_country_code</i>		<i>bill_lname_find</i>	
CMF	185[CC]	SERVER_LOOKUP	99[CC]
<i>bill_county</i>		<i>bill_minit</i>	
CMF	185[CC]	CMF	184[CC]
<i>bill_date</i>		<i>bill_name_generation</i>	
BILL_IMAGE	134[CC]	CMF	184[CC]
<i>bill_disp_meth</i>		<i>bill_name_pre</i>	
BILL_DISP_METH_REF	63[A1]	CMF	184[CC]
BILL_DISP_METH_VALUES	64[A1]	<i>bill_order_number</i>	
BILL_INVOICE	136[CC]	ADJ	123[CC]
CMF	185[CC]	BILL_INVOICE	138[CC]
<i>bill_fmt_opt</i>		BMF	159[CC]
BILL_ADDRESS	59[A1]	BMF_UNAPPLIED	165[CC]
BILL_FMT_OPT_REF	65[A1]	CMF_INTERIM_BILLS	204[CC]
BILL_FMT_OPT_VALUES	66[A1]	NRC	275[CC]
BILL_SECTIONS	85[A1]	NRC_VIEW	281[CC]
BILL_SIZE	86[A1]	<i>bill_period</i>	
CMF	185[CC]	BILL_CYCLE	62[A1]
<i>bill_fname</i>		BILL_INVOICE	136[CC]
BILL_IMAGE	134[CC]	BILL_PERIOD_REF	82[A1]
CMF	184[CC]	BILL_PERIOD_VALUES	83[A1]
REPORT_ACCT_VOL	332[CC]	CMF	185[CC]
REPORT_COL	338[CC]	CONTRACT_TYPES	162[A1]
REPORT_COL_ACT_LIST	339[CC]	CUSTOMER_CONTRACT	220[CC]
SERVER_LOOKUP	99[CC]	CUSTOMER_CONTRACT_VIEW	226[CC]
<i>bill_fname_find</i>		ETUC_UPDATES	246[CC]
SERVER_LOOKUP	99[CC]	PRODUCT	311[CC]
<i>bill_franchise_tax_code</i>		PRODUCT_CHARGE_MAP	314[CC]
CMF	185[CC]	PRODUCT_VIEW	322[CC]
<i>bill_geocode</i>		REPORT_INVOICE	343[CC]
CMF	185[CC]	UNIT_CREDIT_PROFILES	366[CC]
<i>bill_hold_code</i>		<i>bill_period_or_date_chg</i>	
BILL_INVOICE	137[CC]	ETUC_UPDATES	247[CC]
CMF	185[CC]	<i>bill_ref_no</i>	
REPORT_INVOICE	343[CC]	ABI_INVOICE	112[CC]
<i>bill_image</i>		ADJ	122[CC]
BILL_IMAGE	134[CC]	BILL_IMAGE	134[CC]
<i>bill_in_arrears</i>		BILL_INVOICE	135[CC]
PRODUCT_ELEMENTS	174[A2]	BILL_INVOICE_DETAIL	139[CC]
<i>bill_invoice_row</i>		BILL_INVOICE_DISCOUNT	151[CC]
BILL_INVOICE_DETAIL	139[CC]	BILL_INVOICE_TAX	152[CC]
BILL_INVOICE_DISCOUNT	151[CC]	BILL_REF_NO	154[CC]
BILL_INVOICE_TAX	152[CC]	BILL_REF_NO_MASTER	84[A1]
CDR_BILLED	168[CC]	BILL_TAPES	155[CC]
REPORT_DISCOUNT	341[CC]	BMF	157[CC]
REPORT_INVOICE	343[CC]	BMF_DISTRIBUTION	161[CC]
TCU_DET_REP	363[CC]	CDR_BILLED	167[CC]
<i>bill_lname</i>		CMF_BALANCE	191[CC]
BILL_IMAGE	134[CC]	CMF_BALANCE_DETAIL	193[CC]
CMF	184[CC]	CMF_BALANCE_TAX	195[CC]
REPORT_ACCT_VOL	332[CC]	CMF_BONUS_POINT	197[CC]
REPORT_COL	338[CC]	CONTRACT_UNIT_CR	215[CC]
REPORT_COL_ACT_LIST	339[CC]	ERROR_BILL	245[CC]
SERVER_LOOKUP	99[CC]	HISTORIC_CONTRIBUTION	251[CC]
		JNL_DETAIL	257[CC]
		JNL_INVOICE_AUDIT	261[CC]

JNL_WORK_LIST	265[CC]	CMF	183[CC]
JNL_WRITEOFF	266[CC]	<i>bill_state</i>	
LBX_ERROR	48[A2]	CMF	184[CC]
LBX_POST_DATED	54[A2]	SERVER_LOOKUP	99[CC]
NRC_KEY	278[CC]	<i>bill_subcategory_id</i>	
PAYMENT_TRANS	303[CC]	ABI_TEXT	115[CC]
PREPAYMENT	307[CC]	<i>bill_title</i>	
REFINANCE_PLAN	329[CC]	CMF	184[CC]
REPORT_ADJ	333[CC]	<i>bill_while_suspended</i>	
REPORT_BED	336[CC]	PRODUCT_ELEMENTS	175[A2]
REPORT_BILLED_REV	337[CC]	<i>bill_zip</i>	
REPORT_COL	338[CC]	CMF	184[CC]
REPORT_COL_ACT_LIST	340[CC]	SERVER_LOOKUP	99[CC]
REPORT_DISCOUNT	341[CC]	<i>billable_amount</i>	
REPORT_INVOICE	343[CC]	ABI_TEXT	115[CC]
TCU_DET_REP	363[CC]	<i>billable_line_ind</i>	
<i>bill_ref_resets</i>		ABI_TEXT	115[CC]
ABI_INVOICE	112[CC]	<i>billed_account_no</i>	
ADJ	122[CC]	ACCOUNT_BILLED_SERVICES	118[CC]
BILL_IMAGE	134[CC]	UNIT_CREDIT_PROFILES	366[CC]
BILL_INVOICE	135[CC]	<i>billed_amount</i>	
BILL_INVOICE_DETAIL	139[CC]	CDR_BILLED	167[CC]
BILL_INVOICE_DISCOUNT	151[CC]	<i>billed_amount_reduction</i>	
BILL_INVOICE_TAX	152[CC]	CDR_BILLED	167[CC]
BILL_REF_NO	154[CC]	<i>billed_base_amt</i>	
BILL_REF_NO_MASTER	84[A1]	CDR_BILLED	167[CC]
BILL_TAPES	155[CC]	<i>billed_city_tax</i>	
BMF	157[CC]	CDR_BILLED	167[CC]
BMF_DISTRIBUTION	161[CC]	<i>billed_county_tax</i>	
CDR_BILLED	167[CC]	CDR_BILLED	167[CC]
CMF_BALANCE	191[CC]	<i>billed_dt</i>	
CMF_BALANCE_DETAIL	193[CC]	JNL_DETAIL	257[CC]
CMF_BALANCE_TAX	195[CC]	<i>billed_federal_tax</i>	
CMF_BONUS_POINT	197[CC]	CDR_BILLED	167[CC]
CONTRACT_UNIT_CR	215[CC]	<i>billed_num_records</i>	
ERROR_BILL	245[CC]	CDR_BILLED	168[CC]
HISTORIC_CONTRIBUTION	251[CC]	<i>billed_other_tax</i>	
JNL_DETAIL	257[CC]	CDR_BILLED	167[CC]
JNL_INVOICE_AUDIT	261[CC]	<i>billed_state_tax</i>	
JNL_WORK_LIST	265[CC]	CDR_BILLED	167[CC]
JNL_WRITEOFF	266[CC]	<i>billed_thru_dt</i>	
LBX_ERROR	48[A2]	PRODUCT_CHARGE_MAP	314[CC]
LBX_POST_DATED	54[A2]	<i>billed_unrounded_amount</i>	
NRC_KEY	278[CC]	CDR_BILLED	167[CC]
PAYMENT_TRANS	303[CC]	<i>billing_account_no</i>	
PREPAYMENT	307[CC]	NRC	274[CC]
REFINANCE_PLAN	329[CC]	NRC_VIEW	280[CC]
REPORT_BED	336[CC]	PRODUCT	311[CC]
REPORT_BILLED_REV	337[CC]	PRODUCT_CHARGE_MAP	314[CC]
REPORT_COL	338[CC]	PRODUCT_VIEW	322[CC]
REPORT_COL_ACT_LIST	340[CC]	<i>billing_active_dt</i>	
REPORT_DISCOUNT	341[CC]	PRODUCT	311[CC]
REPORT_INVOICE	343[CC]	PRODUCT_VIEW	322[CC]
TCU_DET_REP	363[CC]	<i>billing_category</i>	
<i>bill_sequence_num</i>		ADJ_TRANS_DESCR	29[A1]
BILL_INVOICE	135[CC]		

BILL_FORMAT_DISPLAY_TYPES	75[A1]	PREPAYMENT_DISTRIBUTION	310[CC]
BILL_INVOICE_DETAIL	142[CC]	<i>bmf_tracking_id_serv</i>	
BMF_TRANS_DESCR	88[A1]	BMF_DISTRIBUTION	161[CC]
<i>billing_frequency</i>		BMF_UNAPPLIED	163[CC]
BILL_CYCLE	62[A1]	JNL_WRITEOFF	266[CC]
BILLING_FREQUENCY_REF	57[A1]	PREPAYMENT_DISTRIBUTION	310[CC]
BILLING_FREQUENCY_VALUES	58[A1]	<i>bmf_trans_category</i>	
CMF	185[CC]	BMF_TRANS_DESCR	88[A1]
ETUC_UPDATES	246[CC]	<i>bmf_trans_type</i>	
PACKAGE_COMPONENT_MEMBERS	127[A2]	BMF	157[CC]
RATE_AGGR_USAGE	184[A2]	BMF_DISTRIBUTION	162[CC]
RATE_DISCOUNT	196[A2]	BMF_TRANS_DESCR	88[A1]
RATE_DISCOUNT_OVERRIDES	324[CC]	BMF_UNAPPLIED	164[CC]
RATE_LATE_FEE	198[A2]	LBX_PAYMENT_TYPES	53[A2]
RATE_RC	206[A2]	PAYMENT_TRANS	304[CC]
RATE_UNIT_CR	207[A2]	REPORT_PAY_DETAIL	346[CC]
RATE_UNIT_CR_OVERRIDES	326[CC]	<i>bonus_point_id</i>	
TAX_RATES_VAT	300[A2]	BONUS_POINT_ID_REF	90[A1]
UNIT_CREDIT_PROFILES	366[CC]	BONUS_POINT_ID_VALUES	91[A1]
<i>billing_inactive_dt</i>		CMF_BONUS_POINT	196[CC]
PRODUCT	311[CC]	CONTRACT_TYPES	161[A1]
PRODUCT_VIEW	322[CC]	RATE_BONUS_POINT	186[A2]
<i>billing_level</i>		<i>bonus_point_trans_category</i>	
ADJ_TRANS_DESCR	29[A1]	BONUS_POINT_TRANS_TYPE_REF	92[A1]
BILL_FORMAT_DISPLAY_TYPES	75[A1]	<i>bonus_point_trans_type</i>	
BILL_INVOICE_DETAIL	142[CC]	BONUS_POINT_TRANS_TYPE_REF	92[A1]
REPORT_BILLED_REV	337[CC]	BONUS_POINT_TRANS_TYPE_VALUES	94[A1]
REPORT_INVOICE	344[CC]	CMF_BONUS_POINT	196[CC]
<i>billing_no</i>		<i>booked</i>	
ABI_INVOICE	112[CC]	CMF_BALANCE_TAX	195[CC]
<i>billing_service_center</i>		<i>booked_current</i>	
ACCT_SEG_MAP	18[A1]	CMF_BALANCE_TAX	195[CC]
<i>billing_units_type</i>		<i>branch_code</i>	
CDR_DATA	171[CC]	PAYMENT_PROFILE	300[CC]
CDR_DATA_WORK	111[A1]	<i>branch_name</i>	
CDR_FREE	178[CC]	PAYMENT_PROFILE	300[CC]
CDR_OUTCOLLECTS	119[A1]	<i>brand_id</i>	
RATE_USAGE	211[A2]	TAX_ASSIGNMENTS	283[A2]
RATE_USAGE_OVERRIDES	216[A2]	<i>bu_ps_code_cr</i>	
USAGE_TYPES_UNITS	355[A2]	JNL_CUSTOM	10[A2]
<i>billrunid</i>		<i>bu_ps_code_db</i>	
BILLRUN_LIMBOED_ACCTS	51[CC]	JNL_CUSTOM	10[A2]
<i>bin_rounding</i>		<i>business_unit_id</i>	
TAX_PKG_INST_ID_REF	297[A2]	BSD_APPLICATION_CONSTRAINTS	54[CC]
<i>bit_end</i>		BSD_APPLICATION_DEFAULTS	55[CC]
RECORD_FIELD_DEF	220[A2]	BSD_BUSINESS_UNIT_REF	65[CC]
<i>bit_start</i>		BSD_BUSINESS_UNIT_VALUES	66[CC]
RECORD_FIELD_DEF	220[A2]	<i>bytes_appended_last</i>	
<i>bmf_error_text</i>		USAGE_MASTER_FILE_STATUS	368[CC]
BMF_UNAPPLIED	163[CC]	<i>bytes_appended_total</i>	
<i>bmf_source_type</i>		USAGE_MASTER_FILE_STATUS	368[CC]
JNL_WRITEOFF	266[CC]	C	
<i>bmf_tracking_id</i>		<i>calculation_type</i>	
BMF_DISTRIBUTION	161[CC]	LATE_FEE_TYPES	47[A2]
BMF_UNAPPLIED	163[CC]		
JNL_WRITEOFF	266[CC]		

<i>call_direction</i>			
CIBER_INCOLLECTS	127[A1]		
CIBER_INCOLLECTS_ERROR	131[A1]		
<i>called_place</i>			
CIBER_INCOLLECTS	129[A1]		
CIBER_INCOLLECTS_ERROR	133[A1]		
<i>called_state_prov</i>			
CIBER_INCOLLECTS	129[A1]		
CIBER_INCOLLECTS_ERROR	133[A1]		
<i>cancel_allowed</i>			
ORD_DEPENDENCY_TYPE_REF	102[A2]		
<i>capability_url</i>			
EXT_IPDR_FS_ACCESS	243[A1]		
<i>card_account</i>			
PAYMENT_PROFILE	300[CC]		
<i>card_carrier</i>			
CARD_TYPE_CODE_REF	97[A1]		
PAYMENT_PROFILE	301[CC]		
<i>card_expire</i>			
PAYMENT_PROFILE	301[CC]		
<i>card_type_code</i>			
CARD_TYPE_CODE_RANGE	96[A1]		
CARD_TYPE_CODE_REF	97[A1]		
CARD_TYPE_CODE_VALUES	98[A1]		
PAYMENT_MERCHANT_ID_ASSIGN	140[A2]		
<i>cardinality</i>			
PROCESS_WORK	162[A2]		
PROCESS_WORK_CARDINAL_REF	163[A2]		
PROCESS_WORK_CARDINAL_VALUES	164[A2]		
PROCESS_WORK_CM_NAME_PREFIX	165[A2]		
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]		
PROCESS_WORK_STATUS	167[A2]		
PROCESS_WORK_STATUS_DEF	169[A2]		
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]		
<i>carrier</i>			
CIBER_SID_BID_DEF	139[A1]		
<i>carrier_code</i>			
CIBER_LINE_RANGES	135[A1]		
<i>carrier_id_code</i>			
SERVICE_PROVIDERS_REF	262[A2]		
<i>cat_char</i>			
RECORD_FIELD_MAP	223[A2]		
<i>category</i>			
PROCESS_QUEUE	155[A2]		
SYSTEM_MESSAGES	276[A2]		
<i>cb_currency_code</i>			
REPORT_BILLED_REV	337[CC]		
<i>ccard_carrier</i>			
CCARD_AVS_RESPONSE_CODES	99[A1]		
<i>ccauth_code</i>			
PAYMENT_TRANS	305[CC]		
<i>ccauth_date</i>			
PAYMENT_TRANS	305[CC]		
<i>cdr_adj_error</i>			
CDR_ADJ_ERROR_REF	104[A1]		
CDR_ADJ_ERROR_VALUES	105[A1]		
<i>cdr_data_partition_key</i>			
CDR_BILLED	167[CC]		
CDR_DATA	169[CC]		
CDR_DATA_DUC	173[CC]		
CDR_DATA_TAX	175[CC]		
CDR_RERATED	180[CC]		
CDR_UNBILLED	181[CC]		
<i>cdr_partition_key</i>			
RPU_WORK_STATUS	348[CC]		
<i>cdr_status</i>			
CDR_DATA	171[CC]		
CDR_DATA_WORK	112[A1]		
CDR_FREE	179[CC]		
CDR_OUTCOLLECTS	120[A1]		
<i>cell_id</i>			
CELL_ID_REF	122[A1]		
CELL_ID_VALUES	123[A1]		
CELL_ID_ZONE_ID_MAP	124[A1]		
<i>cell_id_origin</i>			
CDR_DATA	171[CC]		
CDR_DATA_WORK	113[A1]		
CDR_FREE	179[CC]		
CDR_OUTCOLLECTS	120[A1]		
<i>cell_name</i>			
CELL_ID_REF	122[A1]		
<i>cell_name_origin</i>			
CDR_DATA_WORK	113[A1]		
<i>certificate</i>			
CMF_EXEMPT	200[CC]		
<i>cgi_url</i>			
NET_INTERFACE_ACTIONS	78[A2]		
<i>ch_format_type</i>			
CLEARING_HOUSE_CONTACTS	143[A1]		
<i>change_dt</i>			
ACCOUNT_MOVE_STATUS	11[CC]		
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
EXT_CONTACTS	239[A1]		
FILE_STATUS	255[A1]		
LOCAL_ADDRESS	269[CC]		
MASTER_ADDRESS	94[CC]		
RATE_AGGR_USAGE	185[A2]		
RATE_USAGE	210[A2]		
SDR_EXCHANGE_RATES	252[A2]		
USAGE_MASTER_FILE_STATUS	368[CC]		
<i>change_who</i>			
EXT_CONTACTS	239[A1]		
FILE_STATUS	255[A1]		
LOCAL_ADDRESS	269[CC]		
MASTER_ADDRESS	94[CC]		
RATE_AGGR_USAGE	185[A2]		
RATE_USAGE	210[A2]		
SDR_EXCHANGE_RATES	252[A2]		
<i>char_value</i>			
ATM_POPLIST_REF	51[A1]		

ATM_POPLIST_VALUES	52[A1]		
SYSTEM_PARAMETERS	278[A2]		
charge_date			
JNL_WRITEOFF	266[CC]		
charge_domain			
UI_CHARGE_DISPLAY_FORMAT	315[A2]		
charge_element_type			
GLOBAL_OPEN_ITEM_ID_MAP	267[A1]		
OPEN_ITEM_ID_MAP	284[CC]		
charge_element_value			
GLOBAL_OPEN_ITEM_ID_MAP	267[A1]		
OPEN_ITEM_ID_MAP	284[CC]		
charge_elt_id			
GEOCODE_OVERRIDES	264[A1]		
TAX_ASSIGNMENTS	284[A2]		
TAX_CHARGE_ELEMENTS	285[A2]		
TAX_CODES_COMM	287[A2]		
TAX_ELEM_DEFAULT_LOC	291[A2]		
TAX_OVERRIDES	293[A2]		
TAX_THRESHOLDS	303[A2]		
charge_elt_type			
GEOCODE_OVERRIDES	264[A1]		
TAX_ASSIGNMENTS	283[A2]		
TAX_CHARGE_ELEMENTS	285[A2]		
TAX_CODES_COMM	287[A2]		
TAX_ELEM_DEFAULT_LOC	291[A2]		
TAX_OVERRIDES	293[A2]		
TAX_THRESHOLDS	303[A2]		
charge_id			
UI_CHARGE_DISPLAY_FORMAT	315[A2]		
charge_modifier_name			
RE_CHARGE_MODIFIER	236[A2]		
charge_modifier_value			
RE_CHARGE_MODIFIER	236[A2]		
charge_order			
PRODUCT	311[CC]		
PRODUCT_VIEW	322[CC]		
charge_threshold			
CMF	187[CC]		
charge_type			
ABI_TEXT	115[CC]		
RATE_CURRENCY	188[A2]		
TCU_DET_REP	363[CC]		
charged_party_status			
TAP_MAPPING	282[A2]		
check_amount			
LBX_ERROR	48[A2]		
LBX_POST_DATED	54[A2]		
check_digit_alg			
CARD_TYPE_CODE_REF	97[A1]		
check_num			
REFUND	331[CC]		
check_sum1			
CDR_CHECK_SUM_1	106[A1]		
check_sum2			
CDR_CHECK_SUM_1		106[A1]	
checksum1			
FILE_STATUS		254[A1]	
USAGE_FILE_STATUS		333[A2]	
USAGE_FILE_STATUS_HISTORY		335[A2]	
checksum2			
FILE_STATUS		254[A1]	
USAGE_FILE_STATUS		334[A2]	
USAGE_FILE_STATUS_HISTORY		335[A2]	
checksum3			
FILE_STATUS		255[A1]	
USAGE_FILE_STATUS		334[A2]	
USAGE_FILE_STATUS_HISTORY		335[A2]	
chg_date			
ADJ		123[CC]	
BMF		158[CC]	
BMF_BATCH		160[CC]	
BMF_DISTRIBUTION		161[CC]	
BMF_UNAPPLIED		164[CC]	
CMF		186[CC]	
CMF_BALANCE		192[CC]	
CMF_BALANCE_DETAIL		194[CC]	
CUSTOMER_SERVICE_CENTERS		237[CC]	
DEPOSIT		238[CC]	
PAYMENT_TRANS		304[CC]	
PREPAYMENT		308[CC]	
PREPAYMENT_DISTRIBUTION		310[CC]	
PROCESS_STATUS		161[A2]	
REFINANCE_PLAN		329[CC]	
SERVICE_CENTERS		257[A2]	
chg_dt			
ACCOUNT_BALANCES		117[CC]	
ADDRESS		119[CC]	
BATCH_REQUEST_ACTIVITY_LOG		31[CC]	
BSD_APPLICATION_REF		56[CC]	
BSD_APPLICATION_VALUES		57[CC]	
BSD_ATTR_CONSTRNT_CONDITIONS		62[CC]	
BSD_ATTR_CONSTRNT_TYPE_REF		63[CC]	
BSD_ATTR_CONSTRNT_TYPE_VALUES		64[CC]	
BSD_ATTRIBUTE_CONSTRAINTS		60[CC]	
BSD_ATTRIBUTE_DEFAULTS		61[CC]	
BSD_BUSINESS_UNIT_REF		65[CC]	
BSD_BUSINESS_UNIT_VALUES		66[CC]	
BSD_CONSTRAINT_DESC_REF		67[CC]	
BSD_CONSTRAINT_DESC_VALUES		68[CC]	
BSD_CONSTRAINT_MESSAGE_REF		69[CC]	
BSD_CONSTRAINT_MESSAGE_VALUES		70[CC]	
BSD_LOCALE_LANG		71[CC]	
BSD_QUEUE		75[CC]	
BSD_QUEUE_GROUP		77[CC]	
BSD_QUEUE_PAYLOAD_OVERFLOW		78[CC]	
BSD_QUEUE_WORK		79[CC]	
BSD_REL_CONSTRNT_CONDITIONS		84[CC]	
BSD_REL_CONSTRNT_TYPE_REF		85[CC]	
BSD_REL_CONSTRNT_TYPE_VALUES		86[CC]	

BSD_RELATIONAL_CONSTRAINTS	81[CC]	BSD_ATTRIBUTE_CONSTRAINTS	60[CC]
BSD_RELATIONAL_DEFAULTS	83[CC]	BSD_ATTRIBUTE_DEFAULTS	61[CC]
CIBER_INCOLLECTS	130[A1]	BSD_BUSINESS_UNIT_REF	65[CC]
CIBER_INCOLLECTS_ERROR	134[A1]	BSD_BUSINESS_UNIT_VALUES	66[CC]
CMF_STATUS_HISTORY	211[CC]	BSD_CONSTRAINT_DESC_REF	67[CC]
CONTACTS	212[CC]	BSD_CONSTRAINT_DESC_VALUES	68[CC]
CUSTOMER_CORRIDORS	230[CC]	BSD_CONSTRAINT_MESSAGE_REF	69[CC]
EPR_BATCH_WORK	224[A1]	BSD_CONSTRAINT_MESSAGE_VALUES	70[CC]
EPR_ERROR	225[A1]	BSD_LOCALE_LANG	71[CC]
GLOBAL_ACCOUNT_BALANCES	266[A1]	BSD_QUEUE	75[CC]
GLOBAL_OPEN_ITEM_ID_MAP	268[A1]	BSD_QUEUE_GROUP	77[CC]
GROUP_MEMBER	249[CC]	BSD_QUEUE_PAYLOAD_OVERFLOW	78[CC]
GROUPS	248[CC]	BSD_QUEUE_WORK	79[CC]
HISTORIC_CONTRIBUTION	252[CC]	BSD_REL_CONSTRNT_CONDITIONS	84[CC]
HISTORIC_CONTRIBUTION_TAX	253[CC]	BSD_REL_CONSTRNT_TYPE_REF	85[CC]
HISTORIC_THRESHOLDS	256[CC]	BSD_REL_CONSTRNT_TYPE_VALUES	86[CC]
LBX_ERROR	48[A2]	BSD_RELATIONAL_CONSTRAINTS	81[CC]
LBX_POST_DATED	54[A2]	BSD_RELATIONAL_DEFAULTS	83[CC]
NOTE	273[CC]	CIBER_INCOLLECTS	130[A1]
NRC	275[CC]	CIBER_INCOLLECTS_ERROR	134[A1]
NRC_VIEW	281[CC]	CMF	186[CC]
OPEN_ITEM_ID_MAP	284[CC]	CMF_BALANCE	192[CC]
PRODUCT	312[CC]	CMF_BALANCE_DETAIL	194[CC]
PRODUCT_RATE_KEY	318[CC]	CMF_BONUS_POINT	197[CC]
PRODUCT_VIEW	322[CC]	CMF_INSERTS	203[CC]
RATE_DISCOUNT_OVERRIDES	325[CC]	CMF_MESSAGES	206[CC]
RATE_PERIODS	202[A2]	CMF_STATUS_HISTORY	211[CC]
RATE_UNIT_CR_OVERRIDES	327[CC]	CONTACTS	212[CC]
RATE_USAGE_OVERRIDES	216[A2]	CUSTOMER_CORRIDORS	230[CC]
RPU_WORK	347[CC]	CUSTOMER_SERVICE_CENTERS	237[CC]
SERVICE	349[CC]	DEPOSIT	238[CC]
SERVICE_STATUS	356[CC]	GLOBAL_ACCOUNT_BALANCES	266[A1]
SERVICE_VIEW	358[CC]	GLOBAL_OPEN_ITEM_ID_MAP	268[A1]
TICKLER	309[A2]	GROUP_MEMBER	250[CC]
UNIT_CR_RATE_LIMIT	322[A2]	GROUPS	248[CC]
UNIT_CR_RATE_LIMIT_KEYS	323[A2]	HISTORIC_CONTRIBUTION	252[CC]
UNIT_CREDIT_PROFILES	367[CC]	HISTORIC_CONTRIBUTION_TAX	253[CC]
USAGE_FILE_COUNTS	329[A2]	HISTORIC_THRESHOLDS	256[CC]
USAGE_FILE_COUNTS_HISTORY	330[A2]	LBX_ERROR	48[A2]
USAGE_FILE_PROCESS_STATE	332[A2]	LBX_POST_DATED	54[A2]
USAGE_FILE_STATUS	334[A2]	NOTE	273[CC]
USAGE_FILE_STATUS_HISTORY	336[A2]	NRC	275[CC]
USAGE_LOCAL_COUNTS	340[A2]	NRC_VIEW	281[CC]
XFER_HISTORY	105[CC]	OPEN_ITEM_ID_MAP	284[CC]
XFER_STATUS	371[CC]	PREPAYMENT	308[CC]
<i>chg_who</i>		PREPAYMENT_DISTRIBUTION	310[CC]
ACCOUNT_BALANCES	117[CC]	PRODUCT	311[CC]
ADDRESS	119[CC]	PRODUCT_RATE_KEY	318[CC]
ADJ	123[CC]	PRODUCT_VIEW	322[CC]
BATCH_REQUEST_ACTIVITY_LOG	31[CC]	RATE_CURRENCY	188[A2]
BMF_BATCH	160[CC]	RATE_DISCOUNT_OVERRIDES	325[CC]
BMF_DISTRIBUTION	162[CC]	RATE_PERIODS	202[A2]
BSD_APPLICATION_REF	56[CC]	RATE_UNIT_CR_OVERRIDES	327[CC]
BSD_APPLICATION_VALUES	57[CC]	RATE_USAGE_OVERRIDES	216[A2]
BSD_ATTR_CONSTRNT_CONDITIONS	62[CC]	REFINANCE_PLAN	329[CC]
BSD_ATTR_CONSTRNT_TYPE_REF	63[CC]	REPORT_ADJ	333[CC]
BSD_ATTR_CONSTRNT_TYPE_VALUES	64[CC]	SERVICE	349[CC]

SERVICE_CENTERS	257[A2]	<i>city_rate</i>	
SERVICE_STATUS	356[CC]	BILL_INVOICE_TAX	153[CC]
SERVICE_VIEW	358[CC]	CDR_DATA_TAX	175[CC]
TICKLER	309[A2]	CDR_DATA_WORK_TAX	115[A1]
UNIT_CR_RATE_LIMIT	322[A2]	TAX_OVERRIDES	294[A2]
UNIT_CR_RATE_LIMIT_KEYS	323[A2]	<i>city_tax</i>	
USAGE_FILE_COUNTS	329[A2]	ADJ	122[CC]
USAGE_FILE_COUNTS_HISTORY	330[A2]	ADJ_TAX	124[CC]
USAGE_FILE_PROCESS_STATE	332[A2]	BILL_INVOICE_DETAIL	148[CC]
USAGE_FILE_STATUS	334[A2]	BILL_INVOICE_TAX	152[CC]
USAGE_FILE_STATUS_HISTORY	336[A2]	CDR_DATA_TAX	175[CC]
USAGE_LOCAL_COUNTS	340[A2]	CDR_DATA_WORK	112[A1]
XFER_HISTORY	105[CC]	CDR_DATA_WORK_TAX	115[A1]
XFER_STATUS	371[CC]	CDR_FREE	178[CC]
<i>chgb_resubmit_delay</i>		CDR_OUTCOLLECTS	119[A1]
CLEARING_HOUSE_CONTACTS	144[A1]	CIBER_INCOLLECTS	127[A1]
<i>child_cols</i>		CIBER_INCOLLECTS_ERROR	131[A1]
ARB_TAB_DEPENDS	43[A1]	NRC	276[CC]
<i>child_column_name</i>		NRC_VIEW	282[CC]
ENTITY_TYPE_REF	220[A1]	OUTCOLLECT_BATCH_TAX	123[A2]
<i>child_count</i>		REPORT_INVOICE	344[CC]
CMF	183[CC]	<i>ckf_client_id</i>	
<i>child_nm</i>		CLEARING_HOUSE_INFO	148[A1]
ARB_TAB_DEPENDS	43[A1]	<i>ckf_var_descriptor</i>	
<i>child_overflow_id</i>		CLEARING_HOUSE_INFO	148[A1]
BSD_QUEUE_PAYLOAD_OVERFLOW	78[CC]	<i>class_of_service_code</i>	
<i>child_table_name</i>		BILL_FORMAT_TEMPLATE	77[A1]
ENTITY_TYPE_REF	220[A1]	CLASS_OF_SERVICE_CODE_REF	141[A1]
<i>chunk_size</i>		CLASS_OF_SERVICE_CODE_VALUES	142[A1]
BATCH_TYPE_REF	47[CC]	EMF_CONFIGURATION	207[A1]
<i>ci</i>		PROVIDER_CLASS_REF	180[A2]
MOBILE_GLOBAL_CELL_ID	67[A2]	RATE_NRC	200[A2]
<i>ciber_call_direction</i>		RATE_PERIODS	202[A2]
CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]	RATE_RC	206[A2]
<i>ciber_operator_type</i>		RATE_USAGE	210[A2]
CIBER_ROAMING_AGREEMENT	137[A1]	RATE_USAGE_OVERRIDES	216[A2]
<i>ciber_rec_type</i>		ROAMING_RATE_KEYS	240[A2]
CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]	SERVICE_BILLING	352[CC]
<i>ciber_sid_bid</i>		USAGE_JURISDICTION	337[A2]
CELL_ID_REF	122[A1]	USAGE_TYPES_SPLIT	354[A2]
<i>city</i>		USAGE_TYPES_UNITS	355[A2]
ADDRESS	119[CC]	<i>class_of_service_value</i>	
CMF_EXEMPT	201[CC]	CLASS_OF_SERVICE_CODE_REF	141[A1]
LOCAL_ADDRESS	268[CC]	<i>clearing_house</i>	
MASTER_ADDRESS	93[CC]	CC_BALANCE	102[A1]
TCU_DET_REP	363[CC]	<i>clearing_house_id</i>	
<i>city_code</i>		CC_BALANCE	102[A1]
CMF_EXEMPT	201[CC]	CCARD_AVS_RESPONSE_CODES	99[A1]
GEOCODE_OVERRIDES	264[A1]	CCARD_RESPONSE_CODE_REF	100[A1]
LATE_FEE_ASSIGNMENT	44[A2]	CCARD_RESPONSE_CODE_VALUES	101[A1]
TAX_ASSIGNMENTS	283[A2]	CLEARING_HOUSE_CONTACTS	143[A1]
TAX_OVERRIDES	293[A2]	CLEARING_HOUSE_DIVISION	145[A1]
TAX_THRESHOLDS	304[A2]	CLEARING_HOUSE_ID_REF	146[A1]
TCU_DET_REP	363[CC]	CLEARING_HOUSE_ID_VALUES	147[A1]
ZIPCODE	364[A2]	CLEARING_HOUSE_INFO	148[A1]
		CPM_CYCLE_STATUS	217[CC]

EFT_CYCLE_STATUS	240[CC]	<i>collections_center</i>	
EFT_RESPONSE_CODE_REF	205[A1]	ACCT_SEG_MAP	18[A1]
EFT_RESPONSE_CODE_VALUES	206[A1]	<i>comb_tax_rate</i>	
PAYMENT_FILE_DETAIL	137[A2]	ADJ	122[CC]
PAYMENT_FILE_HEADER	138[A2]	<i>comments</i>	
PAYMENT_FILE_TRAILER	139[A2]	EMF_MASTER_GROUPS	242[CC]
PAYMENT_PROFILE	300[CC]	GROUPS	248[CC]
PAYMENT_TRANS	304[CC]	PROCESS_STATUS	161[A2]
SERVICE_PROVIDERS_REF	262[A2]	<i>commission_id</i>	
<i>closed_date</i>		SALES_CHANNEL_REF	249[A2]
CMF_BALANCE	191[CC]	<i>commitment_amount</i>	
CMF_BALANCE_DETAIL	193[CC]	CUSTOMER_CONTRACT_KEY	223[CC]
REPORT_COL_ACT_LIST	339[CC]	<i>commitment_currency_code</i>	
<i>cmf_status</i>		CUSTOMER_CONTRACT_KEY	223[CC]
CMF_STATUS_HISTORY	211[CC]	<i>commitment_reference</i>	
CMF_STATUS_REF	152[A1]	CONTRACT_TYPES	160[A1]
CMF_STATUS_VALUES	153[A1]	CUSTOMER_CONTRACT	221[CC]
<i>cmf_status_chg_reason</i>		CUSTOMER_CONTRACT_VIEW	227[CC]
CMF_STATUS_CHG_REASON_REF	150[A1]	<i>commitment_type_id_nrc</i>	
CMF_STATUS_CHG_REASON_VALUES	151[A1]	CONTRACT_TYPES	161[A1]
CMF_STATUS_HISTORY	211[CC]	<i>comp_status</i>	
<i>cmf_status_type</i>		CDR_COMP_STATUS_REF	107[A1]
CMF_STATUS_HISTORY	211[CC]	CDR_COMP_STATUS_VALUES	108[A1]
<i>code</i>		CDR_DATA	171[CC]
ERROR_SEVERITIES	230[A1]	CDR_DATA_WORK	112[A1]
<i>code_type</i>		CDR_FREE	179[CC]
BILL_FORMAT_CODE_TYPE_REF	73[A1]	CDR_OUTCOLLECTS	120[A1]
BILL_FORMAT_CODE_TYPE_VALUES	74[A1]	CIBER_INCOLLECTS	128[A1]
BILL_FORMAT_TEMPLATE	77[A1]	CIBER_INCOLLECTS_ERROR	132[A1]
<i>code_value</i>		<i>comp_status_type</i>	
BILL_FORMAT_TEMPLATE	77[A1]	CDR_COMP_STATUS_REF	107[A1]
<i>codeword</i>		<i>company</i>	
CMF	186[CC]	CONTACTS	212[CC]
SERVER_LOOKUP	99[CC]	<i>compare_type</i>	
SERVICE	349[CC]	RECORD_FIELD_MAP	223[A2]
SERVICE_VIEW	358[CC]	<i>complete_date</i>	
<i>col_active_flag</i>		XFER_STATUS	371[CC]
REPORT_COL	338[CC]	<i>complete_dt</i>	
REPORT_COL_ACT_LIST	340[CC]	CPM_CYCLE_STATUS	217[CC]
<i>col_enter_date</i>		EFT_CYCLE_STATUS	240[CC]
REPORT_COL	338[CC]	ORD_ORDER	292[CC]
REPORT_COL_ACT_LIST	340[CC]	ORD_SERVICE_ORDER	295[CC]
<i>col_exit_date</i>		<i>completed</i>	
REPORT_COL	338[CC]	USAGE_FILE_PROCESS_STATE	332[A2]
<i>collection_delay</i>		<i>completed_check</i>	
CLEARING_HOUSE_CONTACTS	144[A1]	USAGE_FILE_PROCESS_STATE	332[A2]
<i>collection_history</i>		<i>compliance_trans_code</i>	
BILL_INVOICE	137[CC]	TAX_CHARGE_ELEMENTS	285[A2]
CMF	186[CC]	<i>component_element_status</i>	
<i>collection_indicator</i>		CMF_COMPONENT_ELEMENT	199[CC]
CMF	186[CC]	<i>component_id</i>	
CMF_BALANCE	192[CC]	BILL_INVOICE_DETAIL	139[CC]
CMF_BALANCE_DETAIL	194[CC]	CDR_DATA	172[CC]
<i>collection_status</i>		CMF_COMPONENT_ELEMENT	198[CC]
CMF	186[CC]	CMF_PACKAGE_COMPONENT	208[CC]

COMPONENT_DEFINITION_REF	154[A1]	<i>conditional_value</i>	
COMPONENT_DEFINITION_VALUES	155[A1]	RECORD_FIELD_MAP	223[A2]
COMPONENT_NRCS	156[A1]	<i>connect_reason</i>	
NRC_TRANS_DESCR	93[A2]	CMF_COMPONENT_ELEMENT	199[CC]
PACKAGE_COMPONENT_MEMBERS	127[A2]	CMF_PACKAGE	207[CC]
PACKAGE_COMPONENTS	126[A2]	CMF_PACKAGE_COMPONENT	209[CC]
PRODUCT	313[CC]	CONNECT_REASON_CODES_REF	157[A1]
PRODUCT_VIEW	323[CC]	CONNECT_REASON_CODES_VALUES	158[A1]
RATE_NRC	200[A2]	PRODUCT	312[CC]
RATE_PERIODS	202[A2]	PRODUCT_VIEW	322[CC]
RATE_RC	205[A2]	<i>consolidate_usage</i>	
RATE_USAGE	211[A2]	ACCOUNT_CATEGORY_REF	15[A1]
RATE_USAGE_OVERRIDES	216[A2]	USAGE_TYPES	351[A2]
UNIT_CR_RATE_LIMIT	321[A2]	<i>constraint_attribute_id</i>	
<i>component_inst_id</i>		BSD_ATTRIBUTE_CONSTRAINTS	59[CC]
CMF_COMPONENT_ELEMENT	198[CC]	<i>constraint_desc_id</i>	
CMF_PACKAGE_COMPONENT	208[CC]	BSD_ATTRIBUTE_CONSTRAINTS	59[CC]
<i>component_inst_id_serv</i>		BSD_CONSTRAINT_DESC_REF	67[CC]
CMF_COMPONENT_ELEMENT	198[CC]	BSD_CONSTRAINT_DESC_VALUES	68[CC]
CMF_PACKAGE_COMPONENT	208[CC]	BSD_RELATIONAL_CONSTRAINTS	80[CC]
<i>component_level</i>		<i>constraint_desc_name</i>	
COMPONENT_DEFINITION_REF	154[A1]	BSD_CONSTRAINT_DESC_REF	67[CC]
<i>component_status</i>		<i>constraint_id</i>	
CMF_PACKAGE_COMPONENT	209[CC]	BSD_APPLICATION_CONSTRAINTS	54[CC]
<i>composite_file</i>		<i>constraint_object_id</i>	
GSM_ROAMING_AGREEMENT	280[A1]	BSD_ATTRIBUTE_CONSTRAINTS	59[CC]
<i>compressed_size</i>		<i>contact_company</i>	
BILL_IMAGE	134[CC]	ORD_ORDER	292[CC]
<i>compression_type</i>		ORD_ORDER_LOOKUP	97[CC]
BILL_IMAGE	134[CC]	<i>contact_company_find</i>	
<i>cond_attr_constraint_type_id</i>		ORD_ORDER_LOOKUP	97[CC]
BSD_ATTR_CONSTRNT_CONDITIONS	62[CC]	<i>contact_email</i>	
BSD_REL_CONSTRNT_CONDITIONS	84[CC]	ORD_ORDER	292[CC]
<i>cond_attribute_id</i>		ORD_ORDER_LOOKUP	97[CC]
BSD_ATTR_CONSTRNT_CONDITIONS	62[CC]	<i>contact_fname</i>	
BSD_REL_CONSTRNT_CONDITIONS	84[CC]	ORD_ORDER	292[CC]
<i>cond_expr_grp_id</i>		ORD_ORDER_LOOKUP	97[CC]
ORD_CONDITION	98[A2]	<i>contact_fname_find</i>	
ORD_CONDITION_EXPRESSION	99[A2]	ORD_ORDER_LOOKUP	97[CC]
ORD_CONDITION_EXPRESSION_GRP	100[A2]	<i>contact_id</i>	
<i>cond_expr_id</i>		CONTACTS	212[CC]
ORD_CONDITION_EXPRESSION	99[A2]	<i>contact_lname</i>	
<i>cond_expression</i>		ORD_ORDER	292[CC]
BSD_ATTR_CONSTRNT_CONDITIONS	62[CC]	ORD_ORDER_LOOKUP	97[CC]
BSD_REL_CONSTRNT_CONDITIONS	84[CC]	<i>contact_lname_find</i>	
<i>cond_grp_id</i>		ORD_ORDER_LOOKUP	97[CC]
ORD_CONDITION	98[A2]	<i>contact_phone1</i>	
ORD_CONDITION_GRP	101[A2]	ORD_ORDER	292[CC]
ORD_ITEM_TYPE_ASSOC	112[A2]	<i>contact_phone2</i>	
<i>cond_id</i>		ORD_ORDER	292[CC]
ORD_CONDITION	98[A2]	<i>contact_title</i>	
<i>cond_object_id</i>		ORD_ORDER	292[CC]
BSD_REL_CONSTRNT_CONDITIONS	84[CC]	<i>contact1_name</i>	
<i>conditional_type</i>		BILL_IMAGE	134[CC]
RECORD_FIELD_MAP	223[A2]	CMF	185[CC]

<i>contact1_phone</i>			
CMF	185[CC]	UNIT_CREDIT_PROFILES	366[CC]
<i>contact2_name</i>		<i>contract_type</i>	
BILL_IMAGE	134[CC]	CONTRACT_TYPES	160[A1]
CMF	185[CC]	CUSTOMER_CONTRACT	219[CC]
<i>contact2_phone</i>		CUSTOMER_CONTRACT_VIEW	225[CC]
CMF	185[CC]	UNIT_CREDIT_PROFILES	366[CC]
<i>contract_association_type</i>		<i>contract_use_code</i>	
NRC	276[CC]	BILL_PERIOD_REF	82[A1]
NRC_VIEW	282[CC]	PRODUCT_ELEMENTS	174[A2]
PRODUCT	312[CC]	<i>control_file_expected</i>	
PRODUCT_VIEW	322[CC]	EXT_CONTACTS	239[A1]
<i>contract_category</i>		<i>control_report_executable_id</i>	
CONTRACT_TYPES	160[A1]	BATCH_TYPE_REF	47[CC]
<i>contract_end_dt</i>		<i>conversion_date</i>	
ETUC_UPDATES	246[CC]	EXRATE_CLASS_REF	232[A1]
UNIT_CREDIT_PROFILES	367[CC]	<i>convert_factor</i>	
<i>contract_id</i>		RATE_BONUS_POINT	186[A2]
CUSTOMER_CONTRACT	219[CC]	USAGE_UNITS_CONVERT	357[A2]
CUSTOMER_CONTRACT_VIEW	225[CC]	<i>converted</i>	
<i>contract_level</i>		BILL_INVOICE	138[CC]
CUSTOMER_CONTRACT	219[CC]	CMF	187[CC]
CUSTOMER_CONTRACT_VIEW	226[CC]	CMF_BALANCE	192[CC]
UNIT_CREDIT_PROFILES	366[CC]	CMF_BALANCE_DETAIL	194[CC]
<i>contract_owing_account_no</i>		GROUP_TYPE_REF	271[A1]
UNIT_CREDIT_PROFILES	367[CC]	PRODUCT_KEY	317[CC]
<i>contract_start_dt</i>		SERVICE_KEY	355[CC]
ETUC_UPDATES	246[CC]	<i>copy_type</i>	
UNIT_CREDIT_PROFILES	367[CC]	BILL_INVOICE	137[CC]
<i>contract_tracking_id</i>		<i>corrected_records</i>	
CDR_DATA_DUC	173[CC]	FILE_STATUS	255[A1]
CMF_BONUS_POINT	196[CC]	<i>corridor_plan_id</i>	
ETUC_UPDATES	246[CC]	CDR_DATA	171[CC]
HISTORIC_CONTRIBUTION	251[CC]	CDR_DATA_WORK	113[A1]
HISTORIC_DISCOUNT_TRANS_MAP	254[CC]	CDR_FREE	179[CC]
HISTORIC_THRESHOLDS	255[CC]	CDR_OUTCOLLECTS	120[A1]
NRC	276[CC]	CORRIDOR_PLAN_GROUPS	164[A1]
NRC_VIEW	282[CC]	CORRIDOR_PLAN_ID_REF	165[A1]
PRODUCT	312[CC]	CORRIDOR_PLAN_ID_VALUES	167[A1]
PRODUCT_VIEW	323[CC]	CUSTOMER_CORRIDORS	230[CC]
RATE_DISCOUNT_OVERRIDES	324[CC]	DISCOUNT_DEFINITIONS	190[A1]
RATE_UNIT_CR_OVERRIDES	326[CC]	RATE_USAGE_OVERRIDES	215[A2]
UNIT_CREDIT_PROFILES	366[CC]	<i>counter</i>	
<i>contract_tracking_id_serv</i>		AMP_CONSTRAINT_TEMP	126[CC]
CDR_DATA_DUC	173[CC]	JNL_TRANS	263[CC]
CMF_BONUS_POINT	196[CC]	PAYMENT_TRANS	304[CC]
ETUC_UPDATES	246[CC]	<i>country_code</i>	
HISTORIC_CONTRIBUTION	251[CC]	ADDRESS	119[CC]
HISTORIC_DISCOUNT_TRANS_MAP	254[CC]	BILL_ADDRESS	59[A1]
HISTORIC_THRESHOLDS	255[CC]	CIBER_ROAMING_AGREEMENT	137[A1]
NRC	276[CC]	CMF_EXEMPT	201[CC]
NRC_VIEW	282[CC]	COUNTRY_CODE_REF	168[A1]
PRODUCT	312[CC]	COUNTRY_CODE_VALUES	169[A1]
PRODUCT_VIEW	323[CC]	COUNTRY_DIAL_CODES	170[A1]
RATE_DISCOUNT_OVERRIDES	324[CC]	GEOCODE_OVERRIDES	264[A1]
RATE_UNIT_CR_OVERRIDES	326[CC]	GSM_ROAMING_AGREEMENT	280[A1]
		LATE_FEE_ASSIGNMENT	44[A2]

LOCAL_ADDRESS	268[CC]	TAX_THRESHOLDS	304[A2]
MASTER_ADDRESS	93[CC]	TCU_DET_REP	363[CC]
MCC_COUNTRY_CODES	64[A2]	ZIPCODE	364[A2]
SERVICE_PROVIDERS_REF	262[A2]	<i>county_rate</i>	
STATE_REF	264[A2]	BILL_INVOICE_TAX	152[CC]
STATE_VALUES	265[A2]	CDR_DATA_TAX	175[CC]
TAX_ASSIGNMENTS	283[A2]	CDR_DATA_WORK_TAX	115[A1]
TAX_OVERRIDES	293[A2]	TAX_OVERRIDES	294[A2]
TAX_THRESHOLDS	303[A2]	<i>county_tax</i>	
TCU_DET_REP	363[CC]	ADJ	122[CC]
USAGE_POINTS	341[A2]	ADJ_TAX	124[CC]
<i>country_code_origin</i>		BILL_INVOICE_DETAIL	148[CC]
CDR_DATA	170[CC]	BILL_INVOICE_TAX	152[CC]
CDR_DATA_WORK	111[A1]	CDR_DATA_TAX	175[CC]
CDR_FREE	177[CC]	CDR_DATA_WORK	112[A1]
CDR_OUTCOLLECTS	118[A1]	CDR_DATA_WORK_TAX	115[A1]
CIBER_INCOLLECTS	130[A1]	CDR_FREE	178[CC]
CIBER_INCOLLECTS_ERROR	133[A1]	CDR_OUTCOLLECTS	119[A1]
CORRIDOR_PLAN_GROUPS	164[A1]	CIBER_INCOLLECTS	127[A1]
COUNTRY_JURISDICTION	171[A1]	CIBER_INCOLLECTS_ERROR	131[A1]
CUSTOMER_CORRIDORS	230[CC]	NRC	276[CC]
USAGE_JURISDICTION	338[A2]	NRC_VIEW	282[CC]
<i>country_code_target</i>		OUTCOLLECT_BATCH_TAX	123[A2]
CDR_DATA	170[CC]	REPORT_INVOICE	344[CC]
CDR_DATA_WORK	111[A1]	<i>cr_note_bill_ref_no</i>	
CDR_FREE	178[CC]	BMF	157[CC]
CDR_OUTCOLLECTS	119[A1]	BMF_UNAPPLIED	163[CC]
CIBER_INCOLLECTS	130[A1]	<i>cr_note_bill_ref_resets</i>	
CIBER_INCOLLECTS_ERROR	133[A1]	BMF	157[CC]
CORRIDOR_PLAN_GROUPS	164[A1]	BMF_UNAPPLIED	164[CC]
COUNTRY_JURISDICTION	171[A1]	<i>create_date</i>	
CUSTOMER_CORRIDORS	230[CC]	BMF_BATCH	160[CC]
USAGE_JURISDICTION	338[A2]	<i>create_dt</i>	
<i>country_dial_code</i>		ACCOUNT_BALANCES	117[CC]
COUNTRY_DIAL_CODES	170[A1]	ACCOUNT_MOVE_STATUS	11[CC]
<i>country_dial_code_origin</i>		ADDRESS	119[CC]
CDR_DATA	170[CC]	AGGR_USAGE_DEFINITIONS_REF	37[A1]
CDR_DATA_WORK	111[A1]	CDR_DATA_DUC	174[CC]
CDR_FREE	177[CC]	CONTACTS	212[CC]
CDR_OUTCOLLECTS	119[A1]	CONTRACT_UNIT_CR	215[CC]
CIBER_INCOLLECTS	130[A1]	CPM_CYCLE_STATUS	217[CC]
CIBER_INCOLLECTS_ERROR	133[A1]	CUSTOMER_CONTRACT_KEY	223[CC]
<i>country_dial_code_target</i>		CUSTOMER_CORRIDORS	230[CC]
CDR_DATA_WORK	111[A1]	CUSTOMER_ID_EQUIP_MAP_KEY	233[CC]
<i>county</i>		EFT_CYCLE_STATUS	240[CC]
ADDRESS	119[CC]	EMF_MASTER_GROUPS	242[CC]
CMF_EXEMPT	201[CC]	ETUC_UPDATES	247[CC]
LOCAL_ADDRESS	269[CC]	EXTERNAL_ID_EQUIP_MAP_KEY	89[CC]
MASTER_ADDRESS	94[CC]	GLOBAL_ACCOUNT_BALANCES	266[A1]
TCU_DET_REP	363[CC]	GROUP_MEMBER	250[CC]
<i>county_code</i>		GROUPS	248[CC]
CMF_EXEMPT	201[CC]	NRC_KEY	278[CC]
GEOCODE_OVERRIDES	264[A1]	ORD_ITEM	289[CC]
LATE_FEE_ASSIGNMENT	44[A2]	ORD_ORDER	293[CC]
TAX_ASSIGNMENTS	283[A2]	ORD_SERVICE_ORDER	295[CC]
TAX_OVERRIDES	293[A2]	OUTCOLLECT_BATCH	120[A2]

PRODUCT_KEY	317[CC]	<i>csr_id</i>	
RATE_AGGR_USAGE	185[A2]	CSR_AUDIT	218[CC]
RATE_CURRENCY	188[A2]	<i>csr_lname</i>	
RATE_DISCOUNT_OVERRIDES	325[CC]	CSR_INFORMATION	173[A1]
RATE_PERIODS	202[A2]	<i>csr_init</i>	
RATE_UNIT_CR_OVERRIDES	327[CC]	CSR_INFORMATION	173[A1]
RATE_USAGE	210[A2]	<i>csr_name</i>	
RATE_USAGE_OVERRIDES	216[A2]	CSR_ACCT_SEG	172[A1]
SDR_EXCHANGE_RATES	252[A2]	<i>csr_phone</i>	
SERVICE_KEY	355[CC]	CSR_INFORMATION	173[A1]
TICKLER	309[A2]	<i>csr_state</i>	
UNIT_CR_RATE_LIMIT	322[A2]	CSR_INFORMATION	173[A1]
UNIT_CR_RATE_LIMIT_KEYS	323[A2]	<i>csr_title</i>	
USAGE_MASTER_FILE_STATUS	368[CC]	CSR_INFORMATION	173[A1]
USAGE_PROCESS_FILE_STATUS	369[CC]	<i>csr_zip</i>	
<i>create_who</i>		CSR_INFORMATION	173[A1]
BMF_BATCH	160[CC]	<i>csup_cr</i>	
ORD_ORDER	292[CC]	JNL_CUSTOM	10[A2]
ORD_SERVICE_ORDER	295[CC]	<i>csup_cr_final</i>	
<i>created_dt</i>		JNL_CUSTOM	10[A2]
JNL_DETAIL	257[CC]	<i>csup_db</i>	
JNL_TRANS	263[CC]	JNL_CUSTOM	10[A2]
<i>creation_date</i>		<i>csup_db_final</i>	
BILL_FILES	132[CC]	JNL_CUSTOM	10[A2]
<i>cred_status</i>		<i>ctrl_file_dir</i>	
CMF	185[CC]	EXT_IPDR_FS_STATUS	244[A1]
<i>credit_rating</i>		<i>ctrl_file_name</i>	
CMF	185[CC]	FILE_STATUS	253[A1]
<i>credit_thresh</i>		<i>ctrl_file_name_policy</i>	
CMF	185[CC]	EXT_IPDR_FS_STATUS	244[A1]
<i>credit_trans_type</i>		<i>ctrl_file_no</i>	
CLEARING_HOUSE_CONTACTS	143[A1]	EXT_IPDR_FS_STATUS	244[A1]
<i>cross_field_name</i>		<i>ctrl_file_prefix</i>	
ATM_FIELD_DEF	50[A1]	EXT_IPDR_FS_STATUS	244[A1]
<i>cross_table_name</i>		<i>ctrl_file_suffix</i>	
ATM_FIELD_DEF	50[A1]	EXT_IPDR_FS_STATUS	244[A1]
<i>csr_action</i>		<i>currency_code</i>	
CSR_AUDIT	218[CC]	ADJ	121[CC]
<i>csr_address1</i>		BILL_INVOICE	136[CC]
CSR_INFORMATION	173[A1]	BMF	157[CC]
<i>csr_address2</i>		BMF_BATCH	160[CC]
CSR_INFORMATION	173[A1]	BMF_DISTRIBUTION	162[CC]
<i>csr_address3</i>		BMF_UNAPPLIED	164[CC]
CSR_INFORMATION	173[A1]	CDR_DATA_DUC	173[CC]
<i>csr_city</i>		CIBER_ROAMING_AGREEMENT	137[A1]
CSR_INFORMATION	173[A1]	CLEARING_HOUSE_DIVISION	145[A1]
<i>csr_country_code</i>		CMF	183[CC]
CSR_INFORMATION	173[A1]	CMF_BALANCE	191[CC]
<i>csr_county</i>		CMF_BALANCE_DETAIL	193[CC]
CSR_INFORMATION	173[A1]	CONTRACT_UNIT_CR	216[CC]
<i>csr_email</i>		DEPOSIT	238[CC]
CSR_INFORMATION	173[A1]	ETUC_UPDATES	247[CC]
<i>csr_fname</i>		GROUP_AMOUNT	269[A1]
CSR_INFORMATION	173[A1]	GSM_ROAMING_AGREEMENT	280[A1]
		HISTORIC_CONTRIBUTION	252[CC]

HISTORIC_THRESHOLDS	255[CC]	<i>currency_code_foreign</i>	
JNL_DETAIL	258[CC]	ROAMING_INVOICE_SUMMARY	237[A2]
JNL_KEYS	24[A2]	ROAMING_TRANSFER_DETAIL	241[A2]
JNL_KEYS_DEFAULT	30[A2]	<i>currency_code_home</i>	
JNL_TRANS	264[CC]	ROAMING_INVOICE_SUMMARY	237[A2]
JNL_WORK_LIST	265[CC]	ROAMING_TRANSFER_DETAIL	241[A2]
JNL_WRITEOFF	266[CC]	<i>currency_code_mask</i>	
LATE_FEE_RATES	46[A2]	JNL_KEYS_MASK	32[A2]
LATE_FEE_TYPES	47[A2]	<i>currency_gain_loss</i>	
LBX_ERROR	48[A2]	BMF_DISTRIBUTION	162[CC]
LBX_POST_DATED	54[A2]	<i>currency_group</i>	
LBX_SOURCE_ID_REF	56[A2]	NRC_TRANS_DESCR	93[A2]
NRC	275[CC]	PRODUCT_ELEMENTS	175[A2]
NRC_TRANS_DESCR	93[A2]	RATE_CURRENCY_GROUP	189[A2]
NRC_VIEW	281[CC]	RATE_CURRENCY_GROUP_REF	190[A2]
OUTCOLLECT_BATCH_DETAIL	121[A2]	RATE_CURRENCY_GROUP_VALUES	191[A2]
OUTCOLLECT_BATCH_TAX	123[A2]	<i>currency_type</i>	
PAYMENT_TRANS	303[CC]	CURRENCY_TYPE_REF	175[A1]
PREPAYMENT	308[CC]	CURRENCY_TYPE_VALUES	176[A1]
PRODUCT_ELEMENTS	175[A2]	RATE_CURRENCY_REF	192[A2]
PRODUCT_RATE_OVERRIDE	319[CC]	<i>current_balance</i>	
PROVIDER_CLASS_REF	180[A2]	AGED_BALANCES	125[CC]
RATE_AGGR_USAGE	184[A2]	REPORT_AGED_BALANCES	335[CC]
RATE_BONUS_POINT	186[A2]	<i>current_flag</i>	
RATE_CURRENCY	188[A2]	ADJ	121[CC]
RATE_CURRENCY_GROUP	189[A2]	<i>current_installment</i>	
RATE_CURRENCY_REF	192[A2]	NRC	276[CC]
RATE_CURRENCY_VALUES	194[A2]	NRC_VIEW	282[CC]
RATE_DISCOUNT	196[A2]	<i>current_rec_no</i>	
RATE_DISCOUNT_OVERRIDES	324[CC]	FILE_STATUS	254[A1]
RATE_LATE_FEE	198[A2]	<i>cust_address1</i>	
RATE_NRC	200[A2]	CMF	184[CC]
RATE_RC	206[A2]	<i>cust_address2</i>	
RATE_UNIT_CR	207[A2]	CMF	184[CC]
RATE_UNIT_CR_OVERRIDES	326[CC]	<i>cust_address3</i>	
RATE_USAGE	210[A2]	CMF	184[CC]
RATE_USAGE_IMPLIED_DECIMALS	214[A2]	<i>cust_bank_acc_num</i>	
RATE_USAGE_OVERRIDES	216[A2]	PAYMENT_PROFILE	300[CC]
RE_CHARGE_MODIFIER	236[A2]	<i>cust_bank_acct_type</i>	
REFUND	331[CC]	PAYMENT_PROFILE	301[CC]
REPORT_ADJ	333[CC]	<i>cust_bank_sort_code</i>	
REPORT_AGED_BALANCES	335[CC]	PAYMENT_PROFILE	300[CC]
REPORT_BED	336[CC]	<i>cust_bill_address</i>	
REPORT_COL_ACT_LIST	339[CC]	PAYMENT_PROFILE	301[CC]
REPORT_DISCOUNT	341[CC]	<i>cust_bill_city</i>	
REPORT_INVOICE	343[CC]	PAYMENT_PROFILE	301[CC]
REPORT_PAY_DETAIL	346[CC]	<i>cust_bill_country_code</i>	
ROAMING_RATE_KEYS	240[A2]	PAYMENT_PROFILE	301[CC]
SDR_EXCHANGE_RATES	252[A2]	<i>cust_bill_state</i>	
SERVICE	350[CC]	PAYMENT_PROFILE	301[CC]
SERVICE_BILLING	352[CC]	<i>cust_bill_zip</i>	
SERVICE_VIEW	358[CC]	PAYMENT_PROFILE	301[CC]
TAX_RATES_VAT	299[A2]	<i>cust_bill_city</i>	
TAX_THRESHOLD_REF	305[A2]	CMF	184[CC]
UNIT_CR_RATE_LIMIT	321[A2]		
UNIT_CREDIT_PROFILES	366[CC]		

<i>cust_company_name</i>			
PAYMENT_PROFILE	301[CC]		
<i>cust_country_code</i>			
CMF	184[CC]		
<i>cust_county</i>			
CMF	184[CC]		
<i>cust_email</i>			
CMF	186[CC]		
PAYMENT_PROFILE	301[CC]		
<i>cust_faxno</i>			
CMF	185[CC]		
<i>cust_franchise_tax_code</i>			
CMF	184[CC]		
<i>cust_geocode</i>			
CMF	184[CC]		
JNL_WORK_LIST	265[CC]		
<i>cust_phone</i>			
PAYMENT_PROFILE	301[CC]		
<i>cust_phone1</i>			
CMF	184[CC]		
SERVER_LOOKUP	99[CC]		
<i>cust_phone2</i>			
CMF	184[CC]		
SERVER_LOOKUP	99[CC]		
<i>cust_state</i>			
CMF	184[CC]		
<i>cust_zip</i>			
CMF	184[CC]		
<i>custdb</i>			
BILLRUN_LIMBOED_ACCTS	51[CC]		
<i>customer_carrier_name_abbr</i>			
SERVICE_PROVIDERS_REF	262[A2]		
<i>customer_order_number</i>			
NRC	275[CC]		
NRC_VIEW	281[CC]		
<i>customer_tag</i>			
CDR_DATA	171[CC]		
CDR_DATA_WORK	112[A1]		
CDR_FREE	178[CC]		
CDR_OUTCOLLECTS	120[A1]		
<i>cutoff_date</i>			
BILL_CYCLE	62[A1]		
<i>cutoff_dt</i>			
OUTCOLLECT_BATCH	120[A2]		
ROAMING_TRANSFER_DETAIL	241[A2]		
<i>cutoff_end_dt</i>			
RPU_WORK	347[CC]		
USAGE_MASTER_FILE_STATUS	368[CC]		
USAGE_PROCESS_FILE_STATUS	369[CC]		
<i>cutoff_start_dt</i>			
RPU_WORK	347[CC]		
USAGE_MASTER_FILE_STATUS	368[CC]		
USAGE_PROCESS_FILE_STATUS	369[CC]		
<i>cycle_expected</i>			
LBX_SOURCE_ID_REF	56[A2]		
<i>cycle_from_date</i>			
REPORT_BILLED_REV	337[CC]		
REPORT_INVOICE	344[CC]		
<i>cycle_id</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>cycle_id_serv</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>cycle_status</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>cycle_type</i>			
PACKAGE_COMPONENT_MEMBERS	128[A2]		
<i>cyclical_bill_used</i>			
PAYMENT_PROFILE	302[CC]		
<i>cyclical_threshold</i>			
CMF	187[CC]		
D			
<i>data_format</i>			
RECORD_FIELD_DEF	221[A2]		
<i>date_active</i>			
ADDRESS	119[CC]		
CMF	186[CC]		
CMF_EXEMPT	200[CC]		
CSR_INFORMATION	173[A1]		
DISCOUNT_DEFINITIONS	189[A1]		
PRODUCT_ELEMENTS	173[A2]		
RATE_BONUS_POINT	186[A2]		
RATE_DISCOUNT	197[A2]		
RATE_LATE_FEE	199[A2]		
RATE_UNIT_CR	207[A2]		
REPORT_ACCT_VOL	332[CC]		
SALES_CHANNEL_REF	250[A2]		
SERVER_LOOKUP	100[CC]		
UNIT_CR_DEFINITIONS	319[A2]		
<i>date_created</i>			
CMF	186[CC]		
DISCOUNT_DEFINITIONS	189[A1]		
PRODUCT_ELEMENTS	173[A2]		
RATE_DISCOUNT	197[A2]		
RATE_LATE_FEE	199[A2]		
RATE_NRC	200[A2]		
RATE_RC	206[A2]		
UNIT_CR_DEFINITIONS	319[A2]		
<i>date_expiration</i>			
CMF_EXEMPT	201[CC]		
<i>date_format</i>			
RAW_USAGE_FIELD_MAPPING	218[A2]		
<i>date_inactive</i>			
ADDRESS	119[CC]		
CMF	187[CC]		
CSR_INFORMATION	173[A1]		
DISCOUNT_DEFINITIONS	189[A1]		
PRODUCT_ELEMENTS	173[A2]		

RATE_BONUS_POINT	186[A2]	<i>default_equip_type_code</i>	
RATE_DISCOUNT	197[A2]	ITEM_MARKETING_DATA_REF	297[A1]
RATE_LATE_FEE	199[A2]	<i>default_external_id_type</i>	
RATE_UNIT_CR	208[A2]	EMF_CONFIG_ID_REF	209[A1]
REPORT_ACCT_VOL	332[CC]	<i>default_id</i>	
SALES_CHANNEL_REF	250[A2]	BSD_APPLICATION_DEFAULTS	55[CC]
SERVER_LOOKUP	100[CC]	<i>default_int</i>	
UNIT_CR_DEFINITIONS	319[A2]	BATCH_TYPE_PARAMETER_REF	45[CC]
<i>date_last_updated</i>		<i>default_jurisdiction</i>	
REPLICATION_TABLES	233[A2]	ITEM_MARKETING_DATA_REF	297[A1]
<i>date_nrc_journalable</i>		<i>default_rate_class</i>	
NRC	275[CC]	ITEM_MARKETING_DATA_REF	297[A1]
NRC_VIEW	281[CC]	<i>default_string</i>	
<i>date_received</i>		BATCH_TYPE_PARAMETER_REF	45[CC]
DEPOSIT	238[CC]	<i>default_template_id</i>	
<i>date_returned</i>		BATCH_TYPE_REF	47[CC]
DEPOSIT	238[CC]	<i>default_type</i>	
<i>daterange_end</i>		RECORD_FIELD_DEF	221[A2]
REPORT_LOOKUP	345[CC]	<i>default_units_type</i>	
<i>daterange_start</i>		ITEM_MARKETING_DATA_REF	297[A1]
REPORT_LOOKUP	345[CC]	<i>default_value</i>	
<i>daylight_savings</i>		BSD_ATTRIBUTE_DEFAULTS	61[CC]
CIBER_INCOLLECTS	128[A1]	EXT_PARAM_TYPE_ASSOC	246[A1]
CIBER_INCOLLECTS_ERROR	132[A1]	RECORD_FIELD_DEF	221[A2]
<i>dayofmonth</i>		<i>delay_origin</i>	
RATE_PERIODS	202[A2]	LATE_FEE_RATES	46[A2]
<i>dayofweek</i>		<i>delay_terminus</i>	
RATE_PERIODS	202[A2]	LATE_FEE_RATES	46[A2]
<i>db_name</i>		<i>delete_order</i>	
PROCESS_SCHED	157[A2]	ACCOUNT_MOVE_TABLES	17[A1]
<i>dcard_val_status</i>		<i>denial_reason</i>	
PAYMENT_TRANS	306[CC]	DENIAL_REASON_REF	178[A1]
<i>dealer_pin</i>		DENIAL_REASON_VALUES	179[A1]
SALES_CHANNEL_REF	249[A2]	<i>depend_id</i>	
<i>debit_trans_type</i>		ARB_TAB_DEPENDS	43[A1]
CLEARING_HOUSE_CONTACTS	143[A1]	<i>dependency_category</i>	
<i>debug_level</i>		ORD_DEPENDENCY_TYPE_REF	102[A2]
PROCESS_SCHED	158[A2]	<i>dependency_id</i>	
<i>declines_amt</i>		DEPENDENCY	180[A1]
CPM_CYCLE_STATUS	217[CC]	<i>dependency_type</i>	
EFT_CYCLE_STATUS	240[CC]	DEPENDENCY	180[A1]
<i>def_order</i>		<i>dependency_type_id</i>	
AGGR_USAGE_DEFINITIONS_REF	37[A1]	ORD_DEPENDENCY_TYPE_REF	102[A2]
DISCOUNT_PLANS	191[A1]	ORD_DEPENDENCY_TYPE_VALUES	103[A2]
UNIT_CR_PLANS	320[A2]	ORD_SERVICE_ORDER_DEPENDENCY	298[CC]
<i>default_blob</i>		<i>dependent_entity_pk</i>	
BATCH_TYPE_PARAMETER_REF	45[CC]	DEPENDENCY	180[A1]
<i>default_class_of_service_code</i>		<i>dependent_entity_type_group_id</i>	
ITEM_MARKETING_DATA_REF	297[A1]	DEPENDENCY	181[A1]
<i>default_currency_code</i>		<i>dependent_entity_type_id</i>	
COUNTRY_CODE_REF	168[A1]	DEPENDENCY	180[A1]
<i>default_date</i>		<i>dependent_service_order_id</i>	
BATCH_TYPE_PARAMETER_REF	45[CC]	ORD_SERVICE_ORDER_DEPENDENCY	298[CC]
<i>default_equip_class_code</i>			
ITEM_MARKETING_DATA_REF	297[A1]		

<i>deposit_amount</i>		<i>device_id_serv</i>	
DEPOSIT	238[CC]	BILL_BATCHES	131[CC]
<i>deposit_dt</i>		BILL_FILES	133[CC]
LBX_ERROR	48[A2]	<i>device_label</i>	
LBX_POST_DATED	54[A2]	BILL_BATCHES	131[CC]
<i>deposit_type</i>		BILL_FILES	133[CC]
DEPOSIT	238[CC]	<i>device_name</i>	
DEPOSIT_TYPE_REF	182[A1]	DEVICES	185[A1]
DEPOSIT_TYPE_VALUES	183[A1]	<i>device_options</i>	
<i>dept</i>		IO_DEVICES	290[A1]
CMF	187[CC]	<i>device_type</i>	
CONTACTS	212[CC]	DEVICES	185[A1]
<i>derive_distance_units</i>		<i>disc_rcv_opt</i>	
USAGE_TYPES	348[A2]	CMF	185[CC]
<i>derive_jurisdiction</i>		<i>disc_total</i>	
USAGE_TYPES	348[A2]	CC_BALANCE	102[A1]
<i>description</i>		<i>disconnect_reason</i>	
BILL_INSERTS	78[A1]	CMF	185[CC]
SYSTEM_MESSAGES	276[A2]	DISCONNECT_REASON_REF	186[A1]
<i>description_code</i>		DISCONNECT_REASON_VALUES	187[A1]
ADJ_TRANS_DESCR	29[A1]	PRODUCT	312[CC]
BILL_INVOICE_DETAIL	146[CC]	PRODUCT_VIEW	322[CC]
BMF_TRANS_DESCR	88[A1]	<i>discount</i>	
CONTRACT_TYPES	161[A1]	BILL_INVOICE_DETAIL	145[CC]
DESCRIPTIONS	184[A1]	CDR_BILLED	168[CC]
DISCOUNT_DEFINITIONS	189[A1]	REPORT_BILLED_REV	337[CC]
EXT_CONTACTS	238[A1]	REPORT_DISCOUNT	341[CC]
JURISDICTIONS	35[A2]	REPORT_INVOICE	343[CC]
NRC_TRANS_DESCR	92[A2]	<i>discount_amount</i>	
NRC_TYPE_GROUPS	94[A2]	BILL_INVOICE_DISCOUNT	151[CC]
PRODUCT_ELEMENTS	172[A2]	RATE_DISCOUNT	197[A2]
PRODUCT_GROUPS	176[A2]	RATE_DISCOUNT_OVERRIDES	325[CC]
PRODUCT_LINES	178[A2]	<i>discount_amt</i>	
RATE_CLASS_DESCR	187[A2]	ADJ	123[CC]
REPORT_ADJ	333[CC]	<i>discount_base_period</i>	
UNIT_CR_DEFINITIONS	319[A2]	CONTRACT_TYPES	161[A1]
USAGE_TYPE_GROUPS	356[A2]	<i>discount_breakout_count</i>	
USAGE_TYPES	345[A2]	BILL_INVOICE_DISCOUNT	151[CC]
<i>description_group</i>		<i>discount_domain</i>	
DESCRIPTIONS	184[A1]	DISCOUNT_DEFINITIONS	188[A1]
<i>description_text</i>		<i>discount_factor</i>	
DESCRIPTIONS	184[A1]	RATE_PERIODS	202[A2]
REPORT_DISCOUNT	341[CC]	<i>discount_id</i>	
<i>designated_tax_amount</i>		BILL_INVOICE_DETAIL	145[CC]
PAYMENT_TRANS	305[CC]	BILL_INVOICE_DISCOUNT	151[CC]
PREPAYMENT	307[CC]	BMF	159[CC]
<i>device_class</i>		CDR_BILLED	168[CC]
DEVICES	185[A1]	CORRIDOR_PLAN_ID_REF	166[A1]
IO_DEVICES	290[A1]	DISCOUNT_DEFINITIONS	188[A1]
<i>device_id</i>		DISCOUNT_PLANS	191[A1]
BILL_BATCHES	131[CC]	DISCOUNT_RESTRICTIONS	193[A1]
BILL_FILES	133[CC]	DISCOUNT_TARGETS	196[A1]
DEVICES	185[A1]	HISTORIC_CONTRIBUTION	251[CC]
IO_DEVICES	290[A1]	HISTORIC_THRESHOLDS	255[CC]
		PREPAYMENT	308[CC]

RATE_DISCOUNT	196[A2]	ADDRESS_CATEGORY_VALUES	22[A1]
RATE_DISCOUNT_OVERRIDES	324[CC]	ADDRESS_TYPE_VALUES	25[A1]
REPORT_INVOICE	343[CC]	ADJ_REASON_CODE_VALUES	27[A1]
<i>discount_id_detail</i>		ADJ_TRANS_GROUP_VALUES	33[A1]
REPORT_DISCOUNT	341[CC]	AGGR_USAGE_DEFINITIONS_VALUES	38[A1]
<i>discount_id_discount</i>		AMP_MODE_VALUES	42[A1]
REPORT_DISCOUNT	341[CC]	ARCH_MODE_VALUES	45[A1]
<i>discount_level</i>		ARCH_TYPE_VALUES	48[A1]
DISCOUNT_DEFINITIONS	188[A1]	ATM_POPLIST_VALUES	52[A1]
<i>discount_percent</i>		BALANCE_XFER_DIFF_VALUES	54[A1]
RATE_DISCOUNT	196[A2]	BAM_ERROR_CODE_VALUES	56[A1]
RATE_DISCOUNT_OVERRIDES	325[CC]	BATCH_CATEGORY_VALUES	13[CC]
<i>discount_quantum</i>		BATCH_INV_SOURCE_VALUES	17[CC]
DISCOUNT_DEFINITIONS	189[A1]	BATCH_NOTIFY_EVENT_TYPE_VALUES	19[CC]
HISTORIC_CONTRIBUTION	252[CC]	BATCH_NOTIFY_TYPE_VALUES	21[CC]
HISTORIC_THRESHOLDS	255[CC]	BATCH_PARTICIPANT_TYPE_VALUES	24[CC]
<i>discount_threshold_tier_id</i>		BATCH_REPORT_TYPE_VALUES	28[CC]
DISCOUNT_THRESH_TIER_ID_REF	198[A1]	BATCH_STATUS_VALUES	41[CC]
DISCOUNT_THRESH_TIER_ID_VALUES	199[A1]	BATCH_TEMPLATE_TYPE_VALUES	44[CC]
<i>discount_type</i>		BATCH_TYPE_PARAMETER_VALUES	46[CC]
DISCOUNT_DEFINITIONS	189[A1]	BATCH_TYPE_STAGE_VALUES	49[CC]
<i>disp_code</i>		BATCH_TYPE_VALUES	50[CC]
CIBER_INCOLLECTS_ERROR	134[A1]	BILL_CLASS_VALUES	61[A1]
<i>disp_status</i>		BILL_DISP_METH_VALUES	64[A1]
CIBER_INCOLLECTS_ERROR	134[A1]	BILL_FMT_OPT_VALUES	66[A1]
<i>dispatch_count</i>		BILL_FMT_SECTION_EXCL_VALUES	68[A1]
BILL_FILES	132[CC]	BILL_FMT_SECTION_TYPE_VALUES	70[A1]
BILL_INVOICE	137[CC]	BILL_FMT_TEMPLATE_CODE_VALUES	72[A1]
BILL_TAPES	155[CC]	BILL_FORMAT_CODE_TYPE_VALUES	74[A1]
REPORT_INVOICE	343[CC]	BILL_PERIOD_VALUES	83[A1]
<i>dispatch_date</i>		BILLING_FREQUENCY_VALUES	58[A1]
BILL_FILES	132[CC]	BONUS_POINT_ID_VALUES	91[A1]
BILL_INVOICE	137[CC]	BONUS_POINT_TRANS_TYPE_VALUES	94[A1]
<i>dispatch_device</i>		BSD_APPLICATION_VALUES	57[CC]
BILL_FILES	132[CC]	BSD_ATTR_CONSTRNT_TYPE_VALUES	64[CC]
<i>dispatch_status</i>		BSD_BUSINESS_UNIT_VALUES	66[CC]
BILL_FILES	132[CC]	BSD_CONSTRAINT_DESC_VALUES	68[CC]
<i>dispatch_task</i>		BSD_REL_CONSTRNT_TYPE_VALUES	86[CC]
BILL_FILES	132[CC]	CARD_TYPE_CODE_VALUES	98[A1]
<i>dispatch_type</i>		CCARD_RESPONSE_CODE_VALUES	101[A1]
BILL_BATCHES	131[CC]	CDR_ADJ_ERROR_VALUES	105[A1]
<i>display_address_id</i>		CDR_COMP_STATUS_VALUES	108[A1]
SERVICE_KEY	355[CC]	CELL_ID_VALUES	123[A1]
<i>display_ciem_view_id</i>		CLASS_OF_SERVICE_CODE_VALUES	142[A1]
SERVICE_KEY	355[CC]	CLEARING_HOUSE_ID_VALUES	147[A1]
<i>display_external_id_type</i>		CMF_ACCOUNT_CODE_GROUPS	190[CC]
SERVICE	350[CC]	CMF_ACCOUNT_CODES	189[CC]
SERVICE_VIEW	359[CC]	CMF_STATUS_CHG_REASON_VALUES	151[A1]
<i>display_type</i>		CMF_STATUS_VALUES	153[A1]
BILL_FORMAT_DISPLAY_TYPES	75[A1]	COMPONENT_DEFINITION_VALUES	155[A1]
<i>display_value</i>		CONNECT_REASON_CODES_VALUES	158[A1]
ABI_SOURCE_VALUES	12[A1]	CORRIDOR_PLAN_ID_VALUES	167[A1]
ACCESS_REGION_VALUES	14[A1]	COUNTRY_CODE_VALUES	169[A1]
ACCOUNT_CATEGORY_VALUES	16[A1]	CURRENCY_TYPE_VALUES	176[A1]
ACCT_SEG_VALUES	20[A1]	DENIAL_REASON_VALUES	179[A1]
		DEPOSIT_TYPE_VALUES	183[A1]
		DISCONNECT_REASON_VALUES	187[A1]

DISCOUNT_THRESH_TIER_ID_VALUES	199[A1]	PACKAGE_GROUP_VALUES	132[A2]
DISTANCE_BANDS_ID_VALUES	202[A1]	PARAM_VALUES	135[A2]
EFT_RESPONSE_CODE_VALUES	206[A1]	PAYMENT_MERCHANT_ID_VALUES	142[A2]
EMF_CONFIG_ID_VALUES	210[A1]	PLAN_ID_CREDIT_VALUES	144[A2]
EMF_STATUS_CHG_REASON_VALUES	212[A1]	PLAN_ID_DISCOUNT_VALUES	146[A2]
EMF_STATUS_VALUES	214[A1]	POINT_CATEGORY_VALUES	148[A2]
EMF_SUSPENSION_REASON_VALUES	216[A1]	POINT_CLASS_VALUES	150[A2]
ENTITY_TYPE_GROUP_VALUES	219[A1]	POINT_REGION_VALUES	152[A2]
ENTITY_TYPE_VALUES	222[A1]	PRIVACY_LEVEL_VALUES	154[A2]
EQUIP_CLASS_CODE_VALUES	227[A1]	PROVIDER_CLASS_VALUES	181[A2]
EQUIP_TYPE_CODE_VALUES	229[A1]	RATABLE_UNIT_CLASS_VALUES	183[A2]
EXRATE_CLASS_VALUES	233[A1]	RATE_CURRENCY_GROUP_VALUES	191[A2]
EXT_ACCESS_METHOD_VALUES	237[A1]	RATE_CURRENCY_VALUES	194[A2]
EXT_SOURCE_ID_VALUES	248[A1]	RATE_PERIOD_VALUES	204[A2]
EXT_SOURCE_TYPE_VALUES	250[A1]	RECORD_TYPE_VALUES	228[A2]
EXTERNAL_ID_TYPE_VALUES	235[A1]	REFUND_REASON_CODE_VALUES	230[A2]
FILE_TYPE_VALUES	257[A1]	REGULATORY_ID_VALUES	232[A2]
FRANCHISE_CODE_VALUES	259[A1]	REPORT_ADJ	334[CC]
GENDER_VALUES	261[A1]	REPORT_PAY_DETAIL	346[CC]
GENERIC_ENUMERATION_VALUES	263[A1]	REV_RCV_COST_CENTER_VALUES	235[A2]
GROUP_TYPE_VALUES	272[A1]	ROAMING_OPERATOR_VALUES	239[A2]
GRS_ACTION_VALUES	276[A1]	RT_PAYMENT_RESP_VALUES	248[A2]
GRS_OPERATION_VALUES	278[A1]	SALES_CHANNEL_VALUES	251[A2]
GUI_INDICATOR_VALUES	282[A1]	SERVER_CATEGORY_VALUES	255[A2]
INDUSTRY_TYPE_VALUES	285[A1]	SERVICE_CENTER_TYPE_VALUES	260[A2]
INSERT_FOREIGN_KEY_VALUES	287[A1]	SERVICE_PROVIDERS_VALUES	263[A2]
INSERT_GRP_ID_VALUES	289[A1]	STATE_VALUES	265[A2]
ITEM_CATEGORY_VALUES	292[A1]	STATUS_REASON_VALUES	268[A2]
ITEM_MARKETING_DATA_VALUES	298[A1]	STATUS_TYPE_VALUES	272[A2]
JNL_CUSTOM	10[A2]	STATUS_VALUES	273[A2]
JNL_EMF_BOOK_VALUES	13[A2]	SUSPENDED_REASON_VALUES	275[A2]
JURISDICTION_CLASS_VALUES	37[A2]	TAX_PKG_INST_ID_VALUES	298[A2]
KEY_DOMAIN_SYMBOL_VALUES	40[A2]	TAX_STATUS_VALUES	302[A2]
LANGUAGE_CODE_VALUES	43[A2]	TAX_THRESHOLD_VALUES	306[A2]
LBX_ERROR_STATUS_VALUES	51[A2]	TAX_TYPE_COMM_VALUES	308[A2]
LBX_SOURCE_ID_VALUES	57[A2]	TIMEZONE_VALUES	311[A2]
LOCATION_CODE_VALUES	61[A2]	TRANS_SOURCE_VALUES	314[A2]
MKT_CODE_VALUES	66[A2]	UNITS_TYPE_VALUES	317[A2]
MOBILE_ZONE_TYPE_VALUES	70[A2]	USAGE_FILE_CLASS_VALUES	328[A2]
MOBILE_ZONE_VALUES	71[A2]	USAGE_POINTS_TEXT	343[A2]
MSG_GRP_ID_VALUES	73[A2]	VIP_CODE_VALUES	359[A2]
MSG_TRIGGER_ID_VALUES	75[A2]	XFER_REASON_CODES_VALUES	363[A2]
NET_ACTION_VALUES	77[A2]	ZONE_CLASS_VALUES	366[A2]
NET_INTERFACE_VALUES	81[A2]	ZONE_VALUES	368[A2]
NOTE_REASON_VALUES	83[A2]	<i>dispute_amt</i>	
NOTE_TEMPLATE_VALUES	85[A2]	CMF_BALANCE	192[CC]
NOTE_TYPE_VALUES	88[A2]	CMF_BALANCE_DETAIL	194[CC]
NRC_LINE_VALUES	90[A2]	REPORT_COL_ACT_LIST	339[CC]
OPEN_ITEM_ID_VALUES	96[A2]	<i>distance_band_id</i>	
ORD_DEPENDENCY_TYPE_VALUES	103[A2]	DISTANCE_BANDS	200[A1]
ORD_ITEM_ACTION_VALUES	107[A2]	DISTANCE_BANDS_ID_REF	201[A1]
ORD_ITEM_MEMBER_TYPE_VALUES	109[A2]	DISTANCE_BANDS_ID_VALUES	202[A1]
ORD_ITEM_TYPE_VALUES	114[A2]	RATE_USAGE	210[A2]
ORD_ORDER_STATUS_VALUES	116[A2]	RATE_USAGE_OVERRIDES	216[A2]
ORD_SERVICE_ORDER_TYPE_VALUES	118[A2]	<i>distance_increment</i>	
OWNING_COST_CTR_VALUES	125[A2]	RATE_RC	206[A2]
PACKAGE_DEFINITION_VALUES	130[A2]		

<i>distance_rate</i>		<i>dom_rcon_number</i>	
RATE_RC	206[A2]	CLEARING_HOUSE_INFO	149[A1]
<i>distance_units_indicator</i>		<i>dom_visa_dest</i>	
USAGE_TYPES	348[A2]	CLEARING_HOUSE_INFO	149[A1]
<i>distinct_flag</i>		<i>dom_visa_merchant</i>	
ACCOUNT_MOVE_TABLES	17[A1]	CLEARING_HOUSE_INFO	149[A1]
<i>distr_chan</i>		<i>dom_visa_orig</i>	
CMF	186[CC]	CLEARING_HOUSE_INFO	149[A1]
<i>distrib_order</i>		<i>domain_description</i>	
BMF_DISTRIBUTION	161[CC]	KEY_DOMAIN	38[A2]
PREPAYMENT_DISTRIBUTION	310[CC]	<i>domain_id</i>	
<i>distribute_payback</i>		DISCOUNT_DEFINITIONS	189[A1]
CUSTOMER_CONTRACT	220[CC]	KEY_DOMAIN	38[A2]
CUSTOMER_CONTRACT_VIEW	226[CC]	KEY_DOMAIN_SYMBOL_REF	39[A2]
<i>distributed_amount</i>		KEY_DOMAIN_SYMBOL_VALUES	40[A2]
BMF	159[CC]	UNIT_CR_DEFINITIONS	319[A2]
CMF_BONUS_POINT	197[CC]	<i>domain_type</i>	
<i>distributed_gl_amount</i>		KEY_DOMAIN	38[A2]
BMF	159[CC]	<i>down_reason_code</i>	
<i>division</i>		SERVER_DEFINITION	98[CC]
TAX_CHARGE_ELEMENTS	286[A2]	<i>down_set_by</i>	
<i>division_number</i>		SERVER_DEFINITION	98[CC]
CLEARING_HOUSE_DIVISION	145[A1]	<i>down_since_dt</i>	
<i>dom_amex_format_code</i>		SERVER_DEFINITION	98[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>driver_license_num</i>	
<i>dom_amex_merchant</i>		PAYMENT_PROFILE	301[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>driver_license_state</i>	
<i>dom_amex_process_id</i>		PAYMENT_PROFILE	301[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>ds_database</i>	
<i>dom_amex_receiver_id</i>		LOCAL_SERVER_ID	59[A2]
CLEARING_HOUSE_INFO	149[A1]	SERVER_DEFINITION	98[CC]
<i>dom_batch_limit</i>		<i>dsquery</i>	
CLEARING_HOUSE_INFO	149[A1]	LOCAL_SERVER_ID	59[A2]
<i>dom_currency_ind</i>		SERVER_DEFINITION	98[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>dt_chg_field</i>	
<i>dom_fund_acct_num</i>		REPLICATION_TABLES	233[A2]
CLEARING_HOUSE_INFO	149[A1]	<i>duc_id</i>	
<i>dom_fund_dest</i>		CDR_DATA_DUC	173[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>duc_plan_id</i>	
<i>dom_fund_inst_id</i>		CDR_DATA_DUC	173[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>duc_subtype</i>	
<i>dom_fund_orig</i>		CDR_DATA_DUC	173[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>duc_type</i>	
<i>dom_mailbox_id</i>		CDR_DATA_DUC	173[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>due_date</i>	
<i>dom_msc_dest</i>		BILL_IMAGE	134[CC]
CLEARING_HOUSE_INFO	149[A1]	<i>due_dt</i>	
<i>dom_msc_merchant</i>		TICKLER	309[A2]
CLEARING_HOUSE_INFO	149[A1]	<i>duration</i>	
<i>dom_msc_orig</i>		CONTRACT_TYPES	160[A1]
CLEARING_HOUSE_INFO	149[A1]	PACKAGE_COMPONENT_MEMBERS	127[A2]
<i>dom_phone_dest</i>		PROCESS_WORK	162[A2]
CLEARING_HOUSE_INFO	149[A1]	<i>duration_flag</i>	
		USAGE_TYPES	348[A2]

<i>duration_override</i>			
CUSTOMER_CONTRACT	221	[CC]	
CUSTOMER_CONTRACT_VIEW	227	[CC]	
<i>duration_units</i>			
CONTRACT_TYPES	160	[A1]	
ORD_SERVICE_ORDER_WORKFLOW_MAP	119	[A2]	
E			
<i>e_external_id</i>			
REPORT_EQUIP_VOL	342	[CC]	
<i>edit_table</i>			
RECORD_FIELD_DEF	221	[A2]	
<i>edit_table_field</i>			
RECORD_FIELD_DEF	221	[A2]	
<i>edit_table_field_type</i>			
RECORD_FIELD_DEF	221	[A2]	
<i>edit_type</i>			
RECORD_FIELD_DEF	221	[A2]	
<i>effective_date</i>			
ADJ	121	[CC]	
HISTORIC_CONTRIBUTION	252	[CC]	
NRC	275	[CC]	
NRC_VIEW	281	[CC]	
ORD_ITEM_ROUTE	110	[A2]	
XFER_HISTORY	105	[CC]	
<i>effective_dt</i>			
JNL_DETAIL	257	[CC]	
XFER_STATUS	371	[CC]	
<i>eft_debit_proc_trans_id</i>			
PAYMENT_TRANS	305	[CC]	
<i>eft_event_type</i>			
EFT_RESPONSE_CODE_REF	205	[A1]	
<i>eiem_view_id</i>			
ORD_ITEM_MAP	96	[CC]	
<i>element_id</i>			
BILL_FORMAT_TEMPLATE	77	[A1]	
BILL_INVOICE_DETAIL	146	[CC]	
CC_VANITY_CODE_CHARGE_MAP	103	[A1]	
CDR_DATA	169	[CC]	
CDR_DATA_WORK	110	[A1]	
CDR_FREE	177	[CC]	
CDR_OUTCOLLECTS	118	[A1]	
CONTRACT_TYPES	160	[A1]	
CUSTOMER_CONTRACT	221	[CC]	
CUSTOMER_CONTRACT_VIEW	227	[CC]	
DISCOUNT_DEFINITIONS	189	[A1]	
DISTANCE_BANDS	200	[A1]	
GRS_ACTION_OPERATIONS	274	[A1]	
JNL_DETAIL	257	[CC]	
JNL_KEYS	24	[A2]	
JNL_KEYS_DEFAULT	30	[A2]	
JNL_TRANS	264	[CC]	
NRC	275	[CC]	
NRC_TRANS_DESCR	91	[A2]	
NRC_VIEW	281	[CC]	
PRODUCT	312	[CC]	
PRODUCT_ELEMENTS	172	[A2]	
PRODUCT_JURISDICTION	177	[A2]	
PRODUCT_VIEW	322	[CC]	
PROVIDER_CLASS_REF	180	[A2]	
RATE_NRC	200	[A2]	
RATE_PERIODS	202	[A2]	
RATE_RC	205	[A2]	
RATE_USAGE	210	[A2]	
RATE_USAGE_OVERRIDES	215	[A2]	
REPORT_BED	336	[CC]	
ROAMING_RATE_KEYS	240	[A2]	
SERVICE_ZONE	361	[CC]	
UNIT_CR_DEFINITIONS	319	[A2]	
USAGE_JURISDICTION	337	[A2]	
USAGE_TYPES	347	[A2]	
USAGE_TYPES_SPLIT	354	[A2]	
<i>element_id_mask</i>			
JNL_KEYS_MASK	32	[A2]	
<i>elig_key1</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>elig_key2</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>elig_key3</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>email_msg</i>			
SERVICE_CENTERS	256	[A2]	
<i>emf_book_id</i>			
EMF_CONFIGURATION	207	[A1]	
JNL_DETAIL	258	[CC]	
JNL_EMF_BOOK_REF	12	[A2]	
JNL_EMF_BOOK_VALUES	13	[A2]	
JNL_TRANS	264	[CC]	
<i>emf_config_id</i>			
EMF_CONFIG_ADDR_CATEGORY_MAP	208	[A1]	
EMF_CONFIG_ID_REF	209	[A1]	
EMF_CONFIG_ID_VALUES	210	[A1]	
EMF_CONFIGURATION	207	[A1]	
NET_INTERFACE_ELIGIBILITY	79	[A2]	
ORD_SERVICE_ORDER	296	[CC]	
ORD_SERVICE_ORDER_WORKFLOW_MAP	119	[A2]	
SERVICE	350	[CC]	
SERVICE_ADDRESS_ASSOC	101	[CC]	
SERVICE_VIEW	359	[CC]	
XFER_NRC	360	[A2]	
<i>emf_status</i>			
EMF_STATUS_REF	213	[A1]	
EMF_STATUS_VALUES	214	[A1]	
<i>emf_status_chg_reason</i>			
EMF_STATUS_CHG_REASON_REF	211	[A1]	
EMF_STATUS_CHG_REASON_VALUES	212	[A1]	
<i>emf_suspension_reason</i>			
EMF_SUSPENSION_REASON_REF	215	[A1]	
EMF_SUSPENSION_REASON_VALUES	216	[A1]	

<i>emf_type</i>			
EMF_CONFIGURATION	207[A1]		
<i>end_date</i>			
ADJ	121[CC]		
REFINANCE_PLAN	329[CC]		
<i>end_dt</i>			
CONTRACT_ASSIGNMENTS_HQ	213[CC]		
CUSTOMER_CONTRACT	220[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
<i>end_offset</i>			
BILL_INVOICE	137[CC]		
<i>end_time</i>			
DEVICES	185[A1]		
PROCESS_RUN	156[A2]		
PROCESS_WORK	162[A2]		
PROCESS_WORK_STATUS_DEF	170[A2]		
<i>endhmm</i>			
RATE_PERIODS	202[A2]		
<i>entity_attribute_name</i>			
ENTITY_TYPE_REF	220[A1]		
<i>entity_column_name</i>			
ENTITY_TYPE_REF	220[A1]		
<i>entity_object_name</i>			
ENTITY_TYPE_REF	220[A1]		
<i>entity_pk</i>			
DEPENDENCY	180[A1], 217[A1]		
ENTITY_TYPE_GROUP_MEMBER	217[A1]		
TMP_ENTITY	103[CC]		
TMP_PENDING	104[CC]		
<i>entity_pk1</i>			
EXCLUSION	231[A1]		
<i>entity_pk2</i>			
EXCLUSION	231[A1]		
<i>entity_table_name</i>			
ENTITY_TYPE_REF	220[A1]		
<i>entity_type</i>			
EXT_PARAM_TYPE_ASSOC	246[A1]		
<i>entity_type_group_id</i>			
DEPENDENCY	181[A1]		
ENTITY_TYPE_GROUP_MEMBER	217[A1]		
ENTITY_TYPE_GROUP_REF	218[A1]		
ENTITY_TYPE_GROUP_VALUES	219[A1]		
TMP_ENTITY	103[CC]		
<i>entity_type_id</i>			
DEPENDENCY	180[A1], 217[A1]		
ENTITY_TYPE_GROUP_MEMBER	217[A1]		
ENTITY_TYPE_REF	220[A1]		
ENTITY_TYPE_VALUES	222[A1]		
TMP_ENTITY	103[CC]		
TMP_PENDING	104[CC]		
<i>entity_type_id1</i>			
EXCLUSION	231[A1]		
<i>entity_type_id2</i>			
EXCLUSION	231[A1]		
<i>entry_create_dt</i>			
FILE_STATUS	254[A1]		
USAGE_FILE_INSERTS	331[A2]		
USAGE_FILE_STATUS	334[A2]		
USAGE_FILE_STATUS_HISTORY	335[A2]		
<i>entry_date</i>			
CMF_BONUS_POINT	197[CC]		
CSR_AUDIT	218[CC]		
<i>enumeration_id</i>			
ENUMERATION_DEF	223[A1]		
<i>enumeration_key</i>			
ENUMERATION_DEF	223[A1]		
GENERIC_ENUMERATION_REF	262[A1]		
GENERIC_ENUMERATION_VALUES	263[A1]		
<i>enumeration_name</i>			
ENUMERATION_DEF	223[A1]		
<i>enumeration_sort_basis</i>			
ENUMERATION_DEF	223[A1]		
<i>enumeration_sort_order</i>			
ENUMERATION_DEF	223[A1]		
<i>env_var_name</i>			
BATCH_EXECUTABLE_ENV	15[CC]		
<i>env_var_value</i>			
BATCH_EXECUTABLE_ENV	15[CC]		
<i>epg_card_type</i>			
CARD_TYPE_CODE_REF	97[A1]		
<i>epg_flag</i>			
PAYMENT_TRANS	305[CC]		
<i>epg_merchant_id</i>			
PAYMENT_MERCHANT_ID_REF	141[A2]		
<i>epg_message</i>			
PAYMENT_TRANS	305[CC]		
<i>epg_transaction_id</i>			
PAYMENT_TRANS	305[CC]		
<i>epg_type</i>			
RT_PAYMENT_RESP_REF	247[A2]		
RT_PAYMENT_RESP_VALUES	248[A2]		
<i>equip_class_code</i>			
BILL_FORMAT_TEMPLATE	77[A1]		
CDR_DATA	172[CC]		
EMF_CONFIGURATION	207[A1]		
EQUIP_CLASS_CODE_REF	226[A1]		
EQUIP_CLASS_CODE_VALUES	227[A1]		
PROVIDER_CLASS_REF	180[A2]		
RATE_NRC	200[A2]		
RATE_PERIODS	202[A2]		
RATE_RC	206[A2]		
RATE_USAGE	210[A2]		
RATE_USAGE_OVERRIDES	216[A2]		
ROAMING_RATE_KEYS	240[A2]		
SERVICE_BILLING	352[CC]		
UNIT_CR_RATE_LIMIT	321[A2]		
USAGE_JURISDICTION	337[A2]		
USAGE_TYPES_SPLIT	354[A2]		
USAGE_TYPES_UNITS	355[A2]		

<i>equip_status</i>			
BILL_INVOICE_DETAIL	147[CC]		
REPORT_EQUIP_VOL	342[CC]		
<i>equip_status_dt</i>			
REPORT_EQUIP_VOL	342[CC]		
<i>equip_type_code</i>			
BILL_FORMAT_TEMPLATE	77[A1]		
EMF_CONFIGURATION	207[A1]		
EQUIP_TYPE_CODE_REF	228[A1]		
EQUIP_TYPE_CODE_VALUES	229[A1]		
PROVIDER_CLASS_REF	180[A2]		
RATE_NRC	200[A2]		
RATE_PERIODS	202[A2]		
RATE_RC	206[A2]		
RATE_USAGE	210[A2]		
RATE_USAGE_OVERRIDES	216[A2]		
ROAMING_RATE_KEYS	240[A2]		
SERVICE_BILLING	352[CC]		
USAGE_JURISDICTION	337[A2]		
USAGE_TYPES_SPLIT	354[A2]		
USAGE_TYPES_UNITS	355[A2]		
<i>error_category</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
<i>error_code</i>			
CIBER_FLD_ERROR_CODES	126[A1]		
EPR_ERROR	225[A1]		
EXT_CONTACTS_STATUS	241[A1]		
FILE_STATUS	254[A1]		
LBX_ERROR	48[A2]		
LBX_FILE_STATUS	52[A2]		
LBX_POST_DATED	55[A2]		
USAGE_FILE_STATUS	333[A2]		
USAGE_FILE_STATUS_HISTORY	335[A2]		
<i>error_code1</i>			
CIBER_INCOLLECTS_ERROR	134[A1]		
<i>error_code2</i>			
CIBER_INCOLLECTS_ERROR	134[A1]		
<i>error_code3</i>			
CIBER_INCOLLECTS_ERROR	134[A1]		
<i>error_data</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
<i>error_desc</i>			
ERROR_BILL	245[CC]		
JNL_ERRORS	260[CC]		
<i>error_id</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
<i>error_message</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
<i>error_name</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
<i>error_threshold</i>			
BATCH_REQUEST	29[CC]		
BATCH_TYPE_STAGE_REF	48[CC]		
<i>errored</i>			
PROCESS_WORK	162[A2]		
PROCESS_WORK_STATUS	167[A2]		
<i>errored_name</i>			
PROCESS_WORK_CARDINAL_VALUES	164[A2]		
<i>errored_rate</i>			
PROCESS_WORK	162[A2]		
PROCESS_WORK_STATUS	168[A2]		
<i>eval_order</i>			
ORD_CONDITION	98[A2]		
ORD_CONDITION_EXPRESSION	99[A2]		
<i>evaluated</i>			
HISTORIC_CONTRIBUTION	252[CC]		
<i>evaluated_date</i>			
HISTORIC_CONTRIBUTION	252[CC]		
HISTORIC_DISCOUNT_TRANS_MAP	254[CC]		
<i>event</i>			
REPORT_COL	338[CC]		
REPORT_COL_ACT_LIST	339[CC]		
<i>event_no</i>			
REPORT_COL	338[CC]		
REPORT_COL_ACT_LIST	339[CC]		
<i>exception_dictionary</i>			
BSD_EXCEPTION	166[CC]		
<i>exception_id</i>			
BSD_EXCEPTION	166[CC]		
ORD_SERVICE_ORDER	296[CC]		
<i>exception_name</i>			
BSD_EXCEPTION	166[CC]		
BSD_QUEUE_AUTO_RETRY	76[CC]		
<i>exceptions_amt</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>exch_rate_exp</i>			
SDR_EXCHANGE_RATES	252[A2]		
<i>exchange_rate</i>			
RATE_CURRENCY	188[A2]		
<i>exclude</i>			
CONTRACT_ASSIGNMENTS_HQ	214[CC]		
<i>exclude_charge</i>			
TAX_PKG_INST_ID_REF	296[A2]		
<i>exclude_group</i>			
USAGE_JURISDICTION	338[A2]		
<i>exclusion_id</i>			
EXCLUSION	231[A1]		
<i>executable_id</i>			
BATCH_EXECUTABLE	14[CC]		
BATCH_EXECUTABLE_ENV	15[CC]		
<i>executable_path</i>			
BATCH_EXECUTABLE	14[CC]		
<i>execute_executable_id</i>			
BATCH_TYPE_STAGE_REF	48[CC]		
<i>execution_dt</i>			
MCAP_RUN_DATE	63[A2]		
<i>exempt_city</i>			
CMF_EXEMPT	201[CC]		

<i>exempt_county</i>		GSM_ROAMING_AGREEMENT	280[A1]
CMF_EXEMPT	201[CC]	<i>ext_ebcdic</i>	
<i>exempt_federal</i>		EXT_CONTACTS	239[A1]
CMF_EXEMPT	201[CC]	<i>ext_file_id</i>	
<i>exempt_other</i>		FILE_STATUS	253[A1]
CMF_EXEMPT	201[CC]	LBX_FILE_STATUS	52[A2]
<i>exempt_state</i>		<i>ext_id_type</i>	
CMF_EXEMPT	201[CC]	TAP_MAPPING	282[A2]
<i>expedite_flag</i>		<i>ext_tracking_id</i>	
ORD_SERVICE_ORDER	296[CC]	CDR_DATA	169[CC]
<i>expiration_bill_ref_no</i>		CDR_DATA_WORK	110[A1]
CMF_BONUS_POINT	197[CC]	CDR_FREE	177[CC]
<i>expiration_bill_ref_resets</i>		CDR_OUTCOLLECTS	118[A1]
CMF_BONUS_POINT	197[CC]	CIBER_INCOLLECTS	127[A1]
<i>expiration_date</i>		CIBER_INCOLLECTS_ERROR	131[A1]
CMF_BONUS_POINT	197[CC]	<i>extended_postal_code</i>	
EFT_CONTROL	204[A1]	LOCAL_ADDRESS	268[CC]
<i>expr_id</i>		MASTER_ADDRESS	93[CC]
ORD_CONDITION_EXPRESSION	99[A2]	<i>external_address_id</i>	
ORD_EXPRESSION	104[A2]	LOCAL_ADDRESS	269[CC]
<i>expression</i>		MASTER_ADDRESS	94[CC]
BSD_ATTRIBUTE_CONSTRAINTS	59[CC]	<i>external_amount</i>	
BSD_RELATIONAL_CONSTRAINTS	80[CC]	BMF	159[CC]
<i>exrate_class</i>		BMF_UNAPPLIED	165[CC]
CMF	186[CC]	LBX_ERROR	49[A2]
EXRATE_CLASS_REF	232[A1]	LBX_POST_DATED	55[A2]
EXRATE_CLASS_VALUES	233[A1]	<i>external_currency</i>	
RATE_CURRENCY	188[A2]	BMF	159[CC]
SERVICE	350[CC]	BMF_UNAPPLIED	165[CC]
SERVICE_BILLING	352[CC]	LBX_ERROR	49[A2]
SERVICE_VIEW	359[CC]	LBX_POST_DATED	55[A2]
<i>ext_category</i>		<i>external_date</i>	
LBX_PAYMENT_TYPES	53[A2]	CMF_BONUS_POINT	197[CC]
<i>ext_client_id</i>		<i>external_id</i>	
EXT_CONTACTS	238[A1]	CDR_DATA	169[CC]
<i>ext_contact_id</i>		CDR_DATA_WORK	110[A1]
CLEARING_HOUSE_CONTACTS	143[A1]	CDR_FREE	177[CC]
EXT_CONTACTS	238[A1]	CDR_OUTCOLLECTS	118[A1]
EXT_CONTACTS_STATUS	241[A1]	CMF_BALANCE_DETAIL	194[CC]
EXT_FTP_ACCESS	242[A1]	CUSTOMER_ID_ACCT_MAP	231[CC]
EXT_IPDR_FS_ACCESS	243[A1]	CUSTOMER_ID_EQUIP_MAP	232[CC]
EXT_IPDR_FS_STATUS	244[A1]	CUSTOMER_ID_EQUIP_MAP_KEY	233[CC]
EXT_LOCAL_DIR_ACCESS	245[A1]	CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]
FILE_STATUS	253[A1]	CUSTOMER_ID_GROUP_MAP	236[CC]
SERVICE_PROVIDERS_REF	262[A2]	EXTERNAL_ID_ACCT_MAP	87[CC]
USAGE_FILE_INSERTS	331[A2]	EXTERNAL_ID_EQUIP_MAP	88[CC]
USAGE_FILE_STATUS	333[A2]	EXTERNAL_ID_EQUIP_MAP_KEY	89[CC]
USAGE_FILE_STATUS_HISTORY	335[A2]	EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]
<i>ext_contact_id_in</i>		EXTERNAL_ID_GROUP_MAP	92[CC]
CIBER_OPERATOR_SID_BID	136[A1]	LBX_ERROR	49[A2]
CIBER_ROAMING_AGREEMENT	138[A1]	LBX_POST_DATED	55[A2]
GSM_ROAMING_AGREEMENT	280[A1]	REPORT_ACCT_VOL	332[CC]
<i>ext_contact_id_out</i>		REPORT_COL	338[CC]
CIBER_OPERATOR_SID_BID	136[A1]	REPORT_COL_ACT_LIST	339[CC]
CIBER_ROAMING_AGREEMENT	138[A1]	<i>external_id_type</i>	
		CDR_DATA	169[CC]

CDR_DATA_WORK	110[A1]	REPORT_INVOICE	344[CC]
CDR_FREE	177[CC]	<i>fee_amount</i>	
CDR_OUTCOLLECTS	118[A1]	RATE_LATE_FEE	199[A2]
CUSTOMER_ID_ACCT_MAP	231[CC]	<i>fee_class</i>	
CUSTOMER_ID_EQUIP_MAP	232[CC]	RATE_LATE_FEE	198[A2]
CUSTOMER_ID_EQUIP_MAP_KEY	233[CC]	<i>fee_percent</i>	
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]	RATE_LATE_FEE	198[A2]
CUSTOMER_ID_GROUP_MAP	236[CC]	<i>field_category</i>	
EXTERNAL_ID_ACCT_MAP	87[CC]	RECORD_FIELD_DEF	220[A2]
EXTERNAL_ID_EQUIP_MAP	88[CC]	<i>field_db_name_from</i>	
EXTERNAL_ID_EQUIP_MAP_KEY	89[CC]	RECORD_FIELD_MAP	223[A2]
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]	<i>field_db_name_to</i>	
EXTERNAL_ID_GROUP_MAP	92[CC]	RECORD_FIELD_MAP	223[A2]
EXTERNAL_ID_TYPE_REF	234[A1]	<i>field_delimiter_char</i>	
EXTERNAL_ID_TYPE_VALUES	235[A1]	RECORD_TYPE_REF	226[A2]
LBX_ERROR	49[A2]	<i>field_delimiter_code</i>	
LBX_POST_DATED	55[A2]	RECORD_TYPE_REF	226[A2]
PRODUCT_ELEMENTS	174[A2]	<i>field_format</i>	
<i>external_status</i>		PAYMENT_FILE_DETAIL	137[A2]
OUTCOLLECT_BATCH	120[A2]	PAYMENT_FILE_HEADER	138[A2]
<i>external_trans_id</i>		PAYMENT_FILE_TRAILER	139[A2]
CMF_BONUS_POINT	197[CC]	<i>field_from_name</i>	
<i>external_trans_info</i>		RAW_USAGE_FIELD_MAPPING	217[A2]
CMF_BONUS_POINT	197[CC]	<i>field_from_pos</i>	
<i>external_trans_msg</i>		RAW_USAGE_FIELD_MAPPING	217[A2]
CMF_BONUS_POINT	197[CC]	<i>field_from_size</i>	
F		RAW_USAGE_FIELD_MAPPING	217[A2]
<i>fax_msg</i>		<i>field_from_type</i>	
SERVICE_CENTERS	256[A2]	RAW_USAGE_FIELD_MAPPING	217[A2]
<i>fdm_avs_type</i>		<i>field_id</i>	
CLEARING_HOUSE_INFO	149[A1]	PAYMENT_FILE_DETAIL	137[A2]
<i>fdm_merchant_name</i>		PAYMENT_FILE_HEADER	138[A2]
CLEARING_HOUSE_INFO	149[A1]	PAYMENT_FILE_TRAILER	139[A2]
<i>fdm_merchant_number</i>		<i>field_length</i>	
CLEARING_HOUSE_INFO	149[A1]	PAYMENT_FILE_DETAIL	137[A2]
<i>federal_rate</i>		PAYMENT_FILE_HEADER	138[A2]
BILL_INVOICE_TAX	152[CC]	PAYMENT_FILE_TRAILER	139[A2]
CDR_DATA_TAX	175[CC]	<i>field_name</i>	
CDR_DATA_WORK_TAX	115[A1]	ATM_FIELD_DEF	50[A1]
TAX_OVERRIDES	294[A2]	ATM_POPLIST_REF	51[A1]
<i>federal_tax</i>		ATM_POPLIST_VALUES	52[A1]
ADJ	122[CC]	CDR_CONSOLIDATION_KEYS	109[A1]
ADJ_TAX	124[CC]	CDR_DUP_CHECK_FIELDS	117[A1]
BILL_INVOICE_DETAIL	147[CC]	CIBER_FLD_ERROR_CODES	126[A1]
BILL_INVOICE_TAX	152[CC]	GUI_INDICATOR_REF	281[A1]
CDR_DATA_TAX	175[CC]	GUI_INDICATOR_VALUES	282[A1]
CDR_DATA_WORK	112[A1]	RECORD_FIELD_DEF	220[A2]
CDR_DATA_WORK_TAX	115[A1]	RECORD_TYPE_SEQ_NUM	227[A2]
CDR_FREE	178[CC]	<i>field_name_from</i>	
CDR_OUTCOLLECTS	119[A1]	RECORD_FIELD_MAP	222[A2]
CIBER_INCOLLECTS	127[A1]	<i>field_name_to</i>	
CIBER_INCOLLECTS_ERROR	131[A1]	RECORD_FIELD_MAP	222[A2]
NRC	276[CC]	<i>field_order</i>	
NRC_VIEW	282[CC]	CDR_DUP_CHECK_FIELDS	117[A1]
OUTCOLLECT_BATCH_TAX	123[A2]		

<i>field_pos</i>			
RECORD_FIELD_DEF	220[A2]	USAGE_FILE_PROCESS_STATE	332[A2]
<i>field_rec_pos</i>		USAGE_FILE_STATUS	333[A2]
PAYMENT_FILE_DETAIL	137[A2]	USAGE_FILE_STATUS_HISTORY	335[A2]
PAYMENT_FILE_HEADER	138[A2]	USAGE_FILES_TO_PROCESS	326[A2]
PAYMENT_FILE_TRAILER	139[A2]	USAGE_LOCAL_COUNTS	339[A2]
<i>field_size</i>		USAGE_MASTER_FILE_STATUS	368[CC]
RECORD_FIELD_DEF	220[A2]	USAGE_PROCESS_FILE_STATUS	369[CC]
<i>field_status</i>		<i>file_id_in</i>	
BILL_ADDRESS	59[A1]	CIBER_INCOLLECTS	130[A1]
<i>field_to_name</i>		CIBER_INCOLLECTS_ERROR	133[A1]
RAW_USAGE_FIELD_MAPPING	219[A2]	<i>file_id_out</i>	
<i>field_type</i>		CIBER_INCOLLECTS	130[A1]
ATM_FIELD_DEF	50[A1]	CIBER_INCOLLECTS_ERROR	133[A1]
PAYMENT_FILE_DETAIL	137[A2]	<i>file_id_serv</i>	
PAYMENT_FILE_HEADER	138[A2]	ABI_INVOICE	112[CC]
PAYMENT_FILE_TRAILER	139[A2]	ABI_RECORD_MAP	114[CC]
RECORD_FIELD_DEF	220[A2]	ABI_TEXT	115[CC]
<i>field_value</i>		CDR_CHECK_SUM_1	106[A1]
RECORD_TYPE_SEQ_NUM	227[A2]	CDR_DATA	171[CC]
<i>file_byte_count</i>		CDR_DATA_WORK	112[A1]
FILE_STATUS	254[A1]	CDR_FREE	179[CC]
USAGE_FILE_STATUS	333[A2]	CDR_OUTCOLLECTS	120[A1]
USAGE_FILE_STATUS_HISTORY	335[A2]	CDR_RERATED	180[CC]
<i>file_class</i>		FILE_STATUS	253[A1]
USAGE_FILE_CLASS_REF	327[A2]	FILES_IN_PROCESS	251[A1]
USAGE_FILE_CLASS_VALUES	328[A2]	FILES_TO_PROCESS	252[A1]
USAGE_FILE_PROCESS_STATE	332[A2]	RPU_WORK	347[CC]
USAGE_FILE_STATUS	333[A2]	USAGE_FILE_PROCESS_STATE	332[A2]
USAGE_FILE_STATUS_HISTORY	335[A2]	USAGE_FILE_STATUS	333[A2]
USAGE_FILES_TO_PROCESS	326[A2]	USAGE_FILE_STATUS_HISTORY	335[A2]
<i>file_creation_dt</i>		USAGE_FILES_TO_PROCESS	326[A2]
ROAMING_TRANSFER_DETAIL	241[A2]	USAGE_MASTER_FILE_STATUS	368[CC]
<i>file_group_id</i>		USAGE_PROCESS_FILE_STATUS	369[CC]
FILE_STATUS	253[A1]	<i>file_id_serv_in</i>	
<i>file_id</i>		CIBER_INCOLLECTS	130[A1]
ABI_INVOICE	112[CC]	CIBER_INCOLLECTS_ERROR	133[A1]
ABI_RECORD_MAP	114[CC]	<i>file_id_serv_out</i>	
ABI_TEXT	115[CC]	CIBER_INCOLLECTS	130[A1]
BMF	159[CC]	CIBER_INCOLLECTS_ERROR	133[A1]
BMF_UNAPPLIED	165[CC]	<i>file_name</i>	
CDR_CHECK_SUM_1	106[A1]	BILL_INVOICE	137[CC]
CDR_DATA	171[CC]	CC_BALANCE	102[A1]
CDR_DATA_WORK	112[A1]	FILE_STATUS	253[A1]
CDR_FREE	179[CC]	LBX_ERROR	48[A2]
CDR_OUTCOLLECTS	120[A1]	LBX_FILE_STATUS	52[A2]
CDR_RERATED	180[CC]	LBX_POST_DATED	54[A2]
FILE_STATUS	253[A1]	USAGE_FILE_INSERTS	331[A2]
FILES_IN_PROCESS	251[A1]	USAGE_FILE_STATUS	333[A2]
FILES_TO_PROCESS	252[A1]	USAGE_FILE_STATUS_HISTORY	335[A2]
OUTCOLLECT_BATCH	120[A2]	<i>file_name_alter_type</i>	
PAYMENT_TRANS	304[CC]	EXT_CONTACTS	240[A1]
ROAMING_TRANSFER_DETAIL	241[A2]	<i>file_part</i>	
RPU_WORK	347[CC]	USAGE_FILE_PROCESS_STATE	332[A2]
USAGE_FILE_COUNTS	329[A2]	USAGE_FILE_STATUS	333[A2]
USAGE_FILE_COUNTS_HISTORY	330[A2]	USAGE_FILE_STATUS_HISTORY	335[A2]
		USAGE_FILES_TO_PROCESS	326[A2]

<i>file_process_dt</i>			
FILE_STATUS	254[A1]		
USAGE_FILE_STATUS	334[A2]		
USAGE_FILE_STATUS_HISTORY	336[A2]		
<i>file_size</i>			
USAGE_MASTER_FILE_STATUS	368[CC]		
USAGE_PROCESS_FILE_STATUS	369[CC]		
<i>file_status</i>			
FILE_STATUS	254[A1]		
USAGE_FILE_STATUS	333[A2]		
USAGE_FILE_STATUS_HISTORY	335[A2]		
USAGE_MASTER_FILE_STATUS	368[CC]		
USAGE_PROCESS_FILE_STATUS	369[CC]		
<i>file_type</i>			
EXT_CONTACTS	240[A1]		
FILE_STATUS	254[A1]		
FILE_TYPE_REF	256[A1]		
FILE_TYPE_VALUES	257[A1]		
FILES_IN_PROCESS	251[A1]		
FILES_TO_PROCESS	252[A1]		
<i>filename</i>			
BILL_FILES	132[CC]		
<i>fill_char</i>			
RECORD_FIELD_DEF	221[A2]		
<i>first_call_dt</i>			
ROAMING_TRANSFER_DETAIL	241[A2]		
<i>first_invoice</i>			
BILL_FILES	132[CC]		
<i>first_name</i>			
CONTACTS	212[CC]		
<i>first_scanline</i>			
BILL_FILES	132[CC]		
<i>first_use_dt</i>			
CUSTOMER_CONTRACT_KEY	223[CC]		
<i>fixed_amt</i>			
TAX_RATES_VAT	299[A2]		
<i>fixed_charge_amt</i>			
RATE_USAGE	210[A2]		
RATE_USAGE_OVERRIDES	216[A2]		
<i>fixed_end_date</i>			
CONTRACT_TYPES	161[A1]		
<i>fixed_modifier</i>			
RE_CHARGE_MODIFIER	236[A2]		
<i>fixed_rate</i>			
RATE_AGGR_USAGE	184[A2]		
<i>fixed_start_date</i>			
CONTRACT_TYPES	161[A1]		
<i>fml_acct_cr</i>			
JNL_CUSTOM	10[A2]		
<i>fml_acct_db</i>			
JNL_CUSTOM	10[A2]		
<i>foreign_amount</i>			
CDR_DATA	171[CC]		
CDR_DATA_WORK	112[A1]		
CDR_FREE	179[CC]		
<i>foreign_avg_cputime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>foreign_avg_walltime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>foreign_code</i>			
CLASS_OF_SERVICE_CODE_REF	141[A1]		
CONTRACT_TYPES	161[A1]		
EQUIP_TYPE_CODE_REF	228[A1]		
RATE_RC	206[A2]		
<i>foreign_group_code</i>			
PRODUCT_LINES	178[A2]		
<i>foreign_last_cputime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>foreign_last_walltime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>foreign_max_cputime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>foreign_max_walltime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>foreign_product_code</i>			
PRODUCT_ELEMENTS	173[A2]		
<i>format_code</i>			
BILL_FMT_OPT_REF	65[A1]		
BILL_FORMAT_DISPLAY_TYPES	75[A1]		
BILL_FORMAT_PRODUCTS	76[A1]		
BILL_FORMAT_TEMPLATE	77[A1]		
DISCOUNT_DEFINITIONS	189[A1]		
RATE_CURRENCY_REF	192[A2]		
UNIT_CR_DEFINITIONS	319[A2]		
<i>format_comp_date</i>			
BILL_BATCHES	131[CC]		
<i>format_display</i>			
BILL_FORMAT_TEMPLATE	77[A1]		
EMF_CONFIG_ID_VALUES	210[A1]		
RATABLE_UNIT_CLASS_VALUES	183[A2]		
<i>format_error_code</i>			
BILL_INVOICE	137[CC]		
REPORT_INVOICE	343[CC]		
<i>format_status</i>			
BILL_BATCHES	131[CC]		
BILL_FILES	132[CC]		
BILL_INVOICE	137[CC]		
CMF_INTERIM_BILLS	204[CC]		
REPORT_INVOICE	343[CC]		
<i>format_task</i>			
BILL_BATCHES	131[CC]		
BILL_FILES	132[CC]		
<i>formatted_message</i>			
BSD_EXCEPTION	166[CC]		
<i>franchise_code</i>			
ACCT_SEG_MAP	18[A1]		
CMF_EXEMPT	201[CC]		
FRANCHISE_CODE_REF	258[A1]		
FRANCHISE_CODE_VALUES	259[A1]		
GEOCODE_OVERRIDES	264[A1]		

LATE_FEE_ASSIGNMENT	44[A2]	<i>from_server</i>	
TAX_ASSIGNMENTS	283[A2]	REPLICATION_TABLES	233[A2]
TAX_OVERRIDES	293[A2]	<i>from_tables</i>	
TAX_THRESHOLDS	304[A2]	ACCOUNT_MOVE_TABLES	17[A1]
TCU_DET_REP	364[CC]	<i>from_user</i>	
<i>franchise_tax_code</i>		TICKLER	309[A2]
ADDRESS	119[CC]	<i>fus_avs_type</i>	
LOCAL_ADDRESS	268[CC]	CLEARING_HOUSE_INFO	148[A1]
MASTER_ADDRESS	93[CC]	<i>fus_pres_id</i>	
RATE_LATE_FEE	198[A2]	CLEARING_HOUSE_INFO	148[A1]
<i>fraud_ind</i>		<i>fus_pres_pass</i>	
CIBER_INCOLLECTS	129[A1]	CLEARING_HOUSE_INFO	148[A1]
CIBER_INCOLLECTS_ERROR	132[A1]	<i>fus_sub_id</i>	
<i>fraud_indicator</i>		CLEARING_HOUSE_INFO	148[A1]
ADJ	123[CC]	<i>fus_sub_pass</i>	
JNL_DETAIL	258[CC]	CLEARING_HOUSE_INFO	148[A1]
JNL_KEYS	24[A2]	<i>fx_geocode</i>	
JNL_KEYS_DEFAULT	30[A2]	LOCAL_ADDRESS	269[CC]
JNL_TRANS	264[CC]	MASTER_ADDRESS	94[CC]
<i>fraud_indicator_mask</i>		G	
JNL_KEYS_MASK	32[A2]	<i>g_l_code</i>	
<i>fraud_sub_ind</i>		JNL_EMF_BOOK_REF	12[A2]
CIBER_INCOLLECTS	129[A1]	OWNING_COST_CTR_REF	124[A2]
CIBER_INCOLLECTS_ERROR	133[A1]	REV_RCV_COST_CENTER_REF	234[A2]
<i>free_usg</i>		<i>gender</i>	
USAGE_TYPES	347[A2]	CMF	187[CC]
<i>frequency</i>		CONTACTS	212[CC]
TAX_CHARGE_ELEMENTS	285[A2]	GENDER_REF	260[A1]
<i>frn_account_num</i>		GENDER_VALUES	261[A1]
CLEARING_HOUSE_INFO	148[A1]	<i>generate_workflow</i>	
<i>frn_agency_code</i>		ORD_ORDER	293[CC]
CLEARING_HOUSE_INFO	148[A1]	<i>generation</i>	
<i>frn_bank_code</i>		CONTACTS	212[CC]
CLEARING_HOUSE_INFO	148[A1]	<i>geo_area_id</i>	
<i>frn_company_name</i>		NRC	276[CC]
CLEARING_HOUSE_INFO	148[A1]	NRC_VIEW	282[CC]
<i>frn_fast_mode</i>		RATE_NRC	200[A2]
CLEARING_HOUSE_INFO	148[A1]	<i>geo_key</i>	
<i>frn_fast_op_id</i>		BILL_INSERT_GROUPS	79[A1]
CLEARING_HOUSE_INFO	148[A1]	BILL_MESSAGE_GROUPS	81[A1]
<i>frn_fast_post_delay</i>		<i>geocode</i>	
CLEARING_HOUSE_INFO	148[A1]	ADDRESS	119[CC]
<i>frn_national_num</i>		ADJ	122[CC]
CLEARING_HOUSE_INFO	148[A1]	ADJ_TAX	124[CC]
<i>frn_norm_op_id</i>		BILL_INVOICE_DETAIL	147[CC]
CLEARING_HOUSE_INFO	148[A1]	BILL_INVOICE_TAX	152[CC]
<i>frn_norm_post_delay</i>		CDR_BILLED	168[CC]
CLEARING_HOUSE_INFO	148[A1]	CDR_DATA	172[CC]
<i>frn_unique_dates</i>		CDR_DATA_TAX	175[CC]
CLEARING_HOUSE_INFO	148[A1]	CDR_DATA_WORK_TAX	115[A1]
<i>from_date</i>		OUTCOLLECT_BATCH_DETAIL	121[A2]
BILL_IMAGE	134[CC]	OUTCOLLECT_BATCH_TAX	123[A2]
BILL_INVOICE	135[CC]	<i>gl_amount</i>	
BILL_INVOICE_DETAIL	147[CC]	BMF	157[CC]
		BMF_DISTRIBUTION	161[CC]

BMF_UNAPPLIED	164[CC]	<i>hdr_field_format</i>	
CMF_BALANCE	192[CC]	JNL_FEED_HEADER	14[A2]
CMF_BALANCE_DETAIL	194[CC]	<i>hdr_field_size</i>	
LBX_ERROR	49[A2]	JNL_FEED_HEADER	14[A2]
LBX_POST_DATED	55[A2]	<i>hdr_field_trim</i>	
<i>global_contract_status</i>		JNL_FEED_HEADER	14[A2]
CMF	187[CC]	<i>hdr_hardcoded</i>	
<i>good_payer</i>		JNL_FEED_HEADER	14[A2]
LATE_FEE_TYPES	47[A2]	<i>hdr_is_pack</i>	
<i>grace_period</i>		JNL_FEED_HEADER	14[A2]
CUSTOMER_CONTRACT	220[CC]	<i>hdr_position</i>	
CUSTOMER_CONTRACT_VIEW	226[CC]	JNL_FEED_HEADER	14[A2]
ETUC_UPDATES	246[CC]	<i>hdr_table</i>	
LATE_FEE_TYPES	47[A2]	JNL_FEED_HEADER	14[A2]
RATE_LATE_FEE	198[A2]	<i>hdr_type</i>	
UNIT_CREDIT_PROFILES	367[CC]	JNL_FEED_HEADER	14[A2]
<i>group_level</i>		<i>hierarchy_acg_tracking_id</i>	
EXTERNAL_ID_GROUP_MAP	92[CC]	CMF_ACCOUNT_CODE_GROUPS	190[CC]
GROUP_TYPE_REF	271[A1]	<i>hierarchy_acg_tracking_id_serv</i>	
GROUPS	248[CC]	CMF_ACCOUNT_CODE_GROUPS	190[CC]
<i>group_name</i>		<i>hierarchy_id</i>	
GROUP_AMOUNT	269[A1]	ACCOUNT_MOVE_STATUS	11[CC]
GROUP_FUNCTION	270[A1]	CMF	183[CC]
<i>group_no</i>		TREP_WORK	365[CC]
CUSTOMER_ID_GROUP_MAP	236[CC]	<i>home_carrier_sid_bid</i>	
EXTERNAL_ID_GROUP_MAP	92[CC]	CIBER_INCOLLECTS	127[A1]
GROUP_MEMBER	249[CC]	CIBER_INCOLLECTS_ERROR	131[A1]
GROUPS	248[CC]	<i>home_provider_flag</i>	
<i>group_type</i>		SERVICE_PROVIDERS_REF	262[A2]
EXTERNAL_ID_GROUP_MAP	92[CC]	<i>home_sid_bid</i>	
GROUP_TYPE_REF	271[A1]	CDR_OUTCOLLECTS	120[A1]
GROUP_TYPE_VALUES	272[A1]	<i>host_name</i>	
GROUPS	248[CC]	MCAP_FLASH_SEQUENCE_NUMBERS	62[A2]
<i>group_type_restrictions</i>		PROCESS_SOCKET	159[A2]
GROUP_TYPE_REF	271[A1]	<i>hostname</i>	
<i>grouping_id</i>		BATCH_REQUEST_SEGMENT	38[CC]
EXT_PARAM_TYPE_ASSOC	246[A1]	LOCAL_SERVER_ID	59[A2]
<i>guide_flag</i>		PROCESS_QUEUE	155[A2]
CDR_COMP_STATUS_REF	107[A1]	PROCESS_RUN	156[A2]
<i>guide_to</i>		PROCESS_STATUS	160[A2]
USAGE_TYPES	345[A2]	PROCESS_WORK_STATUS_DEF	169[A2]
<i>guide_to_provider</i>		SERVER_DEFINITION	98[CC]
USAGE_TYPES	349[A2]	<i>house_number</i>	
H		LOCAL_ADDRESS	268[CC]
<i>has_overrides</i>		MASTER_ADDRESS	93[CC]
PRODUCT	312[CC]	<i>house_number_suffix</i>	
PRODUCT_VIEW	322[CC]	LOCAL_ADDRESS	268[CC]
<i>has_product_keys</i>		MASTER_ADDRESS	93[CC]
PRODUCT	312[CC]	I	
PRODUCT_VIEW	322[CC]	<i>ic_account_no</i>	
<i>hdr_field</i>		ABI_INVOICE	112[CC]
JNL_FEED_HEADER	14[A2]	<i>ic_extract_date</i>	
<i>hdr_field_description</i>		ABI_INVOICE	112[CC]
JNL_FEED_HEADER	14[A2]		

<i>icb_allow</i>			
DISCOUNT_DEFINITIONS	190[A1]		
UNIT_CR_DEFINITIONS	319[A2]		
<i>id_type</i>			
JNL_DETAIL	257[CC]		
JNL_KEYS	21[A2]		
JNL_KEYS_DEFAULT	27[A2]		
JNL_KEYS_MASK	31[A2]		
JNL_TRANS	263[CC]		
<i>id_type2</i>			
JNL_DETAIL	257[CC]		
JNL_KEYS	23[A2]		
JNL_KEYS_DEFAULT	29[A2]		
JNL_TRANS	263[CC]		
<i>id_type2_mask</i>			
JNL_KEYS_MASK	31[A2]		
<i>id_value</i>			
JNL_DETAIL	257[CC]		
JNL_KEYS	22[A2]		
JNL_KEYS_DEFAULT	28[A2]		
JNL_TRANS	263[CC]		
<i>id_value_mask</i>			
JNL_KEYS_MASK	31[A2]		
<i>id_value2</i>			
JNL_DETAIL	257[CC]		
JNL_KEYS	23[A2]		
JNL_KEYS_DEFAULT	29[A2]		
JNL_TRANS	263[CC]		
<i>id_value2_mask</i>			
JNL_KEYS_MASK	31[A2]		
<i>iet</i>			
JNL_CUSTOM	10[A2]		
<i>image_done</i>			
BILL_INVOICE	136[CC]		
<i>image_req</i>			
BILL_INVOICE	136[CC]		
<i>image_size</i>			
BILL_IMAGE	134[CC]		
<i>image_type</i>			
BILL_IMAGE	134[CC]		
<i>immediate_payment</i>			
ITEM_MARKETING_DATA_REF	297[A1]		
<i>implied_decimal</i>			
PAYMENT_TRANS	305[CC]		
PREPAYMENT	308[CC]		
RATE_CURRENCY	188[A2]		
RATE_CURRENCY_REF	192[A2]		
USAGE_UNITS_CONVERT	357[A2]		
<i>implied_decimals</i>			
RATE_BONUS_POINT	186[A2]		
RATE_DISCOUNT	197[A2]		
RATE_DISCOUNT_OVERRIDES	325[CC]		
RATE_LATE_FEE	198[A2]		
TAX_UNIV_ICB	362[CC]		
UNIT_CR_RATE_LIMIT	322[A2]		
<i>in_arrears_override</i>			
PRODUCT		312[CC]	
PRODUCT_CHARGE_MAP		314[CC]	
PRODUCT_VIEW		322[CC]	
<i>in_feed_report</i>			
JNL_FEED_HEADER		14[A2]	
JNL_FEED_LAYOUT		17[A2]	
JNL_FEED_TRAILER		18[A2]	
<i>in_out_indicator</i>			
ROAMING_TRANSFER_DETAIL		242[A2]	
ROAMING_TRANSFER_TAX_DETAIL		244[A2]	
<i>in_process_error</i>			
USAGE_FILE_COUNTS		329[A2]	
USAGE_FILE_COUNTS_HISTORY		330[A2]	
USAGE_LOCAL_COUNTS		339[A2]	
<i>in_process_input</i>			
USAGE_FILE_COUNTS		329[A2]	
USAGE_FILE_COUNTS_HISTORY		330[A2]	
USAGE_LOCAL_COUNTS		339[A2]	
<i>in_process_rerating</i>			
USAGE_FILE_COUNTS		329[A2]	
USAGE_FILE_COUNTS_HISTORY		330[A2]	
USAGE_LOCAL_COUNTS		339[A2]	
<i>in_units_type</i>			
USAGE_UNITS_CONVERT		357[A2]	
<i>in_use</i>			
CMF		186[CC]	
CONTRACT_ASSIGNMENTS_HQ		214[CC]	
CUSTOMER_CONTRACT_KEY		223[CC]	
EPR_ERROR		225[A1]	
LCT_METRICS		58[A2]	
<i>inactive_date</i>			
CONTRACT_TYPES		161[A1]	
CUSTOMER_ID_ACCT_MAP		231[CC]	
CUSTOMER_ID_EQUIP_MAP		232[CC]	
CUSTOMER_ID_EQUIP_MAP_VIEW		235[CC]	
EXTERNAL_ID_ACCT_MAP		87[CC]	
EXTERNAL_ID_EQUIP_MAP		88[CC]	
EXTERNAL_ID_EQUIP_MAP_VIEW		91[CC]	
JNL_KEYS		24[A2]	
JNL_KEYS_DEFAULT		30[A2]	
RATE_CURRENCY_REF		192[A2]	
RATE_NRC		200[A2]	
RATE_RC		206[A2]	
TAX_RATES_VAT		299[A2]	
TAX_THRESHOLDS		304[A2]	
TAX_UNIV_ICB		362[CC]	
<i>inactive_dt</i>			
ACCOUNT_BALANCES		117[CC]	
ACCOUNT_BILLED_SERVICES		118[CC]	
AGGR_USAGE_DEFINITIONS_REF		37[A1]	
BILL_INSERT_GROUPS		79[A1]	
BILL_MESSAGE_GROUPS		81[A1]	
BSD_ATTRIBUTE_CONSTRAINTS		59[CC]	
BSD_ATTRIBUTE_DEFAULTS		61[CC]	
BSD_RELATIONAL_CONSTRAINTS		80[CC]	

BSD_RELATIONAL_DEFAULTS	82[CC]	<i>include_adj</i>	
CIBER_LINE_RANGES	135[A1]	BILL_INVOICE	138[CC]
CIBER_OPERATOR_SID_BID	136[A1]	CMF_INTERIM_BILLS	204[CC]
CIBER_ROAMING_AGREEMENT	138[A1]	<i>include_bmf</i>	
CMF_ABI_SOURCES	188[CC]	BILL_INVOICE	138[CC]
CMF_COMPONENT_ELEMENT	199[CC]	CMF_INTERIM_BILLS	204[CC]
CMF_INSERTS	203[CC]	<i>include_in_estimate</i>	
CMF_MESSAGES	206[CC]	NRC_TRANS_DESCR	93[A2]
CMF_PACKAGE	207[CC]	PRODUCT_ELEMENTS	175[A2]
CMF_PACKAGE_COMPONENT	209[CC]	<i>include_nrc</i>	
CMF_STATUS_HISTORY	211[CC]	BILL_INVOICE	138[CC]
COMPONENT_DEFINITION_REF	154[A1]	CMF_INTERIM_BILLS	204[CC]
COMPONENT_NRCS	156[A1]	<i>include_rc</i>	
CONTRACT_UNIT_CR	215[CC]	BILL_INVOICE	138[CC]
CUSTOMER_CORRIDORS	230[CC]	CMF_INTERIM_BILLS	204[CC]
DEPENDENCY	181[A1]	<i>include_usage</i>	
EMF_CONFIGURATION	207[A1]	BILL_INVOICE	138[CC]
ETUC_UPDATES	247[CC]	CMF_INTERIM_BILLS	204[CC]
EXCLUSION	231[A1]	<i>inclusive_tax</i>	
EXT_CONTACTS	239[A1]	BILL_INVOICE_DETAIL	149[CC]
GLOBAL_ACCOUNT_BALANCES	266[A1]	<i>income_tax_amount</i>	
GLOBAL_OPEN_ITEM_ID_MAP	268[A1]	DEPOSIT	238[CC]
GROUP_MEMBER	249[CC]	<i>incremental_bands</i>	
GSM_ROAMING_AGREEMENT	280[A1]	RATE_USAGE	210[A2]
HISTORIC_THRESHOLDS	256[CC]	RATE_USAGE_OVERRIDES	216[A2]
LATE_FEE_GROUPS	45[A2]	<i>industry_type</i>	
LATE_FEE_RATES	46[A2]	EMF_CONFIGURATION	207[A1]
LATE_FEE_TYPES	47[A2]	INDUSTRY_TYPE_REF	284[A1]
MOBILE_GLOBAL_CELL_ID	67[A2]	INDUSTRY_TYPE_VALUES	285[A1]
MOBILE_SERVICE_ZONES	271[CC]	ITEM_CATG_INDUSTRY_ASSOC	293[A1]
OPEN_ITEM_ID_MAP	284[CC]	<i>ineligible</i>	
ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]	OPEN_ITEM_ID_MAP	284[CC]
PACKAGE_COMPONENT_MEMBERS	128[A2]	<i>init_file_name</i>	
PACKAGE_COMPONENTS	126[A2]	BATCH_EXECUTABLE	14[CC]
PACKAGE_DEFINITION_REF	129[A2]	<i>init_file_section</i>	
PACKAGE_NRCS	133[A2]	BATCH_EXECUTABLE	14[CC]
PRODUCT_CHARGE_MAP	315[CC]	<i>initial_cell_site</i>	
PRODUCT_JURISDICTION	177[A2]	CIBER_INCOLLECTS	128[A1]
PRODUCT_RATE_KEY	318[CC]	CIBER_INCOLLECTS_ERROR	132[A1]
PRODUCT_RATE_OVERRIDE	319[CC]	<i>input_language</i>	
RATE_AGR_USAGE	184[A2]	LANGUAGE_CODE_VALUES	43[A2]
RATE_CURRENCY	188[A2]	<i>insert_bin_num</i>	
RATE_PERIODS	202[A2]	BILL_INSERT_GROUPS	79[A1]
RATE_USAGE	210[A2]	<i>insert_foreign_key</i>	
RATE_USAGE_OVERRIDES	216[A2]	BILL_INSERT_GROUPS	79[A1]
RE_CHARGE_MODIFIER	236[A2]	INSERT_FOREIGN_KEY_REF	286[A1]
RECORD_TYPE_REF	225[A2]	INSERT_FOREIGN_KEY_VALUES	287[A1]
REPLICATION_TABLES	233[A2]	<i>insert_grp_id</i>	
SDR_EXCHANGE_RATES	252[A2]	ACCT_SEG_MAP	18[A1]
SERVICE_ADDRESS_ASSOC	101[CC]	BILL_INSERT_GROUPS	79[A1]
SERVICE BILLING	352[CC]	CMF	185[CC]
SERVICE_STATUS	356[CC]	CMF_INSERTS	203[CC]
SERVICE_ZONE	361[CC]	INSERT_GRP_ID_REF	288[A1]
UNIT_CR_RATE_LIMIT	322[A2]	INSERT_GRP_ID_VALUES	289[A1]
UNIT_CR_RATE_LIMIT_KEYS	323[A2]		
USAGE_JURISDICTION	338[A2]		
USAGE_POINTS	342[A2]		

<i>insert_id</i>			
BILL_INSERT_GROUPS	79[A1]		
BILL_INSERTS	78[A1]		
CMF_INSERTS	203[CC]		
<i>insert_pages</i>			
BILL_INSERTS	78[A1]		
<i>insert_trigger_id</i>			
BILL_INSERT_GROUPS	79[A1]		
<i>inst_count</i>			
TMP_ENTITY	103[CC]		
<i>installment_type_id_nrc</i>			
NRC_TRANS_DESCR	93[A2]		
<i>instance_name</i>			
PROCESS_QUEUE	155[A2]		
<i>instance_num</i>			
CDR_DATA_DUC	174[CC]		
<i>instance_start_dt</i>			
CDR_DATA_DUC	174[CC]		
<i>int_value</i>			
ATM_POPLIST_REF	51[A1]		
ATM_POPLIST_VALUES	52[A1]		
SYSTEM_PARAMETERS	278[A2]		
<i>integer_value</i>			
GUI_INDICATOR_REF	281[A1]		
GUI_INDICATOR_VALUES	282[A1]		
<i>intended_view_effective_dt</i>			
CUSTOMER_CONTRACT_VIEW	225[CC]		
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]		
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]		
NRC_VIEW	280[CC]		
PRODUCT_VIEW	321[CC]		
SERVICE_VIEW	358[CC]		
<i>interest_amount</i>			
DEPOSIT	238[CC]		
<i>interim_bill_date</i>			
CMF_INTERIM_BILLS	204[CC]		
<i>interim_bill_flag</i>			
BILL_INVOICE	138[CC]		
<i>interim_due_days</i>			
ACCOUNT_CATEGORY_REF	15[A1]		
<i>internal_status</i>			
OUTCOLLECT_BATCH	120[A2]		
<i>interval_no</i>			
PROCESS_WORK	162[A2]		
<i>intl_dial_access</i>			
COUNTRY_DIAL_CODES	170[A1]		
<i>intl_dial_code</i>			
COUNTRY_DIAL_CODES	170[A1]		
<i>inv_placeholder_id</i>			
ORD_INV_PLACEHOLDER	285[CC]		
<i>inv_rate_def_units</i>			
USAGE_TYPES_UNITS	355[A2]		
<i>inv_rate_max_units</i>			
USAGE_TYPES_UNITS	355[A2]		
<i>inv_view_id</i>			
ORD_ITEM_MAP		96[CC]	
<i>inventory_type_id</i>			
ORD_INV_PLACEHOLDER		285[CC]	
<i>investigator</i>			
CIBER_INCOLLECTS_ERROR		134[A1]	
<i>invoice_amount</i>			
JNL_DETAIL		258[CC]	
JNL_TRANS		263[CC]	
OUTCOLLECT_BATCH_DETAIL		121[A2]	
<i>invoice_billing_type</i>			
ABI_INVOICE		112[CC]	
<i>invoice_currency</i>			
OUTCOLLECT_BATCH_DETAIL		121[A2]	
<i>invoice_currency_code</i>			
JNL_DETAIL		258[CC]	
JNL_TRANS		263[CC]	
<i>io_type</i>			
RECORD_TYPE_REF		225[A2]	
<i>ip_address</i>			
SERVER_DEFINITION		98[CC]	
<i>ipdr_doc_no</i>			
EXT_IPDR_FS_STATUS		244[A1]	
<i>is_a_prefix</i>			
USAGE_POINTS		341[A2]	
<i>is_active</i>			
ARCH_TABLE_DEPENDS_REF		46[A1]	
EXT_IPDR_FS_STATUS		244[A1]	
LOCAL_ADDRESS		269[CC]	
MASTER_ADDRESS		94[CC]	
<i>is_addressable</i>			
PARAM_DEF		134[A2]	
<i>is_adjustable</i>			
ADJ_TRANS_DESCR		30[A1]	
NRC_TRANS_DESCR		92[A2]	
<i>is_balance_prepaid</i>			
ACCOUNT_BALANCES		116[CC]	
GLOBAL_ACCOUNT_BALANCES		266[A1]	
<i>is_binned</i>			
TAX_PKG_INST_ID_REF		296[A2]	
<i>is_business</i>			
ACCOUNT_CATEGORY_REF		15[A1]	
<i>is_calling_card_used</i>			
INDUSTRY_TYPE_REF		284[A1]	
<i>is_cancelled</i>			
ORD_ITEM		289[CC]	
ORD_ITEM_MAP		96[CC]	
<i>is_city_required</i>			
ADDRESS_TYPE_REF		23[A1]	
<i>is_conditional_map</i>			
RECORD_FIELD_MAP		223[A2]	
RECORD_TYPE_MAP		224[A2]	
<i>is_consolidation_key</i>			
CDR_CONSOLIDATION_KEYS		109[A1]	

<i>is_conversion_default</i>			BONUS_POINT_TRANS_TYPE_REF	93[A1]
RATE_CURRENCY_REF	192[A2]		CARD_TYPE_CODE_REF	97[A1]
<i>is_csr_default</i>			CCARD_RESPONSE_CODE_REF	100[A1]
CSR_ACCT_SEG	172[A1]		CDR_ADJ_ERROR_REF	104[A1]
<i>is_csr_enterable</i>			CDR_COMP_STATUS_REF	107[A1]
ADDRESS_TYPE_REF	23[A1]		CELL_ID_REF	122[A1]
NRC_TRANS_DESCR	92[A2]		CLASS_OF_SERVICE_CODE_REF	141[A1]
<i>is_current</i>			CLEARING_HOUSE_ID_REF	146[A1]
CUSTOMER_ID_ACCT_MAP	231[CC]		CMF_STATUS_CHG_REASON_REF	150[A1]
CUSTOMER_ID_EQUIP_MAP	232[CC]		CMF_STATUS_REF	152[A1]
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]		COMPONENT_DEFINITION_REF	154[A1]
<i>is_custom</i>			CONNECT_REASON_CODES_REF	157[A1]
CONTRACT_TYPES	163[A1]		CORRIDOR_PLAN_ID_REF	166[A1]
CUSTOMER_CONTRACT	221[CC]		COUNTRY_CODE_REF	168[A1]
CUSTOMER_CONTRACT_VIEW	228[CC]		CURRENCY_TYPE_REF	175[A1]
<i>is_dadl_used</i>			DENIAL_REASON_REF	178[A1]
INDUSTRY_TYPE_REF	284[A1]		DEPOSIT_TYPE_REF	182[A1]
<i>is_default</i> 7[A1], 7[A2], 7[CC], 109[CC]			DISCONNECT_REASON_REF	186[A1]
ABI_SOURCE_REF	11[A1]		DISCOUNT_THRESH_TIER_ID_REF	198[A1]
ACCESS_REGION_REF	13[A1]		DISTANCE_BANDS_ID_REF	201[A1]
ACCOUNT_CATEGORY_REF	15[A1]		EFT_RESPONSE_CODE_REF	205[A1]
ACCT_SEG_REF	19[A1]		EMF_CONFIG_ID_REF	209[A1]
ADDRESS_CATEGORY_REF	21[A1]		EMF_STATUS_CHG_REASON_REF	211[A1]
ADDRESS_TYPE_REF	24[A1]		EMF_STATUS_REF	213[A1]
ADJ_REASON_CODE_REF	26[A1]		EMF_SUSPENSION_REASON_REF	215[A1]
ADJ_TRANS_GROUP_REF	32[A1]		ENTITY_TYPE_GROUP_MEMBER	217[A1]
AGGR_USAGE_DEFINITIONS_REF	37[A1]		ENTITY_TYPE_GROUP_REF	218[A1]
AMP_MODE_REF	41[A1]		ENTITY_TYPE_REF	221[A1]
ARCH_MODE_REF	44[A1]		EQUIP_CLASS_CODE_REF	226[A1]
ARCH_TYPE_REF	47[A1]		EQUIP_TYPE_CODE_REF	228[A1]
ATM_POPLIST_REF	51[A1]		EXRATE_CLASS_REF	232[A1]
BALANCE_XFER_DIFF_REF	53[A1]		EXT_ACCESS_METHOD_REF	236[A1]
BAM_ERROR_CODE_REF	55[A1]		EXT_SOURCE_ID_REF	247[A1]
BATCH_CATEGORY_REF	12[CC]		EXT_SOURCE_TYPE_REF	249[A1]
BATCH_INV_SOURCE_REF	16[CC]		EXTERNAL_ID_TYPE_REF	234[A1]
BATCH_NOTIFY_EVENT_TYPE_REF	18[CC]		FILE_TYPE_REF	256[A1]
BATCH_NOTIFY_TYPE_REF	20[CC]		FRANCHISE_CODE_REF	258[A1]
BATCH_PARTICIPANT_TYPE_REF	23[CC]		GENDER_REF	260[A1]
BATCH_REPORT_TYPE_REF	27[CC]		GENERIC_ENUMERATION_REF	262[A1]
BATCH_STATUS_REF	40[CC]		GROUP_TYPE_REF	271[A1]
BATCH_TEMPLATE_TYPE_REF	43[CC]		GRS_ACTION_REF	275[A1]
BATCH_TYPE_PARAMETER_REF	45[CC]		GRS_OPERATION_REF	277[A1]
BATCH_TYPE_REF	47[CC]		GUI_INDICATOR_REF	281[A1]
BATCH_TYPE_STAGE_REF	48[CC]		INDUSTRY_TYPE_REF	284[A1]
BILL_ADDRESS	59[A1]		INSERT_FOREIGN_KEY_REF	286[A1]
BILL_CLASS_REF	60[A1]		INSERT_GRP_ID_REF	288[A1]
BILL_DISP_METH_REF	63[A1]		ITEM_CATEGORY_REF	291[A1]
BILL_FMT_OPT_REF	65[A1]		ITEM_MARKETING_DATA_REF	296[A1]
BILL_FMT_SECTION_EXCL_REF	67[A1]		JNL_EMF_BOOK_REF	12[A2]
BILL_FMT_SECTION_TYPE_REF	69[A1]		JURISDICTION_CLASS_REF	36[A2]
BILL_FMT_TEMPLATE_CODE_REF	71[A1]		LANGUAGE_CODE_REF	42[A2]
BILL_FORMAT_CODE_TYPE_REF	73[A1]		LBX_ERROR_STATUS_REF	50[A2]
BILL_PERIOD_REF	82[A1]		LBX_SOURCE_ID_REF	56[A2]
BILL_SIZE	86[A1]		LOCATION_CODE_REF	60[A2]
BILLING_FREQUENCY_REF	57[A1]		MKT_CODE_REF	65[A2]
BONUS_POINT_ID_REF	90[A1]		MOBILE_ZONE_REF	68[A2]
			MOBILE_ZONE_TYPE_REF	69[A2]

MSG_GRP_ID_REF	72[A2]	<i>is_default_merchant_id</i>	
MSG_TRIGGER_ID_REF	74[A2]	PAYMENT_MERCHANT_ID_ASSIGN	140[A2]
NET_ACTION_REF	76[A2]	<i>is_default_rate</i>	
NET_INTERFACE_REF	80[A2]	RATE_USAGE	210[A2]
NOTE_REASON_REF	82[A2]	<i>is_deletable</i>	
NOTE_TEMPLATE_REF	84[A2]	ARCH_TABLE_DEPENDS_REF	46[A1]
NOTE_TYPE_REF	87[A2]	<i>is_designated</i>	
NRC_LINE_REF	89[A2]	GROUP_MEMBER	250[CC]
OPEN_ITEM_ID_REF	95[A2]	<i>is_disconnect_credit</i>	
ORD_ITEM_ACTION_REF	106[A2]	ADJ_TRANS_DESCR	30[A1]
ORD_ITEM_MEMBER_TYPE_REF	108[A2]	<i>is_displayed_onbill</i>	
ORD_ITEM_TYPE_REF	113[A2]	ADJ_TRANS_DESCR	30[A1]
ORD_ORDER_STATUS_REF	115[A2]	BMF_TRANS_DESCR	89[A1]
ORD_SERVICE_ORDER_TYPE_REF	117[A2]	BONUS_POINT_TRANS_TYPE_REF	92[A1]
OWNING_COST_CTR_REF	124[A2]	NRC_TRANS_DESCR	92[A2]
PACKAGE_DEFINITION_REF	129[A2]	<i>is_distributed</i>	
PACKAGE_GROUP_REF	131[A2]	TAX_PKG_INST_ID_REF	296[A2]
PAYMENT_MERCHANT_ID_REF	141[A2]	<i>is_e911_required</i>	
PAYMENT_PROFILE	302[CC]	INDUSTRY_TYPE_REF	284[A1]
PLAN_ID_CREDIT_REF	143[A2]	<i>is_ebcdic</i>	
PLAN_ID_DISCOUNT_REF	145[A2]	RECORD_FIELD_DEF	220[A2]
POINT_CATEGORY_REF	147[A2]	<i>is_empty</i>	
POINT_CLASS_REF	149[A2]	CDR_CONSOLIDATION_KEYS	109[A1]
POINT_REGION_REF	151[A2]	<i>is_enterable</i>	
PRIVACY_LEVEL_REF	153[A2]	NRC_TRANS_DESCR	92[A2]
PROVIDER_CLASS_REF	180[A2]	<i>is_exclusion</i>	
RATABLE_UNIT_CLASS_REF	182[A2]	AGGR_USAGE_RESTRICTIONS	40[A1]
RATE_CLASS_DESCR	187[A2]	DISCOUNT_RESTRICTIONS	194[A1]
RATE_CURRENCY_GROUP_REF	190[A2]	DISCOUNT_TARGETS	197[A1]
RATE_CURRENCY_REF	193[A2]	UNIT_CR_RESTRICTIONS	325[A2]
RATE_PERIOD_REF	203[A2]	<i>is_exclusive</i>	
RECORD_TYPE_REF	226[A2]	DISCOUNT_DEFINITIONS	190[A1]
REFUND_REASON_CODE_REF	229[A2]	PLAN_ID_DISCOUNT_REF	145[A2]
REGULATORY_ID_REF	231[A2]	<i>is_expanded</i>	
REV_RCV_COST_CENTER_REF	234[A2]	ORD_LOGICAL_SERVICE_ORDER	290[CC]
ROAMING_OPERATOR_REF	238[A2]	<i>is_external</i>	
RT_PAYMENT_RESP_REF	247[A2]	BONUS_POINT_TRANS_TYPE_REF	92[A1]
SALES_CHANNEL_REF	250[A2]	<i>is_franchise</i>	
SERVER_CATEGORY_REF	254[A2]	TAX_PKG_INST_ID_REF	296[A2]
SERVICE_CENTER_TYPE_REF	259[A2]	<i>is_freeform</i>	
SERVICE_PROVIDERS_REF	262[A2]	ADDRESS_TYPE_REF	23[A1]
STATE_REF	264[A2]	<i>is_from_inventory</i>	
STATUS_REASON_REF	267[A2]	CUSTOMER_ID_EQUIP_MAP	232[CC]
STATUS_REF	269[A2]	CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]
STATUS_TYPE_REF	271[A2]	EXTERNAL_ID_EQUIP_MAP	88[CC]
SUSPENDED_REASON_REF	274[A2]	EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]
TAX_PKG_INST_ID_REF	296[A2]	<i>is_fxgeocode_required</i>	
TAX_STATUS_REF	301[A2]	ADDRESS_TYPE_REF	23[A1]
TAX_TYPE_COMM_REF	307[A2]	<i>is_graduated</i>	
TIMEZONE_REF	310[A2]	TAX_PKG_INST_ID_REF	296[A2]
TRANS_SOURCE_REF	313[A2]	<i>is_gross</i>	
UNITS_TYPE_REF	316[A2]	DISCOUNT_DEFINITIONS	190[A1]
USAGE_FILE_CLASS_REF	327[A2]	<i>is_group</i>	
VIP_CODE_REF	358[A2]	ENTITY_TYPE_REF	221[A1]
XFER_REASON_CODES_REF	362[A2]		
ZONE_CLASS_REF	365[A2]		
ZONE_REF	367[A2]		

<i>is_grouped</i>		BILL_PERIOD_REF	82[A1]
NOTE_TYPE_REF	87[A2]	BILLING_FREQUENCY_REF	57[A1]
<i>is_grouping_dependency</i>		BONUS_POINT_ID_REF	90[A1]
DEPENDENCY	180[A1]	BONUS_POINT_TRANS_TYPE_REF	93[A1]
<i>is_gui_pretax</i>		CARD_TYPE_CODE_REF	97[A1]
TAX_PKG_INST_ID_REF	296[A2]	CCARD_RESPONSE_CODE_REF	100[A1]
<i>is_housenumber_required</i>		CDR_ADJ_ERROR_REF	104[A1]
ADDRESS_TYPE_REF	23[A1]	CDR_COMP_STATUS_REF	107[A1]
<i>is_icb_corridor</i>		CELL_ID_REF	122[A1]
CORRIDOR_PLAN_ID_REF	165[A1]	CLASS_OF_SERVICE_CODE_REF	141[A1]
<i>is_ignored</i>		CLEARING_HOUSE_ID_REF	146[A1]
RAW_USAGE_FIELD_MAPPING	218[A2]	CMF_STATUS_CHG_REASON_REF	150[A1]
RECORD_TYPE_REF	225[A2]	CMF_STATUS_REF	152[A1]
<i>is_immediate</i>		COMPONENT_DEFINITION_REF	154[A1]
NET_INTERFACE_ACTIONS	78[A2]	CONNECT_REASON_CODES_REF	157[A1]
<i>is_inclusive</i>		CORRIDOR_PLAN_ID_REF	166[A1]
BILL_INVOICE_TAX	153[CC]	COUNTRY_CODE_REF	168[A1]
CDR_DATA_TAX	176[CC]	CURRENCY_TYPE_REF	175[A1]
CDR_DATA_WORK_TAX	116[A1]	DENIAL_REASON_REF	178[A1]
TAX_PKG_INST_ID_REF	297[A2]	DEPOSIT_TYPE_REF	182[A1]
<i>is_index_key</i>		DISCONNECT_REASON_REF	186[A1]
RECORD_FIELD_DEF	220[A2]	DISCOUNT_THRESH_TIER_ID_REF	198[A1]
<i>is_internal</i>		DISTANCE_BANDS_ID_REF	201[A1]
ABI_SOURCE_REF	11[A1]	EFT_RESPONSE_CODE_REF	205[A1]
ACCESS_REGION_REF	13[A1]	EMF_CONFIG_ID_REF	209[A1]
ACCOUNT_CATEGORY_REF	15[A1]	EMF_STATUS_CHG_REASON_REF	211[A1]
ACCT_SEG_REF	19[A1]	EMF_STATUS_REF	213[A1]
ADDRESS_CATEGORY_REF	21[A1]	EMF_SUSPENSION_REASON_REF	215[A1]
ADDRESS_TYPE_REF	24[A1]	ENTITY_TYPE_GROUP_REF	218[A1]
ADJ_REASON_CODE_REF	26[A1]	ENTITY_TYPE_REF	221[A1]
ADJ_TRANS_GROUP_REF	32[A1]	EQUIP_CLASS_CODE_REF	226[A1]
AGGR_USAGE_DEFINITIONS_REF	37[A1]	EQUIP_TYPE_CODE_REF	228[A1]
AMP_MODE_REF	41[A1]	EXRATE_CLASS_REF	232[A1]
ARCH_MODE_REF	44[A1]	EXT_ACCESS_METHOD_REF	236[A1]
ARCH_TYPE_REF	47[A1]	EXT_SOURCE_ID_REF	247[A1]
ATM_POPLIST_REF	51[A1]	EXT_SOURCE_TYPE_REF	249[A1]
BALANCE_XFER_DIFF_REF	53[A1]	EXTERNAL_ID_TYPE_REF	234[A1]
BAM_ERROR_CODE_REF	55[A1]	FILE_TYPE_REF	256[A1]
BATCH_CATEGORY_REF	12[CC]	FRANCHISE_CODE_REF	258[A1]
BATCH_INV_SOURCE_REF	16[CC]	GENDER_REF	260[A1]
BATCH_NOTIFY_EVENT_TYPE_REF	18[CC]	GENERIC_ENUMERATION_REF	262[A1]
BATCH_NOTIFY_TYPE_REF	20[CC]	GROUP_TYPE_REF	271[A1]
BATCH_PARTICIPANT_TYPE_REF	23[CC]	GRS_ACTION_REF	275[A1]
BATCH_REPORT_TYPE_REF	27[CC]	GRS_OPERATION_REF	277[A1]
BATCH_STATUS_REF	40[CC]	GUI_INDICATOR_REF	281[A1]
BATCH_TEMPLATE_TYPE_REF	43[CC]	INDUSTRY_TYPE_REF	284[A1]
BATCH_TYPE_PARAMETER_REF	45[CC]	INSERT_FOREIGN_KEY_REF	286[A1]
BATCH_TYPE_REF	47[CC]	INSERT_GRP_ID_REF	288[A1]
BATCH_TYPE_STAGE_REF	48[CC]	ITEM_CATEGORY_REF	291[A1]
BILL_CLASS_REF	60[A1]	ITEM_MARKETING_DATA_REF	296[A1]
BILL_DISP_METH_REF	63[A1]	JNL_EMF_BOOK_REF	12[A2]
BILL_FMT_OPT_REF	65[A1]	JURISDICTION_CLASS_REF	36[A2]
BILL_FMT_SECTION_EXCL_REF	67[A1]	KEY_DOMAIN	38[A2]
BILL_FMT_SECTION_TYPE_REF	69[A1]	LANGUAGE_CODE_REF	42[A2]
BILL_FMT_TEMPLATE_CODE_REF	71[A1]	LBX_ERROR_STATUS_REF	50[A2]
BILL_FORMAT_CODE_TYPE_REF	73[A1]	LBX_SOURCE_ID_REF	56[A2]
		LOCATION_CODE_REF	60[A2]

MKT_CODE_REF	65[A2]	ZONE_CLASS_REF	365[A2]
MOBILE_ZONE_REF	68[A2]	ZONE_REF	367[A2]
MOBILE_ZONE_TYPE_REF	69[A2]	<i>is_international</i>	
MSG_GRP_ID_REF	72[A2]	USAGE_POINTS	342[A2]
MSG_TRIGGER_ID_REF	74[A2]	<i>is_journalable</i>	
NET_ACTION_REF	76[A2]	ADJ_TRANS_DESCR	30[A1]
NET_INTERFACE_REF	80[A2]	BMF_TRANS_DESCR	89[A1]
NOTE_REASON_REF	82[A2]	NRC_TRANS_DESCR	92[A2]
NOTE_TEMPLATE_REF	84[A2]	<i>is_late_fee_exempt</i>	
NOTE_TYPE_REF	87[A2]	ADJ_TRANS_DESCR	30[A1]
NRC_LINE_REF	89[A2]	CDR_DATA_TAX	176[CC]
OPEN_ITEM_ID_REF	95[A2]	CDR_DATA_WORK_TAX	116[A1]
ORD_ITEM_ACTION_REF	106[A2]	NRC_TRANS_DESCR	93[A2]
ORD_ITEM_MEMBER_TYPE_REF	108[A2]	PRODUCT_ELEMENTS	175[A2]
ORD_ITEM_TYPE_REF	113[A2]	TAX_PKG_INST_ID_REF	297[A2]
ORD_ORDER_STATUS_REF	115[A2]	USAGE_TYPES	352[A2]
ORD_SERVICE_ORDER_TYPE_REF	117[A2]	<i>is_lidb_required</i>	
OWNING_COST_CTR_REF	124[A2]	INDUSTRY_TYPE_REF	284[A1]
PACKAGE_DEFINITION_REF	129[A2]	<i>is_locked</i>	
PACKAGE_GROUP_REF	131[A2]	ORD_ORDER	292[CC]
PAYMENT_MERCHANT_ID_REF	141[A2]	<i>is_master</i>	
PLAN_ID_CREDIT_REF	143[A2]	ARCH_TABLE_DEPENDS_REF	46[A1]
PLAN_ID_DISCOUNT_REF	145[A2]	<i>is_modifiable</i>	
POINT_CATEGORY_REF	147[A2]	ADJ_TRANS_DESCR	29[A1]
POINT_CLASS_REF	149[A2]	NRC_TRANS_DESCR	92[A2]
POINT_REGION_REF	151[A2]	<i>is_multi_threshold</i>	
PRIVACY_LEVEL_REF	153[A2]	PLAN_ID_DISCOUNT_REF	145[A2]
PROCESS_WORK_CARDINAL_REF	163[A2]	<i>is_negative_bill_adj</i>	
PROVIDER_CLASS_REF	180[A2]	ADJ_TRANS_DESCR	30[A1]
RATABLE_UNIT_CLASS_REF	182[A2]	<i>is_optional</i>	
RATE_CURRENCY_GROUP_REF	190[A2]	BATCH_TYPE_PARAMETER_REF	45[CC]
RATE_CURRENCY_REF	193[A2]	<i>is_or_cond</i>	
RATE_PERIOD_REF	203[A2]	ORD_CONDITION_EXPRESSION_GRP	100[A2]
RECORD_TYPE_REF	226[A2]	<i>is_override</i>	
REFUND_REASON_CODE_REF	229[A2]	UNIT_CREDIT_PROFILES	366[CC]
REGULATORY_ID_REF	231[A2]	<i>is_part_of_component</i>	
REV_RCV_COST_CENTER_REF	234[A2]	CUSTOMER_CONTRACT	221[CC]
ROAMING_OPERATOR_REF	238[A2]	CUSTOMER_CONTRACT_VIEW	227[CC]
RT_PAYMENT_RESP_REF	247[A2]	PRODUCT	312[CC]
SALES_CHANNEL_REF	250[A2]	PRODUCT_VIEW	322[CC]
SERVER_CATEGORY_REF	254[A2]	<i>is_permanent</i>	
SERVICE_CENTER_TYPE_REF	259[A2]	NOTE	273[CC]
SERVICE_PROVIDERS_REF	262[A2]	<i>is_pic_required</i>	
STATE_REF	264[A2]	INDUSTRY_TYPE_REF	284[A1]
STATUS_REASON_REF	267[A2]	<i>is_postalcode_required</i>	
STATUS_REF	269[A2]	ADDRESS_TYPE_REF	23[A1]
STATUS_TYPE_REF	271[A2]	<i>is_prepaid</i>	
SUSPENDED_REASON_REF	274[A2]	ACCOUNT_CATEGORY_REF	15[A1]
TAX_PKG_INST_ID_REF	296[A2]	SERVICE	351[CC]
TAX_STATUS_REF	301[A2]	SERVICE_VIEW	360[CC]
TAX_TYPE_COMM_REF	307[A2]	<i>is_prerated</i>	
TIMEZONE_REF	310[A2]	USAGE_TYPES	349[A2]
TRANS_SOURCE_REF	313[A2]	<i>is_pretaxed</i>	
UNITS_TYPE_REF	316[A2]	NRC_TRANS_DESCR	92[A2]
USAGE_FILE_CLASS_REF	327[A2]		
VIP_CODE_REF	358[A2]		
XFER_REASON_CODES_REF	362[A2]		

<i>is_promotion</i>			
CONTRACT_TYPES	161[A1]		
<i>is_rc</i>			
UNITS_TYPE_REF	316[A2]		
<i>is_realtime</i>			
PAYMENT_TRANS	305[CC]		
<i>is_refinance</i>			
ADJ_TRANS_DESCR	30[A1]		
<i>is_relational_constraint</i>			
BSD_APPLICATION_CONSTRAINTS	54[CC]		
<i>is_relational_default</i>			
BSD_APPLICATION_DEFAULTS	55[CC]		
<i>is_required</i>			
BILL_INSERT_GROUPS	79[A1]		
EMF_CONFIG_ADDR_CATEGORY_MAP	208[A1]		
EXT_PARAM_TYPE_ASSOC	246[A1]		
RAW_USAGE_FIELD_MAPPING	217[A2]		
RECORD_FIELD_DEF	220[A2]		
<i>is_reseller</i>			
ACCOUNT_CATEGORY_REF	15[A1]		
<i>is_rfr_required</i>			
EXT_CONTACTS	240[A1]		
<i>is_selectable</i>			
NOTE_REASON_REF	82[A2]		
<i>is_send</i>			
CLEARING_HOUSE_CONTACTS	143[A1]		
EXT_CONTACTS	238[A1]		
FILE_STATUS	253[A1]		
<i>is_service_level</i>			
ORD_ITEM_TYPE_ASSOC	112[A2]		
ORD_SERVICE_ORDER	296[CC]		
ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]		
<i>is_serviceability_applicable</i>			
COMPONENT_DEFINITION_REF	154[A1]		
EMF_CONFIG_ID_REF	209[A1]		
PACKAGE_DEFINITION_REF	129[A2]		
PRODUCT_ELEMENTS	175[A2]		
<i>is_serviceable</i>			
ADDRESS_TYPE_REF	24[A1]		
<i>is_start_bounded</i>			
CONTRACT_UNIT_CR	215[CC]		
ETUC_UPDATES	247[CC]		
<i>is_state_required</i>			
ADDRESS_TYPE_REF	23[A1]		
<i>is_streetname_required</i>			
ADDRESS_TYPE_REF	23[A1]		
<i>is_suborder</i>			
ORD_SERVICE_ORDER	296[CC]		
<i>is_symbol_first</i>			
RATE_CURRENCY_REF	193[A2]		
<i>is_system_generated</i>			
BONUS_POINT_TRANS_TYPE_REF	93[A1]		
<i>is_tax</i>			
PREPAYMENT_DISTRIBUTION	310[CC]		
<i>is_temporary</i>			
PAYMENT_PROFILE	302[CC]		
<i>is_time_sensitive</i>			
STATUS_TYPE_REF	271[A2]		
<i>is_usage</i>			
UNITS_TYPE_REF	316[A2]		
<i>is_variable_length</i>			
RECORD_TYPE_REF	226[A2]		
<i>is_variable_size</i>			
RECORD_FIELD_DEF	221[A2]		
<i>is_viewable</i>			
ADJ_TRANS_DESCR	29[A1]		
EXTERNAL_ID_TYPE_REF	234[A1]		
NRC_TRANS_DESCR	92[A2]		
<i>is_viewable_on_gui</i>			
BONUS_POINT_TRANS_TYPE_REF	92[A1]		
<i>isdst</i>			
TIMEZONE_REF	310[A2]		
<i>iso_code</i>			
COUNTRY_CODE_REF	168[A1]		
<i>item_action_id</i>			
ORD_ITEM	287[CC]		
ORD_ITEM_ACTION_REF	106[A2]		
ORD_ITEM_ACTION_VALUES	107[A2]		
ORD_ITEM_MAP	96[CC]		
ORD_ITEM_TYPE_ASSOC	112[A2]		
<i>item_category_id</i>			
ITEM_CATEGORY_REF	291[A1]		
ITEM_CATEGORY_VALUES	292[A1]		
ITEM_CATG_INDUSTRY_ASSOC	293[A1]		
ITEM_CATG_MKTG_ASSOC	294[A1]		
<i>item_id</i>			
ORD_INV_PLACEHOLDER	285[CC]		
ORD_ITEM	287[CC]		
<i>item_link</i>			
ITEM_MARKETING_DATA_LINKS	295[A1]		
<i>item_marketing_data_id</i>			
ITEM_CATG_MKTG_ASSOC	294[A1]		
ITEM_MARKETING_DATA_LINKS	295[A1]		
ITEM_MARKETING_DATA_REF	296[A1]		
ITEM_MARKETING_DATA_VALUES	298[A1]		
<i>item_marketing_data_links_id</i>			
ITEM_MARKETING_DATA_LINKS	295[A1]		
<i>item_member_type_id</i>			
ORD_ITEM_MEMBER_TYPE_REF	108[A2]		
ORD_ITEM_MEMBER_TYPE_VALUES	109[A2]		
<i>item_number</i>			
ABI_TEXT	115[CC]		
<i>item_primary_image</i>			
ITEM_CATEGORY_VALUES	292[A1]		
<i>item_secondary_image</i>			
ITEM_CATEGORY_VALUES	292[A1]		
<i>item_thumbnail</i>			
ITEM_CATEGORY_VALUES	292[A1]		

<i>item_type</i>			
ITEM_MARKETING_DATA_REF	296[A1]		
<i>item_type_id</i>			
ITEM_MARKETING_DATA_REF	296[A1]		
ORD_CONDITION	98[A2]		
ORD_ITEM	287[CC]		
ORD_ITEM_ROUTE	110[A2]		
ORD_ITEM_TYPE_ASSOC	112[A2]		
ORD_ITEM_TYPE_REF	113[A2]		
ORD_ITEM_TYPE_VALUES	114[A2]		
ORD_SERVICE_ORDER	296[CC]		
<i>ixc_provider_id</i>			
SERVICE	350[CC]		
SERVICE_VIEW	359[CC]		
J			
<i>java_class</i>			
BSD_ATTRIBUTE_DEFAULTS	61[CC]		
BSD_RELATIONAL_DEFAULTS	82[CC]		
<i>je_category_name</i>			
JNL_CUSTOM	10[A2]		
<i>jnl_backout</i>			
JNL_RUNS	33[A2]		
JNL_RUNS_STATUS	262[CC]		
<i>jnl_code_id</i>			
JNL_CUSTOM	10[A2]		
JNL_DETAIL	258[CC]		
JNL_KEYS	21[A2]		
JNL_KEYS_DEFAULT	27[A2]		
JNL_TRANS	263[CC]		
<i>jnl_completion_dt</i>			
JNL_RUNS_STATUS	262[CC]		
<i>jnl_earned_thru_dt</i>			
BILL_INVOICE	137[CC]		
JNL_INVOICE_AUDIT	261[CC]		
JNL_WORK_LIST	265[CC]		
<i>jnl_end_dt</i>			
JNL_CYCLE	11[A2]		
JNL_DETAIL	258[CC]		
JNL_RUNS	33[A2]		
JNL_RUNS_STATUS	262[CC]		
JNL_TRANS	263[CC]		
TCU_DET_REP	363[CC]		
<i>jnl_feed_status</i>			
JNL_DETAIL	259[CC]		
JNL_TRANS	264[CC]		
<i>jnl_field</i>			
JNL_FEED_LAYOUT	16[A2]		
<i>jnl_field_db_cr</i>			
JNL_FEED_LAYOUT	15[A2]		
<i>jnl_field_description</i>			
JNL_FEED_LAYOUT	17[A2]		
<i>jnl_field_format</i>			
JNL_FEED_LAYOUT	17[A2]		
<i>jnl_field_position</i>			
JNL_FEED_LAYOUT	15[A2]		
<i>jnl_field_size</i>			
JNL_FEED_LAYOUT	16[A2]		
<i>jnl_field_trim</i>			
JNL_FEED_LAYOUT	17[A2]		
<i>jnl_hardcoded_value</i>			
JNL_FEED_LAYOUT	16[A2]		
<i>jnl_key_status</i>			
JNL_KEYS	24[A2]		
JNL_KEYS_DEFAULT	30[A2]		
<i>jnl_ref_no</i>			
JNL_DETAIL	257[CC]		
JNL_ERRORS	260[CC]		
JNL_INVOICE_AUDIT	261[CC]		
JNL_RUNS_STATUS	262[CC]		
JNL_TRANS	263[CC]		
<i>jnl_ref_no_serv</i>			
JNL_DETAIL	257[CC]		
JNL_ERRORS	260[CC]		
JNL_INVOICE_AUDIT	261[CC]		
JNL_RUNS_STATUS	262[CC]		
JNL_TRANS	263[CC]		
<i>jnl_run_dt</i>			
JNL_RUNS	33[A2]		
JNL_RUNS_STATUS	262[CC]		
<i>jnl_start_dt</i>			
JNL_CYCLE	11[A2]		
<i>jnl_status</i>			
BILL_INVOICE	138[CC]		
JNL_INVOICE_AUDIT	261[CC]		
JNL_WORK_LIST	265[CC]		
OUTCOLLECT_BATCH	120[A2]		
<i>jnl_subcycle_end_dt</i>			
JNL_DETAIL	258[CC]		
JNL_RUNS	33[A2]		
JNL_RUNS_STATUS	262[CC]		
JNL_SUBCYCLE	34[A2]		
JNL_TRANS	264[CC]		
<i>jnl_subcycle_start_dt</i>			
JNL_SUBCYCLE	34[A2]		
<i>jnl_table</i>			
JNL_FEED_LAYOUT	15[A2]		
<i>jnl_type</i>			
JNL_RUNS	33[A2]		
JNL_RUNS_STATUS	262[CC]		
<i>journal_code</i>			
ADJ_REASON_CODE_REF	26[A1]		
<i>journal_delay</i>			
NRC_TRANS_DESCR	92[A2]		
<i>journal_entry</i>			
JNL_CUSTOM	10[A2]		
<i>jurisdiction</i>			
ADJ	123[CC]		
BILL_FORMAT_TEMPLATE	77[A1]		
CDR_DATA	169[CC]		
CDR_DATA_WORK	110[A1]		

CDR_FREE	177[CC]	<i>key3</i>	
CDR_OUTCOLLECTS	118[A1]	PROCESS_WORK	162[A2]
CIBER_INCOLLECTS	130[A1]	PROCESS_WORK_CM_NAME_PREFIX	165[A2]
CIBER_INCOLLECTS_ERROR	133[A1]	<i>key3_domain_id</i>	
COUNTRY_JURISDICTION	171[A1]	PROCESS_WORK_CARDINAL_REF	163[A2]
DISCOUNT_DEFINITIONS	190[A1]	<i>knn_merchant_acct</i>	
DISTANCE_BANDS	200[A1]	CLEARING_HOUSE_INFO	148[A1]
JNL_DETAIL	258[CC]	<i>knn_merchant_id</i>	
JNL_KEYS	24[A2]	CLEARING_HOUSE_INFO	148[A1]
JNL_KEYS_DEFAULT	30[A2]		
JNL_TRANS	263[CC]	L	
JURISDICTIONS	35[A2]	<i>lac</i>	
OUTCOLLECT_BATCH_DETAIL	121[A2]	MOBILE_GLOBAL_CELL_ID	67[A2]
PRODUCT_JURISDICTION	177[A2]	<i>language_code</i>	
PRODUCT_RATE_KEY	318[CC]	ABI_SOURCE_VALUES	12[A1]
RATE_PERIODS	201[A2]	ACCESS_REGION_VALUES	14[A1]
RATE_RC	206[A2]	ACCOUNT_BALANCES	117[CC]
RATE_USAGE	209[A2]	ACCOUNT_CATEGORY_VALUES	16[A1]
RATE_USAGE_OVERRIDES	216[A2]	ACCT_SEG_VALUES	20[A1]
RE_CHARGE_MODIFIER	236[A2]	ADDRESS_CATEGORY_VALUES	22[A1]
TAX_CODES_COMM	287[A2]	ADDRESS_TYPE_VALUES	25[A1]
UNIT_CR_RATE_LIMIT	321[A2]	ADJ_REASON_CODE_VALUES	27[A1]
USAGE_JURISDICTION	337[A2]	ADJ_TRANS_GROUP_VALUES	33[A1]
USAGE_TYPES_UNITS	355[A2]	AGGR_USAGE_DEFINITIONS_VALUES	38[A1]
<i>jurisdiction_class</i>		AMP_MODE_VALUES	42[A1]
JURISDICTION_CLASS_REF	36[A2]	ARCH_MODE_VALUES	45[A1]
JURISDICTION_CLASS_VALUES	37[A2]	ARCH_TYPE_VALUES	48[A1]
JURISDICTIONS	35[A2]	ATM_POPLIST_VALUES	52[A1]
<i>jurisdiction_mask</i>		BALANCE_XFER_DIFF_VALUES	54[A1]
JNL_KEYS_MASK	32[A2]	BAM_ERROR_CODE_VALUES	56[A1]
<i>justify_type</i>		BATCH_CATEGORY_VALUES	13[CC]
RECORD_FIELD_DEF	221[A2]	BATCH_INV_SOURCE_VALUES	17[CC]
K		BATCH_NOTIFY_EVENT_TYPE_VALUES	19[CC]
<i>keep_running_total</i>		BATCH_NOTIFY_TYPE_VALUES	21[CC]
USAGE_TYPES	349[A2]	BATCH_PARTICIPANT_TYPE_VALUES	24[CC]
<i>key_display_string</i>		BATCH_REPORT_TYPE_VALUES	28[CC]
PROCESS_WORK_CARDINAL_VALUES	164[A2]	BATCH_STATUS_VALUES	41[CC]
<i>key_line_code</i>		BATCH_TEMPLATE_TYPE_VALUES	44[CC]
LOCAL_ADDRESS	269[CC]	BATCH_TYPE_PARAMETER_VALUES	46[CC]
MASTER_ADDRESS	94[CC]	BATCH_TYPE_STAGE_VALUES	49[CC]
<i>key_nm</i>		BATCH_TYPE_VALUES	50[CC]
ARB_TAB_DEPENDS	43[A1]	BILL_CLASS_VALUES	61[A1]
<i>key_order_level</i>		BILL_DISP_METH_VALUES	64[A1]
OPEN_ITEM_PRIORITY_MAP	97[A2]	BILL_FMT_OPT_VALUES	66[A1]
<i>key1</i>		BILL_FMT_SECTION_EXCL_VALUES	68[A1]
PROCESS_WORK	162[A2]	BILL_FMT_SECTION_TYPE_VALUES	70[A1]
PROCESS_WORK_CM_NAME_PREFIX	165[A2]	BILL_FMT_TEMPLATE_CODE_VALUES	72[A1]
<i>key1_domain_id</i>		BILL_FORMAT_CODE_TYPE_VALUES	74[A1]
PROCESS_WORK_CARDINAL_REF	163[A2]	BILL_INSERTS	78[A1]
<i>key2</i>		BILL_INVOICE	138[CC]
PROCESS_WORK	162[A2]	BILL_MESSAGES	80[A1]
PROCESS_WORK_CM_NAME_PREFIX	165[A2]	BILL_PERIOD_VALUES	83[A1]
<i>key2_domain_id</i>		BILLING_FREQUENCY_VALUES	58[A1]
PROCESS_WORK_CARDINAL_REF	163[A2]	BONUS_POINT_ID_VALUES	91[A1]
		BONUS_POINT_TRANS_TYPE_VALUES	94[A1]
		BSD_APPLICATION_VALUES	57[CC]
		BSD_ATTR_CONSTRNT_TYPE_VALUES	64[CC]

BSD_BUSINESS_UNIT_VALUES	66[CC]	JNL_EMF_BOOK_VALUES	13[A2]
BSD_CONSTRAINT_DESC_VALUES	68[CC]	JURISDICTION_CLASS_VALUES	37[A2]
BSD_CONSTRAINT_MESSAGE_VALUES	70[CC]	KEY_DOMAIN_SYMBOL_VALUES	40[A2]
BSD_LOCALE_LANG	71[CC]	LANGUAGE_CODE_REF	42[A2]
BSD_REL_CONSTRNT_TYPE_VALUES	86[CC]	LANGUAGE_CODE_VALUES	43[A2]
CARD_TYPE_CODE_VALUES	98[A1]	LBX_ERROR_STATUS_VALUES	51[A2]
CCARD_RESPONSE_CODE_VALUES	101[A1]	LBX_SOURCE_ID_VALUES	57[A2]
CDR_ADJ_ERROR_VALUES	105[A1]	LOCATION_CODE_VALUES	61[A2]
CDR_COMP_STATUS_VALUES	108[A1]	MKT_CODE_VALUES	66[A2]
CELL_ID_VALUES	123[A1]	MOBILE_ZONE_TYPE_VALUES	70[A2]
CLASS_OF_SERVICE_CODE_VALUES	142[A1]	MOBILE_ZONE_VALUES	71[A2]
CLEARING_HOUSE_ID_VALUES	147[A1]	MSG_GRP_ID_VALUES	73[A2]
CMF	183[CC]	MSG_TRIGGER_ID_VALUES	75[A2]
CMF_STATUS_CHG_REASON_VALUES	151[A1]	NET_ACTION_VALUES	77[A2]
CMF_STATUS_VALUES	153[A1]	NET_INTERFACE_VALUES	81[A2]
COMPONENT_DEFINITION_VALUES	155[A1]	NOTE_REASON_VALUES	83[A2]
CONNECT_REASON_CODES_VALUES	158[A1]	NOTE_TEMPLATE_VALUES	85[A2]
CORRIDOR_PLAN_ID_VALUES	167[A1]	NOTE_TYPE_VALUES	88[A2]
COUNTRY_CODE_VALUES	169[A1]	NRC_LINE_VALUES	90[A2]
CURRENCY_TYPE_VALUES	176[A1]	OPEN_ITEM_ID_VALUES	96[A2]
DB_MESSAGES	177[A1]	ORD_DEPENDENCY_TYPE_VALUES	103[A2]
DENIAL_REASON_VALUES	179[A1]	ORD_ITEM_ACTION_VALUES	107[A2]
DEPOSIT_TYPE_VALUES	183[A1]	ORD_ITEM_MEMBER_TYPE_VALUES	109[A2]
DESCRIPTIONS	184[A1]	ORD_ITEM_TYPE_VALUES	114[A2]
DISCONNECT_REASON_VALUES	187[A1]	ORD_ORDER_STATUS_VALUES	116[A2]
DISCOUNT_THRESH_TIER_ID_VALUES	199[A1]	ORD_SERVICE_ORDER_TYPE_VALUES	118[A2]
DISTANCE_BANDS_ID_VALUES	202[A1]	OWNING_COST_CTR_VALUES	125[A2]
EFT_RESPONSE_CODE_VALUES	206[A1]	PACKAGE_DEFINITION_VALUES	130[A2]
EMF_CONFIG_ID_VALUES	210[A1]	PACKAGE_GROUP_VALUES	132[A2]
EMF_STATUS_CHG_REASON_VALUES	212[A1]	PARAM_VALUES	135[A2]
EMF_STATUS_VALUES	214[A1]	PAYMENT_MERCHANT_ID_VALUES	142[A2]
EMF_SUSPENSION_REASON_VALUES	216[A1]	PLAN_ID_CREDIT_VALUES	144[A2]
ENTITY_TYPE_GROUP_VALUES	219[A1]	PLAN_ID_DISCOUNT_VALUES	146[A2]
ENTITY_TYPE_VALUES	222[A1]	POINT_CATEGORY_VALUES	148[A2]
EQUIP_CLASS_CODE_VALUES	227[A1]	POINT_CLASS_VALUES	150[A2]
EQUIP_TYPE_CODE_VALUES	229[A1]	POINT_REGION_VALUES	152[A2]
EXRATE_CLASS_VALUES	233[A1]	PRIVACY_LEVEL_VALUES	154[A2]
EXT_ACCESS_METHOD_VALUES	237[A1]	PROCESS_WORK_CARDINAL_VALUES	164[A2]
EXT_SOURCE_ID_VALUES	248[A1]	PROVIDER_CLASS_VALUES	181[A2]
EXT_SOURCE_TYPE_VALUES	250[A1]	RATABLE_UNIT_CLASS_VALUES	183[A2]
EXTERNAL_ID_TYPE_VALUES	235[A1]	RATE_CURRENCY_GROUP_VALUES	191[A2]
FILE_TYPE_VALUES	257[A1]	RATE_CURRENCY_VALUES	194[A2]
FRANCHISE_CODE_VALUES	259[A1]	RATE_PERIOD_VALUES	204[A2]
GENDER_VALUES	261[A1]	RECORD_TYPE_VALUES	228[A2]
GENERIC_ENUMERATION_VALUES	263[A1]	REFUND_REASON_CODE_VALUES	230[A2]
GLOBAL_ACCOUNT_BALANCES	266[A1]	REGULATORY_ID_VALUES	232[A2]
GROUP_TYPE_VALUES	272[A1]	REPORT_ADJ	334[CC]
GRS_ACTION_VALUES	276[A1]	REPORT_PAY_DETAIL	346[CC]
GRS_OPERATION_VALUES	278[A1]	REV_RCV_COST_CENTER_VALUES	235[A2]
GUI_INDICATOR_VALUES	282[A1]	ROAMING_OPERATOR_VALUES	239[A2]
GUI_MESSAGES	283[A1]	RT_PAYMENT_RESP_VALUES	248[A2]
INDUSTRY_TYPE_VALUES	285[A1]	SALES_CHANNEL_VALUES	251[A2]
INSERT_FOREIGN_KEY_VALUES	287[A1]	SERVER_CATEGORY_VALUES	255[A2]
INSERT_GRP_ID_VALUES	289[A1]	SERVICE_CENTER_TYPE_VALUES	260[A2]
ITEM_CATEGORY_VALUES	292[A1]	SERVICE_PROVIDERS_VALUES	263[A2]
ITEM_MARKETING_DATA_LINKS	295[A1]	STATE_VALUES	265[A2]
ITEM_MARKETING_DATA_VALUES	298[A1]	STATUS_REASON_VALUES	268[A2]

STATUS_TYPE_VALUES	272[A2]	<i>late_fee_type_id</i>	
STATUS_VALUES	273[A2]	LATE_FEE_GROUPS	45[A2]
SUSPENDED_REASON_VALUES	275[A2]	LATE_FEE_RATES	46[A2]
TAX_PKG_INST_ID_VALUES	298[A2]	LATE_FEE_TYPES	47[A2]
TAX_STATUS_VALUES	302[A2]	<i>lbx_account_id</i>	
TAX_THRESHOLD_VALUES	306[A2]	LBX_ERROR	48[A2]
TAX_TYPE_COMM_VALUES	308[A2]	LBX_POST_DATED	54[A2]
TIMEZONE_VALUES	311[A2]	<i>lbx_cycle_type</i>	
TRANS_SOURCE_VALUES	314[A2]	LBX_SOURCE_ID_REF	56[A2]
TRANSLATION	312[A2]	<i>lbx_error_status</i>	
UNITS_TYPE_VALUES	317[A2]	LBX_ERROR	48[A2]
USAGE_FILE_CLASS_VALUES	328[A2]	LBX_ERROR_STATUS_REF	50[A2]
USAGE_POINTS_TEXT	343[A2]	LBX_ERROR_STATUS_VALUES	51[A2]
VIP_CODE_VALUES	359[A2]	LBX_POST_DATED	54[A2]
XFER_REASON_CODES_VALUES	363[A2]	<i>lbx_file_status</i>	
ZONE_CLASS_VALUES	366[A2]	LBX_FILE_STATUS	52[A2]
ZONE_VALUES	368[A2]	<i>lbx_payment_id</i>	
<i>last_access_dt</i>		LBX_ERROR	48[A2]
EXT_CONTACTS_STATUS	241[A1]	LBX_POST_DATED	54[A2]
<i>last_call_dt</i>		<i>lbx_source_type</i>	
ROAMING_TRANSFER_DETAIL	241[A2]	LBX_SOURCE_ID_REF	56[A2]
<i>last_file_in</i>		<i>lct_date</i>	
CIBER_OPERATOR_SID_BID	136[A1]	LCT_METRICS	58[A2]
<i>last_file_in_dt</i>		<i>lct_metrics</i>	
OUTCOLLECT_BATCH_SEQ_NUM	122[A2]	LCT_METRICS	58[A2]
<i>last_file_out</i>		<i>le</i>	
CIBER_OPERATOR_SID_BID	136[A1]	JNL_CUSTOM	10[A2]
<i>last_file_out_dt</i>		<i>lec_provider_id</i>	
OUTCOLLECT_BATCH_SEQ_NUM	122[A2]	SERVICE	350[CC]
<i>last_name</i>		SERVICE_VIEW	359[CC]
CONTACTS	212[CC]	<i>left_value</i>	
<i>last_reviewed_by</i>		ORD_EXPRESSION	104[A2]
NRC_KEY	278[CC]	<i>legacy_note_code</i>	
<i>last_reviewed_name</i>		NOTE	273[CC]
ADJ	123[CC]	NOTE_TEMPLATE_VALUES	85[A2]
REFUND	331[CC]	<i>level_code</i>	
<i>last_scanline</i>		PRODUCT_ELEMENTS	174[A2]
BILL_FILES	132[CC]	RATE_CLASS_DESCR	187[A2]
<i>last_seq_no</i>		<i>level_identifier</i>	
MCAP_FLASH_SEQUENCE_NUMBERS	62[A2]	ETUC_UPDATES	246[CC]
<i>last_synch_dt</i>		<i>level_type</i>	
USAGE_LOCAL_COUNTS	339[A2]	ETUC_UPDATES	246[CC]
<i>last_truncated_table</i>		<i>lib_name</i>	
MCAP_RUN_DATE	63[A2]	DYNAMIC_USER_LIBS	203[A1]
<i>last_use_dt</i>		<i>lib_order</i>	
CUSTOMER_CONTRACT_KEY	223[CC]	DYNAMIC_USER_LIBS	203[A1]
<i>late_exempt_charges</i>		<i>line_data</i>	
CMF_BALANCE	192[CC]	BATCH_REPORT_LINES	26[CC]
CMF_BALANCE_DETAIL	194[CC]	<i>line_num</i>	
<i>late_fee_grp_id</i>		BILL_MESSAGES	80[A1]
LATE_FEE_ASSIGNMENT	44[A2]	<i>line_number</i>	
LATE_FEE_GROUPS	45[A2]	BATCH_REPORT_LINES	26[CC]
<i>late_fee_status</i>		GRS_ACTION_DEFINITION	273[A1]
BMF_DISTRIBUTION	162[CC]	<i>line_range_high</i>	
		CIBER_LINE_RANGES	135[A1]

<i>line_range_low</i>			
CIBER_LINE_RANGES	135[A1]		
<i>link_type</i>			
ITEM_MARKETING_DATA_LINKS	295[A1]		
<i>local_avg_cputime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>local_avg_walltime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>local_last_cputime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>local_last_walltime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>local_max_cputime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>local_max_walltime</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
<i>locale_id</i>			
BSD_LOCALE_LANG	71[CC]		
<i>locale_name</i>			
BSD_LOCALE_LANG	71[CC]		
<i>location</i>			
BSD_APPLICATION_REF	56[CC]		
<i>location_code</i>			
JNL_CUSTOM	10[A2]		
JNL_DETAIL	258[CC]		
JNL_TRANS	263[CC]		
LOCATION_CODE_REF	60[A2]		
LOCATION_CODE_VALUES	61[A2]		
<i>location_region</i>			
JNL_DETAIL	258[CC]		
JNL_TRANS	263[CC]		
<i>location_type</i>			
LOCATION_CODE_REF	60[A2]		
<i>lock_dt</i>			
ORD_ORDER	293[CC]		
<i>lock_who</i>			
ORD_ORDER	293[CC]		
<i>log_entry_id</i>			
BATCH_REQUEST_ACTIVITY_LOG	31[CC]		
<i>log_level</i>			
PROCESS_WORK_CARDINAL_REF	163[A2]		
<i>logfile_name</i>			
PROCESS_RUN	156[A2]		
<i>long_content_desc</i>			
ITEM_MARKETING_DATA_LINKS	295[A1]		
<i>lookup_table_name</i>			
RECORD_FIELD_MAP	223[A2]		
<i>lookup_threshold_tier_id</i>			
RATE_DISCOUNT	197[A2]		
<i>lower_limit</i>			
RATE_AGGR_USAGE	184[A2]		
M			
<i>main_provider_flag</i>			
SERVICE_PROVIDERS_REF	261[A2]		
<i>manual_ccauth_code</i>			
BMF	158[CC]		
BMF_UNAPPLIED	165[CC]		
DEPOSIT	238[CC]		
<i>manual_ccauth_date</i>			
BMF	159[CC]		
BMF_UNAPPLIED	165[CC]		
DEPOSIT	238[CC]		
<i>manual_code</i>			
ERROR_BILL	245[CC]		
JNL_ERRORS	260[CC]		
<i>mapping_direction</i>			
CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]		
<i>mapping_order</i>			
RECORD_FIELD_MAP	222[A2]		
<i>mapping_type</i>			
RECORD_FIELD_MAP	222[A2]		
<i>market_city</i>			
CIBER_SID_BID_MARKET	140[A1]		
<i>market_country_code</i>			
CIBER_SID_BID_MARKET	140[A1]		
<i>market_name</i>			
CIBER_LINE_RANGES	135[A1]		
<i>market_state_abbr</i>			
CIBER_SID_BID_MARKET	140[A1]		
<i>marketing_bill_ic1</i>			
ABI_INVOICE	112[CC]		
<i>marketing_bill_ic2</i>			
ABI_INVOICE	112[CC]		
<i>marketing_bill_ic3</i>			
ABI_INVOICE	113[CC]		
<i>marketing_bill_ic4</i>			
ABI_INVOICE	113[CC]		
<i>marketing_bill_ic5</i>			
ABI_INVOICE	113[CC]		
<i>marketing_bill_ic6</i>			
ABI_INVOICE	113[CC]		
<i>master_file_name</i>			
USAGE_MASTER_FILE_STATUS	368[CC]		
<i>max_amount</i>			
GROUP_AMOUNT	269[A1]		
<i>max_amt</i>			
LATE_FEE_TYPES	47[A2]		
<i>max_corridors</i>			
CORRIDOR_PLAN_ID_REF	166[A1]		
<i>max_days_in</i>			
CIBER_OPERATOR_SID_BID	136[A1]		
GSM_ROAMING_AGREEMENT	279[A1]		
<i>max_days_out</i>			
CIBER_OPERATOR_SID_BID	136[A1]		
GSM_ROAMING_AGREEMENT	279[A1]		
<i>max_distance</i>			
DISTANCE_BANDS	200[A1]		
<i>max_errored_rate</i>			
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]		

<i>max_inserts</i>			
INSERT_GRP_ID_REF	288[A1]		
<i>max_installments</i>			
NRC_TRANS_DESCR	93[A2]		
<i>max_percent_erored</i>			
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]		
<i>max_ref_no</i>			
BILL_REF_NO	154[CC]		
<i>max_retries</i>			
BSD_QUEUE_AUTO_RETRY	76[CC]		
<i>max_size_reached</i>			
USAGE_MASTER_FILE_STATUS	368[CC]		
<i>max_time_gap</i>			
EXT_CONTACTS	239[A1]		
<i>max_units_erored</i>			
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]		
<i>maximum_allowed</i>			
PACKAGE_COMPONENTS	126[A2]		
<i>maximum_amount</i>			
RATE_LATE_FEE	199[A2]		
<i>maximum_quantity</i>			
DEPENDENCY	180[A1]		
<i>maximum_range_value</i>			
CARD_TYPE_CODE_RANGE	96[A1]		
<i>maximum_rollover_amount</i>			
UNIT_CR_DEFINITIONS	319[A2]		
<i>maximum_rollover_units</i>			
UNIT_CR_DEFINITIONS	319[A2]		
<i>mcc</i>			
MCC_COUNTRY_CODES	64[A2]		
MOBILE_GLOBAL_CELL_ID	67[A2]		
<i>me</i>			
JNL_CUSTOM	10[A2]		
<i>measure_units</i>			
ITEM_MARKETING_DATA_REF	297[A1]		
<i>member_id</i>			
ORD_ITEM	287[CC]		
ORD_ITEM_TYPE_ASSOC	112[A2]		
PACKAGE_COMPONENT_MEMBERS	127[A2]		
<i>member_inst_id</i>			
ORD_ITEM	288[CC]		
<i>member_inst_id2</i>			
ORD_ITEM	289[CC]		
<i>member_required</i>			
PACKAGE_COMPONENT_MEMBERS	127[A2]		
<i>member_type</i>			
ORD_ITEM	287[CC]		
ORD_ITEM_MAP	96[CC]		
ORD_ITEM_TYPE_ASSOC	112[A2]		
PACKAGE_COMPONENT_MEMBERS	127[A2]		
<i>memo_status</i>			
TICKLER	309[A2]		
<i>memo_text</i>			
TICKLER	309[A2]		
<i>memo_type</i>			
TICKLER		309[A2]	
<i>merchant_account_no</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_category_code</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_city</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_id</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_name</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_phone</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_state_prov</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>merchant_zip</i>			
SERVICE_PROVIDERS_REF		261[A2]	
<i>message_content</i>			
BATCH_REQUEST_NOTIFY_MESSAGE		34[CC]	
<i>message_data</i>			
BATCH_REQUEST_NOTIFY_MESSAGE		34[CC]	
<i>message_id</i>			
BILL_MESSAGE_GROUPS		81[A1]	
BILL_MESSAGES		80[A1]	
BSD_ATTRIBUTE_CONSTRAINTS		59[CC]	
BSD_CONSTRAINT_MESSAGE_REF		69[CC]	
BSD_CONSTRAINT_MESSAGE_VALUES		70[CC]	
BSD_EXCEPTION		166[CC]	
BSD_RELATIONAL_CONSTRAINTS		80[CC]	
CMF_MESSAGES		206[CC]	
<i>message_language</i>			
ERROR_SEVERITIES		230[A1]	
SYSTEM_MESSAGES		276[A2]	
<i>message_name</i>			
BATCH_REQUEST_NOTIFY_MESSAGE		34[CC]	
SYSTEM_MESSAGES		276[A2]	
<i>message_number</i>			
BATCH_REQUEST_NOTIFY_MESSAGE		34[CC]	
SYSTEM_MESSAGES		276[A2]	
<i>message_severity</i>			
ERROR_SEVERITIES		230[A1]	
SYSTEM_MESSAGES		276[A2]	
<i>message_status</i>			
BATCH_REQUEST_NOTIFY_MESSAGE		34[CC]	
<i>message_text</i>			
BILL_MESSAGES		80[A1]	
SYSTEM_MESSAGES		276[A2]	
<i>micr_bank_id</i>			
BMF		158[CC]	
BMF_UNAPPLIED		165[CC]	
LBX_ERROR		48[A2]	
LBX_POST_DATED		54[A2]	
PREPAYMENT		308[CC]	

<i>micr_check_num</i>			
BMF	158[CC]	<i>minimum_quantity</i>	
BMF_UNAPPLIED	165[CC]	DEPENDENCY	180[A1]
LBX_ERROR	48[A2]	<i>minimum_range_value</i>	
LBX_POST_DATED	54[A2]	CARD_TYPE_CODE_RANGE	96[A1]
PREPAYMENT	308[CC]	<i>minimum_required</i>	
<i>micr_dda_num</i>		PACKAGE_COMPONENTS	126[A2]
BMF	158[CC]	<i>misc_number1</i>	
BMF_UNAPPLIED	165[CC]	BILL_INVOICE_DETAIL	150[CC]
LBX_ERROR	48[A2]	<i>misc_number2</i>	
LBX_POST_DATED	54[A2]	BILL_INVOICE_DETAIL	150[CC]
PREPAYMENT	308[CC]	<i>misc_surcharge</i>	
<i>middle_name</i>		CIBER_INCOLLECTS	128[A1]
CONTACTS	212[CC]	CIBER_INCOLLECTS_ERROR	132[A1]
<i>min_amt</i>		<i>misc_surcharge_desc</i>	
LATE_FEE_TYPES	47[A2]	CIBER_INCOLLECTS	129[A1]
<i>min_bal_thresh</i>		CIBER_INCOLLECTS_ERROR	132[A1]
LATE_FEE_TYPES	47[A2]	<i>missed_bill_code</i>	
<i>min_bal_threshold</i>		ABI_SOURCE_REF	11[A1]
RATE_LATE_FEE	199[A2]	<i>miu_ccard_account</i>	
<i>min_billing_units</i>		CDR_DATA_WORK	111[A1]
USAGE_TYPES	351[A2]	<i>miu_ccard_carrier_code</i>	
<i>min_charge_amt</i>		CDR_DATA_WORK	111[A1]
RATE_USAGE	211[A2]	<i>miu_ccard_expire</i>	
<i>min_distance</i>		CDR_DATA_WORK	112[A1]
DISTANCE_BANDS	200[A1]	<i>miu_ccard_ownr_fname</i>	
<i>min_duration</i>		CDR_DATA_WORK	111[A1]
CONTRACT_TYPES	162[A1]	<i>miu_ccard_ownr_lname</i>	
<i>min_duration_date</i>		CDR_DATA_WORK	112[A1]
CUSTOMER_CONTRACT	221[CC]	<i>miu_disp_code</i>	
CUSTOMER_CONTRACT_VIEW	228[CC]	CDR_DATA_WORK	113[A1]
<i>min_duration_units</i>		<i>miu_disp_status</i>	
CONTRACT_TYPES	162[A1]	CDR_DATA_WORK	113[A1]
<i>min_notice_date</i>		<i>miu_error_code1</i>	
CUSTOMER_CONTRACT	221[CC]	CDR_DATA_WORK	112[A1]
CUSTOMER_CONTRACT_VIEW	228[CC]	<i>miu_error_code2</i>	
<i>min_notice_delay</i>		CDR_DATA_WORK	112[A1]
CONTRACT_TYPES	162[A1]	<i>miu_error_code3</i>	
<i>min_notice_units</i>		CDR_DATA_WORK	112[A1]
CONTRACT_TYPES	162[A1]	<i>miu_investigator</i>	
<i>min_percent_processed</i>		CDR_DATA_WORK	113[A1]
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]	<i>miu_locked_by</i>	
<i>min_percent_succeeded</i>		CDR_DATA_WORK	113[A1]
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]	<i>miu_notes</i>	
<i>min_processed_rate</i>		CDR_DATA_WORK	113[A1]
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]	<i>miu_queue</i>	
<i>min_succeeded_rate</i>		CDR_DATA_WORK	113[A1]
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]	<i>mkt_code</i>	
<i>min_units_processed</i>		ACCT_SEG_MAP	18[A1]
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]	BILL_INSERT_GROUPS	79[A1]
<i>min_units_succeeded</i>		BILL_MESSAGE_GROUPS	81[A1]
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]	CDR_DATA_WORK	110[A1]
<i>minimum_amount</i>		CMF	186[CC]
RATE_LATE_FEE	199[A2]	JNL_DETAIL	258[CC]
		JNL_KEYS	24[A2]
		JNL_KEYS_DEFAULT	30[A2]

JNL_TRANS	264[CC]	<i>move_dt</i>	
JNL_WORK_LIST	265[CC]	ACCOUNT_MOVE_STATUS	11[CC]
LATE_FEE_ASSIGNMENT	44[A2]	<i>moved_account</i>	
LBX_ERROR	49[A2]	UNIT_CREDIT_PROFILES	367[CC]
LBX_POST_DATED	55[A2]	<i>mps_miu_dt</i>	
MKT_CODE_REF	65[A2]	CDR_DATA_WORK	112[A1]
MKT_CODE_VALUES	66[A2]	<i>msc_total</i>	
NET_INTERFACE_ELIGIBILITY	79[A2]	CC_BALANCE	102[A1]
TCU_DET_REP	363[CC]	<i>msg</i>	
<i>mkt_code_mask</i>		DB_MESSAGES	177[A1]
JNL_KEYS_MASK	32[A2]	<i>msg_acct_digits</i>	
<i>mnc</i>		CIBER_INCOLLECTS	128[A1]
MOBILE_GLOBAL_CELL_ID	67[A2]	CIBER_INCOLLECTS_ERROR	132[A1]
<i>mnc_length</i>		<i>msg_foreign_key</i>	
ROAMING_OPERATOR_REF	238[A2]	BILL_MESSAGE_GROUPS	81[A1]
<i>mobile_call_direction</i>		<i>msg_grp_id</i>	
USAGE_TYPES_FEATURES	353[A2]	ACCT_SEG_MAP	18[A1]
<i>mobile_country_code</i>		BILL_MESSAGE_GROUPS	81[A1]
GSM_ROAMING_AGREEMENT	279[A1]	CMF	185[CC]
<i>mobile_network_code</i>		CMF_MESSAGES	206[CC]
GSM_ROAMING_AGREEMENT	279[A1]	MSG_GRP_ID_REF	72[A2]
<i>mobile_zone</i>		MSG_GRP_ID_VALUES	73[A2]
MOBILE_GLOBAL_CELL_ID	67[A2]	<i>msg_id</i>	
MOBILE_SERVICE_ZONES	271[CC]	CDR_BILLED	167[CC]
MOBILE_ZONE_REF	68[A2]	CDR_DATA	169[CC]
MOBILE_ZONE_VALUES	71[A2]	CDR_DATA_DUC	173[CC]
USAGE_POINTS	342[A2]	CDR_DATA_TAX	175[CC]
<i>mobile_zone_type</i>		CDR_DATA_WORK	110[A1]
MOBILE_SERVICE_ZONES	271[CC]	CDR_DATA_WORK_TAX	115[A1]
MOBILE_ZONE_TYPE_REF	69[A2]	CDR_FREE	177[CC]
MOBILE_ZONE_TYPE_VALUES	70[A2]	CDR_OUTCOLLECTS	118[A1]
<i>module</i>		CDR_RAW_USAGE	121[A1]
CLEARING_HOUSE_CONTACTS	143[A1]	CDR_RERATED	180[CC]
CLEARING_HOUSE_INFO	148[A1]	CDR_UNBILLED	181[CC]
DYNAMIC_USER_LIBS	203[A1]	CIBER_INCOLLECTS	127[A1]
PROCESS_SOCKET	159[A2]	CIBER_INCOLLECTS_ERROR	131[A1]
REPORT_PAY_DETAIL	346[CC]	REPORT_BED	336[CC]
SYSTEM_PARAMETERS	278[A2]	RPU_WORK_STATUS	348[CC]
TRANS_SOURCE_REF	313[A2]	<i>msg_id_serv</i>	
<i>module_name</i>		CDR_BILLED	167[CC]
GROUP_AMOUNT	269[A1]	CDR_DATA	169[CC]
GROUP_FUNCTION	270[A1]	CDR_DATA_DUC	173[CC]
PROCESS_RUN	156[A2]	CDR_DATA_TAX	175[CC]
PROCESS_WORK_CARDINAL_REF	163[A2]	CDR_DATA_WORK	110[A1]
PROCESS_WORK_CARDINAL_VALUES	164[A2]	CDR_DATA_WORK_TAX	115[A1]
PROCESS_WORK_CM_NAME_PREFIX	165[A2]	CDR_FREE	177[CC]
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]	CDR_OUTCOLLECTS	118[A1]
PROCESS_WORK_STATUS_DEF	169[A2]	CDR_RAW_USAGE	121[A1]
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]	CDR_RERATED	180[CC]
SYSTEM_MESSAGES	276[A2]	CDR_UNBILLED	181[CC]
SYSTEM_MODULES	277[A2]	CIBER_INCOLLECTS	127[A1]
<i>money_value</i>		CIBER_INCOLLECTS_ERROR	131[A1]
CDR_DATA_DUC	173[CC]	REPORT_BED	336[CC]
<i>month</i>		RPU_WORK_STATUS	348[CC]
RATE_PERIODS	202[A2]	<i>msg_id2</i>	
		CDR_BILLED	167[CC]

CDR_DATA	169[CC]	<i>ndevice_id</i>	
CDR_DATA_DUC	173[CC]	DEVICES	185[A1]
CDR_DATA_TAX	175[CC]	<i>nearest_crossstreet</i>	
CDR_DATA_WORK	110[A1]	LOCAL_ADDRESS	269[CC]
CDR_DATA_WORK_TAX	115[A1]	MASTER_ADDRESS	94[CC]
CDR_FREE	177[CC]	<i>nested_disconnect</i>	
CDR_OUTCOLLECTS	118[A1]	ORD_LOGICAL_SERVICE_ORDER	291[CC]
CDR_RAW_USAGE	121[A1]	<i>net_action_id</i>	
CDR_RERATED	180[CC]	NET_ACTION_REF	76[A2]
CDR_UNBILLED	181[CC]	NET_ACTION_VALUES	77[A2]
CIBER_INCOLLECTS	127[A1]	NET_INTERFACE_ACTIONS	78[A2]
CIBER_INCOLLECTS_ERROR	131[A1]	<i>net_action_name</i>	
REPORT_BED	336[CC]	NET_ACTION_REF	76[A2]
RPU_WORK_STATUS	348[CC]	<i>net_interface_id</i>	
<i>msg_name</i>		NET_INTERFACE_ACTIONS	78[A2]
GUI_MESSAGES	283[A1]	NET_INTERFACE_ELIGIBILITY	79[A2]
<i>msg_no</i>		NET_INTERFACE_REF	80[A2]
GUI_MESSAGES	283[A1]	NET_INTERFACE_VALUES	81[A2]
<i>msg_sequence_num</i>		<i>net_interface_name</i>	
BILL_MESSAGE_GROUPS	81[A1]	NET_INTERFACE_REF	80[A2]
CMF_MESSAGES	206[CC]	<i>net_new_charges</i>	
<i>msg_str</i>		CMF_BALANCE	191[CC]
EPR_ERROR	225[A1]	CMF_BALANCE_DETAIL	193[CC]
<i>msg_text</i>		<i>network_delay</i>	
GUI_MESSAGES	283[A1]	USAGE_TYPES	351[A2]
<i>msg_trigger_id</i>		<i>new_balance_account_no</i>	
BILL_FORMAT_PRODUCTS	76[A1]	ORD_LOGICAL_SERVICE_ORDER	291[CC]
BILL_MESSAGE_GROUPS	81[A1]	<i>new_charge_credits</i>	
CMF_MESSAGES	206[CC]	CMF_BALANCE	192[CC]
MSG_TRIGGER_ID_REF	74[A2]	CMF_BALANCE_DETAIL	194[CC]
MSG_TRIGGER_ID_VALUES	75[A2]	<i>new_charges</i>	
<i>msg_type</i>		CMF_BALANCE	191[CC]
GUI_MESSAGES	283[A1]	CMF_BALANCE_DETAIL	193[CC]
<i>msgno</i>		<i>new_cust_bank_sort_code</i>	
DB_MESSAGES	177[A1]	PAYMENT_PROFILE	300[CC]
<i>multi_tax_rate</i>		<i>new_jnl_earned_thru_dt</i>	
ROAMING_TRANSFER_DETAIL	241[A2]	JNL_INVOICE_AUDIT	261[CC]
N		<i>new_jnl_status</i>	
<i>name</i>		JNL_INVOICE_AUDIT	261[CC]
BSD_APPLICATION_REF	56[CC]	<i>new_open_item_id</i>	
BSD_ATTR_CONSTRNT_TYPE_REF	63[CC]	ORD_LOGICAL_SERVICE_ORDER	291[CC]
BSD_BUSINESS_UNIT_REF	65[CC]	<i>new_postpaid_account_no</i>	
BSD_CONSTRAINT_MESSAGE_REF	69[CC]	ORD_LOGICAL_SERVICE_ORDER	291[CC]
BSD_REL_CONSTRNT_TYPE_REF	85[CC]	<i>newline_terminate_records</i>	
GRS_ACTION_OPERATIONS	274[A1]	GSM_ROAMING_AGREEMENT	280[A1]
<i>name_prefix</i>		<i>next_account_no</i>	
CONTACTS	212[CC]	ACCOUNT_ID_SEQ_NUM	10[CC]
<i>naming_extension</i>		<i>next_bill_date</i>	
LBX_FILE_STATUS	52[A2]	CMF	183[CC]
LBX_SOURCE_ID_REF	56[A2]	ETUC_UPDATES	246[CC]
<i>naming_pattern</i>		<i>next_eval_date</i>	
LBX_SOURCE_ID_REF	56[A2]	CUSTOMER_CONTRACT_KEY	223[CC]
<i>national_destination_code</i>		<i>next_ppdd_date</i>	
GSM_ROAMING_AGREEMENT	279[A1]	BILL_CYCLE	62[A1]

<i>next_subscr_no</i>			
SUBSCRIBER_ID_SEQ_NUM	102[CC]		
<i>next_to_date</i>			
BILL_INVOICE	135[CC]		
<i>no_bill</i>			
ADJ	121[CC]		
ADJ_TAX	124[CC]		
BMF	158[CC]		
CDR_DATA	171[CC]		
CDR_DATA_WORK	112[A1]		
CDR_FREE	179[CC]		
CDR_OUTCOLLECTS	120[A1]		
CMF	186[CC]		
CONTRACT_UNIT_CR	215[CC]		
ETUC_UPDATES	247[CC]		
NRC	275[CC]		
NRC_VIEW	281[CC]		
PAYMENT_TRANS	305[CC]		
PREPAYMENT	307[CC]		
PRODUCT	312[CC]		
PRODUCT_CHARGE_MAP	314[CC]		
PRODUCT_VIEW	322[CC]		
REPORT_ADJ	333[CC]		
REPORT_PAY_DETAIL	346[CC]		
SERVICE	350[CC]		
SERVICE_BILLING	352[CC]		
SERVICE_VIEW	359[CC]		
USAGE_TYPES_UNITS	355[A2]		
<i>no_bytes</i>			
BILL_FILES	132[CC]		
<i>no_cancel</i>			
ORD_SERVICE_ORDER	296[CC]		
<i>no_invoices</i>			
BILL_FILES	132[CC]		
<i>no_jnl_ind</i>			
JNL_KEYS	24[A2]		
JNL_KEYS_DEFAULT	30[A2]		
<i>no_pages</i>			
BILL_FILES	132[CC]		
<i>no_records</i>			
OUTCOLLECT_BATCH	120[A2]		
<i>no_revision</i>			
ORD_SERVICE_ORDER	296[CC]		
<i>non_realtime_only</i>			
PAYMENT_PROFILE	302[CC]		
<i>nonpub_nonlist</i>			
SERVICE	350[CC]		
SERVICE_VIEW	359[CC]		
<i>note_id</i>			
NOTE	273[CC]		
<i>note_reason_id</i>			
NOTE	273[CC]		
NOTE_REASON_REF	82[A2]		
NOTE_REASON_VALUES	83[A2]		
NOTE_TYPE_REASON_MAP	86[A2]		
<i>note_source</i>			
NOTE	273[CC]		
<i>note_template</i>			
NOTE_TEMPLATE_VALUES	85[A2]		
<i>note_template_code</i>			
NOTE_TEMPLATE_REF	84[A2]		
<i>note_template_id</i>			
NOTE	273[CC]		
NOTE_TEMPLATE_REF	84[A2]		
NOTE_TEMPLATE_VALUES	85[A2]		
<i>note_text</i>			
NOTE	273[CC]		
<i>note_type_id</i>			
NOTE	273[CC]		
NOTE_TYPE_REASON_MAP	86[A2]		
NOTE_TYPE_REF	87[A2]		
NOTE_TYPE_VALUES	88[A2]		
<i>notes</i>			
CIBER_INCOLLECTS_ERROR	134[A1]		
<i>notice_end_dt</i>			
CUSTOMER_CONTRACT	221[CC]		
CUSTOMER_CONTRACT_VIEW	227[CC]		
<i>notice_override</i>			
CUSTOMER_CONTRACT	221[CC]		
CUSTOMER_CONTRACT_VIEW	227[CC]		
<i>notification_interval</i>			
GSM_ROAMING_AGREEMENT	280[A1]		
<i>notify_event_type_id</i>			
BATCH_NOTIFY_EVENT_TYPE_REF	18[CC]		
BATCH_NOTIFY_EVENT_TYPE_VALUES	19[CC]		
BATCH_REQUEST_NOTIFY_MESSAGE	34[CC]		
BATCH_REQUEST_NOTIFY_PARAMETER	35[CC]		
<i>notify_type_id</i>			
BATCH_NOTIFY_TYPE_REF	20[CC]		
BATCH_NOTIFY_TYPE_VALUES	21[CC]		
BATCH_REQUEST_NOTIFY_PARAMETER	35[CC]		
<i>notify_value</i>			
BATCH_REQUEST_NOTIFY_PARAMETER	35[CC]		
<i>npa</i>			
CIBER_LINE_RANGES	135[A1]		
<i>nrc_category</i>			
NRC	275[CC]		
NRC_TRANS_DESCR	93[A2]		
NRC_VIEW	281[CC]		
<i>nrc_line_id</i>			
NRC_LINE_REF	89[A2]		
NRC_LINE_VALUES	90[A2]		
NRC_TRANS_DESCR	93[A2]		
<i>null_terminated</i>			
RECORD_TYPE_REF	226[A2]		
<i>num_accts</i>			
SERVER_DEFINITION	98[CC]		
<i>num_approved</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		

<i>num_billed_lines</i>			
TAX_CODES_COMM	289[A2]		
<i>num_cdr_data</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_cdr_data_work</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_cdr_free</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_cdr_outcollects</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_cdr_rerated</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num Consolidated</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_corrected</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_declines</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>num_discarded</i>			
FILE_STATUS	254[A1]		
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>num_exceptions</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>num_failed_attempts</i>			
FILE_STATUS	254[A1]		
USAGE_FILE_STATUS	333[A2]		
USAGE_FILE_STATUS_HISTORY	335[A2]		
<i>num_good</i>			
FILE_STATUS	254[A1]		
<i>num_hard_errors</i>			
FILE_STATUS	254[A1]		
<i>num_pass_thru</i>			
FILE_STATUS	254[A1]		
<i>num_payments</i>			
BMF_BATCH	160[CC]		
<i>num_records</i>			
CDR_DATA	172[CC]		
<i>num_soft_errors</i>			
FILE_STATUS	254[A1]		
<i>num_threshold</i>			
SALES_CHANNEL_REF	250[A2]		
<i>num_trans_audit</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>num_trans_sent</i>			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
<i>num_trunk_lines</i>			
TAX_CODES_COMM	290[A2]		
<i>num_units</i>			
RATE_USAGE_BANDS	212[A2]		
RATE_USAGE_BANDS_OVERRIDES	213[A2]		
<i>num_written_off</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>number_records</i>			
OUTCOLLECT_BATCH_DETAIL	121[A2]		
OUTCOLLECT_BATCH_TAX	123[A2]		
<i>nxx</i>			
CIBER_LINE_RANGES	135[A1]		
O			
<i>object_id</i>			
BSD_ATTRIBUTE_DEFAULTS	61[CC]		
BSD_OBJECT_ATTRIBUTES	73[CC]		
BSD_OBJECTS	72[CC]		
GRS_ACTION_OPERATIONS	274[A1]		
<i>object_id1</i>			
BSD_RELATIONAL_DEFAULTS	82[CC]		
<i>object_id2</i>			
BSD_RELATIONAL_DEFAULTS	82[CC]		
<i>object_name</i>			
BSD_OBJECTS	72[CC]		
<i>obligation_id</i>			
ABI_INVOICE	112[CC]		
<i>offset_units</i>			
PACKAGE_COMPONENT_MEMBERS	127[A2]		
<i>oneoff_cardnum</i>			
PAYMENT_TRANS	306[CC]		
<i>open_item_id</i>			
ACCOUNT_BALANCES	116[CC]		
ADJ	123[CC]		
BILL_INVOICE_DETAIL	149[CC]		
BMF	159[CC]		
BMF_DISTRIBUTION	162[CC]		
BMF_UNAPPLIED	165[CC]		
CDR_DATA	172[CC]		
CDR_DATA_WORK	113[A1]		
CMF_BALANCE_DETAIL	194[CC]		
CMF_BALANCE_TAX	195[CC]		
DEPOSIT	239[CC]		
GLOBAL_ACCOUNT_BALANCES	266[A1]		

GLOBAL_OPEN_ITEM_ID_MAP	267[A1]	<i>operator_contact_phone</i>	
JNL_DETAIL	259[CC]	CIBER_ROAMING_AGREEMENT	137[A1]
JNL_KEYS	24[A2]	<i>operator_county</i>	
JNL_KEYS_DEFAULT	30[A2]	CIBER_ROAMING_AGREEMENT	137[A1]
JNL_TRANS	264[CC]	<i>operator_description</i>	
JNL_WRITEOFF	266[CC]	CIBER_ROAMING_AGREEMENT	137[A1]
JNL_WRITEOFF_TAX	267[CC]	<i>operator_id</i>	
LBX_ERROR	49[A2]	CDR_OUTCOLLECTS	120[A1]
LBX_POST_DATED	55[A2]	CIBER_OPERATOR_SID_BID	136[A1]
NRC	274[CC]	CIBER_ROAMING_AGREEMENT	137[A1]
NRC_VIEW	280[CC]	GSM_ROAMING_AGREEMENT	279[A1]
OPEN_ITEM_ID_MAP	284[CC]	OUTCOLLECT_BATCH_DETAIL	121[A2]
OPEN_ITEM_ID_REF	95[A2]	OUTCOLLECT_BATCH_SEQ_NUM	122[A2]
OPEN_ITEM_ID_VALUES	96[A2]	ROAMING_INVOICE_SUMMARY	237[A2]
ORD_SERVICE_ORDER	296[CC]	ROAMING_OPERATOR_REF	238[A2]
PAYMENT_TRANS	305[CC]	ROAMING_OPERATOR_VALUES	239[A2]
PREPAYMENT	308[CC]	ROAMING_TRANSFER_DETAIL	241[A2]
PRODUCT	312[CC]	ROAMING_TRANSFER_TAX_DETAIL	244[A2]
PRODUCT_CHARGE_MAP	314[CC]	<i>operator_id_recipient</i>	
PRODUCT_VIEW	322[CC]	ROAMING_TRANSFER_DETAIL	242[A2]
REFINANCE_PLAN	329[CC]	<i>operator_state</i>	
REFUND	331[CC]	CIBER_ROAMING_AGREEMENT	137[A1]
REPORT_INVOICE	343[CC]	<i>operator_type</i>	
SERVICE_PROVIDERS_REF	262[A2]	ROAMING_OPERATOR_REF	238[A2]
<i>open_item_id_map_key</i>		<i>operator_zip</i>	
OPEN_ITEM_PRIORITY_MAP	97[A2]	CIBER_ROAMING_AGREEMENT	137[A1]
<i>open_item_id_mask</i>		<i>optional_endorsement_line</i>	
JNL_KEYS_MASK	32[A2]	LOCAL_ADDRESS	269[CC]
<i>oper_assist</i>		MASTER_ADDRESS	94[CC]
DEVICES	185[A1]	<i>ord_item_map_id</i>	
<i>operating_company_number</i>		ORD_ITEM_MAP	96[CC]
SERVICE_PROVIDERS_REF	262[A2]	<i>order_clause</i>	
<i>operation_id</i>		RECORD_TYPE_REF	226[A2]
GRS_ACTION_OPERATIONS	274[A1]	<i>order_id</i>	
GRS_OPERATION_REF	277[A1]	ORD_ORDER	292[CC]
GRS_OPERATION_VALUES	278[A1]	ORD_ORDER_EXT_DATA	294[CC]
<i>operation_no</i>		ORD_ORDER_LOOKUP	97[CC]
GRS_ACTION_OPERATIONS	274[A1]	ORD_SERVICE_ORDER	295[CC]
<i>operator</i>		<i>order_level</i>	
ORD_EXPRESSION	105[A2]	GLOBAL_OPEN_ITEM_ID_MAP	268[A1]
RATE_BONUS_POINT	186[A2]	OPEN_ITEM_ID_MAP	284[CC]
USAGE_UNITS_CONVERT	357[A2]	<i>order_number</i>	
<i>operator_address_1</i>		NRC	275[CC]
CIBER_ROAMING_AGREEMENT	137[A1]	NRC_VIEW	281[CC]
<i>operator_address_2</i>		ORD_ORDER	292[CC]
CIBER_ROAMING_AGREEMENT	137[A1]	ORD_ORDER_LOOKUP	97[CC]
<i>operator_address_3</i>		PRODUCT	312[CC]
CIBER_ROAMING_AGREEMENT	137[A1]	PRODUCT_VIEW	322[CC]
<i>operator_city</i>		<i>order_status_id</i>	
CIBER_ROAMING_AGREEMENT	137[A1]	ORD_ORDER	292[CC]
<i>operator_contact_faxno</i>		ORD_ORDER_LOOKUP	97[CC]
CIBER_ROAMING_AGREEMENT	137[A1]	ORD_ORDER_STATUS_REF	115[A2]
<i>operator_contact_name</i>		ORD_ORDER_STATUS_VALUES	116[A2]
CIBER_ROAMING_AGREEMENT	137[A1]	ORD_SERVICE_ORDER	295[CC]

<i>org_charged</i>		<i>orig_tracking_id</i>	
JNL_CUSTOM	10[A2]	ADJ	122[CC]
<i>org_originating</i>		BMF	157[CC]
JNL_CUSTOM	10[A2]	BMF_UNAPPLIED	164[CC]
<i>orig_bill_invoice_row</i>		JNL_WRITEOFF	266[CC]
ADJ	122[CC]	PAYMENT_TRANS	305[CC]
<i>orig_bill_ref_no</i>		REPORT_ADJ	333[CC]
ADJ	121[CC]	<i>orig_tracking_id_serv</i>	
BMF	157[CC]	ADJ	122[CC]
BMF_DISTRIBUTION	161[CC]	BMF	157[CC]
BMF_UNAPPLIED	163[CC]	BMF_UNAPPLIED	164[CC]
<i>orig_bill_ref_resets</i>		JNL_WRITEOFF	266[CC]
ADJ	121[CC]	PAYMENT_TRANS	305[CC]
BILL_INVOICE	137[CC]	REPORT_ADJ	333[CC]
BMF	157[CC]	<i>orig_trans_code</i>	
BMF_DISTRIBUTION	161[CC]	ADJ	120[CC]
BMF_UNAPPLIED	163[CC]	<i>orig_type</i>	
<i>orig_bill_refno</i>		ADJ	122[CC]
BILL_INVOICE	137[CC]	<i>orig_type_id_usg</i>	
<i>orig_bmf_tracking_id</i>		CDR_DATA	171[CC]
PREPAYMENT_DISTRIBUTION	310[CC]	CDR_DATA_WORK	113[A1]
<i>orig_bmf_tracking_id_serv</i>		CDR_FREE	179[CC]
PREPAYMENT_DISTRIBUTION	310[CC]	CDR_OUTCOLLECTS	118[A1]
<i>orig_cell_id</i>		<i>origin_country_dial_code_req</i>	
CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]	USAGE_TYPES	345[A2]
<i>orig_msg_id</i>		<i>origin_is_xact</i>	
ADJ	122[CC]	CORRIDOR_PLAN_GROUPS	164[A1]
REPORT_ADJ	334[CC]	CUSTOMER_CORRIDORS	230[CC]
<i>orig_msg_id_serv</i>		<i>origin_location_code</i>	
ADJ	122[CC]	PRODUCT_JURISDICTION	177[A2]
REPORT_ADJ	334[CC]	PRODUCT_RATE_KEY	318[CC]
<i>orig_msg_id2</i>		<i>origin_restriction</i>	
ADJ	122[CC]	CORRIDOR_PLAN_ID_REF	165[A1]
REPORT_ADJ	334[CC]	<i>origin_value</i>	
<i>orig_ppdd_date</i>		TRANSLATION	312[A2]
CMF_BALANCE	191[CC]	<i>other_rate</i>	
CMF_BALANCE_DETAIL	193[CC]	BILL_INVOICE_TAX	153[CC]
<i>orig_provider_id</i>		CDR_DATA_TAX	175[CC]
ADJ	121[CC]	CDR_DATA_WORK_TAX	116[A1]
<i>orig_rc_from_date</i>		TAX_OVERRIDES	294[A2]
ADJ	122[CC]	<i>other_tax</i>	
<i>orig_split_row_num</i>		ADJ	122[CC]
ADJ	123[CC]	ADJ_TAX	124[CC]
<i>orig_submitter_name</i>		BILL_INVOICE_DETAIL	148[CC]
ADJ	123[CC]	BILL_INVOICE_TAX	152[CC]
REFUND	330[CC]	CDR_DATA_TAX	175[CC]
<i>orig_subscr_no</i>		CDR_DATA_WORK	112[A1]
ORD_LOGICAL_SERVICE_ORDER	291[CC]	CDR_DATA_WORK_TAX	115[A1]
<i>orig_subscr_no_resets</i>		CDR_FREE	178[CC]
ORD_LOGICAL_SERVICE_ORDER	291[CC]	CDR_OUTCOLLECTS	119[A1]
<i>orig_subtype</i>		CIBER_INCOLLECTS	127[A1]
ADJ	122[CC]	CIBER_INCOLLECTS_ERROR	131[A1]
<i>orig_tracking_dt</i>		NRC	276[CC]
ADJ	122[CC]	NRC_VIEW	282[CC]
		OUTCOLLECT_BATCH_TAX	123[A2]
		REPORT_INVOICE	344[CC]

<i>out_units_type</i>			
USAGE_UNITS_CONVERT	357[A2]		
<i>outcollect_batch_id</i>			
OUTCOLLECT_BATCH	120[A2]		
OUTCOLLECT_BATCH_DETAIL	121[A2]		
OUTCOLLECT_BATCH_TAX	123[A2]		
<i>output_by</i>			
RECORD_TYPE_REF	226[A2]		
<i>override</i>			
BSD_ATTRIBUTE_DEFAULTS	61[CC]		
BSD_RELATIONAL_DEFAULTS	82[CC]		
<i>override_dates</i>			
CMF_INTERIM_BILLS	204[CC]		
<i>override_geocode</i>			
GEOCODE_OVERRIDES	265[A1]		
<i>override_nrc_from</i>			
XFER_HISTORY	105[CC]		
XFER_STATUS	371[CC]		
<i>override_nrc_to</i>			
XFER_HISTORY	105[CC]		
XFER_STATUS	371[CC]		
<i>override_rate</i>			
PRODUCT_RATE_OVERRIDE	319[CC]		
<i>override_tracking_id</i>			
RATE_DISCOUNT_OVERRIDES	324[CC]		
RATE_UNIT_CR_OVERRIDES	326[CC]		
<i>override_tracking_id_serv</i>			
RATE_DISCOUNT_OVERRIDES	324[CC]		
RATE_UNIT_CR_OVERRIDES	326[CC]		
<i>owning_account_no</i>			
ACCOUNT_BILLED_SERVICES	118[CC]		
CUSTOMER_CONTRACT	220[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
CUSTOMER_CORRIDORS	230[CC]		
<i>owning_cost_ctr</i>			
CMF	187[CC]		
JNL_DETAIL	258[CC]		
JNL_TRANS	264[CC]		
JNL_WORK_LIST	265[CC]		
OWNING_COST_CTR_REF	124[A2]		
OWNING_COST_CTR_VALUES	125[A2]		
<i>ownr_fname</i>			
PAYMENT_PROFILE	301[CC]		
<i>ownr_lname</i>			
PAYMENT_PROFILE	301[CC]		
P			
<i>package_group</i>			
PACKAGE_DEFINITION_REF	129[A2]		
PACKAGE_GROUP_REF	131[A2]		
PACKAGE_GROUP_VALUES	132[A2]		
<i>package_id</i>			
BILL_INVOICE_DETAIL	139[CC]		
CMF_COMPONENT_ELEMENT	198[CC]		
CMF_PACKAGE	207[CC]		
CMF_PACKAGE_COMPONENT	208[CC]		
PACKAGE_COMPONENTS	126[A2]		
PACKAGE_DEFINITION_REF	129[A2]		
PACKAGE_DEFINITION_VALUES	130[A2]		
PACKAGE_NRCS	133[A2]		
<i>package_inst_id</i>			
CMF_COMPONENT_ELEMENT	198[CC]		
CMF_PACKAGE	207[CC]		
CMF_PACKAGE_COMPONENT	208[CC]		
ORD_SERVICE_ORDER	296[CC]		
<i>package_inst_id_serv</i>			
CMF_COMPONENT_ELEMENT	198[CC]		
CMF_PACKAGE	207[CC]		
CMF_PACKAGE_COMPONENT	208[CC]		
ORD_SERVICE_ORDER	297[CC]		
<i>package_status</i>			
CMF_PACKAGE	207[CC]		
<i>page_count</i>			
BILL_INVOICE	137[CC]		
<i>page_no</i>			
BILL_IMAGE	134[CC]		
<i>paper_size</i>			
BILL_SIZE	86[A1]		
<i>param_blob</i>			
BATCH_REQUEST_PARAM	36[CC]		
<i>param_datatype</i>			
BATCH_TYPE_PARAMETER_REF	45[CC]		
CMF_EXT_DATA	202[CC]		
CUSTOMER_CONTRACT_EXT_DATA	222[CC]		
LOCAL_ADDRESS_EXT_DATA	270[CC]		
MASTER_ADDRESS_EXT_DATA	95[CC]		
NRC_EXT_DATA	277[CC]		
ORD_ORDER_EXT_DATA	294[CC]		
ORD_SERVICE_ORDER_EXT_DATA	299[CC]		
PARAM_DEF	134[A2]		
PRODUCT_EXT_DATA	316[CC]		
SERVICE_EXT_DATA	354[CC]		
<i>param_date</i>			
BATCH_REQUEST_PARAM	36[CC]		
<i>param_external_id</i>			
PARAM_DEF	134[A2]		
<i>param_id</i>			
BATCH_REQUEST_PARAM	36[CC]		
BATCH_TYPE_PARAMETER_REF	45[CC]		
BATCH_TYPE_PARAMETER_VALUES	46[CC]		
CMF_EXT_DATA	202[CC]		
CUSTOMER_CONTRACT_EXT_DATA	222[CC]		
EXT_PARAM_TYPE_ASSOC	246[A1]		
LOCAL_ADDRESS_EXT_DATA	270[CC]		
MASTER_ADDRESS_EXT_DATA	95[CC]		
NRC_EXT_DATA	277[CC]		
ORD_ORDER_EXT_DATA	294[CC]		
ORD_SERVICE_ORDER_EXT_DATA	299[CC]		
PARAM_DEF	134[A2]		
PARAM_VALUES	135[A2]		
PRODUCT_EXT_DATA	316[CC]		
SERVICE_EXT_DATA	354[CC]		

<i>param_int</i>			
BATCH_REQUEST_PARAM	36[CC]		
<i>param_name</i>			
BATCH_TYPE_PARAMETER_REF	45[CC]		
PARAM_DEF	134[A2]		
<i>param_string</i>			
BATCH_REQUEST_PARAM	36[CC]		
<i>param_value</i>			
CMF_EXT_DATA	202[CC]		
CUSTOMER_CONTRACT_EXT_DATA	222[CC]		
LOCAL_ADDRESS_EXT_DATA	270[CC]		
MASTER_ADDRESS_EXT_DATA	95[CC]		
NRC_EXT_DATA	277[CC]		
ORD_ORDER_EXT_DATA	294[CC]		
ORD_SERVICE_ORDER_EXT_DATA	299[CC]		
PRODUCT_EXT_DATA	316[CC]		
SERVICE_EXT_DATA	354[CC]		
<i>parameter_name</i>			
SYSTEM_PARAMETERS	278[A2]		
<i>parent_account_no</i>			
CMF_PACKAGE	207[CC]		
CMF_PACKAGE_COMPONENT	208[CC]		
CUSTOMER_CONTRACT	219[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
PRODUCT	312[CC]		
PRODUCT_CHARGE_MAP	314[CC]		
PRODUCT_VIEW	322[CC]		
SERVICE	350[CC]		
SERVICE BILLING	353[CC]		
SERVICE VIEW	359[CC]		
<i>parent_acg_tracking_id</i>			
CMF_ACCOUNT_CODE_GROUPS	190[CC]		
<i>parent_acg_tracking_id_serv</i>			
CMF_ACCOUNT_CODE_GROUPS	190[CC]		
<i>parent_category_id</i>			
ITEM_CATEGORY_REF	291[A1]		
<i>parent_code</i>			
NOTE	273[CC]		
PARENT_CODE_XREF	136[A2]		
<i>parent_cols</i>			
ARB_TAB_DEPENDS	43[A1]		
<i>parent_element</i>			
GRS_ACTION_OPERATIONS	274[A1]		
<i>parent_entity_name</i>			
PARENT_CODE_XREF	136[A2]		
<i>parent_entity_pk</i>			
TMP_ENTITY	103[CC]		
<i>parent_entity_type_id</i>			
TMP_ENTITY	103[CC]		
<i>parent_group_no</i>			
CUSTOMER_CONTRACT	220[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
<i>parent_id</i>			
CMF	183[CC]		
GRS_ACTION_OPERATIONS	274[A1]		
<i>parent_id1</i>			
NOTE	273[CC]		
<i>parent_id1_name</i>			
PARENT_CODE_XREF	136[A2]		
<i>parent_id2</i>			
NOTE	273[CC]		
<i>parent_id2_name</i>			
PARENT_CODE_XREF	136[A2]		
<i>parent_name</i>			
BSD_ATTRIBUTES	58[CC]		
GRS_ACTION_OPERATIONS	274[A1]		
<i>parent_nm</i>			
ARB_TAB_DEPENDS	43[A1]		
<i>parent_sales_channel_id</i>			
SALES_CHANNEL_REF	249[A2]		
<i>parent_subscr_no</i>			
CMF_PACKAGE_COMPONENT	208[CC]		
CUSTOMER_CONTRACT	219[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
NRC	274[CC]		
NRC_VIEW	280[CC]		
PRODUCT	312[CC]		
PRODUCT_VIEW	322[CC]		
<i>parent_subscr_no_resets</i>			
CMF_PACKAGE_COMPONENT	208[CC]		
CUSTOMER_CONTRACT	220[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
NRC	274[CC]		
NRC_VIEW	280[CC]		
PRODUCT	312[CC]		
PRODUCT_VIEW	323[CC]		
<i>parent_tracking_id</i>			
NRC	275[CC]		
NRC_VIEW	281[CC]		
<i>parent_tracking_id_serv</i>			
NRC	275[CC]		
NRC_VIEW	281[CC]		
<i>partial_period</i>			
CONTRACT_TYPES	161[A1]		
<i>participant_data</i>			
BATCH_PARTICIPANT_DEF	22[CC]		
BATCH_REQUEST_PARTICIPANT	37[CC]		
<i>participant_id</i>			
BATCH_PARTICIPANT_DEF	22[CC]		
BATCH_REQUEST	30[CC]		
<i>participant_identifier</i>			
BATCH_REQUEST_PARTICIPANT	37[CC]		
<i>participant_identifier_desc</i>			
BATCH_TYPE_STAGE_REF	48[CC]		
<i>participant_index</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
BATCH_REQUEST_PARTICIPANT	37[CC]		
<i>participant_status</i>			
BATCH_REQUEST_PARTICIPANT	37[CC]		

<i>participant_type_id</i>			
BATCH_PARTICIPANT_DEF	22[CC]	CMF	187[CC]
BATCH_PARTICIPANT_TYPE_REF	23[CC]	PREPAYMENT	309[CC]
BATCH_PARTICIPANT_TYPE_VALUES	24[CC]	<i>payment_type</i>	
<i>path_name</i>		LBX_ERROR	48[A2]
LBX_SOURCE_ID_REF	56[A2]	LBX_POST_DATED	54[A2]
<i>pay_amount</i>		<i>pcm_active_dt</i>	
LBX_ERROR	48[A2]	BILL_INVOICE_DETAIL	150[CC]
LBX_POST_DATED	54[A2]	<i>pend_count</i>	
<i>pay_method</i>		TMP_ENTITY	103[CC]
BILL_INVOICE	136[CC]	TMP_PENDING	104[CC]
BMF	159[CC]	<i>pending_flag</i>	
DEPOSIT	238[CC]	ADJ	121[CC]
PAYMENT_MERCHANT_ID_ASSIGN	140[A2]	<i>percent_errored</i>	
PAYMENT_PROFILE	300[CC]	PROCESS_WORK_STATUS	167[A2]
PAYMENT_TRANS	305[CC]	<i>percent_modifier</i>	
PREPAYMENT	309[CC]	RE_CHARGE_MODIFIER	236[A2]
<i>payee_address1</i>		<i>percent_processed</i>	
REFUND	331[CC]	PROCESS_WORK_STATUS	167[A2]
<i>payee_address2</i>		<i>percent_succeeded</i>	
REFUND	331[CC]	PROCESS_WORK_STATUS	167[A2]
<i>payee_address3</i>		<i>phrase_text</i>	
REFUND	331[CC]	ABI_TEXT	115[CC]
<i>payee_city</i>		<i>phrase_type_ind</i>	
REFUND	331[CC]	ABI_TEXT	115[CC]
<i>payee_company</i>		<i>pic_date_active</i>	
REFUND	331[CC]	SERVICE	350[CC]
<i>payee_country_code</i>		SERVICE_VIEW	359[CC]
REFUND	331[CC]	<i>pivot_date</i>	
<i>payee_county</i>		ORD_SERVICE_ORDER	297[CC]
REFUND	331[CC]	<i>pkg_order</i>	
<i>payee_first</i>		TAX_PKG_INST_ID_REF	295[A2]
REFUND	331[CC]	<i>plan_id_credit</i>	
<i>payee_geocode</i>		CMF	186[CC]
REFUND	331[CC]	CONTRACT_TYPES	161[A1]
<i>payee_last</i>		PLAN_ID_CREDIT_REF	143[A2]
REFUND	331[CC]	PLAN_ID_CREDIT_VALUES	144[A2]
<i>payee_state</i>		UNIT_CR_PLANS	320[A2]
REFUND	331[CC]	<i>plan_id_discount</i>	
<i>payee_zip</i>		CMF	186[CC]
REFUND	331[CC]	CONTRACT_TYPES	160[A1]
<i>payment_counter</i>		DISCOUNT_PLANS	191[A1]
LBX_FILE_STATUS	52[A2]	PLAN_ID_DISCOUNT_REF	145[A2]
<i>payment_due_date</i>		PLAN_ID_DISCOUNT_VALUES	146[A2]
BILL_INVOICE	136[CC]	<i>plan_level</i>	
CMF_INTERIM_BILLS	204[CC]	CORRIDOR_PLAN_ID_REF	165[A1]
PAYMENT_TRANS	303[CC]	<i>plan_order</i>	
REPORT_INVOICE	343[CC]	DISCOUNT_PLANS	191[A1]
<i>payment_merchant_id</i>		UNIT_CR_PLANS	320[A2]
PAYMENT_MERCHANT_ID_ASSIGN	140[A2]	<i>plan_type</i>	
PAYMENT_MERCHANT_ID_REF	141[A2]	CORRIDOR_PLAN_ID_REF	165[A1]
PAYMENT_MERCHANT_ID_VALUES	142[A2]	<i>plat_id</i>	
PAYMENT_TRANS	306[CC]	PROCESS_SCHED	158[A2]
<i>payment_profile_id</i>		<i>plmn_address1</i>	
BMF	159[CC]	GSM_ROAMING_AGREEMENT	280[A1]

<i>plmn_address2</i>			
GSM_ROAMING_AGREEMENT	280[A1]	UNIT_CR_RATE_LIMIT	321[A2]
<i>plmn_address3</i>		USAGE_JURISDICTION	338[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_coordinate_type</i>	
<i>plmn_city</i>		USAGE_POINTS	342[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_coordinate_x</i>	
<i>plmn_contact_faxno</i>		USAGE_POINTS	341[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_coordinate_x_min</i>	
<i>plmn_contact_name</i>		USAGE_POINTS	342[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_coordinate_y</i>	
<i>plmn_contact_phone</i>		USAGE_POINTS	342[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_coordinate_y_min</i>	
<i>plmn_description</i>		USAGE_POINTS	342[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_county</i>	
<i>plmn_name</i>		USAGE_POINTS	341[A2]
GSM_ROAMING_AGREEMENT	279[A1]	<i>point_id</i>	
<i>plmn_state</i>		USAGE_POINTS_TEXT	343[A2]
GSM_ROAMING_AGREEMENT	280[A1]	<i>point_id_origin</i>	
<i>plmn_tape_volser_name</i>		CDR_DATA	170[CC]
GSM_ROAMING_AGREEMENT	279[A1]	CDR_DATA_WORK	111[A1]
<i>plmn_type</i>		CDR_FREE	177[CC]
GSM_ROAMING_AGREEMENT	279[A1]	CDR_OUTCOLLECTS	119[A1]
<i>plmn_zip</i>		CIBER_INCOLLECTS	130[A1]
GSM_ROAMING_AGREEMENT	280[A1]	CIBER_INCOLLECTS_ERROR	133[A1]
<i>pmt_req_sent_counter</i>		REPORT_BED	336[CC]
PAYMENT_TRANS	305[CC]	<i>point_id_target</i>	
<i>pmt_tracking_id</i>		CDR_DATA	170[CC]
PAYMENT_TRANS	304[CC]	CDR_DATA_WORK	111[A1]
<i>pmt_tracking_id_serv</i>		CDR_FREE	178[CC]
PAYMENT_TRANS	304[CC]	CDR_OUTCOLLECTS	119[A1]
<i>point</i>		CIBER_INCOLLECTS	130[A1]
USAGE_POINTS	341[A2]	CIBER_INCOLLECTS_ERROR	133[A1]
<i>point_category</i>		<i>point_number</i>	
CORRIDOR_PLAN_GROUPS	164[A1]	TAX_ELEM_DEFAULT_LOC	292[A2]
CUSTOMER_CORRIDORS	230[CC]	<i>point_origin</i>	
POINT_CATEGORY_REF	147[A2]	CDR_BILLED	168[CC]
POINT_CATEGORY_VALUES	148[A2]	CDR_DATA	169[CC]
USAGE_POINTS	341[A2]	CDR_DATA_WORK	110[A1]
USAGE_TYPES	345[A2]	CDR_FREE	177[CC]
<i>point_city</i>		CDR_OUTCOLLECTS	118[A1]
USAGE_POINTS	341[A2]	CIBER_INCOLLECTS	127[A1]
<i>point_class</i>		CIBER_INCOLLECTS_ERROR	131[A1]
POINT_CLASS_REF	149[A2]	CORRIDOR_PLAN_GROUPS	164[A1]
POINT_CLASS_VALUES	150[A2]	CUSTOMER_CORRIDORS	229[CC]
USAGE_POINTS	341[A2]	REPORT_BED	336[CC]
<i>point_class_origin</i>		USAGE_JURISDICTION	337[A2]
CDR_DATA	172[CC]	<i>point_origin_len</i>	
RATE_PERIODS	201[A2]	CIBER_INCOLLECTS	127[A1]
RATE_USAGE	209[A2]	CIBER_INCOLLECTS_ERROR	131[A1]
UNIT_CR_RATE_LIMIT	321[A2]	<i>point_region</i>	
USAGE_JURISDICTION	338[A2]	POINT_REGION_REF	151[A2]
<i>point_class_target</i>		POINT_REGION_VALUES	152[A2]
CDR_DATA	172[CC]	USAGE_POINTS	341[A2]
RATE_PERIODS	201[A2]	<i>point_region_origin</i>	
RATE_USAGE	209[A2]	USAGE_JURISDICTION	338[A2]

<i>point_region_target</i>			
USAGE_JURISDICTION	338[A2]	SERVICE_BILLING	353[CC]
<i>point_state_abbr</i>		SERVICE_VIEW	359[CC]
USAGE_POINTS	341[A2]	<i>pop_upper_limit</i>	
<i>point_status</i>		RATE_RC	206[A2]
USAGE_POINTS	341[A2]	<i>poplist_type</i>	
<i>point_target</i>		ATM_FIELD_DEF	50[A1]
CDR_BILLED	168[CC]	<i>populated</i>	
CDR_DATA	170[CC]	REPORT_LOOKUP	345[CC]
CDR_DATA_WORK	111[A1]	<i>port</i>	
CDR_FREE	178[CC]	PROCESS_SOCKET	159[A2]
CDR_OUTCOLLECTS	119[A1]	<i>post_date</i>	
CIBER_INCOLLECTS	128[A1]	BMF	157[CC]
CIBER_INCOLLECTS_ERROR	132[A1]	BMF_BATCH	160[CC]
CORRIDOR_PLAN_GROUPS	164[A1]	BMF_UNAPPLIED	164[CC]
CUSTOMER_CORRIDORS	230[CC]	<i>post_pivot_duration</i>	
REPORT_BED	336[CC]	ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]
USAGE_JURISDICTION	338[A2]	<i>post_who</i>	
<i>point_target_len</i>		BMF_BATCH	160[CC]
CIBER_INCOLLECTS	128[A1]	<i>postal_code</i>	
CIBER_INCOLLECTS_ERROR	132[A1]	ADDRESS	119[CC]
<i>point_tax_code</i>		LOCAL_ADDRESS	268[CC]
USAGE_POINTS	341[A2]	MASTER_ADDRESS	93[CC]
<i>point_tax_code_origin</i>		<i>posted_dt</i>	
CDR_DATA	170[CC]	JNL_DETAIL	258[CC]
CDR_DATA_WORK	111[A1]	JNL_TRANS	263[CC]
CDR_FREE	178[CC]	<i>postfix_directional</i>	
CDR_OUTCOLLECTS	119[A1]	LOCAL_ADDRESS	268[CC]
<i>point_tax_code_target</i>		MASTER_ADDRESS	93[CC]
CDR_DATA	170[CC]	<i>postfix_match</i>	
CDR_DATA_WORK	111[A1]	EXT_CONTACTS	239[A1]
CDR_FREE	178[CC]	<i>postnet_address_block_barcode</i>	
CDR_OUTCOLLECTS	119[A1]	LOCAL_ADDRESS	269[CC]
<i>point_tax_code_type_origin</i>		MASTER_ADDRESS	94[CC]
CDR_DATA	170[CC]	<i>postnet_barcode</i>	
CDR_DATA_WORK	111[A1]	LOCAL_ADDRESS	269[CC]
CDR_FREE	178[CC]	MASTER_ADDRESS	94[CC]
CDR_OUTCOLLECTS	119[A1]	<i>postradix_exch_rate_mant</i>	
<i>point_tax_code_type_target</i>		SDR_EXCHANGE_RATES	252[A2]
CDR_DATA	170[CC]	<i>ppdd_date</i>	
CDR_DATA_WORK	111[A1]	BILL_CYCLE	62[A1]
CDR_FREE	178[CC]	CMF_BALANCE	191[CC]
CDR_OUTCOLLECTS	119[A1]	CMF_BALANCE_DETAIL	193[CC]
<i>point_trans_tracking_id</i>		REPORT_COL_ACT_LIST	339[CC]
CMF_BONUS_POINT	196[CC]	<i>pre_pivot_duration</i>	
<i>point_trans_tracking_id_serv</i>		ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]
CMF_BONUS_POINT	196[CC]	<i>prefix_directional</i>	
<i>point_type</i>		LOCAL_ADDRESS	268[CC]
USAGE_POINTS	341[A2]	MASTER_ADDRESS	93[CC]
<i>point_zip</i>		<i>prefix_match</i>	
USAGE_POINTS	341[A2]	EXT_CONTACTS	239[A1]
<i>pop_lower_limit</i>		<i>prep_date</i>	
RATE_RC	206[A2]	BILL_CYCLE	62[A1]
<i>pop_units</i>		BILL_INVOICE	135[CC]
SERVICE	350[CC]	REPORT_INVOICE	343[CC]

<i>prep_delay</i>		<i>SERVICE_VIEW</i>	358[CC]
BILL_CYCLE	62[A1]	<i>price_description</i>	
<i>prep_error_code</i>		ITEM_MARKETING_DATA_VALUES	298[A1]
BILL_INVOICE	137[CC]	<i>primary_units</i>	
REPORT_INVOICE	343[CC]	ADJ	121[CC]
<i>prep_sequence</i>		CDR_DATA	170[CC]
BILL_INVOICE_DETAIL	141[CC]	CDR_DATA_WORK	111[A1]
<i>prep_status</i>		CDR_FREE	178[CC]
BILL_INVOICE	136[CC]	CDR_OUTCOLLECTS	119[A1]
REPORT_INVOICE	343[CC]	CIBER_INCOLLECTS	130[A1]
<i>prep_task</i>		CIBER_INCOLLECTS_ERROR	133[A1]
BILL_INVOICE	136[CC]	<i>primary_units_type</i>	
<i>prepayment_tracking_id</i>		ADJ	121[CC]
PREPAYMENT_DISTRIBUTION	310[CC]	<i>principal_cardinality</i>	
<i>prepayment_tracking_id_serv</i>		PROCESS_WORK_CARDINAL_REF	163[A2]
PREPAYMENT_DISTRIBUTION	310[CC]	<i>printed_call</i>	
<i>preradix_exch_rate_mant</i>		CIBER_INCOLLECTS	129[A1]
SDR_EXCHANGE_RATES	252[A2]	CIBER_INCOLLECTS_ERROR	132[A1]
<i>pretax</i>		<i>printer_device_id</i>	
RE_CHARGE_MODIFIER	236[A2]	SERVICE_CENTERS	257[A2]
<i>prev_balance_ref_resets</i>		<i>printer_text</i>	
BILL_INVOICE	135[CC]	BILL_FORMAT_PRODUCTS	76[A1]
CMF	184[CC]	<i>priority</i>	
<i>prev_balance_refno</i>		ACCOUNT_BALANCES	117[CC]
BILL_INVOICE	135[CC]	ADJ_TRANS_GROUPS	31[A1]
CMF	184[CC]	BILL_INSERT_GROUPS	79[A1]
<i>prev_bill_date</i>		CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]
CMF	183[CC]	GEOCODE_OVERRIDES	265[A1]
<i>prev_bill_ref_resets</i>		GLOBAL_ACCOUNT_BALANCES	266[A1]
BILL_INVOICE	135[CC]	JNL_KEYS_DEFAULT	30[A2]
CMF	184[CC]	MOBILE_ZONE_TYPE_REF	69[A2]
<i>prev_bill_refno</i>		RATE_PERIODS	202[A2]
BILL_INVOICE	135[CC]	RE_CHARGE_MODIFIER	236[A2]
CMF	184[CC]	TAX_OVERRIDES	293[A2]
<i>prev_cutoff_date</i>		USAGE_JURISDICTION	338[A2]
BILL_INVOICE	136[CC]	USAGE_TYPES_UNITS	355[A2]
CMF	183[CC]	ZONE_CLASS_REF	365[A2]
ETUC_UPDATES	246[CC]	ZONE_CLASS_VALUES	366[A2]
<i>prev_end_dt</i>		<i>privacy_level</i>	
CUSTOMER_CONTRACT	220[CC]	PRIVACY_LEVEL_REF	153[A2]
CUSTOMER_CONTRACT_VIEW	226[CC]	PRIVACY_LEVEL_VALUES	154[A2]
CUSTOMER_CORRIDORS	230[CC]	SERVICE	350[CC]
<i>prev_eval_date</i>		SERVICE_VIEW	359[CC]
CUSTOMER_CONTRACT_KEY	223[CC]	<i>proc_time</i>	
<i>prev_ppdd</i>		LBX_FILE_STATUS	52[A2]
BILL_INVOICE	136[CC]	<i>process_charges</i>	
<i>prev_product_inactive_dt</i>		XFER_STATUS	371[CC]
PRODUCT	312[CC]	<i>process_charges_action</i>	
PRODUCT_VIEW	323[CC]	XFER_REASON_ACTIONS	361[A2]
<i>prev_view_id</i>		<i>process_charges_state</i>	
CUSTOMER_CONTRACT_VIEW	225[CC]	XFER_REASON_ACTIONS	361[A2]
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]	<i>process_dt</i>	
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]	ROAMING_TRANSFER_DETAIL	241[A2]
NRC_VIEW	280[CC]	UTL_TASK_STATUS	370[CC]
PRODUCT_VIEW	321[CC]		

<i>process_file_name</i>			
USAGE_MASTER_FILE_STATUS	368	[CC]	
USAGE_PROCESS_FILE_STATUS	369	[CC]	
<i>process_id</i>			
PROCESS_RUN	156	[A2]	
PROCESS_WORK	162	[A2]	
PROCESS_WORK_STATUS	167	[A2]	
<i>process_name</i>			
ACCOUNT_MOVE_STATUS	11	[CC]	
EXT_CONTACTS_STATUS	241	[A1]	
FILE_STATUS	255	[A1]	
FILES_IN_PROCESS	251	[A1]	
HISTORIC_CONTRIBUTION	252	[CC]	
PROCESS_QUEUE	155	[A2]	
PROCESS_RUN	156	[A2]	
PROCESS_SCHED	157	[A2]	
PROCESS_SOCKET	159	[A2]	
PROCESS_STATUS	160	[A2]	
PROCESS_WORK_STATUS_DEF	169	[A2]	
RECORD_TYPE_REF	226	[A2]	
RPU_WORK	347	[CC]	
TREP_WORK	365	[CC]	
USAGE_FILE_PROCESS_STATE	332	[A2]	
USAGE_FILE_STATUS	333	[A2]	
USAGE_FILE_STATUS_HISTORY	335	[A2]	
USAGE_MASTER_FILE_STATUS	368	[CC]	
USAGE_PROCESS_FILE_STATUS	369	[CC]	
<i>process_num</i>			
BILL_INVOICE	135	[CC]	
BILL_INVOICE_DETAIL	139	[CC]	
BILL_INVOICE_TAX	152	[CC]	
CDR_BILLED	168	[CC]	
<i>process_pid</i>			
BATCH_REQUEST_SEGMENT	39	[CC]	
PROCESS_STATUS	160	[A2]	
<i>process_sequence</i>			
BSD_ATTRIBUTE_DEFAULTS	61	[CC]	
BSD_RELATIONAL_DEFAULTS	82	[CC]	
<i>process_start_time</i>			
TREP_WORK	365	[CC]	
<i>process_status</i>			
CIBER_INCOLLECTS	130	[A1]	
CIBER_INCOLLECTS_ERROR	134	[A1]	
PROCESS_STATUS	161	[A2]	
RECORD_TYPE_REF	226	[A2]	
<i>processed</i>			
PROCESS_WORK	162	[A2]	
PROCESS_WORK_STATUS	167	[A2]	
<i>processed_name</i>			
PROCESS_WORK_CARDINAL_VALUES	164	[A2]	
<i>processed_rate</i>			
PROCESS_WORK	162	[A2]	
PROCESS_WORK_STATUS	168	[A2]	
<i>processing_change_type</i>			
BATCH_REQUEST	30	[CC]	
BATCH_REQUEST_SEGMENT	39	[CC]	
<i>processing_errors_error</i>			
USAGE_FILE_COUNTS	329	[A2]	
USAGE_FILE_COUNTS_HISTORY	330	[A2]	
USAGE_LOCAL_COUNTS	339	[A2]	
<i>processing_errors_input</i>			
USAGE_FILE_COUNTS	329	[A2]	
USAGE_FILE_COUNTS_HISTORY	330	[A2]	
USAGE_LOCAL_COUNTS	339	[A2]	
<i>processing_errors_rerating</i>			
USAGE_FILE_COUNTS	329	[A2]	
USAGE_FILE_COUNTS_HISTORY	330	[A2]	
USAGE_LOCAL_COUNTS	339	[A2]	
<i>product_active_dt</i>			
PRODUCT	312	[CC]	
PRODUCT_VIEW	323	[CC]	
<i>product_code</i>			
TAX_CHARGE_ELEMENTS	286	[A2]	
<i>product_group</i>			
TAX_CHARGE_ELEMENTS	286	[A2]	
<i>product_group_id</i>			
PRODUCT_GROUPS	176	[A2]	
PRODUCT_LINES	178	[A2]	
<i>product_inactive_dt</i>			
PRODUCT	312	[CC]	
PRODUCT_VIEW	323	[CC]	
<i>product_line_id</i>			
BILL_FORMAT_PRODUCTS	76	[A1]	
BILL_INVOICE_DETAIL	146	[CC]	
DISCOUNT_DEFINITIONS	189	[A1]	
NRC_TRANS_DESCR	91	[A2]	
PRODUCT_ELEMENTS	172	[A2]	
PRODUCT_LINES	178	[A2]	
UNIT_CR_DEFINITIONS	319	[A2]	
USAGE_TYPES	347	[A2]	
<i>profile_id</i>			
ADJ	123	[CC]	
BILL_INVOICE_DETAIL	147	[CC]	
BMF_UNAPPLIED	165	[CC]	
CDR_DATA	171	[CC]	
CDR_DATA_DUC	174	[CC]	
CDR_DATA_WORK	111	[A1]	
CDR_FREE	178	[CC]	
CDR_OUTCOLLECTS	119	[A1]	
NRC	275	[CC]	
NRC_VIEW	281	[CC]	
PAYMENT_PROFILE	300	[CC]	
PAYMENT_TRANS	304	[CC]	
REFUND	331	[CC]	
UNIT_CREDIT_PROFILES	366	[CC]	
<i>profile_id_serv</i>			
CDR_DATA_DUC	174	[CC]	
UNIT_CREDIT_PROFILES	366	[CC]	
<i>proforma_bill_flag</i>			
CMF_INTERIM_BILLS	204	[CC]	
<i>proforma_executable_id</i>			
BATCH_TYPE_REF	47	[CC]	

<i>project_bill_ic1</i>		<i>prorate_interim_bill</i>	
ABI_INVOICE	112[CC]	CONTRACT_TYPES	162[A1]
<i>project_bill_ic2</i>		<i>prorate_interim_bill_override</i>	
ABI_INVOICE	112[CC]	CUSTOMER_CONTRACT	220[CC]
<i>project_bill_ic3</i>		CUSTOMER_CONTRACT_VIEW	227[CC]
ABI_INVOICE	113[CC]	<i>prorate_period_change</i>	
<i>project_bill_ic4</i>		CONTRACT_TYPES	162[A1]
ABI_INVOICE	113[CC]	<i>prorate_period_change_override</i>	
<i>project_bill_ic5</i>		CUSTOMER_CONTRACT	220[CC]
ABI_INVOICE	113[CC]	CUSTOMER_CONTRACT_VIEW	227[CC]
<i>project_bill_ic6</i>		ETUC_UPDATES	247[CC]
ABI_INVOICE	113[CC]	UNIT_CREDIT_PROFILES	367[CC]
<i>promo_bill_ic1</i>		<i>prorate_target_rebates</i>	
ABI_INVOICE	112[CC]	CONTRACT_TYPES	162[A1]
<i>promo_bill_ic2</i>		<i>prorate_target_threshold</i>	
ABI_INVOICE	113[CC]	CONTRACT_TYPES	162[A1]
<i>promo_bill_ic3</i>		<i>prorate_tgt_rebates_override</i>	
ABI_INVOICE	113[CC]	CUSTOMER_CONTRACT	221[CC]
<i>promo_bill_ic4</i>		CUSTOMER_CONTRACT_VIEW	227[CC]
ABI_INVOICE	113[CC]	ETUC_UPDATES	247[CC]
<i>promo_bill_ic5</i>		UNIT_CREDIT_PROFILES	367[CC]
ABI_INVOICE	113[CC]	<i>prorate_tgt_threshold_override</i>	
<i>promo_bill_ic6</i>		CUSTOMER_CONTRACT	221[CC]
ABI_INVOICE	113[CC]	CUSTOMER_CONTRACT_VIEW	227[CC]
<i>proportion</i>		ETUC_UPDATES	247[CC]
CONTRACT_ASSIGNMENTS_HQ	214[CC]	UNIT_CREDIT_PROFILES	367[CC]
<i>prorate_account_end</i>		<i>prov_group_id</i>	
CONTRACT_TYPES	162[A1]	ORD_ITEM_TYPE_REF	113[A2]
<i>prorate_account_end_override</i>		<i>provider_address1</i>	
CUSTOMER_CONTRACT	221[CC]	PROVIDER_ADDRESS	179[A2]
CUSTOMER_CONTRACT_VIEW	227[CC]	<i>provider_address2</i>	
<i>prorate_account_start</i>		PROVIDER_ADDRESS	179[A2]
CONTRACT_TYPES	162[A1]	<i>provider_address3</i>	
<i>prorate_account_start_override</i>		PROVIDER_ADDRESS	179[A2]
CUSTOMER_CONTRACT	221[CC]	<i>provider_city</i>	
CUSTOMER_CONTRACT_VIEW	227[CC]	PROVIDER_ADDRESS	179[A2]
<i>prorate_code</i>		<i>provider_class</i>	
BILL_INVOICE_DETAIL	142[CC]	PROVIDER_CLASS_REF	180[A2]
REPORT_BILLED_REV	337[CC]	PROVIDER_CLASS_VALUES	181[A2]
REPORT_INVOICE	344[CC]	RATE_PERIODS	201[A2]
<i>prorate_contract_end</i>		RATE_USAGE	210[A2]
CONTRACT_TYPES	162[A1]	RATE_USAGE_OVERRIDES	216[A2]
<i>prorate_contract_end_override</i>		SERVICE_PROVIDERS_REF	261[A2]
CUSTOMER_CONTRACT	220[CC]	<i>provider_country_code</i>	
CUSTOMER_CONTRACT_VIEW	227[CC]	PROVIDER_ADDRESS	179[A2]
ETUC_UPDATES	247[CC]	<i>provider_id</i>	
UNIT_CREDIT_PROFILES	367[CC]	BILL_FORMAT_TEMPLATE	77[A1]
<i>prorate_contract_start</i>		BILL_INVOICE_DETAIL	145[CC]
CONTRACT_TYPES	162[A1]	CDR_DATA	169[CC]
<i>prorate_contract_strt_override</i>		CDR_DATA_WORK	110[A1]
CUSTOMER_CONTRACT	220[CC]	CDR_FREE	177[CC]
CUSTOMER_CONTRACT_VIEW	227[CC]	CDR_OUTCOLLECTS	118[A1]
ETUC_UPDATES	247[CC]	CIBER_INCOLLECTS	130[A1]
UNIT_CREDIT_PROFILES	367[CC]	CIBER_INCOLLECTS_ERROR	133[A1]
		DISCOUNT_DEFINITIONS	189[A1]

JNL_DETAIL	257[CC]	<i>queue_name</i>	
JNL_KEYS	24[A2]	PROCESS_QUEUE	155[A2]
JNL_KEYS_DEFAULT	30[A2]	<i>queue_payload</i>	
JNL_TRANS	263[CC]	BSD_QUEUE	74[CC]
NRC_TRANS_DESCR	91[A2]	BSD_QUEUE_GROUP	77[CC]
OUTCOLLECT_BATCH_DETAIL	121[A2]	BSD_QUEUE_PAYLOAD_OVERFLOW	78[CC]
PAYMENT_TRANS	304[CC]	<i>queue_payload_overflow_id</i>	
PRODUCT_ELEMENTS	172[A2]	BSD_QUEUE	74[CC]
PROVIDER_ADDRESS	179[A2]	BSD_QUEUE_GROUP	77[CC]
SERVICE_PROVIDERS_REF	261[A2]	BSD_QUEUE_PAYLOAD_OVERFLOW	78[CC]
SERVICE_PROVIDERS_VALUES	263[A2]	<i>queue_result</i>	
TAX_ASSIGNMENTS	284[A2]	BSD_QUEUE	74[CC]
UNIT_CR_DEFINITIONS	319[A2]	<i>queue_result_api_name</i>	
USAGE_POINTS	342[A2]	BSD_QUEUE	74[CC]
<i>provider_id_mask</i>		BSD_QUEUE_GROUP	77[CC]
JNL_KEYS_MASK	31[A2]	<i>queue_result_overflow_id</i>	
<i>provider_name</i>		BSD_QUEUE	74[CC]
PROVIDER_ADDRESS	179[A2]	<i>queue_retries</i>	
<i>provider_service_type</i>		BSD_QUEUE	74[CC]
SERVICE_PROVIDERS_REF	262[A2]	<i>queue_status</i>	
<i>provider_state</i>		BSD_QUEUE	75[CC]
PROVIDER_ADDRESS	179[A2]	REPORT_COL	338[CC]
<i>provider_zip</i>		REPORT_COL_ACT_LIST	339[CC]
PROVIDER_ADDRESS	179[A2]	<i>queue_user_defined</i>	
<i>ps_code_cr</i>		BSD_QUEUE	74[CC]
JNL_CUSTOM	10[A2]	BSD_QUEUE_GROUP	77[CC]
<i>ps_code_db</i>		<i>queue_work_finish_dt</i>	
JNL_CUSTOM	10[A2]	BSD_QUEUE	74[CC]
<i>pt_default_geocode</i>		BSD_QUEUE_GROUP	77[CC]
TAX_ELEM_DEFAULT_LOC	292[A2]	<i>queue_work_start_dt</i>	
<i>pt_location_code</i>		BSD_QUEUE	74[CC]
TAX_ELEM_DEFAULT_LOC	292[A2]	BSD_QUEUE_GROUP	77[CC]
<i>purchase_order</i>		<i>queued</i>	
CMF	186[CC]	PROCESS_WORK	162[A2]
<i>python_script</i>		PROCESS_WORK_STATUS	167[A2]
BSD_ATTRIBUTE_DEFAULTS	61[CC]	<i>queued_name</i>	
BSD_RELATIONAL_DEFAULTS	82[CC]	PROCESS_WORK_CARDINAL_VALUES	164[A2]
Q			
<i>qualifying_threshold_tier_id</i>		R	
RATE_DISCOUNT	197[A2]	<i>range_origin</i>	
<i>quanta</i>		RATE_DISCOUNT	196[A2]
HISTORIC_CONTRIBUTION	252[CC]	RATE_DISCOUNT_OVERRIDES	324[CC]
HISTORIC_THRESHOLDS	255[CC]	RATE_UNIT_CR	208[A2]
<i>quantum_pre_charge</i>		RATE_UNIT_CR_OVERRIDES	326[CC]
CDR_DATA_DUC	174[CC]	<i>range_terminus</i>	
<i>queue_after_dt</i>		RATE_DISCOUNT	196[A2]
BSD_QUEUE	74[CC]	RATE_DISCOUNT_OVERRIDES	324[CC]
BSD_QUEUE_WORK	79[CC]	RATE_UNIT_CR	208[A2]
<i>queue_entry_id</i>		RATE_UNIT_CR_OVERRIDES	327[CC]
BSD_QUEUE	74[CC]	TAX_RATES_VAT	300[A2]
BSD_QUEUE_WORK	79[CC]	<i>ratable_unit_class</i>	
ORD_SERVICE_ORDER	296[CC]	RATABLE_UNIT_CLASS_REF	182[A2]
<i>queue_group_id</i>		RATABLE_UNIT_CLASS_VALUES	183[A2]
BSD_QUEUE	74[CC]	UNIT_CR_DEFINITIONS	319[A2]
BSD_QUEUE_GROUP	77[CC]	USAGE_TYPES	348[A2]

rate			
CIBER_ROAMING_AGREEMENT	137[A1]		
NRC	275[CC]		
NRC_VIEW	281[CC]		
RATE_NRC	200[A2]		
RATE_RC	206[A2]		
TAX_RATES_VAT	299[A2]		
TAX_UNIV_ICB	362[CC]		
rate_amt			
LATE_FEE_RATES	46[A2]		
rate_class			
ACCT_SEG_MAP	18[A1]		
CDR_DATA	169[CC]		
CDR_DATA_WORK	110[A1]		
CDR_FREE	177[CC]		
CDR_OUTCOLLECTS	118[A1]		
CIBER_INCOLLECTS	130[A1]		
CIBER_INCOLLECTS_ERROR	133[A1]		
EMF_CONFIGURATION	207[A1]		
LATE_FEE_ASSIGNMENT	44[A2]		
NET_INTERFACE_ELIGIBILITY	79[A2]		
PROVIDER_CLASS_REF	180[A2]		
RATE_CLASS_DESCR	187[A2]		
RATE_DISCOUNT	196[A2]		
RATE_NRC	200[A2]		
RATE_PERIODS	202[A2]		
RATE_RC	205[A2]		
RATE_UNIT_CR	207[A2]		
RATE_USAGE	209[A2]		
RATE_USAGE_OVERRIDES	215[A2]		
RE_CHARGE_MODIFIER	236[A2]		
ROAMING_RATE_KEYS	240[A2]		
SERVICE	350[CC]		
SERVICE_BILLING	353[CC]		
SERVICE_VIEW	359[CC]		
UNIT_CR_RATE_LIMIT	321[A2]		
USAGE_JURISDICTION	337[A2]		
USAGE_TYPES_SPLIT	354[A2]		
USAGE_TYPES_UNITS	355[A2]		
rate_class_account			
ETUC_UPDATES	246[CC]		
UNIT_CREDIT_PROFILES	366[CC]		
rate_class_default			
CMF	185[CC]		
rate_class_of_service			
NRC_TRANS_DESCR	93[A2]		
PRODUCT_ELEMENTS	173[A2]		
rate_class_service			
ETUC_UPDATES	246[CC]		
UNIT_CREDIT_PROFILES	366[CC]		
rate_class_special			
CMF	185[CC]		
rate_component_id			
NRC_TRANS_DESCR	93[A2]		
PRODUCT_ELEMENTS	174[A2]		
rate_currency_code			
BILL_INVOICE_DETAIL	143[CC]		
CDR_DATA	169[CC]		
CDR_DATA_WORK	110[A1]		
CDR_FREE	177[CC]		
CDR_OUTCOLLECTS	118[A1]		
CIBER_INCOLLECTS	128[A1]		
CIBER_INCOLLECTS_ERROR	132[A1]		
USAGE_TYPES	350[A2]		
rate_currency_id			
RATE_CURRENCY	188[A2]		
rate_currency_location			
NRC_TRANS_DESCR	93[A2]		
PRODUCT_ELEMENTS	175[A2]		
USAGE_TYPES	351[A2]		
rate_dt			
CDR_DATA	170[CC]		
CDR_DATA_WORK	111[A1]		
CDR_FREE	178[CC]		
CDR_OUTCOLLECTS	119[A1]		
CDR_UNBILLED	181[CC]		
CIBER_INCOLLECTS	130[A1]		
CIBER_INCOLLECTS_ERROR	133[A1]		
NRC	275[CC]		
NRC_VIEW	281[CC]		
rate_equip_class			
NRC_TRANS_DESCR	93[A2]		
PRODUCT_ELEMENTS	173[A2]		
rate_equip_type			
NRC_TRANS_DESCR	93[A2]		
PRODUCT_ELEMENTS	172[A2]		
rate_geo_area			
NRC_TRANS_DESCR	93[A2]		
rate_jurisdiction			
PRODUCT_ELEMENTS	175[A2]		
rate_key_id			
CIBER_ROAMING_AGREEMENT	137[A1]		
GSM_ROAMING_AGREEMENT	279[A1]		
ROAMING_RATE_KEYS	240[A2]		
rate_limit_amount			
UNIT_CR_RATE_LIMIT	322[A2]		
rate_limit_percent			
UNIT_CR_RATE_LIMIT	321[A2]		
rate_minimum_duration			
USAGE_TYPES	351[A2]		
rate_pct			
LATE_FEE_RATES	46[A2]		
rate_period			
BILL_INVOICE_DETAIL	146[CC]		
CDR_DATA	171[CC]		
CDR_DATA_WORK	112[A1]		
CDR_FREE	179[CC]		
CDR_OUTCOLLECTS	120[A1]		
CIBER_INCOLLECTS	128[A1]		
CIBER_INCOLLECTS_ERROR	132[A1]		

DISCOUNT_DEFINITIONS	189[A1]	<i>realtime_indicator</i>	
OPEN_ITEM_ID_MAP	284[CC]	BMF	159[CC]
RATE_PERIOD_REF	203[A2]	PREPAYMENT	309[CC]
RATE_PERIOD_VALUES	204[A2]	<i>reason_code</i>	
RATE_PERIODS	202[A2]	CIBER_FLD_ERROR_CODES	126[A1]
RATE_USAGE	210[A2]	DEPOSIT	239[CC]
RATE_USAGE_OVERRIDES	216[A2]	<i>rebate_proration_ratio</i>	
RE_CHARGE_MODIFIER	236[A2]	CDR_DATA_DUC	174[CC]
UNIT_CR_RATE_LIMIT	321[A2]	<i>receivables_amt</i>	
<i>rate_period_rounding</i>		CPM_CYCLE_STATUS	217[CC]
USAGE_TYPES	351[A2]	EFT_CYCLE_STATUS	240[CC]
<i>rate_rate_class</i>		<i>receiving_sid_bid</i>	
PRODUCT_ELEMENTS	174[A2]	OUTCOLLECT_BATCH_SEQ_NUM	122[A2]
<i>rate_type</i>		<i>record_category</i>	
BILL_INVOICE_DETAIL	146[CC]	RECORD_TYPE_REF	225[A2]
<i>rate_units</i>		<i>record_delimiter_char</i>	
PRODUCT_ELEMENTS	175[A2]	RECORD_TYPE_REF	226[A2]
<i>rate_units_type</i>		<i>record_delimiter_code</i>	
RATE_USAGE	210[A2]	RECORD_TYPE_REF	226[A2]
RATE_USAGE_OVERRIDES	216[A2]	<i>record_delimiter_count</i>	
<i>rate_zone</i>		RECORD_TYPE_REF	226[A2]
PRODUCT_ELEMENTS	174[A2]	<i>record_id</i>	
<i>rateband</i>		RECORD_FIELD_DEF	220[A2]
RATE_USAGE_BANDS	212[A2]	RECORD_TYPE_REF	225[A2]
RATE_USAGE_BANDS_OVERRIDES	213[A2]	RECORD_TYPE_VALUES	228[A2]
<i>rated_amount</i>		<i>record_id_from</i>	
BILL_INVOICE_DETAIL	143[CC]	RECORD_FIELD_MAP	222[A2]
<i>rated_flag</i>		RECORD_TYPE_MAP	224[A2]
ADJ	121[CC]	<i>record_id_to</i>	
<i>rated_units</i>		RECORD_FIELD_MAP	222[A2]
CDR_DATA	171[CC]	RECORD_TYPE_MAP	224[A2]
CDR_DATA_WORK	112[A1]	<i>record_size</i>	
CDR_FREE	178[CC]	RECORD_TYPE_REF	225[A2]
CDR_OUTCOLLECTS	120[A1]	<i>record_type</i>	
CIBER_INCOLLECTS	128[A1]	RAW_USAGE_FIELD_MAPPING	217[A2]
CIBER_INCOLLECTS_ERROR	132[A1]	RECORD_TYPE_REF	225[A2]
<i>rating_method</i>		RECORD_TYPE_SEQ_NUM	227[A2]
USAGE_TYPES	352[A2]	TAP_MAPPING	279[A2]
<i>raw_rec</i>		<i>records_appended_last</i>	
CDR_RAW_USAGE	121[A1]	USAGE_MASTER_FILE_STATUS	368[CC]
<i>raw_rec_id</i>		<i>redirect_charges_back</i>	
CDR_DATA_WORK	113[A1]	ORD_LOGICAL_SERVICE_ORDER	291[CC]
CDR_OUTCOLLECTS	120[A1]	<i>redirect_charges_to_balance</i>	
<i>raw_rec_size</i>		ORD_LOGICAL_SERVICE_ORDER	291[CC]
CDR_DATA_WORK	114[A1]	<i>reest_date</i>	
CDR_OUTCOLLECTS	120[A1]	EMF_NRC_REEST_DATES	243[CC]
<i>raw_units</i>		EMF_RC_REEST_DATES	244[CC]
CDR_DATA	172[CC]	<i>ref_table_name</i>	
<i>raw_units_rounded</i>		ENUMERATION_DEF	223[A1]
CDR_DATA	172[CC]	<i>reference_code</i>	
<i>raw_units_type</i>		JNL_DETAIL	258[CC]
USAGE_TYPES	349[A2]	<i>refinance_plan_id</i>	
<i>rc_charge_type</i>		REFINANCE_PLAN	329[CC]
CIBER_ROAMING_AGREEMENT	137[A1]	<i>refinance_plan_id_serv</i>	
		REFINANCE_PLAN	329[CC]

<i>refinance_status</i>			
REFINANCE_PLAN	329[CC]		
<i>refinance_tracking_id</i>			
CMF_BALANCE_DETAIL	194[CC]		
<i>refinance_tracking_id_serv</i>			
CMF_BALANCE_DETAIL	194[CC]		
<i>refund_proration_factor</i>			
BILL_INVOICE_DISCOUNT	151[CC]		
CDR_BILLED	168[CC]		
<i>refund_reason_code</i>			
REFUND	330[CC]		
REFUND_REASON_CODE_REF	229[A2]		
REFUND_REASON_CODE_VALUES	230[A2]		
<i>refund_status</i>			
REFUND	330[CC]		
<i>refund_type</i>			
DEPOSIT	239[CC]		
REFUND	330[CC]		
<i>registration</i>			
SERVICE_PROVIDERS_REF	262[A2]		
<i>regulatory_id</i>			
ACCOUNT_BALANCES	116[CC]		
CMF	187[CC]		
GLOBAL_ACCOUNT_BALANCES	266[A1]		
REGULATORY_ID_REF	231[A2]		
REGULATORY_ID_VALUES	232[A2]		
<i>rel_constraint_cond_id</i>			
BSD_REL_CONSTRNT_CONDITIONS	84[CC]		
<i>rel_constraint_id</i>			
BSD_REL_CONSTRNT_CONDITIONS	84[CC]		
BSD_RELATIONAL_CONSTRAINTS	80[CC]		
<i>rel_constraint_type_id</i>			
BSD_REL_CONSTRNT_TYPE_REF	85[CC]		
BSD_REL_CONSTRNT_TYPE_VALUES	86[CC]		
BSD_RELATIONAL_CONSTRAINTS	80[CC]		
<i>related_service_order_id</i>			
ORD_LOGICAL_SERVICE_ORDER	291[CC]		
<i>relational_default_id</i>			
BSD_RELATIONAL_DEFAULTS	82[CC]		
<i>remark</i>			
CMF	186[CC]		
<i>reminder_dt</i>			
TICKLER	309[A2]		
<i>remit_service_center</i>			
ACCT_SEG_MAP	18[A1]		
<i>remote_done</i>			
EXT_FTP_ACCESS	242[A1]		
EXT_LOCAL_DIR_ACCESS	245[A1]		
<i>remote_host</i>			
EXT_FTP_ACCESS	242[A1]		
<i>remote_login</i>			
EXT_FTP_ACCESS	242[A1]		
<i>remote_password</i>			
EXT_FTP_ACCESS	242[A1]		
<i>remote_ready</i>			
EXT_FTP_ACCESS	242[A1]		
EXT_LOCAL_DIR_ACCESS	245[A1]		
<i>remote_work</i>			
EXT_FTP_ACCESS	242[A1]		
EXT_LOCAL_DIR_ACCESS	245[A1]		
<i>repeat_count</i>			
BATCH_REQUEST	30[CC]		
<i>replicate_order</i>			
EPR_BATCH_WORK	224[A1]		
<i>reply_flag</i>			
RT_PAYMENT_RESP_REF	247[A2]		
RT_PAYMENT_RESP_VALUES	248[A2]		
<i>report_id</i>			
BATCH_REPORT	25[CC]		
BATCH_REPORT_LINES	26[CC]		
<i>report_type_id</i>			
BATCH_REPORT	25[CC]		
BATCH_REPORT_TYPE_REF	27[CC]		
BATCH_REPORT_TYPE_VALUES	28[CC]		
<i>reported_amount</i>			
JNL_DETAIL	258[CC]		
JNL_TRANS	263[CC]		
<i>request_date</i>			
REFUND	330[CC]		
<i>request_id</i>			
ADJ	123[CC]		
PAYMENT_TRANS	305[CC]		
<i>request_status</i>			
ADJ	121[CC]		
NRC_KEY	278[CC]		
<i>request_type</i>			
PAYMENT_TRANS	305[CC]		
<i>requested_service</i>			
PAYMENT_TRANS	305[CC]		
<i>rerate_cdr_data_partition_key</i>			
CDR_RERATED	180[CC]		
<i>rerate_msg_id</i>			
CDR_RERATED	180[CC]		
<i>rerate_msg_id_serv</i>			
CDR_RERATED	180[CC]		
<i>rerate_msg_id2</i>			
CDR_RERATED	180[CC]		
<i>rerate_split_row_num</i>			
CDR_RERATED	180[CC]		
<i>rerated_dt</i>			
CDR_DATA	172[CC]		
<i>resale_flag</i>			
TAX_CODES_COMM	289[A2]		
<i>resend_delay</i>			
CCARD_RESPONSE_CODE_REF	100[A1]		
<i>respond_to_id</i>			
EXT_CONTACTS	238[A1]		
<i>response_category</i>			
CCARD_RESPONSE_CODE_REF	100[A1]		

EFT_RESPONSE_CODE_REF	205[A1]	CMF	187[CC]
response_code		JNL_DETAIL	258[CC]
BMF	159[CC]	JNL_TRANS	264[CC]
BMF_UNAPPLIED	165[CC]	JNL_WORK_LIST	265[CC]
CCARD_RESPONSE_CODE_REF	100[A1]	REV_RCV_COST_CENTER_REF	234[A2]
CCARD_RESPONSE_CODE_VALUES	101[A1]	REV_RCV_COST_CENTER_VALUES	235[A2]
EFT_RESPONSE_CODE_REF	205[A1]	SERVICE	350[CC]
EFT_RESPONSE_CODE_VALUES	206[A1]	SERVICE_BILLING	353[CC]
PAYMENT_TRANS	304[CC]	SERVICE_VIEW	359[CC]
response_code_descr		revenue_accounting_office	
CCARD_AVS_RESPONSE_CODES	99[A1]	SERVICE_PROVIDERS_REF	262[A2]
restricted_address_type		revenue_owner	
EMF_CONFIG_ADDR_CATEGORY_MAP	208[A1]	ABI_SOURCE_REF	11[A1]
restricted_domain		reversal_trans_type	
DISCOUNT_RESTRICTIONS	193[A1]	EFT_RESPONSE_CODE_REF	205[A1]
UNIT_CR_RESTRICTIONS	325[A2]	reverse_batch_id	
restricted_id		BATCH_REQUEST	29[CC]
AGGR_USAGE_RESTRICTIONS	40[A1]	reverse_batch_type_id	
DISCOUNT_RESTRICTIONS	194[A1]	BATCH_TYPE_REF	47[CC]
UNIT_CR_RESTRICTIONS	325[A2]	review_date	
restricted_id2		ADJ	121[CC]
DISCOUNT_RESTRICTIONS	194[A1]	REFUND	331[CC]
UNIT_CR_RESTRICTIONS	325[A2]	review_dt	
restricted_pic		NRC_KEY	278[CC]
SERVICE	350[CC]	revision_flag	
SERVICE_VIEW	359[CC]	ORD_ITEM	289[CC]
restriction_type		rfr_delay	
AGGR_USAGE_RESTRICTIONS	40[A1]	EXT_CONTACTS	240[A1]
DISCOUNT_RESTRICTIONS	193[A1]	rfr_filename	
UNIT_CR_RESTRICTIONS	325[A2]	EXT_CONTACTS	240[A1]
result_api		rfr_path	
BSD_QUEUE_AUTO_RETRY	76[CC]	EXT_CONTACTS	240[A1]
retry_count		right_value	
CDR_DATA_WORK	114[A1]	ORD_EXPRESSION	105[A2]
EPR_ERROR	225[A1]	roaming_detail	
EXT_CONTACTS_STATUS	241[A1]	CDR_DATA_WORK	114[A1]
retry_delay		CDR_OUTCOLLECTS	120[A1]
EXT_CONTACTS	239[A1]	roaming_invoice_dt	
retry_interval		ROAMING_INVOICE_SUMMARY	237[A2]
BSD_QUEUE_AUTO_RETRY	76[CC]	ROAMING_TRANSFER_DETAIL	241[A2]
retry_limit		roaming_invoice_no	
EXT_CONTACTS	239[A1]	ROAMING_INVOICE_SUMMARY	237[A2]
return_code		ROAMING_TRANSFER_DETAIL	241[A2]
PROCESS_RUN	156[A2]	rollover_grouping	
return_reason_id		CONTRACT_TYPES	161[A1]
ROAMING_TRANSFER_DETAIL	243[A2]	rollover_order	
rev_rcv_cost_ctr		CONTRACT_TYPES	161[A1]
ACCT_SEG_MAP	18[A1]	rollover_period	
ADJ	123[CC]	CUSTOMER_CONTRACT	220[CC]
BILL_INVOICE_DETAIL	149[CC]	CUSTOMER_CONTRACT_VIEW	226[CC]
CDR_DATA	171[CC]	ETUC_UPDATES	247[CC]
CDR_DATA_WORK	112[A1]	UNIT_CREDIT_PROFILES	367[CC]
CDR_FREE	179[CC]	rollover_period_start	
CDR_OUTCOLLECTS	120[A1]	CUSTOMER_CONTRACT	220[CC]
CLEARING_HOUSE_DIVISION	145[A1]	CUSTOMER_CONTRACT_VIEW	226[CC]

ETUC_UPDATES	247[CC]	CUSTOMER_CONTRACT_VIEW	226[CC]
UNIT_CREDIT_PROFILES	367[CC]	NRC	276[CC]
<i>rounding_factor</i>		NRC_VIEW	282[CC]
RATE_CURRENCY_REF	192[A2]	ORD_ORDER	292[CC]
TAX_PKG_INST_ID_REF	297[A2]	PRODUCT	312[CC]
<i>rounding_method</i>		PRODUCT_VIEW	323[CC]
BONUS_POINT_ID_REF	90[A1]	SALES_CHANNEL_REF	249[A2]
RATE_CURRENCY_REF	192[A2]	SALES_CHANNEL_VALUES	251[A2]
TAX_PKG_INST_ID_REF	296[A2]	SERVICE	350[CC]
USAGE_TYPES	349[A2]	SERVICE_VIEW	359[CC]
<i>row_count</i>		<i>sales_code</i>	
CDR_RAW_USAGE	121[A1]	CMF	186[CC]
<i>rpac_cluster_id</i>		<i>sales_id</i>	
BP_SERVER_TO_RPAC_MAP	95[A1]	NRC	276[CC]
RPAC_CLUSTER_DEFINITIONS	245[A2]	NRC_VIEW	282[CC]
RPAC_DEFINITIONS	246[A2]	<i>sample_bill_flag</i>	
<i>rpac_cluster_type</i>		ABI_INVOICE	112[CC]
RPAC_CLUSTER_DEFINITIONS	245[A2]	<i>save_detail</i>	
<i>rpac_hostname</i>		DISCOUNT_DEFINITIONS	189[A1]
RPAC_DEFINITIONS	246[A2]	REPORT_DISCOUNT	341[CC]
<i>rpac_id</i>		<i>sc_address1</i>	
RPAC_DEFINITIONS	246[A2]	SALES_CHANNEL_REF	249[A2]
<i>rpac_port</i>		SERVICE_CENTERS	256[A2]
RPAC_DEFINITIONS	246[A2]	<i>sc_address2</i>	
<i>rpac_query_order</i>		SALES_CHANNEL_REF	249[A2]
RPAC_DEFINITIONS	246[A2]	SERVICE_CENTERS	256[A2]
<i>rpac_replicate_order</i>		<i>sc_address3</i>	
RPAC_DEFINITIONS	246[A2]	SALES_CHANNEL_REF	249[A2]
<i>run_date</i>		SERVICE_CENTERS	256[A2]
BATCH_REQUEST_EXECUTE_LOG	33[CC]	<i>sc_city</i>	
<i>run_number</i>		SALES_CHANNEL_REF	249[A2]
BATCH_REPORT	25[CC]	SERVICE_CENTERS	256[A2]
BATCH_REQUEST_ACTIVITY_LOG	31[CC]	<i>sc_contact_fname</i>	
BATCH_REQUEST_ERROR_LOG	32[CC]	SALES_CHANNEL_REF	249[A2]
BATCH_REQUEST_EXECUTE_LOG	33[CC]	SERVICE_CENTERS	256[A2]
BATCH_REQUEST_NOTIFY_MESSAGE	34[CC]	<i>sc_contact_lname</i>	
BATCH_REQUEST_SEGMENT	38[CC]	SALES_CHANNEL_REF	249[A2]
<i>run_order</i>		SERVICE_CENTERS	256[A2]
ACCOUNT_MOVE_TABLES	17[A1]	<i>sc_contact_minit</i>	
<i>run_restart_type</i>		SALES_CHANNEL_REF	249[A2]
BATCH_REQUEST	30[CC]	SERVICE_CENTERS	256[A2]
<i>run_status</i>		<i>sc_contact_name_gen</i>	
BATCH_REQUEST_EXECUTE_LOG	33[CC]	SALES_CHANNEL_REF	249[A2]
JNL_RUNS_STATUS	262[CC]	<i>sc_contact_name_pre</i>	
<i>run_success</i>		SALES_CHANNEL_REF	249[A2]
JNL_DETAIL	258[CC]	<i>sc_country_code</i>	
JNL_TRANS	264[CC]	SALES_CHANNEL_REF	249[A2]
<i>run_type</i>		SERVICE_CENTERS	256[A2]
BATCH_REQUEST	29[CC]	<i>sc_county</i>	
BATCH_REQUEST_EXECUTE_LOG	33[CC]	SERVICE_CENTERS	256[A2]
<i>run_who</i>		<i>sc_name</i>	
BATCH_REQUEST_EXECUTE_LOG	33[CC]	SALES_CHANNEL_REF	249[A2]
S		SERVICE_CENTERS	256[A2]
<i>sales_channel_id</i>		<i>sc_number</i>	
CUSTOMER_CONTRACT	220[CC]	SALES_CHANNEL_REF	249[A2]

<i>sc_phone</i>			
SALES_CHANNEL_REF	249[A2]		
SERVICE_CENTERS	256[A2]		
<i>sc_state</i>			
SALES_CHANNEL_REF	249[A2]		
SERVICE_CENTERS	256[A2]		
<i>sc_zip</i>			
SERVICE_CENTERS	256[A2]		
<i>sc_zip_code</i>			
SALES_CHANNEL_REF	249[A2]		
<i>scale</i>			
RECORD_FIELD_MAP	222[A2]		
<i>scale_type</i>			
RECORD_FIELD_MAP	222[A2]		
<i>scenario_id</i>			
REPORT_COL	338[CC]		
REPORT_COL_ACT_LIST	339[CC]		
<i>sched_start</i>			
PROCESS_SCHED	157[A2]		
<i>sched_start_time</i>			
PROCESS_RUN	156[A2]		
<i>scheduled_date</i>			
BATCH_REQUEST	29[CC]		
BATCH_REQUEST_EXECUTE_LOG	33[CC]		
REPORT_COL	338[CC]		
REPORT_COL_ACT_LIST	339[CC]		
<i>screen_id</i>			
CSR_AUDIT	218[CC]		
<i>second_dt</i>			
CDR_DATA	170[CC]		
CDR_DATA_WORK	111[A1]		
CDR_FREE	178[CC]		
CDR_OUTCOLLECTS	119[A1]		
<i>second_units</i>			
CDR_DATA	170[CC]		
CDR_DATA_WORK	111[A1]		
CDR_FREE	178[CC]		
CDR_OUTCOLLECTS	119[A1]		
CIBER_INCOLLECTS	130[A1]		
CIBER_INCOLLECTS_ERROR	133[A1]		
<i>secondary_amount</i>			
BILL_INVOICE_DETAIL	143[CC]		
REPORT_DISCOUNT	341[CC]		
REPORT_INVOICE	343[CC]		
<i>secondary_unit_type</i>			
ADR_SECONDARY_UNIT_TYPE	34[A1]		
<i>secondary_unit_type_desc</i>			
ADR_SECONDARY_UNIT_TYPE	34[A1]		
<i>section_exclude</i>			
BILL_FMT_SECTION_EXCL_REF	67[A1]		
BILL_FMT_SECTION_EXCL_VALUES	68[A1]		
BILL_SECTIONS	85[A1]		
<i>section_type</i>			
BILL_FMT_SECTION_TYPE_REF	69[A1]		
BILL_FMT_SECTION_TYPE_VALUES	70[A1]		
BILL_FORMAT_TEMPLATE	77[A1]		
<i>security_code</i>			
SERVICE_PROVIDERS_REF	261[A2]		
<i>security_word</i>			
SALES_CHANNEL_REF	250[A2]		
<i>segment_data</i>			
BATCH_REQUEST_SEGMENT	39[CC]		
<i>segment_id</i>			
BATCH_REQUEST_ERROR_LOG	32[CC]		
BATCH_REQUEST_PARTICIPANT	37[CC]		
BATCH_REQUEST_SEGMENT	38[CC]		
<i>segment_status_id</i>			
BATCH_REQUEST_SEGMENT	38[CC]		
<i>segment_type</i>			
BATCH_REQUEST_SEGMENT	38[CC]		
<i>segmenter_executable_id</i>			
BATCH_TYPE_STAGE_REF	48[CC]		
<i>sender</i>			
TAP_MAPPING	279[A2]		
<i>sent_receive</i>			
CC_BALANCE	102[A1]		
<i>seq_num</i>			
CDR_OUTCOLLECTS	120[A1]		
OUTCOLLECT_BATCH	120[A2]		
RECORD_TYPE_SEQ_NUM	227[A2]		
SEQ_NUM	253[A2]		
<i>seq_num_in</i>			
CIBER_OPERATOR_SID_BID	136[A1]		
OUTCOLLECT_BATCH_SEQ_NUM	122[A2]		
<i>seq_num_out</i>			
CIBER_OPERATOR_SID_BID	136[A1]		
OUTCOLLECT_BATCH_SEQ_NUM	122[A2]		
<i>seqnum</i>			
EPR_ERROR	225[A1]		
RATE_PERIODS	201[A2]		
RATE_USAGE	209[A2]		
RATE_USAGE_BANDS	212[A2]		
RATE_USAGE_BANDS_OVERRIDES	213[A2]		
RATE_USAGE_OVERRIDES	215[A2]		
RE_CHARGE_MODIFIER	236[A2]		
UNIT_CR_RATE_LIMIT	321[A2]		
USAGE_JURISDICTION	337[A2]		
<i>seqnum_rate_usage</i>			
CDR_DATA	172[CC]		
<i>seqnum_rate_usage_overrides</i>			
CDR_DATA	172[CC]		
<i>serial_number</i>			
PRODUCT	313[CC]		
PRODUCT_VIEW	323[CC]		
<i>server_capacity</i>			
SERVER_DEFINITION	98[CC]		
<i>server_category</i>			
SERVER_CATEGORY_REF	254[A2]		
SERVER_CATEGORY_VALUES	255[A2]		
SERVER_DEFINITION	98[CC]		

<i>server_from</i>			
ACCOUNT_MOVE_STATUS	11	[CC]	
<i>server_id</i>			
BP_SERVER_TO_RPAC_MAP	95	[A1]	
DEVICES	185	[A1]	
EPR_ERROR	225	[A1]	
EXTERNAL_ID_ACCT_MAP	87	[CC]	
EXTERNAL_ID_EQUIP_MAP	88	[CC]	
EXTERNAL_ID_EQUIP_MAP_VIEW	91	[CC]	
EXTERNAL_ID_GROUP_MAP	92	[CC]	
FILES_IN_PROCESS	251	[A1]	
IO_DEVICES	290	[A1]	
JNL_RUNS	33	[A2]	
JNL_RUNS_STATUS	262	[CC]	
LOCAL_SERVER_ID	59	[A2]	
PROCESS_RUN	156	[A2]	
ROAMING_OPERATOR_REF	238	[A2]	
SERVER_DEFINITION	98	[CC]	
SERVER_LOOKUP	99	[CC]	
USAGE_FILE_COUNTS	329	[A2]	
USAGE_FILE_COUNTS_HISTORY	330	[A2]	
<i>server_to</i>			
ACCOUNT_MOVE_STATUS	11	[CC]	
<i>server_type</i>			
ATM_CUSTOM_TABLE_DEF	49	[A1]	
RECORD_FIELD_MAP	223	[A2]	
RECORD_TYPE_REF	225	[A2]	
SERVER_DEFINITION	98	[CC]	
<i>service_active_dt</i>			
SERVICE	351	[CC]	
SERVICE_VIEW	360	[CC]	
<i>service_address_assoc_id</i>			
SERVICE_ADDRESS_ASSOC	101	[CC]	
<i>service_center_id</i>			
BILL_FILES	133	[CC]	
BILL_MESSAGE_GROUPS	81	[A1]	
CUSTOMER_SERVICE_CENTERS	237	[CC]	
SERVICE_CENTER_TYPES	258	[A2]	
SERVICE_CENTERS	256	[A2]	
<i>service_center_type</i>			
CUSTOMER_SERVICE_CENTERS	237	[CC]	
SERVICE_CENTER_TYPE_REF	259	[A2]	
SERVICE_CENTER_TYPE_VALUES	260	[A2]	
SERVICE_CENTER_TYPES	258	[A2]	
<i>service_code</i>			
TAP_MAPPING	280	[A2]	
<i>service_company</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_end</i>			
REPORT_EQUIP_VOL	342	[CC]	
<i>service_fname</i>			
REPORT_EQUIP_VOL	342	[CC]	
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_franchise_tax_code</i>			
SERVICE_BILLING	353	[CC]	
SERVICE_KEY	355	[CC]	
<i>service_geocode</i>			
SERVICE_BILLING	353	[CC]	
SERVICE_KEY	355	[CC]	
<i>service_group</i>			
CLASS_OF_SERVICE_CODE_REF	141	[A1]	
TAX_CHARGE_ELEMENTS	285	[A2]	
<i>service_inactive_dt</i>			
SERVICE	351	[CC]	
SERVICE_VIEW	360	[CC]	
<i>service_inquiry_center</i>			
ACCT_SEG_MAP	18	[A1]	
<i>service_key</i>			
TAP_MAPPING	282	[A2]	
<i>service_lname</i>			
REPORT_EQUIP_VOL	342	[CC]	
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_init</i>			
REPORT_EQUIP_VOL	342	[CC]	
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_name_generation</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_name_pre</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_order_id</i>			
ORD_INV_PLACEHOLDER	285	[CC]	
ORD_ITEM	287	[CC]	
ORD_ITEM_MAP	96	[CC]	
ORD_LOGICAL_SERVICE_ORDER	290	[CC]	
ORD_SERVICE_ORDER	295	[CC]	
ORD_SERVICE_ORDER_DEPENDENCY	298	[CC]	
ORD_SERVICE_ORDER_EXT_DATA	299	[CC]	
<i>service_order_type_id</i>			
ORD_ITEM_TYPE_ASSOC	112	[A2]	
ORD_SERVICE_ORDER	295	[CC]	
ORD_SERVICE_ORDER_TYPE_REF	117	[A2]	
ORD_SERVICE_ORDER_TYPE_VALUES	118	[A2]	
ORD_SERVICE_ORDER_WORKFLOW_MAP	119	[A2]	
<i>service_phone</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_phone2</i>			
SERVICE	350	[CC]	
SERVICE_VIEW	359	[CC]	
<i>service_start</i>			
REPORT_EQUIP_VOL	342	[CC]	
<i>service_type</i>			
TAP_MAPPING	279	[A2]	

<i>serving_place</i>			
CIBER_INCOLLECTS	129[A1]	BATCH_NOTIFY_EVENT_TYPE_VALUES	19[CC]
CIBER_INCOLLECTS_ERROR	133[A1]	BATCH_NOTIFY_TYPE_VALUES	21[CC]
<i>serving_sid_bid</i>		BATCH_PARTICIPANT_TYPE_VALUES	24[CC]
CDR_OUTCOLLECTS	120[A1]	BATCH_REPORT_TYPE_VALUES	28[CC]
CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]	BATCH_STATUS_VALUES	41[CC]
OUTCOLLECT_BATCH_SEQ_NUM	122[A2]	BATCH_TEMPLATE_TYPE_VALUES	44[CC]
<i>serving_state_prov</i>		BATCH_TYPE_PARAMETER_VALUES	46[CC]
CIBER_INCOLLECTS	130[A1]	BATCH_TYPE_STAGE_VALUES	49[CC]
CIBER_INCOLLECTS_ERROR	133[A1]	BATCH_TYPE_VALUES	50[CC]
<i>session_id</i>		BILL_CLASS_VALUES	61[A1]
TMP_ENTITY	103[CC]	BILL_DISP_METH_VALUES	64[A1]
TMP_PENDING	104[CC]	BILL_FMT_OPT_VALUES	66[A1]
<i>set_query</i>		BILL_FMT_SECTION_EXCL_VALUES	68[A1]
RECORD_TYPE_REF	226[A2]	BILL_FMT_SECTION_TYPE_VALUES	70[A1]
<i>ship_from_geocode</i>		BILL_FMT_TEMPLATE_CODE_VALUES	72[A1]
NRC	275[CC]	BILL_FORMAT_CODE_TYPE_VALUES	74[A1]
NRC_VIEW	281[CC]	BILL_PERIOD_VALUES	83[A1]
<i>ship_to_geocode</i>		BILLING_FREQUENCY_VALUES	58[A1]
NRC	275[CC]	BONUS_POINT_ID_VALUES	91[A1]
NRC_VIEW	281[CC]	BONUS_POINT_TRANS_TYPE_VALUES	94[A1]
<i>shipping_depth</i>		BSD_APPLICATION_VALUES	57[CC]
ITEM_MARKETING_DATA_REF	297[A1]	BSD_ATTR_CONSTRAINT_TYPE_VALUES	64[CC]
<i>shipping_height</i>		BSD_BUSINESS_UNIT_VALUES	66[CC]
ITEM_MARKETING_DATA_REF	297[A1]	BSD_CONSTRAINT_DESC_VALUES	68[CC]
<i>shipping_item</i>		BSD_REL_CONSTRAINT_TYPE_VALUES	86[CC]
ITEM_MARKETING_DATA_REF	297[A1]	CARD_TYPE_CODE_VALUES	98[A1]
<i>shipping_weight</i>		CCARD_RESPONSE_CODE_VALUES	101[A1]
ITEM_MARKETING_DATA_REF	297[A1]	CDR_ADJ_ERROR_VALUES	105[A1]
<i>shipping_weight_units</i>		CDR_COMP_STATUS_VALUES	108[A1]
ITEM_MARKETING_DATA_REF	297[A1]	CELL_ID_VALUES	123[A1]
<i>shipping_width</i>		CLASS_OF_SERVICE_CODE_VALUES	142[A1]
ITEM_MARKETING_DATA_REF	297[A1]	CLEARING_HOUSE_ID_VALUES	147[A1]
<i>short_content_desc</i>		CMF_STATUS_CHG_REASON_VALUES	151[A1]
ITEM_MARKETING_DATA_LINKS	295[A1]	CMF_STATUS_VALUES	153[A1]
<i>short_description_text</i>		COMPONENT_DEFINITION_VALUES	155[A1]
DESCRIPTIONS	184[A1]	CONNECT_REASON_CODES_VALUES	158[A1]
<i>short_display</i>	9[A1], 9[A2], 9[CC], 111[CC]	CORRIDOR_PLAN_ID_VALUES	167[A1]
ABI_SOURCE_VALUES	12[A1]	COUNTRY_CODE_VALUES	169[A1]
ACCESS_REGION_VALUES	14[A1]	CURRENCY_TYPE_VALUES	176[A1]
ACCOUNT_CATEGORY_VALUES	16[A1]	DENIAL_REASON_VALUES	179[A1]
ACCT_SEG_VALUES	20[A1]	DEPOSIT_TYPE_VALUES	183[A1]
ADDRESS_CATEGORY_VALUES	22[A1]	DISCONNECT_REASON_VALUES	187[A1]
ADDRESS_TYPE_VALUES	25[A1]	DISCOUNT_THRESH_TIER_ID_VALUES	199[A1]
ADJ_REASON_CODE_VALUES	27[A1]	DISTANCE_BANDS_ID_VALUES	202[A1]
ADJ_TRANS_GROUP_VALUES	33[A1]	EFT_RESPONSE_CODE_VALUES	206[A1]
AGGR_USAGE_DEFINITIONS_VALUES	38[A1]	EMF_CONFIG_ID_VALUES	210[A1]
AMP_MODE_VALUES	42[A1]	EMF_STATUS_CHG_REASON_VALUES	212[A1]
ARCH_MODE_VALUES	45[A1]	EMF_STATUS_VALUES	214[A1]
ARCH_TYPE_VALUES	48[A1]	EMF_SUSPENSION_REASON_VALUES	216[A1]
ATM_POPLIST_VALUES	52[A1]	ENTITY_TYPE_GROUP_VALUES	219[A1]
BALANCE_XFER_DIFF_VALUES	54[A1]	ENTITY_TYPE_VALUES	222[A1]
BAM_ERROR_CODE_VALUES	56[A1]	EQUIP_CLASS_CODE_VALUES	227[A1]
BATCH_CATEGORY_VALUES	13[CC]	EQUIP_TYPE_CODE_VALUES	229[A1]
BATCH_INV_SOURCE_VALUES	17[CC]	EXRATE_CLASS_VALUES	233[A1]
		EXT_ACCESS_METHOD_VALUES	237[A1]
		EXT_SOURCE_ID_VALUES	248[A1]
		EXT_SOURCE_TYPE_VALUES	250[A1]

EXTERNAL_ID_TYPE_VALUES	235[A1]	ROAMING_OPERATOR_VALUES	239[A2]
FILE_TYPE_VALUES	257[A1]	RT_PAYMENT_RESP_VALUES	248[A2]
FRANCHISE_CODE_VALUES	259[A1]	SALES_CHANNEL_VALUES	251[A2]
GENDER_VALUES	261[A1]	SERVER_CATEGORY_VALUES	255[A2]
GENERIC_ENUMERATION_VALUES	263[A1]	SERVICE_CENTER_TYPE_VALUES	260[A2]
GROUP_TYPE_VALUES	272[A1]	SERVICE_PROVIDERS_VALUES	263[A2]
GRS_ACTION_VALUES	276[A1]	STATE_VALUES	265[A2]
GRS_OPERATION_VALUES	278[A1]	STATUS_REASON_VALUES	268[A2]
GUI_INDICATOR_VALUES	282[A1]	STATUS_TYPE_VALUES	272[A2]
INDUSTRY_TYPE_VALUES	285[A1]	STATUS_VALUES	273[A2]
INSERT_FOREIGN_KEY_VALUES	287[A1]	SUSPENDED_REASON_VALUES	275[A2]
INSERT_GRP_ID_VALUES	289[A1]	TAX_PKG_INST_ID_VALUES	298[A2]
ITEM_CATEGORY_VALUES	292[A1]	TAX_STATUS_VALUES	302[A2]
ITEM_MARKETING_DATA_VALUES	298[A1]	TAX_THRESHOLD_VALUES	306[A2]
JNL_EMF_BOOK_VALUES	13[A2]	TAX_TYPE_COMM_VALUES	308[A2]
JURISDICTION_CLASS_VALUES	37[A2]	TIMEZONE_VALUES	311[A2]
KEY_DOMAIN_SYMBOL_VALUES	40[A2]	TRANS_SOURCE_VALUES	314[A2]
LANGUAGE_CODE_VALUES	43[A2]	UNITS_TYPE_VALUES	317[A2]
LBX_ERROR_STATUS_VALUES	51[A2]	USAGE_FILE_CLASS_VALUES	328[A2]
LBX_SOURCE_ID_VALUES	57[A2]	VIP_CODE_VALUES	359[A2]
LOCATION_CODE_VALUES	61[A2]	XFER_REASON_CODES_VALUES	363[A2]
MKT_CODE_VALUES	66[A2]	ZONE_CLASS_VALUES	366[A2]
MOBILE_ZONE_TYPE_VALUES	70[A2]	ZONE_VALUES	368[A2]
MOBILE_ZONE_VALUES	71[A2]	<i>shutdown_proc</i>	
MSG_GRP_ID_VALUES	73[A2]	DYNAMIC_USER_LIBS	203[A1]
MSG_TRIGGER_ID_VALUES	75[A2]	<i>sic_code</i>	
NOTE_REASON_VALUES	83[A2]	CMF	186[CC]
NOTE_TEMPLATE_VALUES	85[A2]	<i>sid_bid</i>	
NOTE_TYPE_VALUES	88[A2]	CIBER_LINE_RANGES	135[A1]
NRC_LINE_VALUES	90[A2]	CIBER_OPERATOR_SID_BID	136[A1]
OPEN_ITEM_ID_VALUES	96[A2]	CIBER_SID_BID_DEF	139[A1]
ORD_DEPENDENCY_TYPE_VALUES	103[A2]	CIBER_SID_BID_MARKET	140[A1]
ORD_ITEM_ACTION_VALUES	107[A2]	ROAMING_TRANSFER_DETAIL	242[A2]
ORD_ITEM_MEMBER_TYPE_VALUES	109[A2]	<i>sid_bid_recipient</i>	
ORD_ITEM_TYPE_VALUES	114[A2]	ROAMING_TRANSFER_DETAIL	243[A2]
ORD_ORDER_STATUS_VALUES	116[A2]	<i>sim_serial_number</i>	
ORD_SERVICE_ORDER_TYPE_VALUES	118[A2]	SERVICE	350[CC]
OWNING_COST_CTR_VALUES	125[A2]	SERVICE_VIEW	359[CC]
PACKAGE_DEFINITION_VALUES	130[A2]	<i>slide_time</i>	
PACKAGE_GROUP_VALUES	132[A2]	PROCESS_SCHED	157[A2]
PARAM_VALUES	135[A2]	<i>so_wf_map_id</i>	
PAYMENT_MERCHANT_ID_VALUES	142[A2]	ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]
PLAN_ID_CREDIT_VALUES	144[A2]	<i>sort_index</i>	
PLAN_ID_DISCOUNT_VALUES	146[A2]	GENERIC_ENUMERATION_REF	262[A1]
POINT_CATEGORY_VALUES	148[A2]	<i>sort_priority</i>	
POINT_CLASS_VALUES	150[A2]	BILL_FORMAT_PRODUCTS	76[A1]
POINT_REGION_VALUES	152[A2]	BILL_FORMAT_TEMPLATE	77[A1]
PRIVACY_LEVEL_VALUES	154[A2]	<i>source_attribute_id</i>	
PROVIDER_CLASS_VALUES	181[A2]	BSD_RELATIONAL_CONSTRAINTS	80[CC]
RATABLE_UNIT_CLASS_VALUES	183[A2]	<i>source_id</i>	
RATE_CURRENCY_GROUP_VALUES	191[A2]	ABI_SOURCE_RECORD_TYPES	10[A1]
RATE_CURRENCY_VALUES	194[A2]	ABI_SOURCE_REF	11[A1]
RATE_PERIOD_VALUES	204[A2]	ABI_SOURCE_VALUES	12[A1]
RECORD_TYPE_VALUES	228[A2]	BMF	158[CC]
REFUND_REASON_CODE_VALUES	230[A2]	BMF_UNAPPLIED	164[CC]
REGULATORY_ID_VALUES	232[A2]	CMF_ABI_SOURCES	188[CC]
REV_RCV_COST_CENTER_VALUES	235[A2]		

EXT_CONTACTS	238[A1]	PAYMENT_FILE_TRAILER	139[A2]
EXT_SOURCE_ID_REF	247[A1]	<i>src_table</i>	
EXT_SOURCE_ID_VALUES	248[A1]	PAYMENT_FILE_DETAIL	137[A2]
LBX_ERROR	48[A2]	PAYMENT_FILE_HEADER	138[A2]
LBX_FILE_STATUS	52[A2]	PAYMENT_FILE_TRAILER	139[A2]
LBX_PAYMENT_TYPES	53[A2]	<i>ss_action_code</i>	
LBX_POST_DATED	54[A2]	TAP_MAPPING	281[A2]
LBX_SOURCE_ID_REF	56[A2]	<i>ss_code</i>	
LBX_SOURCE_ID_VALUES	57[A2]	TAP_MAPPING	281[A2]
PREPAYMENT	308[CC]	<i>ssn</i>	
SERVICE_PROVIDERS_REF	262[A2]	CMF	185[CC]
TRANS_SOURCE_REF	313[A2]	<i>stage</i>	
<i>source_id_serv</i>		BATCH_TYPE_STAGE_REF	48[CC]
BMF	158[CC]	<i>start_by</i>	
BMF_UNAPPLIED	164[CC]	CONTRACT_TYPES	161[A1]
PREPAYMENT	308[CC]	<i>start_by_dt</i>	
<i>source_object_id</i>		CUSTOMER_CONTRACT	221[CC]
BSD_RELATIONAL_CONSTRAINTS	80[CC]	CUSTOMER_CONTRACT_VIEW	227[CC]
<i>source_type</i>		<i>start_by_units</i>	
BMF	158[CC]	CONTRACT_TYPES	161[A1]
BMF_UNAPPLIED	164[CC]	<i>start_dt</i>	
EXT_SOURCE_ID_REF	247[A1]	CONTRACT_ASSIGNMENTS_HQ	213[CC]
EXT_SOURCE_TYPE_REF	249[A1]	CUSTOMER_CONTRACT	220[CC]
EXT_SOURCE_TYPE_VALUES	250[A1]	CUSTOMER_CONTRACT_VIEW	226[CC]
PREPAYMENT	308[CC]	<i>start_dt_offset</i>	
RECORD_TYPE_REF	225[A2]	PACKAGE_COMPONENT_MEMBERS	127[A2]
<i>special_code</i>		<i>start_offset</i>	
BILL_INVOICE	136[CC]	BILL_INVOICE	137[CC]
<i>special_features</i>		<i>start_proc</i>	
CIBER_INCOLLECTS	129[A1]	DYNAMIC_USER_LIBS	203[A1]
CIBER_INCOLLECTS_ERROR	133[A1]	<i>start_time</i>	
<i>special_ins_code</i>		DEVICES	185[A1]
ABI_INVOICE	112[CC]	PROCESS_RUN	156[A2]
<i>split_booking</i>		PROCESS_WORK	162[A2]
NRC_TRANS_DESCR	92[A2]	PROCESS_WORK_STATUS_DEF	170[A2]
PRODUCT_ELEMENTS	174[A2]	<i>starthhmm</i>	
<i>split_row_num</i>		RATE_PERIODS	202[A2]
CDR_BILLED	167[CC]	<i>state</i>	
CDR_DATA	169[CC]	ADDRESS	119[CC]
CDR_DATA_DUC	173[CC]	CIBER_LINE_RANGES	135[A1]
CDR_DATA_TAX	175[CC]	CMF_EXEMPT	201[CC]
CDR_DATA_WORK	113[A1]	LOCAL_ADDRESS	268[CC]
CDR_DATA_WORK_TAX	115[A1]	MASTER_ADDRESS	93[CC]
CDR_FREE	179[CC]	TCU_DET_REP	363[CC]
CDR_OUTCOLLECTS	118[A1]	USAGE_FILE_PROCESS_STATE	332[A2]
CDR_RERATED	180[CC]	<i>state_abbr</i>	
CDR_UNBILLED	181[CC]	STATE_REF	264[A2]
RPU_WORK_STATUS	348[CC]	STATE_VALUES	265[A2]
<i>split_type</i>		<i>state_code</i>	
USAGE_TYPES_SPLIT	354[A2]	CMF_EXEMPT	201[CC]
<i>sql_query</i>		GEOCODE_OVERRIDES	264[A1]
PROCESS_SCHED	158[A2]	LATE_FEE_ASSIGNMENT	44[A2]
RPU_WORK	347[CC]	TAX_ASSIGNMENTS	283[A2]
<i>src_field</i>		TAX_OVERRIDES	293[A2]
PAYMENT_FILE_DETAIL	137[A2]	TAX_THRESHOLDS	304[A2]
PAYMENT_FILE_HEADER	138[A2]		

TCU_DET_REP	363[CC]	PROCESS_RUN	156[A2]
ZIPCODE	364[A2]	PROCESS_WORK	162[A2]
state_geocode		ROAMING_TRANSFER_DETAIL	243[A2]
STATE_REF	264[A2]	RPU_WORK	347[CC]
STATE_VALUES	265[A2]	SALES_CHANNEL_REF	250[A2]
state_origin		UTL_TASK_STATUS	370[CC]
USAGE_JURISDICTION	338[A2]	status_id	
state_origin_exclude		SERVICE_STATUS	356[CC]
USAGE_JURISDICTION	338[A2]	STATUS_REASON_MAP	266[A2]
state_rate		STATUS_REF	269[A2]
BILL_INVOICE_TAX	152[CC]	STATUS_TYPE_MAP	270[A2]
CDR_DATA_TAX	175[CC]	STATUS_VALUES	273[A2]
CDR_DATA_WORK_TAX	115[A1]	status_reason_id	
TAX_OVERRIDES	294[A2]	ORD_LOGICAL_SERVICE_ORDER	290[CC]
state_target		SERVICE_STATUS	356[CC]
USAGE_JURISDICTION	338[A2]	STATUS_REASON_MAP	266[A2]
state_target_exclude		STATUS_REASON_REF	267[A2]
USAGE_JURISDICTION	338[A2]	STATUS_REASON_VALUES	268[A2]
state_tax		status_type_id	
ADJ	122[CC]	SERVICE_STATUS	356[CC]
ADJ_TAX	124[CC]	STATUS_TYPE_MAP	270[A2]
BILL_INVOICE_DETAIL	148[CC]	STATUS_TYPE_REF	271[A2]
BILL_INVOICE_TAX	152[CC]	STATUS_TYPE_VALUES	272[A2]
CDR_DATA_TAX	175[CC]	street_directional	
CDR_DATA_WORK	112[A1]	ADR_STREET_DIRECTIONAL	35[A1]
CDR_DATA_WORK_TAX	115[A1]	street_directional_desc	
CDR_FREE	178[CC]	ADR_STREET_DIRECTIONAL	35[A1]
CDR_OUTCOLLECTS	119[A1]	street_name	
CIBER_INCOLLECTS	127[A1]	LOCAL_ADDRESS	268[CC]
CIBER_INCOLLECTS_ERROR	131[A1]	MASTER_ADDRESS	93[CC]
NRC	276[CC]	street_suffix	
NRC_VIEW	282[CC]	ADR_STREET_SUFFIX	36[A1]
OUTCOLLECT_BATCH_TAX	123[A2]	LOCAL_ADDRESS	268[CC]
REPORT_INVOICE	344[CC]	MASTER_ADDRESS	93[CC]
statement_date		street_suffix_desc	
BILL_CYCLE	62[A1]	ADR_STREET_SUFFIX	36[A1]
BILL_INVOICE	136[CC]	subject_line	
CMF_INTERIM_BILLS	204[CC]	TICKLER	309[A2]
JNL_WORK_LIST	265[CC]	subscr_group_id	
PAYMENT_TRANS	303[CC]	EXT_IPDR_FS_ACCESS	243[A1]
statement_to_email		subscr_id_type	
CMF	186[CC]	TAP_MAPPING	281[A2]
statement_to_faxno		subscr_level_external_id	
CMF	185[CC]	TICKLER	309[A2]
static_right_value		subscr_master_group_no	
ORD_EXPRESSION	105[A2]	EMF_MASTER_GROUPS	242[CC]
status		GROUPS	248[CC]
ACCOUNT_MOVE_STATUS	11[CC]	subscr_no	
BMF_DISTRIBUTION	161[CC]	ACCOUNT_BILLED_SERVICES	118[CC]
EPR_BATCH_WORK	224[A1]	ADJ	120[CC]
EPR_ERROR	225[A1]	BILL_INVOICE_DETAIL	147[CC]
ORD_INV_PLACEHOLDER	285[CC]	CDR_BILLED	167[CC]
PAYMENT_MERCHANT_ID_REF	141[A2]	CDR_DATA	169[CC]
PAYMENT_PROFILE	302[CC]	CDR_DATA_WORK	110[A1]
PREPAYMENT	308[CC]	CDR_FREE	177[CC]
PREPAYMENT_DISTRIBUTION	310[CC]		

CDR_OUTCOLLECTS	118[A1]	ERROR_BILL	245[CC]
CDR_RERATED	180[CC]	ETUC_UPDATES	246[CC]
CDR_UNBILLED	181[CC]	EXTERNAL_ID_EQUIP_MAP	88[CC]
CONTRACT_UNIT_CR	216[CC]	EXTERNAL_ID_EQUIP_MAP_KEY	89[CC]
CSR_AUDIT	218[CC]	EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]
CUSTOMER_CORRIDORS	230[CC]	GLOBAL_OPEN_ITEM_ID_MAP	267[A1]
CUSTOMER_ID_EQUIP_MAP	232[CC]	GROUP_MEMBER	249[CC]
CUSTOMER_ID_EQUIP_MAP_KEY	233[CC]	HISTORIC_CONTRIBUTION	252[CC]
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]	JNL_DETAIL	257[CC]
EMF_JOIN	241[CC]	MOBILE_SERVICE_ZONES	271[CC]
EMF_NRC_REEST_DATES	243[CC]	OPEN_ITEM_ID_MAP	283[CC]
EMF_RC_REEST_DATES	244[CC]	ORD_SERVICE_ORDER	296[CC]
ERROR_BILL	245[CC]	REPORT_BILLED_REV	337[CC]
EXTERNAL_ID_EQUIP_MAP	88[CC]	REPORT_EQUIP_VOL	342[CC]
EXTERNAL_ID_EQUIP_MAP_KEY	89[CC]	REPORT_INVOICE	344[CC]
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]	RPU_WORK	347[CC]
GLOBAL_OPEN_ITEM_ID_MAP	267[A1]	SERVICE	349[CC]
GROUP_MEMBER	249[CC]	SERVICE_ADDRESS_ASSOC	101[CC]
HISTORIC_CONTRIBUTION	252[CC]	SERVICE_BILLING	352[CC]
JNL_DETAIL	257[CC]	SERVICE_KEY	355[CC]
MOBILE_SERVICE_ZONES	271[CC]	SERVICE_STATUS	356[CC]
OPEN_ITEM_ID_MAP	283[CC]	SERVICE_VIEW	358[CC]
ORD_SERVICE_ORDER	296[CC]	SERVICE_ZONE	361[CC]
REPORT_BED	336[CC]	SUBSCRIBER_ID_SEQ_NUM	102[CC]
REPORT_BILLED_REV	337[CC]	UNIT_CREDIT_PROFILES	366[CC]
REPORT_EQUIP_VOL	342[CC]	XFER_HISTORY	105[CC]
REPORT_INVOICE	344[CC]	XFER_STATUS	371[CC]
RPU_WORK	347[CC]	<i>subtype_code</i>	
SERVICE	349[CC]	BILL_FORMAT_DISPLAY_TYPES	75[A1]
SERVICE_ADDRESS_ASSOC	101[CC]	BILL_INVOICE_DETAIL	140[CC]
SERVICE_BILLING	352[CC]	REPORT_BILLED_REV	337[CC]
SERVICE_KEY	355[CC]	REPORT_DISCOUNT	341[CC]
SERVICE_STATUS	356[CC]	REPORT_INVOICE	344[CC]
SERVICE_VIEW	358[CC]	<i>succeeded</i>	
SERVICE_ZONE	361[CC]	PROCESS_WORK	162[A2]
UNIT_CREDIT_PROFILES	366[CC]	PROCESS_WORK_STATUS	167[A2]
XFER_HISTORY	105[CC]	<i>succeeded_name</i>	
XFER_STATUS	371[CC]	PROCESS_WORK_CARDINAL_VALUES	164[A2]
<i>subscr_no_resets</i>		<i>succeeded_rate</i>	
ACCOUNT_BILLED_SERVICES	118[CC]	PROCESS_WORK	162[A2]
ADJ	120[CC]	PROCESS_WORK_STATUS	168[A2]
BILL_INVOICE_DETAIL	147[CC]	<i>sum_amount</i>	
CDR_BILLED	167[CC]	OUTCOLLECT_BATCH_DETAIL	121[A2]
CDR_DATA	169[CC]	<i>sum_rated_units</i>	
CDR_DATA_WORK	110[A1]	OUTCOLLECT_BATCH_DETAIL	121[A2]
CDR_FREE	177[CC]	<i>supervisor_name</i>	
CDR_OUTCOLLECTS	118[A1]	ADJ	121[CC]
CDR_RERATED	180[CC]	CSR_INFORMATION	173[A1]
CDR_UNBILLED	181[CC]	CSR_SUPERVISORS	174[A1]
CONTRACT_UNIT_CR	216[CC]	NRC_KEY	278[CC]
CUSTOMER_CORRIDORS	230[CC]	REFUND	331[CC]
CUSTOMER_ID_EQUIP_MAP	232[CC]	REPORT_ADJ	333[CC]
CUSTOMER_ID_EQUIP_MAP_KEY	233[CC]	<i>suppress_prenotes</i>	
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]	CLEARING_HOUSE_CONTACTS	144[A1]
EMF_JOIN	241[CC]	<i>suspend_dates</i>	
EMF_NRC_REEST_DATES	243[CC]	XFER_REASON_CODES_REF	362[A2]
EMF_RC_REEST_DATES	244[CC]		

<i>suspended_code</i>			
SUSPENDED_REASON_REF	274[A2]		
SUSPENDED_REASON_VALUES	275[A2]		
<i>switch_id</i>			
RECORD_TYPE_REF	225[A2]		
SERVICE	350[CC]		
SERVICE_VIEW	359[CC]		
<i>switchless_reseller</i>			
SERVICE_PROVIDERS_REF	262[A2]		
<i>symbol</i>			
KEY_DOMAIN_SYMBOL_REF	39[A2]		
KEY_DOMAIN_SYMBOL_VALUES	40[A2]		
<i>synched_version</i>			
USAGE_LOCAL_COUNTS	340[A2]		
T			
<i>table_alias</i>			
ACCOUNT_MOVE_TABLES	17[A1]		
<i>table_id</i>			
AMP_CONSTRAINT_TEMP	126[CC]		
<i>table_key</i>			
REPLICATION_TABLES	233[A2]		
<i>table_move_id</i>			
ACCOUNT_MOVE_TABLES	17[A1]		
<i>table_name</i>			
ACCOUNT_MOVE_TABLES	17[A1]		
ATM_CUSTOM_TABLE_DEF	49[A1]		
ATM_FIELD_DEF	50[A1]		
ATM_POPLIST_REF	51[A1]		
ATM_POPLIST_VALUES	52[A1]		
EPR_BATCH_WORK	224[A1]		
GUI_INDICATOR_REF	281[A1]		
GUI_INDICATOR_VALUES	282[A1]		
REPLICATION_TABLES	233[A2]		
SEQ_NUM	253[A2]		
TRANSLATION	312[A2]		
<i>table_order</i>			
BILL_FORMAT_TEMPLATE	77[A1]		
<i>tape_file_name</i>			
BILL_TAPES	155[CC]		
<i>target_amount</i>			
HISTORIC_CONTRIBUTION	252[CC]		
<i>target_api</i>			
BSD_QUEUE_AUTO_RETRY	76[CC]		
<i>target_attribute_id</i>			
BSD_RELATIONAL_CONSTRAINTS	80[CC]		
<i>target_domain</i>			
DISCOUNT_TARGETS	196[A1]		
<i>target_id</i>			
DISCOUNT_TARGETS	197[A1]		
<i>target_id2</i>			
DISCOUNT_TARGETS	197[A1]		
<i>target_is_xact</i>			
CORRIDOR_PLAN_GROUPS	164[A1]		
CUSTOMER_CORRIDORS	230[CC]		
<i>target_location_code</i>			
PRODUCT_JURISDICTION	177[A2]		
PRODUCT_RATE_KEY	318[CC]		
<i>target_object_id</i>			
BSD_RELATIONAL_CONSTRAINTS	80[CC]		
<i>target_restriction</i>			
CORRIDOR_PLAN_ID_REF	166[A1]		
<i>target_table</i>			
ABI_RECORD_MAP	114[CC]		
ABI_SOURCE_RECORD_TYPES	10[A1]		
<i>target_type</i>			
ABI_SOURCE_RECORD_TYPES	10[A1]		
DISCOUNT_TARGETS	196[A1]		
<i>target_value</i>			
TRANSLATION	312[A2]		
<i>task_cycle</i>			
PROCESS_SCHED	157[A2]		
<i>task_id</i>			
DEVICES	185[A1]		
ERROR_BILL	245[CC]		
<i>task_intrvl</i>			
PROCESS_SCHED	157[A2]		
<i>task_mode</i>			
BIP_ACCOUNT_TIME_STATS	52[CC]		
HISTORIC_THRESHOLDS	255[CC]		
PROCESS_SCHED	157[A2]		
RATE_DISCOUNT_OVERRIDES	325[CC]		
<i>task_name</i>			
PROCESS_SCHED	157[A2]		
PROCESS_STATUS	160[A2]		
RECORD_FIELD_MAP	222[A2]		
RECORD_TYPE_MAP	224[A2]		
RECORD_TYPE_REF	225[A2]		
RECORD_TYPE_SEQ_NUM	227[A2]		
UTL_TASK_STATUS	370[CC]		
<i>task_priority</i>			
PROCESS_SCHED	157[A2]		
<i>task_status</i>			
PROCESS_SCHED	157[A2]		
<i>tax</i>			
BILL_INVOICE_DETAIL	144[CC]		
CMF_BALANCE_TAX	195[CC]		
HISTORIC_CONTRIBUTION_TAX	253[CC]		
JNL_WRITEOFF_TAX	267[CC]		
TCU_DET_REP	363[CC]		
<i>tax_category</i>			
TAX_CODES_COMM	288[A2]		
<i>tax_class</i>			
ADJ	122[CC]		
ADJ_TRANS_DESCR	29[A1]		
JNL_WRITEOFF	266[CC]		
NRC_TRANS_DESCR	92[A2]		
PRODUCT_ELEMENTS	173[A2]		
TAX_RATES_VAT	299[A2]		
TAX_UNIV_ICB	362[CC]		

USAGE_TYPES	345[A2]	TAX_OVERRIDES	293[A2]
<i>tax_code</i>		TAX_PKG_INST_ID_REF	295[A2]
TAX_CODES_COMM	289[A2]	TAX_PKG_INST_ID_VALUES	298[A2]
<i>tax_code_id</i>		TAX_RATES_VAT	299[A2]
OUTCOLLECT_BATCH_TAX	123[A2]	TAX_THRESHOLDS	303[A2]
<i>tax_code_origin_req</i>		TAX_UNIV_ICB	362[CC]
USAGE_TYPES	345[A2]	<i>tax_pkg_instance_id</i>	
<i>tax_code_target_req</i>		TCU_DET_REP	363[CC]
USAGE_TYPES	345[A2]	<i>tax_pkg_type</i>	
<i>tax_date</i>		TAX_PKG_INST_ID_REF	295[A2]
BILL_INVOICE	135[CC]	TCU_DET_REP	363[CC]
JNL_WRITEOFF	266[CC]	<i>tax_point</i>	
<i>tax_description</i>		PAYMENT_TRANS	305[CC]
TCU_DET_REP	364[CC]	PREPAYMENT	307[CC]
<i>tax_exception</i>		<i>tax_rate</i>	
FRANCHISE_CODE_REF	258[A1]	ADJ_TAX	124[CC]
<i>tax_geocode</i>		BILL_INVOICE_DETAIL	144[CC]
ROAMING_OPERATOR_REF	238[A2]	BILL_INVOICE_TAX	152[CC]
<i>tax_identifier</i>		PAYMENT_TRANS	305[CC]
COUNTRY_CODE_REF	168[A1]	PREPAYMENT	307[CC]
<i>tax_journal_status</i>		ROAMING_TRANSFER_DETAIL	241[A2]
ADJ	123[CC]	ROAMING_TRANSFER_TAX_DETAIL	244[A2]
BILL_INVOICE	136[CC]	<i>tax_rate_active_dt</i>	
<i>tax_level</i>		CDR_DATA	170[CC]
TCU_DET_REP	363[CC]	<i>tax_rate_inactive_dt</i>	
<i>tax_location</i>		CDR_DATA	170[CC]
GEOCODE_OVERRIDES	265[A1]	<i>tax_status</i>	
<i>tax_location_nrc</i>		CMF_EXEMPT	200[CC]
NRC_TRANS_DESCR	92[A2]	TAX_STATUS_REF	301[A2]
<i>tax_location_outcollect</i>		TAX_STATUS_VALUES	302[A2]
USAGE_TYPES	346[A2]	<i>tax_threshold</i>	
<i>tax_location_rc</i>		TAX_THRESHOLD_REF	305[A2]
PRODUCT_ELEMENTS	173[A2]	<i>tax_threshold_id</i>	
<i>tax_location_usg</i>		TAX_THRESHOLD_REF	305[A2]
USAGE_TYPES	346[A2]	TAX_THRESHOLD_VALUES	306[A2]
<i>tax_on_invoice</i>		TAX_THRESHOLDS	303[A2]
ADJ_TRANS_DESCR	30[A1]	<i>tax_treatment</i>	
<i>tax_pkg_count</i>		GSM_ROAMING_AGREEMENT	279[A1]
CDR_DATA	172[CC]	ROAMING_TRANSFER_DETAIL	241[A2]
<i>tax_pkg_inst_id</i>		<i>tax_type</i>	
ADJ	122[CC]	CMF_BALANCE_TAX	195[CC]
ADJ_TAX	124[CC]	TAX_PKG_INST_ID_REF	296[A2]
BILL_INVOICE_DETAIL	145[CC]	TAX_TYPE_COMM_REF	307[A2]
BILL_INVOICE_TAX	152[CC]	TAX_TYPE_COMM_VALUES	308[A2]
CDR_DATA_TAX	175[CC]	<i>tax_type_code</i>	
CDR_DATA_WORK_TAX	115[A1]	ADJ	123[CC]
CMF_EXEMPT	200[CC]	ADJ_TAX	124[CC]
HISTORIC_CONTRIBUTION_TAX	253[CC]	BILL_INVOICE_DETAIL	149[CC]
NRC	276[CC]	BILL_INVOICE_TAX	152[CC]
NRC_VIEW	282[CC]	BMF	159[CC]
OUTCOLLECT_BATCH_TAX	123[A2]	CDR_DATA_TAX	175[CC]
PAYMENT_TRANS	306[CC]	CDR_DATA_WORK_TAX	115[A1]
PREPAYMENT	307[CC]	CMF_EXEMPT	201[CC]
TAX_ASSIGNMENTS	284[A2]	HISTORIC_CONTRIBUTION_TAX	253[CC]
TAX_ELEM_DEFAULT_LOC	291[A2]	JNL_DETAIL	259[CC]
		JNL_KEYS	24[A2]

JNL_KEYS_DEFAULT	30[A2]	BILL_INVOICE_DETAIL	148[CC]
JNL_TRANS	264[CC]	RATE_RC	206[A2]
JNL_WRITEOFF_TAX	267[CC]	<i>text</i>	
NRC	276[CC]	BSD_CONSTRAINT_MESSAGE_VALUES	70[CC]
NRC_VIEW	282[CC]	<i>third_units</i>	
PAYMENT_TRANS	306[CC]	CDR_DATA	170[CC]
PREPAYMENT	308[CC]	CDR_DATA_WORK	111[A1]
TAX_OVERRIDES	293[A2]	CDR_FREE	178[CC]
TAX_RATES_VAT	300[A2]	CDR_OUTCOLLECTS	119[A1]
TAX_THRESHOLDS	303[A2]	CIBER_INCOLLECTS	130[A1]
TCU_DET_REP	364[CC]	CIBER_INCOLLECTS_ERROR	133[A1]
<i>tax_type_code_mask</i>		<i>thresh_ref</i>	
JNL_KEYS_MASK	32[A2]	CMF	185[CC]
<i>tax_units_indicator</i>		<i>threshold</i>	
TAX_CODES_COMM	290[A2]	CMF	187[CC]
<i>tax_units_type</i>		<i>threshold_proration_factor</i>	
TAX_CODES_COMM	290[A2]	BILL_INVOICE_DISCOUNT	151[CC]
<i>tax_zero_charge</i>		CDR_BILLED	168[CC]
TAX_PKG_INST_ID_REF	297[A2]	<i>threshold_proration_ratio</i>	
<i>taxable_amount</i>		CDR_DATA_DUC	174[CC]
TCU_DET_REP	363[CC]	<i>threshold_tracking_id</i>	
<i>taxable_bus_ind</i>		HISTORIC_THRESHOLDS	255[CC]
TAX_CHARGE_ELEMENTS	285[A2]	<i>threshold_tracking_id_serv</i>	
<i>tele_msg</i>		HISTORIC_THRESHOLDS	255[CC]
SERVICE_CENTERS	256[A2]	<i>tie_code</i>	
<i>teletax_calc_ind</i>		CMF	183[CC]
TAX_CHARGE_ELEMENTS	286[A2]	<i>timezone</i>	
<i>temp_local_dir_num</i>		CDR_DATA	170[CC]
CIBER_INCOLLECTS	128[A1]	CDR_DATA_WORK	111[A1]
CIBER_INCOLLECTS_ERROR	132[A1]	CDR_FREE	178[CC]
<i>template_code</i>		CDR_OUTCOLLECTS	119[A1]
BILL_FMT_TEMPLATE_CODE_REF	71[A1]	CIBER_INCOLLECTS	128[A1]
BILL_FMT_TEMPLATE_CODE_VALUES	72[A1]	CIBER_INCOLLECTS_ERROR	132[A1]
BILL_FORMAT_TEMPLATE	77[A1]	SERVICE	351[CC]
<i>template_data</i>		SERVICE_BILLING	353[CC]
BATCH_TEMPLATE_DEF	42[CC]	SERVICE_VIEW	359[CC]
<i>template_id</i>		TIMEZONE_REF	310[A2]
BATCH_REQUEST	30[CC]	TIMEZONE_VALUES	311[A2]
BATCH_TEMPLATE_DEF	42[CC]	<i>title</i>	
<i>template_type_id</i>		CMF	187[CC]
BATCH_TEMPLATE_DEF	42[CC]	CONTACTS	212[CC]
BATCH_TEMPLATE_TYPE_REF	43[CC]	<i>to_date</i>	
BATCH_TEMPLATE_TYPE_VALUES	44[CC]	BILL_IMAGE	134[CC]
<i>term_status</i>		BILL_INVOICE	135[CC]
CIBER_INCOLLECTS	128[A1]	BILL_INVOICE_DETAIL	147[CC]
CIBER_INCOLLECTS_ERROR	132[A1]	JNL_WORK_LIST	265[CC]
<i>termination_code</i>		LBX_ERROR	49[A2]
PRODUCT_CHARGE_MAP	315[CC]	LBX_POST_DATED	55[A2]
PRODUCT_ELEMENTS	174[A2]	REPORT_ADJ	334[CC]
<i>termination_type_id_nrc</i>		REPORT_BED	336[CC]
CONTRACT_TYPES	161[A1]	REPORT_BILLED_REV	337[CC]
<i>terms_code</i>		REPORT_DISCOUNT	341[CC]
TAX_CHARGE_ELEMENTS	286[A2]	REPORT_INVOICE	344[CC]
<i>test_flag</i>		<i>to_server</i>	
BILL_INVOICE	138[CC]	REPLICATION_TABLES	233[A2]

<i>to_user</i>			
TICKLER	309[A2]		
<i>total</i>			
AGED_BALANCES	125[CC]		
REPORT_AGED_BALANCES	335[CC]		
<i>total_ach</i>			
LBX_FILE_STATUS	52[A2]		
<i>total_adj</i>			
CMF_BALANCE	191[CC]		
CMF_BALANCE_DETAIL	193[CC]		
<i>total_amount</i>			
CONTRACT_UNIT_CR	215[CC]		
ETUC_UPDATES	247[CC]		
<i>total_amt</i>			
ADJ	121[CC]		
LBX_FILE_STATUS	52[A2]		
REPORT_ADJ	333[CC]		
ROAMING_INVOICE_SUMMARY	237[A2]		
ROAMING_TRANSFER_DETAIL	241[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_amt_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_amt_foreign</i>			
ROAMING_INVOICE_SUMMARY	237[A2]		
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_amt_foreign_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_amt_home</i>			
ROAMING_INVOICE_SUMMARY	237[A2]		
ROAMING_TRANSFER_DETAIL	241[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_amt_home_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_check</i>			
LBX_FILE_STATUS	52[A2]		
<i>total_dis_check</i>			
LBX_FILE_STATUS	52[A2]		
<i>total_due</i>			
CMF_BALANCE	191[CC]		
CMF_BALANCE_DETAIL	193[CC]		
<i>total_element_amount</i>			
CUSTOMER_CONTRACT_KEY	223[CC]		
<i>total_exchange_rate</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_fixed_amt</i>			
CDR_DATA_TAX	176[CC]		
CDR_DATA_WORK_TAX	116[A1]		
<i>total_installments</i>			
NRC	276[CC]		
NRC_VIEW	282[CC]		
<i>total_MOC</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_MOC_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_MTC</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_MTC_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_paid</i>			
CMF_BALANCE	192[CC]		
CMF_BALANCE_DETAIL	194[CC]		
<i>total_periods</i>			
CUSTOMER_CONTRACT	220[CC]		
CUSTOMER_CONTRACT_VIEW	226[CC]		
<i>total_rate</i>			
CDR_DATA_TAX	176[CC]		
CDR_DATA_WORK_TAX	116[A1]		
<i>total_records</i>			
FILE_STATUS	254[A1]		
ROAMING_TRANSFER_DETAIL	242[A2]		
USAGE_FILE_PROCESS_STATE	332[A2]		
USAGE_FILE_STATUS	333[A2]		
USAGE_FILE_STATUS_HISTORY	335[A2]		
USAGE_MASTER_FILE_STATUS	368[CC]		
USAGE_PROCESS_FILE_STATUS	369[CC]		
<i>total_records_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_revenue</i>			
OUTCOLLECT_BATCH_TAX	123[A2]		
<i>total_savings_amount</i>			
CUSTOMER_CONTRACT_KEY	223[CC]		
<i>total_SSC</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_SSC_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
<i>total_tax</i>			
OUTCOLLECT_BATCH_TAX	123[A2]		
ROAMING_INVOICE_SUMMARY	237[A2]		
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_tax_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_tax_foreign</i>			
ROAMING_INVOICE_SUMMARY	237[A2]		
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_tax_foreign_error</i>			
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		
<i>total_tax_home</i>			
ROAMING_INVOICE_SUMMARY	237[A2]		
ROAMING_TRANSFER_DETAIL	242[A2]		
ROAMING_TRANSFER_TAX_DETAIL	244[A2]		

<i>total_tax_home_error</i>		BMF	157[CC]
ROAMING_TRANSFER_DETAIL	242[A2]	BMF_UNAPPLIED	164[CC]
ROAMING_TRANSFER_TAX_DETAIL	244[A2]	CMF_EXEMPT	201[CC]
<i>total_type_10</i>		CMF_INTERIM_BILLS	204[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	CONTRACT_ASSIGNMENTS_HQ	213[CC]
<i>total_type_10_error</i>		CONTRACT_UNIT_CR	215[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	CUSTOMER_CONTRACT	219[CC]
<i>total_type_11</i>		CUSTOMER_CONTRACT_KEY	223[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	CUSTOMER_CONTRACT_VIEW	225[CC]
<i>total_type_11_error</i>		CUSTOMER_CORRIDORS	229[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	DEPOSIT	238[CC]
<i>total_type_20</i>		GLOBAL_OPEN_ITEM_ID_MAP	267[A1]
ROAMING_TRANSFER_DETAIL	243[A2]	JNL_DETAIL	257[CC]
<i>total_type_20_error</i>		JNL_WRITEOFF	266[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	JNL_WRITEOFF_TAX	267[CC]
<i>total_type_30</i>		NRC	274[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	NRC_KEY	278[CC]
<i>total_type_30_error</i>		NRC_VIEW	280[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	OPEN_ITEM_ID_MAP	283[CC]
<i>total_type_50</i>		OUTCOLLECT_BATCH	120[A2]
ROAMING_TRANSFER_DETAIL	243[A2]	OUTCOLLECT_BATCH_SEQ_NUM	122[A2]
<i>total_type_50_error</i>		PAYMENT_TRANS	304[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	PREPAYMENT	307[CC]
<i>total_type_70</i>		PRODUCT	311[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	PRODUCT_CHARGE_MAP	314[CC]
<i>total_type_70_error</i>		PRODUCT_KEY	317[CC]
ROAMING_TRANSFER_DETAIL	243[A2]	PRODUCT_RATE_KEY	318[CC]
<i>total_units</i>		PRODUCT_RATE_OVERRIDE	319[CC]
CONTRACT_UNIT_CR	215[CC]	PRODUCT_VIEW	321[CC]
ETUC_UPDATES	247[CC]	REFUND	331[CC]
ROAMING_TRANSFER_DETAIL	242[A2]	REPORT_ADJ	333[CC]
<i>total_units_error</i>		REPORT_BILLED_REV	337[CC]
ROAMING_TRANSFER_DETAIL	242[A2]	REPORT_INVOICE	344[CC]
<i>total_utc_offset</i>		RPU_WORK	347[CC]
ROAMING_TRANSFER_DETAIL	242[A2]	RPU_WORK_STATUS	348[CC]
<i>total_valid</i>		SERVICE_ZONE	361[CC]
LBX_FILE_STATUS	52[A2]	<i>tracking_id_counter</i>	
<i>total_VAS</i>		ADJ	121[CC]
ROAMING_TRANSFER_DETAIL	242[A2]	ADJ_TAX	124[CC]
<i>total_VAS_error</i>		<i>tracking_id_serv</i>	
ROAMING_TRANSFER_DETAIL	242[A2]	ABI_RECORD_MAP	114[CC]
<i>total_wire</i>		ADJ	121[CC]
LBX_FILE_STATUS	52[A2]	ADJ_TAX	124[CC]
<i>track_total_amounts</i>		BILL_INVOICE_DETAIL	141[CC]
CUSTOMER_CONTRACT	220[CC]	BMF	157[CC]
CUSTOMER_CONTRACT_VIEW	226[CC]	BMF_UNAPPLIED	164[CC]
<i>tracking_date</i>		CMF_EXEMPT	201[CC]
BILL_INVOICE_DETAIL	141[CC]	CMF_INTERIM_BILLS	204[CC]
<i>tracking_dt</i>		CONTRACT_ASSIGNMENTS_HQ	213[CC]
JNL_DETAIL	257[CC]	CONTRACT_UNIT_CR	215[CC]
<i>tracking_id</i>		CUSTOMER_CONTRACT	219[CC]
ABI_RECORD_MAP	114[CC]	CUSTOMER_CONTRACT_KEY	223[CC]
ADJ	121[CC]	CUSTOMER_CONTRACT_VIEW	225[CC]
ADJ_TAX	124[CC]	CUSTOMER_CORRIDORS	229[CC]
BILL_INVOICE_DETAIL	141[CC]	DEPOSIT	238[CC]
		GLOBAL_OPEN_ITEM_ID_MAP	267[A1]

JNL_DETAIL	257[CC]		
JNL_WRITEOFF	266[CC]		
JNL_WRITEOFF_TAX	267[CC]		
NRC	274[CC]		
NRC_KEY	278[CC]		
NRC_VIEW	280[CC]		
OPEN_ITEM_ID_MAP	283[CC]		
PAYMENT_TRANS	304[CC]		
PREPAYMENT	307[CC]		
PRODUCT	311[CC]		
PRODUCT_CHARGE_MAP	314[CC]		
PRODUCT_KEY	317[CC]		
PRODUCT_RATE_KEY	318[CC]		
PRODUCT_RATE_OVERRIDE	319[CC]		
PRODUCT_VIEW	321[CC]		
REFUND	331[CC]		
REPORT_BILLED_REV	337[CC]		
REPORT_INVOICE	344[CC]		
RPU_WORK	347[CC]		
RPU_WORK_STATUS	348[CC]		
SERVICE_ZONE	361[CC]		
trans_amount			
BMF	157[CC]		
BMF_UNAPPLIED	164[CC]		
REPORT_PAY_DETAIL	346[CC]		
trans_audit_amt			
CPM_CYCLE_STATUS	217[CC]		
EFT_CYCLE_STATUS	240[CC]		
trans_date			
BILL_INVOICE_DETAIL	145[CC]		
BMF	157[CC]		
BMF_DISTRIBUTION	161[CC]		
BMF_UNAPPLIED	164[CC]		
CMF_BONUS_POINT	197[CC]		
PAYMENT_TRANS	305[CC]		
PREPAYMENT_DISTRIBUTION	310[CC]		
REFINANCE_PLAN	329[CC]		
REPORT_BILLED_REV	337[CC]		
REPORT_DISCOUNT	341[CC]		
REPORT_INVOICE	344[CC]		
REPORT_PAY_DETAIL	346[CC]		
trans_date_time			
LBX_ERROR	48[A2]		
LBX_FILE_STATUS	52[A2]		
LBX_POST_DATED	54[A2]		
trans_dt			
CDR_BILLED	168[CC]		
CDR_DATA	170[CC]		
CDR_DATA_WORK	111[A1]		
CDR_FREE	178[CC]		
CDR_OUTCOLLECTS	119[A1]		
CDR_UNBILLED	181[CC]		
CIBER_INCOLLECTS	127[A1]		
CIBER_INCOLLECTS_ERROR	131[A1]		
PREPAYMENT	307[CC]		
REPORT_BED	336[CC]		
trans_flag			
PAYMENT_PROFILE		301[CC]	
trans_group_type			
ADJ_TRANS_GROUPS		31[A1]	
trans_id			
CDR_DATA		169[CC]	
CDR_DATA_WORK		110[A1]	
CDR_FREE		177[CC]	
CDR_OUTCOLLECTS		118[A1]	
trans_sent_amt			
CPM_CYCLE_STATUS		217[CC]	
EFT_CYCLE_STATUS		240[CC]	
trans_sign			
ADJ_TRANS_DESCR		29[A1]	
BMF_TRANS_DESCR		88[A1]	
BONUS_POINT_TRANS_TYPE_REF		92[A1]	
NRC_TRANS_DESCR		91[A2]	
REPORT_ADJ		333[CC]	
REPORT_PAY_DETAIL		346[CC]	
trans_source			
BMF		157[CC]	
BMF_UNAPPLIED		164[CC]	
REPORT_PAY_DETAIL		346[CC]	
TRANS_SOURCE_REF		313[A2]	
TRANS_SOURCE_VALUES		314[A2]	
trans_status			
CMF_BONUS_POINT		197[CC]	
HISTORIC_DISCOUNT_TRANS_MAP		254[CC]	
PAYMENT_TRANS		304[CC]	
trans_submitter			
BMF		158[CC]	
BMF_UNAPPLIED		164[CC]	
trans_target_id			
ADJ_TRANS_DESCR		29[A1]	
REPORT_ADJ		333[CC]	
trans_target_type			
ADJ_TRANS_DESCR		29[A1]	
REPORT_ADJ		334[CC]	
trans_tracking_id			
HISTORIC_DISCOUNT_TRANS_MAP		254[CC]	
trans_tracking_id_serv			
HISTORIC_DISCOUNT_TRANS_MAP		254[CC]	
trans_type			
HISTORIC_DISCOUNT_TRANS_MAP		254[CC]	
PAYMENT_TRANS		303[CC]	
transact_date			
ADJ		121[CC]	
NRC		275[CC]	
NRC_VIEW		281[CC]	
REPORT_ADJ		333[CC]	
transaction_date			
CC_BALANCE		102[A1]	
transaction_id			
HISTORIC_DISCOUNT_TRANS_MAP		254[CC]	

<i>transaction_id_serv</i>			
HISTORIC_DISCOUNT_TRANS_MAP	254[CC]		
<i>transfer_from_account_no</i>			
ORD_LOGICAL_SERVICE_ORDER	290[CC]		
<i>transfer_to_account_no</i>			
ORD_LOGICAL_SERVICE_ORDER	290[CC]		
<i>transfer_tracking_id</i>			
CMF_BONUS_POINT	197[CC]		
<i>transfer_tracking_id_serv</i>			
CMF_BONUS_POINT	197[CC]		
<i>translate_field</i>			
RECORD_FIELD_DEF	221[A2]		
<i>translate_field_type</i>			
RECORD_FIELD_DEF	221[A2]		
<i>translate_table</i>			
RECORD_FIELD_DEF	221[A2]		
<i>treasury_date</i>			
REFUND	331[CC]		
<i>treatment_ind</i>			
CCARD_RESPONSE_CODE_REF	100[A1]		
EFT_RESPONSE_CODE_REF	205[A1]		
<i>trigger_level</i>			
NRC_TRANS_DESCR	91[A2]		
<i>trigger_status</i>			
NRC_TRANS_DESCR	91[A2]		
<i>trl_field</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_field_description</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_field_format</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_field_size</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_field_trim</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_hardcoded</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_position</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_table</i>			
JNL_FEED_TRAILER	18[A2]		
<i>trl_type</i>			
JNL_FEED_TRAILER	18[A2]		
<i>tui_id</i>			
TAX_UNIV_ICB	362[CC]		
<i>type_code</i>			
BILL_FORMAT_DISPLAY_TYPES	75[A1]		
BILL_INVOICE_DETAIL	139[CC]		
REPORT_BILLED_REV	337[CC]		
REPORT_DISCOUNT	341[CC]		
REPORT_INVOICE	343[CC]		
TCU_DET_REP	363[CC]		
<i>type_group_nrc</i>			
NRC_TYPE_GROUPS	94[A2]		
PRODUCT_ELEMENTS	173[A2]		
<i>type_group_usg</i>			
PRODUCT_ELEMENTS	173[A2]		
USAGE_TYPE_GROUPS	356[A2]		
<i>type_id_nrc</i>			
CC_VANITY_CODE_CHARGE_MAP	103[A1]		
COMPONENT_NRCS	156[A1]		
LATE_FEE_TYPES	47[A2]		
NRC	274[CC]		
NRC_TRANS_DESCR	91[A2]		
NRC_TYPE_GROUPS	94[A2]		
NRC_VIEW	280[CC]		
PACKAGE_NRCS	133[A2]		
RATE_LATE_FEE	198[A2]		
RATE_NRC	200[A2]		
XFER_NRC	360[A2]		
<i>type_id_rc</i>			
PRODUCT_ELEMENTS	173[A2]		
RATE_RC	206[A2]		
<i>type_id_usg</i>			
CDR_BILLED	168[CC]		
CDR_DATA	169[CC]		
CDR_DATA_WORK	110[A1]		
CDR_DUP_CHECK_FIELDS	117[A1]		
CDR_FREE	177[CC]		
CDR_OUTCOLLECTS	118[A1]		
CDR_UNBILLED	181[CC]		
CIBER_ARBOR_USAGE_TYPE_XREF	125[A1]		
CIBER_INCOLLECTS	130[A1]		
CIBER_INCOLLECTS_ERROR	133[A1]		
DISTANCE_BANDS	200[A1]		
OUTCOLLECT_BATCH_DETAIL	121[A2]		
RATE_PERIODS	201[A2]		
RATE_USAGE	209[A2]		
RATE_USAGE_OVERRIDES	215[A2]		
RE_CHARGE_MODIFIER	236[A2]		
REPORT_BED	336[CC]		
TAP_MAPPING	282[A2]		
UNIT_CR_RATE_LIMIT	321[A2]		
UNIT_CR_RATE_LIMIT_KEYS	323[A2]		
USAGE_JURISDICTION	337[A2]		
USAGE_TYPE_GROUPS	356[A2]		
USAGE_TYPES	345[A2]		
USAGE_TYPES_FEATURES	353[A2]		
USAGE_TYPES_UNITS	355[A2]		
<i>type_id_usg_in</i>			
USAGE_TYPES_SPLIT	354[A2]		
<i>type_id_usg_out</i>			
USAGE_TYPES_SPLIT	354[A2]		
<i>type_of_charge</i>			
TAX_CHARGE_ELEMENTS	286[A2]		
U			
<i>ui_format_tag</i>			
UI_CHARGE_DISPLAY_FORMAT	315[A2]		
<i>undesignated_amount</i>			
PREPAYMENT	307[CC]		

<i>unique_ext_name</i>			
EXT_CONTACTS	239[A1]		
<i>uniqueness_type</i>			
EXTERNAL_ID_TYPE_REF	234[A1]		
<i>unit_cr_distrib</i>			
UNIT_CR_DEFINITIONS	318[A2]		
<i>unit_cr_domain</i>			
UNIT_CR_DEFINITIONS	319[A2]		
<i>unit_cr_id</i>			
CDR_BILLED	168[CC]		
CONTRACT_UNIT_CR	215[CC]		
ETUC_UPDATES	247[CC]		
RATE_UNIT_CR	207[A2]		
RATE_UNIT_CR_OVERRIDES	326[CC]		
UNIT_CR_DEFINITIONS	318[A2]		
UNIT_CR_PLANS	320[A2]		
UNIT_CR_RESTRICTIONS	325[A2]		
UNIT_CREDIT_PROFILES	366[CC]		
<i>unit_cr_level</i>			
UNIT_CR_DEFINITIONS	318[A2]		
<i>unit_cr_quantum</i>			
UNIT_CR_DEFINITIONS	319[A2]		
UNIT_CREDIT_PROFILES	367[CC]		
<i>unit_cr_type</i>			
UNIT_CREDIT_PROFILES	366[CC]		
<i>unit_no</i>			
LOCAL_ADDRESS	268[CC]		
MASTER_ADDRESS	93[CC]		
<i>unit_rate</i>			
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]		
RATE_USAGE_BANDS	212[A2]		
RATE_USAGE_BANDS_OVERRIDES	213[A2]		
<i>unit_type</i>			
LOCAL_ADDRESS	268[CC]		
MASTER_ADDRESS	93[CC]		
<i>units</i>			
BILL_INVOICE_DETAIL	144[CC]		
PRODUCT_RATE_KEY	318[CC]		
REPORT_BED	336[CC]		
<i>units_credited</i>			
CDR_BILLED	168[CC]		
<i>units_currency_code</i>			
CDR_DATA	170[CC]		
CDR_DATA_WORK	111[A1]		
CDR_FREE	178[CC]		
CDR_OUTCOLLECTS	119[A1]		
<i>units_free</i>			
RATE_UNIT_CR	207[A2]		
RATE_UNIT_CR_OVERRIDES	326[CC]		
<i>units_indicator</i>			
RATE_USAGE	210[A2]		
RATE_USAGE_OVERRIDES	215[A2]		
USAGE_TYPES	348[A2]		
<i>units_lower_limit</i>			
RATE_RC	206[A2]		
<i>units_rate</i>			
RATE_RC	206[A2]		
<i>units_type</i>			
CDR_DATA_DUC	173[CC]		
PRODUCT_RATE_KEY	318[CC]		
RATE_RC	206[A2]		
UNITS_TYPE_REF	316[A2]		
UNITS_TYPE_VALUES	317[A2]		
<i>units_upper_limit</i>			
RATE_RC	206[A2]		
<i>units_value</i>			
CDR_DATA_DUC	173[CC]		
<i>unix_tz</i>			
TIMEZONE_REF	310[A2]		
<i>unrounded_amount</i>			
CDR_DATA	171[CC]		
CDR_DATA_WORK	113[A1]		
CDR_FREE	179[CC]		
CDR_OUTCOLLECTS	120[A1]		
<i>up_since_dt</i>			
SERVER_DEFINITION	98[CC]		
<i>upd_cnt</i>			
BSD_APPLICATION_REF	56[CC]		
BSD_APPLICATION_VALUES	57[CC]		
BSD_ATTR_CONSTRAINT_CONDITIONS	62[CC]		
BSD_ATTR_CONSTRAINT_TYPE_REF	63[CC]		
BSD_ATTR_CONSTRAINT_TYPE_VALUES	64[CC]		
BSD_ATTRIBUTE_CONSTRAINTS	60[CC]		
BSD_ATTRIBUTE_DEFAULTS	61[CC]		
BSD_BUSINESS_UNIT_REF	65[CC]		
BSD_BUSINESS_UNIT_VALUES	66[CC]		
BSD_CONSTRAINT_DESC_REF	67[CC]		
BSD_CONSTRAINT_DESC_VALUES	68[CC]		
BSD_CONSTRAINT_MESSAGE_REF	69[CC]		
BSD_CONSTRAINT_MESSAGE_VALUES	70[CC]		
BSD_LOCALE_LANG	71[CC]		
BSD_QUEUE	75[CC]		
BSD_QUEUE_GROUP	77[CC]		
BSD_QUEUE_PAYLOAD_OVERFLOW	78[CC]		
BSD_QUEUE_WORK	79[CC]		
BSD_REL_CONSTRAINT_CONDITIONS	84[CC]		
BSD_REL_CONSTRAINT_TYPE_REF	85[CC]		
BSD_REL_CONSTRAINT_TYPE_VALUES	86[CC]		
BSD_RELATIONAL_CONSTRAINTS	81[CC]		
BSD_RELATIONAL_DEFAULTS	83[CC]		
<i>update_alternate_address</i>			
ORD_LOGICAL_SERVICE_ORDER	291[CC]		
<i>update_billing_address</i>			
ORD_LOGICAL_SERVICE_ORDER	291[CC]		
<i>update_dt</i>			
ETUC_UPDATES	246[CC]		
<i>update_frequency</i>			
REPLICATION_TABLES	233[A2]		
<i>update_id</i>			
ETUC_UPDATES	246[CC]		

<i>update_type</i>			
ETUC_UPDATES	246[CC]	<i>use_element_id</i>	350[A2]
<i>upper_limit</i>		USAGE_TYPES	
RATE_AGGR_USAGE	184[A2]	<i>use_equip_class_code</i>	350[A2]
<i>usage_audit_table</i>		USAGE_TYPES	
PRODUCT_LINES	178[A2]	<i>use_equip_type_code</i>	350[A2]
<i>usage_audit_view</i>		USAGE_TYPES	
PRODUCT_LINES	178[A2]	<i>use_equipment_class_code</i>	323[A2]
<i>usage_bad_table</i>		UNIT_CR_RATE_LIMIT_KEYS	
PRODUCT_LINES	178[A2]	<i>use_errored</i>	163[A2]
<i>usage_data_table</i>		PROCESS_WORK_CARDINAL_REF	
PRODUCT_LINES	178[A2]	<i>use_jurisdiction</i>	323[A2]
<i>usage_desc</i>		USAGE_TYPES	349[A2]
IO_DEVICES	290[A1]	<i>use_point_class_origin</i>	323[A2]
<i>usage_file_seqnum</i>		UNIT_CR_RATE_LIMIT_KEYS	349[A2]
CDR_CHECK_SUM_1	106[A1]	USAGE_TYPES	
<i>usage_free_table</i>		<i>use_point_class_target</i>	323[A2]
PRODUCT_LINES	178[A2]	UNIT_CR_RATE_LIMIT_KEYS	349[A2]
<i>usage_items</i>		USAGE_TYPES	
JNL_DETAIL	258[CC]	<i>use_processed</i>	163[A2]
JNL_TRANS	263[CC]	PROCESS_WORK_CARDINAL_REF	
<i>usage_of_product</i>		<i>use_provider_class</i>	349[A2]
TAX_CHARGE_ELEMENTS	286[A2]	USAGE_TYPES	
<i>usage_type</i>		<i>use_queued</i>	163[A2]
DEVICES	185[A1]	PROCESS_WORK_CARDINAL_REF	
IO_DEVICES	290[A1]	<i>use_rate_class</i>	323[A2]
<i>usage_units</i>		UNIT_CR_RATE_LIMIT_KEYS	349[A2]
JNL_DETAIL	258[CC]	USAGE_TYPES	
JNL_TRANS	263[CC]	<i>use_rate_period</i>	323[A2]
<i>use_address_server</i>		UNIT_CR_RATE_LIMIT_KEYS	350[A2]
INDUSTRY_TYPE_REF	284[A1]	USAGE_TYPES	
<i>use_bill_class</i>		<i>use_raw_usage</i>	240[A1]
UNIT_CR_RATE_LIMIT_KEYS	323[A2]	EXT_CONTACTS	
USAGE_TYPES	349[A2]	<i>use_succeeded</i>	163[A2]
<i>use_by</i>		PROCESS_WORK_CARDINAL_REF	
BONUS_POINT_ID_REF	90[A1]	<i>use_zone_class</i>	352[A2]
<i>use_by_date</i>		USAGE_TYPES	
BONUS_POINT_ID_REF	90[A1]	<i>user_name</i>	173[A1]
<i>use_by_units</i>		CSR_INFORMATION	174[A1]
BONUS_POINT_ID_REF	90[A1]	CSR_SUPERVISORS	
<i>use_class_of_service_code</i>		<i>usg_amt_limit</i>	187[CC]
USAGE_TYPES	350[A2]	CMF	
<i>use_code</i>		<i>usg_class</i>	347[A2]
JNL_DETAIL	257[CC]	USAGE_TYPES	
JNL_KEYS	24[A2]	<i>usg_crt_hour</i>	158[A2]
JNL_KEYS_DEFAULT	30[A2]	PROCESS_SCHED	
JNL_TRANS	263[CC]	<i>usg_plat_id</i>	158[A2]
<i>use_component_id</i>		PROCESS_SCHED	
UNIT_CR_RATE_LIMIT_KEYS	323[A2]	<i>usg_units_limit</i>	187[CC]
USAGE_TYPES	351[A2]	CMF	
<i>use_default_rate_type</i>		<i>usg_version</i>	158[A2]
USAGE_TYPES	350[A2]	PROCESS_SCHED	
<i>use_distance_band_id</i>		<i>utility_code</i>	289[A2]
USAGE_TYPES	350[A2]	TAX_CODES_COMM	

<i>utl_name</i>			
UTL_TASK_STATUS	370[CC]		
V			
<i>validation_rules</i>			
PARAM_DEF	134[A2]		
<i>validation_rules_desc</i>			
PARAM_VALUES	135[A2]		
<i>value</i>			
GENERIC_ENUMERATION_REF	262[A1]		
GENERIC_ENUMERATION_VALUES	263[A1]		
GRS_ACTION_OPERATIONS	274[A1]		
<i>vanity_code</i>			
CC_VANITY_CODE_CHARGE_MAP	103[A1]		
<i>variable_1</i>			
ABI_TEXT	115[CC]		
<i>variable_2</i>			
ABI_TEXT	115[CC]		
<i>variable_3</i>			
ABI_TEXT	115[CC]		
<i>variable_id</i>			
ABI_TEXT	115[CC]		
<i>variable_rate</i>			
RATE_AGGR_USAGE	184[A2]		
<i>variable_rate_quantum</i>			
RATE_AGGR_USAGE	184[A2]		
<i>vas_code</i>			
TAP_MAPPING	282[A2]		
<i>version</i>			
USAGE_FILE_COUNTS	329[A2]		
USAGE_FILE_COUNTS_HISTORY	330[A2]		
USAGE_LOCAL_COUNTS	339[A2]		
<i>version_in</i>			
CIBER_OPERATOR_SID_BID	136[A1]		
GSM_ROAMING_AGREEMENT	279[A1]		
<i>version_out</i>			
CIBER_OPERATOR_SID_BID	136[A1]		
GSM_ROAMING_AGREEMENT	279[A1]		
<i>vertex_geocode</i>			
LOCAL_ADDRESS	269[CC]		
MASTER_ADDRESS	94[CC]		
<i>vh_minor_threshold</i>			
USAGE_TYPES	348[A2]		
<i>view_created_dt</i>			
CUSTOMER_CONTRACT_VIEW	225[CC]		
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]		
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]		
NRC_VIEW	280[CC]		
PRODUCT_VIEW	321[CC]		
SERVICE_VIEW	358[CC]		
<i>view_effective_dt</i>			
CUSTOMER_CONTRACT_VIEW	225[CC]		
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]		
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]		
NRC_VIEW	280[CC]		
PRODUCT_VIEW	321[CC]		
SERVICE_VIEW	358[CC]		
NRC	276[CC]		
NRC_EXT_DATA	277[CC]		
NRC_VIEW	280[CC]		
ORD_ITEM	288[CC]		
PRODUCT	313[CC]		
PRODUCT_EXT_DATA	316[CC]		
PRODUCT_VIEW	321[CC]		
SERVICE	351[CC]		
SERVICE_EXT_DATA	354[CC]		
SERVICE_VIEW	358[CC]		
<i>view_id</i>			
CUSTOMER_CONTRACT	221[CC]		
CUSTOMER_CONTRACT_EXT_DATA	222[CC]		
CUSTOMER_CONTRACT_VIEW	225[CC]		
CUSTOMER_ID_EQUIP_MAP	232[CC]		
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]		
EXTERNAL_ID_EQUIP_MAP	88[CC]		
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]		
<i>view_id2</i>			
ORD_ITEM	288[CC]		
<i>view_status</i>			
CUSTOMER_CONTRACT_VIEW	225[CC]		
CUSTOMER_ID_EQUIP_MAP_VIEW	235[CC]		
EXTERNAL_ID_EQUIP_MAP_VIEW	91[CC]		
NRC_VIEW	280[CC]		
PRODUCT_VIEW	321[CC]		
SERVICE_VIEW	358[CC]		
<i>visa_total</i>			
CC_BALANCE	102[A1]		
W			
<i>waive_installment_nrc</i>			
ORD_LOGICAL_SERVICE_ORDER	290[CC]		
<i>waive_refinance_nrc</i>			
ORD_LOGICAL_SERVICE_ORDER	290[CC]		
<i>waive_termination_obligation</i>			
ORD_LOGICAL_SERVICE_ORDER	290[CC]		
<i>waive_unbilled_nrc</i>			
ORD_LOGICAL_SERVICE_ORDER	291[CC]		
<i>waive_unmet_obligation</i>			
ORD_LOGICAL_SERVICE_ORDER	290[CC]		
<i>warm_bill_flag</i>			
BILL_INVOICE	138[CC]		
CMF_INTERIM_BILLS	204[CC]		
<i>was_acknowledged</i>			
TICKLER	309[A2]		
<i>when_applied</i>			
CONTRACT_TYPES	163[A1]		

<i>where_clause</i>			
ACCOUNT_MOVE_TABLES	17[A1]	XFER_NRC	360[A2]
RECORD_TYPE_REF	226[A2]	XFER_STATUS	371[CC]
<i>work_rate_status</i>		<i>xfer_id</i>	
PROCESS_WORK_STATUS	168[A2]	XFER_HISTORY	105[CC]
<i>work_rate_succ_id</i>		XFER_STATUS	371[CC]
PROCESS_WORK_RATE_SUCCESS_DEF	166[A2]	<i>xfer_prenote_status_delay</i>	
PROCESS_WORK_STATUS_DEF	170[A2]	EFT_CONTROL	204[A1]
<i>work_status</i>		<i>xfer_reason</i>	
PROCESS_WORK_STATUS	168[A2]	XFER_HISTORY	105[CC]
<i>work_status_def_id</i>		XFER_NRC	360[A2]
PROCESS_WORK_STATUS	168[A2]	XFER_REASON_ACTIONS	361[A2]
PROCESS_WORK_STATUS_DEF	169[A2]	XFER_REASON_CODES_REF	362[A2]
<i>work_succ_id</i>		XFER_REASON_CODES_VALUES	363[A2]
PROCESS_WORK_STATUS_DEF	169[A2]	XFER_STATUS	371[CC]
PROCESS_WORK_UNIT_SUCCESS_DEF	171[A2]	<i>xfer_sort_code</i>	
<i>workflow_est_complete_dt</i>		EFT_CONTROL	204[A1]
ORD_SERVICE_ORDER	296[CC]	<i>xfer_status</i>	
<i>workflow_id</i>		XFER_STATUS	371[CC]
ORD_ITEM	289[CC]	<i>xfer_transact_delay</i>	
ORD_ITEM_ROUTE	110[A2]	EFT_CONTROL	204[A1]
ORD_SERVICE_ORDER	296[CC]	<i>xfer_transact_limit</i>	
<i>workflow_start_dt</i>		EFT_CONTROL	204[A1]
ORD_SERVICE_ORDER	296[CC]	<i>xfer_user_id</i>	
<i>wp_job_id</i>		EFT_CONTROL	204[A1]
ORD_SERVICE_ORDER	296[CC]	<i>xml_line</i>	
<i>wp_process_id</i>		GRS_ACTION_DEFINITION	273[A1]
ORD_SERVICE_ORDER	296[CC]	Y	
ORD_SERVICE_ORDER_WORKFLOW_MAP	119[A2]	<i>year</i>	
<i>writeoff_trans_date</i>		RATE_PERIODS	202[A2]
JNL_WRITEOFF	266[CC]	Z	
<i>writeoff_type_code</i>		<i>zip</i>	
JNL_WRITEOFF	266[CC]	BILL_INVOICE	135[CC]
<i>written_off_records</i>		ZIPCODE	364[A2]
FILE_STATUS	255[A1]	<i>zone_class</i>	
X		BILL_INVOICE_DETAIL	149[CC]
<i>xfer_acnt_id</i>		CDR_DATA	172[CC]
EFT_CONTROL	204[A1]	CELL_ID_ZONE_ID_MAP	124[A1]
<i>xfer_acnt_limit</i>		RATE_USAGE	210[A2]
EFT_CONTROL	204[A1]	USAGE_JURISDICTION	338[A2]
<i>xfer_acnt_limit_cycle</i>		ZONE_CLASS_REF	365[A2]
EFT_CONTROL	204[A1]	ZONE_CLASS_VALUES	366[A2]
<i>xfer_acnt_name</i>		<i>zone_id</i>	
EFT_CONTROL	204[A1]	CELL_ID_ZONE_ID_MAP	124[A1]
<i>xfer_acnt_type</i>		SERVICE_ZONE	361[CC]
EFT_CONTROL	204[A1]	ZONE_REF	367[A2]
<i>xfer_category</i>		ZONE_VALUES	368[A2]
XFER_REASON_ACTIONS	361[A2]	<i>zone_location_source</i>	
XFER_REASON_CODES_REF	362[A2]	USAGE_TYPES_FEATURES	353[A2]
<i>xfer_date</i>		<i>zone_parent</i>	
XFER_HISTORY	105[CC]	MOBILE_ZONE_REF	68[A2]
XFER_STATUS	371[CC]		
<i>xfer_direction</i>			
XFER_HISTORY	105[CC]		