


java.rmi.activation.*

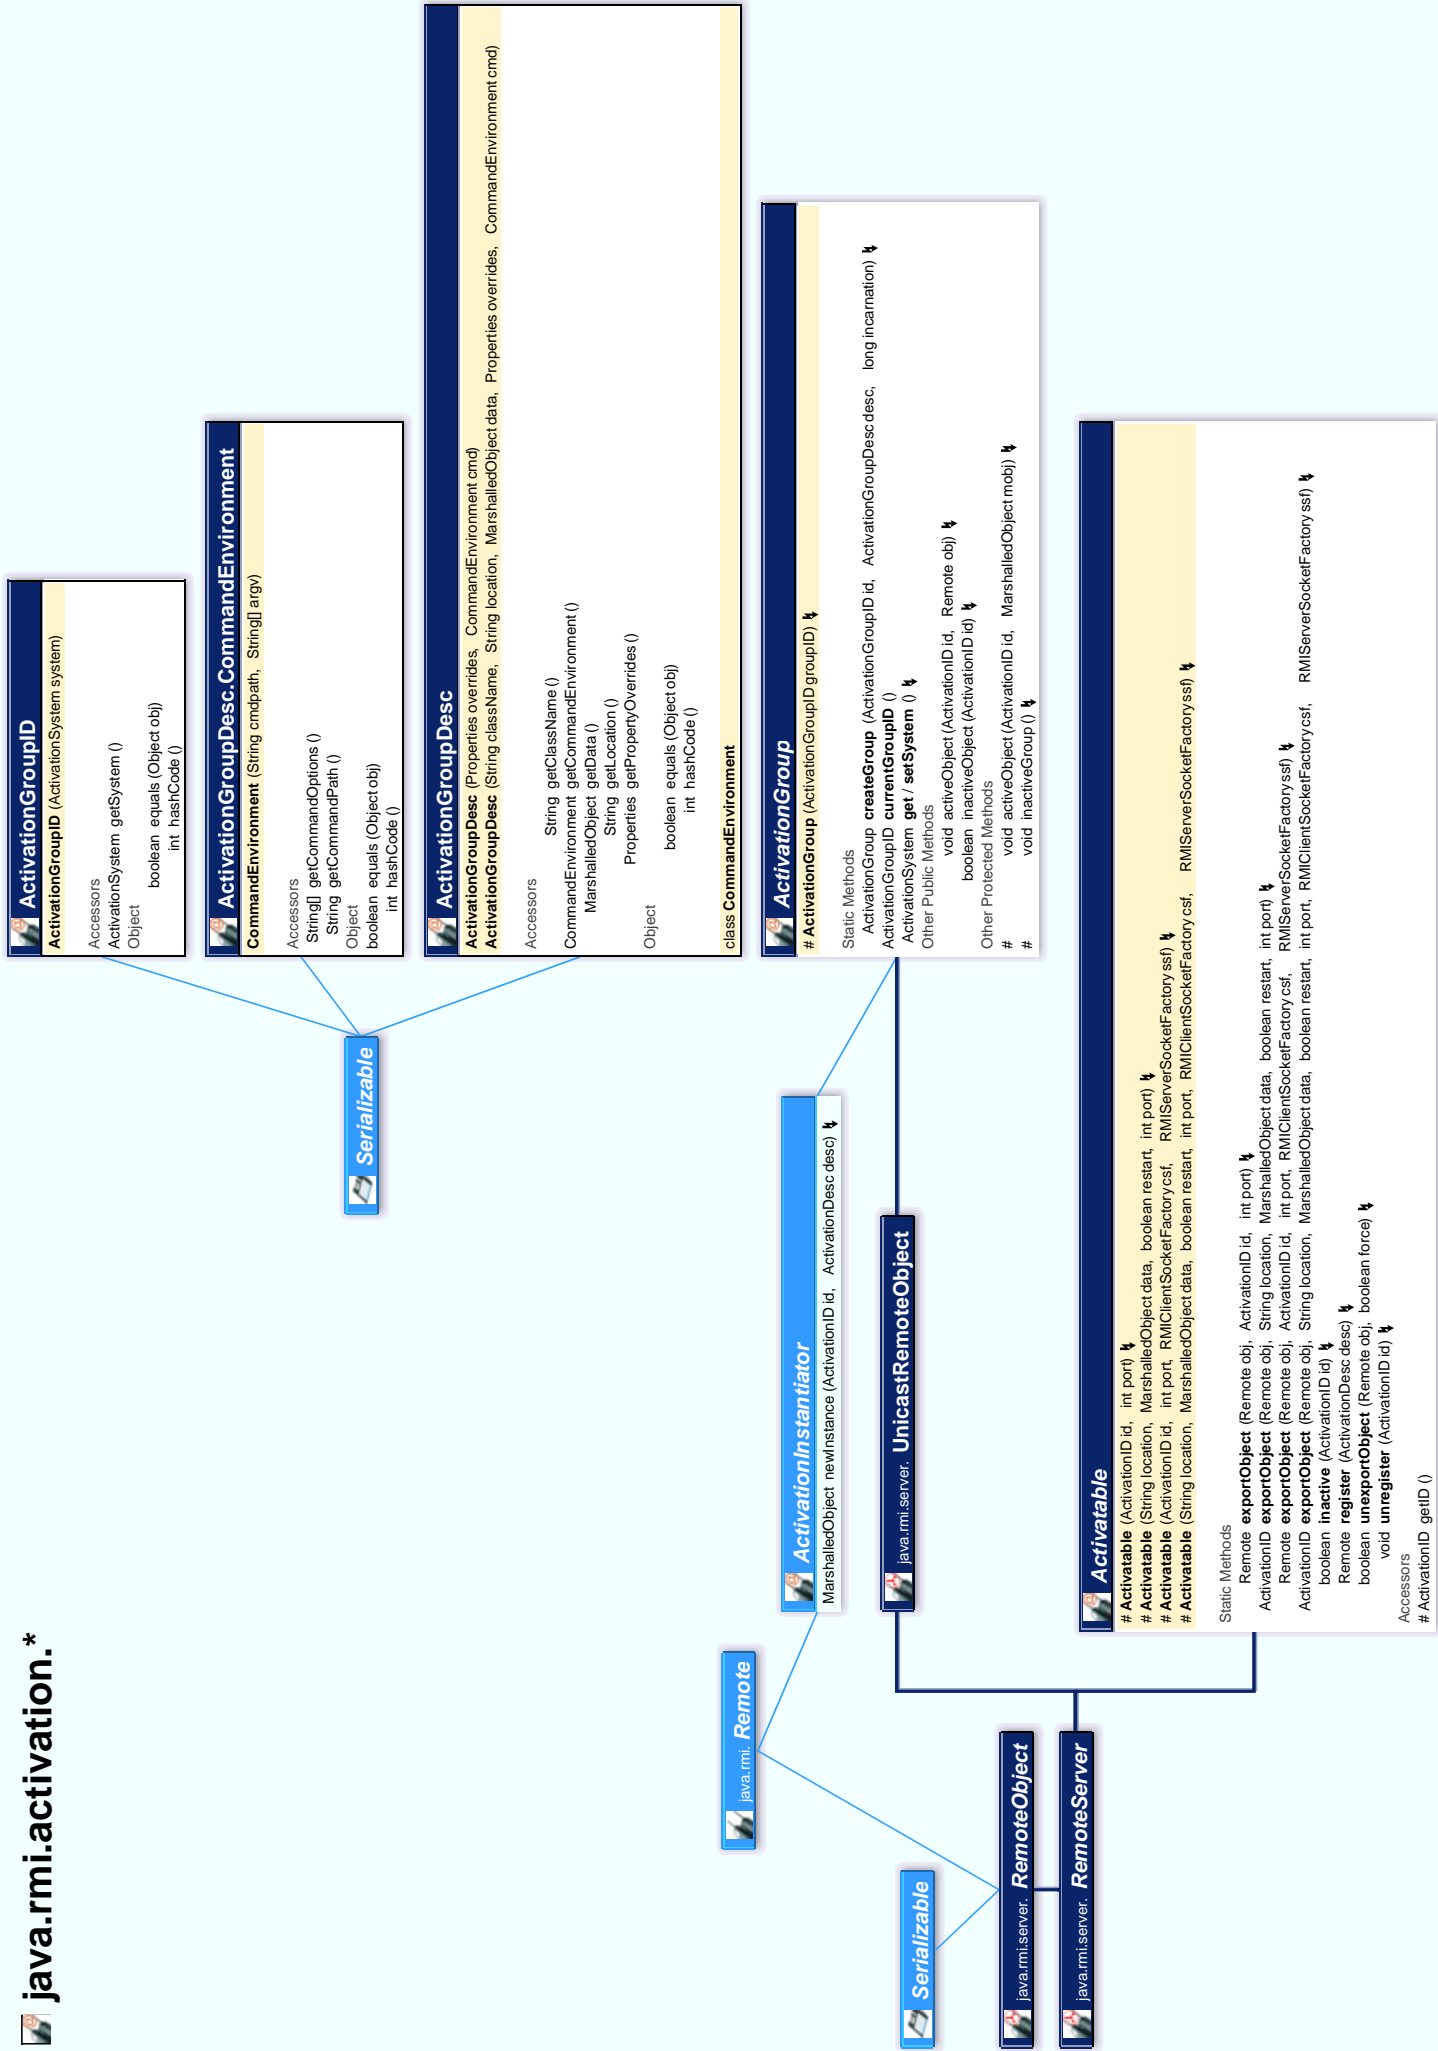

ActivationDesc

ActivationDesc (String className, String location, MarshalledObject data) ↴
ActivationDesc (String className, String location, MarshalledObject data, boolean restart) ↴
ActivationDesc (ActivationGroupID groupID, String className, String location, MarshalledObject data, boolean restart)

Accessors
String getClassName ()
MarshalledObject getData ()
ActivationGroupID getGroupID ()
String getLocation ()
boolean getRestartMode ()

Object
boolean equals (Object obj)
int hashCode ()

ActivationID

ActivationID (Activator activator)

Object
boolean equals (Object obj)
int hashCode ()

Other Public Methods
Remote activate (boolean force) ↴

MarshalledObject

MarshalledObject (Object obj) ↴

Accessors
Object get () ↴
Object
boolean equals (Object obj)
int hashCode ()

Serializable

ActivationMonitor

void activeObject (ActivationID id, MarshalledObject obj) ↴
void inactiveGroup (ActivationGroupID id, long incarnation) ↴
void inactiveObject (ActivationID id) ↴

ActivationSystem

Accessors
ActivationDesc get / setActivationDesc (ActivationID id) ↴
ActivationGroupDesc get / setActivationGroupDesc (ActivationGroupID id) ↴
ActivationDesc setActivationDesc (ActivationID id, ActivationDesc desc) ↴
ActivationGroupDesc setActivationGroupDesc (ActivationGroupID id, ActivationGroupDesc desc)

Other Public Methods
ActivationMonitor activateGroup (ActivationGroupID id, ActivationInstantiator group, long incarnation) ↴
ActivationGroupID registerGroup (ActivationGroupDesc desc) ↴
ActivationID registerObject (ActivationDesc desc) ↴
void shutdown () ↴
void unregisterGroup (ActivationGroupID id) ↴
void unregisterObject (ActivationID id) ↴

int SYSTEM_PORT

java.rmi.Remote

Activator

MarshalledObject activate (ActivationID id, boolean force) ↴