javax.accessibility.* **AccessibleSupport**

Methods declared in supertypes are hidden in subtypes

| AccessibleContext

Accessible getAccessibleChild (int i) AccessibleAction getAccessibleAction()

int getAccessibleChildrenCount() AccessibleComponent getAccessibleComponent ()

String get / setAccessibleDescription () Accessible Editable Text get Accessible Editable Text ()

int getAccessibleIndexInParent () Accessible con[] getAccessible con ()

Accessible get / setAccessibleParent () AccessibleRelationSet getAccessibleRelationSet () String get / setAccessibleName ()

Accessible Selection getAccessible Selection () AccessibleStateSet getAccessibleStateSet () Accessible Table getAccessible Table () AccessibleRole getAccessibleRole ()

Accessible Value get Accessible Value () Locale getLocale () \


AccessibleText getAccessibleText()

void firePropertyChange (String propertyName, Object oldValue, Object newValue) void add / removePropertyChangeListener (PropertyChangeListener listener)

ACCESSIBLE_TABLE_MODEL_CHANGED, ACCESSIBLE_TABLE_ROW_HEADER_CHANGED, ACCESSIBLE_TABLE_CAPTION_CHANGED, ACCESSIBLE_TABLE_SUMMARY_CHANGED, ACCESSIBLE CHILD PROPERTY, ACCESSIBLE ACTIVE DESCENDANT PROPERTY, ACCESSIBLE CARET PROPERTY, ACCESSIBLE VISIBLE DATA PROPERTY, String ACCESSIBLE_NAME_PROPERTY, ACCESSIBLE_DESCRIPTION_PROPERTY, ACCESSIBLE_SELECTION_PROPERTY, ACCESSIBLE_TEXT_PROPERTY, ACCESSIBLE_ACTION_PROPERTY, ACCESSIBLE_HYPERTEXT_OFFSET ACCESSIBLE_STATE_PROPERTY, ACCESSIBLE_VALUE_PROPERTY ACCESSIBLE_TABLE_COLUMN_DESCRIPTION_CHANGED, ACCESSIBLE_TABLE_ROW_DESCRIPTION_CHANGED, ACCESSIBLE_TABLE_COLUMN_HEADER_CHANGED,

boolean add / remove (AccessibleRelation relation) void addAll (AccessibleRelation[] relations) AccessibleRelationSet () AccessibleRelationSet (AccessibleRelation] relations) **AccessibleRelationSet** AccessibleRelation get (String key) String toString ()

boolean contains (String key) AccessibleRelation[] toArray () void clear () int size ()

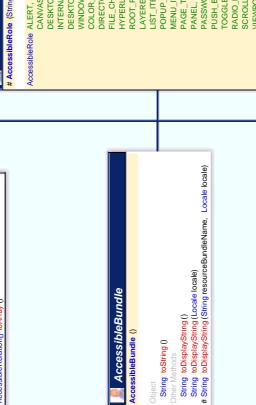


AccessibleBundle

AccessibleBundle ()

String toDisplayString()

String toString ()



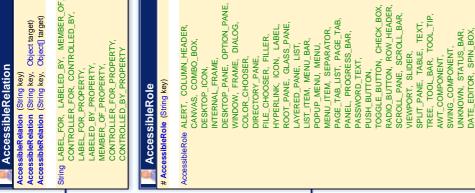

RESIZABLE, MULTISELECTABLE, SHOWING, VISIBLE, VERTICAL, BUSY, CHECKED, EDITABLE, ICONIFIED, MODAL, OPAQUE, AccessibleState ACTIVE, PRESSED, ARMED, HORIZONTAL, SINGLE_LINE, MULTI_LINE, TRANSIENT EXPANDABLE, COLLAPSED. SELECTABLE, SELECTED, FOCUSABLE, FOCUSED, EXPANDED, ENABLED, # AccessibleState (String key) **AccessibleState**

FONT CHOOSER, GROUP BOX