

Fynla Mobile (SP3 iFrame Scaffold) — Designer Brief

Audience: designers building the redesigned mobile screens / flows. **Status of code:** disposable placeholder scaffold. The Vue screens and the new HTML landing page are intentionally replaceable wholesale. Backend, routing, auth, and the mobile API surface are real and stable — design against them. **Last updated:** 2026-05-27.

1. The shape of mobile in one picture



Two things to internalise:

- The "iFrames" are real iframes.** `/m` is a Blade page whose only job is to render a same-origin `<iframe>`. The iframe is what holds the mobile surface. Everything the user sees on mobile is the contents of that iframe.
- The mobile frontend is fully isolated from the desktop SPA.** Different source root (`resources/mobile/`), different Vite build (`vite.mobile.config.js`), different output (`public/m-build/`), zero shared components. Designers can replace its HTML / CSS / Vue without touching the desktop app and vice versa.

2. Routes (server-side)

Declared in `routes/web.php`, in this order, **before** the SPA catch-all:

Method + Path	Returns	Purpose
GET <code>/m</code>	<code>resources/views/mobile-host.blade.php</code>	Outer iframe shell (phone-frame host)
GET <code>/m/landing</code>	<code>resources/views/mobile-landing.blade.php</code>	HTML landing placeholder (replace me)
GET <code>/m/app/{any?}</code>	<code>resources/views/mobile-app.blade.php</code>	Mobile Vue SPA + manifest loader

Phone-UA redirect: `App\Http\Middleware\RedirectPhoneToMobile` 302s phone visitors hitting `/` (and every other top-level HTML route) to `/m`. The escape hatch is `?full=1` which sets the `m_full_site` cookie for a year. Tablets and desktop are untouched.

Frame headers: `App\Http\Middleware\SecurityHeaders` sets `X-Frame-Options: SAMEORIGIN + frame-ancestors 'self' only` on `/m`, `/m/landing`, `/m/app`, `/m/app/`, `/m/app/*`. Every other route stays `DENY`. If you add a new framed route, update the `$isMobileFramed` check.

3. File map — what to touch, what to leave alone

fynla/		
├ resources/		
│ └ views/		
│ │ └ mobile-host.blade.php	← outer iframe shell (rarely touched)	
│ │ └ mobile-landing.blade.php	← REPLACE WHOLESALE with new HTML	
│ └ mobile-app.blade.php	← Vue SPA boot (rarely touched)	
└ mobile/	← isolated mobile frontend	
├ main.js	← SPA entry	
├ App.vue	← root component	
├ router.js	← inner Vue router (5 routes)	
├ store.js	← auth/token state	
├ api.js	← apiGet / apiPost helpers	
└ style.css	← REPLACE WHOLESALE with mobile	
DS		
├ README.md	← scaffold scope + caveats	
└ views/		
├ Login.vue	← REDESIGN	
├ Verify.vue	← REDESIGN	
├ Dashboard.vue	← REDESIGN	
└ ModuleDetail.vue	← REDESIGN	
└ routes/		
└ web.php	(mobile routes lines 81–92)	



Designer-owned files:

- `resources/views/mobile-landing.blade.php` — drop the new HTML in here.
- `resources/mobile/style.css` — replace with whatever the mobile design system becomes. The current CSS is throwaway.
- `resources/mobile/views/*.vue` — markup + scoped styles. Keep the script block's API calls intact (or move equivalent calls to a composable).

Engineering-owned files (don't change without a PR conversation):

- `routes/web.php`, both middleware files, `vite.mobile.config.js`, `mobile-host.blade.php`, `mobile-app.blade.php`, `main.js`, `router.js`, `store.js`, `api.js`.

4. The HTML landing placeholder

`resources/views/mobile-landing.blade.php` is a single-file static HTML page with **no Vite dependency** (inline `<style>`, inline content). It's deliberately self-contained so designers can replace it wholesale with the finalised HTML when it's ready, without touching the build pipeline.

Today's placeholder contents:

- Fynla wordmark
- Headline: "Your financial life, in one place."
- Lede: short value-prop sentence
- Primary CTA: "Get started" → `/m/app` (boots the Vue SPA, which currently redirects to `/login`)
- Secondary link: "I already have an account" → `/m/app/login`
- Placeholder strip at the bottom

Design system values inlined (from `fynlaDesignGuide.md` v1.2.0):

Token	Value
Eggshell (bg)	<code>#F7F6F4</code>
Horizon 500	<code>#1F2A44</code>

Token	Value
Horizon 300	#4F5B75
Raspberry 500	#C84268
Raspberry 600	#A93257
Savannah 200	#E8E3D8

Fonts: `Segoe UI`, `'Inter'`, `-apple-system`, `sans-serif` (matches the rest of Fynla). Safe-area insets respected via `env(safe-area-inset-top/bottom)`.

To replace: just overwrite the file. The CTA must continue to navigate the iframe to `/m/app` (or, if you want to skip directly to login, `/m/app/login`). Anchor `hrefs` navigate the iframe contents, which is exactly the behaviour we want.

5. Mobile SPA screens (current state)

All four Vue screens live in `resources/mobile/views/`. Treat them as "behavioural spec, not visual spec" — the markup and CSS are placeholders.

5.1 `Login.vue` → route `/m/app/login`

Behaviour: 2-field form (email, password) → `POST /api/auth/login`. If the API responds `requires_verification: true`, store `challenge_token` + masked email and route to `/verify`.

5.2 `Verify.vue` → route `/m/app/verify`

Behaviour: 6-digit numeric input → `POST /api/auth/verify-code` with the challenge token. On success, store the `access_token` in `localStorage` (`m_scaffold_token`) and route to `/dashboard`. Guard: routes back to `/login` if there's no challenge token in state.

5.3 `Dashboard.vue` → route `/m/app/dashboard` (*auth required*)

Behaviour: on mount, calls `GET /api/v1/mobile/dashboard`. Renders:

- **Welcome card** — greeting + today's date + sign-out button.
- **Net worth card** — hero metric + optional `fyn_insight` string.
- **Module list** — six router-link cards for `protection`, `savings`, `investment`, `retirement`, `estate`, `goals`. Each shows a short label, status text, and a single metric.

5.4 `ModuleDetail.vue` → route `/m/app/module/:slug` (*auth required*)


Behaviour: calls `GET /api/v1/mobile/modules/{slug}`. Renders:

- **Header card** — back button + module title + subtitle.
- **Hero card** — module-specific hero metric (e.g. Protection shows total cover, Savings shows emergency-fund runway, Estate shows IHT liability).
- **Detail rows** — curated list of summary fields, formatted as currency / percent / months / count based on the key name.

- **Placeholder strip** — "Scaffold — full redesign pending" tag.

Rule #16 reminder: no icons on dashboard cards or detail views. The side-nav is the only surface where icons are functional. See [CLAUDE.md](#) Rule #16 — applies in full to the redesigned mobile screens.

6. Auth flow (real, don't change without a PR conversation)

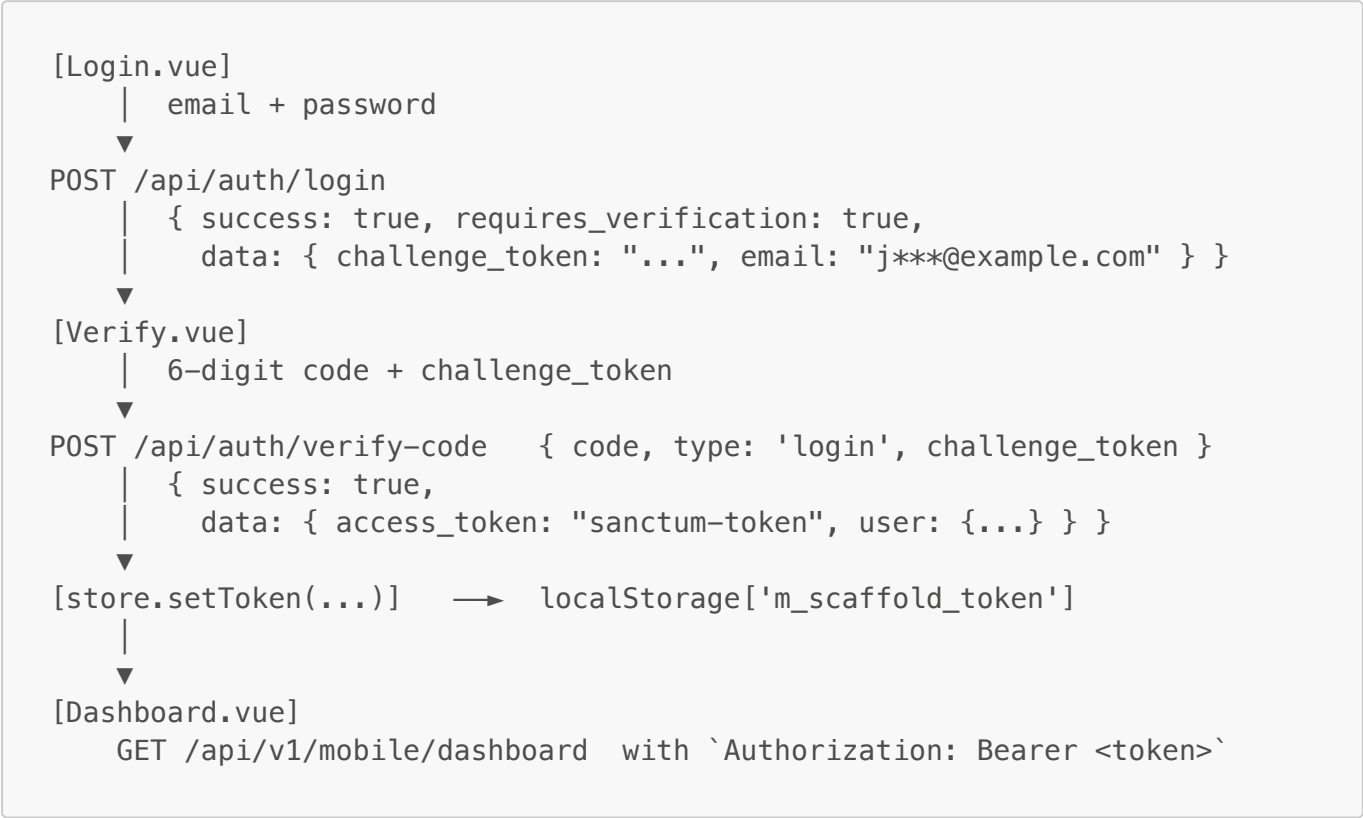

Scaffold-only risk: token sits in `localStorage` inside a same-origin iframe. Acceptable for the placeholder. **Not acceptable for production** — the redesign should move to httpOnly cookie or in-memory + refresh before shipping to live customers.

7. Mobile API surface (design against this)

All authenticated routes require `Authorization: Bearer {access_token}`. All responses follow the project envelope `{ success, message, data }`. Listed in `routes/api_v1.php`.

Method	Path	Purpose
POST	<code>/api/auth/login</code>	Email + password → MFA challenge
POST	<code>/api/auth/verify-code</code>	6-digit code → access token
GET	<code>/api/v1/mobile/dashboard</code>	Home overview (net worth + modules)
GET	<code>/api/v1/mobile/modules/{module}</code>	Per-module summary drill-down
GET	<code>/api/v1/mobile/insights/daily</code>	Fyn's daily insight string
GET	<code>/api/v1/mobile/devices</code>	List registered push devices

Method	Path	Purpose
POST	<code>/api/v1/mobile/devices</code>	Register a push device
DELETE	<code>/api/v1/mobile/devices/{deviceId}</code>	De-register a push device
GET	<code>/api/v1/mobile/notifications/preferences</code>	Read push notification preferences
PUT	<code>/api/v1/mobile/notifications/preferences</code>	Update push notification preferences
GET	<code>/api/v1/mobile/share/{type}/{id?}</code>	Shareable artefact (deeplink)

Controllers live in `app/Http/Controllers/Api/V1/Mobile/`.

7.1 GET `/api/v1/mobile/dashboard` — response shape

```
{
  "success": true,
  "data": {
    "net_worth": { "total": 482300 },
    "fyn_insight": "You're £12k ahead of your 3-month emergency-fund target.",
    "modules": {
      "protection": { "status": "ok", "total_coverage": 350000,
"critical_gaps": 0 },
      "savings": { "status": "ok", "emergency_fund_months": 4.2,
"emergency_fund_status": "on_track" },
      "investment": { "status": "ok", "portfolio_value": 142500 },
      "retirement": { "status": "ok", "income_gap": 4200 },
      "estate": { "status": "ok", "iht_liability": 28500 },
      "goals": { "status": "ok", "total_goals": 5, "completed_goals":
2 }
    }
  }
}
```

A module can return `"status": "unavailable"` if the user has no data for it (e.g. estate module before they've added any assets). The UI must handle that gracefully — see `Dashboard.vue:60` for the current "Not available" fallback.

7.2 GET `/api/v1/mobile/modules/{module}` — response shape

`{module} ∈ { protection, savings, investment, retirement, estate, goals }`.

```
{
  "success": true,
  "data": {
    "summary": {
      // per-module fields — see Dashboard.vue MODULE_META +
      ModuleDetail.vue MODULE_CONFIG
    }
  }
}
```

```
    "total_coverage": 350000,  
    "total_life_cover": 250000,  
    "total_critical_illness_cover": 100000,  
    "total_income_protection": 0,  
    "policy_count": 3,  
    "critical_gaps": 0,  
    "status": "ok"  
  }  
}  
}
```

The exact field set varies per module. The current `ModuleDetail.vue` documents the curated field list for each module in its `MODULE_CONFIG` constant — that's the authoritative list of what the API surfaces today.

Rate limiting: `etag + throttle:mobile-dashboards` middleware on both dashboard endpoints. Responses are ETag-cached, so a 304 is normal on repeated polls.

8. Build, dev, and how to preview your work

8.1 Local

```
# from repo root  
./dev.sh                # Laravel + main desktop Vite — keep running  
npm run build:mobile    # Builds public/m-build/ once
```

Then visit **`http://localhost:8000/m`** in a mobile-shaped browser viewport (Chrome DevTools → Toggle device toolbar → iPhone 14 Pro is a good default).

The mobile build is **not** served by the dev Vite server — it's read from `public/m-build/manifest.json` directly by `mobile-app.blade.php`. So after any change to `resources/mobile/*` or `resources/views/mobile-*.blade.php`, you re-run `npm run build:mobile` (a couple of seconds).

8.2 Static landing-only previews

If you're only iterating on `mobile-landing.blade.php`, you don't need to rebuild the SPA — just refresh `/m` in the browser.

8.3 Per-env builds

Engineering ships these via `./deploy/fynla-org/build.sh` (prod) and `./deploy/csJones-fynla/build.sh` (dev / staging). They set `VITE_MOBILE_BASE_PATH` and `VITE_API_BASE_URL` correctly for each environment. Designers don't need to run these.

8.4 Capacitor iOS

`./deploy/mobile/build-ios.sh` builds + `npx cap sync ios`. The iOS app loads `/m` directly via its `webDir`. Hard rules carried over verbatim from the root `CLAUDE.md` (already enforced in `vite.mobile.config.js`):

- **No external** for image/asset paths in `rollupOptions` (WKWebView MIME).
- `transformAssetUrls: false` in the `vue()` plugin.
- No PWA / service worker in this build.

9. What's wired vs what's deferred

Capability	Status
Phone-UA redirect to <code>/m</code>	Wired (production)
Iframe shell @ <code>/m</code>	Wired
HTML landing placeholder @ <code>/m/landing</code>	Wired (this brief adds it)
Login + MFA verify against real backend	Wired
Dashboard reading <code>/api/v1/mobile/dashboard</code>	Wired
Module drill-down reading <code>/api/v1/mobile/modules/{slug}</code>	Wired
Mobile design system / component library	Deferred — design output
Redesigned screens	Deferred — design output
Native Capacitor auth (cookie / biometric)	Deferred — post-redesign work
Deep-link / browser-back <code>postMessage</code> bridging	Deferred — post-redesign work
Feature parity with retired <code>resources/js/mobile/</code>	Deferred — post-redesign work
Production-grade token storage (not <code>localStorage</code>)	Deferred — must land before live customers

10. Design rules that bind the mobile redesign

These come from the root `CLAUDE.md` and `fynlaDesignGuide.md` v1.2.0.

1. **Design system v1.2.0 is the only source of truth.** Use `raspberry-*`, `horizon-*`, `spring-*`, `violet-*`, `savannah-*`, `eggshell-*`. No amber, no orange, no hex outside the palette.
2. **Icons are functional only (Rule #16).** Side-nav icons are allowed because they identify nav items when collapsed. **Dashboard cards, module cards, detail views, Fyn chat — all banned.** No emoji, no Unicode glyphs, no icon fonts on these surfaces. Rule is forward-only: don't strip existing violations during a redesign, but new work must comply strictly.
3. **No scores in user-facing UI (Rule #13).** No "75/100", no portfolio health score. Use descriptive text and specific metrics.
4. **No acronyms in user-facing text (Rule #10).** Spell out "Annual Allowance", "Stocks & Shares", "Defined Benefit". Only ISA may remain abbreviated.

5. **British spelling in user-facing copy** (Optimisation, Customise). American spelling in code identifiers (`optimize`, `center`).
 6. **Currency:** `Intl.NumberFormat('en-GB', { style: 'currency', currency: 'GBP', maximumFractionDigits: 0 })`. Used in both `Dashboard.vue` and `ModuleDetail.vue`.
-

11. Where this brief lives

- **Repo:** `docs/mobile/designer-brief.md` (this file)
- **Vault:** `fynlaBrain/Design/MobileScaffold-DesignerBrief.md` (mirror, Obsidian-friendly with wikilinks)

When the redesign lands, update both. The Obsidian copy is the discovery surface for designers using the vault; the repo copy is the source of truth for engineering.

12. Useful links

- `resources/mobile/README.md` — scaffold scope, auth caveats, deferred items
- `fynlaBrain/Design/fynlaDesignGuide.md` — design system v1.2.0
- `CLAUDE.md` Rule #11 (design system), Rule #13 (no scores), Rule #16 (icons)
- Commits worth reading for context:
 - `3783043 docs(sp3): mobile-first iframe scaffold design spec`
 - `f9626d5 docs(sp3): mobile-first iframe scaffold implementation plan`
 - `8fbe67f feat(sp3): scaffold Login/Verify/Dashboard screens`
 - `5f4464d feat(sp3): wire mobile build into both env deploy scripts`
 - `738715c feat(mobile): real placeholder dashboard + wired module drill-downs`