
FLAT PATTERN - viewed from bend-note face (UP = toward viewer) scale 1:5

red dash-dot = BEND UP blue dash-dot = BEND DOWN green = ETCH/mark datum A = bottom-left corner of flat

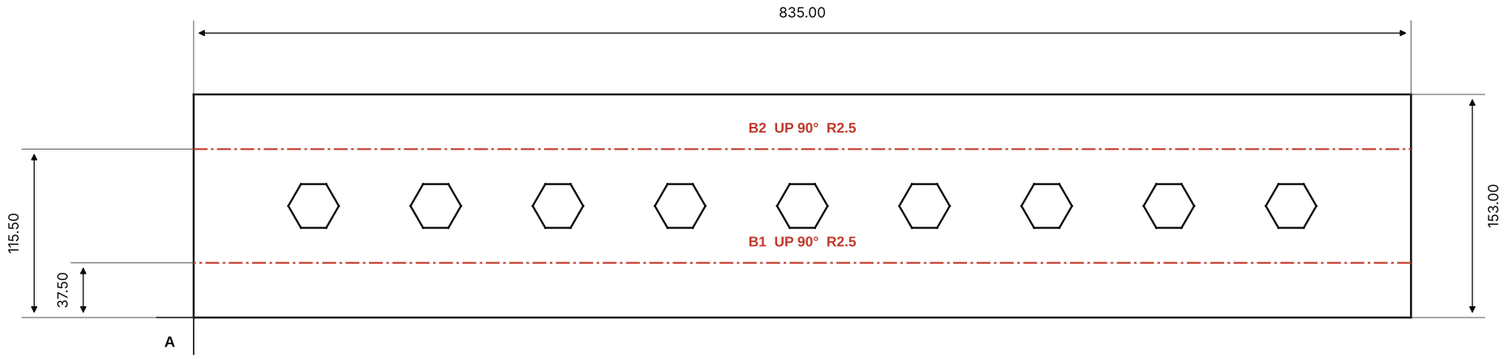

BEND TABLE

No	Dir	Angle	R in	From A	BA	BD	V-die
B1	UP	90°	2.5	37.50 (Y)	6.09	4.91	24
B2	UP	90°	2.5	115.50 (Y)	6.09	4.91	24


BA = bend allowance, BD = bend deduction (mm), K = 0.46, inside radius as listed. V-die = 8T opening (mm).
"From A" = bend-line centre from datum edge. 304: ~1.5x mild-steel tonnage, 2-3 deg extra springback.
WARNING: B1, B2 inside R < 1T - cracking risk in 304; use R >= 3 tooling or prove on first-off.

FORMED SECTION (neutral axis, to scale)



Flats from A: 37.5 / 78.0 / 37.5 mm

FORMED VIEW (reference, not to scale)

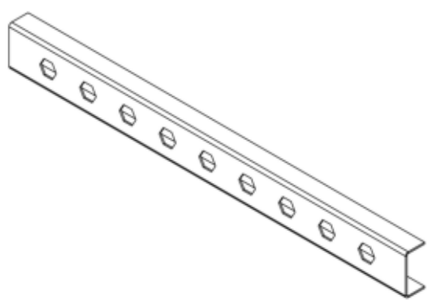

NOTES: (1) 9 x hex apertures (20 mm A/F) on the web - decorative/vent. Equal 37.5 mm legs.

VELD ARMOUR

BUILT FOR THE VELD

CNC / PRESS-BRAKE DATA PACK

PART NO.
VA-BB-13

TITLE
Centre panel P3 (lower channel) - FLAT PATTERN

MATERIAL **304 SS 2B**	THICKNESS **3 mm**	QTY / ASSY **1**
FLAT SIZE 835.0 x 153.0	NET MASS 2.87 kg	K-FACTOR 0.46 (air bend, 304)
BENDS 2	SOURCE ITEM #13	DXF VA-BB-13_Centre_panel_P3_3mm.dxf
TOL. LINEAR +/- 0.5 mm	TOL. ANGULAR +/- 1 deg	FINISH Deburr; brush; passivate

Veld Armour (Pty) Ltd - proprietary; not for distribution without written consent