


INFOE 3: LAB 1 – Data Masking

Joy Melisa S. Segotier

BS INFO 3C

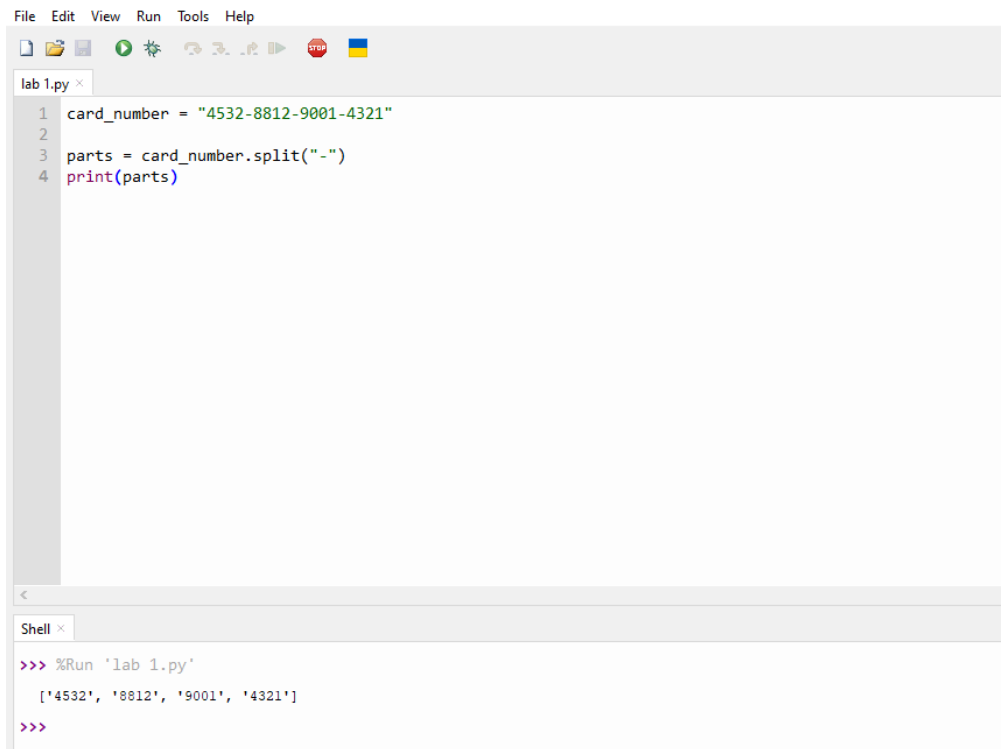

```
File Edit View Run Tools Help
lab 1.py x
1 card_number = "4532-8812-9001-4321"
2
3 parts = card_number.split("-")
4 print(parts)

Shell x
>>> %Run 'lab 1.py'
['4532', '8812', '9001', '4321']
>>>
```


It shows the successful application of the `.split('-')` method, which breaks the string into a list of four separate segments. The terminal output confirms that the data is isolated into individual strings within a list structure



```
File Edit View Run Tools Help
lab 1.py x
1 card_number = "4532-8812-9001-4321"
2
3 parts = card_number.split("-")
4
5 for i in range(len(parts) - 1):
6     parts[i] = "X" * len(parts[i])
7
8 masked = "-".join(parts)
9
10 print(masked)
11

Shell x
>>> %Run 'lab 1.py'
XXXX-XXXX-XXXX-4321
>>>
```

This shows a for loop iterating through the list to replace early segments with "X" based on their length. The `"-".join()` method then re-assembles these parts while preserving the hyphens. The final output confirms the successful mask: "XXXX-XXXX-XXXX-4321".

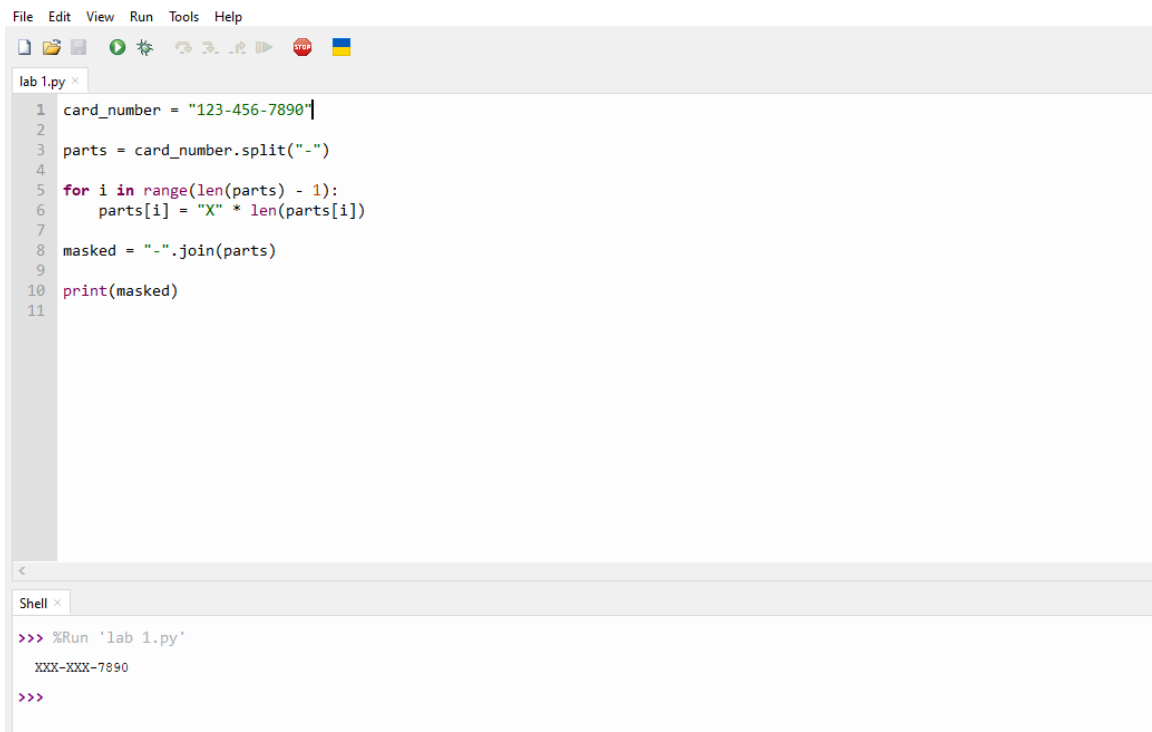

```
File Edit View Run Tools Help
lab 1.py x
1 card_number = "123-456-7890"
2
3 parts = card_number.split("-")
4
5 for i in range(len(parts) - 1):
6     parts[i] = "X" * len(parts[i])
7
8 masked = "-".join(parts)
9
10 print(masked)
11

Shell x
>>> %Run 'lab 1.py'
XXX-XXX-7890
>>>
```

This screenshot captures the validation test using a phone number to prove the script's versatility. The output "XXX-XXX-7890" demonstrates that the function dynamically adapts to different string lengths while maintaining the "Last-Four" masking rule.