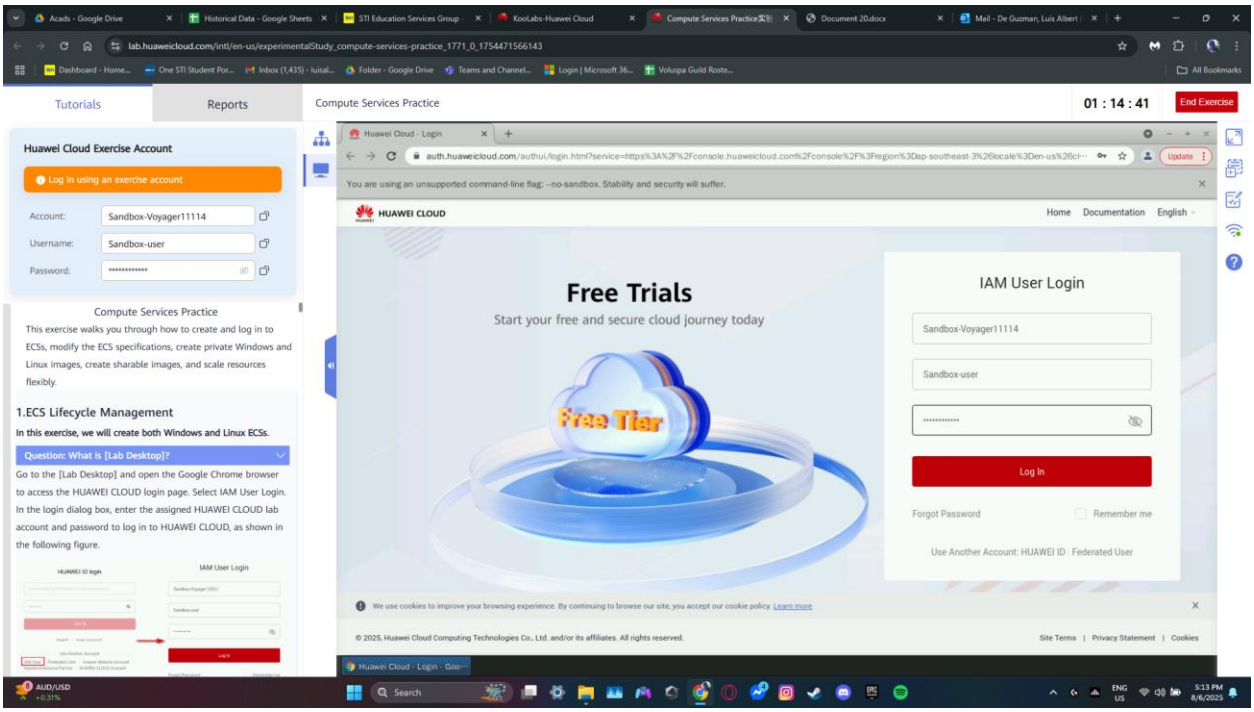
Tutorials
Reports
Compute Services Practice
01 : 14 : 41
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
Compute Services Practice
This exercise walks you through how to create and log in to ECSs, modify the ECS specifications, create private Windows and Linux images, create sharable images, and scale resources flexibly.
1.ECS Lifecycle Management
In this exercise, we will create both Windows and Linux ECSs.
Question: What is [Lab Desktop]?
Go to the [Lab Desktop] and open the Google Chrome browser to access the HUAWEI CLOUD login page. Select IAM User Login. In the login dialog box, enter the assigned HUAWEI CLOUD lab account and password to log in to HUAWEI CLOUD, as shown in the following figure.
HUAWEI CLOUD
Free Trials
Start your free and secure cloud journey today
Free Tier
IAM User Login
Sandbox-Voyager11114
Sandbox-user
Log In
Forgot Password
Remember me
Use Another Account: HUAWEI ID | Federated User

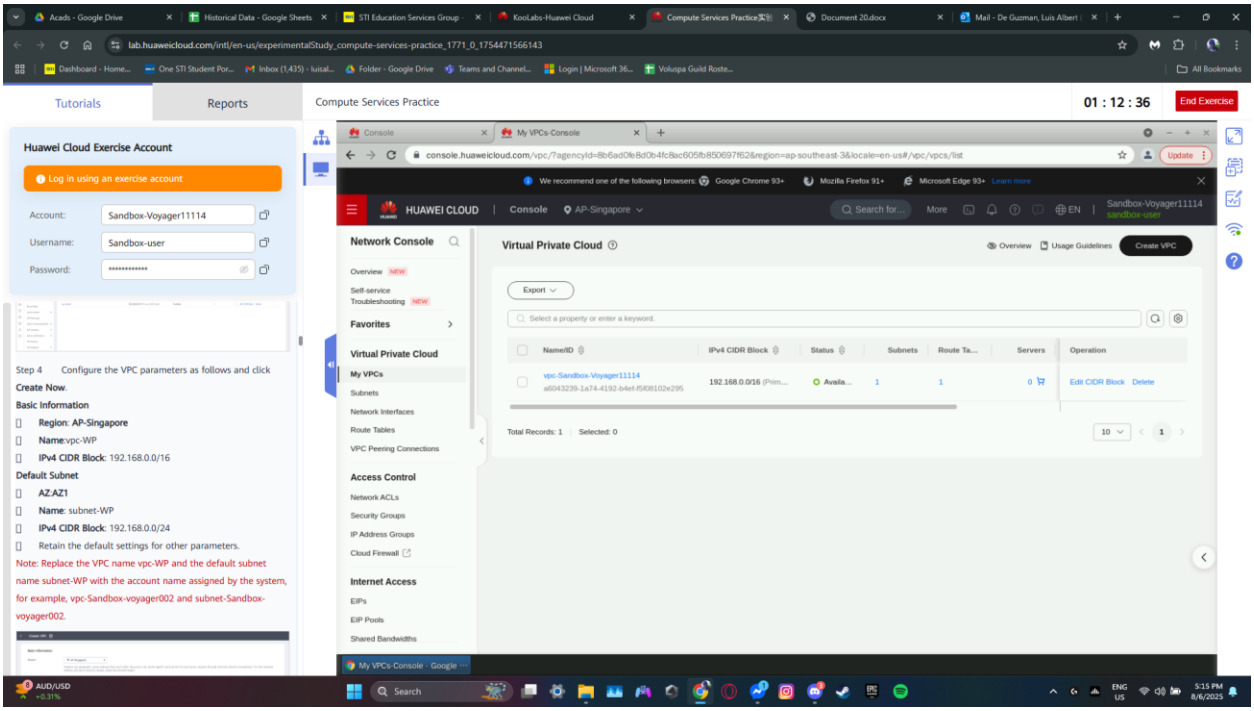
Tutorials
Reports
Compute Services Practice
01 : 12 : 36
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
Step 4 Configure the VPC parameters as follows and click Create Now.
Basic Information
Region: AP-Singapore
Name:vpc-WP
IPv4 CIDR Block: 192.168.0.0/16
Default Subnet
AZ:AZ1
Name: subnet-WP
IPv4 CIDR Block: 192.168.0.0/24
Retain the default settings for other parameters.
Note: Replace the VPC name vpc-WP and the default subnet name subnet-WP with the account name assigned by the system, for example, vpc-Sandbox-voyager002 and subnet-Sandbox-voyager002.
HUAWEI CLOUD
Console
AP-Singapore
Network Console
Virtual Private Cloud
Create VPC
Export
Name/ID
IPv4 CIDR Block
Status
Subnets
Route Ta...
Servers
Operation
vpc-Sandbox-Voyager11114
192.168.0.0/16
Edit CIDR Block
Delete
Total Records: 1
Selected: 0
My VPCs
Subnets
Network Interfaces
Route Tables
VPC Peering Connections
Access Control
Network ACLs
Security Groups
IP Address Groups
Cloud Firewall
Internet Access
EIPs
EIP Pools
Shared Bandwidths

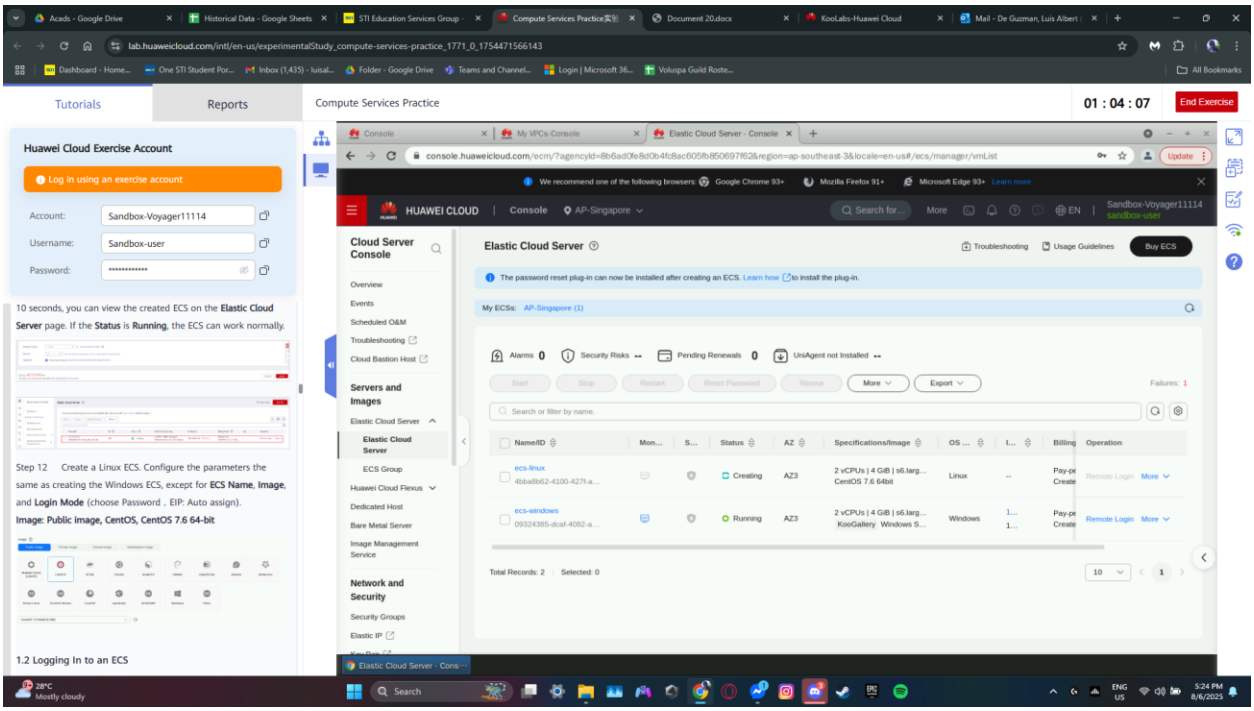
Tutorials
Reports
Compute Services Practice
01 : 04 : 07
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
10 seconds, you can view the created ECS on the Elastic Cloud Server page. If the Status is Running, the ECS can work normally.
Step 12 Create a Linux ECS. Configure the parameters the same as creating the Windows ECS, except for ECS Name, Image, and Login Mode (choose Password . EIP: Auto assign).
Image: Public image, CentOS, CentOS 7.6 64-bit
1.2 Logging In to an ECS
HUAWEI CLOUD
Elastic Cloud Server
Buy ECS

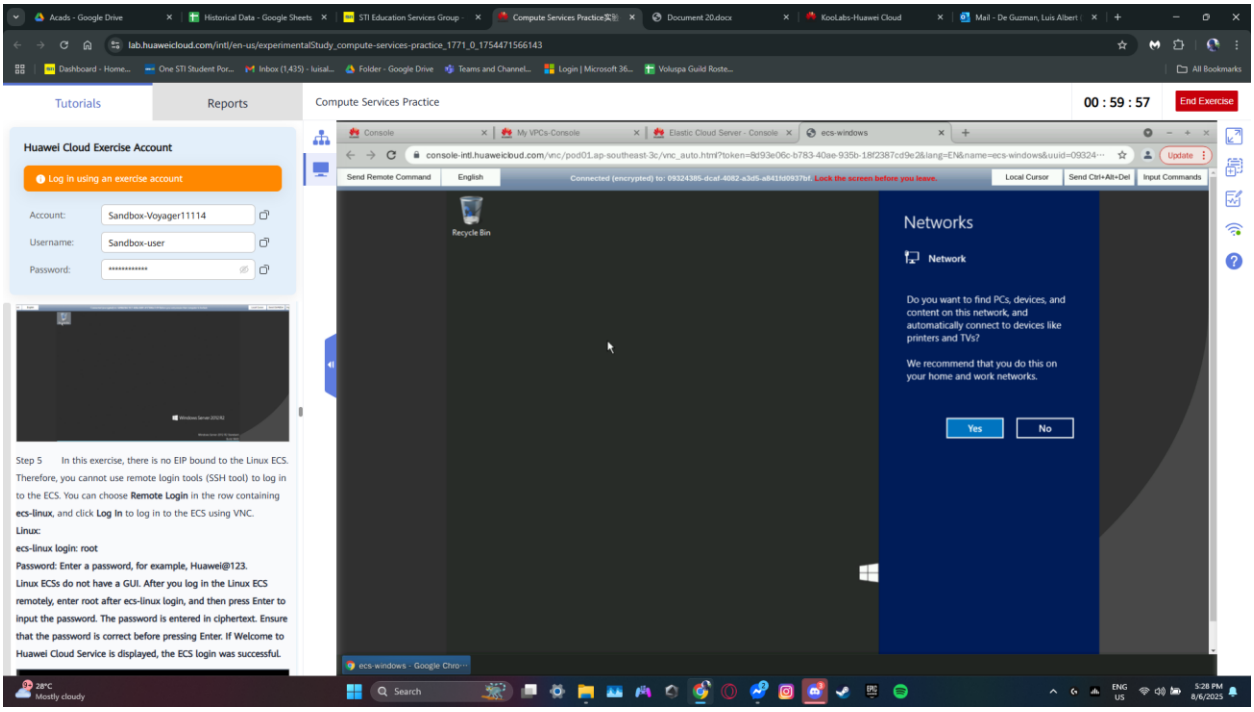
Tutorials
Reports
Compute Services Practice
00 : 59 : 57
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
Step 5 In this exercise, there is no EIP bound to the Linux ECS. Therefore, you cannot use remote login tools (SSH tool) to log in to the ECS. You can choose Remote Login in the row containing ecs-linux, and click Log In to log in to the ECS using VNC.
Linux:
ecs-linux login: root
Password: Enter a password, for example, Huawei@123.
Linux ECSs do not have a GUI. After you log in the Linux ECS remotely, enter root after ecs-linux login, and then press Enter to input the password. The password is entered in ciphertext. Ensure that the password is correct before pressing Enter. If Welcome to Huawei Cloud Service is displayed, the ECS login was successful.
Networks
Network
Do you want to find PCs, devices, and content on this network, and automatically connect to devices like printers and TVs?
We recommend that you do this on your home and work networks.
Yes
No

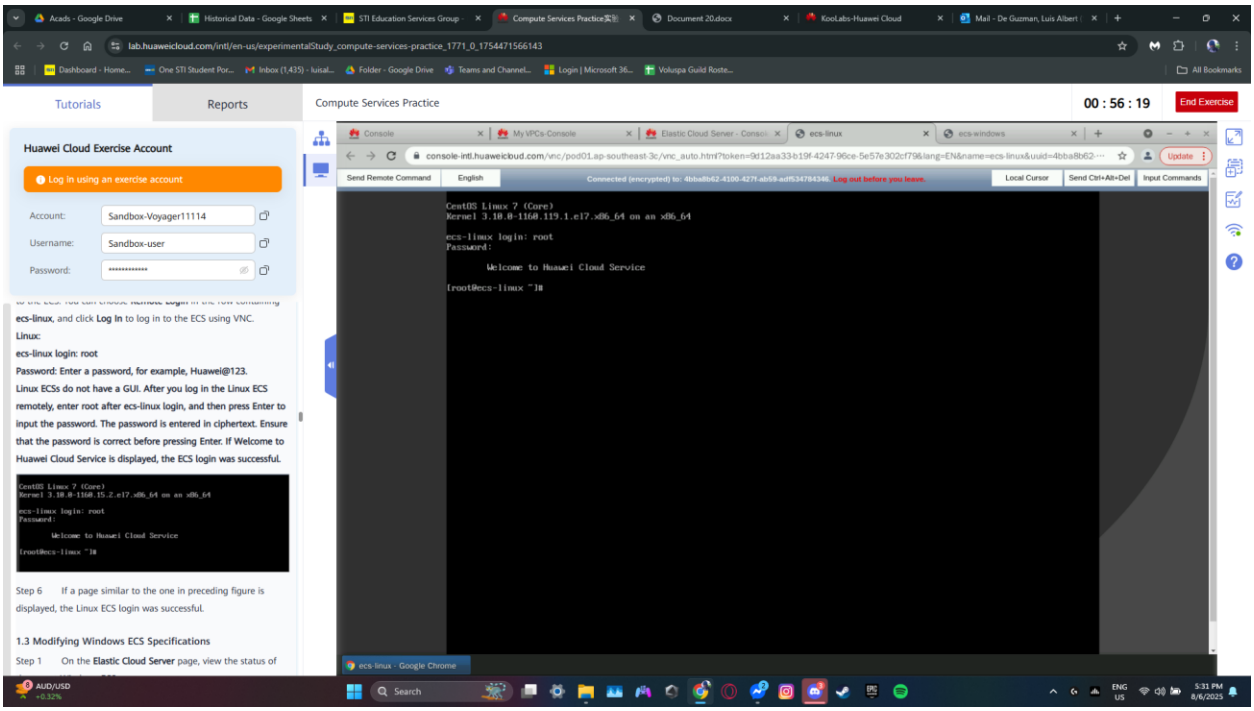
Tutorials
Reports
Compute Services Practice
00 : 56 : 19
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password: ••••••••••••
ecs-linux, and click Log In to log in to the ECS using VNC.
Linux:
ecs-linux login: root
Password: Enter a password, for example, Huawei@123.
Linux ECSs do not have a GUI. After you log in the Linux ECS remotely, enter root after ecs-linux login, and then press Enter to input the password. The password is entered in ciphertext. Ensure that the password is correct before pressing Enter. If Welcome to Huawei Cloud Service is displayed, the ECS login was successful.
Step 6 If a page similar to the one in preceding figure is displayed, the Linux ECS login was successful.
1.3 Modifying Windows ECS Specifications
Step 1 On the Elastic Cloud Server page, view the status of
CentOS Linux 7 (Core)
Kernel 3.10.0-1160.119.1.el7.x86_64 on an x86_64
ecs-linux login: root
Password:
Welcome to Huawei Cloud Service
[root@ecs-linux ~]#

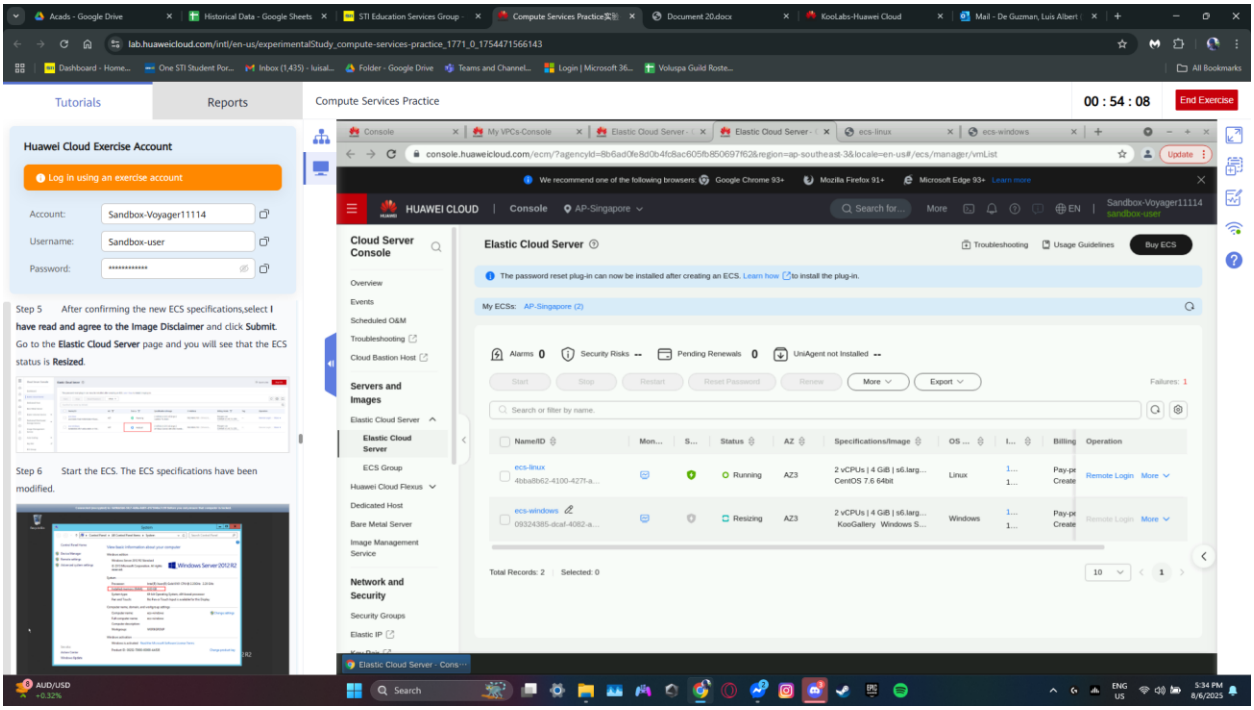
Tutorials
Reports
Compute Services Practice
00 : 54 : 08
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password: ••••••••••••
Step 5 After confirming the new ECS specifications,select I have read and agree to the Image Disclaimer and click Submit. Go to the Elastic Cloud Server page and you will see that the ECS status is Resized.
Step 6 Start the ECS. The ECS specifications have been modified.
HUAWEI CLOUD
Elastic Cloud Server
Buy ECS
Cloud Server Console
Servers and Images
Network and Security
ecs-linux
ecs-windows
Running
Resizing

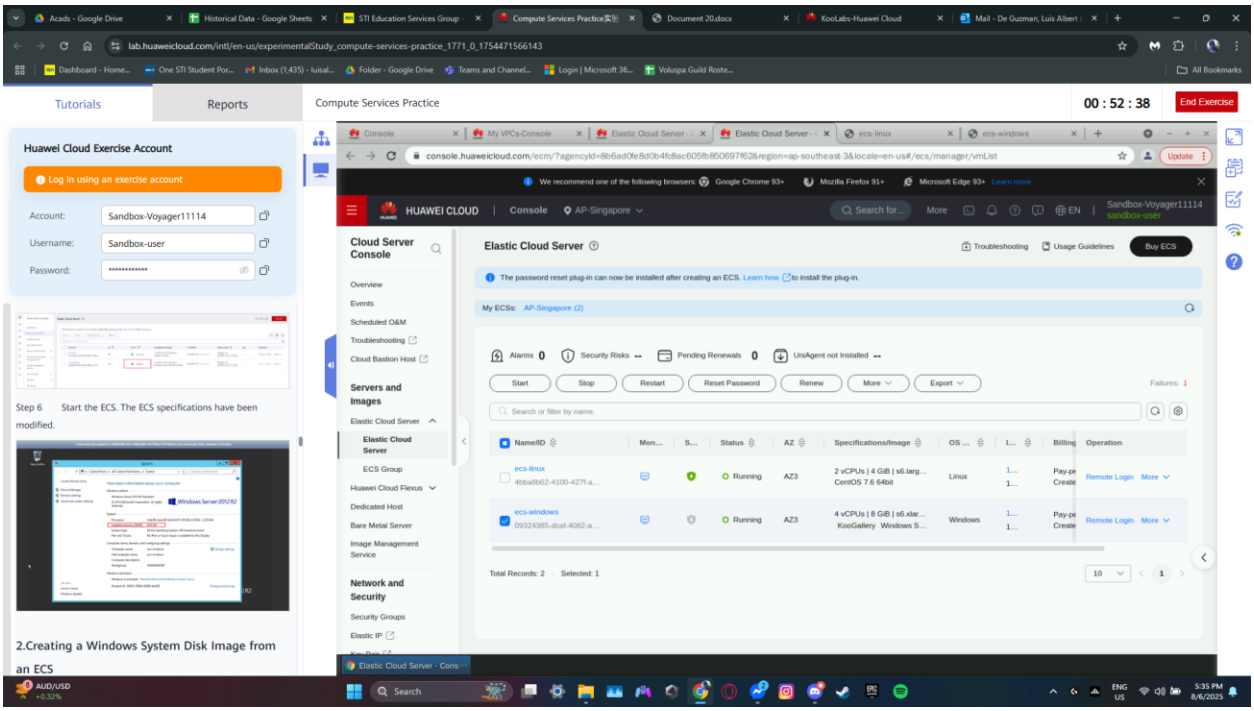
Tutorials
Reports
Compute Services Practice
00 : 52 : 38
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
Step 6 Start the ECS. The ECS specifications have been modified.
2.Creating a Windows System Disk Image from an ECS
HUAWEI CLOUD
Elastic Cloud Server

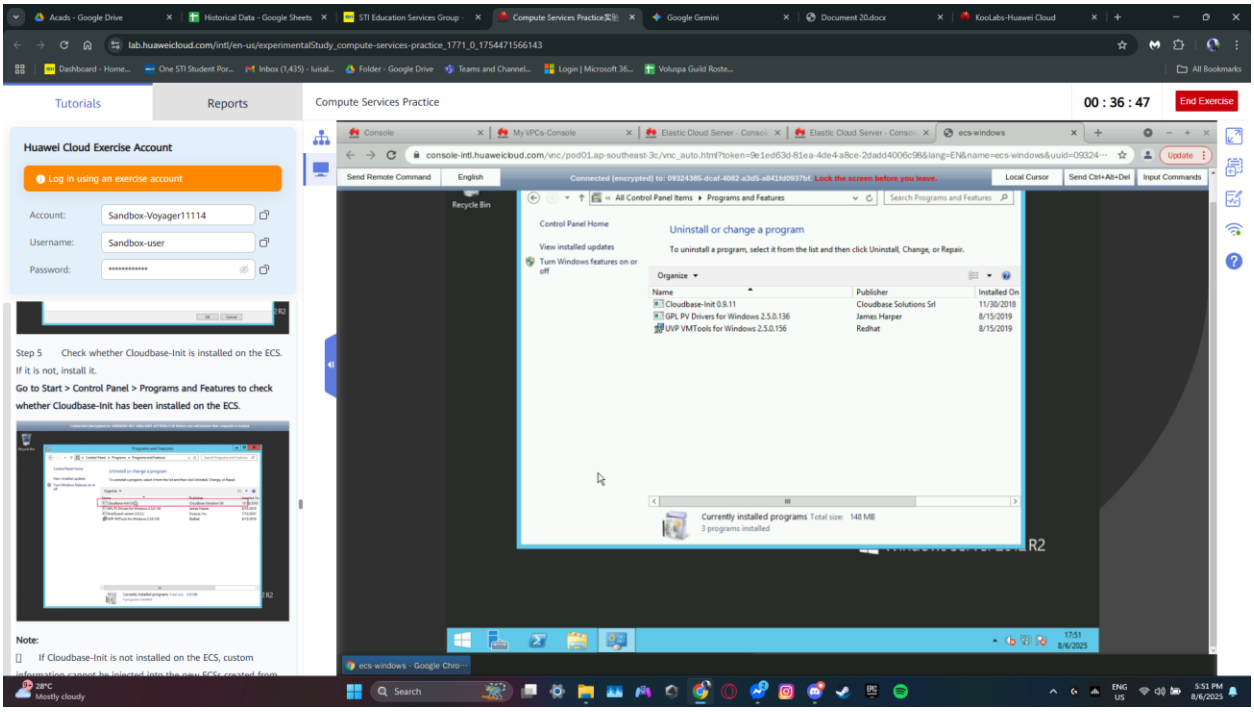
Tutorials
Reports
Compute Services Practice
00 : 36 : 47
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
Step 5 Check whether Cloudbase-Init is installed on the ECS. If it is not, install it.
Go to Start > Control Panel > Programs and Features to check whether Cloudbase-Init has been installed on the ECS.
Note:
If Cloudbase-Init is not installed on the ECS, custom
Uninstall or change a program
Cloudbase-Init 0.9.11
GPL PV Drivers for Windows 2.5.0.136
UVP VMTools for Windows 2.5.0.156

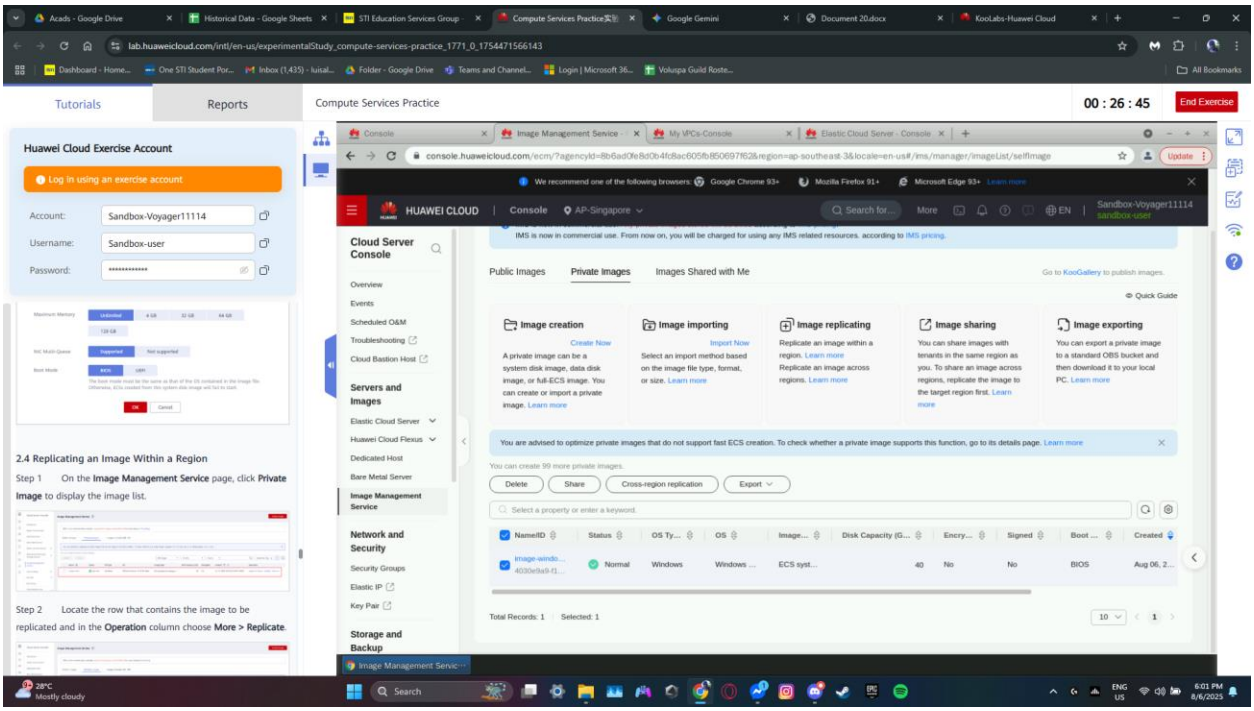
Tutorials
Reports
Compute Services Practice
00 : 26 : 45
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
2.4 Replicating an Image Within a Region
Step 1 On the Image Management Service page, click Private Image to display the image list.
Step 2 Locate the row that contains the image to be replicated and in the Operation column choose More > Replicate.
HUAWEI CLOUD
Console
Cloud Server Console
Public Images
Private Images
Images Shared with Me
Image creation
Image importing
Image replicating
Image sharing
Image exporting
Delete
Share
Cross-region replication
Export
Image Management Service

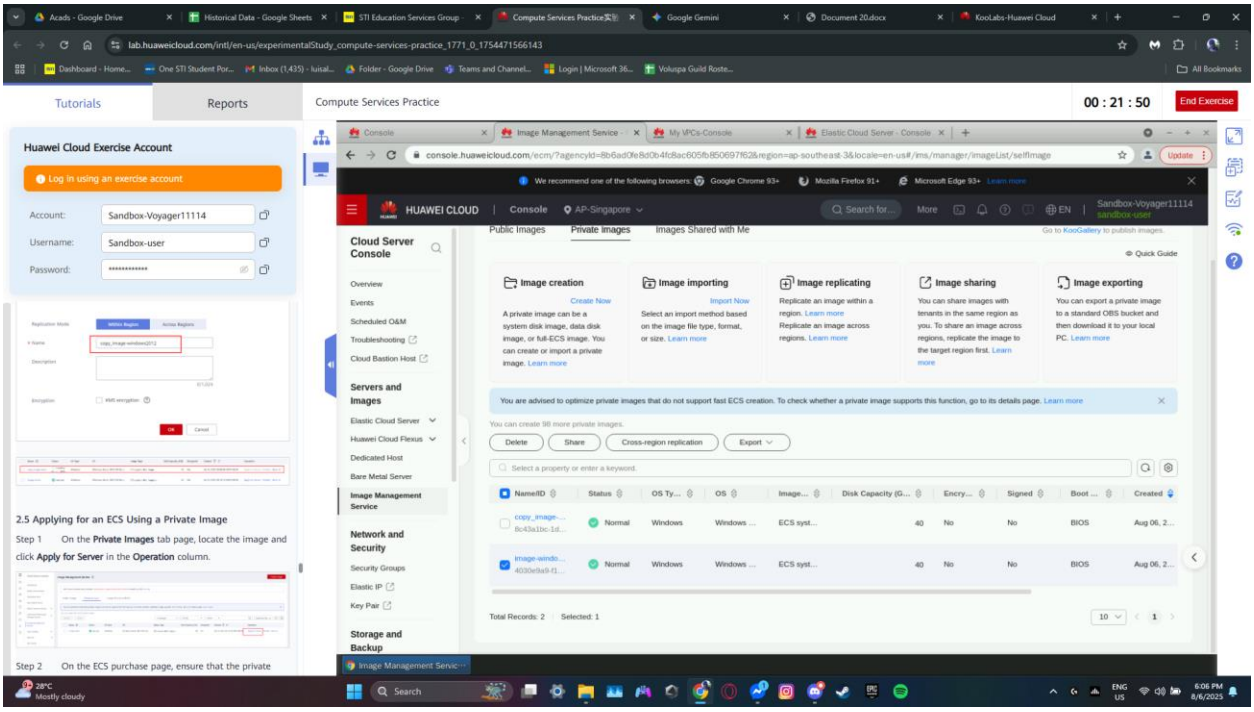
Tutorials
Reports
Compute Services Practice
00 : 21 : 50
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
2.5 Applying for an ECS Using a Private Image
Step 1 On the Private Images tab page, locate the image and click Apply for Server in the Operation column.
Step 2 On the ECS purchase page, ensure that the private
HUAWEI CLOUD
Console
Cloud Server Console
Public Images
Private Images
Images Shared with Me
Image creation
Image importing
Image replicating
Image sharing
Image exporting
Delete
Share
Cross-region replication
Export
Image Management Service

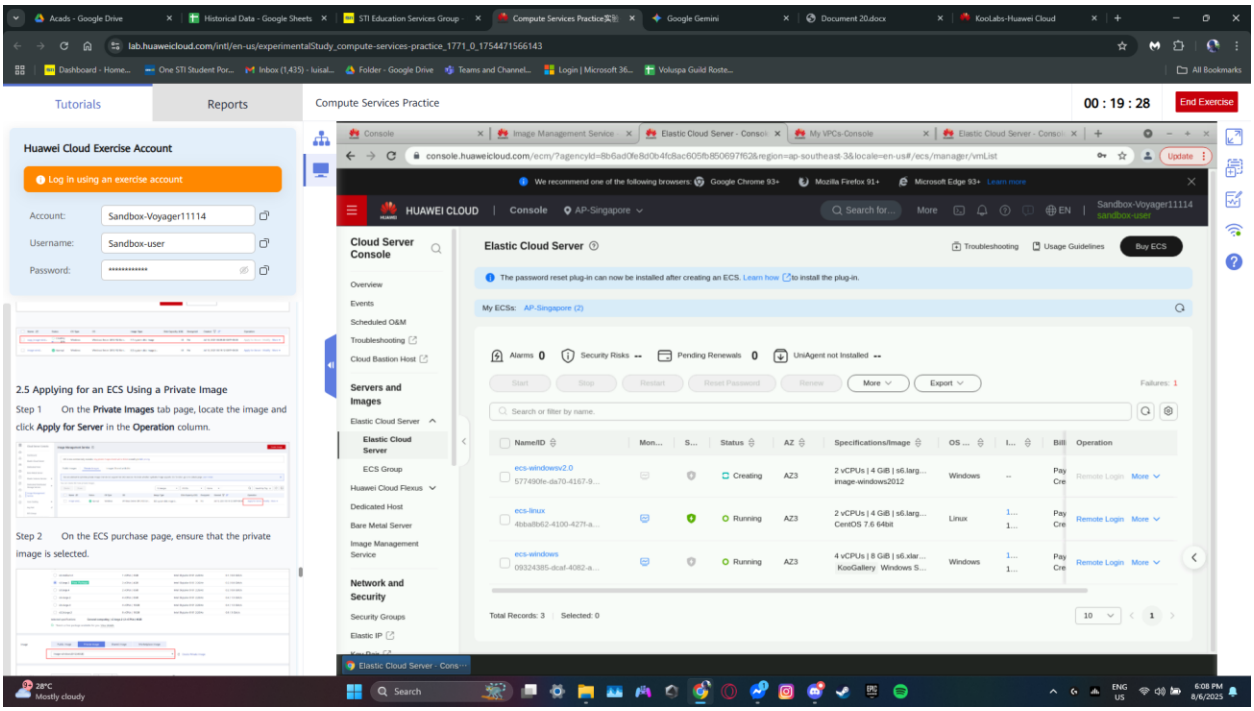
Tutorials
Reports
Compute Services Practice
00 : 19 : 28
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
2.5 Applying for an ECS Using a Private Image
Step 1 On the Private Images tab page, locate the image and click Apply for Server in the Operation column.
Step 2 On the ECS purchase page, ensure that the private image is selected.
HUAWEI CLOUD
Console
Elastic Cloud Server
Cloud Server Console
Servers and Images
Network and Security

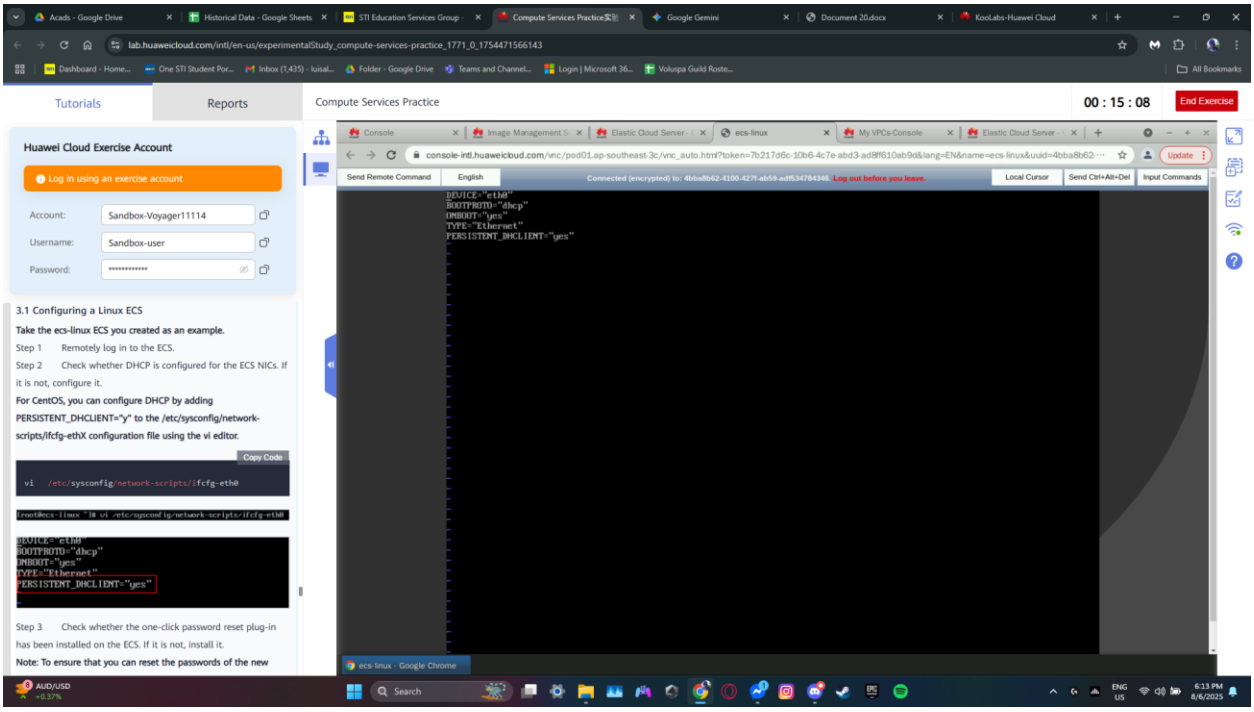
Tutorials
Reports
Compute Services Practice
00 : 15 : 08
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password:
3.1 Configuring a Linux ECS
Take the ecs-linux ECS you created as an example.
Step 1 Remotely log in to the ECS.
Step 2 Check whether DHCP is configured for the ECS NICs. If it is not, configure it.
For CentOS, you can configure DHCP by adding PERSISTENT_DHCLIENT="y" to the /etc/sysconfig/network-scripts/ifcfg-ethX configuration file using the vi editor.
Copy Code
vi /etc/sysconfig/network-scripts/ifcfg-eth0
Step 3 Check whether the one-click password reset plug-in has been installed on the ECS. If it is not, install it.
Note: To ensure that you can reset the passwords of the new
DEVICE="eth0"
BOOTPROTO="dhcp"
ONBOOT="yes"
TYPE="Ethernet"
PERSISTENT_DHCLIENT="yes"

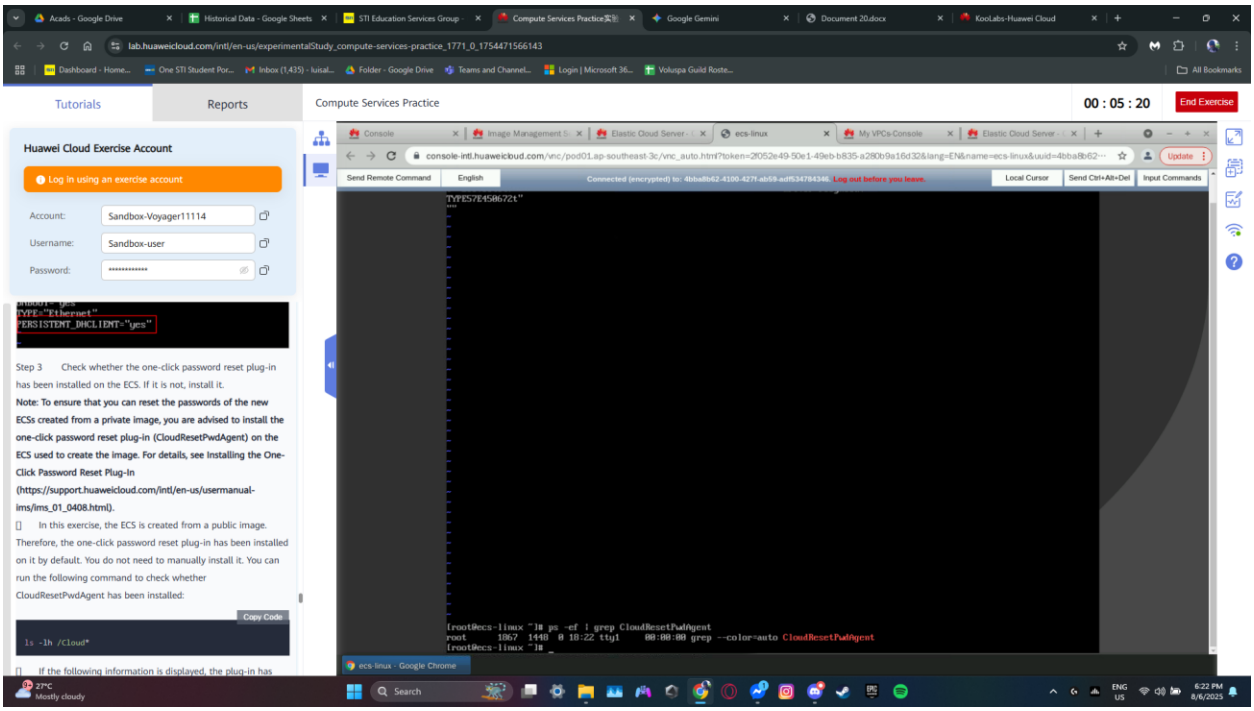
Tutorials
Reports
Compute Services Practice
00 : 05 : 20
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password: ••••••••••••
TYPE="Ethernet"
PERSISTENT_DHCLIENT="yes"
Step 3 Check whether the one-click password reset plug-in has been installed on the ECS. If it is not, install it.
Note: To ensure that you can reset the passwords of the new ECSs created from a private image, you are advised to install the one-click password reset plug-in (CloudResetPwdAgent) on the ECS used to create the image. For details, see Installing the One-Click Password Reset Plug-in (https://support.huaweicloud.com/intl/en-us/usermanual-ims/ims_01_0408.html).
In this exercise, the ECS is created from a public image. Therefore, the one-click password reset plug-in has been installed on it by default. You do not need to manually install it. You can run the following command to check whether CloudResetPwdAgent has been installed:
Copy Code
ls -lh /Cloud*
If the following information is displayed, the plug-in has
[root@ecs-linux ~]# ps -ef | grep CloudResetPwdAgent
root 1867 1440 0 10:22 ttyl 00:00:00 grep --color=auto CloudResetPwdAgent
[root@ecs-linux ~]#

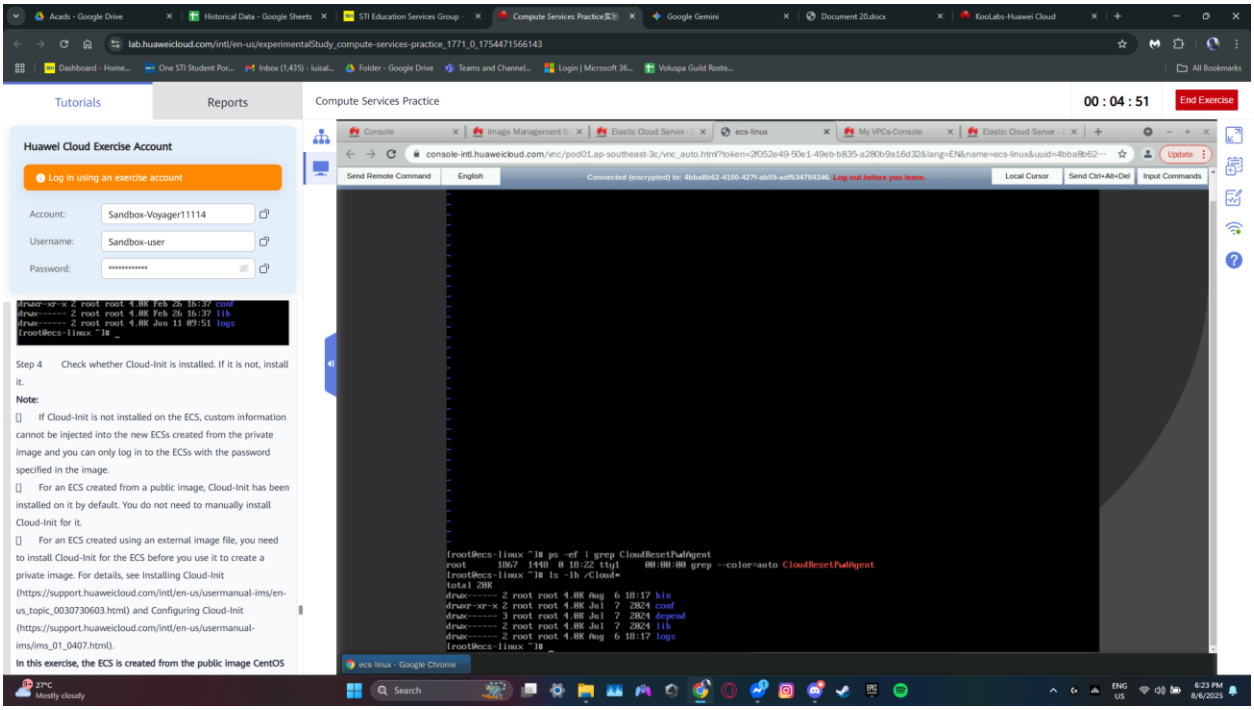
Tutorials
Reports
Compute Services Practice
00 : 04 : 51
End Exercise
Huawei Cloud Exercise Account
Log in using an exercise account
Account: Sandbox-Voyager11114
Username: Sandbox-user
Password: ••••••••••••
Step 4 Check whether Cloud-Init is installed. If it is not, install it.
Note:
If Cloud-Init is not installed on the ECS, custom information cannot be injected into the new ECSs created from the private image and you can only log in to the ECSs with the password specified in the image.
For an ECS created from a public image, Cloud-Init has been installed on it by default. You do not need to manually install Cloud-Init for it.
For an ECS created using an external image file, you need to install Cloud-Init for the ECS before you use it to create a private image. For details, see Installing Cloud-Init (https://support.huaweicloud.com/intl/en-us/usermanual-ims/en-us_topic_0030730603.html) and Configuring Cloud-Init (https://support.huaweicloud.com/intl/en-us/usermanual-ims/ims_01_0407.html).
In this exercise, the ECS is created from the public image CentOS
[root@ecs-linux ~]# ps -ef | grep CloudResetPwdAgent
root 1867 1440 0 10:22 ttyl 00:00:00 grep --color=auto CloudResetPwdAgent
[root@ecs-linux ~]# ls -lh /Cloud*
total 28K
drwx------ 2 root root 4.0K Aug 6 10:17 bin
drwxr-xr-x 2 root root 4.0K Jul 7 2024 conf
drwx------ 3 root root 4.0K Jul 7 2024 depend
drwx------ 2 root root 4.0K Jul 7 2024 lib
drwx------ 2 root root 4.0K Aug 6 10:17 logs
[root@ecs-linux ~]#

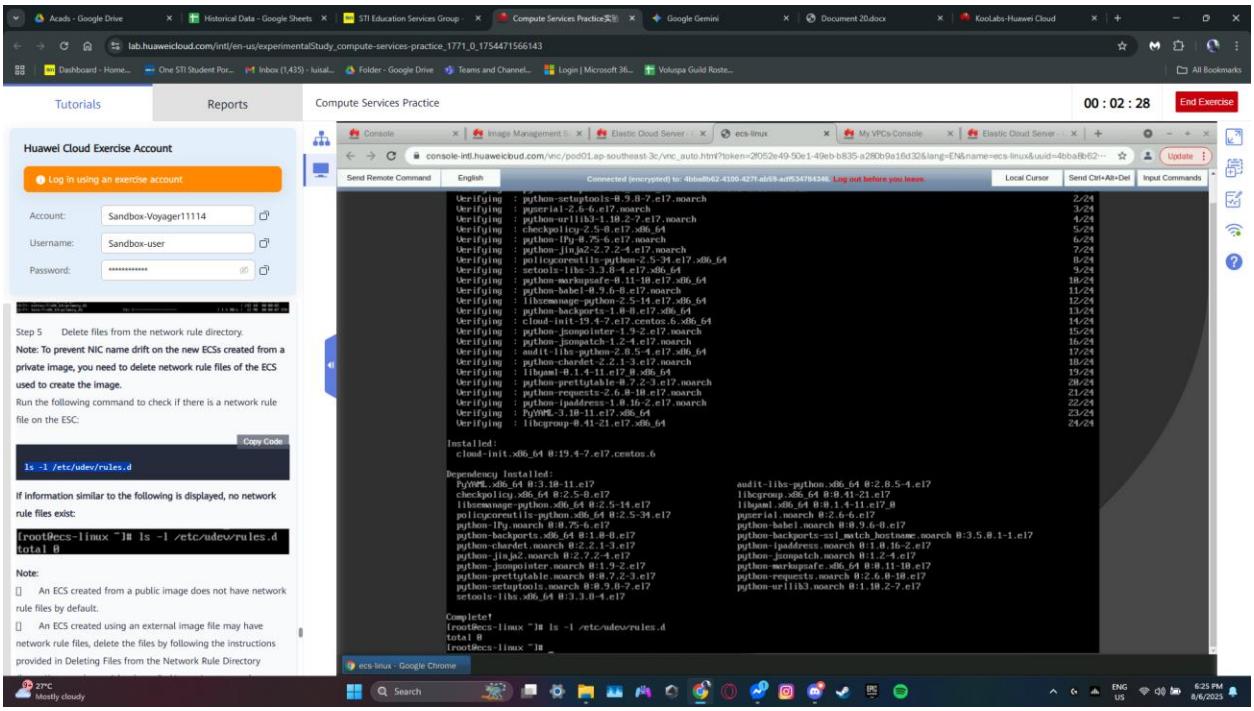

Which is easier to create, Windows ECS or Linux ECS? Elaborate on your answer.

While I didn't follow the instruction carefully because the instruction on the elms tells to do up until to step 15 while I did till the times run out, I found out that when just creating ECS, they are both easy to create since you just need a proper guide on setting up and creating ECS. After trying to finish it to the end however, it was easier to setup the Windows ECS rather than Linux ECS for the following reason. Primarily was that Windows being more on click type while Linux was more on typing type approach. It usually depends on the people that if they are familiar with windows, it was easier to setup and if they were familiar to Linux, it was easier setup. Overall, I could say that windows ECS would be much easier since windows are widely used rather than Linux.