


ARP POISONING ATTACKS


1 ettercap Sniffing starten

- ▶ `ettercap -G`
- ▶ Sniff → Unified Sniffing

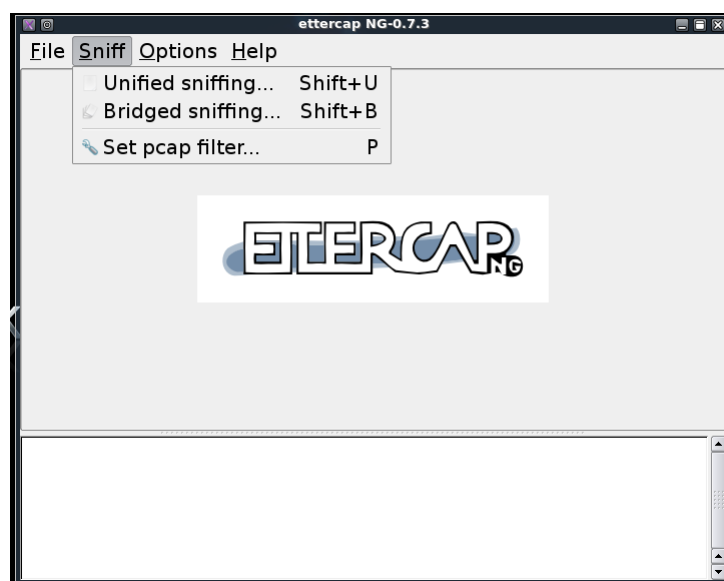


2 Netzwerk scannen

- ▶ Hosts → Scan for hosts

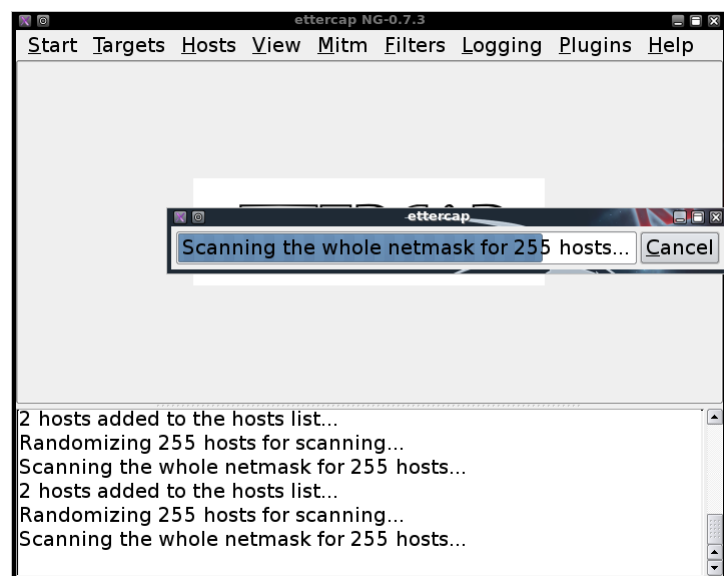


3 Targets definieren

- ▶ Hosts → Host List
- ▶ Target 1: Gateway
- ▶ Target 2: Windows XP VM

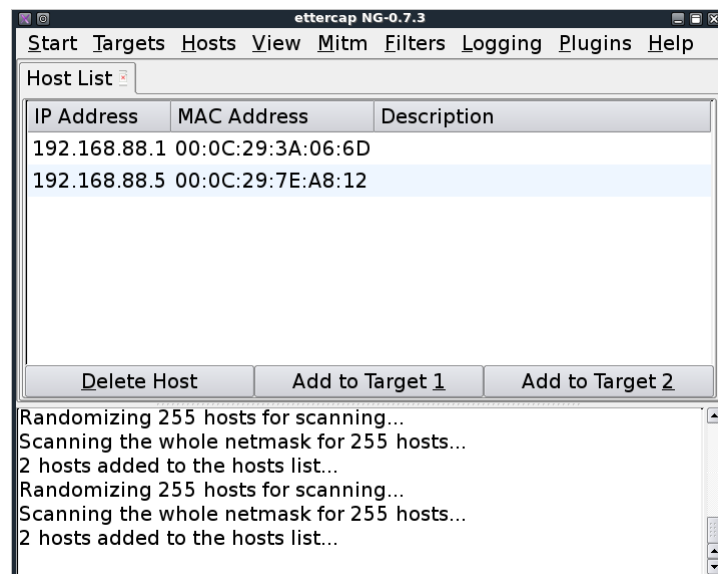


4 Man in the middle Attacke

- ▶ Mitm → ARP poisoning...

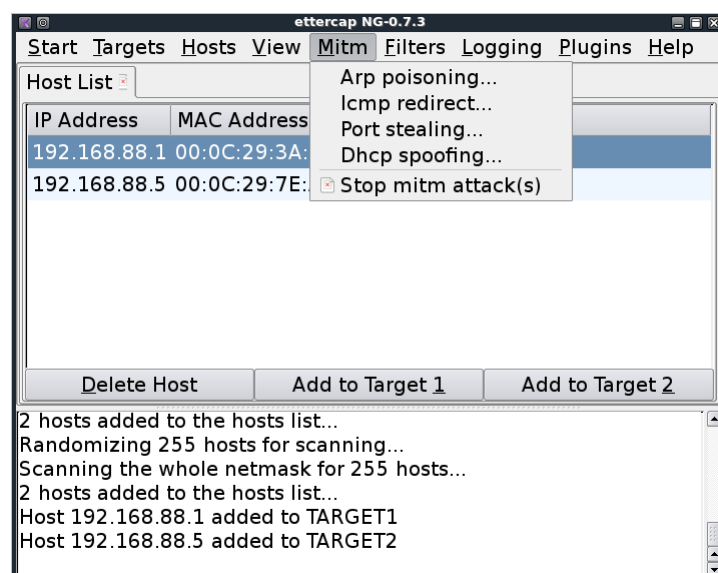

5 Attacke starten

- ▶ Start → Start sniffing

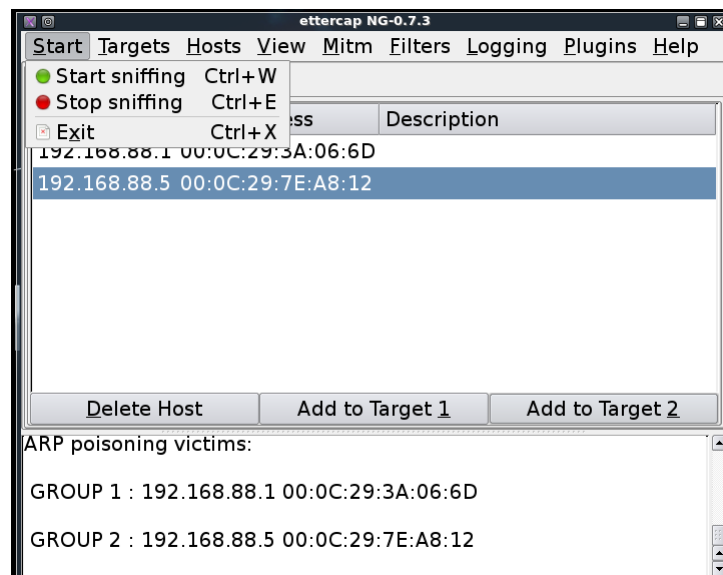

6 Erfolg prüfen

- ▶ Erfolg prüfen mittels Plugin
- ▶ Plugins → Manage Plugins → chk_poison

